



Engineering Solutions & Electromagnetic Compatibility Services

**FCC Part 15.256 & Industry Canada RSS-Gen  
Class II Permissive Change Report**

|                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                     |                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| <b>Test Laboratory:</b><br><br>Rhein Tech Laboratories, Inc.      Tel: 703-689-0368<br>360 Herndon Parkway      Fax: 703-689-2056<br>Suite 1400      www.rheintech.com<br>Herndon, VA 20170<br>E-Mail: atcbinfo@rheintech.com |                                                                                                                                                                                                                                                                                                                                                          | <b>Applicant:</b><br><br>VEGA Grieshaber KG      Tel: 49-7836-50113<br>Am Hohenstein 113<br>D-77761 Schiltach<br>Germany<br>Contact: Juergen Motzer |                            |
| <b>FCC ID IC</b>                                                                                                                                                                                                              | O6QPS60XW1<br>3892A-PS60XW1                                                                                                                                                                                                                                                                                                                              | <b>Test Report Date</b>                                                                                                                             | February 27, 2017          |
| <b>Platform</b>                                                                                                                                                                                                               | N/A                                                                                                                                                                                                                                                                                                                                                      | <b>RTL Work Order #</b>                                                                                                                             | 2016252                    |
| <b>Model</b>                                                                                                                                                                                                                  | VEGAPULS 69                                                                                                                                                                                                                                                                                                                                              | <b>RTL Quote #</b>                                                                                                                                  | QRTL16-252B                |
| <b>FCC Classification</b>                                                                                                                                                                                                     | DXX – Part 15 Low Power Communication Device Transmitter                                                                                                                                                                                                                                                                                                 |                                                                                                                                                     |                            |
| <b>FCC Rule Part(s)/Guidance</b>                                                                                                                                                                                              | Part 15C, 15.256: Radio Frequency Devices<br><br>FCC 14-2: ET Docket No. 10-23: Amendment of Part 15 of the Commission's Rules To Establish Regulations for Level Probing Radars and Tank Level Probing Radars in the Frequency Bands 5.925-7.250 GHz, 24.05-29.00 GHz and 75-85 GHz<br><br>KDB 890966-D01 Meas Level Probing Radars V01 (April 4, 2014) |                                                                                                                                                     |                            |
| <b>Test Procedures</b>                                                                                                                                                                                                        | ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices<br>ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz                                                 |                                                                                                                                                     |                            |
| <b>Industry Canada</b>                                                                                                                                                                                                        | RSS-Gen Issue 5: General Requirements and Information for the Certification of Radio Apparatus<br>RSS-211 Level Probing Radar Equipment                                                                                                                                                                                                                  |                                                                                                                                                     |                            |
| <b>Digital Interface Information</b>                                                                                                                                                                                          | Digital Interface was found to be compliant                                                                                                                                                                                                                                                                                                              |                                                                                                                                                     |                            |
|                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                     |                            |
| <b>Frequency Range (GHz)</b>                                                                                                                                                                                                  | <b>Output Power (W) Conducted</b>                                                                                                                                                                                                                                                                                                                        | <b>Frequency Tolerance</b>                                                                                                                          | <b>Emission Designator</b> |
| 77                                                                                                                                                                                                                            | 0.0024*                                                                                                                                                                                                                                                                                                                                                  | N/A                                                                                                                                                 | N/A                        |

\* +/-1 dBm deviation from original power value well within uncertainty of RF power measurement

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, Industry Canada RSS-Gen, RSS-211, ANSI C63.10, and ANSI C63.4.

Signature: 

Date: February 27, 2017

Typed/Printed Name: Desmond A. Fraser

Position: President

*This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and VEGA Grieshaber KG. The test results relate only to the item(s) tested.*

*These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB. Refer to certificate and scope of accreditation AT-1445.*

## Table of Contents

|       |                                                                                                          |    |
|-------|----------------------------------------------------------------------------------------------------------|----|
| 1     | General Information .....                                                                                | 5  |
| 1.1   | Scope.....                                                                                               | 5  |
| 1.2   | Test Facility.....                                                                                       | 5  |
| 1.3   | Related Submittal(s) and Grant(s).....                                                                   | 5  |
| 1.3.1 | Additional Pertinent Facts .....                                                                         | 5  |
| 1.4   | Modifications.....                                                                                       | 5  |
| 2     | Tested System Details .....                                                                              | 6  |
| 2.1   | Test Distance.....                                                                                       | 8  |
| 3     | Modulated Bandwidth – ANSI C63.10 6.9, FCC 14-2 (§15.256(f)(1)), IC RSS-Gen 4.6.....                     | 9  |
| 3.1   | Modulated Bandwidth Test Procedure - FCC 14-2 (§15.256(f)(1)), IC RSS-Gen 4.6.1.....                     | 9  |
| 3.2   | Limits .....                                                                                             | 9  |
| 3.3   | Modulated Bandwidth Test Data .....                                                                      | 9  |
| 4     | Radiated Emissions – ANSI C63.10 6.3, FCC §15.256(g)(3), IC RSS-Gen 4.8 .....                            | 11 |
| 4.1   | Radiated Fundamental Emissions Test Procedure – FCC §15.256(g)(3); IC RSS-Gen 4.8 .....                  | 11 |
| 4.2   | Radiated Fundamental Emissions Test Data .....                                                           | 11 |
| 4.3   | Calculation of Average EIRP Value from Peak EIRP Value .....                                             | 15 |
| 4.3.1 | Calculated Average EIRP Value .....                                                                      | 15 |
| 4.4   | Radiated Emissions – ANSI C63.10 6.3, FCC §15.256(h)(k); IC RSS-Gen 4.9 .....                            | 16 |
| 4.5   | Radiated Emissions Harmonics/Spurious Test Procedure - FCC §15.256(h)(k); IC RSS-Gen 4.9.....            | 16 |
| 4.6   | Radiated Emissions Harmonics/Spurious Test Data.....                                                     | 16 |
| 4.7   | Radiated Emissions Unintentional/Digital Test Data .....                                                 | 38 |
| 5     | Antenna Beam-width & Antenna Side Lobe - FCC 14-2 (§15.256(i) & (j)), IC RSS-211 5.2(a) & 5.2(c).....    | 40 |
| 5.1   | Antenna Beam-width & Antenna Side Lobe Data - FCC 14-2 (§15.256(i) & (j)), RSS-211 5.2(a) & 5.2(c) ..... | 40 |
| 6     | Frequency Stability ANSI C63.10 6.8, FCC 14-2 (§15.256(f)(2)), IC RSS-Gen 4.7 .....                      | 41 |
| 6.1   | Frequency Stability Test Procedure - FCC 14-2 (§15.256(f)(2)), IC RSS-Gen 4.7 .....                      | 41 |
| 6.2   | FCC §15.256(f)(2) Limit.....                                                                             | 41 |
| 6.3   | Temperature-Voltage Frequency Stability Test Data .....                                                  | 41 |
| 7     | AC Conducted Emissions - ANSI C63.10 6.2, Part §15.207, IC RSS-Gen 7.2.4.....                            | 43 |
| 7.1   | Test Methodology for Conducted Line Emissions Measurements – Part §15.207, IC RSS-Gen .....              | 43 |
| 7.2.4 | .....                                                                                                    | 43 |
| 7.2   | Conducted Line Emissions Test Procedure .....                                                            | 43 |
| 7.3   | Conducted Line Emissions Test Data .....                                                                 | 44 |
| 8     | Conclusion .....                                                                                         | 46 |

## Table of Figures

|                                                  |   |
|--------------------------------------------------|---|
| Figure 2-1: Configuration of Tested System ..... | 8 |
|--------------------------------------------------|---|

## Table of Tables

|                                                                                   |    |
|-----------------------------------------------------------------------------------|----|
| Table 2-1: Equipment under Test (EUT) .....                                       | 6  |
| Table 2-2: Additional Test Equipment Used .....                                   | 6  |
| Table 3-1: 10 dB Modulated Bandwidth - §15.256(f)(1) .....                        | 9  |
| Table 3-2: Modulated Bandwidth Test Equipment .....                               | 10 |
| Table 4-1: Radiated Fundamental Emissions (EIRP in 1 MHz, Average Detector) ..... | 12 |
| Table 4-2: Radiated Fundamental Emissions (EIRP in 50 MHz, Peak Detector) .....   | 12 |
| Table 4-3: Radiated Fundamental Emissions Test Equipment .....                    | 15 |
| Table 4-4: Radiated Spurious (140 – 200 GHz) – Average.....                       | 17 |
| Table 4-5: Radiated Spurious (140 – 200 GHz) – Peak.....                          | 18 |
| Table 4-6: Radiated Spurious Second Harmonic – Average.....                       | 19 |
| Table 4-7: Radiated Second Harmonic – Peak .....                                  | 20 |
| Table 4-8: Radiated Noise Floor Calculation (90 GHz – 140 GHz) – Average .....    | 21 |
| Table 4-9: Radiated Noise Floor Calculation (90 GHz – 140 GHz) – Peak .....       | 22 |
| Table 4-10: Radiated Noise Floor Calculation (75 GHz - 90 GHz) – Average .....    | 23 |
| Table 4-11: Radiated Noise Floor Calculation (75 GHz - 90 GHz) – Peak.....        | 24 |
| Table 4-12: Radiated Noise Floor Calculation (50 GHz - 75 GHz) – Average .....    | 25 |
| Table 4-13: Radiated Noise Floor Calculation (50 GHz - 75 GHz) – Peak.....        | 26 |
| Table 4-14: Radiated Noise Floor Calculation (40 GHz – 50 GHz) – Average.....     | 27 |
| Table 4-15: Radiated Noise Floor Calculation (40 GHz – 50 GHz) – Peak.....        | 28 |
| Table 4-16: Radiated Noise Floor Calculation (26.5 GHz – 40 GHz) – Average.....   | 29 |
| Table 4-17: Radiated Noise Floor Calculation (26.5 GHz – 40 GHz) – Peak.....      | 30 |
| Table 4-18: Radiated Noise Floor Calculation (18 GHz – 26.5 GHz) .....            | 31 |
| Table 4-19: Radiated Noise Floor Calculation (12.4 GHz - 18 GHz) .....            | 32 |
| Table 4-20: Radiated Noise Floor Calculation (8.2 GHz – 12.4 GHz) .....           | 33 |
| Table 4-21: Radiated Noise Floor Calculation (4 GHz – 8.2 GHz) .....              | 34 |
| Table 4-22: Radiated Noise Floor Calculation (2 GHz - 4 GHz) .....                | 35 |
| Table 4-23: Radiated Noise Floor Calculation (1 GHz - 2 GHz) .....                | 36 |
| Table 4-24: Radiated Noise Floor Calculation (0.03 GHz - 1 GHz) .....             | 37 |
| Table 4-25: Digital Radiated Emissions Test Data .....                            | 38 |
| Table 4-26: Radiated Emissions Test Equipment.....                                | 39 |
| Table 6-1: Temperature Frequency Stability .....                                  | 41 |
| Table 6-2: Voltage Frequency Stability.....                                       | 42 |
| Table 6-3: Frequency Stability Test Equipment.....                                | 42 |
| Table 7-1: Conducted Line Emissions Test Equipment .....                          | 46 |

### Table of Plots

|            |                                                                 |    |
|------------|-----------------------------------------------------------------|----|
| Plot 3-1:  | 10 dB Modulated Bandwidth .....                                 | 10 |
| Plot 4-1:  | Radiated Fundamental (EIRP in 1 MHz) .....                      | 13 |
| Plot 4-2:  | Radiated Fundamental (EIRP in 50 MHz) .....                     | 14 |
| Plot 4-3:  | Radiated Spurious Emissions (140 – 200 GHz) - Average .....     | 17 |
| Plot 4-4:  | Radiated Spurious Emissions (140 – 200 GHz) - Peak .....        | 18 |
| Plot 4-5:  | Radiated Spurious Emissions (Second Harmonic) – Average .....   | 19 |
| Plot 4-6:  | Radiated Spurious Emissions (Second Harmonic) - Peak .....      | 20 |
| Plot 4-7:  | Radiated Spurious Emissions (90 GHz – 140 GHz) - Average .....  | 21 |
| Plot 4-8:  | Radiated Spurious Emissions (90 GHz - 140 GHz) - Peak .....     | 22 |
| Plot 4-9:  | Radiated Spurious Emissions (75 GHz - 90 GHz) - Average .....   | 23 |
| Plot 4-10: | Radiated Spurious Emissions (75 GHz - 90 GHz) - Peak .....      | 24 |
| Plot 4-11: | Radiated Spurious Emissions (50 GHz - 75 GHz) - Average .....   | 25 |
| Plot 4-12: | Radiated Spurious Emissions (50 GHz - 75 GHz) - Peak .....      | 26 |
| Plot 4-13: | Radiated Spurious Emissions (40 GHz – 50 GHz) – Average .....   | 27 |
| Plot 4-14: | Radiated Spurious Emissions (40 GHz – 50 GHz) – Peak .....      | 28 |
| Plot 4-15: | Radiated Spurious Emissions (26.5 GHz – 40 GHz) – Average ..... | 29 |
| Plot 4-16: | Radiated Spurious Emissions (26.5 GHz – 40 GHz) – Peak .....    | 30 |
| Plot 4-17: | Radiated Spurious Emissions (18 GHz – 26.5 GHz) .....           | 31 |
| Plot 4-18: | Radiated Spurious Emissions (12.4 GHz - 18 GHz) .....           | 32 |
| Plot 4-19: | Radiated Spurious Emissions (8.2 GHz – 12.4 GHz) .....          | 33 |
| Plot 4-20: | Radiated Spurious Emissions (4 GHz – 8.2 GHz) .....             | 34 |
| Plot 4-21: | Radiated Spurious Emissions (2 GHz - 4 GHz) .....               | 35 |
| Plot 4-22: | Radiated Spurious Emissions (1 GHz - 2 GHz) .....               | 36 |
| Plot 4-23: | Radiated Spurious Emissions (0.03 GHz - 1 GHz) .....            | 37 |
| Plot 7-1:  | Conducted Emissions Transmit - Phase .....                      | 44 |
| Plot 7-2:  | Conducted Emissions Transmit – Neutral .....                    | 45 |

### Table of Appendixes

|             |                                                 |    |
|-------------|-------------------------------------------------|----|
| Appendix A: | Agency Authorization Letter .....               | 47 |
| Appendix B: | FCC & IC Confidentiality Request Letter .....   | 48 |
| Appendix C: | IC Letters .....                                | 49 |
| Appendix D: | Canadian-Based Representative Attestation ..... | 50 |
| Appendix E: | Description of Changes .....                    | 51 |
| Appendix F: | Technical Operational Description .....         | 52 |
| Appendix G: | Block Diagram .....                             | 53 |
| Appendix H: | Schematics .....                                | 54 |
| Appendix I: | Manual .....                                    | 55 |
| Appendix J: | Internal Photographs .....                      | 56 |
| Appendix K: | Test Configuration Photographs .....            | 57 |

### Table of Photographs

|               |                                                |    |
|---------------|------------------------------------------------|----|
| Photograph 1: | EUT .....                                      | 7  |
| Photograph 2: | Radiated Emissions – Front View (<1 GHz) ..... | 57 |
| Photograph 3: | Radiated Emissions – Rear View (<1 GHz) .....  | 58 |
| Photograph 4: | Radiated Emissions – Front View (>1 GHz) ..... | 59 |
| Photograph 5: | Radiated Emissions – Rear View (>1 GHz) .....  | 60 |
| Photograph 6: | AC Conducted Emissions – Front View .....      | 61 |
| Photograph 7: | AC Conducted Emissions - Rear View .....       | 62 |

## **1 General Information**

### **1.1 Scope**

This Class II measurement report is prepared on behalf of VEGA Grieshaber KG in accordance with the applicable Federal Communications Commission and Industry Canada rules and regulations.

The Equipment Under Test (EUT) was the Model VEGAPULS 69 Level Probing Radar, FCC ID: O6QPS60XW1, IC: 3892A-PS60XW1, tested with one antenna.

### **1.2 Test Facility**

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc., 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

### **1.3 Related Submittal(s) and Grant(s)**

This FCC §15.209/IC RSS-211 report is intended to support a Class II application for a composite device. The original FCC grant was issued June 15, 2015 and the original IC certificate was issued November 20, 2015. The PULS 69 operates at 77GHz channel (sweeping from 76.5GHz -77.5GHz). The 79GHz channel (78.5-79.5GHz) for the PULS69 is no longer be supported. If the 79GHz channel (PULS69) is needed a new CL2PC application will be submitted. The changes are:

- A New front-end PCB with new PLL. The New front-end PCB is as a resulted on an end-of-life component. Please refer to document CIIPC\_Changes for explanation of the change.

#### **1.3.1 Additional Pertinent Facts**

- The user manual includes references to software updates; software updates do not change any TX parameters (i.e. power, gain, frequency, BW, etc.).
- The lab power supply was EMI unfiltered. The EUT is typically used in industrial applications where an AC-to-DC unfiltered power supply supplies DC power. As such, this represents typical use.
- Though the EUT appears large enough to have the two-part FCC statement on it, the applicant states that there that there is not any space left on the type label to add the FCC two-part statement. An exclamation point is placed on the label with a notice to review the user manual wherein all necessary information and the FCC two-part statement is included. The document number of the manual is also printed on the label. The applicant also states that they have submitted the same type of FCC labeling in previous submittals of their sensors and they were acceptable to the FCC.
- Any bandwidth values in the user manual are mean values of the E and H-planes, to make it easier for the grantee's customers to understand what they are.

### **1.4 Modifications**

None

## 2 Tested System Details

The test sample was received on November 28, 2016 and February 24, 2017. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this testing, as applicable.

**Table 2-1: Equipment under Test (EUT)**

| Part                                             | Manufacturer       | Model               | Serial Number | FCC ID     | Cable Type | RTL Bar Code |
|--------------------------------------------------|--------------------|---------------------|---------------|------------|------------|--------------|
| VEGAPULS 69                                      | VEGA Grieshaber KG | PS69 IXTTCAHXAKJXXX | 35036990      | 06QPS60XW1 | N/A        | 22286        |
| Electronics                                      | VEGA Grieshaber KG | PS60HW.-03          | XXXXXXXXX     | N/A        | N/A        | 22197        |
| 36mm Threaded Integrated Horn Antenna (24.3 dBi) | VEGA Grieshaber KG | N/A                 | N/A           | N/A        | N/A        | N/A          |


**Table 2-2: Additional Test Equipment Used**

| Part               | Manufacturer                 | Model         | Serial Number | FCC ID | Cable Type                              | RTL Bar Code |
|--------------------|------------------------------|---------------|---------------|--------|-----------------------------------------|--------------|
| DC Power Supply    | Hewlett Packard              | 6024A         | 1912A00331    | N/A    | 1 m un-shielded                         | 901635       |
| AC Adapter (12VDC) | CINCON Electronics Co., Ltd. | TR45A12 11A02 | 45120-0016390 | N/A    | 1m unshielded DC/1.9 feet unshielded DC | 15932        |

**Photograph 1: EUT**



**Figure 2-1: Configuration of Tested System**

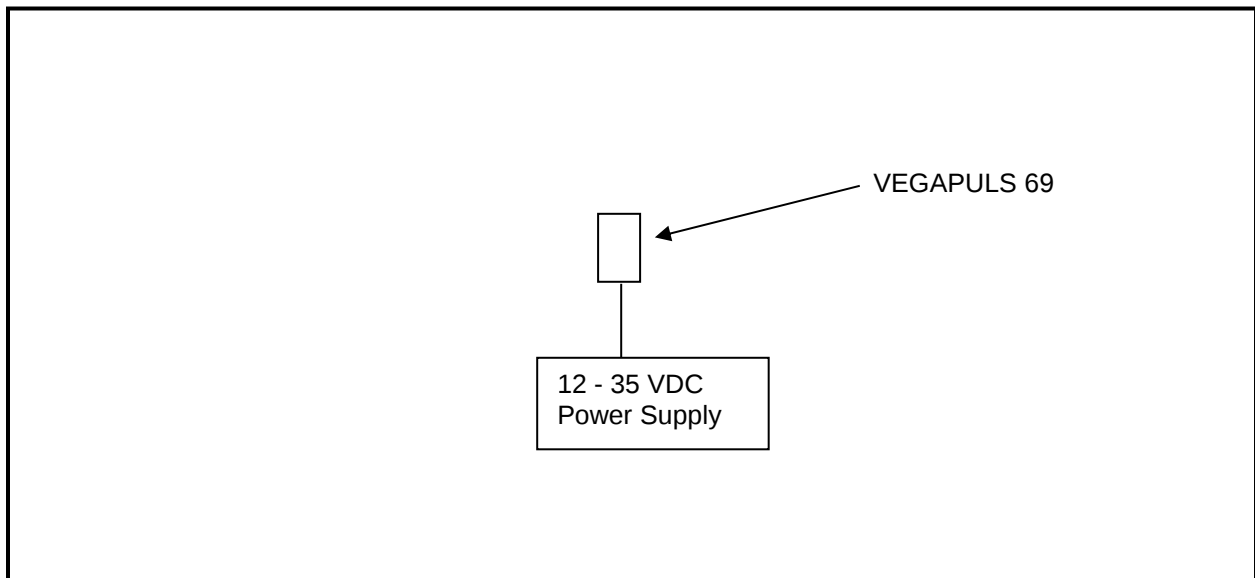

## 2.1 Test Distance

The final radiated emissions tests were performed at a 3 meter horizontal distance from the edge of the radar to the test antenna. The EUT was also investigated at closer test distances in order to discern any emissions.

### 3 Modulated Bandwidth – ANSI C63.10 6.9, FCC 14-2 (§15.256(f)(1)), IC RSS-Gen 4.6

#### 3.1 Modulated Bandwidth Test Procedure - FCC 14-2 (§15.256(f)(1)), IC RSS-Gen 4.6.1

The minimum 10 dB bandwidth was measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 1 MHz and the video bandwidth set at 3 MHz. The spectrum analyzer's mixer mode resulted in an overlapping bandwidth image with the actual image and a ghost image. The analyzer "Signal ID" and "Auto ID" were used to aid in discerning between the ghost images displayed by the mixer, the left and right markers can be calculated from twice the intermediate frequency of 404.4 MHz (808.8 MHz) from the ghost edge images to the actual bandwidth edges (distance between ghost images). The display markers could not be set to -10 dB from the peak since the spectral lines were completely vertical resulting in a noise floor placement. Max hold was used until the spectrum was adequately filled to portray the bandwidth and a plot was taken.

#### 3.2 Limits

(f) The fundamental bandwidth of an LPR emission is defined as the width of the signal between two points, one below and one above the center frequency, outside of which all emissions are attenuated by at least 10 dB relative to the maximum transmitter output power when measured in an equivalent resolution bandwidth.


(1) The minimum fundamental emission bandwidth shall be 50 MHz for LPR operation under the provisions of this section.

#### 3.3 Modulated Bandwidth Test Data

Table 3-1: 10 dB Modulated Bandwidth - §15.256(f)(1)

| Model              | 10 dB Bandwidth (MHz) | Minimum Limit (MHz) | Margin (MHz) |
|--------------------|-----------------------|---------------------|--------------|
| Electronics PS60HW | 1003                  | 50                  | -953         |

**Plot 3-1: 10 dB Modulated Bandwidth**

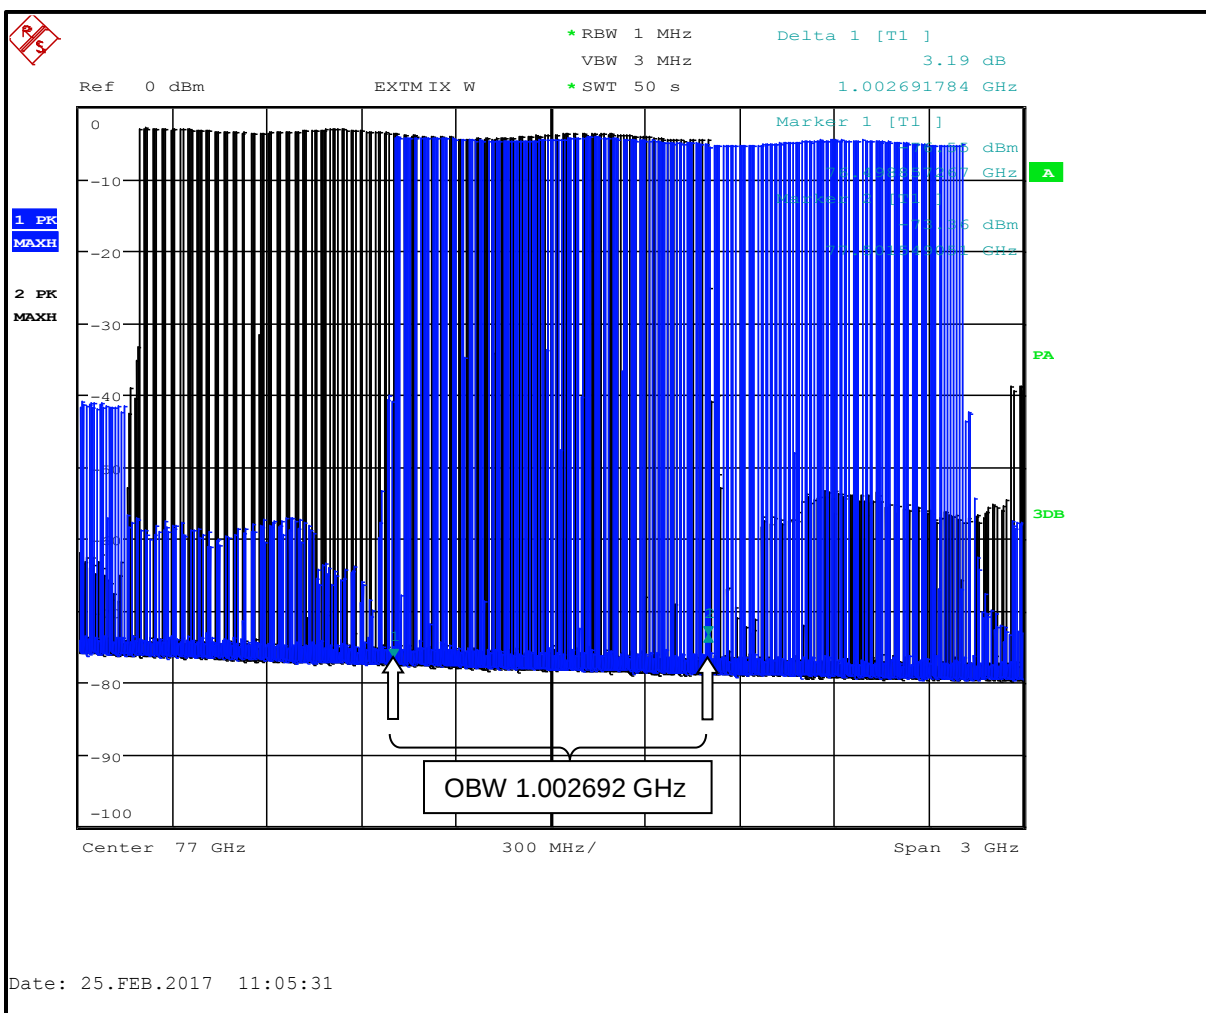

Marker 1: 76.498857267 GHz; Marker 2: 77.501549051 GHz; OBW = 1.002692 GHz

**Table 3-2: Modulated Bandwidth Test Equipment**

| RTL Asset # | Manufacturer    | Model     | Part Type                 | Serial Number | Calibration Due Date |
|-------------|-----------------|-----------|---------------------------|---------------|----------------------|
| 901581      | Rohde & Schwarz | FSU       | Spectrum Analyzer         | 1166.1660.50  | 3/22/18              |
| 901640      | Rohde & Schwarz | FS-Z110   | Mixer (75–110 GHz)        | 100010        | 4/2/17               |
| 900711      | ATM             | 10-443-6R | Horn Antenna (75-110 GHz) | 8051905-1     | 12/5/17              |

**Test Personnel:**

Dan Baltzell  
Test Engineer

*Daniel W. Baltzell*

Signature

February 25, 2017  
Date of Test

#### 4 Radiated Emissions – ANSI C63.10 6.3, FCC §15.256(g)(3), IC RSS-Gen 4.8

##### 4.1 Radiated Fundamental Emissions Test Procedure – FCC §15.256(g)(3); IC RSS-Gen 4.8

Radiated emissions of the fundamental was tested by “bore sighting” the main-beam emissions to produce the maximum realizable antenna coupling. The EUT was also checked in all three orthogonal planes. Measurement was based on an average detector for -3 dBm/1 MHz power density limit and peak detector for 34 dBm/50 MHz limit. Limits are -3 dBm/MHz and 34 dBm/50 MHz bandwidth (20 MHz was used). Since these limits are power density, no pulse desensitization correction factor is required. Both were also measured finding the maximum amplitude at 1 meter and switching from 1 MHz to 20 MHz resolution bandwidths. One meter measuring distance was used since the antenna gain calibration was accomplished at one meter, a correction was used in the correction to dBm as  $20 \log(1) = 0 \text{ dB}$ .

Limits: The EIRP limits for LPR operations in the bands authorized by this rule section are provided in the following table. These emission limits are based on bore sight measurements (i.e., measurements performed within the main beam of the LPR antenna).

| Frequency Band of Operation (GHz) | Average Emission Limit (EIRP in dBm measured in 1 MHz) | Peak Emission Limit (EIRP in dBm measured in 50 MHz) |
|-----------------------------------|--------------------------------------------------------|------------------------------------------------------|
| 5.925-7.250                       | -33                                                    | 7                                                    |
| 24.05-29.00                       | -14                                                    | 26                                                   |
| 75-85                             | -3                                                     | 34                                                   |

##### 4.2 Radiated Fundamental Emissions Test Data

Radiated measurements are converted from dBuV/m to dBm using the following equation from KDB 890966 6 b:

For radiated emission measurements

$$\text{EIRP (dBm)} = \text{field strength (dB}\mu\text{V/m)} - 104.8 + 20 \log D$$

where:

D is the measurement distance

All power averaging (RMS) emission levels are to be measured utilizing a 1 MHz resolution bandwidth with a one millisecond dwell time over each 1 MHz segment. The frequency span of the analyzer should equal the number of sampling bins times 1 MHz and the sweep rate of the analyzer should equal the number of sampling bins times one millisecond. The video bandwidth of the measurement instrument shall not be less than the resolution bandwidth and trace averaging shall not be employed. The RMS average emission measurement is to be repeated over multiple sweeps with the analyzer set for maximum hold until the amplitude stabilizes. The peak emission measurement is to be repeated over multiple sweeps with the analyzer set for maximum hold until the amplitude stabilizes.

NOTE: The number of sampling BINS used is 2101 corresponding to a span of 2100 MHz, and there are two pulses/second from the DUT; therefore, two pulses will occur per MHz in each second for proper RMS averaging. If one millisecond dwell/MHz is used it will cause artificially high RMS averaging levels per FCC TR 14-1007.

For ISSED, the standard ETSI EN 302 729 was used to test the EUT.


**Table 4-1: Radiated Fundamental Emissions (EIRP in 1 MHz, Average Detector)**

| Frequency (GHz) | Average Spectrum Analyzer Level (dBuV) | Antenna Correction Factor (dB/m) | Corrected Average Measurement (dBuV/m) | Converted to dBm | Limit (dBm) | Margin (dB) |
|-----------------|----------------------------------------|----------------------------------|----------------------------------------|------------------|-------------|-------------|
| 77              | 37.6                                   | 45.3                             | 82.9                                   | -12.4            | -3.0        | -9.4        |


**Table 4-2: Radiated Fundamental Emissions (EIRP in 50 MHz, Peak Detector)**

| Frequency (GHz) | Peak EIRP Measured (dBuV) | Site Correction Factor (dB/m) | Corrected Peak Measurement (dBuV/m) | Converted to dBm | Limit (dBm) | Margin (dB) |
|-----------------|---------------------------|-------------------------------|-------------------------------------|------------------|-------------|-------------|
| 77              | 78.1                      | 45.3                          | 123.4                               | 28.1             | 34.0        | -5.9        |

**Plot 4-1: Radiated Fundamental (EIRP in 1 MHz)**

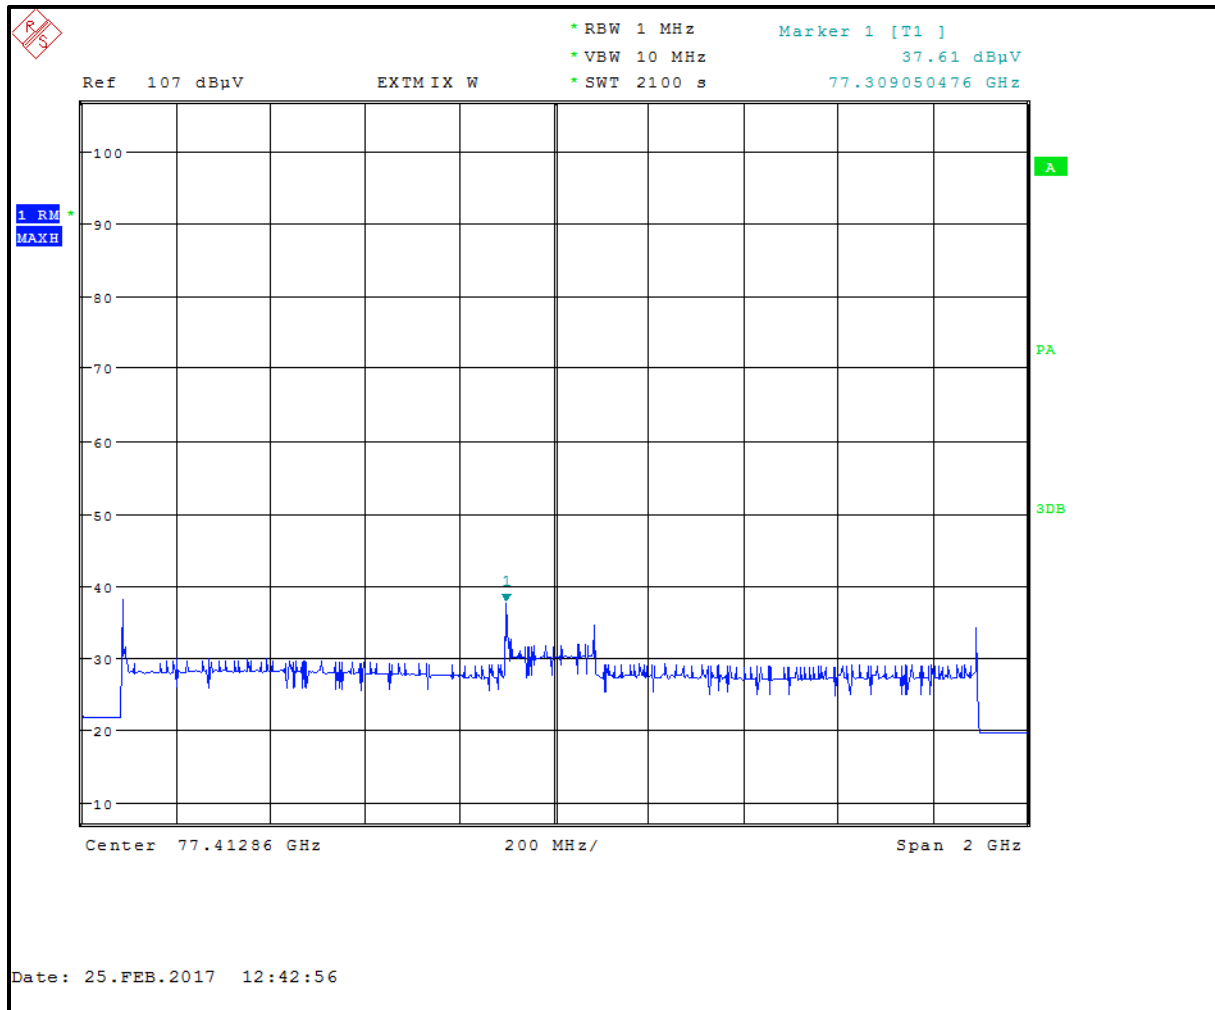

**Plot 4-2: Radiated Fundamental (EIRP in 50 MHz)**

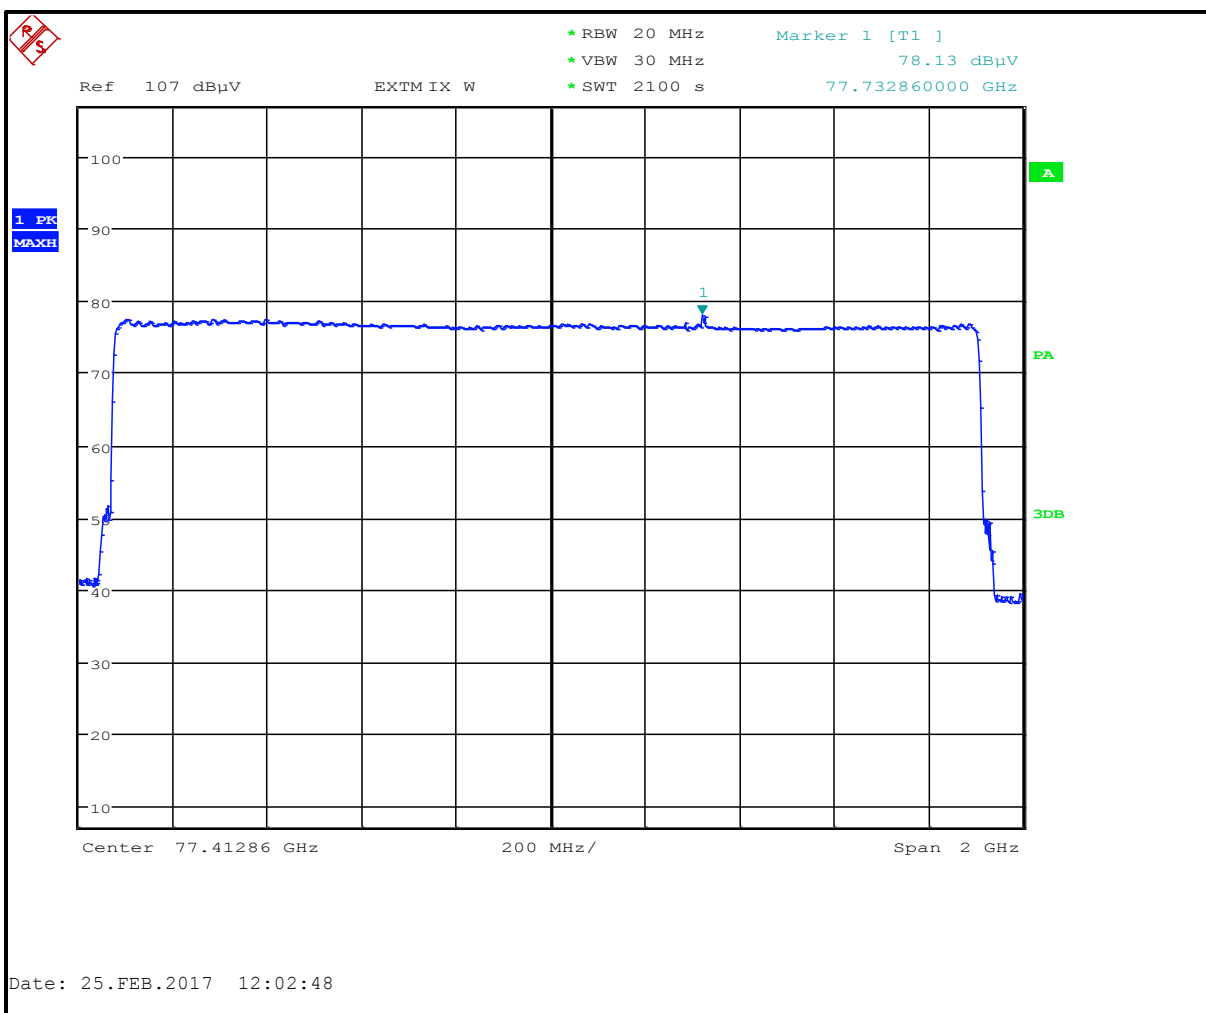

**Note:**

Per FCC 15.256(g)(2)(ii): The Rhode & Schwarz FSU 50 spectrum analyzer used a maximum video bandwidth resolution of 20 MHz, which is less than the required 50 MHz RBW. However, no bandwidth correction factor should be used for peak measurements, when the resolution is above 1 MHz since the amplitude is a carrier wave and no amplitude change occurs when the resolution bandwidth is higher than 1 MHz.

In the original FCC application report, two peak plots using 20 MHz and 1 MHz RBW bandwidths respectively were presented, which demonstrated that there are little or no differences between 20 MHz RBW measurement data and 1 MHz RBW measurement data when the EUT is a wave carrier device. As such in this report, only peak and average plots data are present as worst-case results. Furthermore, a peak-to-average EIRP data calculation is included in this report to show that the worst-case average EIRP test result is the measured average EIRP test result.

#### 4.3 Calculation of Average EIRP Value from Peak EIRP Value

Calculation of average dwell time,  $T_D = T_S / \Delta F$ , where  $T_S$  is the signal sweep frequency time in seconds and  $\Delta F$  is the signal sweep frequency span in MHz. The Average factor = the Average dwell time  $T_D$  / Cycle time for an Average factor, where Cycle time is the total time for a complete cycle of the signal including retrace and any other latency times.

##### 4.3.1 Calculated Average EIRP Value

$T_S = 0.00516s$ ; Cycle time = 0.0085s;  $\Delta F = 1002.7$  MHz  
 $T_D = 0.00516 / 1002.7 = 0.000005$ , Average factor =  $0.000005 / 0.0085 = 0.0006$   
Average EIRP value from Peak EIRP value 123.4 dBuV/m  
Avg Factor x Peak =  $0.0006 \times 10^{(123.4 \text{ dBuV/m} / 20)} = 887.5 \text{ uV} = 20\text{Log}(887.5) = 59 \text{ dBuV/m} = 59 \text{ dBuV/m} - 104.8 + 20\text{Log}(d) = -36.3 \text{ dBm}$  at 3 meters. The measured EIRP value = -12.4 dBm

The measured Average EIRP value is presented as worst case data.

**Table 4-3: Radiated Fundamental Emissions Test Equipment**

| RTL Asset # | Manufacturer    | Model     | Part Type                 | Serial Number | Calibration Due Date |
|-------------|-----------------|-----------|---------------------------|---------------|----------------------|
| 901581      | Rohde & Schwarz | FSU       | Spectrum Analyzer         | 1166.1660.50  | 3/22/18              |
| 901640      | Rohde & Schwarz | FS-Z110   | Mixer (75–110 GHz)        | 100010        | 4/2/17               |
| 900711      | ATM             | 10-443-6R | Horn Antenna (75-110 GHz) | 8051905-1     | 12/5/17              |

#### Test Personnel:

|                               |                                                                                                  |                                   |
|-------------------------------|--------------------------------------------------------------------------------------------------|-----------------------------------|
| Dan Baltzell<br>Test Engineer | <br>Signature | February 25, 2017<br>Date of Test |
|-------------------------------|--------------------------------------------------------------------------------------------------|-----------------------------------|

#### **4.4 Radiated Emissions – ANSI C63.10 6.3, FCC §15.256(h)(k); IC RSS-Gen 4.9**

#### **4.5 Radiated Emissions Harmonics/Spurious Test Procedure - FCC §15.256(h)(k); IC RSS-Gen 4.9**

Data was taken at, and corrected to, three meters. The EUT was checked in the three orthogonal planes with the receive antenna in both polarities. A resolution bandwidth of 100 kHz was used for frequencies less than 1000 MHz, and a resolution bandwidth of 1 MHz was used for frequencies greater than or equal to 1000 MHz.

Limit: Unwanted Emissions from LPR devices shall not exceed the general emission limit in §15.209 of this chapter.

#### **4.6 Radiated Emissions Harmonics/Spurious Test Data**

The plots were taken with the measuring antenna at a distance to provide sufficient signal to noise ratio for measurement, a distance of 10 mm corrected to 3 m is  $20 \log(0.01/3) = -49.5$  dB. The emissions from the EUT were generally investigated at 0.01 m, 0.1 m, and 3 m to ensure no indication of detectable emissions. A 1 cm distance was used to ensure a worst-case scenario and is equivalent to -49.5 dB.


To reduce errors given the significant mixer ghost images and their amplitudes on measurement plots, the analyzer has a built-in automated signal identification function, as well as an auto identification function, that could be used to identify real and ghost signals. However, the nature of the swept FMCW frequencies warrants that the automated identification function not be used. As a result, real signals were manually identified by calculating the LO. A real signal is dependent upon the LO frequency and selected harmonic of the first LO as:

$$f_{in} = n \cdot f_{LO} + f_{IF}$$

where  $f_{in}$  is the frequency of the signal,  
 $n$  is the order of the harmonic used for conversion,  
 $f_{LO}$  is the frequency of the first LO,  
and  $f_{IF}$  is the intermediate frequency 404.4 MHz

and was used to verify false images. Sweep time can be adjusted for various pulse duration to determine if false images might be overlaying real signals, and the above calculation applied to determine if they are real. Signal strength is increased by moving the receive antenna to the transmitted signal, thus overcoming analyzer dynamic range decrease due to mixer loss. As the image began its sweep, the individual CW pulse image was noted, as well as any CW which might be mixed in the bandwidth, using max hold, thus overcoming the problem of signal bandwidth  $> 2 \times IF$ . This was then compared to the IF, order of harmonic, and first LO frequency, and a manual determination made whether the requirements for validation were met.


**Plot 4-3: Radiated Spurious Emissions (140 – 200 GHz) - Average**

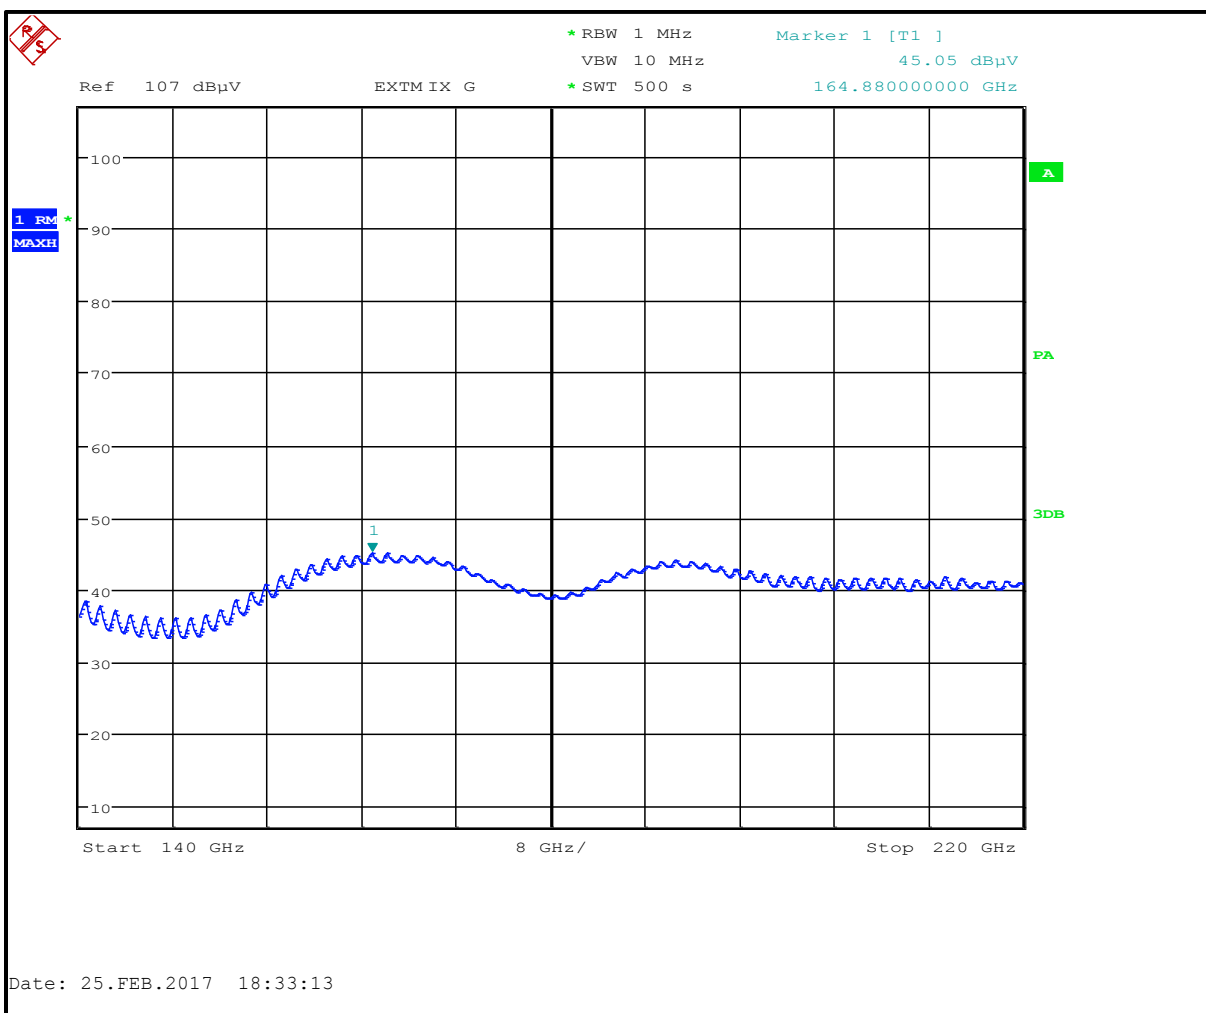

**Table 4-4: Radiated Spurious (140 – 200 GHz) – Average**

| Frequency (MHz) | Average EIRP Measured (dBuV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|------------------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 164880.000      | 45.1                         | 51.5                                  | -49.5                           | 47.1                           | 54.0           | -6.9        |


**Plot 4-4: Radiated Spurious Emissions (140 – 200 GHz) - Peak**

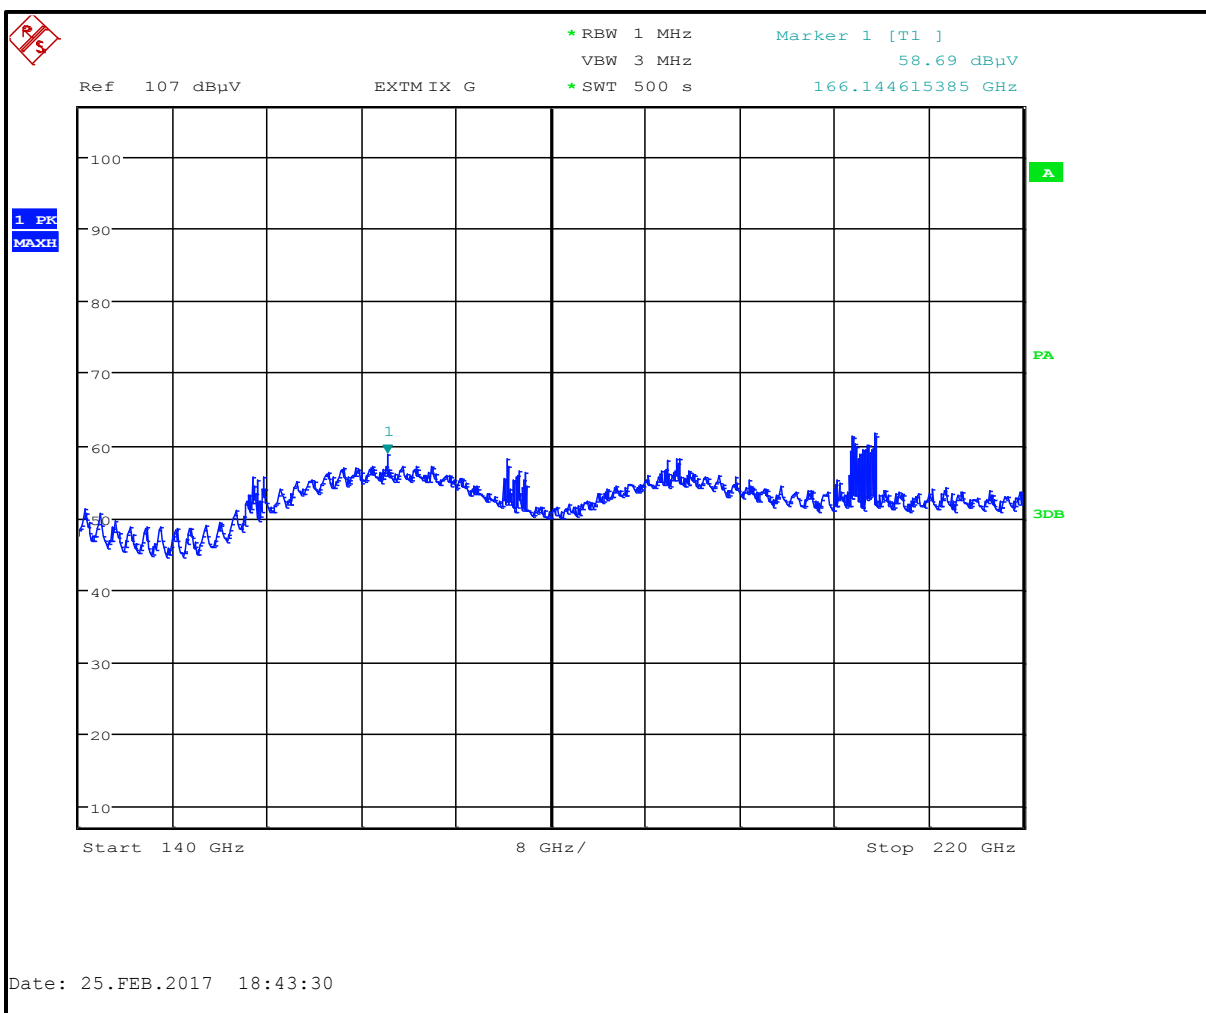

**Table 4-5: Radiated Spurious (140 – 200 GHz) – Peak**

| Frequency (MHz) | Peak EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|---------------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 166144.615      | 58.7                      | 51.6                                  | -49.5                           | 60.8                           | 74.0           | -13.2       |


**Plot 4-5: Radiated Spurious Emissions (Second Harmonic) – Average**

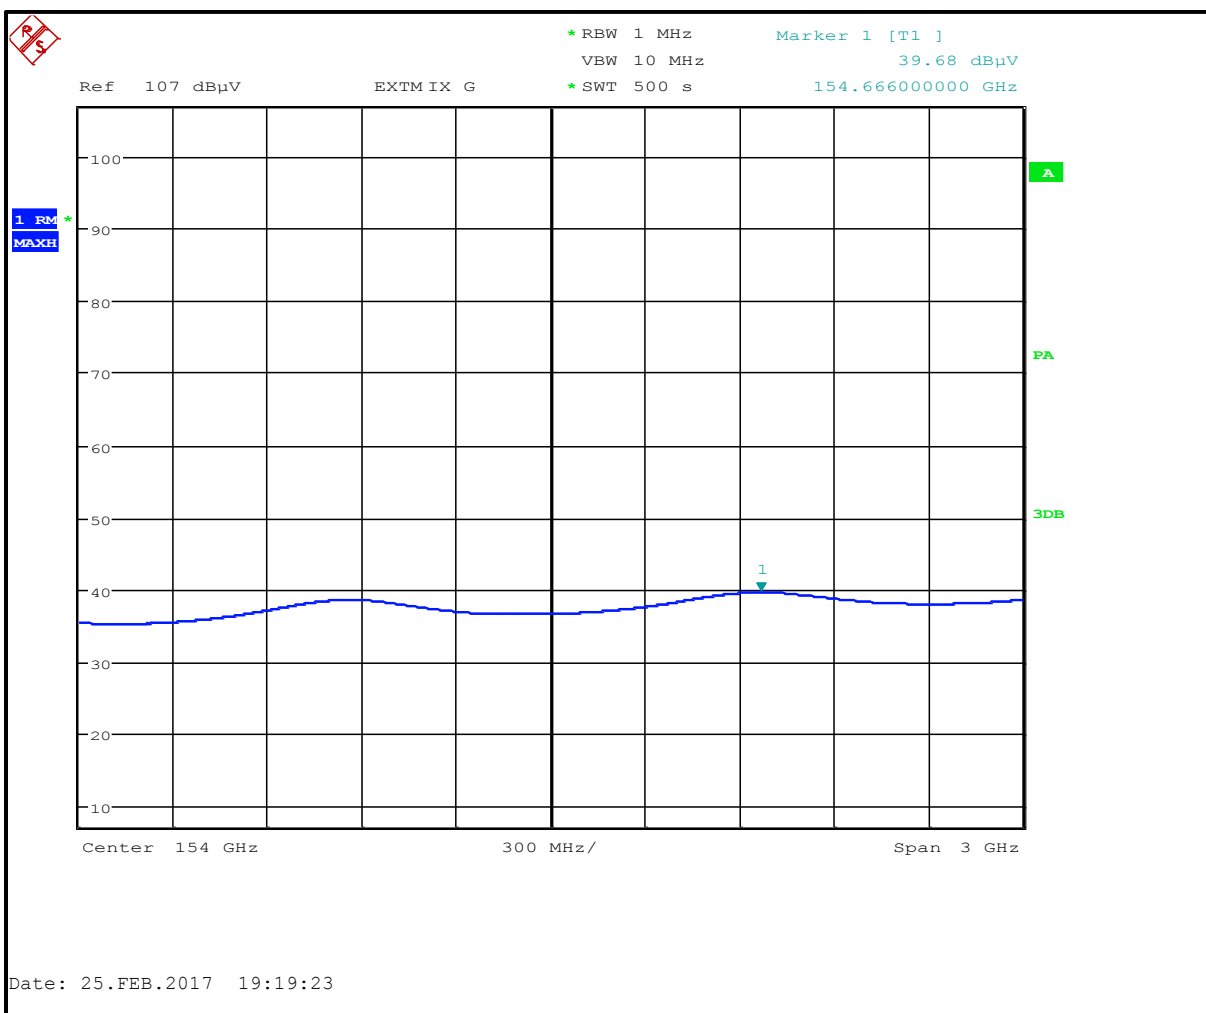

**Table 4-6: Radiated Spurious Second Harmonic – Average**

| Frequency (MHz) | Average EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|------------------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 154666.000      | 39.7                         | 51.0                                  | -49.5                           | 41.2                           | 54.0           | -12.8       |


**Plot 4-6: Radiated Spurious Emissions (Second Harmonic) - Peak**

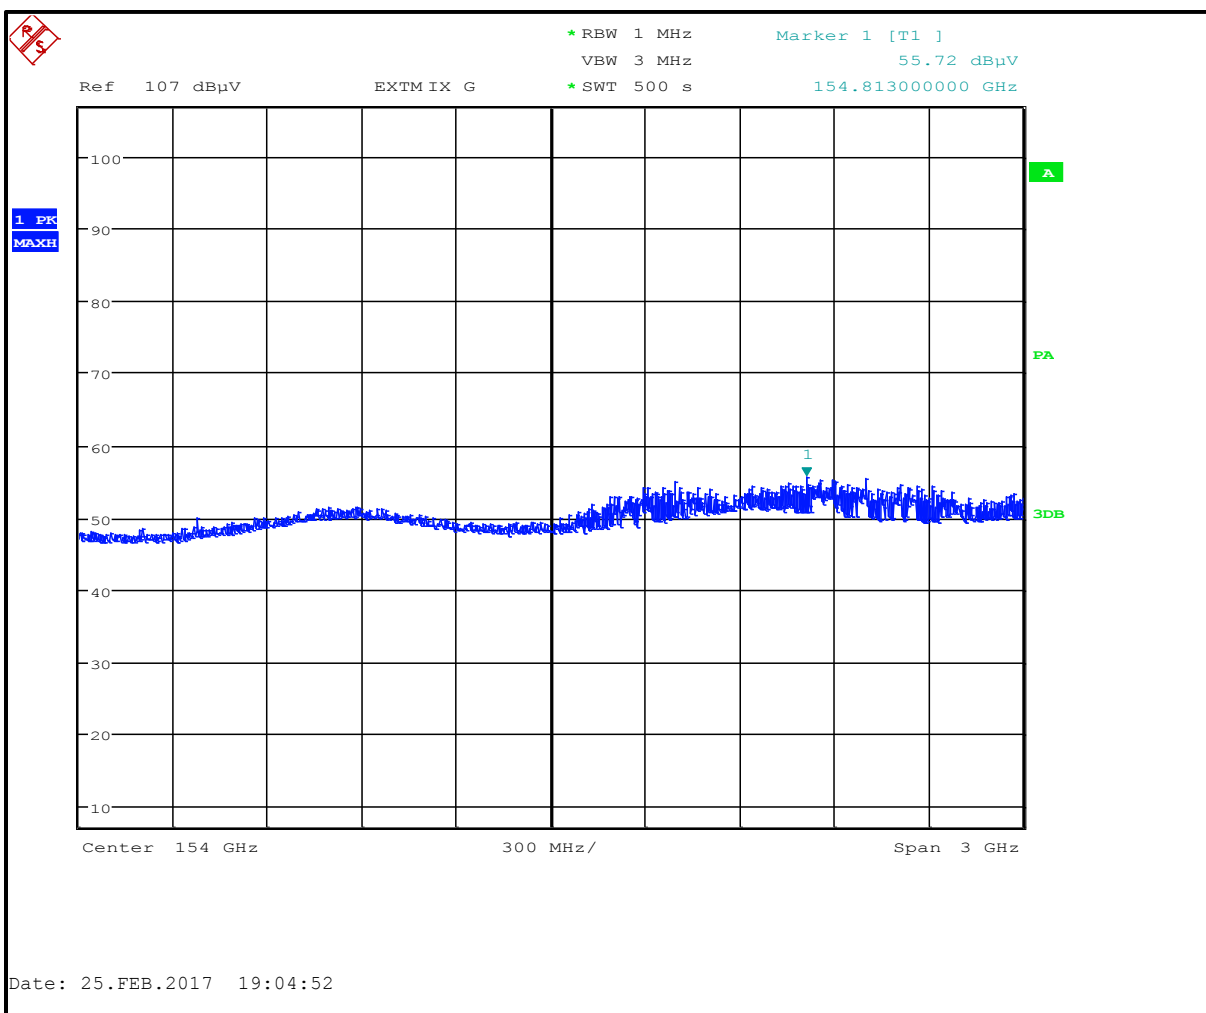

**Table 4-7: Radiated Second Harmonic – Peak**

| Frequency (MHz) | Average EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|------------------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 154813.000      | 55.7                         | 51.0                                  | -49.5                           | 57.2                           | 74.0           | -16.8       |


**Plot 4-7: Radiated Spurious Emissions (90 GHz – 140 GHz) - Average**

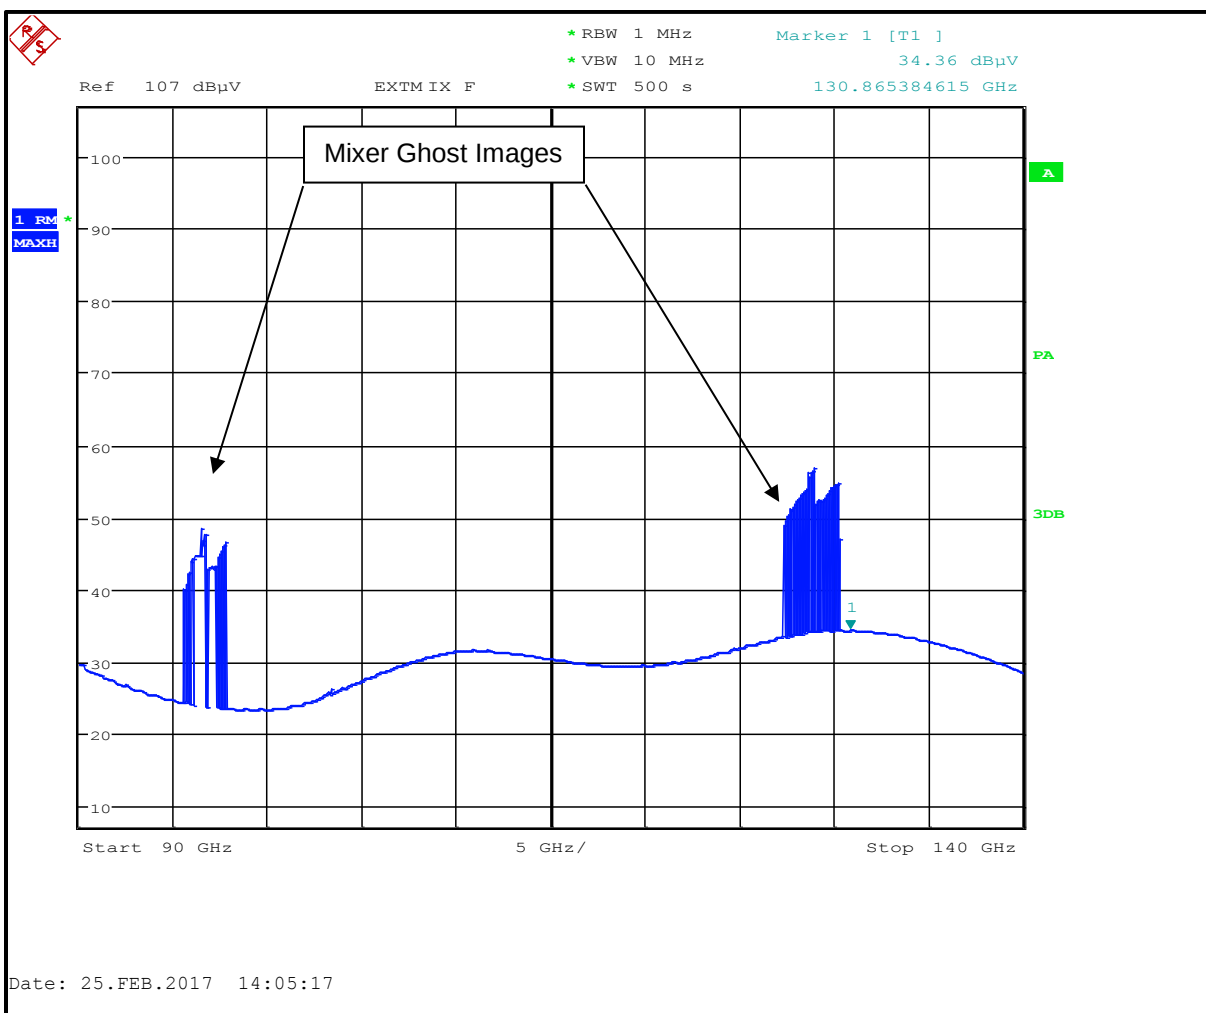

**Table 4-8: Radiated Noise Floor Calculation (90 GHz – 140 GHz) – Average**

| Frequency (MHz) | EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 130865.385      | 34.4                 | 48.5                                  | -49.5                           | 33.4                           | 54             | -20.6       |


**Plot 4-8: Radiated Spurious Emissions (90 GHz - 140 GHz) - Peak**

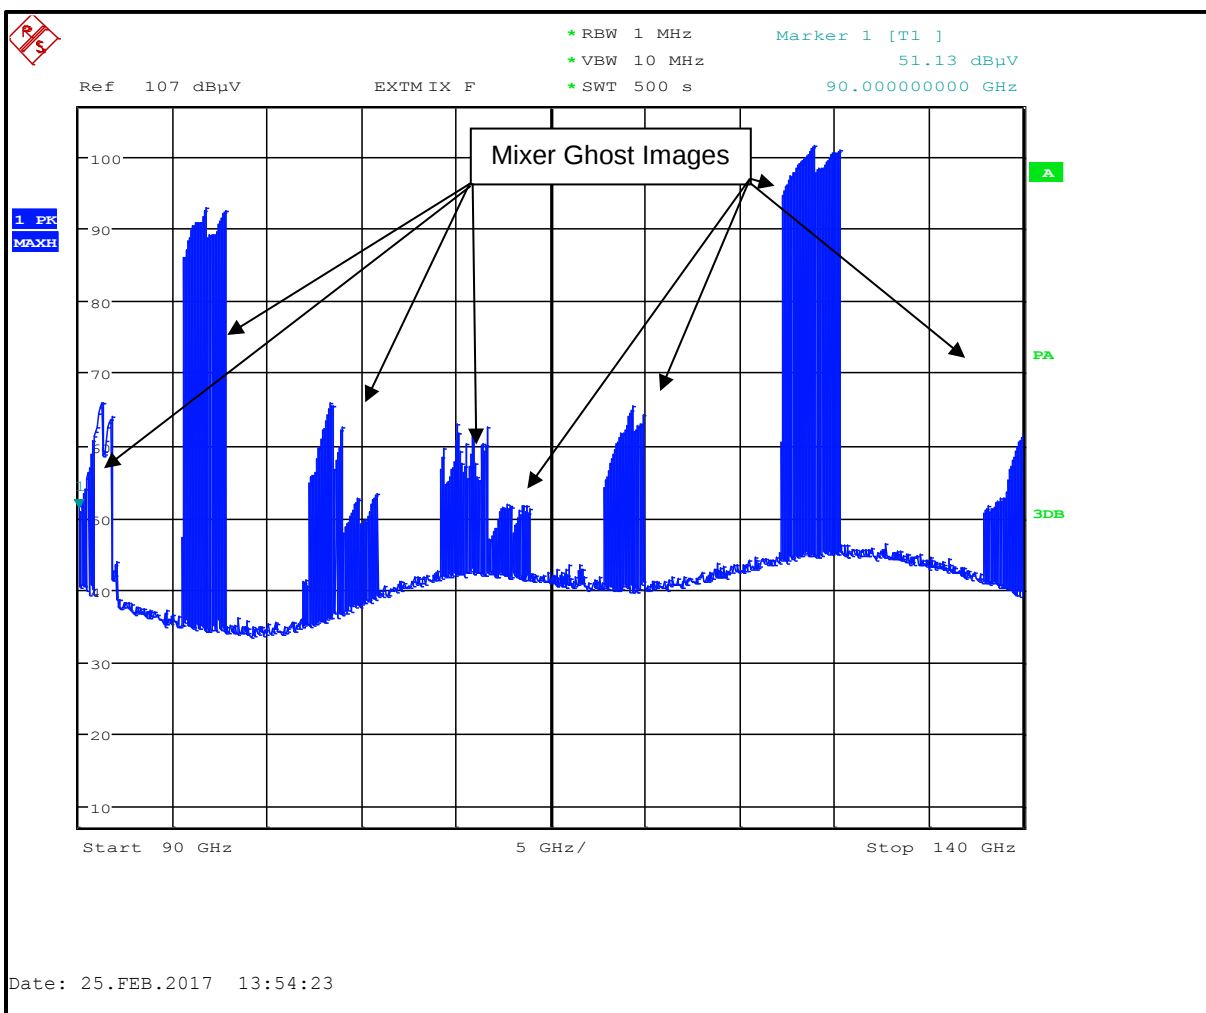

**Table 4-9: Radiated Noise Floor Calculation (90 GHz – 140 GHz) – Peak**

| Frequency (MHz) | EIRP Measured (dBuV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|----------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 90000.000       | 51.1                 | 48.5                                  | -49.5                           | 50.1                           | 74.0           | -23.9       |


**Plot 4-9: Radiated Spurious Emissions (75 GHz - 90 GHz) - Average**

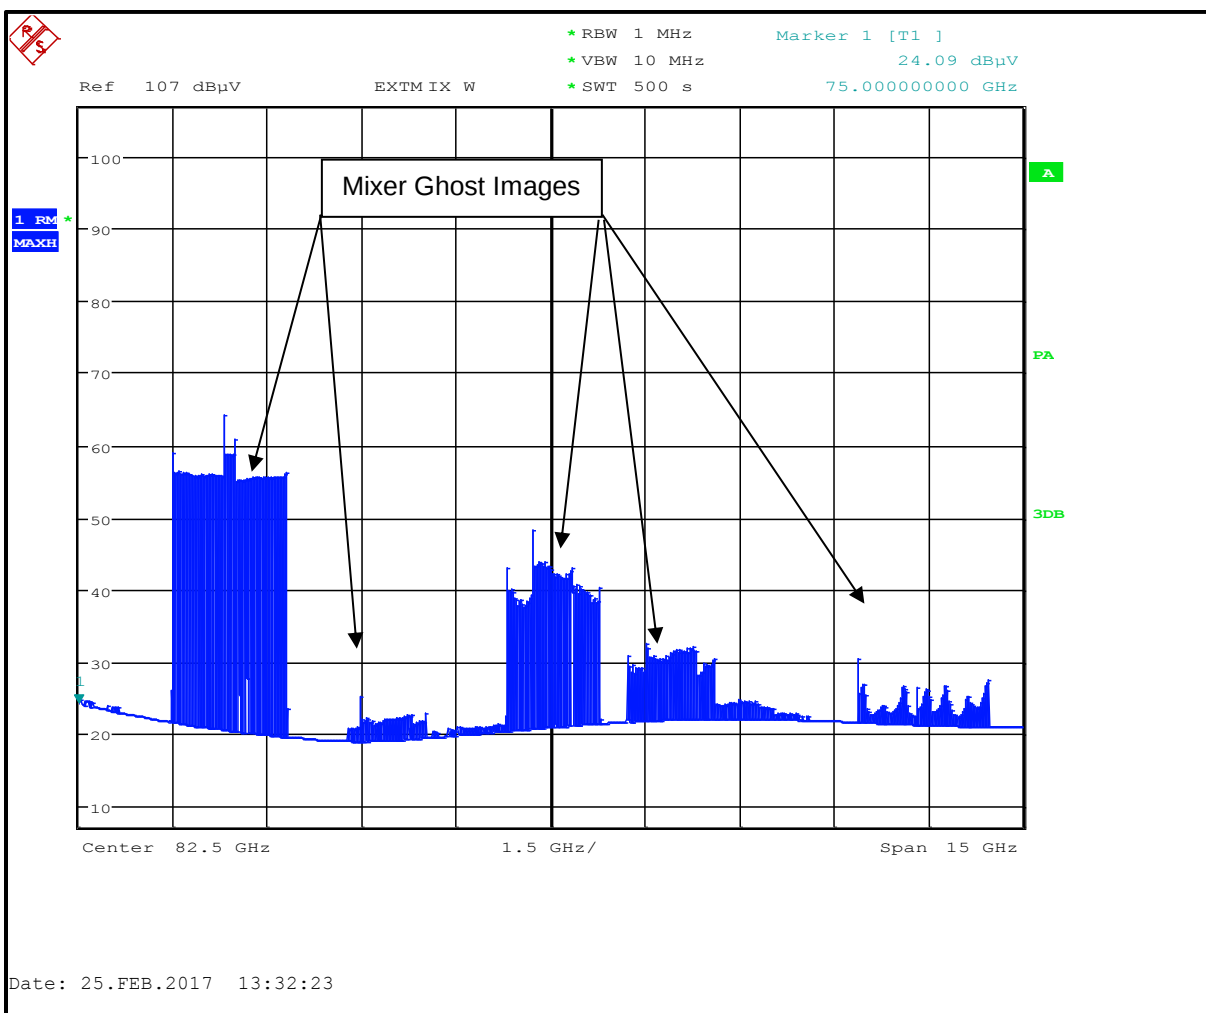

**Table 4-10: Radiated Noise Floor Calculation (75 GHz - 90 GHz) – Average**

| Frequency (MHz) | EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 75000.000       | 24.1                 | 45.2                                  | -49.5                           | 19.8                           | 54.0           | -34.2       |


**Plot 4-10: Radiated Spurious Emissions (75 GHz - 90 GHz) - Peak**

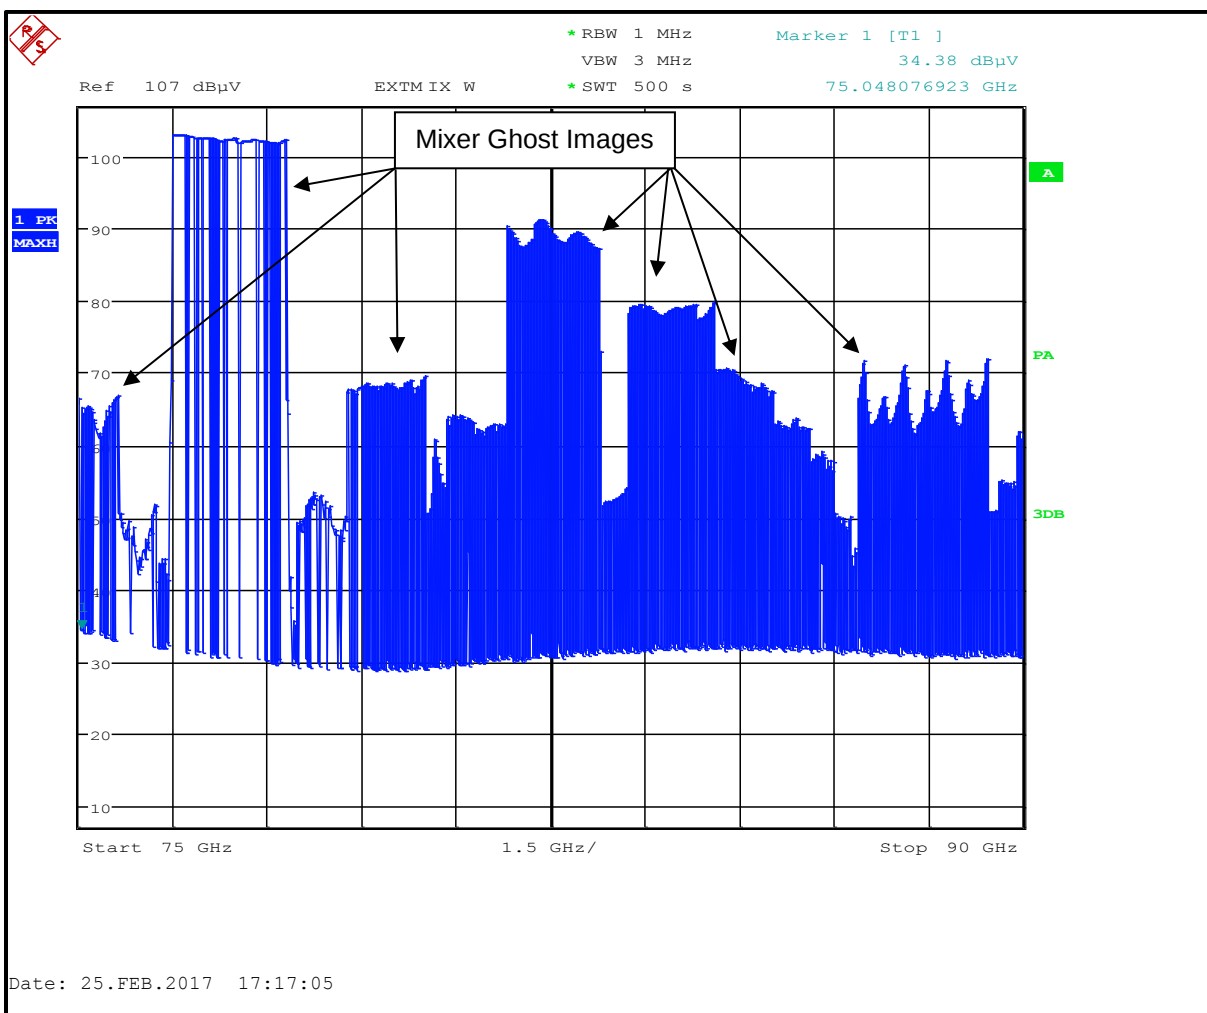

**Table 4-11: Radiated Noise Floor Calculation (75 GHz - 90 GHz) – Peak**

| Frequency (MHz) | EIRP Measured (dBuV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|----------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 75048.077       | 34.4                 | 45.2                                  | -49.5                           | 30.1                           | 74.0           | -43.9       |


**Plot 4-11: Radiated Spurious Emissions (50 GHz - 75 GHz) - Average**

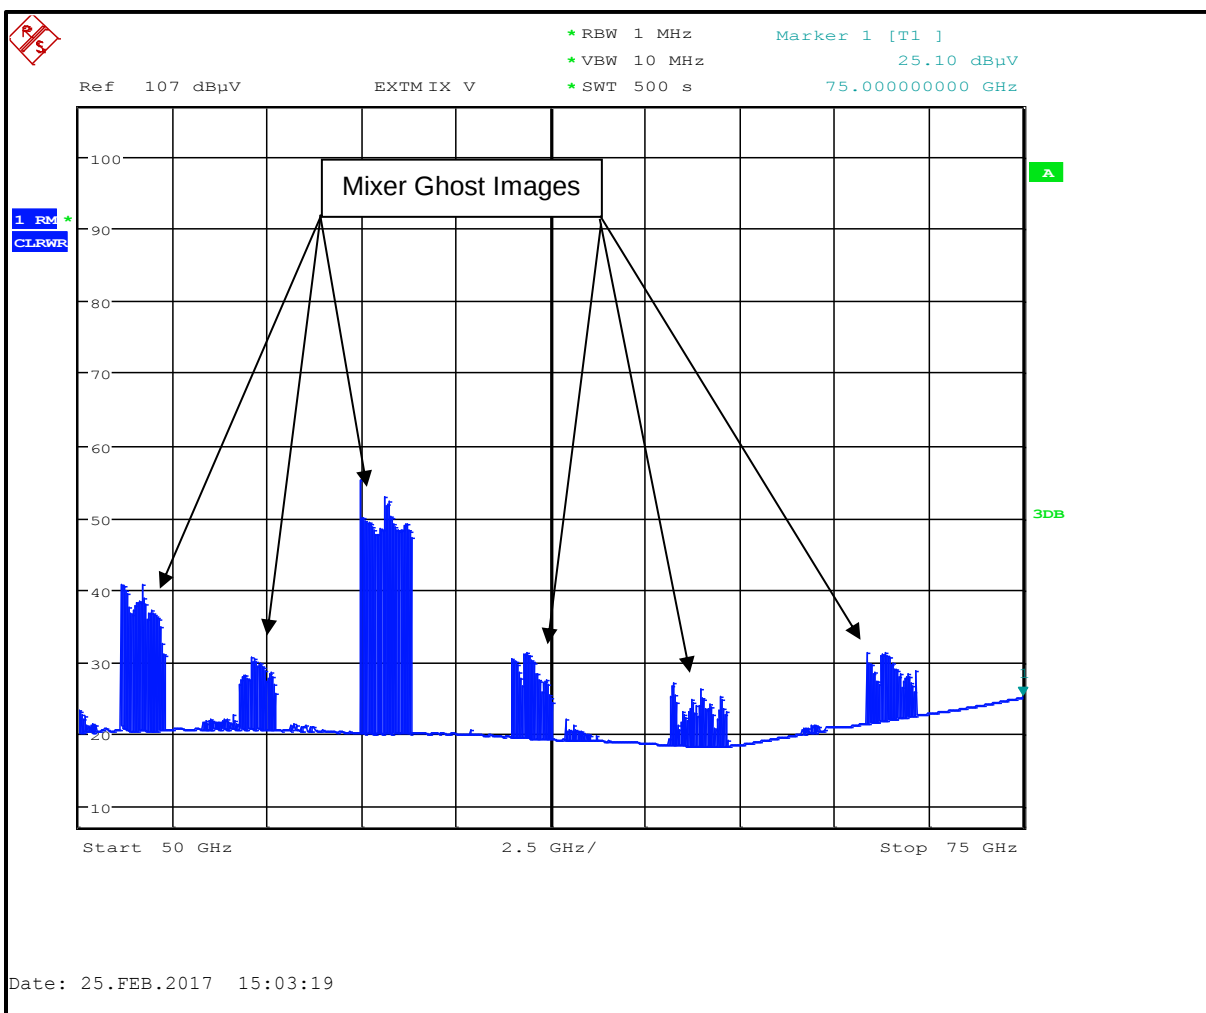

**Table 4-12: Radiated Noise Floor Calculation (50 GHz - 75 GHz) – Average**

| Frequency (MHz) | EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 75000.000       | 25.1                 | 44.3                                  | -49.5                           | 19.9                           | 54.0           | -34.1       |


**Plot 4-12: Radiated Spurious Emissions (50 GHz - 75 GHz) - Peak**

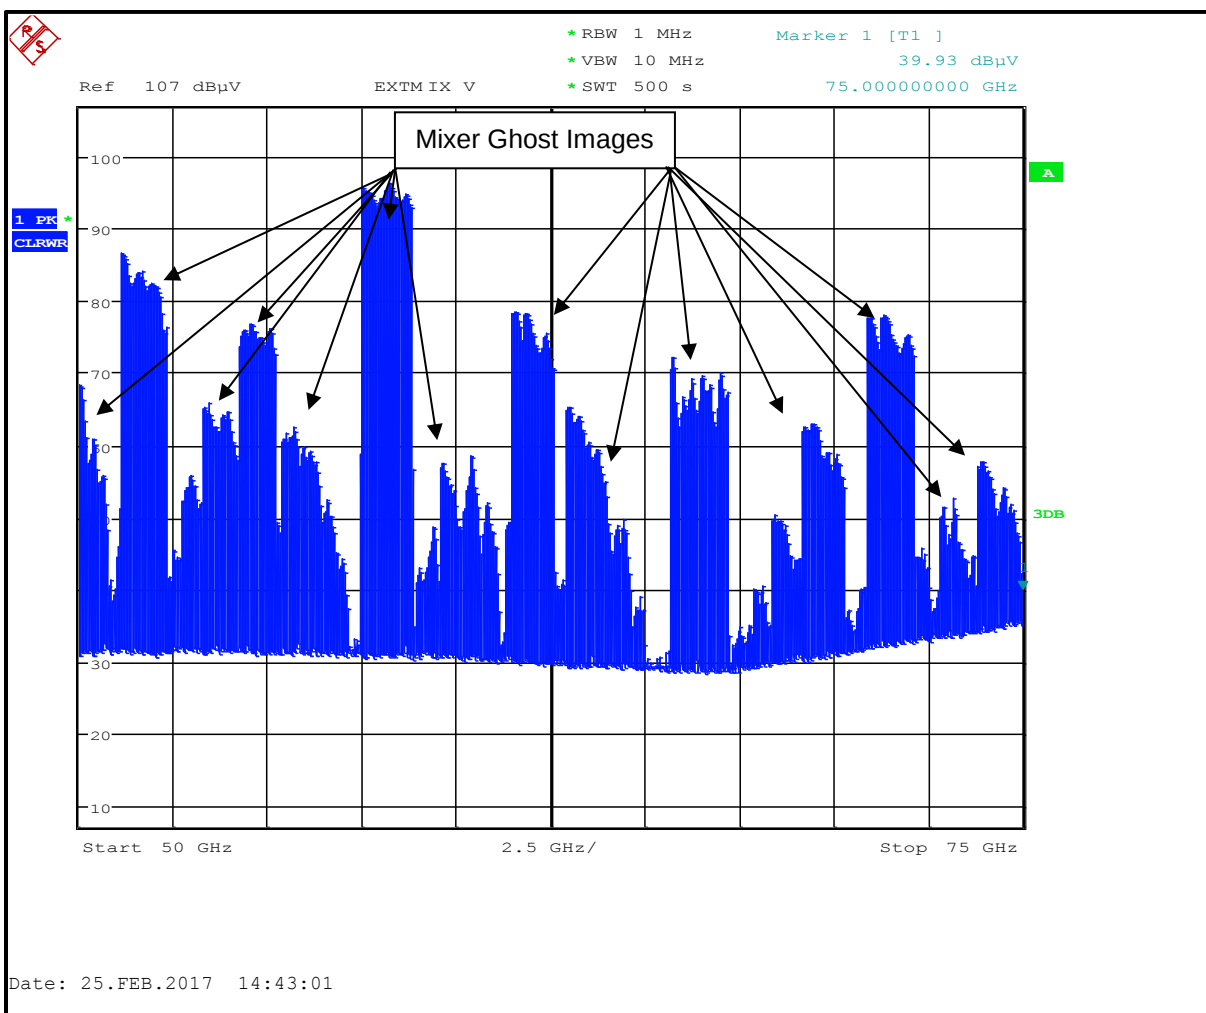

**Table 4-13: Radiated Noise Floor Calculation (50 GHz - 75 GHz) – Peak**

| Frequency (MHz) | EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 75000.000       | 39.9                 | 44.3                                  | -49.5                           | 34.7                           | 74.0           | -39.3       |


**Plot 4-13: Radiated Spurious Emissions (40 GHz – 50 GHz) – Average**

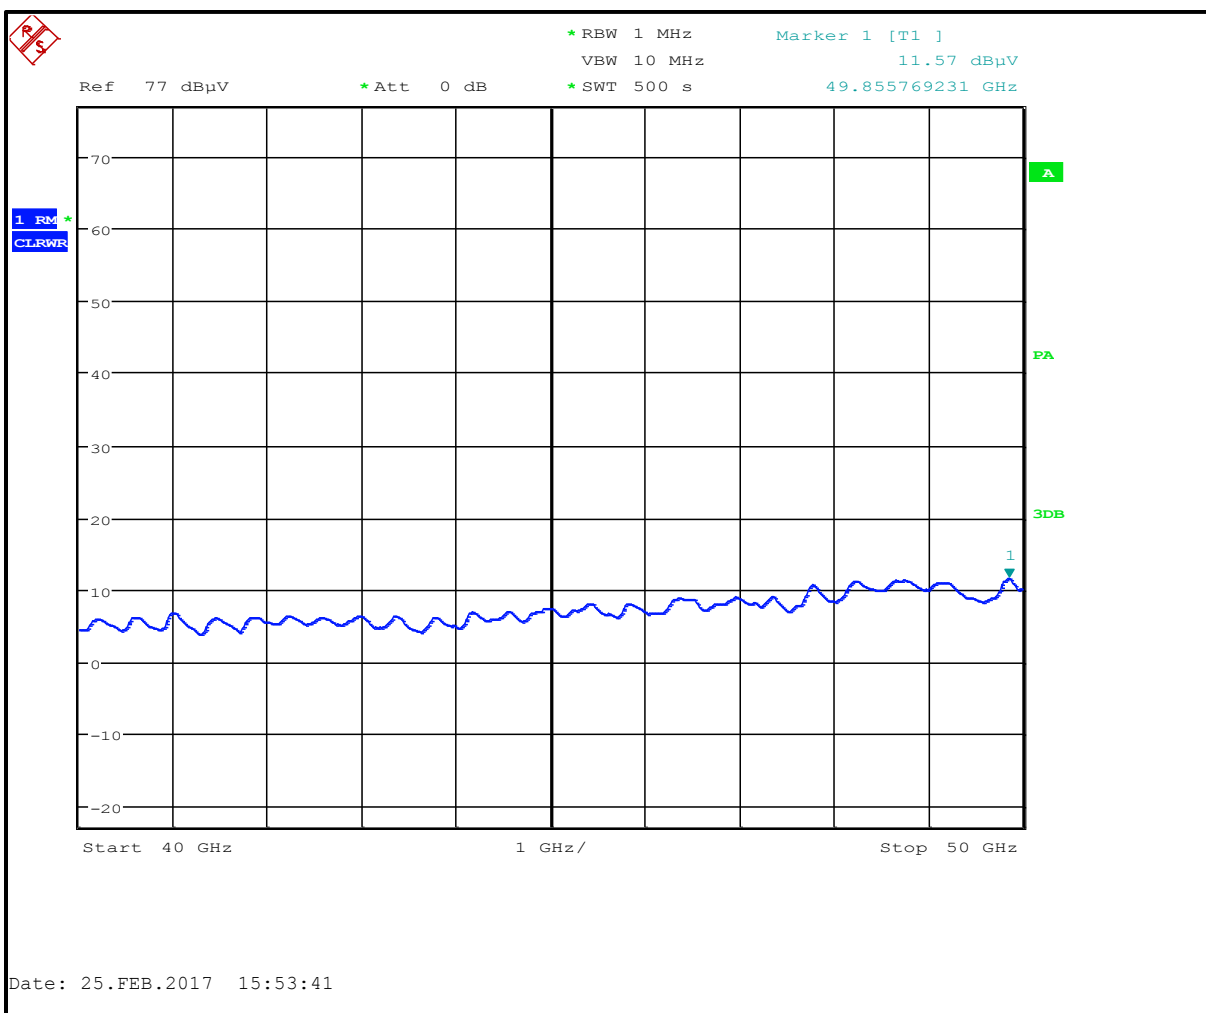

**Table 4-14: Radiated Noise Floor Calculation (40 GHz – 50 GHz) – Average**

| Frequency (MHz) | EIRP Measured (dBuV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|----------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 49855.769       | 11.6                 | 53.1                                  | -49.5                           | 15.2                           | 54.0           | -38.8       |


**Plot 4-14: Radiated Spurious Emissions (40 GHz – 50 GHz) – Peak**

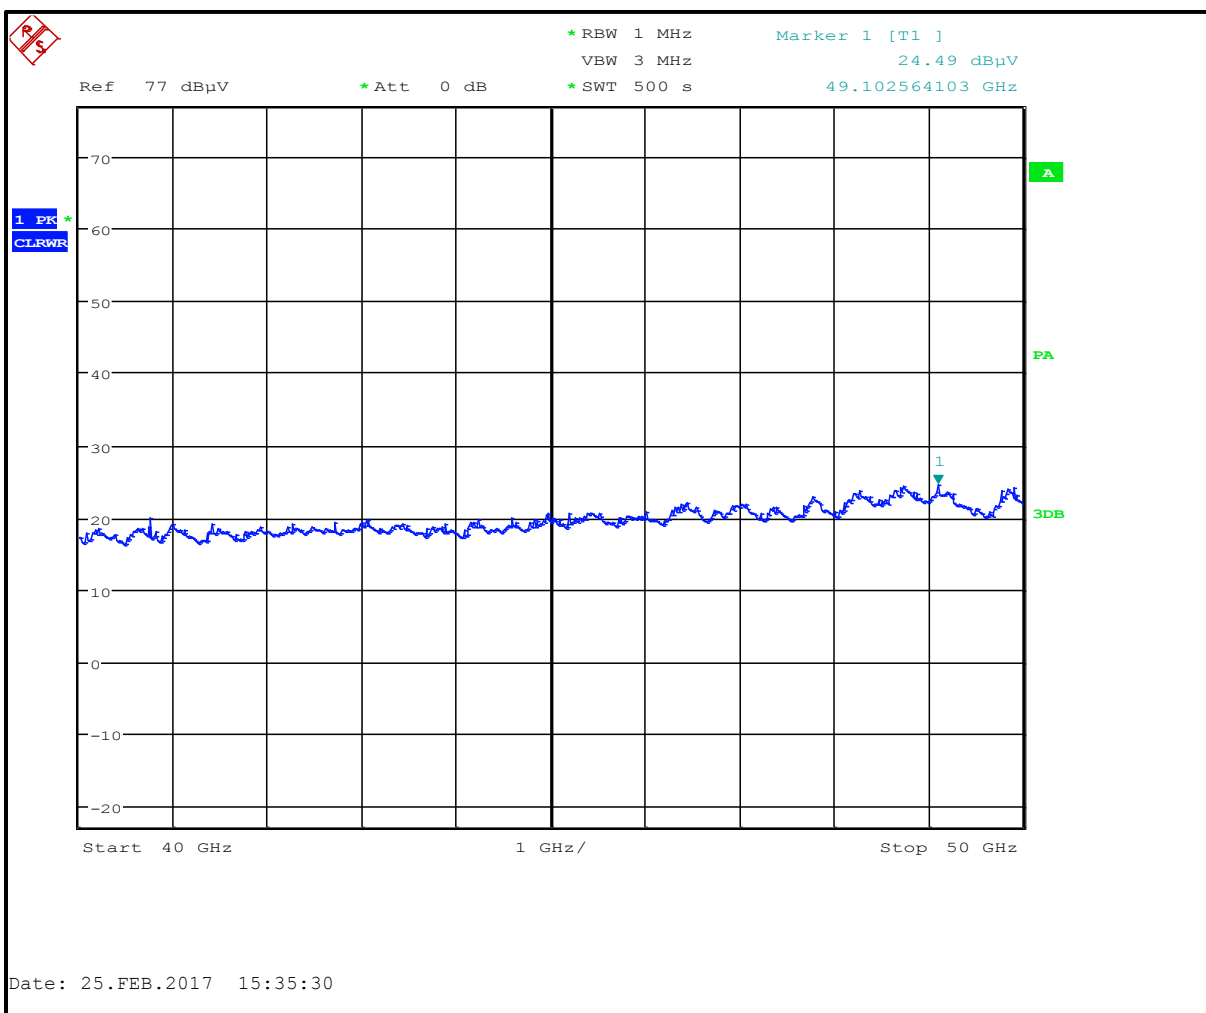

**Table 4-15: Radiated Noise Floor Calculation (40 GHz – 50 GHz) – Peak**

| Frequency (MHz) | EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 49102.564       | 24.5                 | 53.1                                  | -49.5                           | 28.1                           | 74.0           | -45.9       |


**Plot 4-15: Radiated Spurious Emissions (26.5 GHz – 40 GHz) – Average**

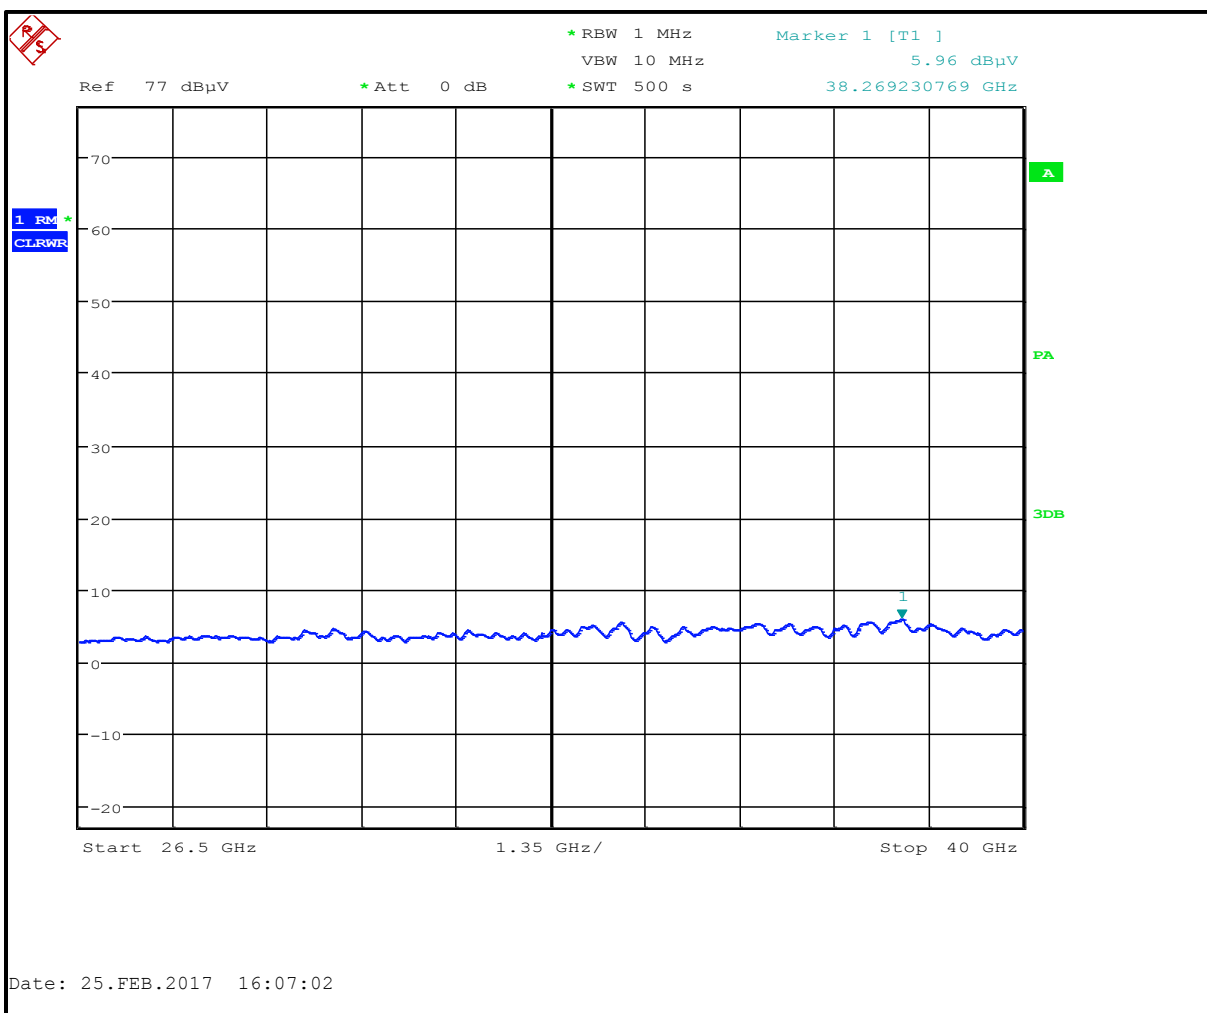

**Table 4-16: Radiated Noise Floor Calculation (26.5 GHz – 40 GHz) – Average**

| Frequency (MHz) | EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 38269.231       | 6.0                  | 44.7                                  | -49.5                           | 1.2                            | 54.0           | -52.8       |


**Plot 4-16: Radiated Spurious Emissions (26.5 GHz – 40 GHz) – Peak**

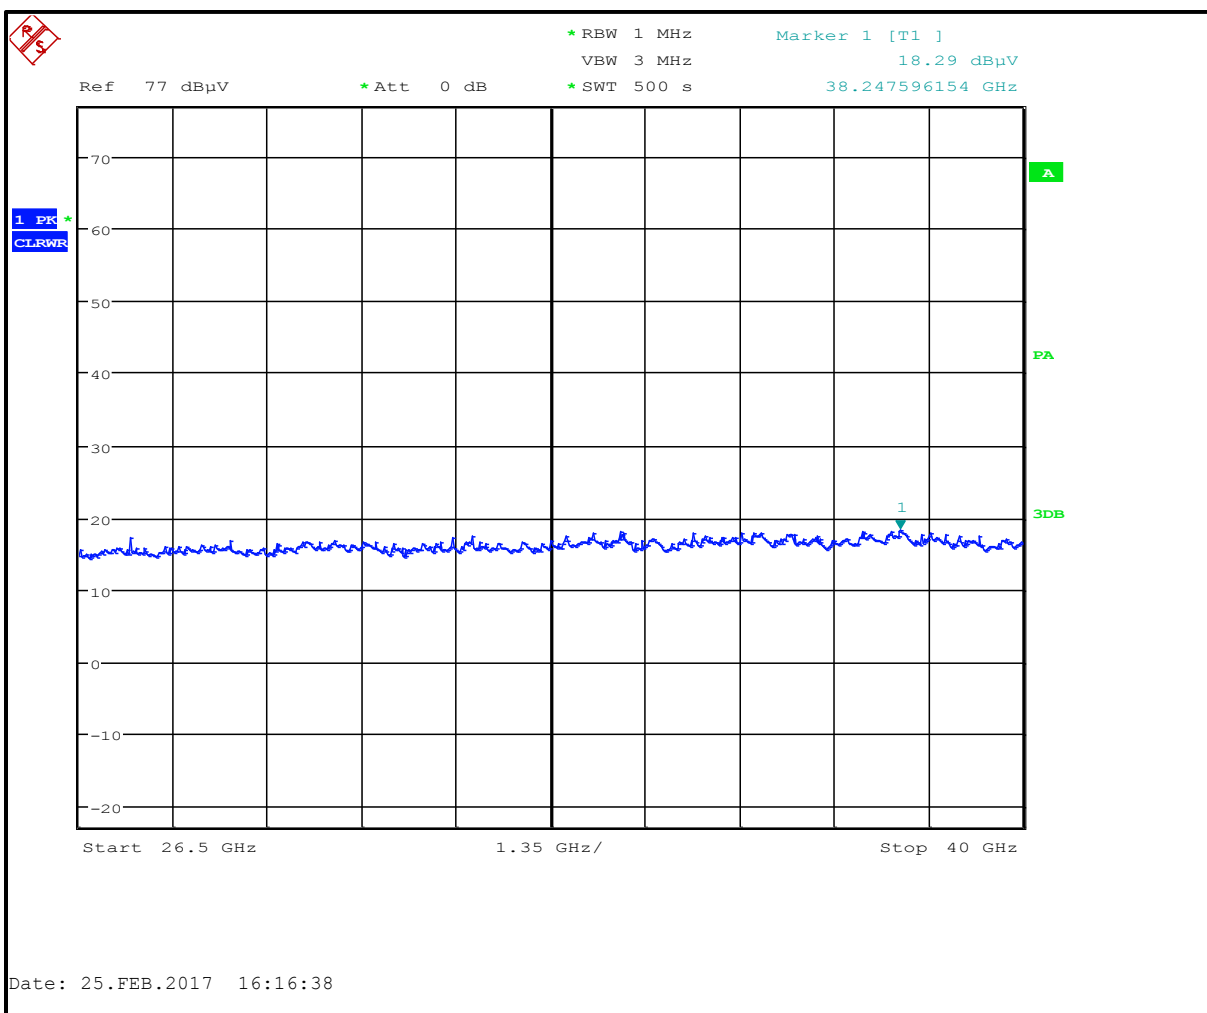

**Table 4-17: Radiated Noise Floor Calculation (26.5 GHz – 40 GHz) – Peak**

| Frequency (MHz) | EIRP Measured (dBuV) | Test Antenna Correction Factor (dB/m) | Correction from .01m to 3m (dB) | Corrected Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|----------------------|---------------------------------------|---------------------------------|--------------------------------|----------------|-------------|
| 38247.596       | 18.3                 | 44.7                                  | -49.5                           | 13.5                           | 74.0           | -60.5       |


**Plot 4-17: Radiated Spurious Emissions (18 GHz – 26.5 GHz)**

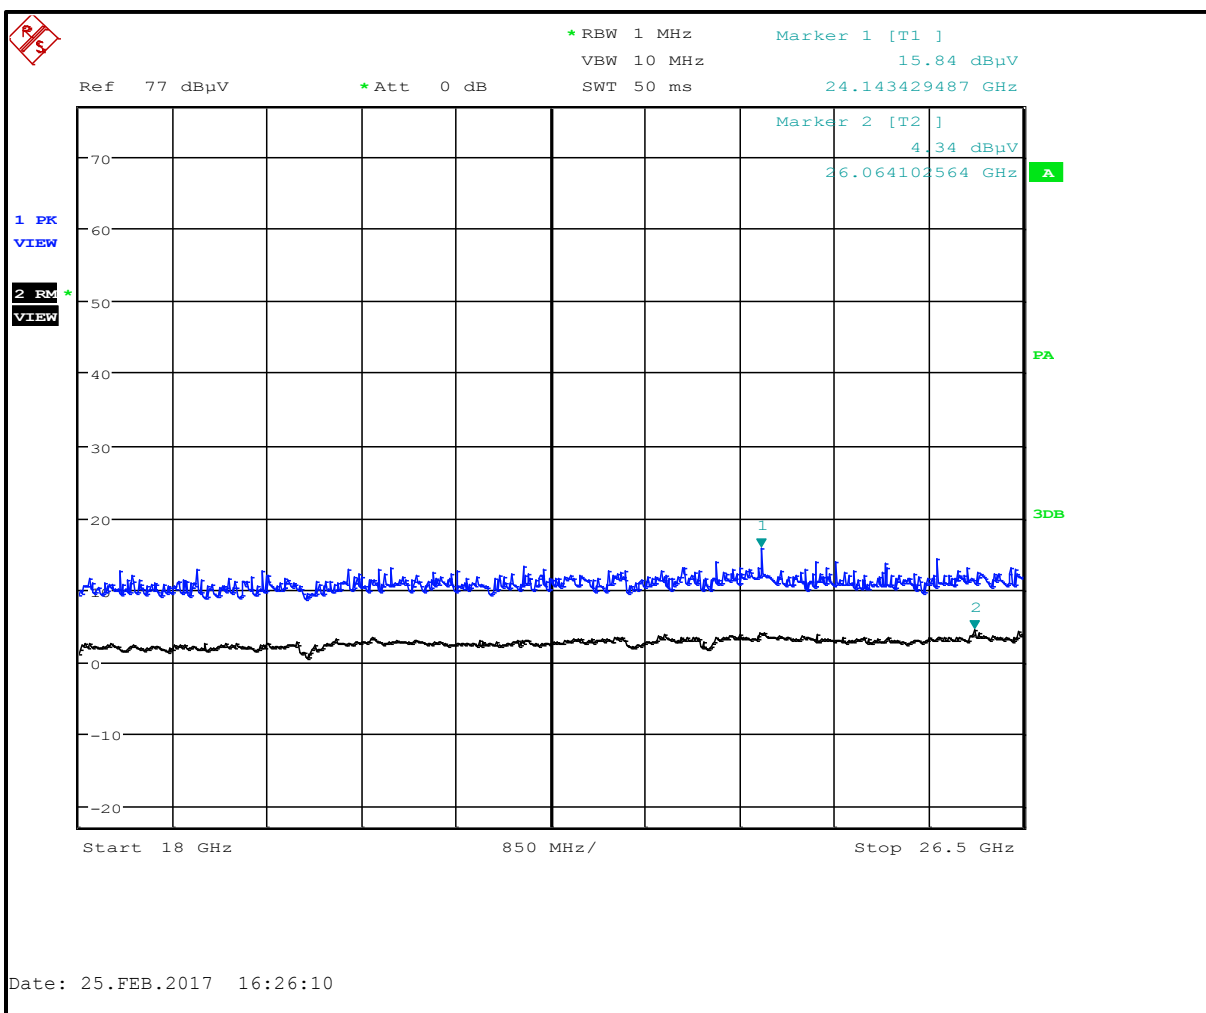

**Table 4-18: Radiated Noise Floor Calculation (18 GHz – 26.5 GHz)**

| Frequency (MHz) | EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Peak/ Average |
|-----------------|----------------------|---------------------------------------|--------------------------------|----------------|-------------|---------------|
| 24143.429       | 15.8                 | 40.2                                  | 56.0                           | 74.0           | -18.0       | Peak          |
| 26064.103       | 4.3                  | 40.6                                  | 44.9                           | 54.0           | -9.1        | Average       |


**Plot 4-18: Radiated Spurious Emissions (12.4 GHz - 18 GHz)**

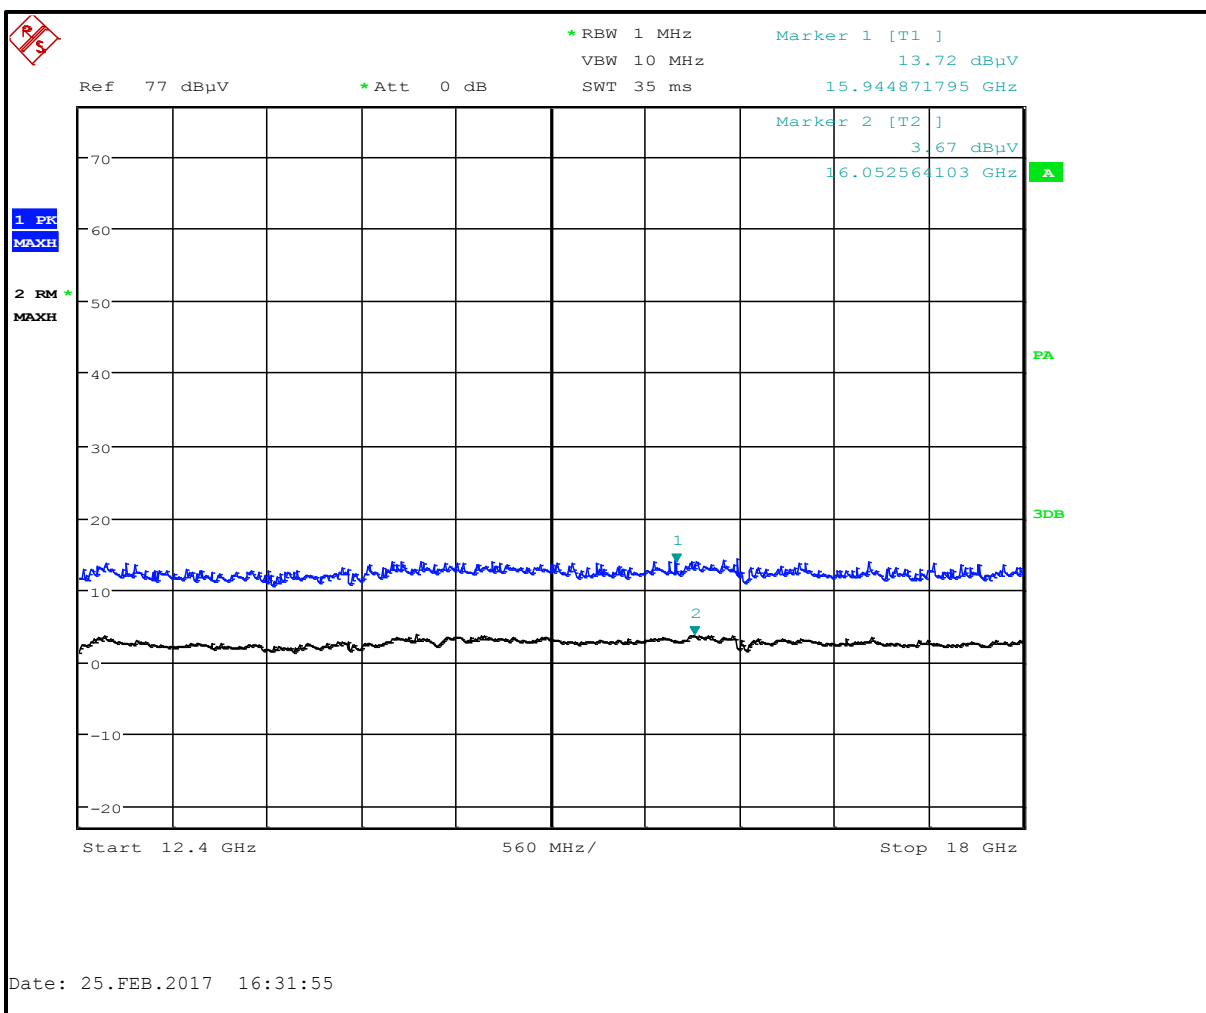

**Table 4-19: Radiated Noise Floor Calculation (12.4 GHz - 18 GHz)**

| Frequency (MHz) | EIRP Measured (dBuV) | Test Antenna Correction Factor (dB/m) | Corrected Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Peak/ Average |
|-----------------|----------------------|---------------------------------------|--------------------------------|----------------|-------------|---------------|
| 15944.872       | 13.7                 | 37.3                                  | 51.0                           | 74.0           | -23.0       | Peak          |
| 16052.564       | 3.7                  | 37.3                                  | 41.0                           | 54.0           | -13.0       | Average       |


**Plot 4-19: Radiated Spurious Emissions (8.2 GHz – 12.4 GHz)**

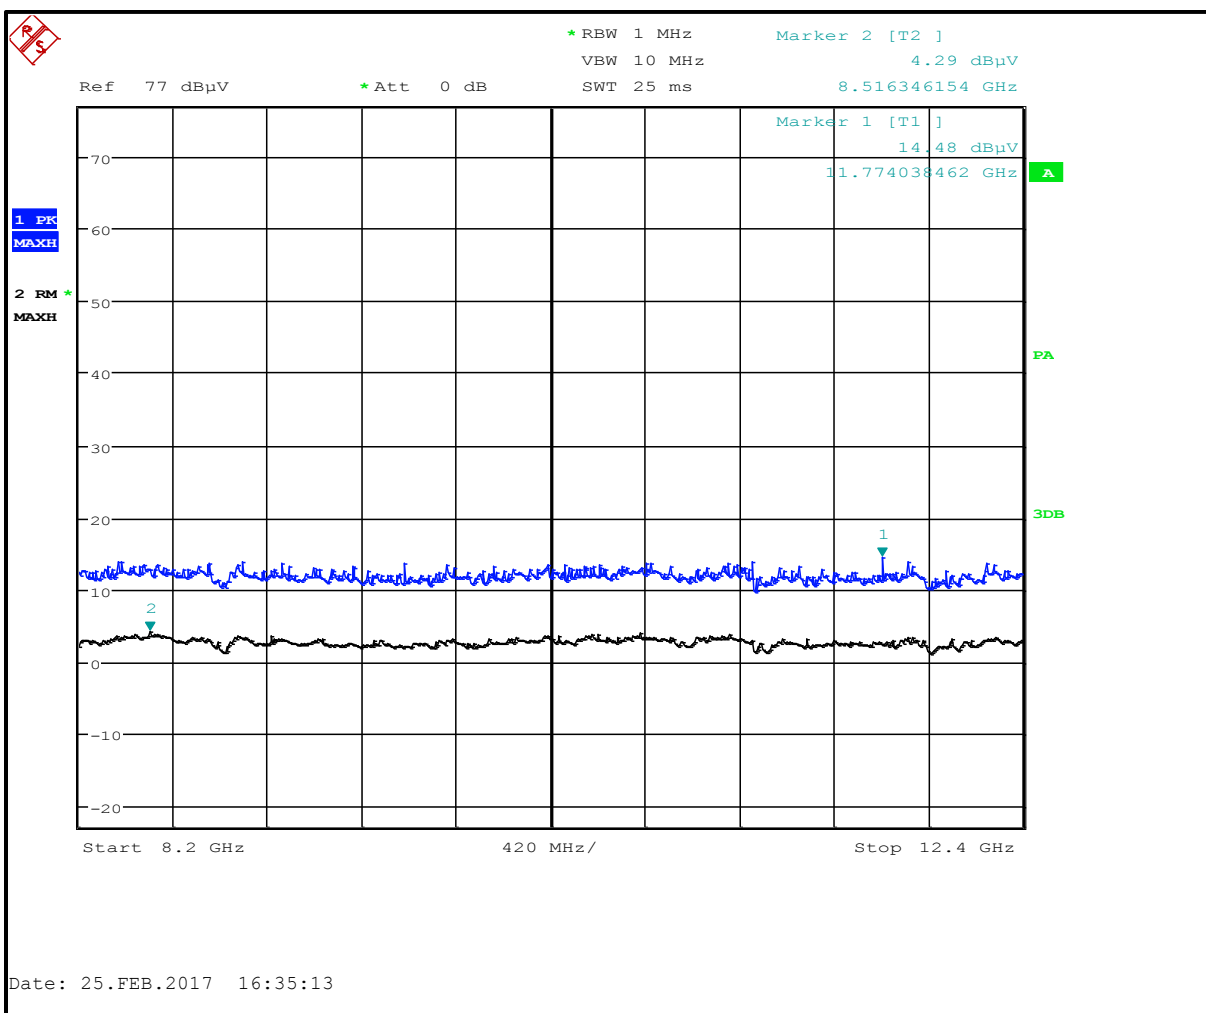

**Table 4-20: Radiated Noise Floor Calculation (8.2 GHz – 12.4 GHz)**

| Frequency (MHz) | EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Peak/ Average |
|-----------------|----------------------|---------------------------------------|--------------------------------|----------------|-------------|---------------|
| 11774.038       | 14.5                 | 34.0                                  | 48.5                           | 74.0           | -25.5       | Peak          |
| 8516.346        | 4.3                  | 33.5                                  | 37.8                           | 54.0           | -16.2       | Average       |


**Plot 4-20: Radiated Spurious Emissions (4 GHz – 8.2 GHz)**

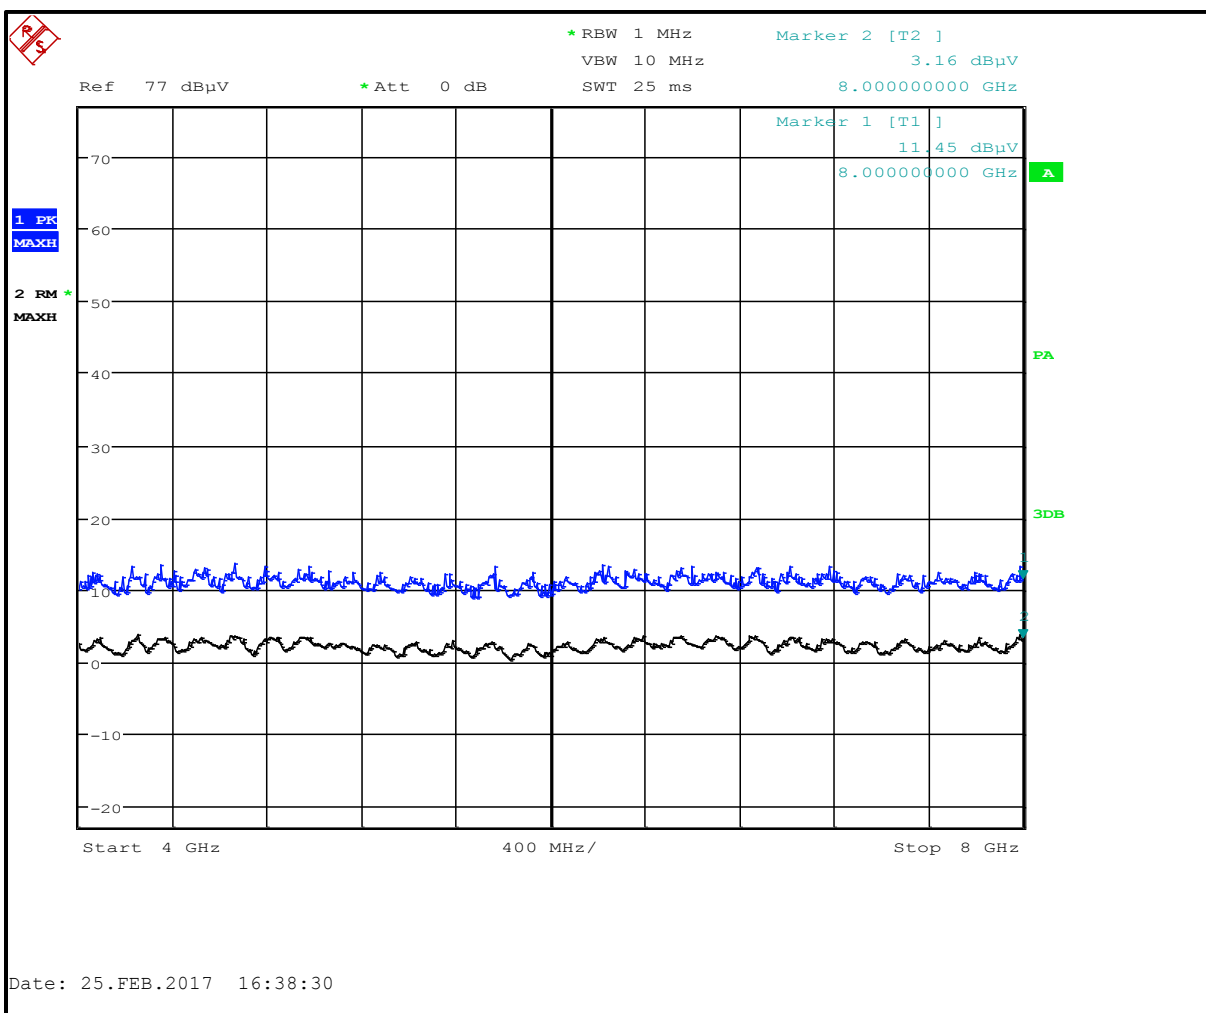

**Table 4-21: Radiated Noise Floor Calculation (4 GHz – 8.2 GHz)**

| Frequency (MHz) | EIRP Measured (dBuV) | Test Antenna Correction Factor (dB/m) | Corrected Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Peak/ Average |
|-----------------|----------------------|---------------------------------------|--------------------------------|----------------|-------------|---------------|
| 8000.000        | 11.5                 | 33.3                                  | 44.8                           | 74.0           | -29.2       | Peak          |
| 8000.000        | 3.2                  | 33.3                                  | 36.5                           | 54.0           | -17.5       | Average       |


**Plot 4-21: Radiated Spurious Emissions (2 GHz - 4 GHz)**

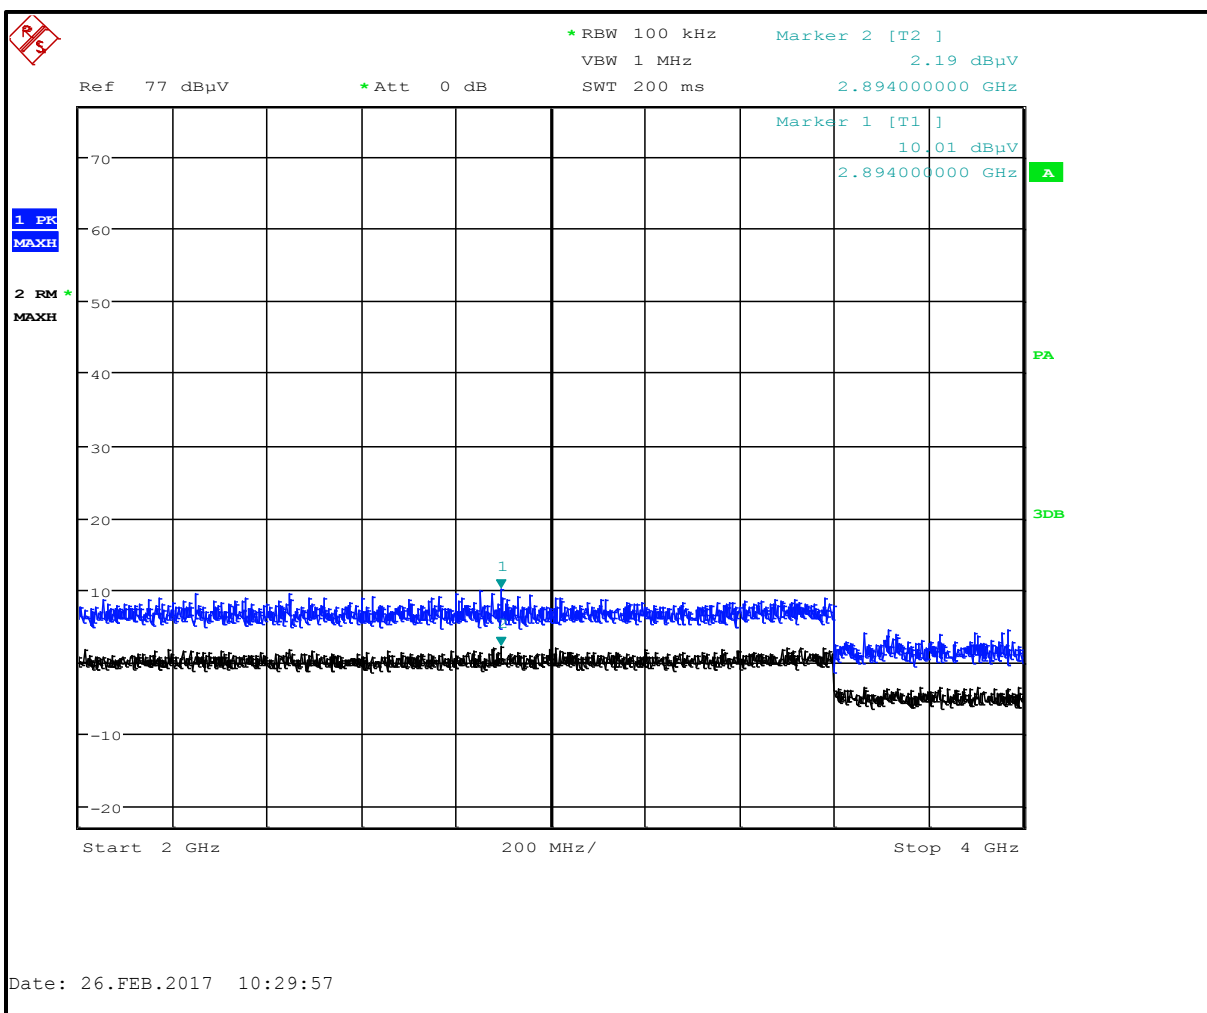

**Table 4-22: Radiated Noise Floor Calculation (2 GHz - 4 GHz)**

| Frequency (MHz) | EIRP Measured (dBuV) | Test Antenna Correction Factor (dB/m) | Corrected Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Peak/ Average |
|-----------------|----------------------|---------------------------------------|--------------------------------|----------------|-------------|---------------|
| 2894.000        | 10.0                 | 22.0                                  | 32.0                           | 74.0           | -42.0       | Peak          |
| 2894.000        | 2.2                  | 22.0                                  | 24.2                           | 54.0           | -29.8       | Average       |


**Plot 4-22: Radiated Spurious Emissions (1 GHz - 2 GHz)**

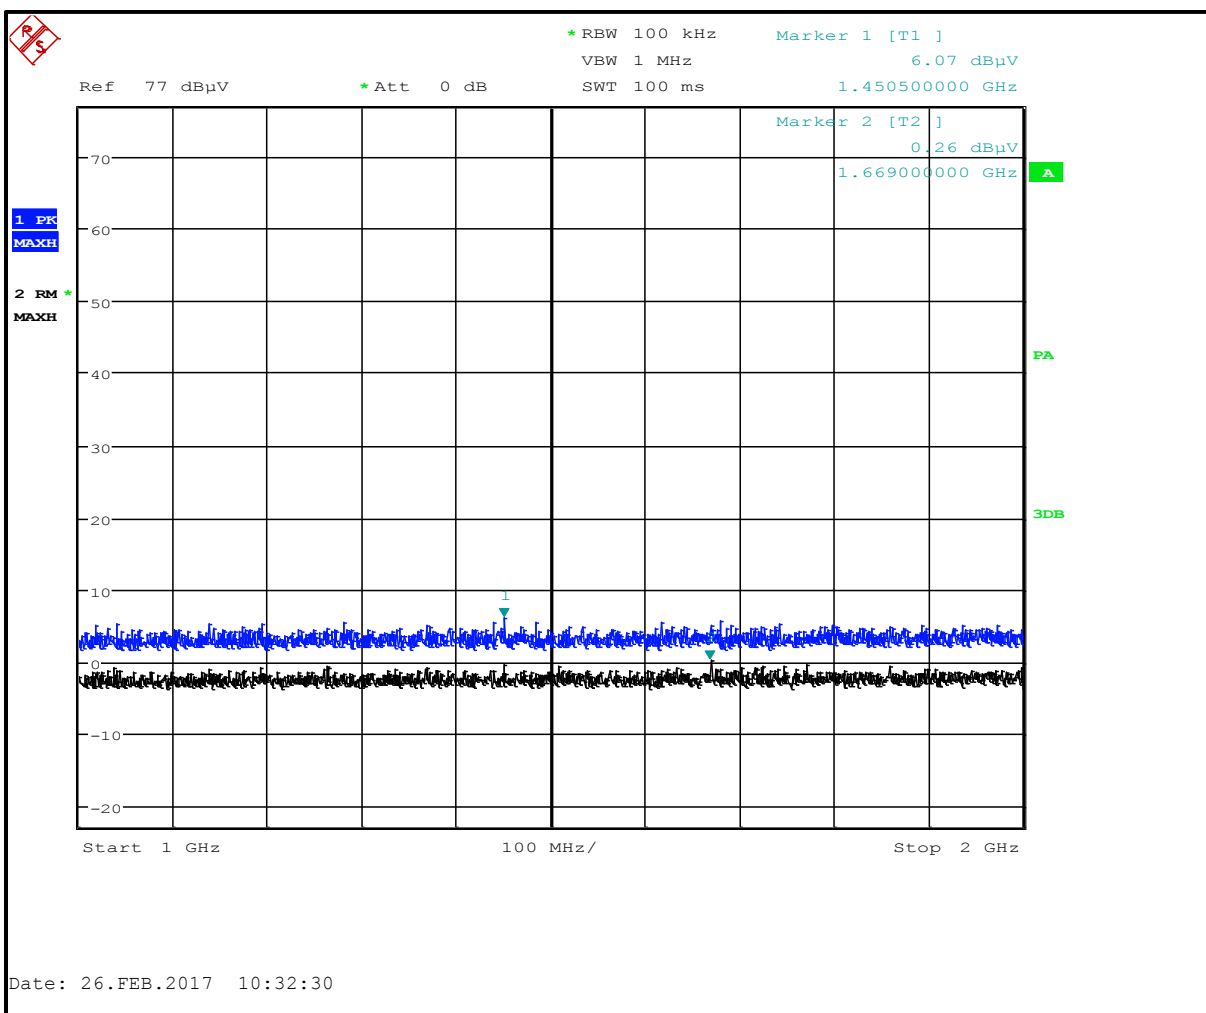

**Table 4-23: Radiated Noise Floor Calculation (1 GHz - 2 GHz)**

| Frequency (MHz) | EIRP Measured (dBuV) | Test Antenna Correction Factor (dB/m) | Corrected Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Peak/ Average |
|-----------------|----------------------|---------------------------------------|--------------------------------|----------------|-------------|---------------|
| 1450.500        | 6.1                  | 26.1                                  | 32.2                           | 74.0           | -41.8       | Peak          |
| 1669.000        | 0.3                  | 27.5                                  | 27.8                           | 54.0           | -26.2       | Average       |

**Plot 4-23: Radiated Spurious Emissions (0.03 GHz - 1 GHz)**

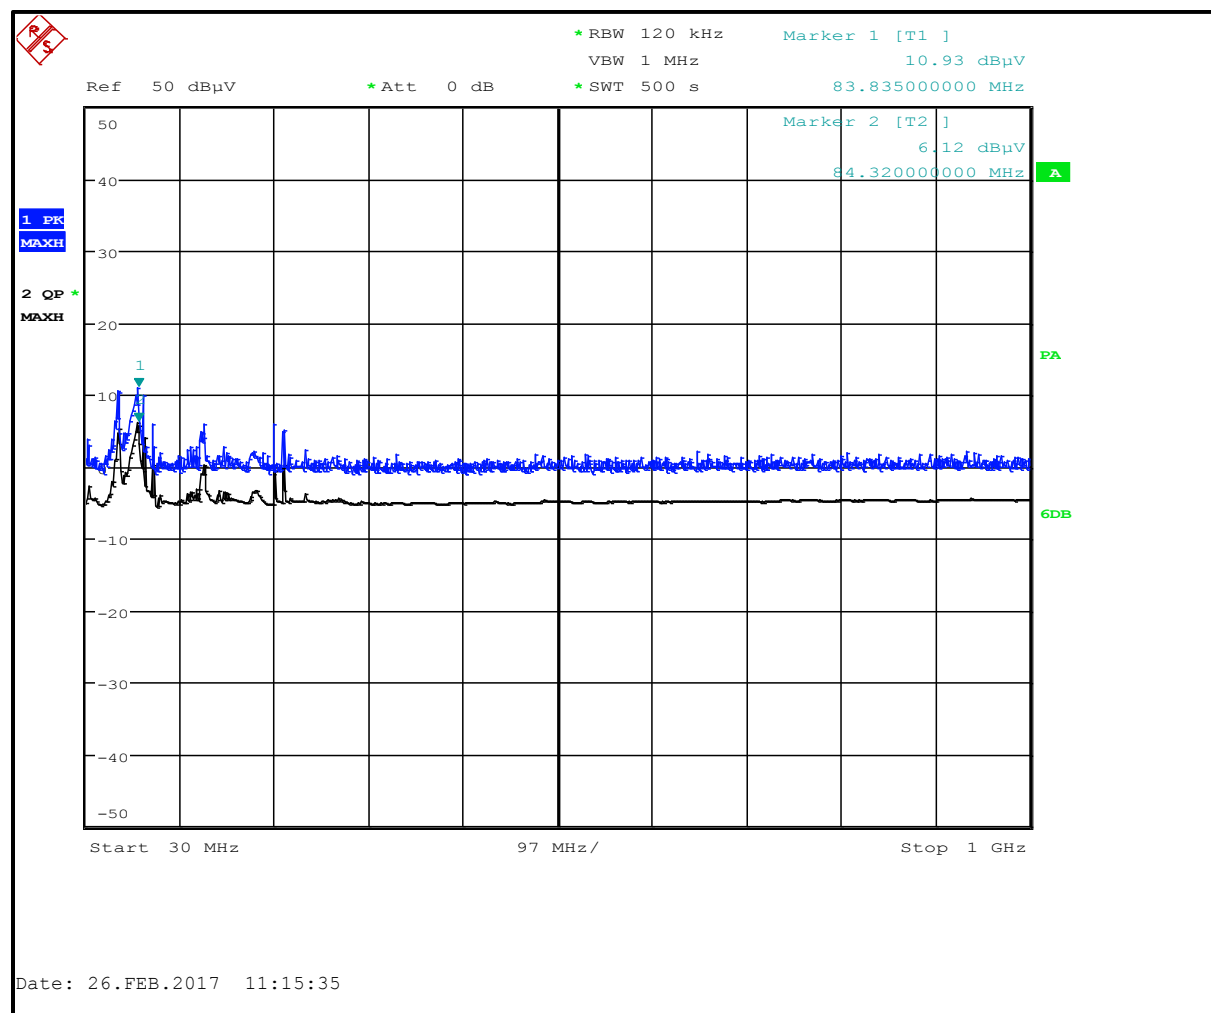

**Table 4-24: Radiated Noise Floor Calculation (0.03 GHz - 1 GHz)**

| Frequency (MHz) | EIRP Measured (dBμV) | Test Antenna Correction Factor (dB/m) | Corrected Measurement (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Peak/Quasi-Peak |
|-----------------|----------------------|---------------------------------------|--------------------------------|----------------|-------------|-----------------|
| 83.835          | 10.9                 | 8.9                                   | 19.8                           | 74.0           | -54.2       | Peak            |
| 84.320          | 6.1                  | 8.9                                   | 15.0                           | 54.0           | -39.0       | Quasi-Peak      |

#### 4.7 Radiated Emissions Unintentional/Digital Test Data

**Table 4-25: Digital Radiated Emissions Test Data**

| Temperature: 76.1°F Humidity: 23% |               |                         |                               |                         |                |             |           |
|-----------------------------------|---------------|-------------------------|-------------------------------|-------------------------|----------------|-------------|-----------|
| Emission Frequency (MHz)          | Test Detector | Analyzer Reading (dBuV) | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pass/Fail |
| 64.639                            | Qp            | 5.4                     | 6.4                           | 11.8                    | 40.0           | -28.2       | Pass      |
| 65.062                            | Qp            | 5.2                     | 6.4                           | 11.6                    | 40.0           | -28.4       | Pass      |
| 84.254                            | Qp            | 5.7                     | 9                             | 14.7                    | 40.0           | -25.3       | Pass      |
| 90.238                            | Qp            | 4.6                     | 10                            | 14.6                    | 43.5           | -28.9       | Pass      |
| 90.254                            | Qp            | 4.6                     | 10                            | 14.6                    | 43.5           | -28.9       | Pass      |
| 100.312                           | Qp            | 1                       | 11.4                          | 12.4                    | 43.5           | -31.1       | Pass      |

Unwanted emissions were investigated (other than harmonics) as required by 15.33(a)(3).


"If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules."

**Table 4-26: Radiated Emissions Test Equipment**

| RTL Asset # | Manufacturer                      | Model             | Part Type                          | Serial Number | Calibration Due Date |
|-------------|-----------------------------------|-------------------|------------------------------------|---------------|----------------------|
| 901592      | Insulated Wire Inc.               | KPS-1503-3600-KPR | SMK RF Cables 20'                  | NA            | 8/3/17               |
| 901593      | Insulated Wire Inc.               | KPS-1503-360-KPR  | SMK RF Cables 36"                  | NA            | 8/1/17               |
| 900151      | Rohde and Schwarz                 | HFH2-Z2           | Loop Antenna, (9 kHz - 30 MHz)     | 827525/019    | 3/4/18               |
| 900717      | Hewlett Packard                   | 11970U            | Harmonic Mixer (40 – 60 GHz)       | 2332A01110    | 5/20/17              |
| 901639      | Wiltron                           | 35WR19F           | Waveguide (40 – 50 GHz)            | N/A           | 6/18/17              |
| 901640      | Rohde & Schwarz                   | FS-Z110           | Mixer (75 – 110 GHz)               | 100010        | 4/02/17              |
| 901581      | Rohde & Schwarz                   | FSU               | Spectrum Analyzer                  | 1166.1660.50  | 3/22/18              |
| 901586      | Rohde & Schwarz                   | FS-Z75            | Harmonic Mixer (50 – 75 GHz)       | 100098        | 1/23/18              |
| 901256      | ATM                               | 19-443-6R         | Horn Antenna (40-60 GHz, WR-19)    | 8041704-01    | 1/23/18              |
| 901303      | EMCO                              | 3160-10           | Horn Antenna (26.5-40.0 GHz) WR-28 | 960452-007    | 6/19/17              |
| 901161      | ATM                               | 28-25K-6          | Waveguide (26.5 – 40 GHz)          | B082304       | Not required         |
| 900711      | ATM                               | 10-443-6R         | Horn Antenna (75 - 110 GHz)        | 8051905-1     | 12/5/17              |
| 900712      | ATM                               | 15-443-6R         | Horn Antenna (50 GHz - 75 GHz)     | 8051805-1     | 3/16/17              |
| 900724      | Antenna Research Associates, Inc. | LPB-2520          | BiLog Antenna (25 - 2000 MHz)      | 1037          | 4/30/17              |
| 900772      | EMCO                              | 3161-02           | Horn Antenna (2 - 4 GHz)           | 9804-1044     | 4/9/18               |
| 900321      | EMCO                              | 3161-03           | Horn Antenna (4.0 - 8.2 GHz)       | 9508-1020     | 4/9/18               |
| 901587      | Radiometer Physics GmbH           | SAM-220           | 140-220 GHz Mixer                  | 20005         | 2/13/18              |
| 900713      | ATM                               | 05-443-6R         | Horn Antenna, 140-220              | S0685         | 5/20/17              |
| 900323      | EMCO                              | 3160-07           | Horn Antenna (8.2 - 12.4 GHz)      | 9605-1054     | 4/19/18              |
| 900356      | EMCO                              | 3160-08           | Horn Antenna (12.4 - 18 GHz)       | 9607-1044     | 4/9/18               |
| 901218      | EMCO                              | 3160-09           | Horn Antenna (18 - 26.5 GHz)       | 960281-003    | 4/14/18              |

**Test Personnel:**

Daniel W. Baltzell  
Test Engineer



Signature

February 26, 2017  
Date of Test

**5 Antenna Beam-width & Antenna Side Lobe - FCC 14-2 (§15.256(i) & (j)), IC RSS-211 5.2(a) & 5.2(c)**

**5.1 Antenna Beam-width & Antenna Side Lobe Data - FCC 14-2 (§15.256(i) & (j)), RSS-211 5.2(a) & 5.2(c)**

Antenna beam-width at -3dB no greater than 8 degrees and side lobe antenna gain relative to the main beam gain for off-axis angles from main beam of greater than 60 degrees not greater than -38dB. See Appendix H Technical Operational Description for the Antenna Beam-width and Antenna Side Lobe data.

## 6 Frequency Stability ANSI C63.10 6.8, FCC 14-2 (§15.256(f)(2)), IC RSS-Gen 4.7

### 6.1 Frequency Stability Test Procedure - FCC 14-2 (§15.256(f)(2)), IC RSS-Gen 4.7

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +55°C.

The temperature was initially set to -30°C and a 1-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½-hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% nominal input voltage, +15% of minimum voltage and -15% of maximum voltage.

### 6.2 FCC §15.256(f)(2) Limit

LPR devices operating under this section must confine their fundamental emission bandwidth within the 5.925-7.250 GHz, 24.05-29.00 GHz, and 75-85 GHz bands under all conditions of operation.

### 6.3 Temperature-Voltage Frequency Stability Test Data

**Table 6-1: Temperature Frequency Stability**

| Temp.<br>(°C) | Lower Edge of<br>Measured Frequency<br>(GHz) | Upper Edge of<br>Measured Frequency<br>(GHz) | Margin<br>(GHz) |
|---------------|----------------------------------------------|----------------------------------------------|-----------------|
| -30           | 76.500463                                    | 77.497613                                    | -1.500/-7.502   |
| -20           | 76.502113                                    | 77.494588                                    | -1.502/-7.505   |
| -10           | 76.499775                                    | 77.494313                                    | -1.500/-7.506   |
| 0             | 76.499913                                    | 77.494313                                    | -1.500/-7.506   |
| 10            | 76.504038                                    | 77.494038                                    | -1.504/-7.506   |
| 20            | 76.502756                                    | 77.497412                                    | -1.503/-7.503   |
| 30            | 76.500088                                    | 77.496290                                    | -1.500/-7.504   |
| 40            | 76.500139                                    | 77.501644                                    | -1.500/-7.498   |
| 50            | 76.500011                                    | 77.499380                                    | -1.500/-7.501   |
| 55            | 76.500122                                    | 77.499296                                    | -1.500/-7.501   |

**Table 6-2: Voltage Frequency Stability**

| VDC    | ±15%         | Lower Edge of Measured Frequency (75 GHz) | Upper Edge of Measured Frequency (85 GHz) | Margin (GHz)  |
|--------|--------------|-------------------------------------------|-------------------------------------------|---------------|
| 12.0   | (Min.)       | 76.504423                                 | 77.501821                                 | -1.504/-7.498 |
| 13.8   | (Min. + 15%) | 76.507323                                 | 77.500883                                 | -1.507/-7.499 |
|        |              |                                           |                                           |               |
| 19.975 | (-15%)       | 76.500356                                 | 77.498333                                 | -1.500/-7.502 |
| 23.500 | (Mid.)       | 76.502756                                 | 77.497411                                 | -1.503/-7.503 |
| 27.025 | (+ 15%)      | 76.503240                                 | 77.501611                                 | -1.503/-7.498 |
|        |              |                                           |                                           |               |
| 29.75  | (Max. -15%)  | 76.500856                                 | 77.4971333                                | -1.501/-7.503 |
| 35.00  | (Max.)       | 76.502123                                 | 77.49895385                               | -1.502/-7.501 |


**Results:** The EUT is within band and compliant.

**Table 6-3: Frequency Stability Test Equipment**

| RTL Asset # | Manufacturer             | Model | Part Type                         | Serial Number | Calibration Due Date |
|-------------|--------------------------|-------|-----------------------------------|---------------|----------------------|
| 900946      | Tenney Engineering, Inc. | TH65  | Temperature Chamber with Humidity | 11380         | 1/13/18              |
| 901581      | Rohde & Schwarz          | FSU   | Spectrum Analyzer                 | 1166.1660.50  | 3/22/18              |
| 901350      | Meterman                 | 33XR  | Multimeter                        | 040402802     | 3/20/17              |

**Test Personnel:**

Daniel Baltzell  
Test Engineer



Signature

February 27, 2017  
Date of Test

## **7 AC Conducted Emissions - ANSI C63.10 6.2, Part §15.207, IC RSS-Gen 7.2.4**

### **7.1 Test Methodology for Conducted Line Emissions Measurements – Part §15.207, IC RSS-Gen 7.2.4**

The power line conducted emission measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was placed on a wooden table. Power was fed to the EUT through a 50-ohm/50  $\mu$ Henry Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an AC filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT's auxiliary equipment. This peripheral LISN was also fed AC power.


The spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. Video filter less than 10 times the resolution bandwidth is not used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded.

### **7.2 Conducted Line Emissions Test Procedure**


Conducted emissions were performed on the EUT using an off-the-shelf power supply. The general conducted limit under Part 15.207 was applied. The emissions were scanned between 150 kHz to 30 MHz on the neutral and phase conductors.

### 7.3 Conducted Line Emissions Test Data

Plot 7-1: Conducted Emissions Transmit - Phase

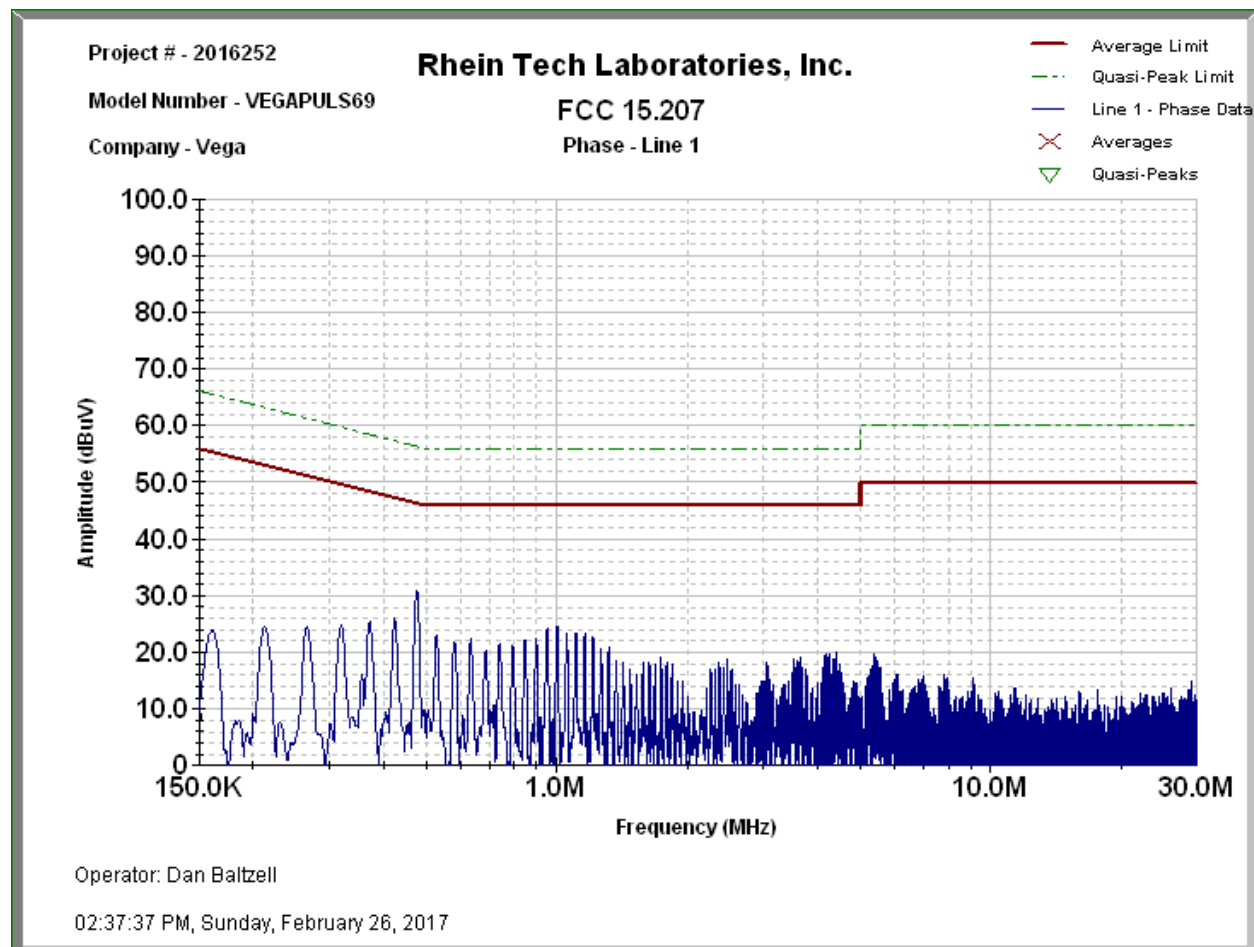


**Plot 7-2: Conducted Emissions Transmit – Neutral**

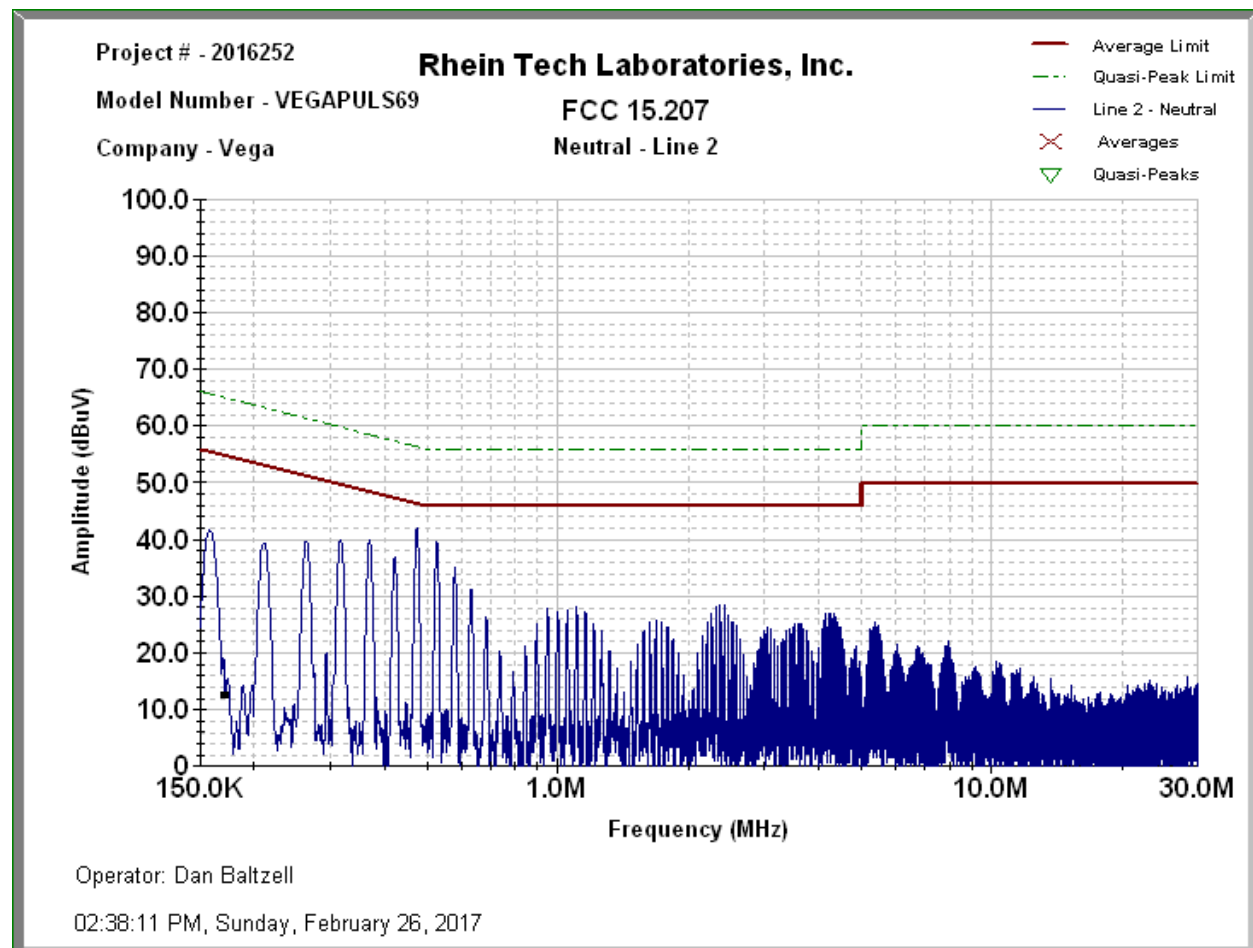

**Table 7-1: Conducted Line Emissions Test Equipment**

| RTL Asset # | Manufacturer                  | Model                      | Part Type                              | Serial Number | Calibration Due Date |
|-------------|-------------------------------|----------------------------|----------------------------------------|---------------|----------------------|
| 901581      | Rohde & Schwarz               | FSU                        | Spectrum Analyzer                      | 1166.1660.50  | 3/22/18              |
| 901084      | AFJ International             | LS16                       | 16A LISN                               | 16010020082   | 3/24/17              |
| N/A         | Rhein Tech Laboratories, Inc. | Automated Emissions Tester | Emissions Testing Software Rev. 14.0.2 | N/A           | N/A                  |

**Test Personnel:**

|                    |                                                                                   |                   |
|--------------------|-----------------------------------------------------------------------------------|-------------------|
| Daniel W. Baltzell |  | February 26, 2017 |
| Test Engineer      | Signature                                                                         | Date of Test      |

**8 Conclusion**

The data in this measurement report shows that the Vega Grieshaber KG Model VEGAPULS 69, FCC ID: O6QPS60XW1, IC: 3892A-PS60XW1, complies with the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations and Industry Canada RSS-Gen and RSS-211.

Rhein Tech Laboratories  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: VEGA Grieshaber KG  
Model: VEGAPULS 69  
ID's: O6QPS60XW1/3892A-PS60XW1  
Standards: FCC 15.256/IC RSS-211  
Report Number: 2016252-256

**Appendix A: Agency Authorization Letter**

Please refer to the following page.

Rhein Tech Laboratories  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: VEGA Grieshaber KG  
Model: VEGAPULS 69  
ID's: O6QPS60XW1/3892A-PS60XW1  
Standards: FCC 15.256/IC RSS-211  
Report Number: 2016252-256

**Appendix B: FCC & IC Confidentiality Request Letter**

Please refer to the following page.

Rhein Tech Laboratories  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: VEGA Grieshaber KG  
Model: VEGAPULS 69  
ID's: O6QPS60XW1/3892A-PS60XW1  
Standards: FCC 15.256/IC RSS-211  
Report Number: 2016252-256

## **Appendix C: IC Letters**

Please refer to the following pages.

Rhein Tech Laboratories  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: VEGA Grieshaber KG  
Model: VEGAPULS 69  
ID's: O6QPS60XW1/3892A-PS60XW1  
Standards: FCC 15.256/IC RSS-211  
Report Number: 2016252-256

**Appendix D: Canadian-Based Representative Attestation**

Please refer to the following page.

Rhein Tech Laboratories  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: VEGA Grieshaber KG  
Model: VEGAPULS 69  
ID's: O6QPS60XW1/3892A-PS60XW1  
Standards: FCC 15.256/IC RSS-211  
Report Number: 2016252-256

## **Appendix E: Description of Changes**

Please refer to the following page.

Rhein Tech Laboratories  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: VEGA Grieshaber KG  
Model: VEGAPULS 69  
ID's: O6QPS60XW1/3892A-PS60XW1  
Standards: FCC 15.256/IC RSS-211  
Report Number: 2016252-256

## **Appendix F: Technical Operational Description**

Please refer to the following pages.

Rhein Tech Laboratories  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: VEGA Grieshaber KG  
Model: VEGAPULS 69  
ID's: O6QPS60XW1/3892A-PS60XW1  
Standards: FCC 15.256/IC RSS-211  
Report Number: 2016252-256

## **Appendix G: Block Diagram**

Please refer to the following pages.

Rhein Tech Laboratories  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: VEGA Grieshaber KG  
Model: VEGAPULS 69  
ID's: O6QPS60XW1/3892A-PS60XW1  
Standards: FCC 15.256/IC RSS-211  
Report Number: 2016252-256

## **Appendix H: Schematics**

Please refer to the following page.

Rhein Tech Laboratories  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: VEGA Grieshaber KG  
Model: VEGAPULS 69  
ID's: O6QPS60XW1/3892A-PS60XW1  
Standards: FCC 15.256/IC RSS-211  
Report Number: 2016252-256

**Appendix I:     Manual**

Please refer to the following pages.

Rhein Tech Laboratories  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: VEGA Grieshaber KG  
Model: VEGAPULS 69  
ID's: O6QPS60XW1/3892A-PS60XW1  
Standards: FCC 15.256/IC RSS-211  
Report Number: 2016252-256

## **Appendix J: Internal Photographs**

Please refer to the following pages.

## Appendix K: Test Configuration Photographs

### Photograph 2: Radiated Emissions – Front View (<1 GHz)



**Photograph 3: Radiated Emissions – Rear View (<1 GHz)**




**Photograph 4: Radiated Emissions – Front View (>1 GHz)**



**Photograph 5: Radiated Emissions – Rear View (>1 GHz)**



**Photograph 6: AC Conducted Emissions – Front View**

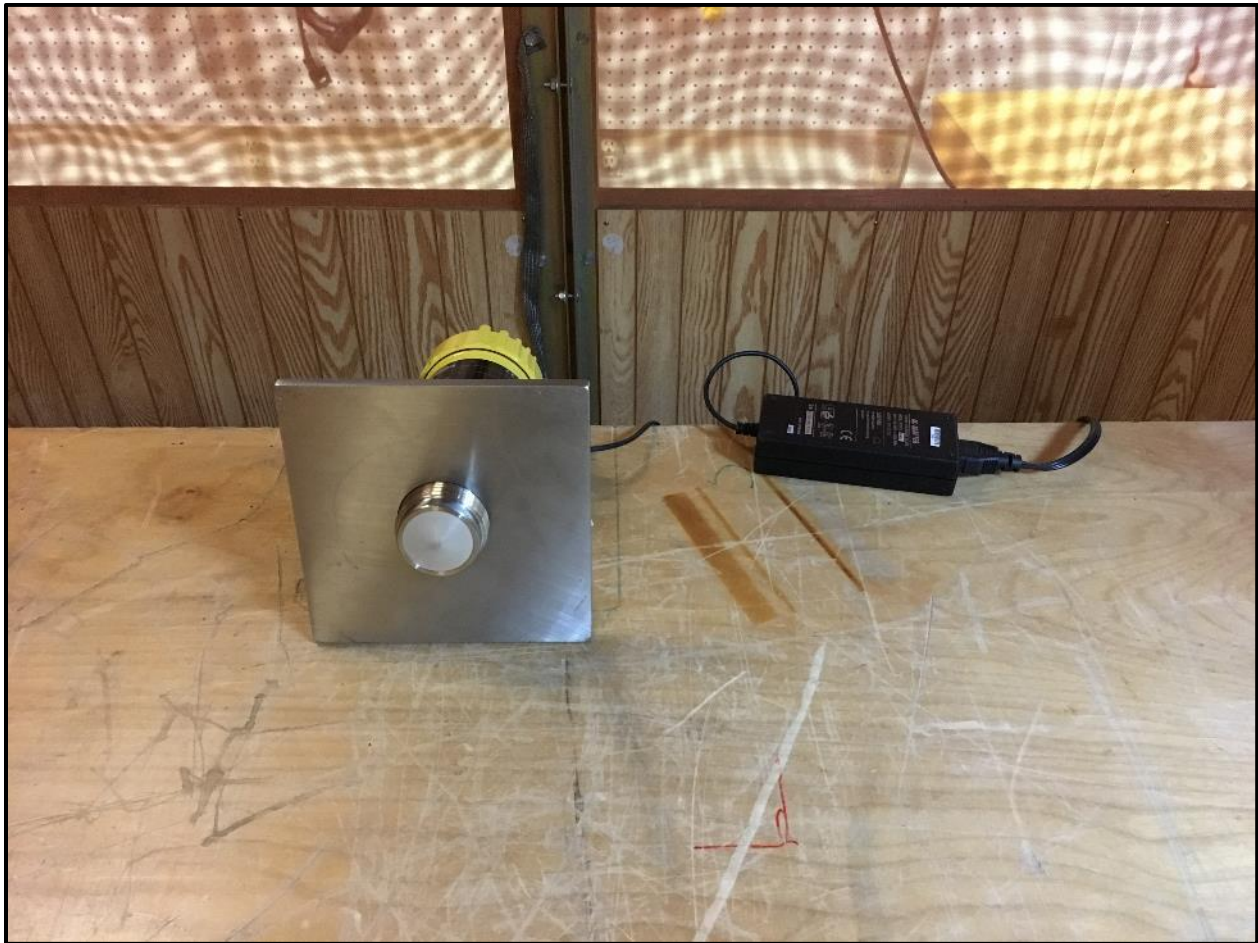

**Photograph 7: AC Conducted Emissions - Rear View**

