
FCC Test Report

Report No.: AGC01576150701FE03

FCC ID : ZG8BSK52
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Bluetooth speaker
BRAND NAME : N/A
MODEL NAME : BSK52
CLIENT : LANYA ELECTRONIC CO., Ltd
DATE OF ISSUE : July 13, 2015
STANDARD(S)
TEST PROCEDURE(S) : FCC Part 15 Rules
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 13, 2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION.....	5
2.2. TABLE OF CARRIER FREQUENCIES.....	5
3. MEASUREMENT UNCERTAINTY.....	7
4. DESCRIPTION OF TEST MODES.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	9
7 ALL TEST EQUIPMENT LIST	9
8. RADIATED EMISSION	11
8.1TEST LIMIT.....	11
8.2. MEASUREMENT PROCEDURE	12
8.3. TEST SETUP	14
8.4. TEST RESULT(Worst modulation:GFSK).....	16
9. BAND EDGE EMISSION	42
9.1. MEASUREMENT PROCEDURE	42
9.2 TEST SETUP	42
9.3 RADIATED TEST RESULT(Worst modulation:GFSK).....	43
10. 20DB BANDWIDTH.....	51
10.1. MEASUREMENT PROCEDURE	51
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	51
10.3. LIMITS AND MEASUREMENT RESULTS.....	51
11. FCC LINE CONDUCTED EMISSION TEST	60
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	60
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....	60
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	61
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....	61
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	62
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	66
APPENDIX B: PHOTOGRAPHS OF EUT	68

1. VERIFICATION OF CONFORMITY

Applicant	LANYA ELECTRONIC CO., Ltd.
Address	6th Building, Lijincheng Industrial Park, East Gon Bao'an District, Shenzhen, China.
Manufacturer	SHENZHEN LANYA ELECTRONIC CO., LTD.
Address	3/F, Building 6, Lijincheng Industrial Park, Gongyedong Road, Longhua Town, Baoan District, Shenzhen, China.
Product Designation	Bluetooth speaker
Brand Name	N/A
Test Model	BSK52
Date of test	July 06, 2015 to July 10, 2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Prepared By

Matt Zhang

Matt Zhang

July 13, 2015

Checked By

Forrest Lei

Forrest Lei

July 13, 2015

Authorized By

Solger Zhang

Solger Zhang

July 13, 2015

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	5.02dBm(Max)
Bluetooth Version	V4.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Number of channels	79 for traditional BT 40 for BLE
Hardware Version	BSK52
Software Version	BSK52
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Antenna Gain	2dBi
Power Supply	DC 3.7V by battery
Note: The Micro USB port only used for charging and can't be used to transfer data with PC.	

2.2. TABLE OF CARRIER FREQUENCIES

Traditional Bluetooth channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Normal operation (BT)


Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

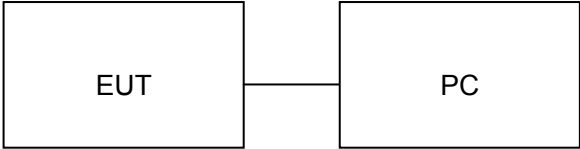

Configure 2: (Control continuous TX)

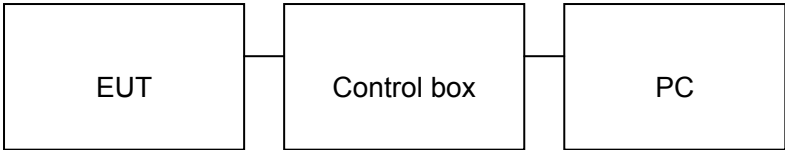

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth speaker	BSK52	N/A	EUT
2	PC	N/A	ASUS	A.E
3	Control box	N/A	N/A	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
N/A	BANDWIDTH	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park, Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7 ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 3, 2015	July 2, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 3, 2015	July 2, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 3, 2015	July 2, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 3, 2015	July 2, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $\text{dB } \mu \text{ V} = 20 \log \text{ Emission level } \mu \text{ V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

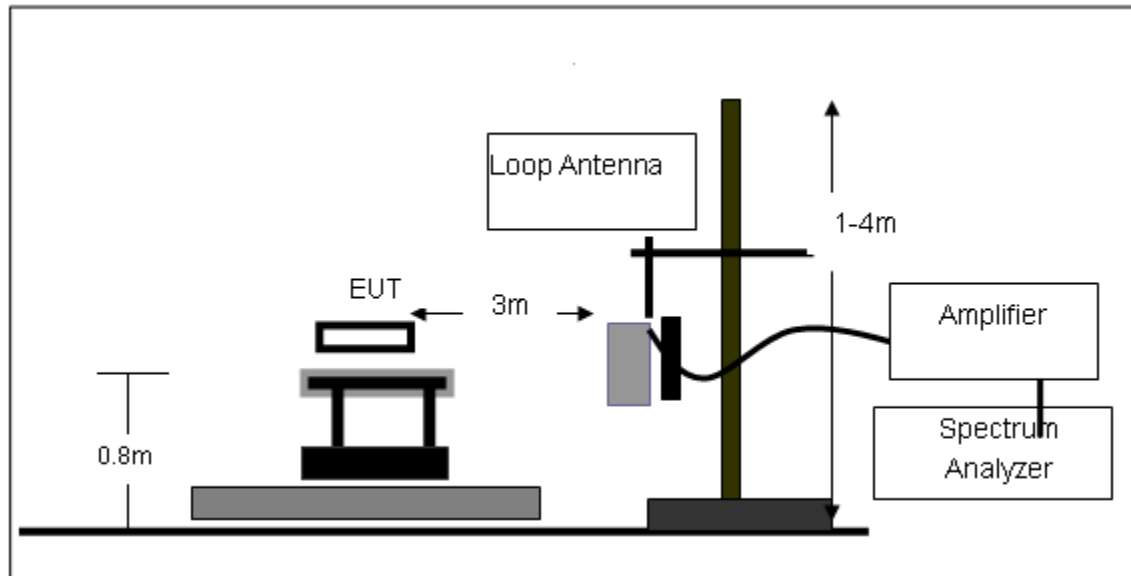

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

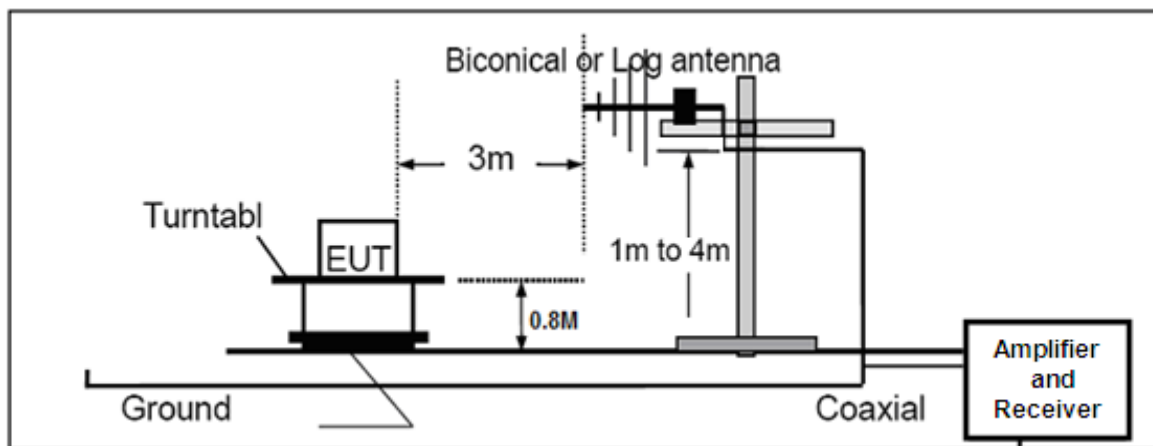

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

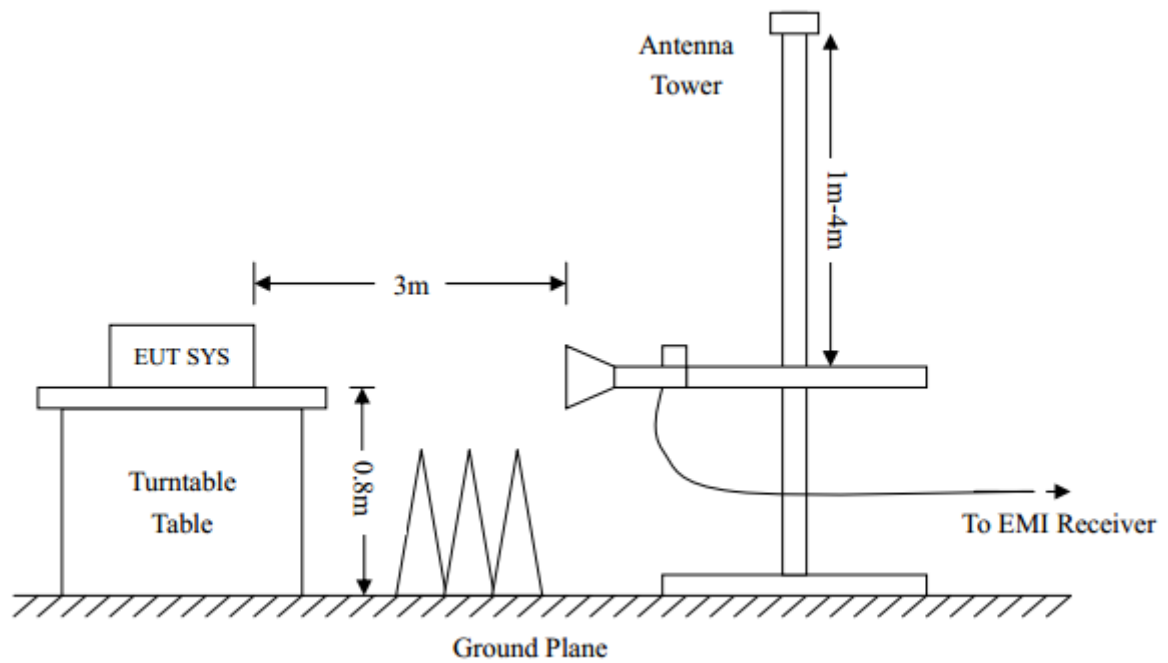


8.4. TEST RESULT(Worst modulation:GFSK)
FOR TRADITIONAL BLUETOOTH

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

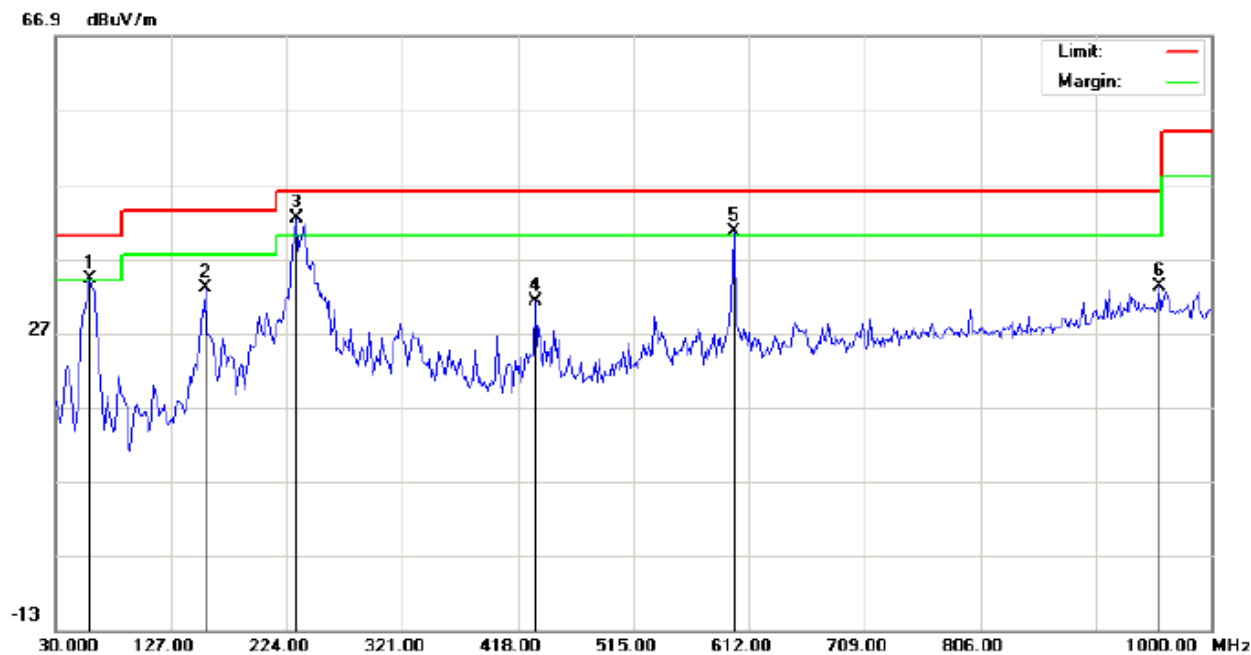


Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Bluetooth speaker
M/N: BSK52
Mode: Low chanel TX
Note:

Polarization: **Horizontal**
Power:
Distance: 3m
Temperature: 24.5
Humidity: 52.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	59.1000	23.08	11.16	34.24	40.00	-5.76	peak			
2		156.1000	17.62	15.30	32.92	43.50	-10.58	peak			
3	*	232.0833	29.13	13.22	42.35	46.00	-3.65	peak			
4		432.5500	11.23	20.06	31.29	46.00	-14.71	peak			
5	!	599.0667	16.89	23.71	40.60	46.00	-5.40	peak			
6		956.3500	3.19	29.94	33.13	46.00	-12.87	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

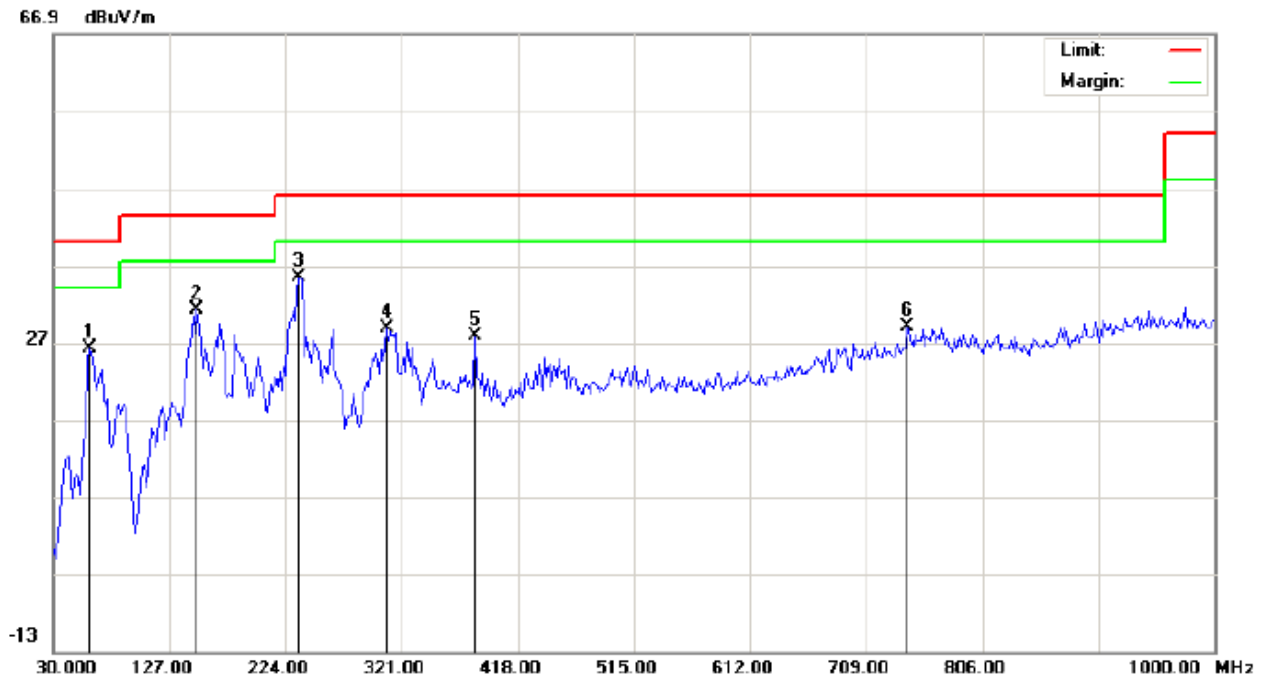

Site: site #1

Polarization: **Vertical**

Temperature: 24.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.8 %

EUT: Bluetooth speaker

Distance: 3m

M/N: BSK52

Mode: Low channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		60.7167	18.39	7.87	26.26	40.00	-13.74	peak			
2		149.6333	15.97	15.26	31.23	43.50	-12.27	peak			
3	*	235.3167	22.97	12.46	35.43	46.00	-10.57	peak			
4		308.0667	12.79	15.95	28.74	46.00	-17.26	peak			
5		382.4333	8.91	18.95	27.86	46.00	-18.14	peak			
6		742.9500	2.65	26.43	29.08	46.00	-16.92	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

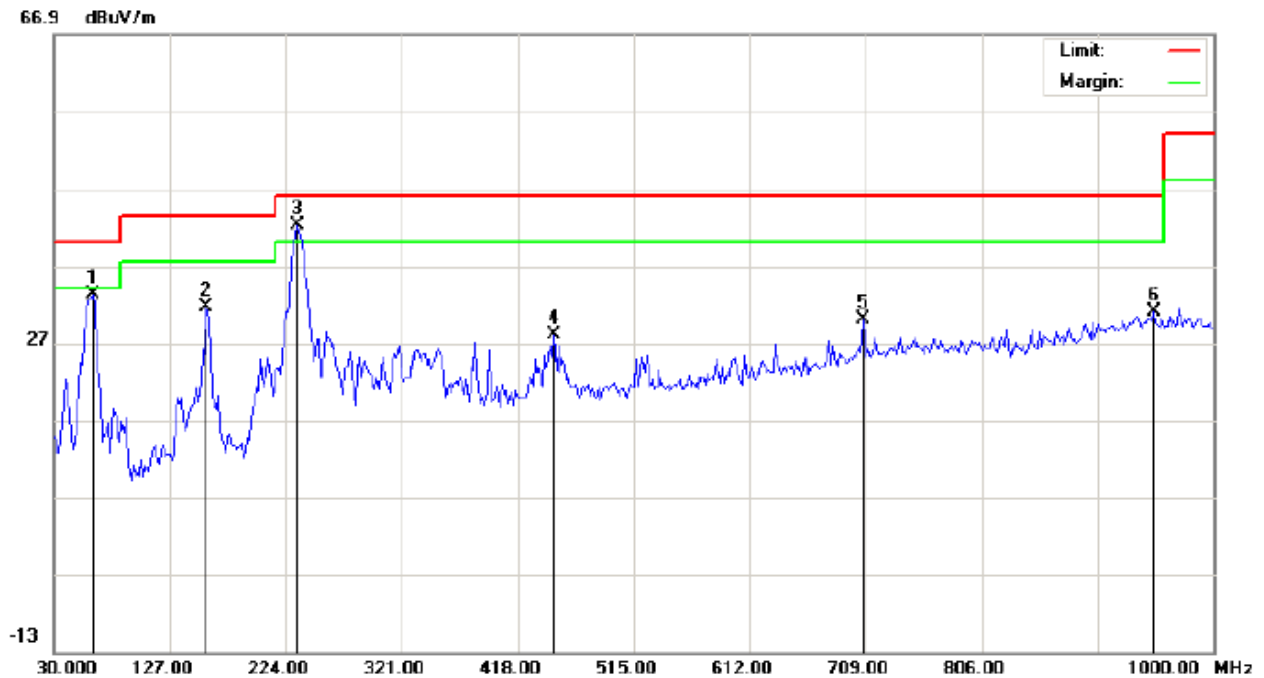

Site: site #1

Polarization: *Horizontal*

Temperature: 24.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.8 %

EUT: Bluetooth speaker

Distance: 3m

M/N: BSK52


Mode: Middle channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		62.3333	22.35	10.94	33.29	40.00	-6.71	peak			
2		157.7167	16.27	15.32	31.59	43.50	-11.91	peak			
3	*	233.7000	29.00	13.28	42.28	46.00	-3.72	peak			
4		448.7167	7.50	20.55	28.05	46.00	-17.95	peak			
5		707.3832	4.68	25.40	30.08	46.00	-15.92	peak			
6		949.8833	0.95	30.00	30.95	46.00	-15.05	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

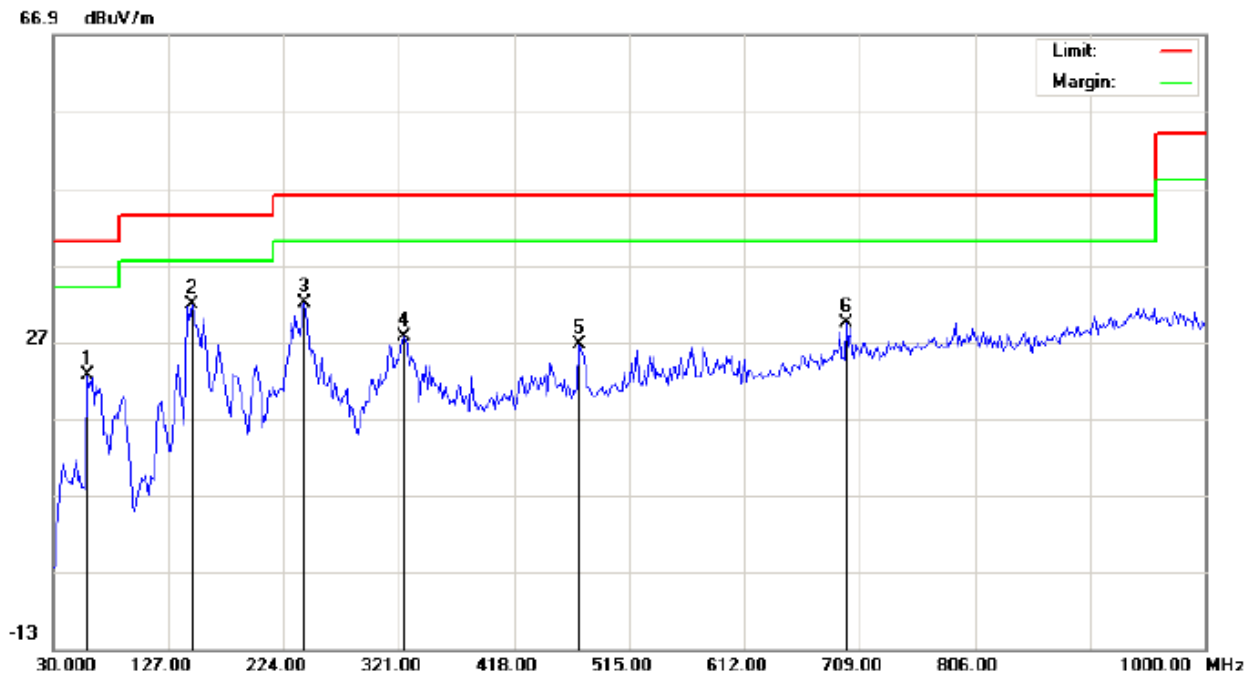

Site: site #1

Polarization: **Vertical**

Temperature: 24.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.8 %

EUT: Bluetooth speaker

Distance: 3m

M/N: BSK52

Mode: Middle channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		59.1000	14.42	8.16	22.58	40.00	-17.42	peak			
2	*	146.4000	16.60	15.24	31.84	43.50	-11.66	peak			
3		241.7833	18.99	13.09	32.08	46.00	-13.92	peak			
4		325.8500	10.50	17.13	27.63	46.00	-18.37	peak			
5		472.9667	5.84	20.84	26.68	46.00	-19.32	peak			
6		697.6833	4.18	25.13	29.31	46.00	-16.69	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

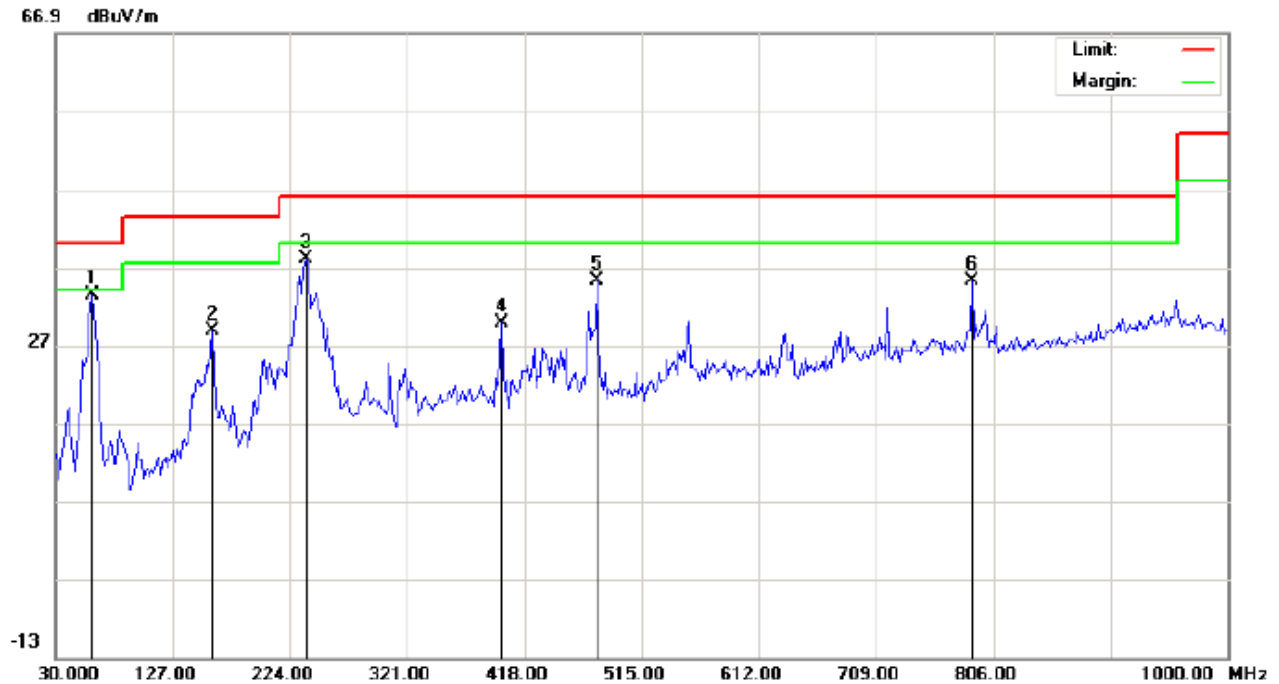

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth speaker

M/N: BSK52

Mode: High channel TX

Note:

Polarization: *Horizontal*

Power:

Distance: 3m


Temperature: 24.5

Humidity: 52.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	60.7167	22.31	11.09	33.40	40.00	-6.60	peak			
2		159.3333	13.51	15.33	28.84	43.50	-14.66	peak			
3		236.9333	24.56	13.40	37.96	46.00	-8.04	peak			
4		398.6000	10.68	19.06	29.74	46.00	-16.26	peak			
5		477.8167	14.36	20.89	35.25	46.00	-10.75	peak			
6		788.2167	7.98	27.16	35.14	46.00	-10.86	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

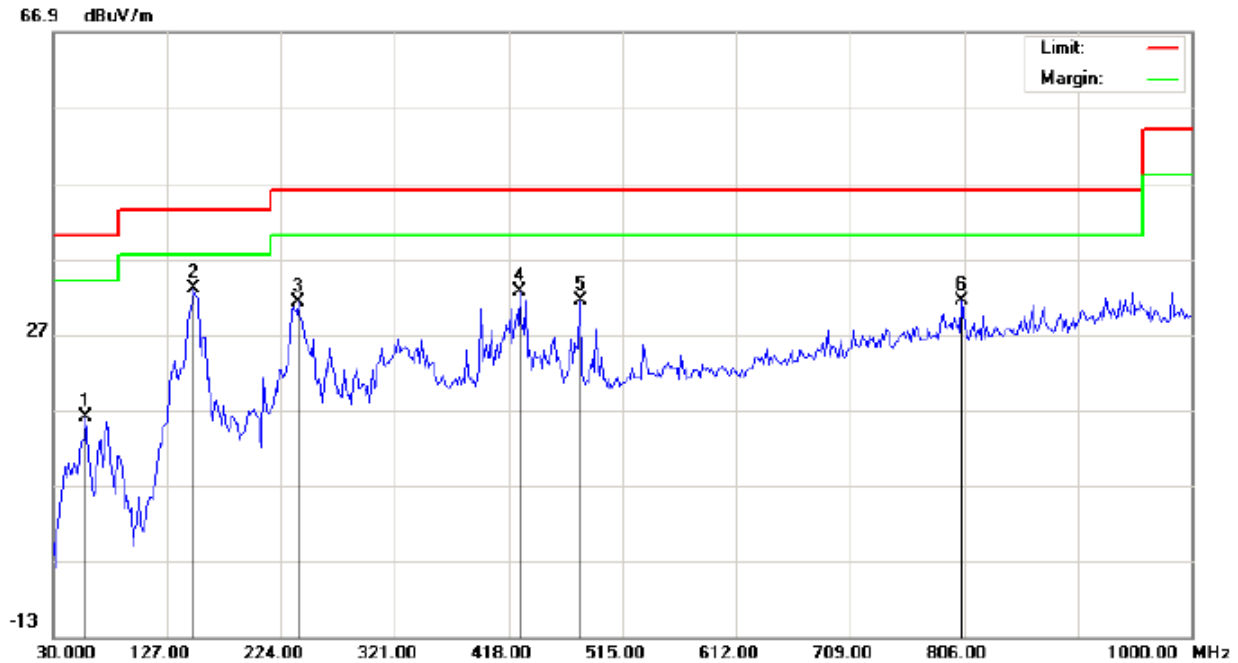

Site: site #1

Polarization: **Vertical**

Temperature: 24.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.8 %

EUT: Bluetooth speaker

Distance: 3m

M/N: BSK52

Mode: High channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		57.4833	7.92	8.17	16.09	40.00	-23.91	peak			
2	*	149.6333	17.78	15.26	33.04	43.50	-10.46	peak			
3		238.5500	18.42	12.78	31.20	46.00	-14.80	peak			
4		427.7000	12.60	19.91	32.51	46.00	-13.49	peak			
5		479.4333	10.49	20.91	31.40	46.00	-14.60	peak			
6		804.3832	4.00	27.32	31.32	46.00	-14.68	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

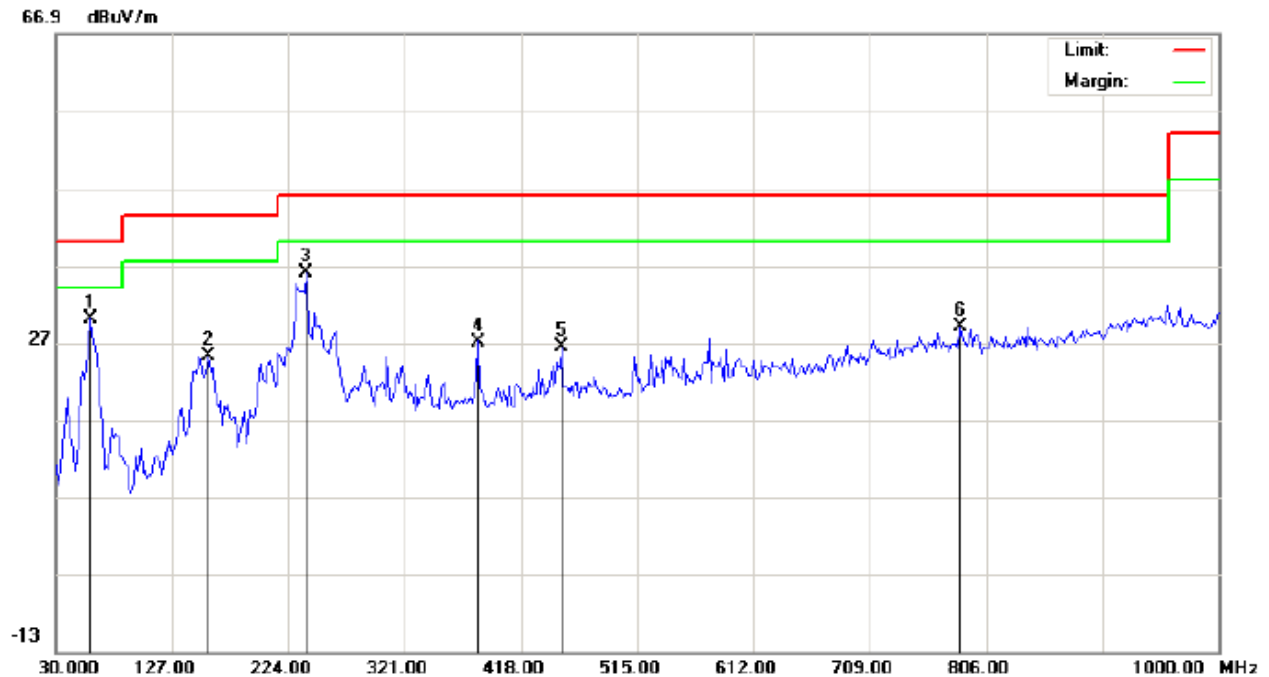

Site: site #1

Polarization: *Horizontal*

Temperature: 24.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.8 %

EUT: Bluetooth speaker

Distance: 3m


M/N: BSK52

Mode: Low channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	59.1000	18.94	11.16	30.10	40.00	-9.90	peak			
2		157.7167	9.79	15.32	25.11	43.50	-18.39	peak			
3		238.5500	22.60	13.46	36.06	46.00	-9.94	peak			
4		382.4333	8.15	18.95	27.10	46.00	-18.90	peak			
5		451.9500	5.78	20.61	26.39	46.00	-19.61	peak			
6		784.9833	1.97	27.11	29.08	46.00	-16.92	peak			

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL –VERTICAL

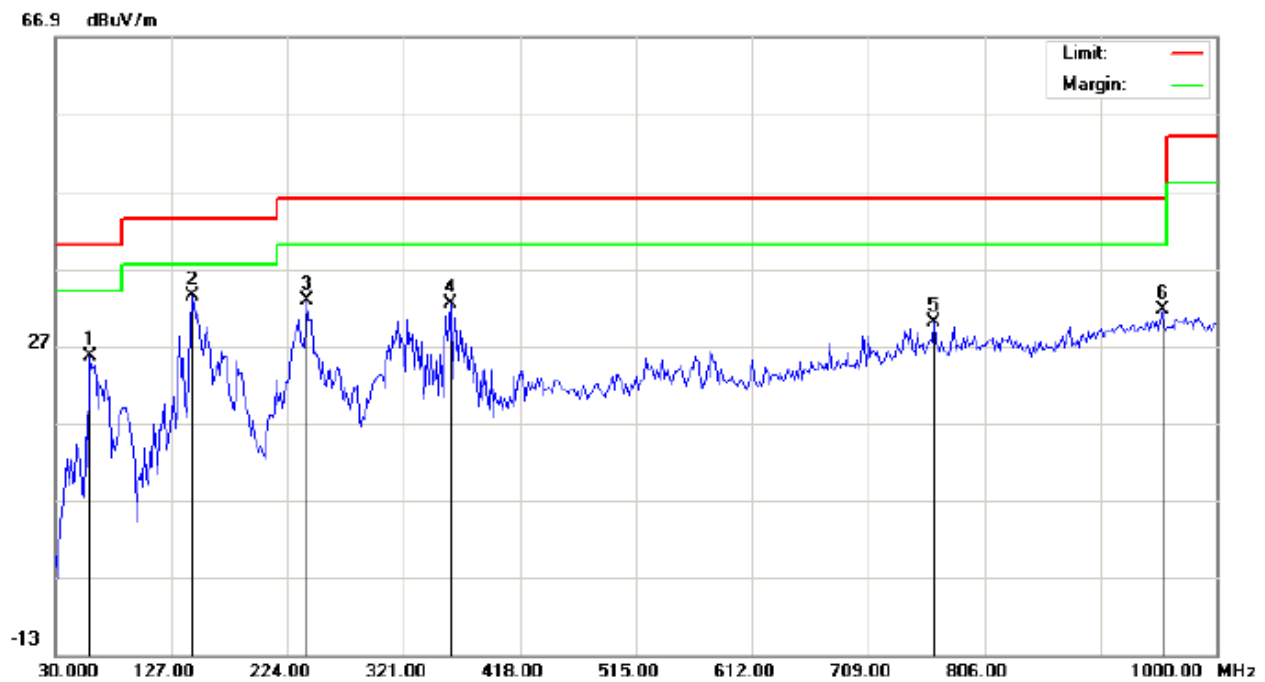

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth speaker

M/N: BSK52

Mode: Low channel TX

Note:

Polarization: *Vertical*

Power:


Distance: 3m

Temperature: 24.5

Humidity: 52.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		59.1000	17.37	8.16	25.53	40.00	-14.47	peak			
2	*	144.7833	18.18	15.23	33.41	43.50	-10.09	peak			
3		240.1667	19.78	12.94	32.72	46.00	-13.28	peak			
4		359.8000	13.52	18.80	32.32	46.00	-13.68	peak			
5		763.9667	3.12	26.82	29.94	46.00	-16.06	peak			
6		954.7333	1.65	29.95	31.60	46.00	-14.40	peak			

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

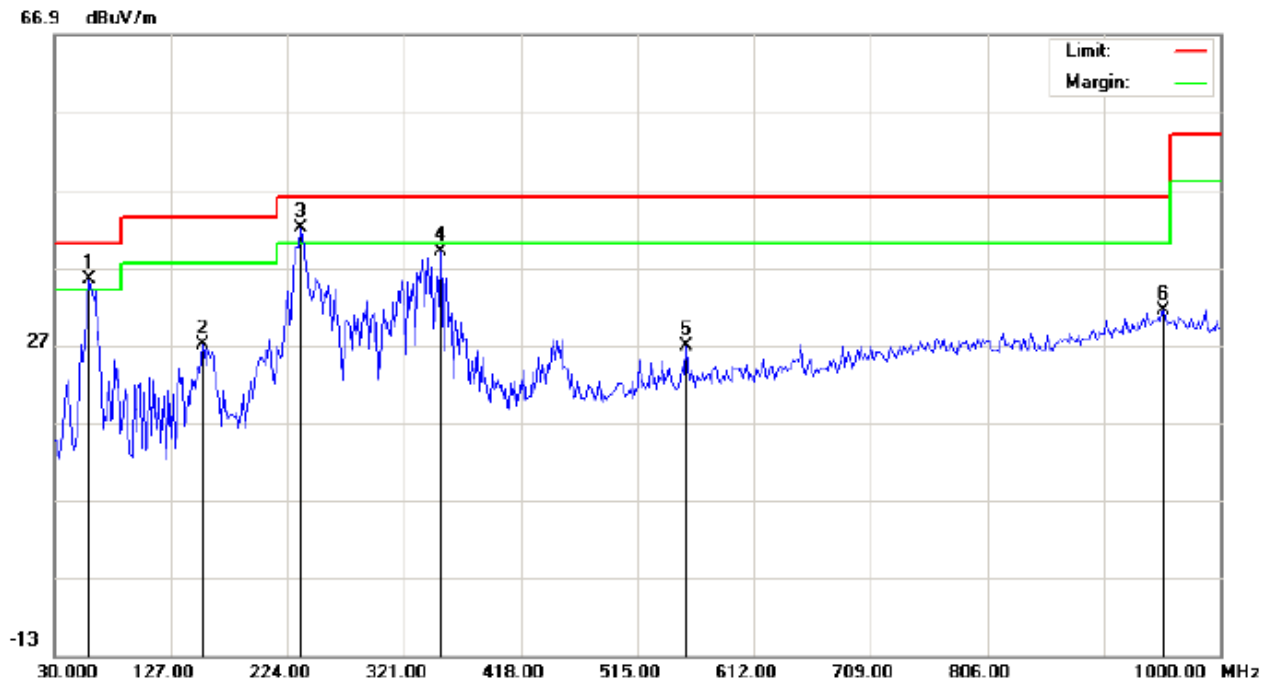

Site: site #1

Polarization: *Horizontal*

Temperature: 24.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.8 %

EUT: Bluetooth speaker

Distance: 3m


M/N: BSK52

Mode: Middle channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	59.1000	24.18	11.16	35.34	40.00	-4.66	peak			
2		152.8667	11.63	15.28	26.91	43.50	-16.59	peak			
3	*	235.3167	28.72	13.34	42.06	46.00	-3.94	peak			
4		351.7167	20.16	18.75	38.91	46.00	-7.09	peak			
5		555.4167	4.26	22.62	26.88	46.00	-19.12	peak			
6		953.1167	1.49	29.97	31.46	46.00	-14.54	peak			

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL –VERTICAL

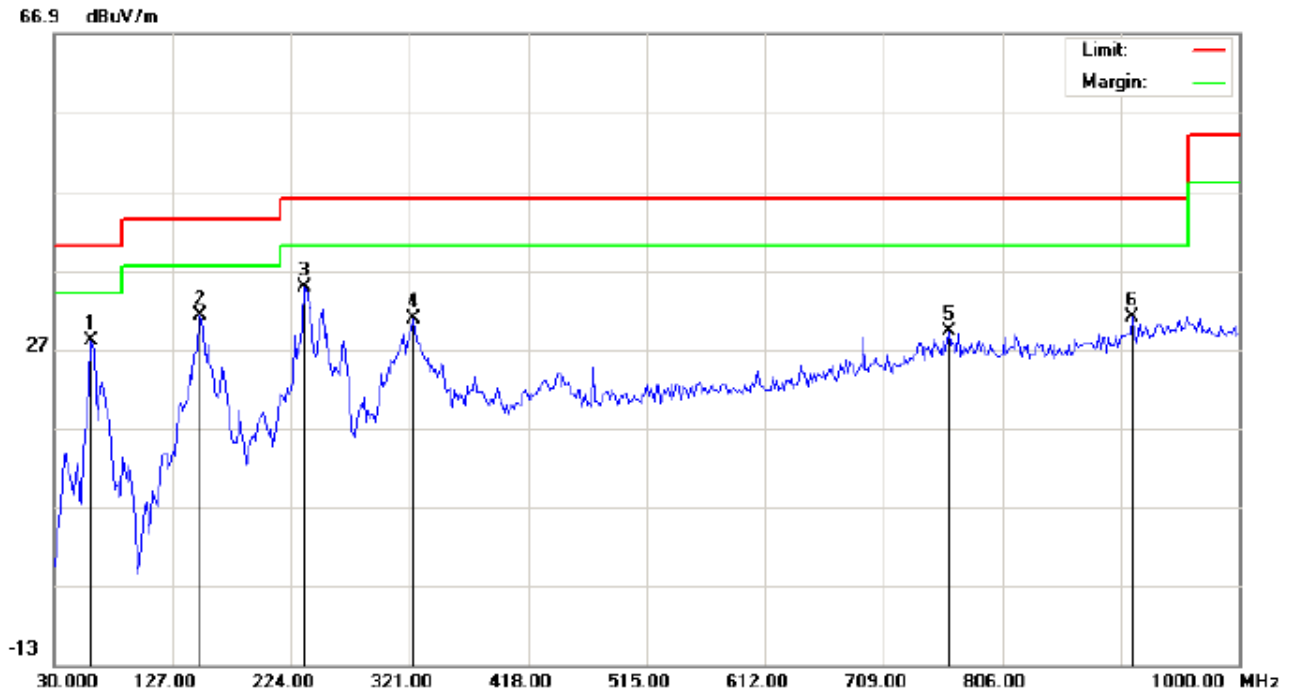

Site: site #1

Polarization: **Vertical**

Temperature: 24.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.8 %

EUT: Bluetooth speaker

Distance: 3m


M/N: BSK52

Mode: Middle channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		60.7167	20.09	7.87	27.96	40.00	-12.04	peak			
2		149.6333	16.03	15.26	31.29	43.50	-12.21	peak			
3	*	235.3167	22.26	12.46	34.72	46.00	-11.28	peak			
4		324.2333	13.83	17.02	30.85	46.00	-15.15	peak			
5		762.3500	2.38	26.80	29.18	46.00	-16.82	peak			
6		912.7000	2.13	28.96	31.09	46.00	-14.91	peak			

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

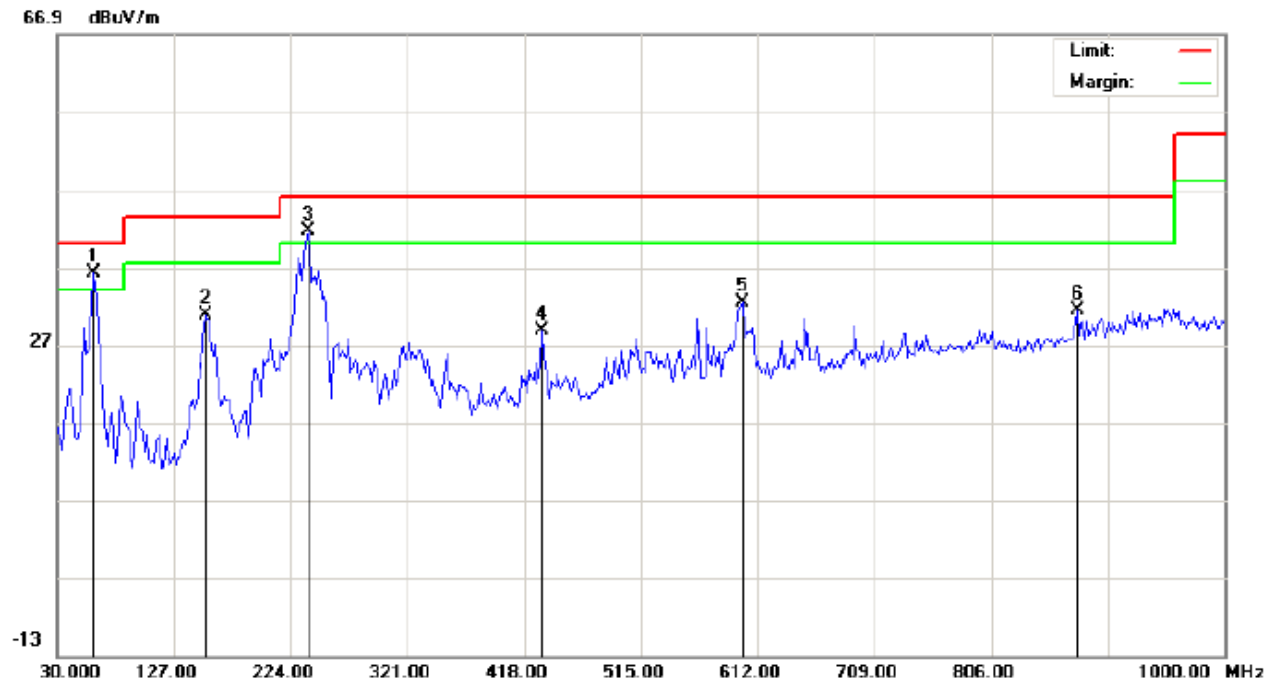


Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Bluetooth speaker
M/N: BSK52
Mode: High chanel TX
Note:

Polarization: *Horizontal*
Power:
Distance: 3m

Temperature: 24.5
Humidity: 52.8 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	60.7167	25.03	11.09	36.12	40.00	-3.88	peak			
2		152.8667	15.61	15.28	30.89	43.50	-12.61	peak			
3	!	238.5500	28.19	13.46	41.65	46.00	-4.35	peak			
4		432.5500	8.68	20.06	28.74	46.00	-17.26	peak			
5		599.0667	8.73	23.71	32.44	46.00	-13.56	peak			
6		877.1333	3.39	28.02	31.41	46.00	-14.59	peak			

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

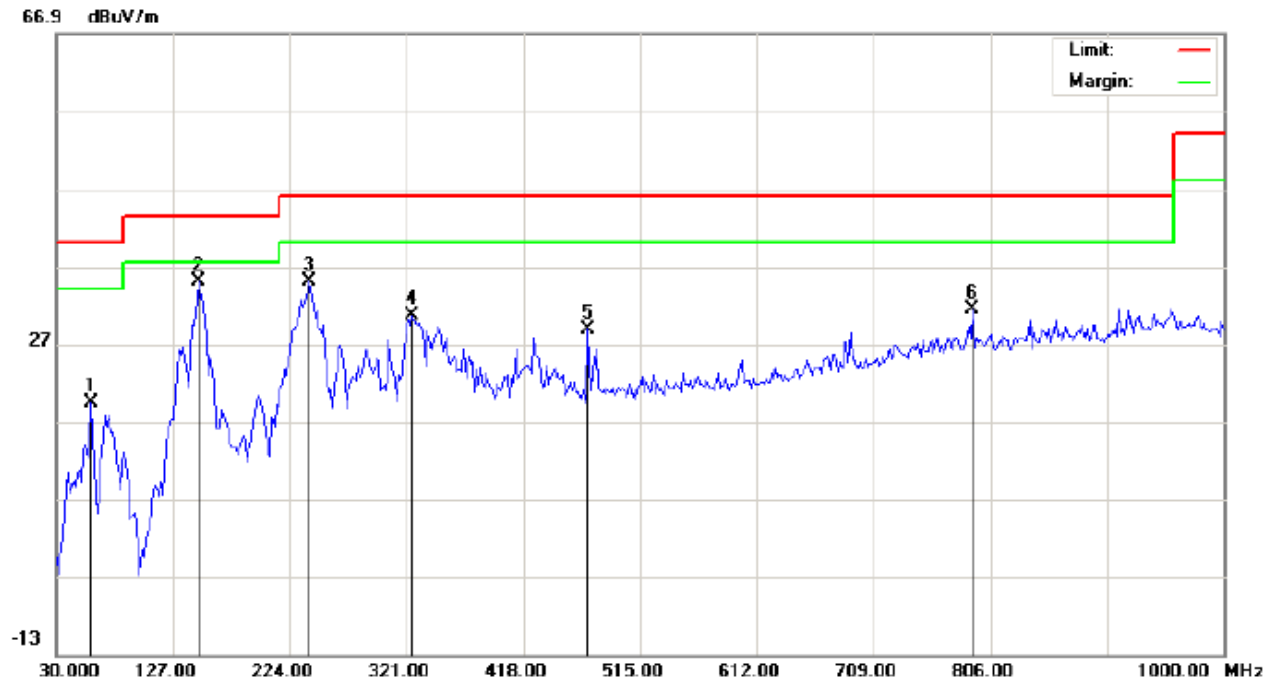

Site: site #1

Polarization: *Vertical*

Temperature: 24.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.8 %

EUT: Bluetooth speaker

Distance: 3m

M/N: BSK52


Mode: High channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		59.1000	11.32	8.16	19.48	40.00	-20.52	peak			
2	*	148.0167	19.83	15.25	35.08	43.50	-8.42	peak			
3		240.1667	22.15	12.94	35.09	46.00	-10.91	peak			
4		325.8500	13.39	17.13	30.52	46.00	-15.48	peak			
5		471.3500	8.08	20.82	28.90	46.00	-17.10	peak			
6		791.4500	4.17	27.20	31.37	46.00	-14.63	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

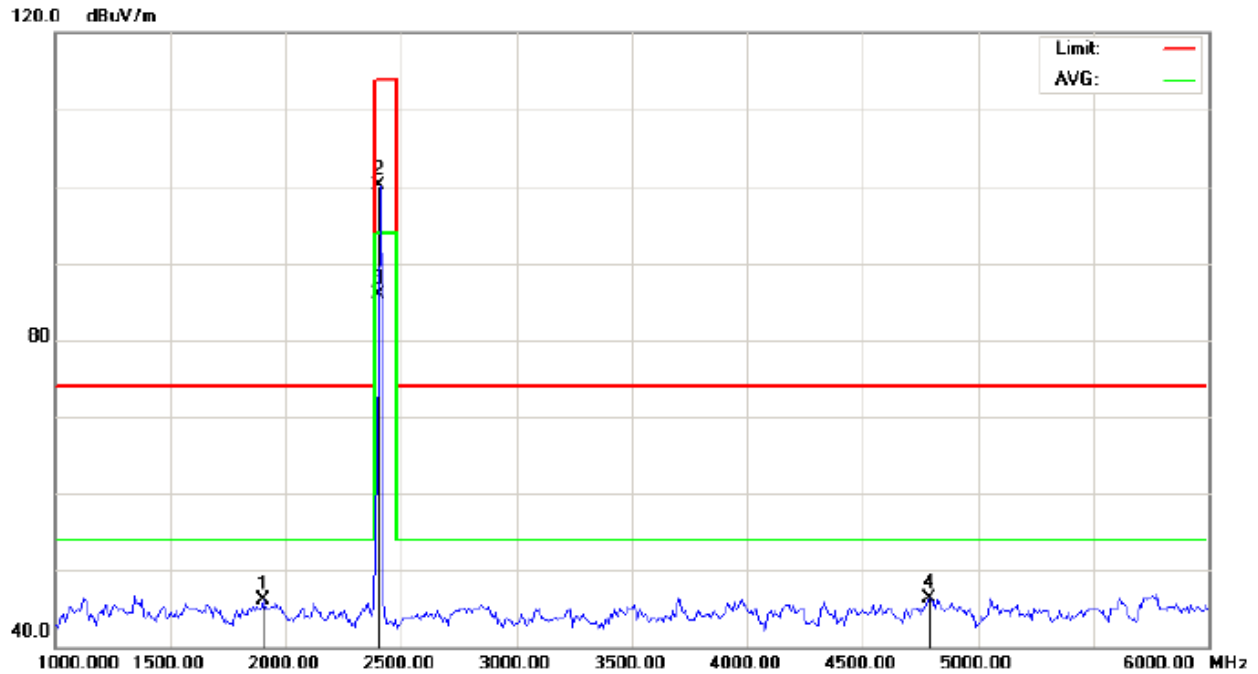RADIATED EMISSION ABOVE 1GHZ**FOR TRADITIONAL BLUETOOTH****RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL**

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance: 3m

M/N: BSK52


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1900.000	57.21	-11.17	46.04	74.00	-27.96	peak			
2		2402.000	109.73	-9.68	100.05	114.00	-13.95	peak			
3	*	2402.000	95.62	-9.68	85.94	94.00	-8.06	AVG	150	113	
4		4791.667	48.65	-2.35	46.30	74.00	-27.70	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

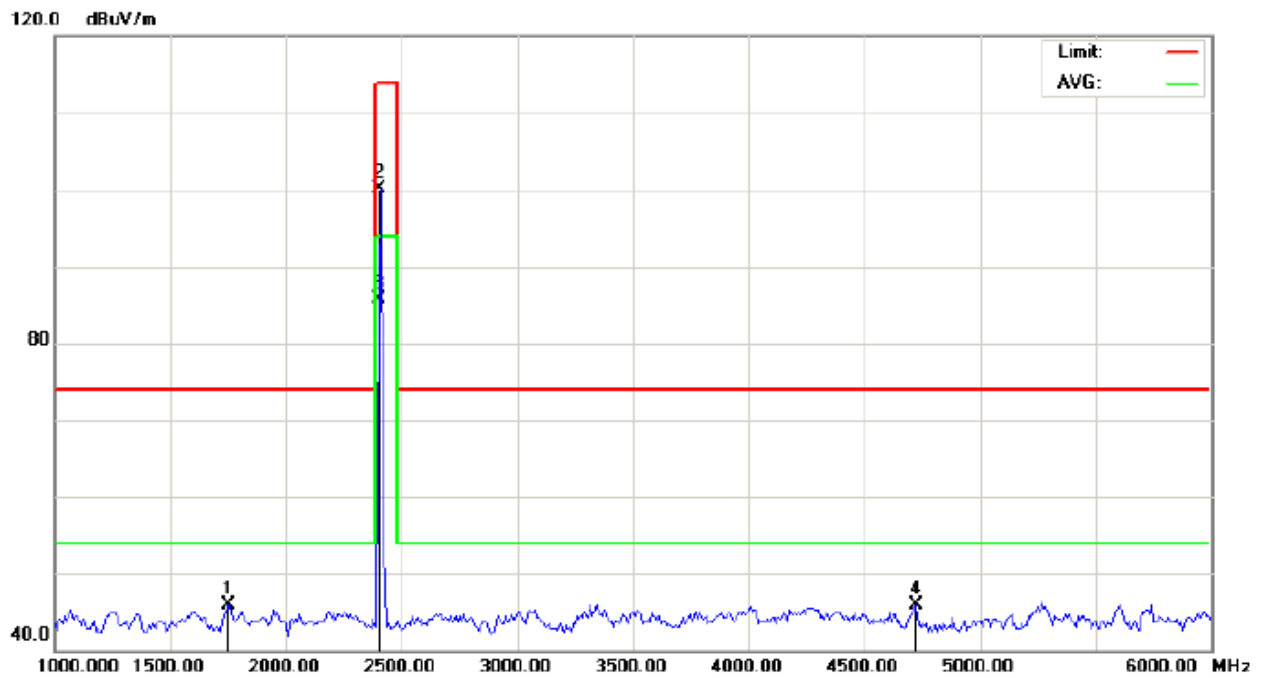

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance: 3m

M/N: BSK52


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1750.000	58.59	-12.75	45.84	74.00	-28.16	peak			
2		2402.000	109.73	-9.68	100.05	114.00	-13.95	peak			
3	*	2402.000	95.32	-9.68	85.64	94.00	-8.36	AVG	150	85	
4		4725.000	48.37	-2.52	45.85	74.00	-28.15	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

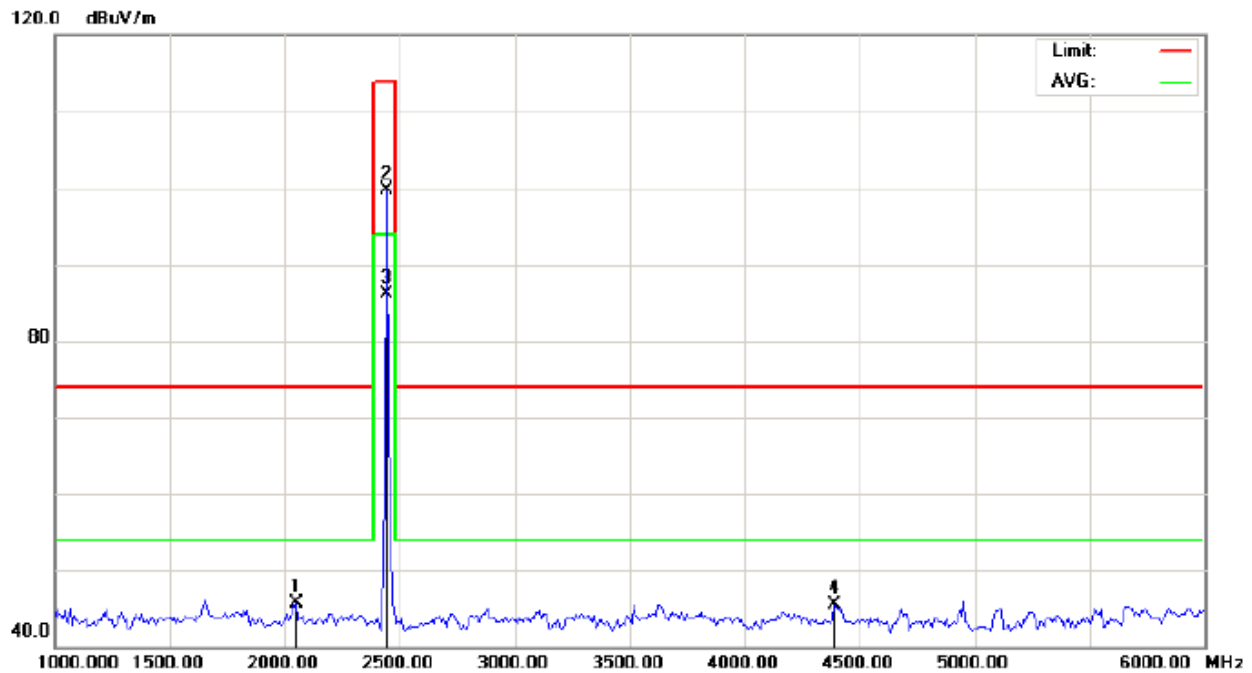

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance: 3m

M/N: BSK52


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2050.000	55.78	-10.06	45.72	74.00	-28.28	peak			
2		2441.000	109.29	-9.63	99.66	114.00	-14.34	peak			
3	*	2441.000	95.77	-9.63	86.14	94.00	-7.86	AVG	150	42	
4		4391.667	49.07	-3.48	45.59	74.00	-28.41	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

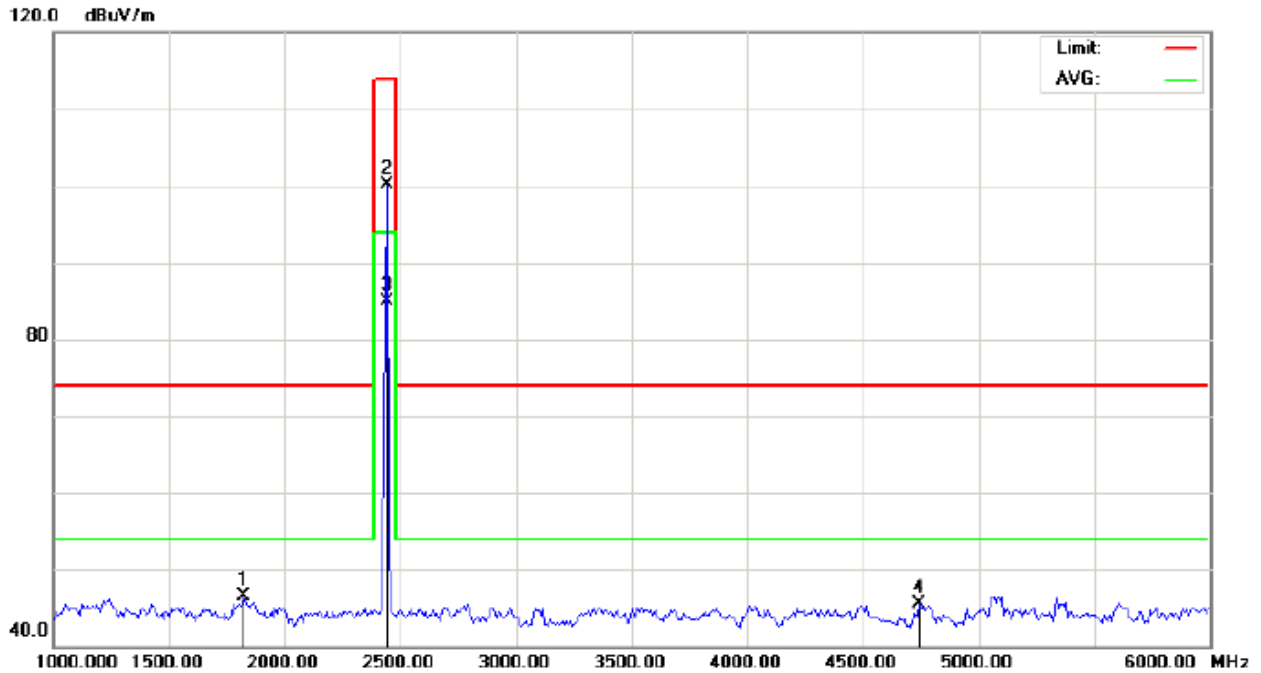


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth speaker Distance: 3m
M/N: BSK52
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1825.000	58.42	-11.96	46.46	74.00	-27.54	peak			
2		2441.000	109.73	-9.63	100.10	114.00	-13.90	peak			
3	*	2441.000	94.52	-9.63	84.89	94.00	-9.11	AVG	150	59	
4		4741.667	48.03	-2.48	45.55	74.00	-28.45	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

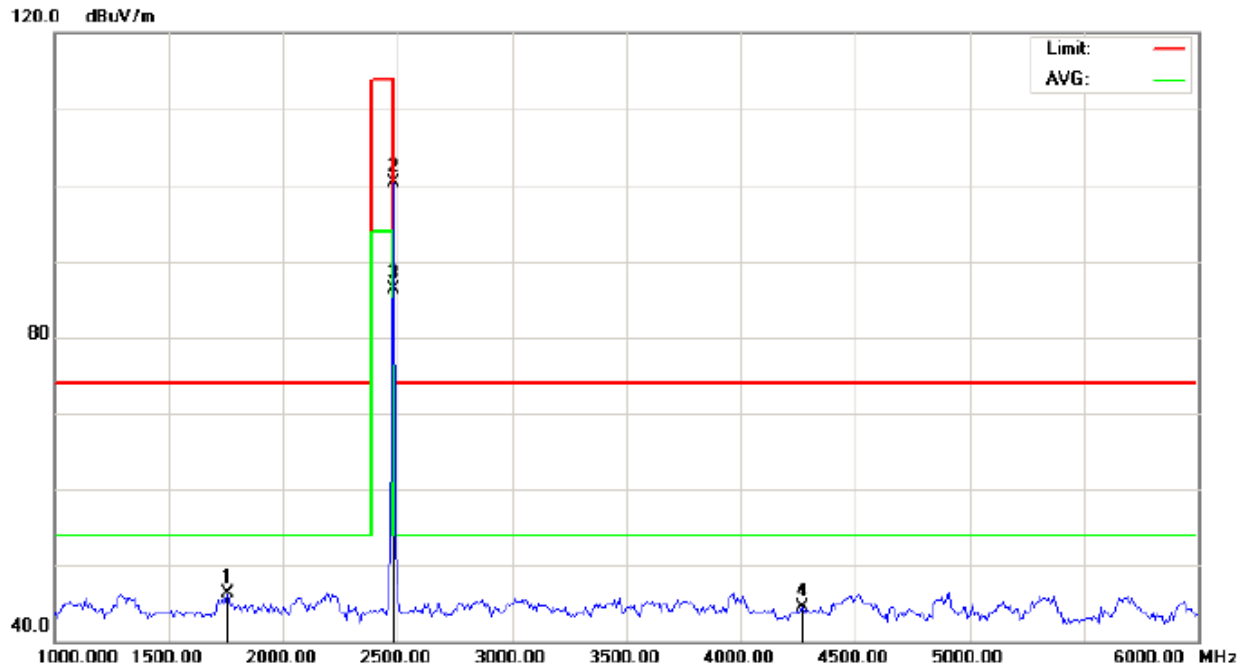

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance: 3m

M/N: BSK52


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1758.333	58.86	-12.66	46.20	74.00	-27.80	peak			
2		2480.000	109.87	-9.59	100.28	114.00	-13.72	peak			
3	*	2480.000	95.87	-9.59	86.28	94.00	-7.72	AVG	150	5	
4		4266.667	48.42	-3.90	44.52	74.00	-29.48	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

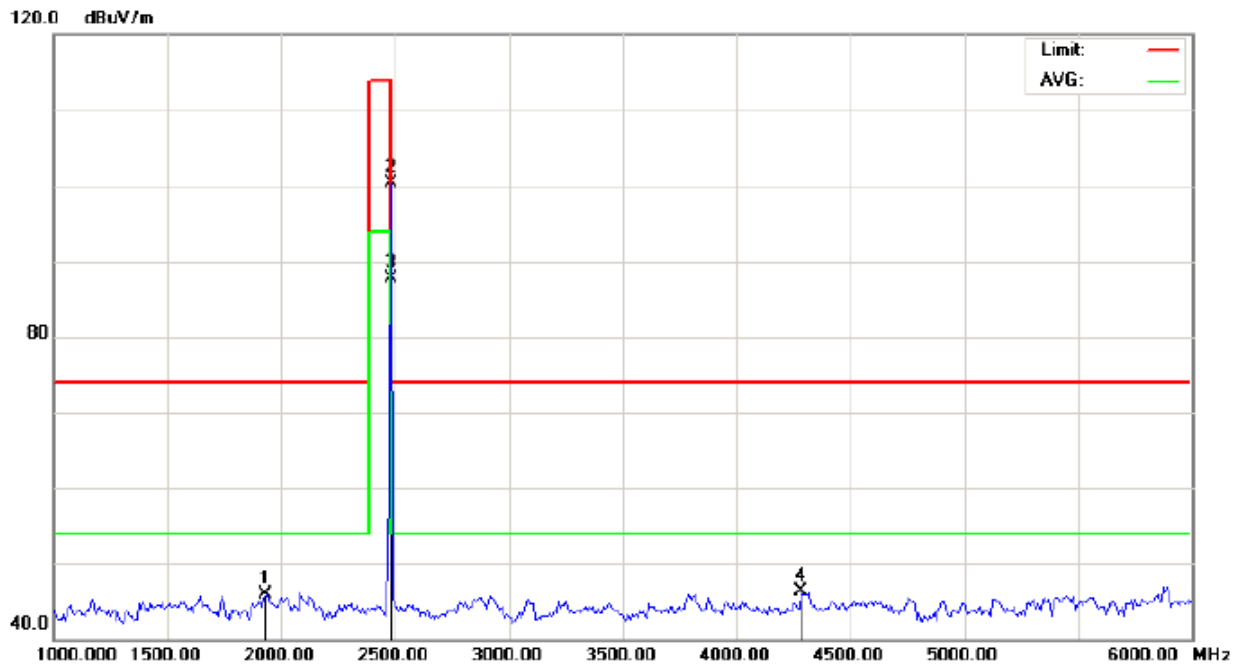

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance: 3m

M/N: BSK52

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1933.333	56.75	-10.82	45.93	74.00	-28.07	peak			
2		2480.000	109.87	-9.59	100.28	114.00	-13.72	peak			
3	*	2480.000	97.23	-9.59	87.64	94.00	-6.36	AVG	150	21	
4		4283.333	50.06	-3.85	46.21	74.00	-27.79	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	109.73	-9.68	100.05	114	-13.95	Horizontal
2402	109.73	-9.68	100.05	114	-13.95	Vertical
2441	109.29	-9.63	99.66	114	-14.34	Horizontal
2441	109.73	-9.63	100.10	114	-13.90	Vertical
2480	109.87	-9.59	100.28	114	-13.72	Horizontal
2480	109.87	-9.59	100.28	114	-13.72	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	95.62	-9.68	85.94	94	-8.60	Horizontal
2402	95.32	-9.68	85.64	94	-8.36	Vertical
2441	95.77	-9.63	86.14	94	-7.86	Horizontal
2441	94.52	-9.63	84.89	94	-9.11	Vertical
2480	95.87	-9.59	86.28	94	-7.72	Horizontal
2480	97.23	-9.59	87.64	94	-6.36	Vertical

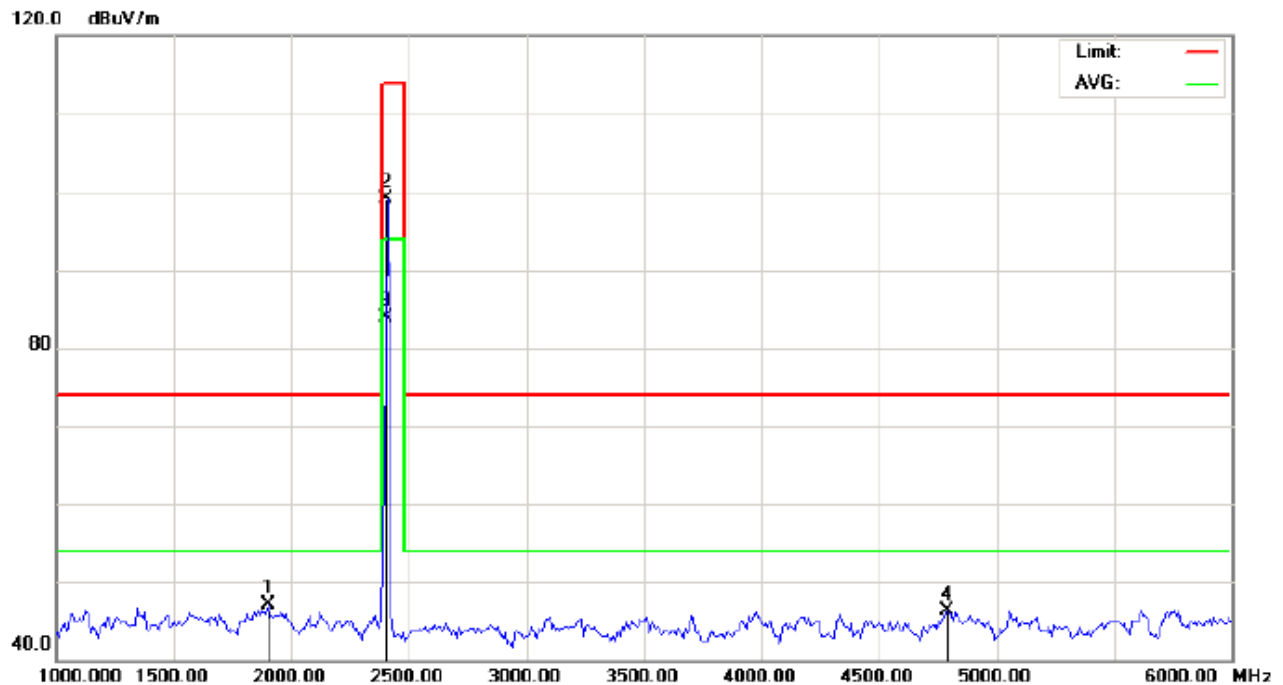FOR BLE**RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL**

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance: 3m


M/N: BSK52

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1900.000	58.21	-11.17	47.04	74.00	-26.96	peak			
2		2402.000	108.73	-9.68	99.05	114.00	-14.95	peak			
3	*	2402.000	93.60	-9.68	83.92	94.00	-10.08	AVG	150	243	
4		4791.667	48.65	-2.35	46.30	74.00	-27.70	peak			


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

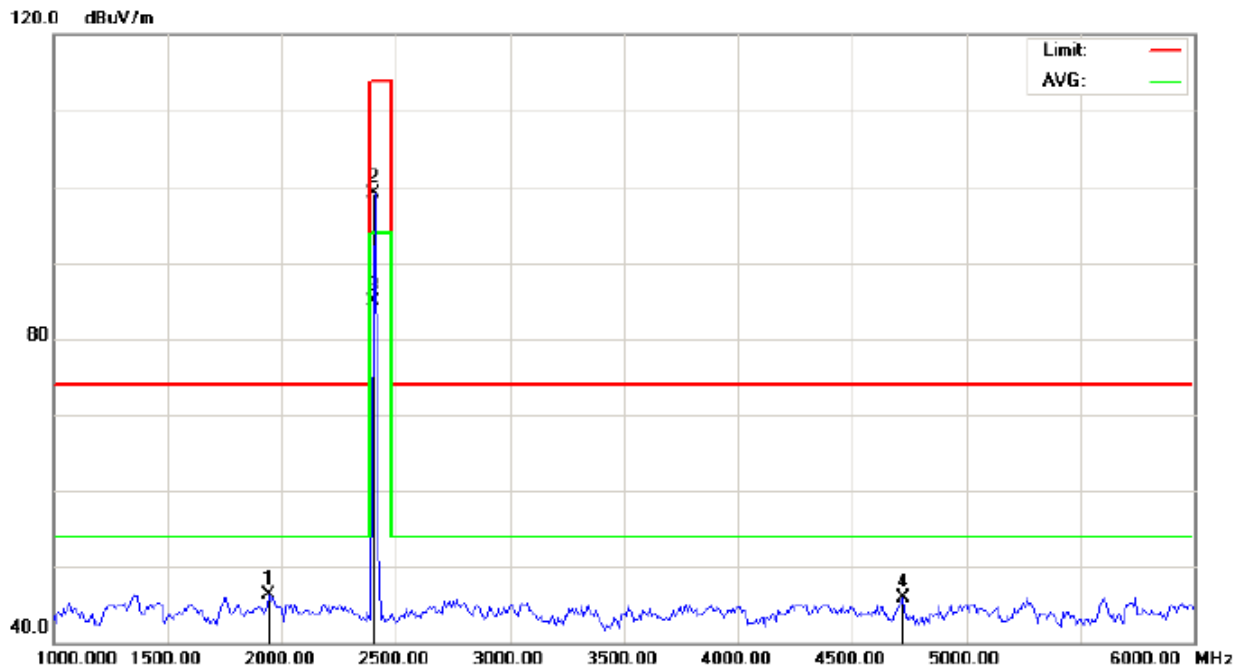

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth speaker Distance: 3m
M/N: BSK52
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1941.667	56.94	-10.73	46.21	74.00	-27.79	peak			
2		2402.000	108.73	-9.68	99.05	114.00	-14.95	peak			
3	*	2402.000	94.56	-9.68	84.88	94.00	-9.12	AVG	150	225	
4		4725.000	48.37	-2.52	45.85	74.00	-28.15	peak			

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

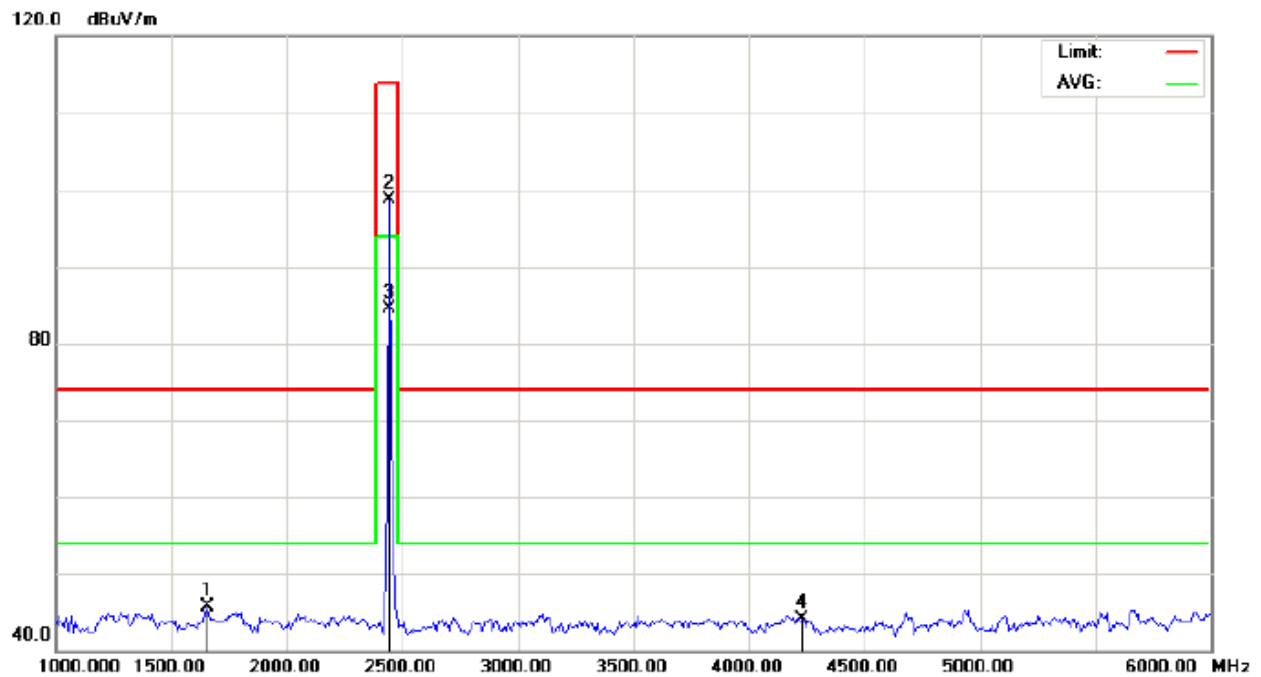

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance: 3m


M/N: BSK52

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1658.333	59.39	-13.71	45.68	74.00	-28.32	peak			
2		2441.000	108.29	-9.63	98.66	114.00	-15.34	peak			
3	*	2441.000	94.11	-9.63	84.48	94.00	-9.52	AVG	150	186	
4		4233.333	48.06	-4.02	44.04	74.00	-29.96	peak			

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

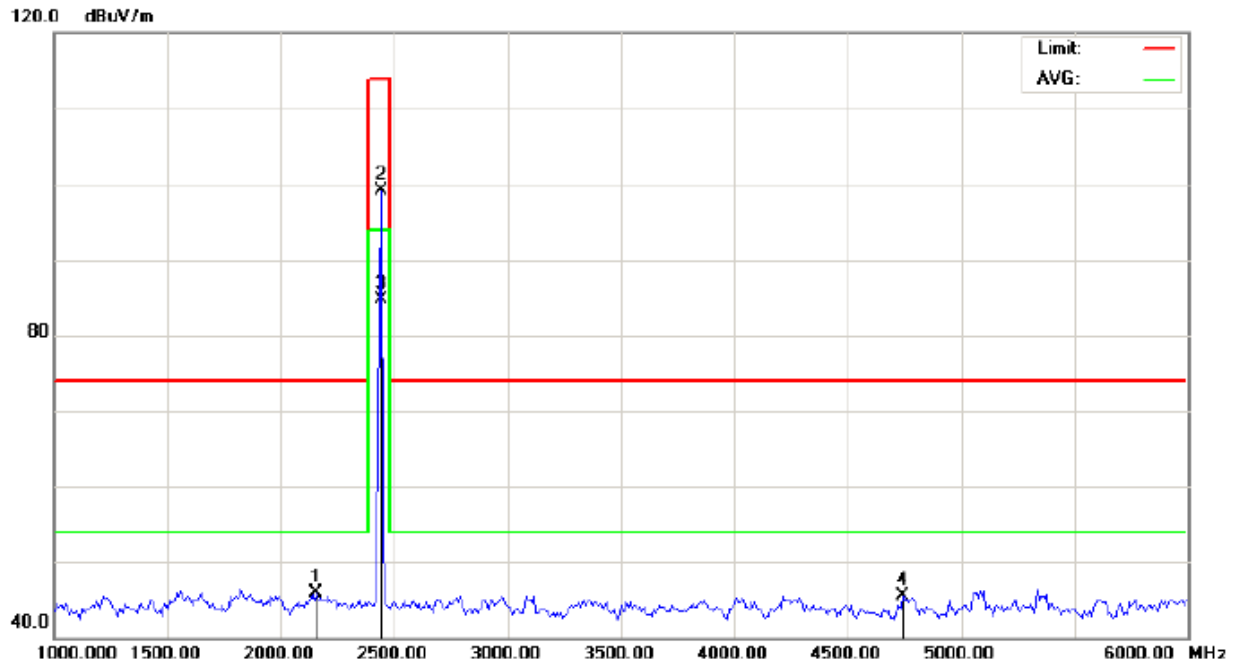


Site: site #1
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-
EUT: Bluetooth speaker
M/N: BSK52
Mode: Middle Channel TX
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2158.333	55.82	-9.95	45.87	74.00	-28.13	peak			
2		2441.000	108.73	-9.63	99.10	114.00	-14.90	peak			
3	*	2441.000	94.27	-9.63	84.64	94.00	-9.36	AVG	150	204	
4		4741.667	48.03	-2.48	45.55	74.00	-28.45	peak			

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

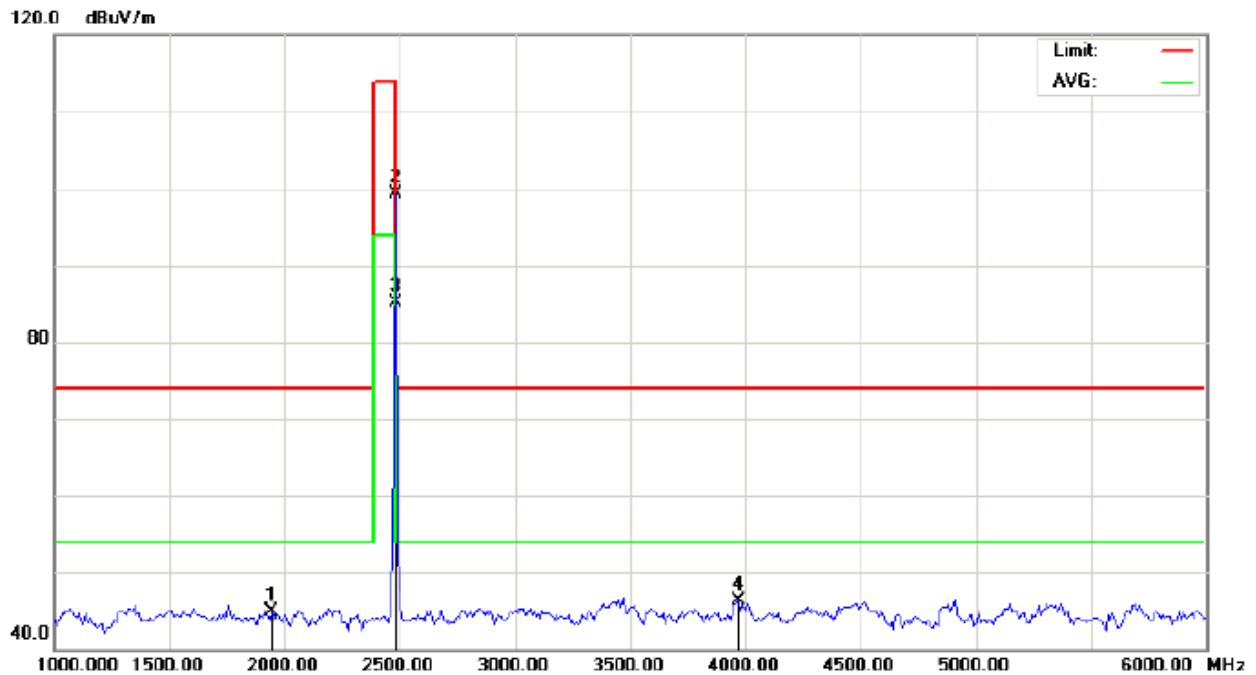

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance: 3m


M/N: BSK52

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1941.667	55.63	-10.73	44.90	74.00	-29.10	peak			
2		2480.000	108.87	-9.59	99.28	114.00	-14.72	peak			
3	*	2480.000	94.62	-9.59	85.03	94.00	-8.97	AVG	150	163	
4		3966.667	51.41	-5.02	46.39	74.00	-27.61	peak			

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

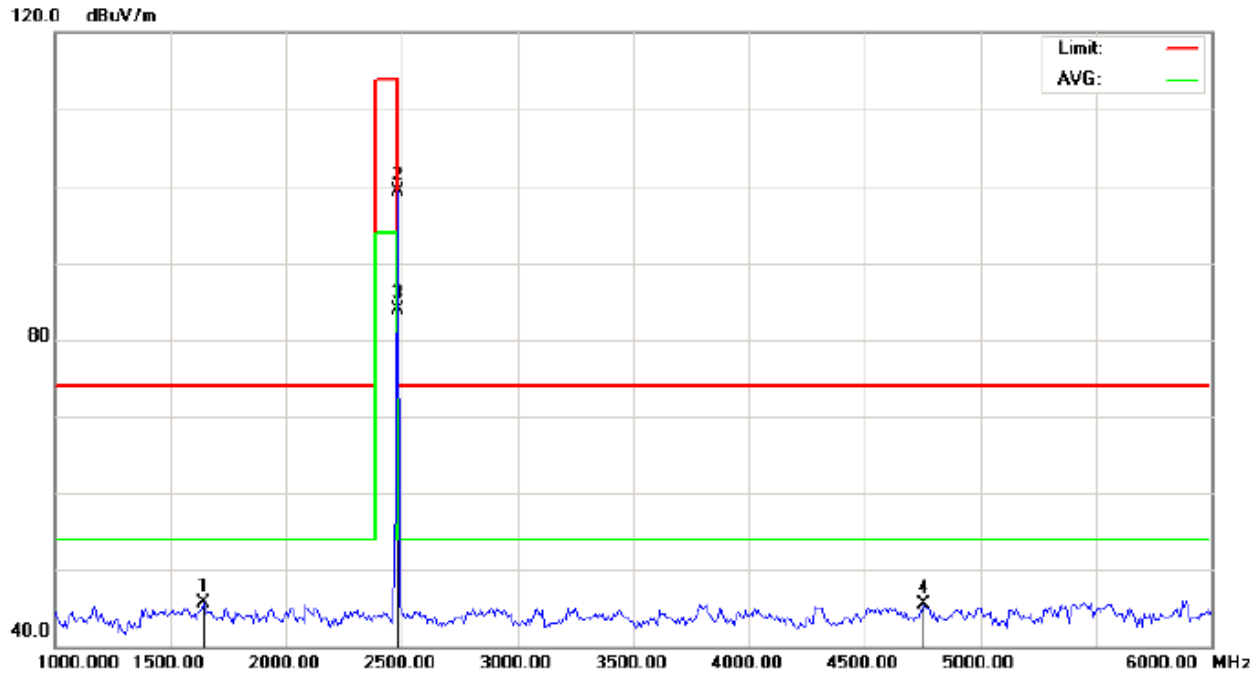

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance: 3m

M/N: BSK52

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1641.667	59.64	-13.89	45.75	74.00	-28.25	peak			
2		2480.000	108.87	-9.59	99.28	114.00	-14.72	peak			
3	*	2480.000	93.46	-9.59	83.87	94.00	-10.13	AVG	150	132	
4		4758.333	47.89	-2.43	45.46	74.00	-28.54	peak			

RESULT: PASS**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	108.73	-9.68	99.05	114	-14.95	Horizontal
2402	108.73	-9.68	99.05	114	-14.95	Vertical
2441	108.29	-9.63	98.66	114	-15.34	Horizontal
2441	108.73	-9.63	99.10	114	-14.90	Vertical
2480	108.87	-9.59	99.28	114	-14.72	Horizontal
2480	108.87	-9.59	99.28	114	-14.72	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	93.60	-9.68	83.92	94	-10.08	Horizontal
2402	94.56	-9.68	84.88	94	-9.12	Vertical
2441	94.11	-9.63	84.48	94	-9.52	Horizontal
2441	94.27	-9.63	84.64	94	-9.36	Vertical
2480	94.62	-9.59	85.03	94	-8.97	Horizontal
2480	93.46	-9.59	83.87	94	-10.13	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO


(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

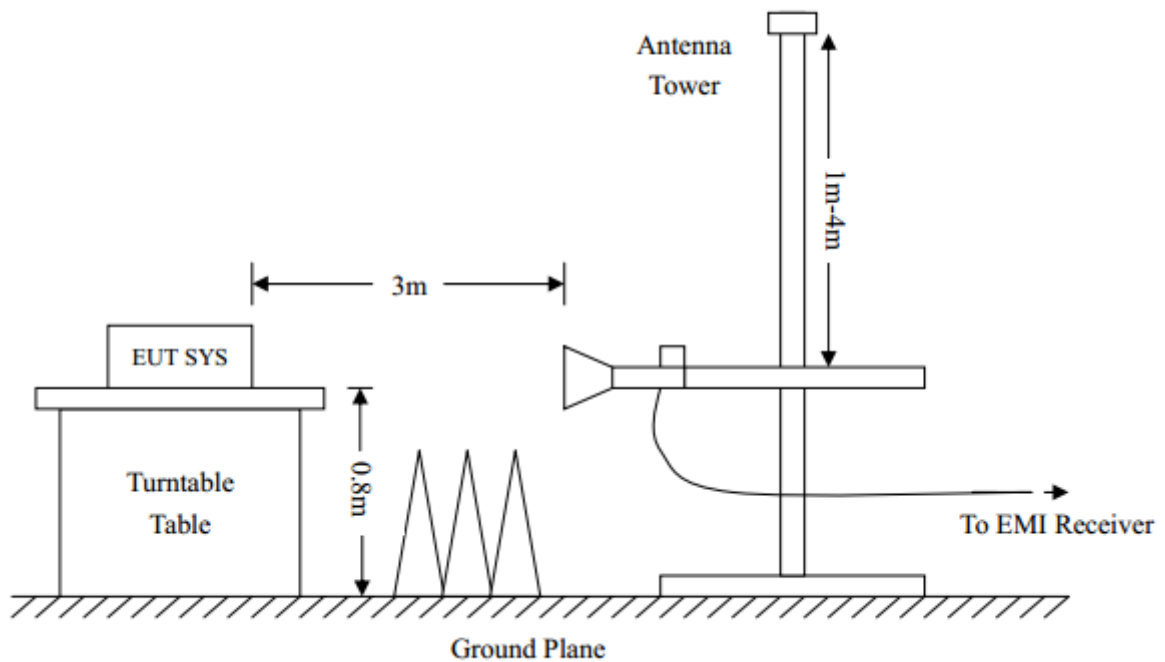


CONDUCTED TEST SETUP

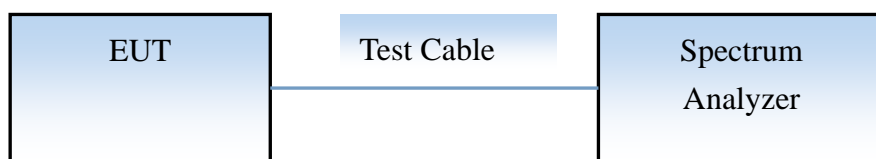

9.3 RADIATED TEST RESULT(Worst modulation:GFSK)
FOR TRADITIONAL BLEUTOOTH


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

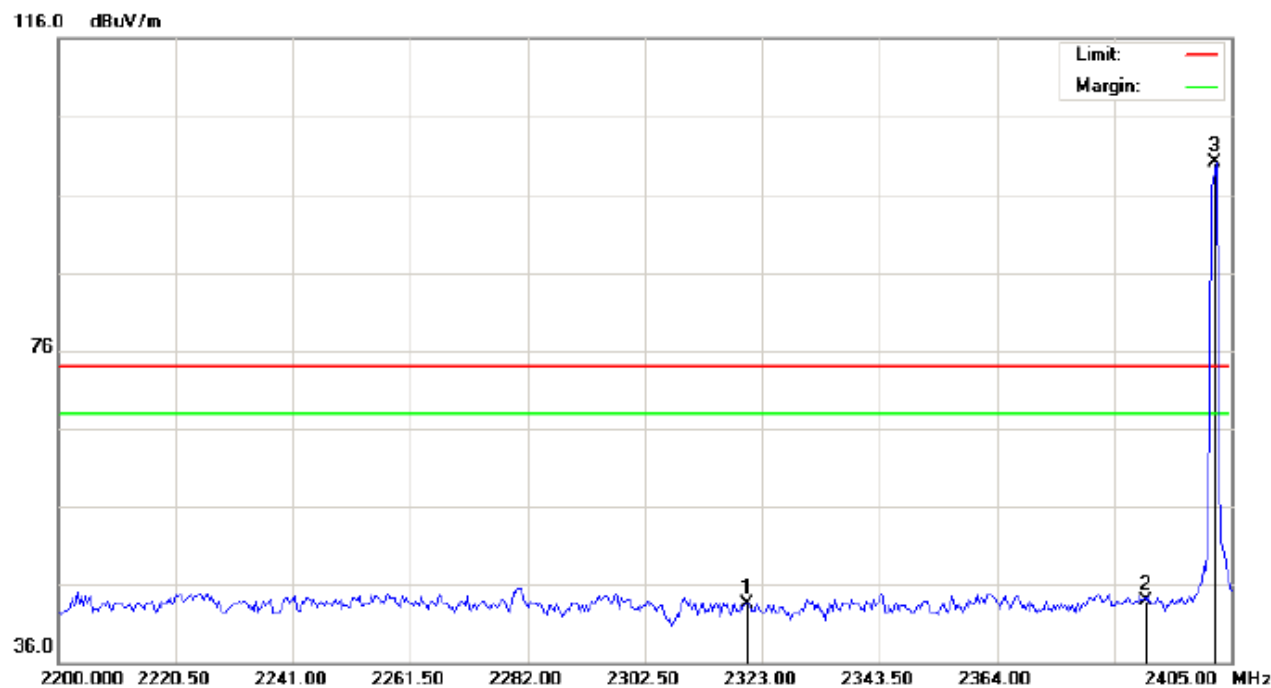

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: Bluetooth speaker	Distance:	
M/N: BSK52		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2320.267	33.36	10.23	43.59	74.00	-30.41	peak			
2		2390.000	33.50	10.31	43.81	74.00	-30.19	peak			
3	*	2402.000	89.72	10.32	100.04	74.00	26.04	peak			

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

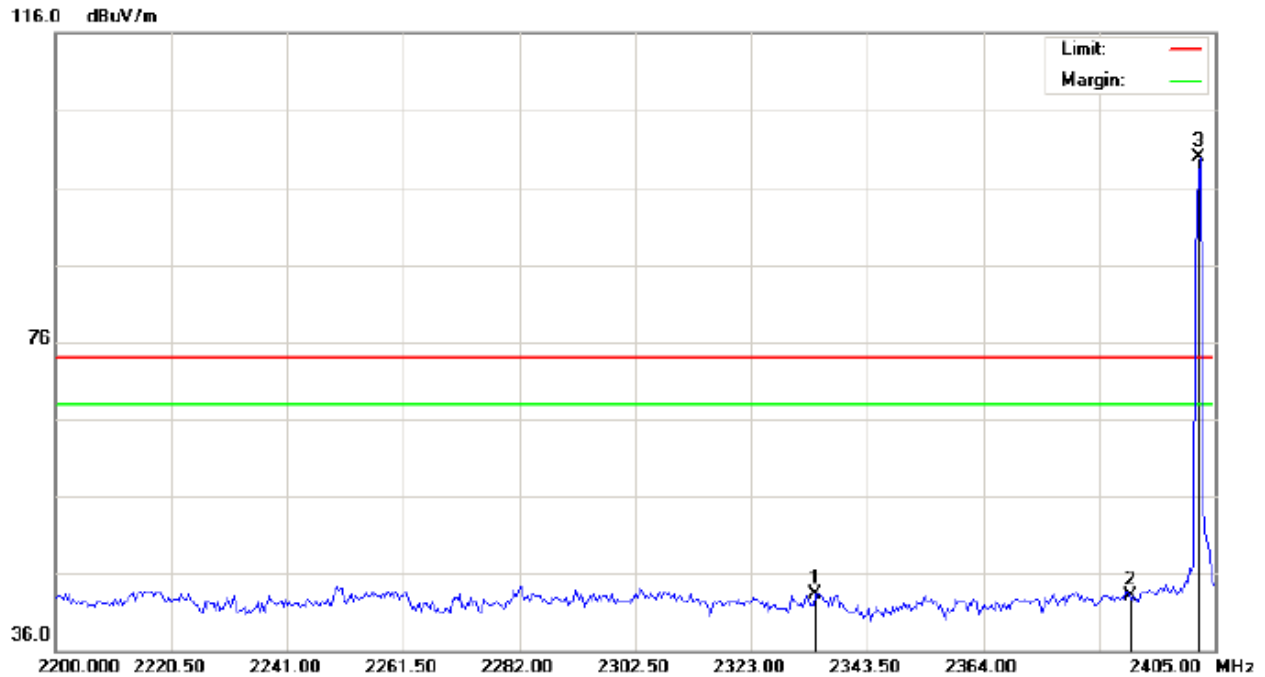

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance:


M/N: BSK52

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2334.275	33.10	10.25	43.35	74.00	-30.65	peak			
2		2390.000	32.71	10.31	43.02	74.00	-30.98	peak			
3	*	2402.000	89.59	10.32	99.91	74.00	25.91	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

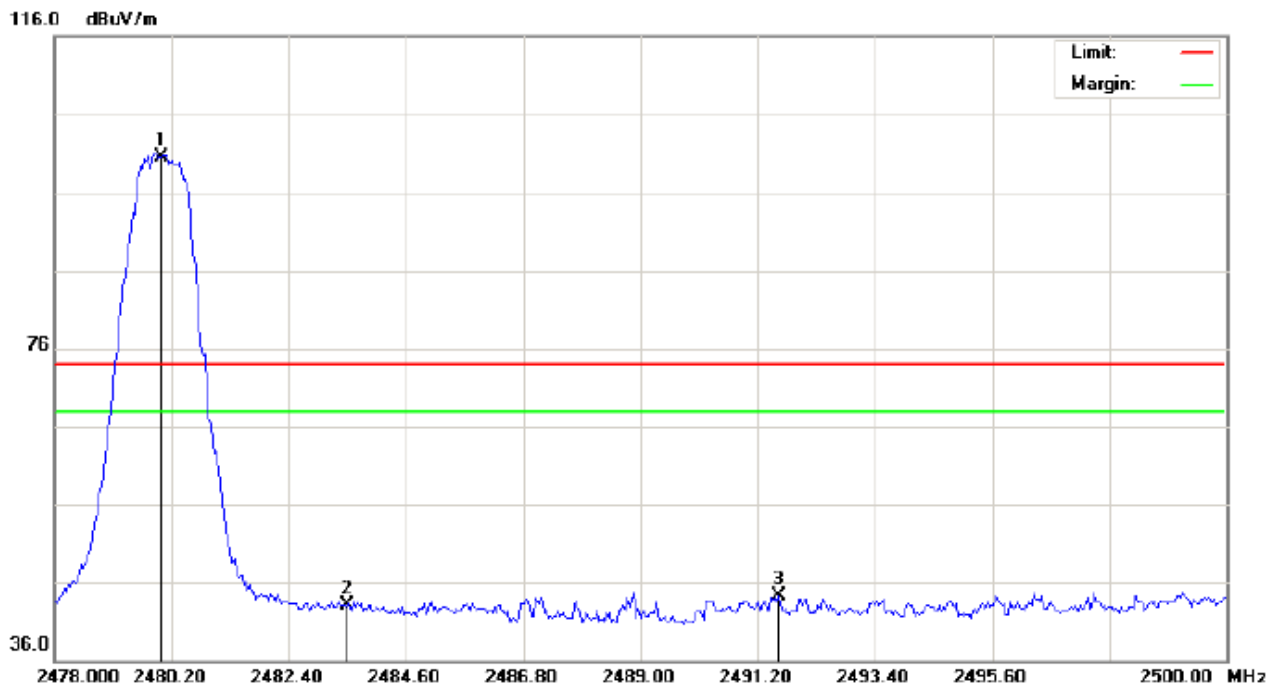

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance:


M/N: BSK52

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	90.05	10.41	100.46	74.00	26.46	peak			
2		2483.500	32.69	10.41	43.10	74.00	-30.90	peak			
3		2491.603	33.79	10.42	44.21	74.00	-29.79	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

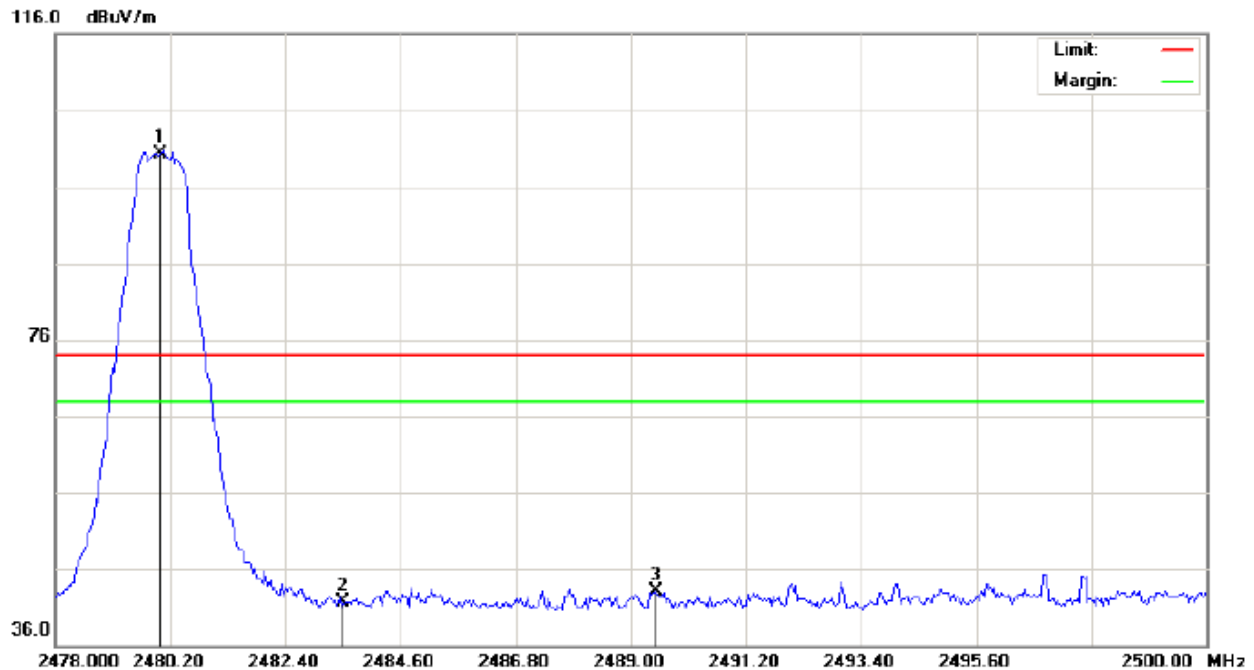

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance:

M/N: BSK52

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	89.82	10.41	100.23	74.00	26.23	peak			
2		2483.500	31.26	10.41	41.67	74.00	-32.33	peak			
3		2489.477	32.71	10.42	43.13	74.00	-30.87	peak			


RESULT: PASS**Note:** The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

FOR BLE


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

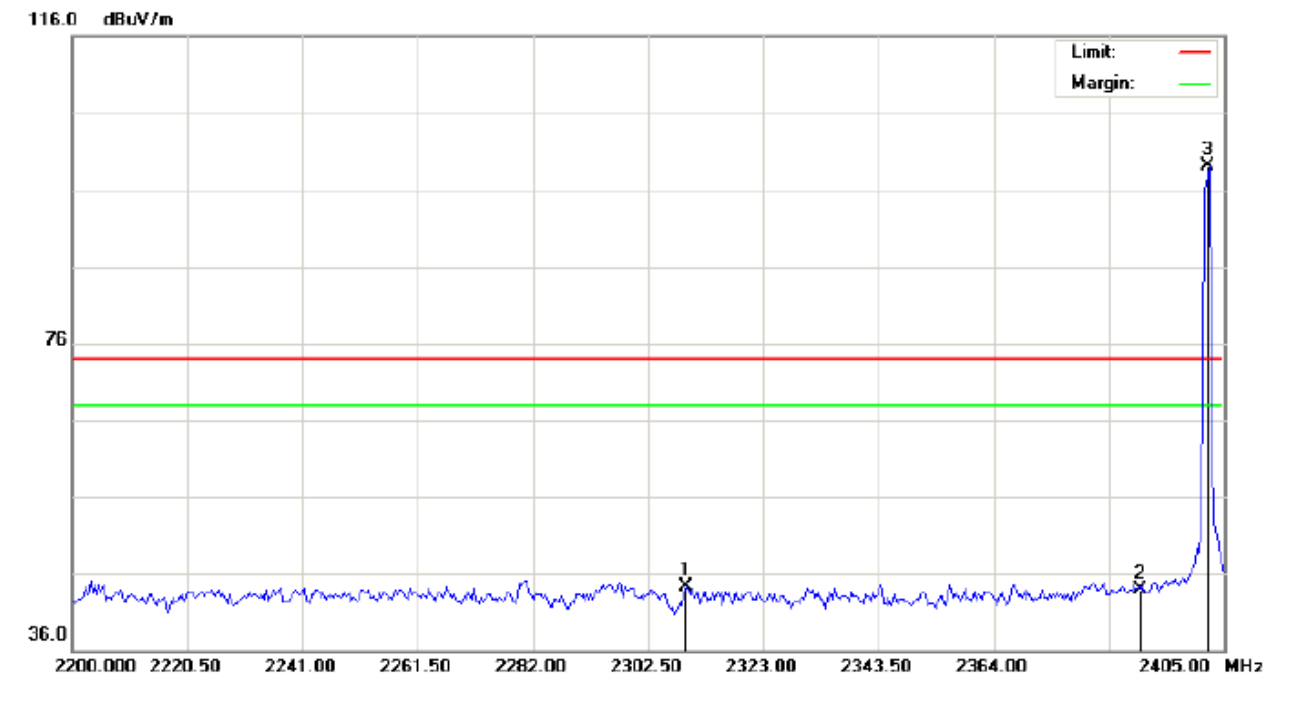

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: Bluetooth speaker	Distance:	
M/N: BSK52		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2309.333	34.06	10.22	44.28	74.00	-29.72	peak			
2		2390.000	33.50	10.31	43.81	74.00	-30.19	peak			
3	*	2402.000	88.72	10.32	99.04	74.00	25.04	peak			

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

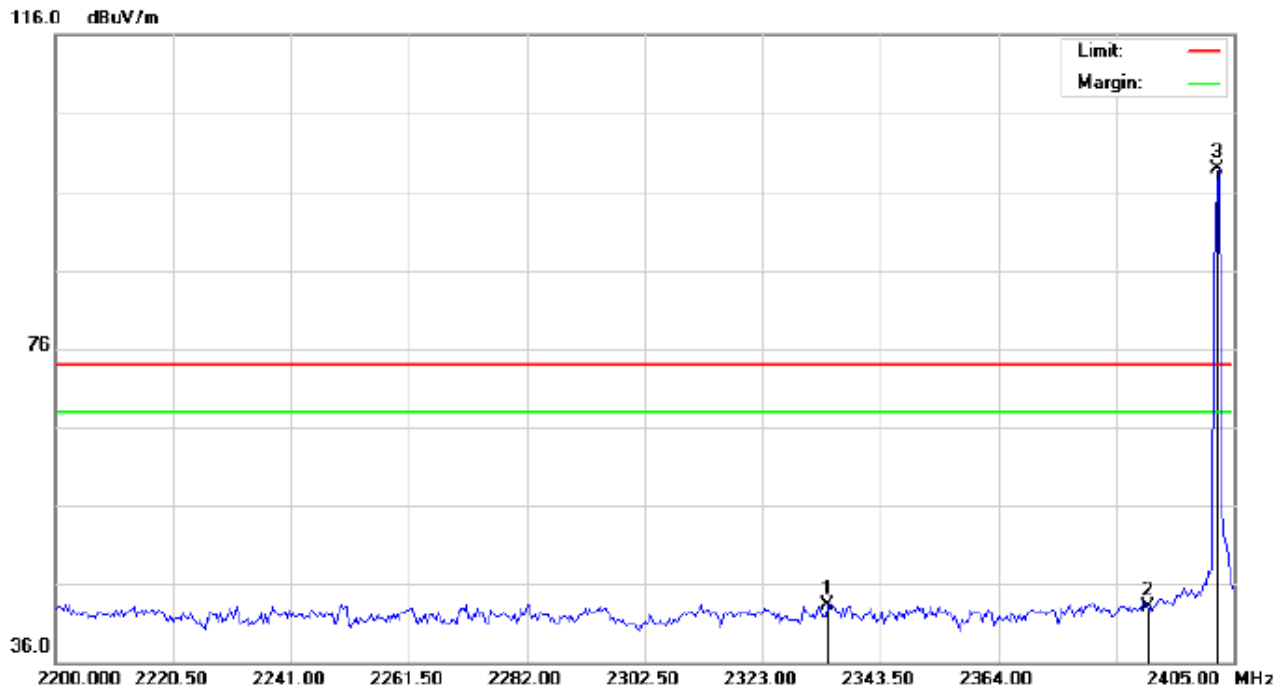

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance:


M/N: BSK52

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2334.275	33.10	10.25	43.35	74.00	-30.65	peak			
2		2390.000	32.71	10.31	43.02	74.00	-30.98	peak			
3	*	2402.000	88.59	10.32	98.91	74.00	24.91	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

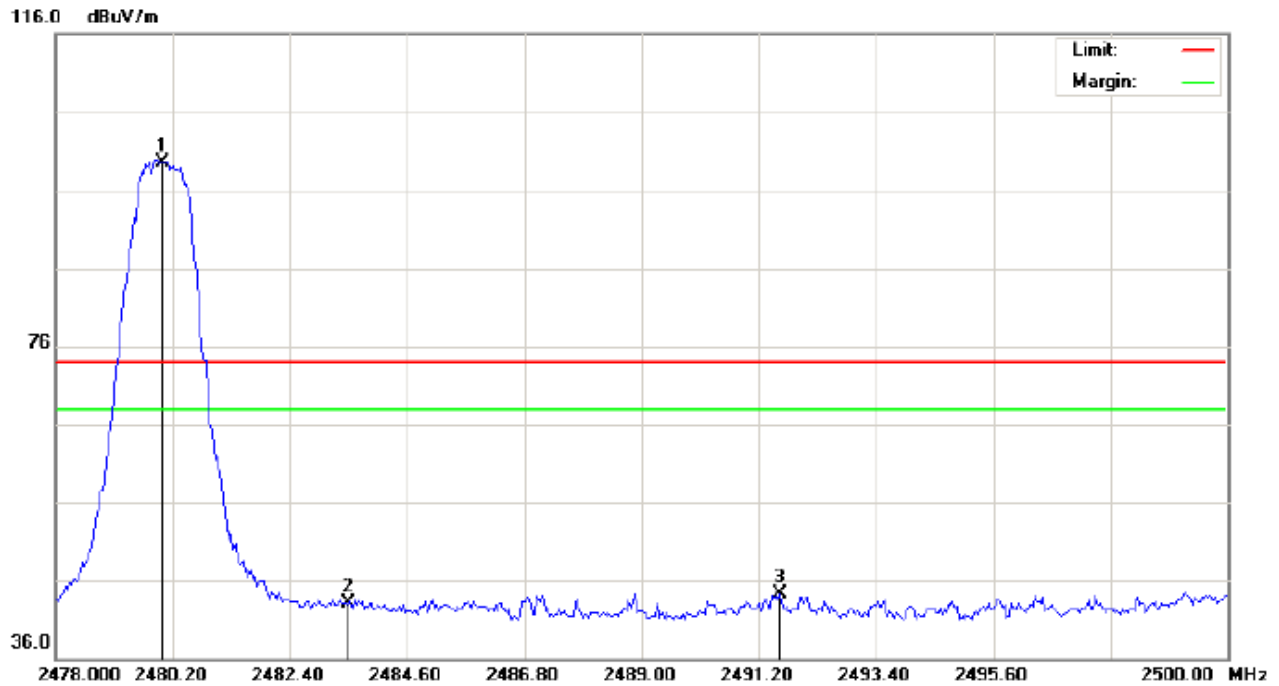

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth speaker

Distance:


M/N: BSK52

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	89.05	10.41	99.46	74.00	25.46	peak			
2		2483.500	32.69	10.41	43.10	74.00	-30.90	peak			
3		2491.603	33.79	10.42	44.21	74.00	-29.79	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

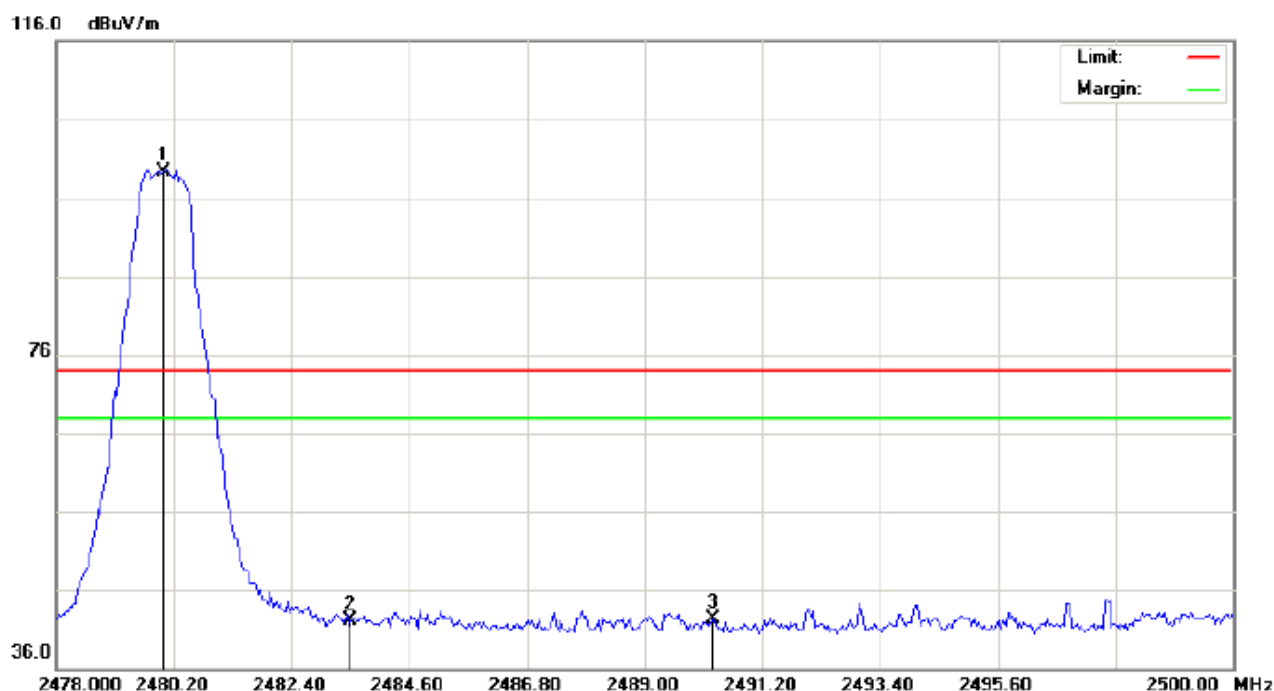

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth speaker Distance:
M/N: BSK52
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.82	10.41	99.23	74.00	25.23	peak			
2		2483.500	31.76	10.41	42.17	74.00	-31.83	peak			
3		2490.283	31.95	10.42	42.37	74.00	-31.63	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.

10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

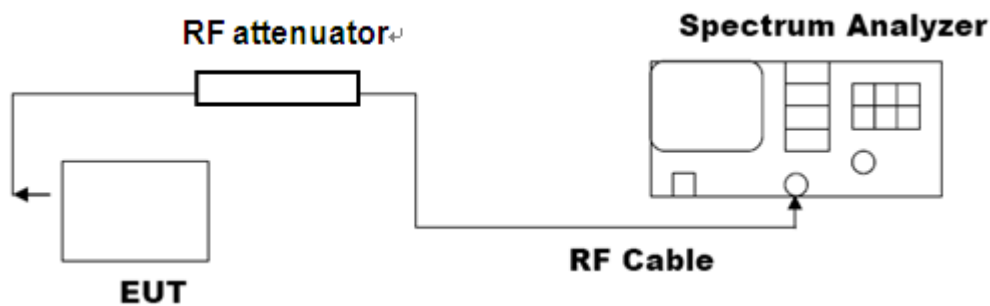

10.3. LIMITS AND MEASUREMENT RESULTS


FOR TRADITIONAL BLUETOOTH

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	0.907	PASS
	Middle Channel	0.924	PASS
	High Channel	1.234	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

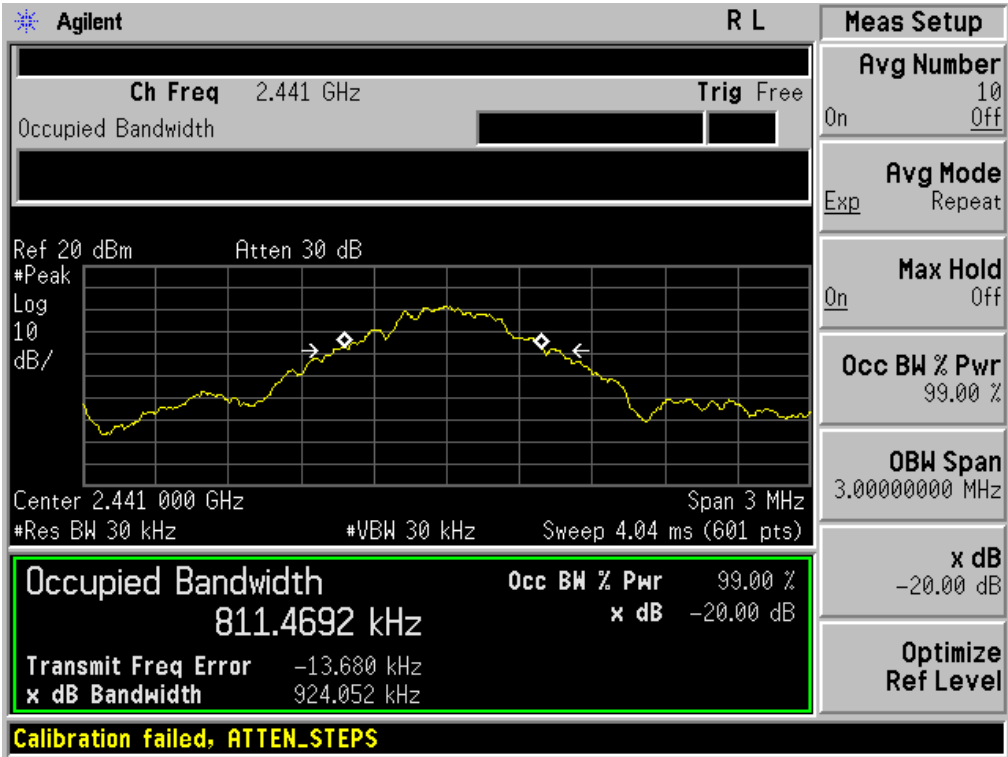


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

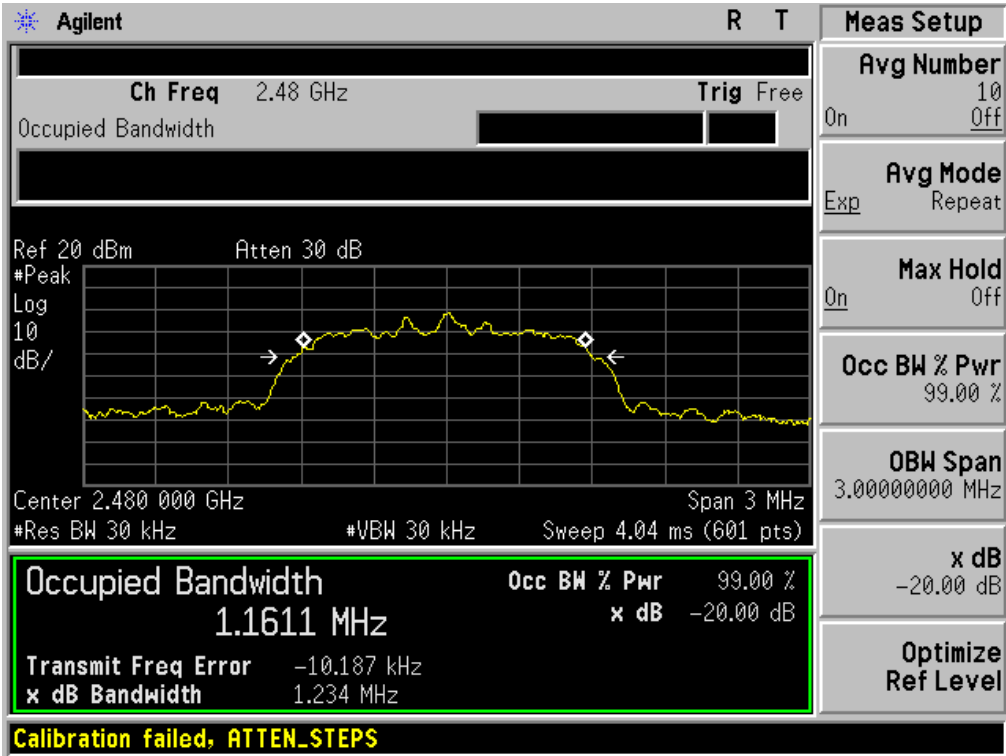


BLUETOOTH 2Mbps LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.250	PASS
	Middle Channel	1.233	PASS
	High Channel	1.257	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

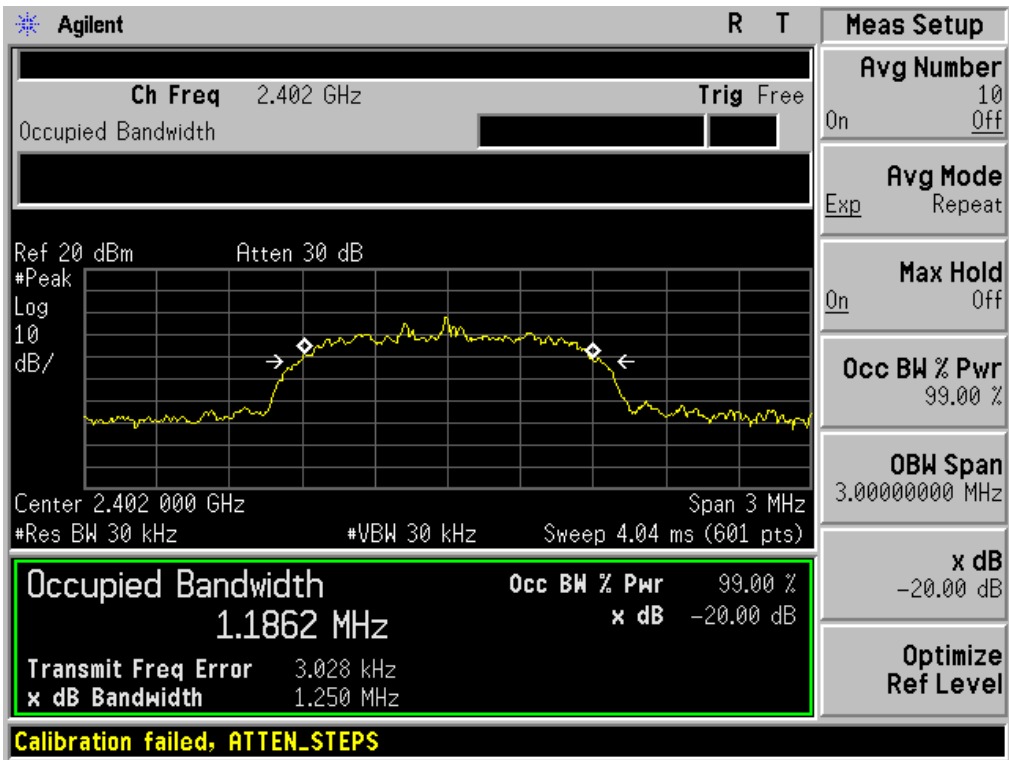

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

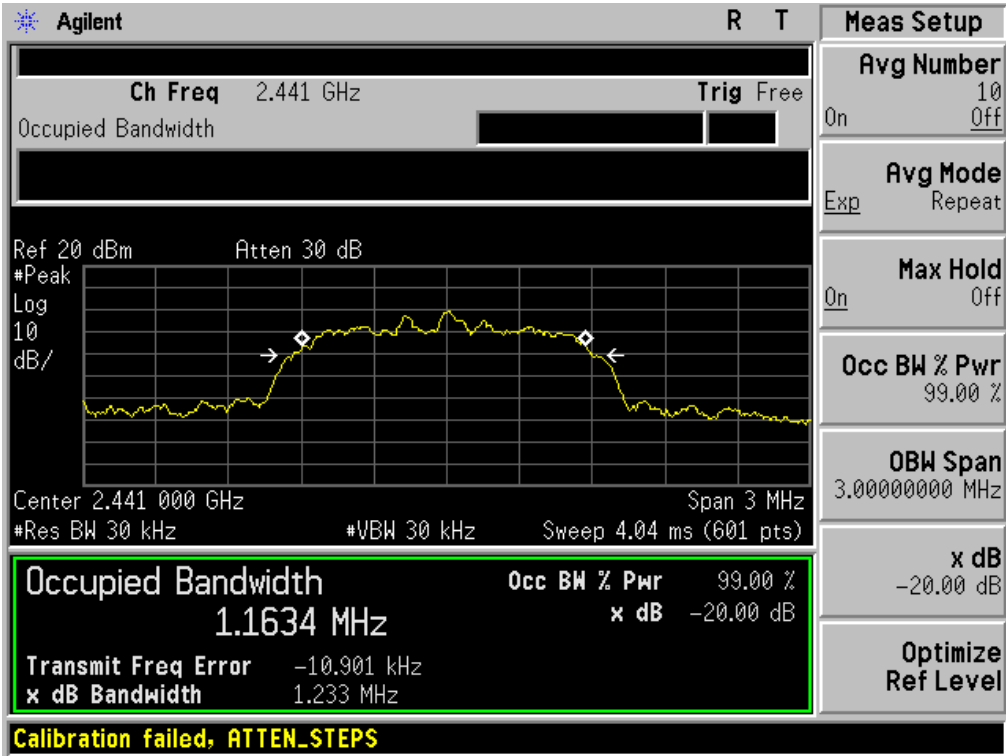


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

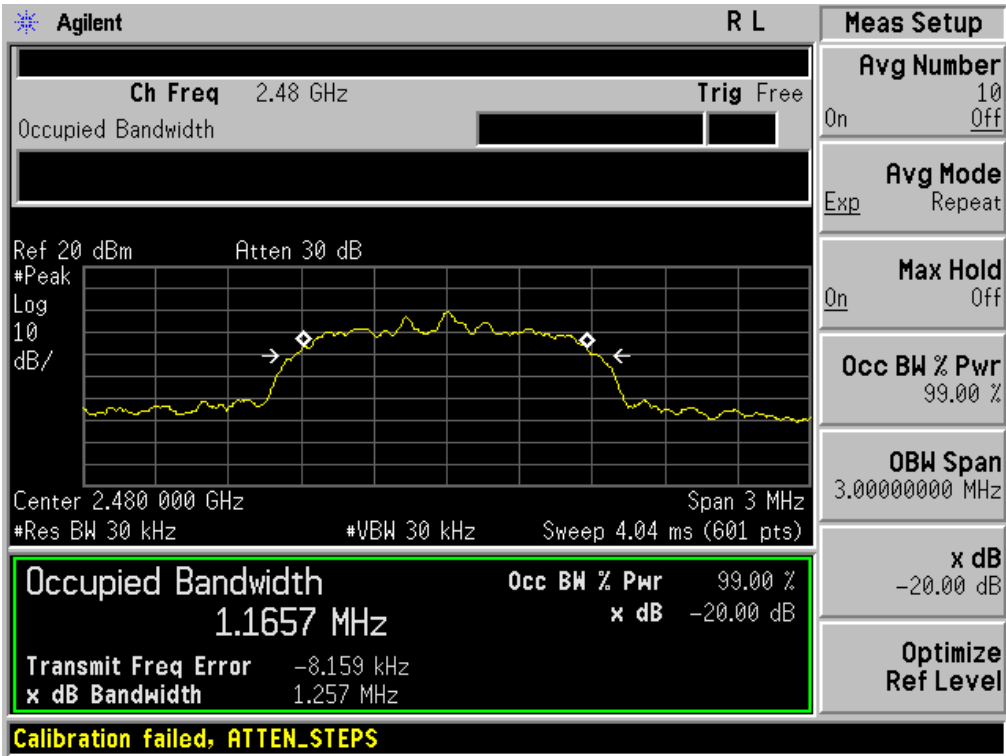


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.254	PASS
	Middle Channel	1.298	PASS
	High Channel	1.288	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

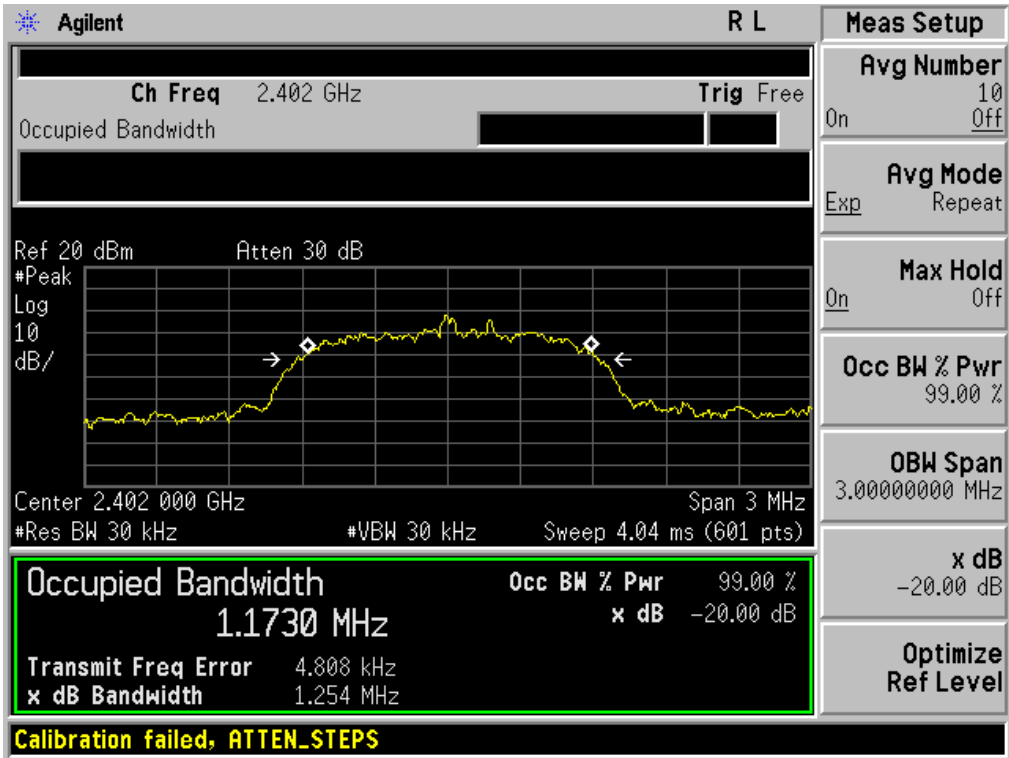

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

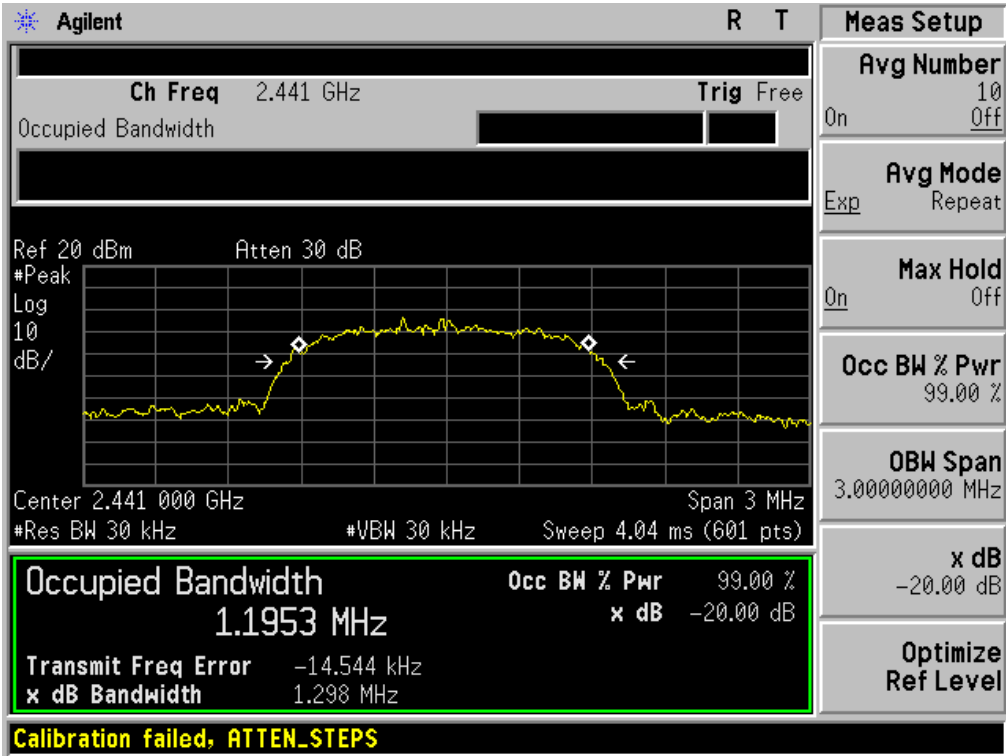


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

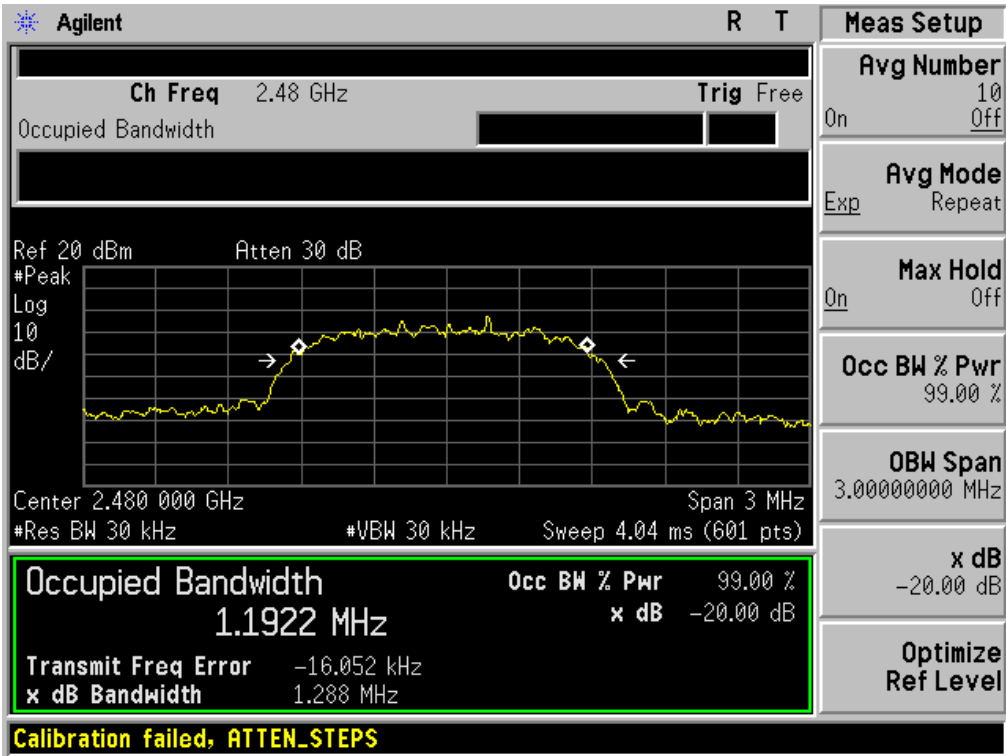


FOR BLE

BLUETOOTH 1Mbps LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.208	PASS
	Middle Channel	1.210	PASS
	High Channel	1.200	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

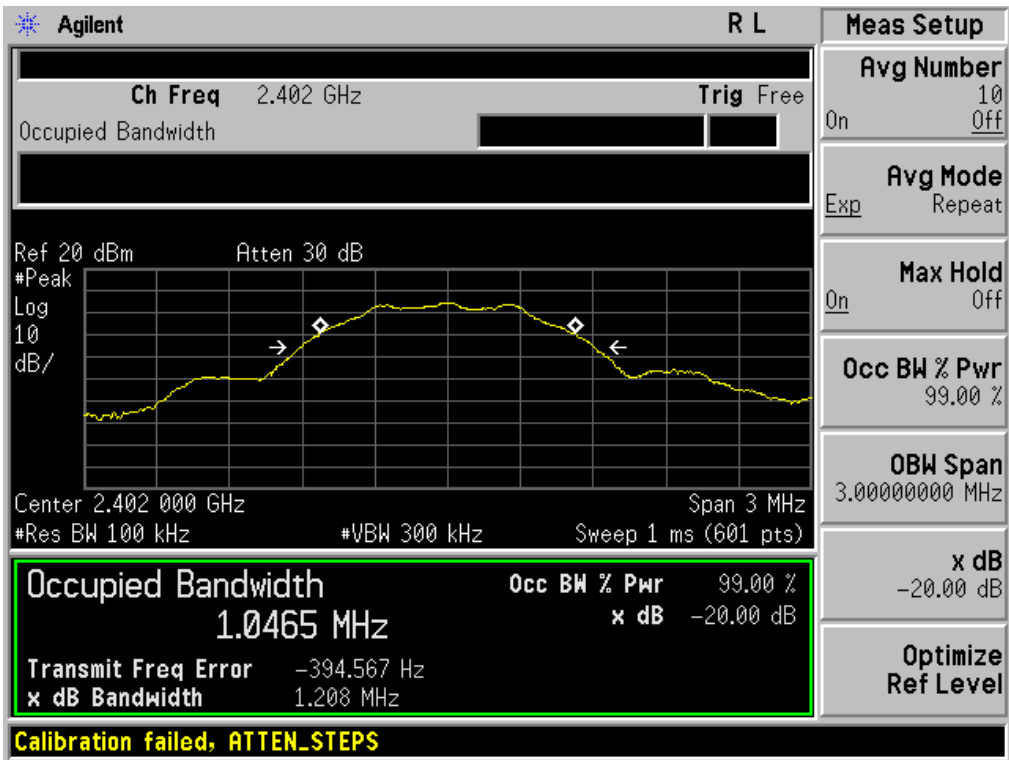

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

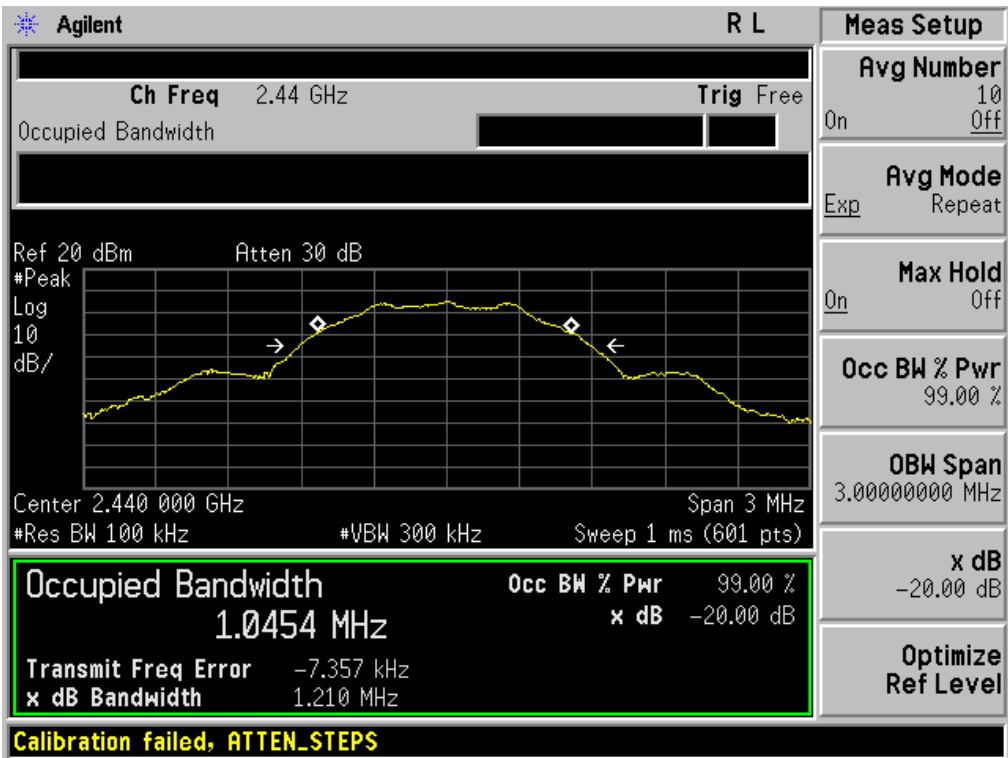

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

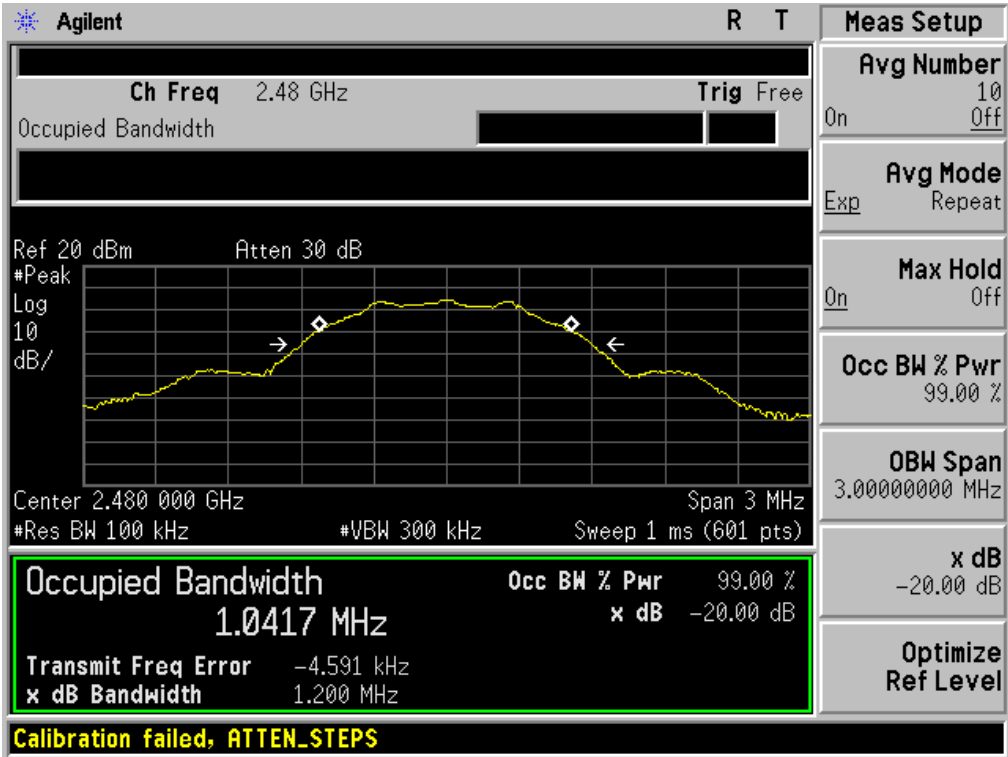

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

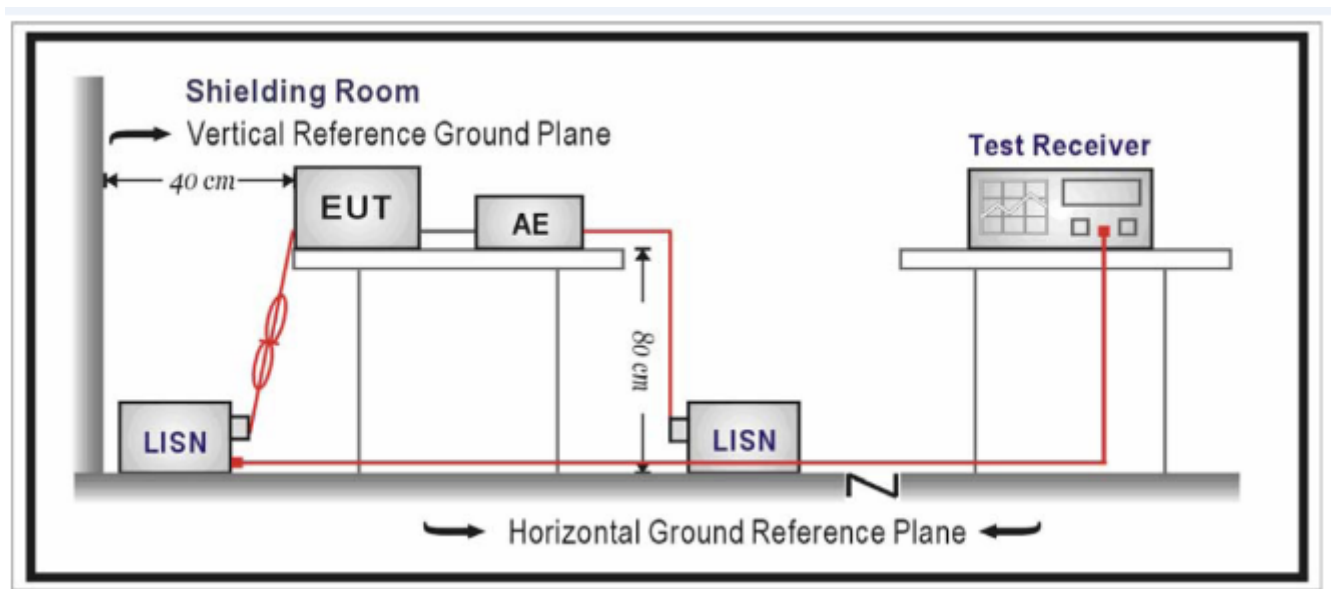

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST FOR TRADITIONAL BLUETOOTH


Line Conducted Emission Test Line 1-L

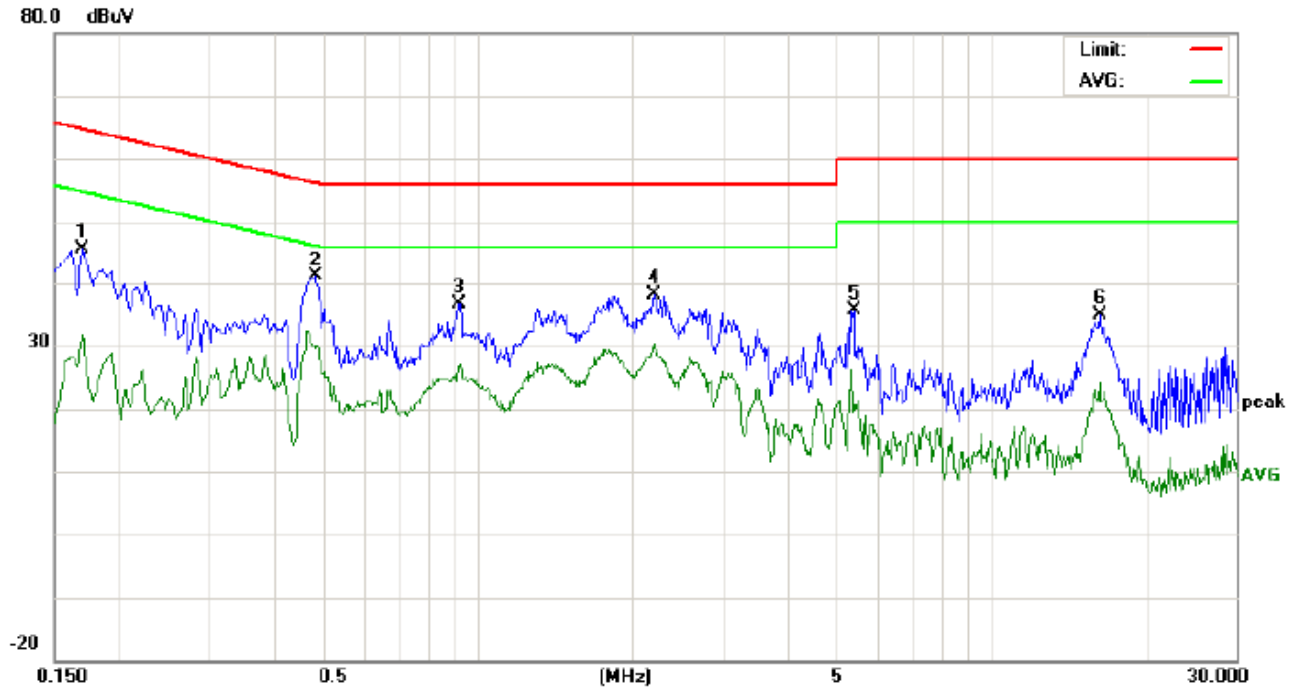

Site: Conduction Phase: **L1** Temperature: 24.5
Limit: FCC Class B Conduction(QP) Power: Humidity: 51.7 %
EUT: Bluetooth speaker
M/N: BSK52
Mode: Normal operation with charging
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	35.56		21.41	10.18	45.74		31.59	64.96	54.96	-19.22	-23.37	P	
2	0.4820	30.75		19.20	10.39	41.14		29.59	56.30	46.30	-15.16	-16.71	P	
3	0.9220	26.28		16.39	10.40	36.68		26.79	56.00	46.00	-19.32	-19.21	P	
4	2.2100	27.79		20.07	10.31	38.10		30.38	56.00	46.00	-17.90	-15.62	P	
5	5.4180	25.38		9.80	10.25	35.63		20.05	60.00	50.00	-24.37	-29.95	P	
6	16.2780	24.84		14.01	10.12	34.96		24.13	60.00	50.00	-25.04	-25.87	P	

Line Conducted Emission Test Line 2-N

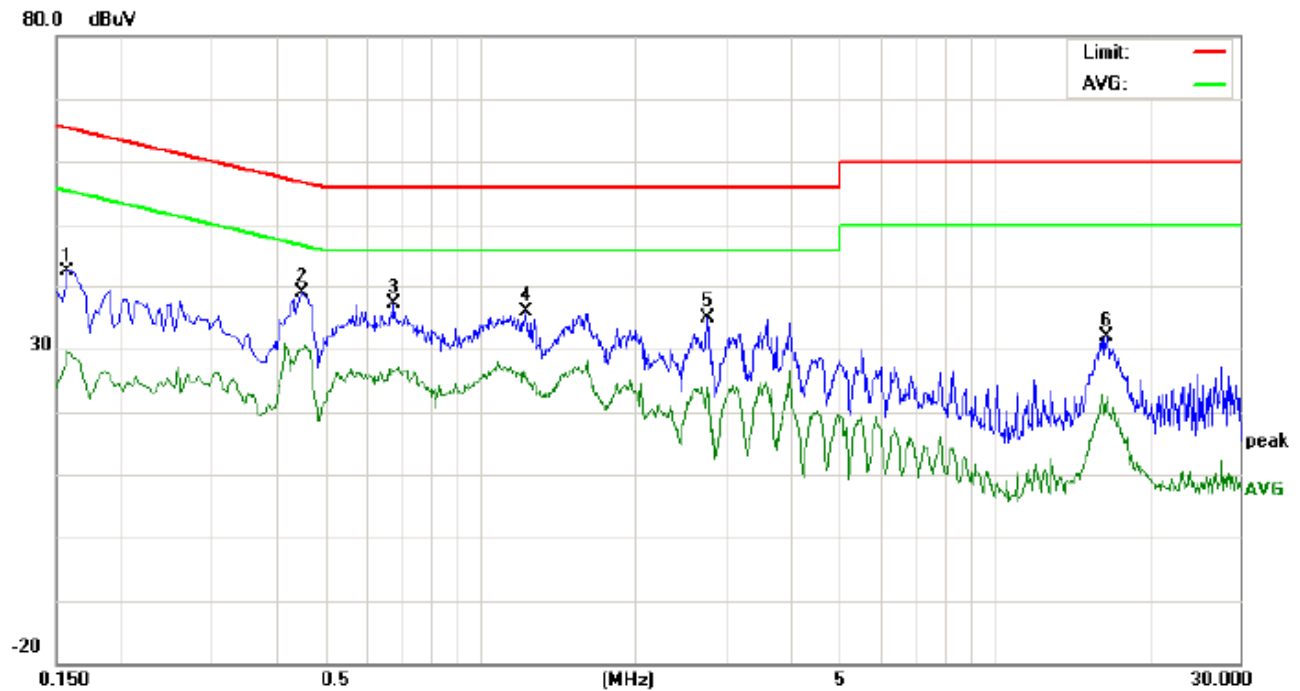


Site: Conduction Phase: **N** Temperature: 24.5
Limit: FCC Class B Conduction(QP) Power: Humidity: 51.7 %
EUT: Bluetooth speaker
M/N: BSK52
Mode: Normal operation with charging
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1580	32.30		19.36	10.17	42.47		29.53	65.56	55.56	-23.09	-26.03	P	
2	0.4500	28.62		19.43	10.37	38.99		29.80	56.87	46.87	-17.88	-17.07	P	
3	0.6820	26.87		16.16	10.34	37.21		26.50	56.00	46.00	-18.79	-19.50	P	
4	1.2260	25.40		15.80	10.37	35.77		26.17	56.00	46.00	-20.23	-19.83	P	
5	2.7780	24.32		13.45	10.50	34.82		23.95	56.00	46.00	-21.18	-22.05	P	
6	16.5620	21.72		12.25	10.12	31.84		22.37	60.00	50.00	-28.16	-27.63	P	

FOR BLE


Line Conducted Emission Test Line 1-L

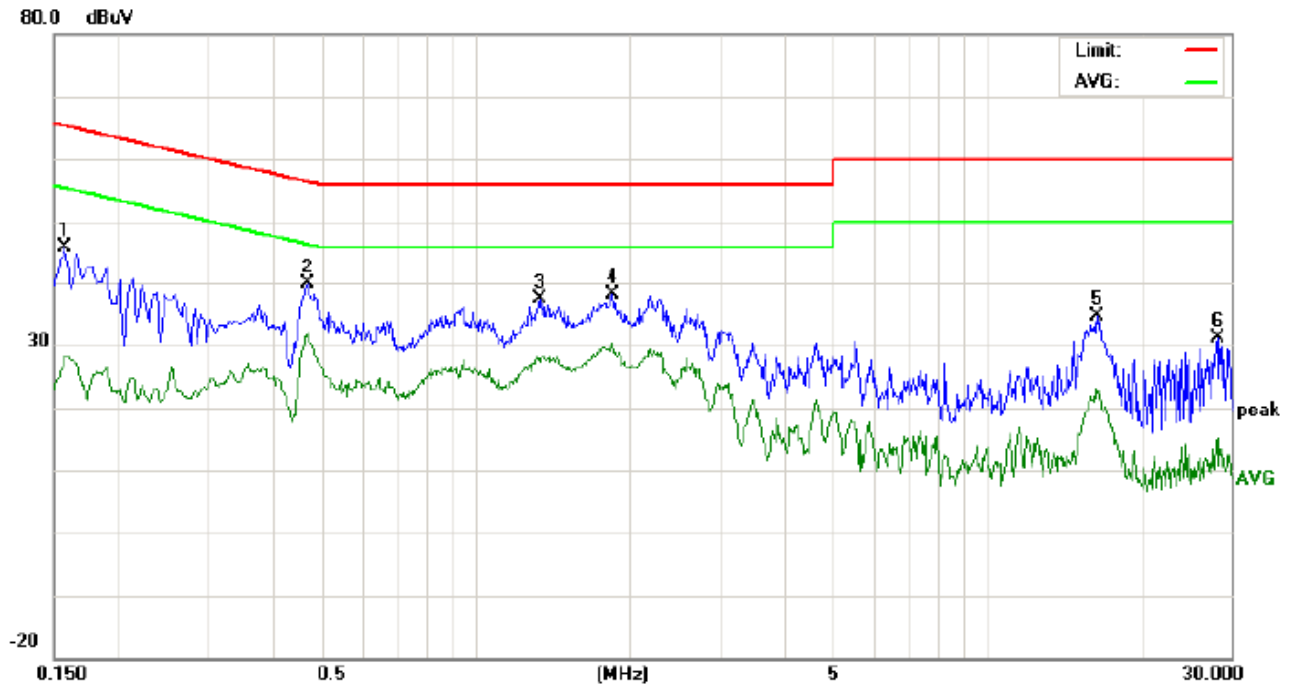

Site: Conduction Phase: **L1** Temperature: 24.5
Limit: FCC Class B Conduction(QP) Power: Humidity: 51.7 %
EUT: Bluetooth speaker
M/N: BSK52
Mode: Normal operation with charging
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1580	35.72		18.22	10.17	45.89		28.39	65.56	55.56	-19.67	-27.17	P	
2	0.4700	29.49		21.39	10.38	39.87		31.77	56.51	46.51	-16.64	-14.74	P	
3	1.3420	27.02		17.18	10.38	37.40		27.56	56.00	46.00	-18.60	-18.44	P	
4	1.8580	27.78		20.04	10.27	38.05		30.31	56.00	46.00	-17.95	-15.69	P	
5	16.4700	24.62		12.63	10.12	34.74		22.75	60.00	50.00	-25.26	-27.25	P	
6	28.2780	21.00		5.03	10.13	31.13		15.16	60.00	50.00	-28.87	-34.84	P	

Line Conducted Emission Test Line 2-N

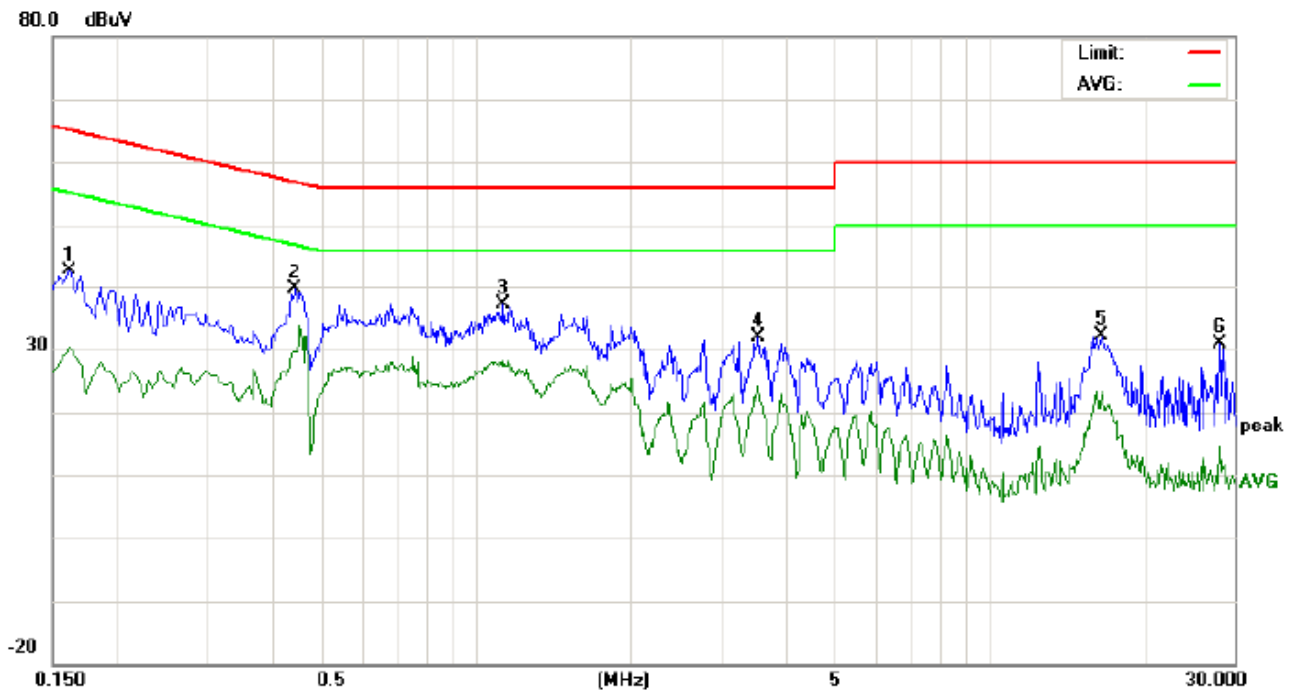

Site: Conduction Phase: **N** Temperature: 24.5
Limit: FCC Class B Conduction(QP) Power: Humidity: 51.7 %
EUT: Bluetooth speaker
M/N: BSK52
Mode: Normal operation with charging
Note:


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	32.47		20.17	10.17	42.64		30.34	65.36	55.36	-22.72	-25.02	P	
2	0.4460	29.30		19.33	10.36	39.66		29.69	56.95	46.95	-17.29	-17.26	P	
3	1.1340	26.78		17.79	10.37	37.15		28.16	56.00	46.00	-18.85	-17.84	P	
4	3.5540	21.28		13.57	10.50	31.78		24.07	56.00	46.00	-24.22	-21.93	P	
5	16.5540	22.01		13.28	10.12	32.13		23.40	60.00	50.00	-27.87	-26.60	P	
6	28.1260	20.68		4.61	10.13	30.81		14.74	60.00	50.00	-29.19	-35.26	P	


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

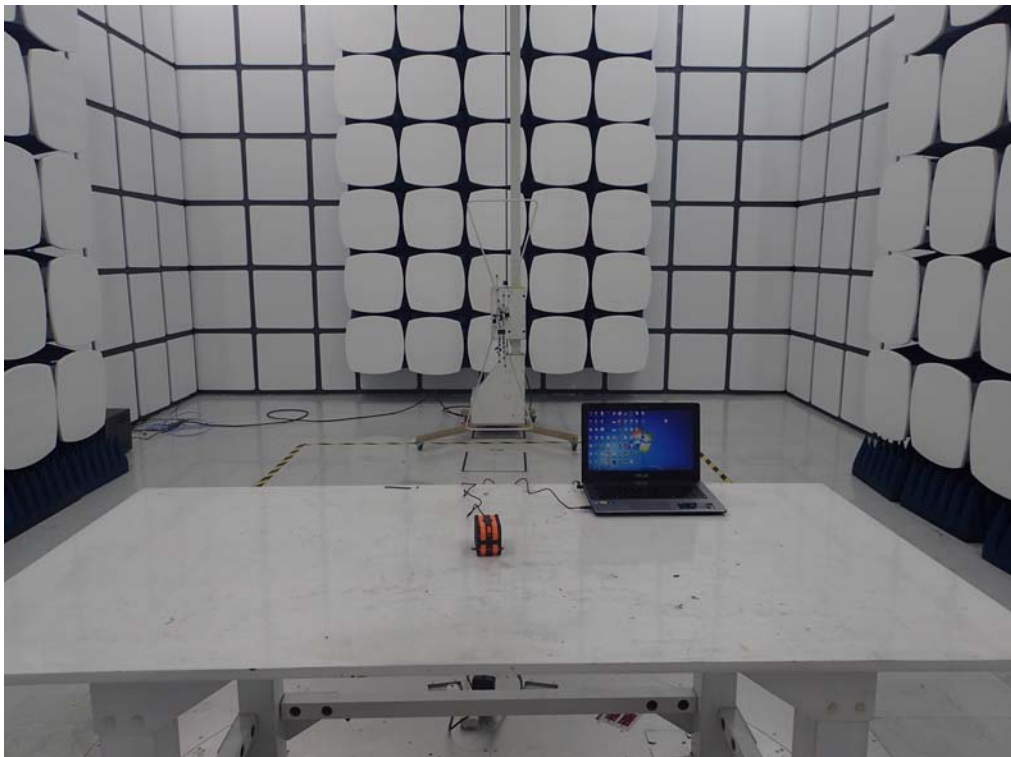

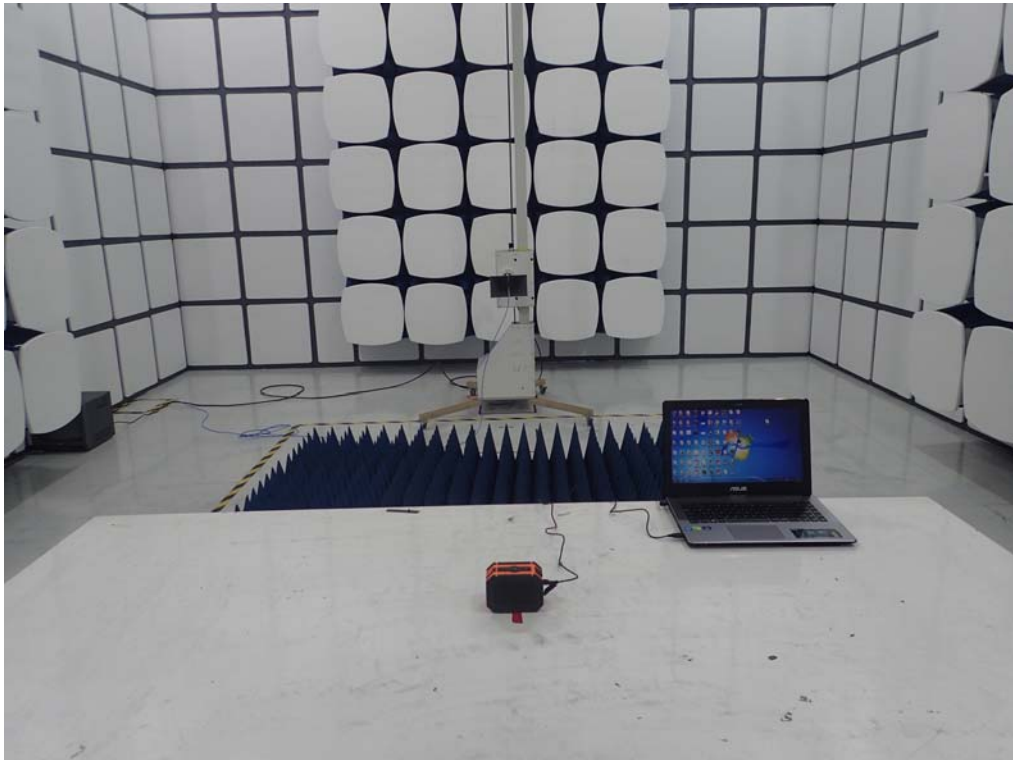


APPENDIX B: PHOTOGRAPHS OF EUT


All VIEW OF EUT



TOP VIEW OF EUT

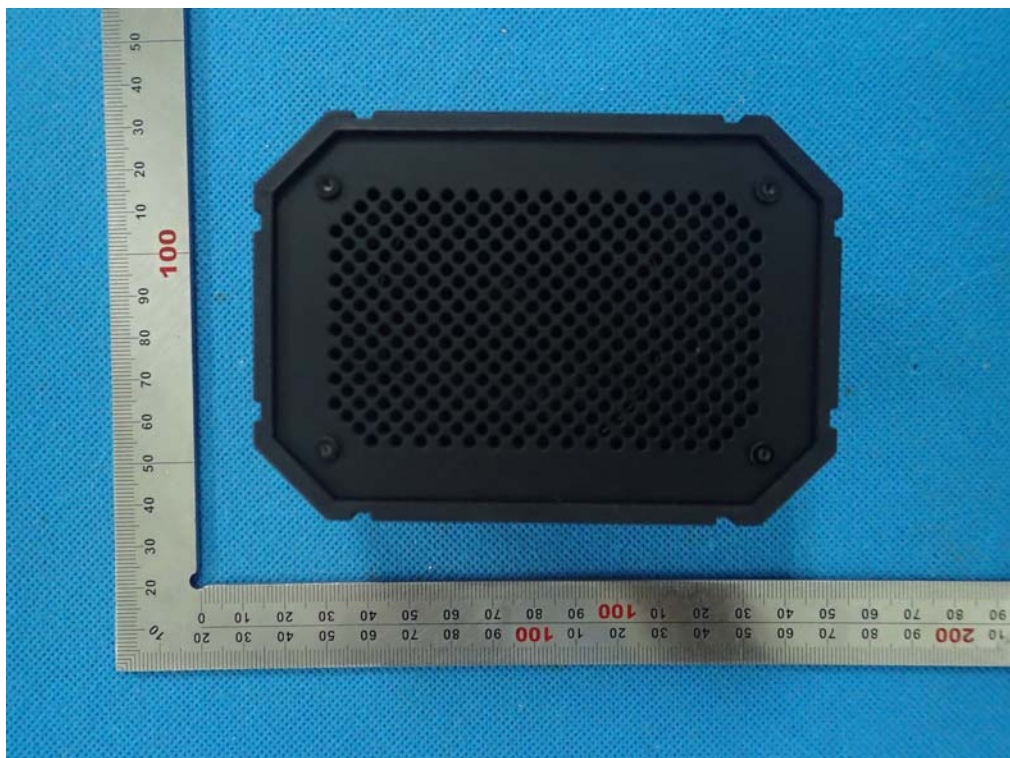


BOTTOM VIEW OF EUT

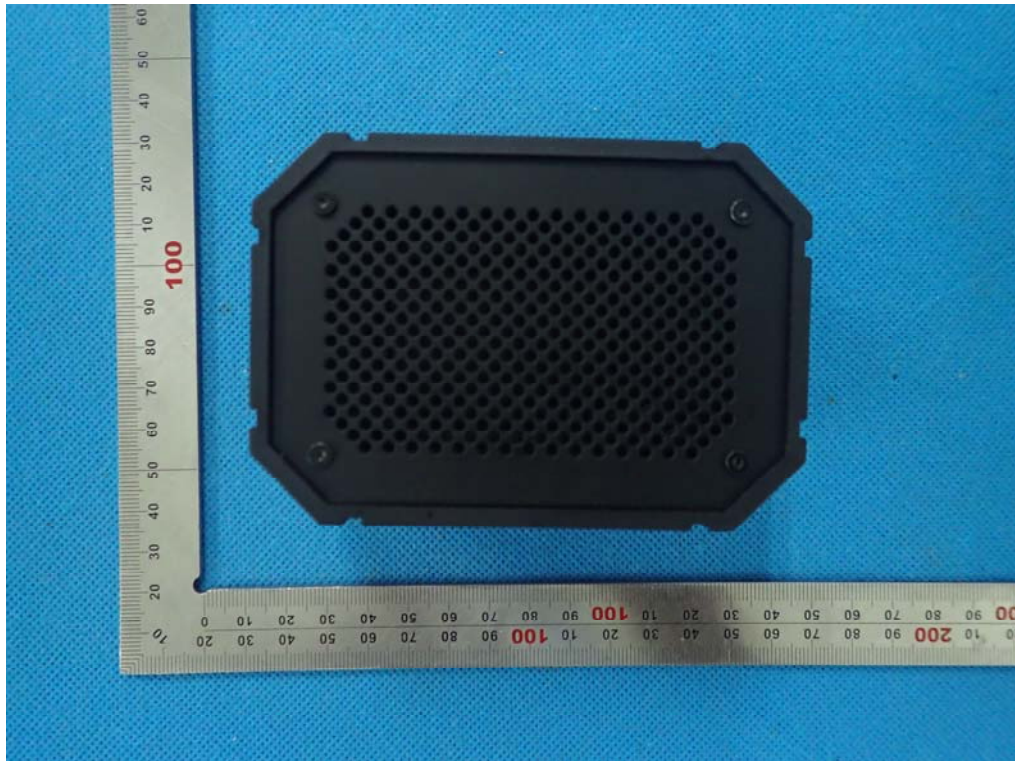


FRONT VIEW OF EUT




BACK VIEW OF EUT

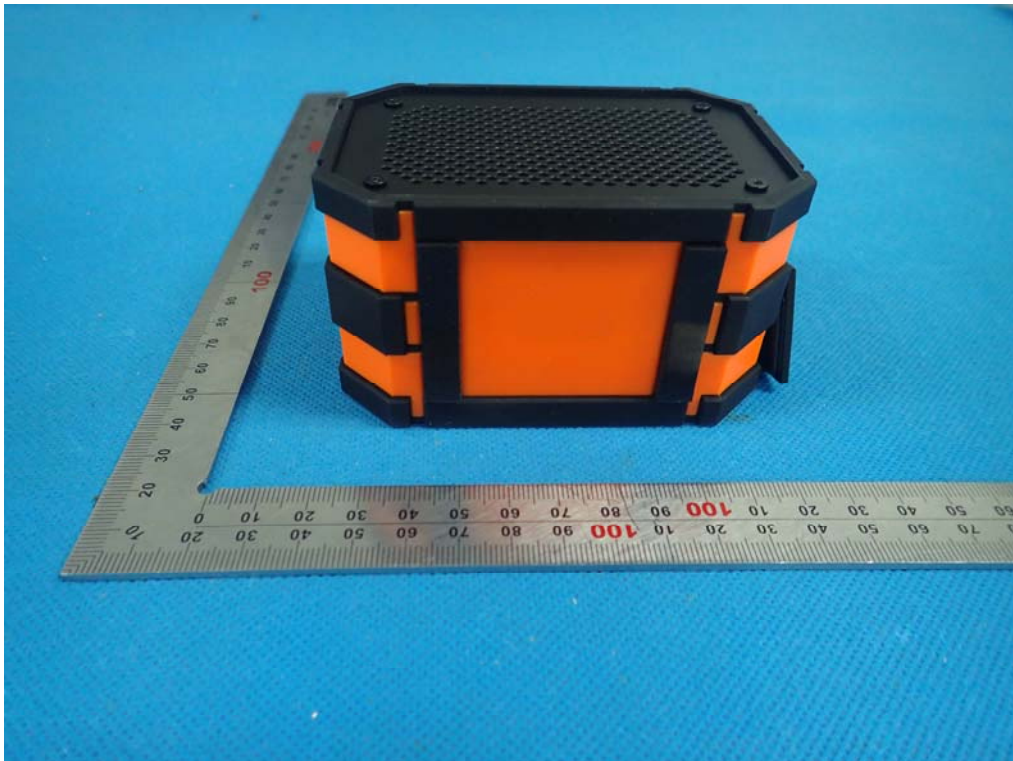


LEFT VIEW OF EUT

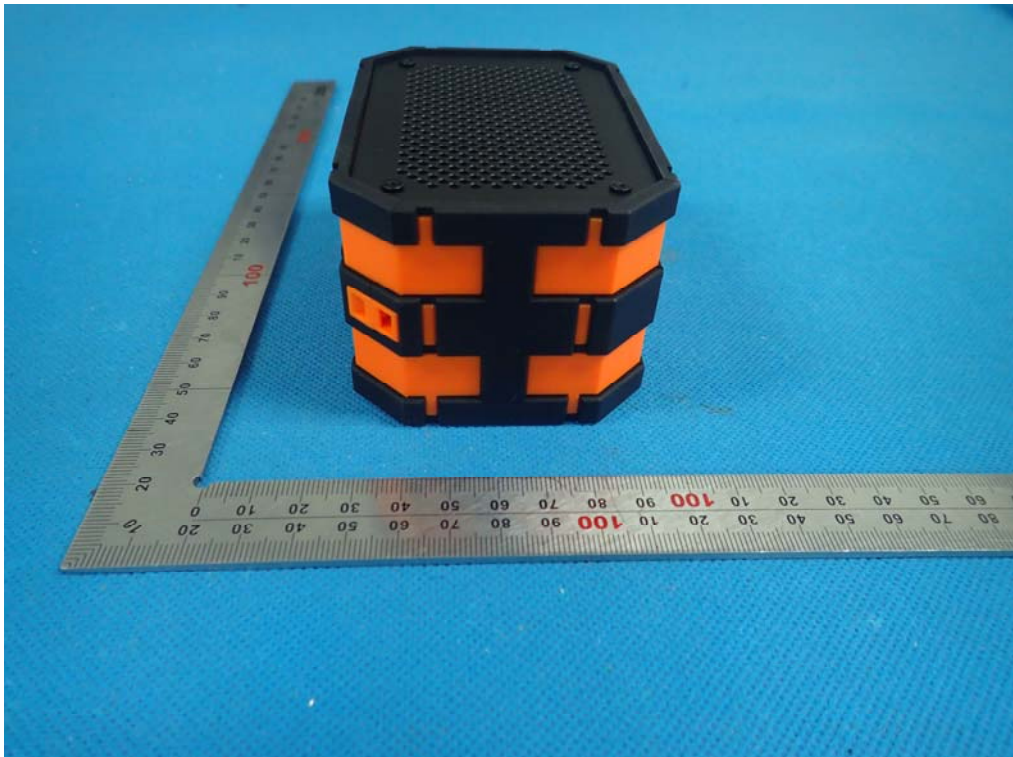


RIGHT VIEW OF EUT

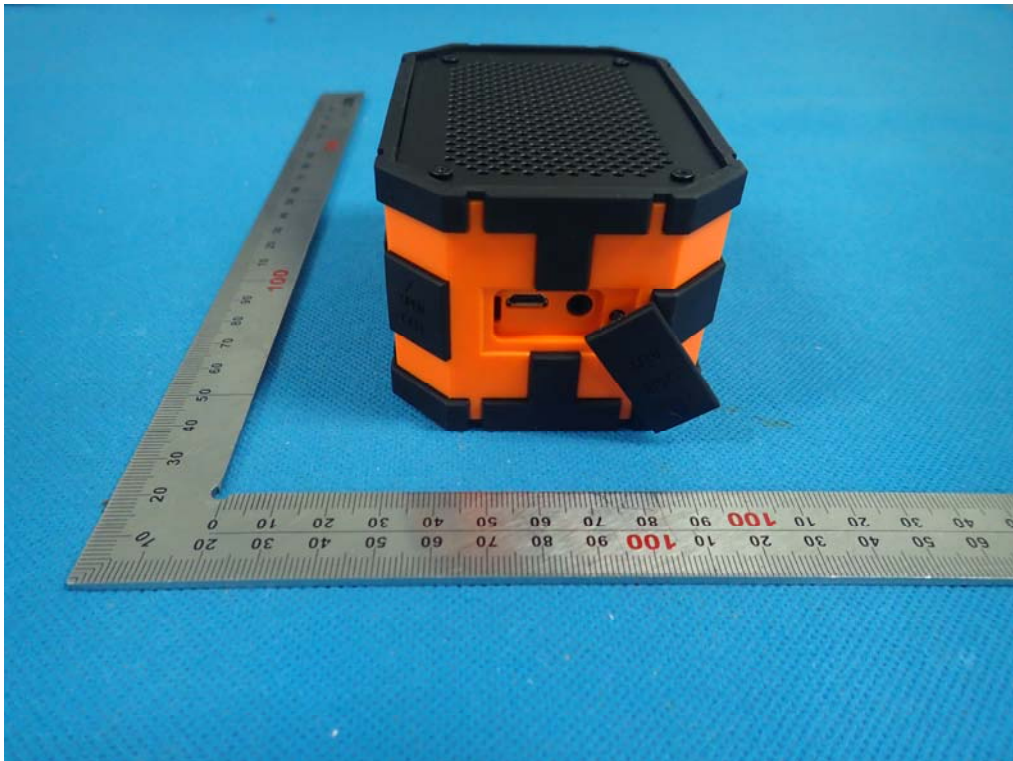


DETAILS VIEW

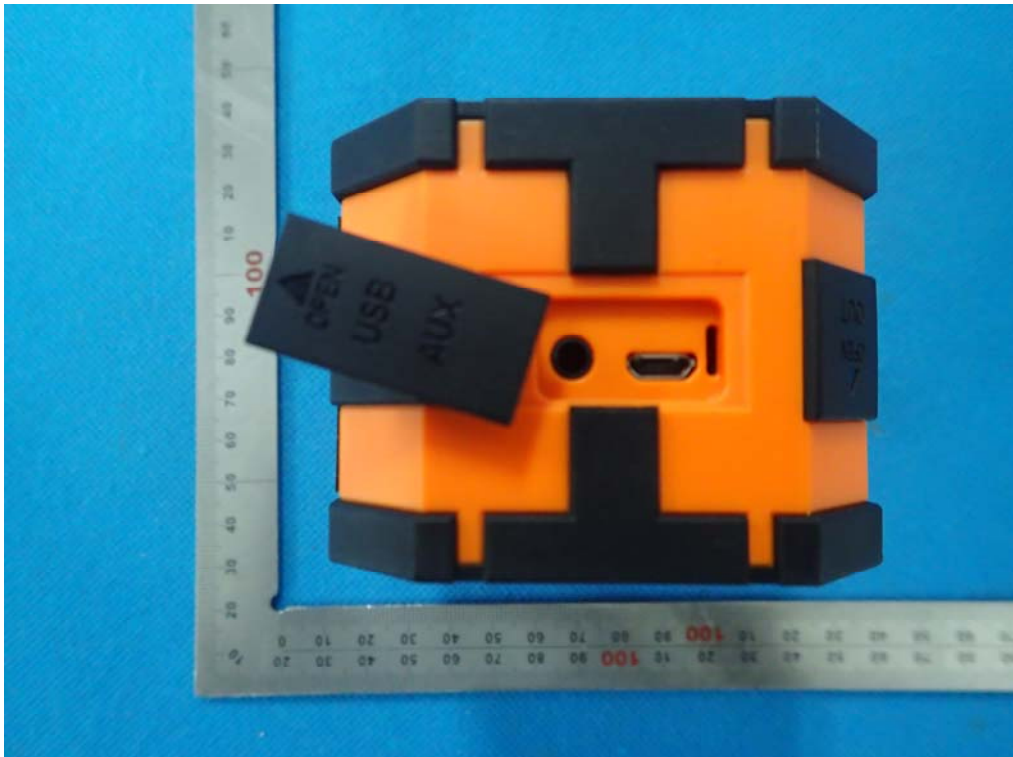


OPEN VIEW OF EUT-1

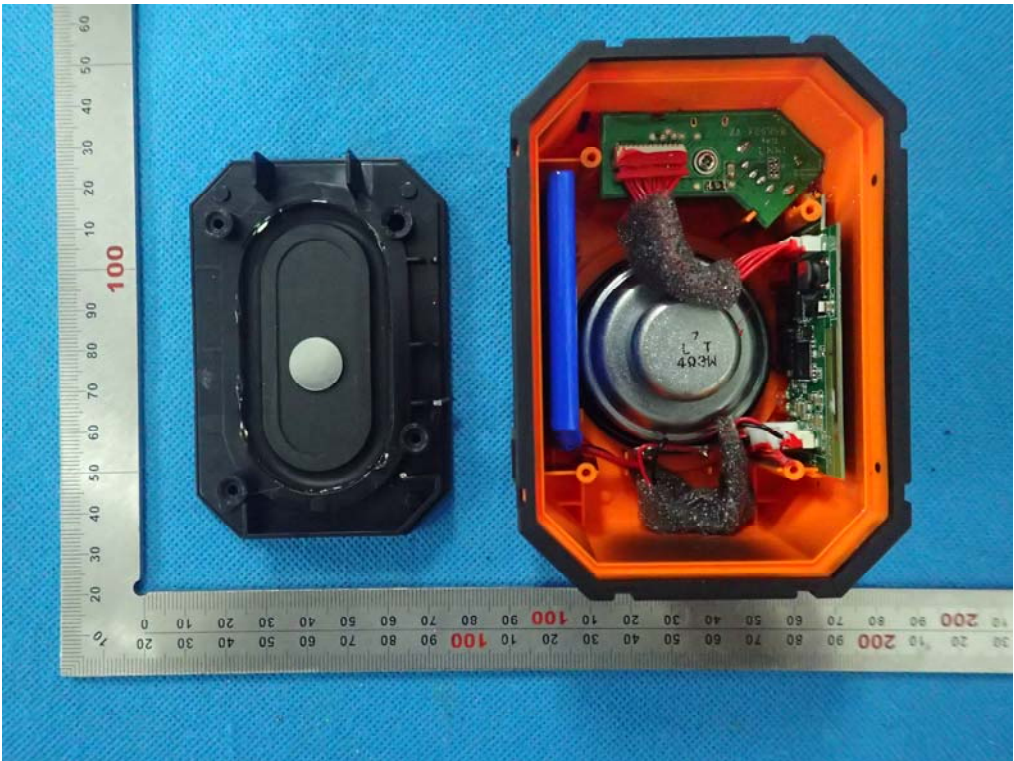


INTERNAL VIEW OF EUT-1

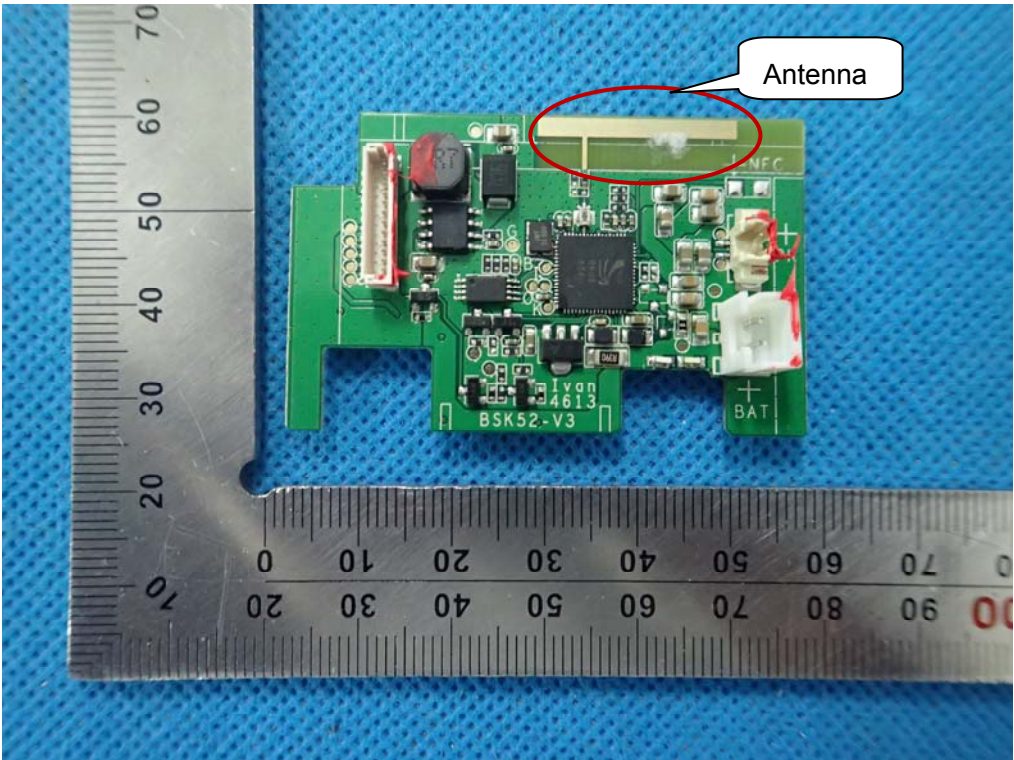


INTERNAL VIEW OF EUT-2

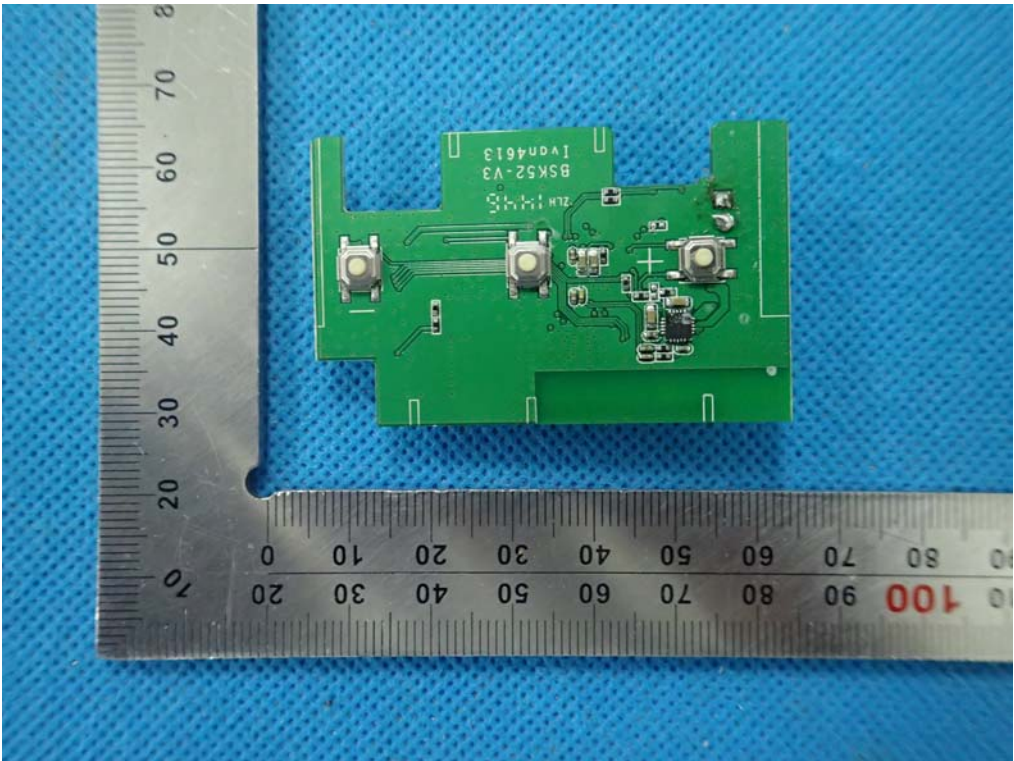

INTERNAL VIEW OF EUT-3

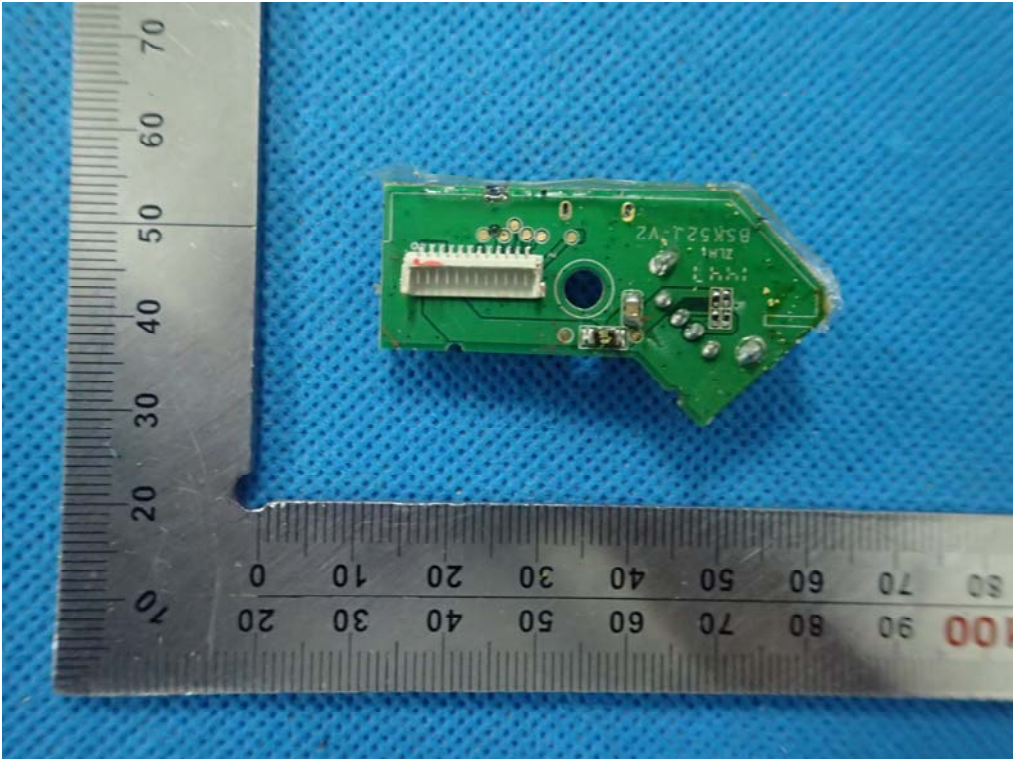

INTERNAL VIEW OF EUT-4

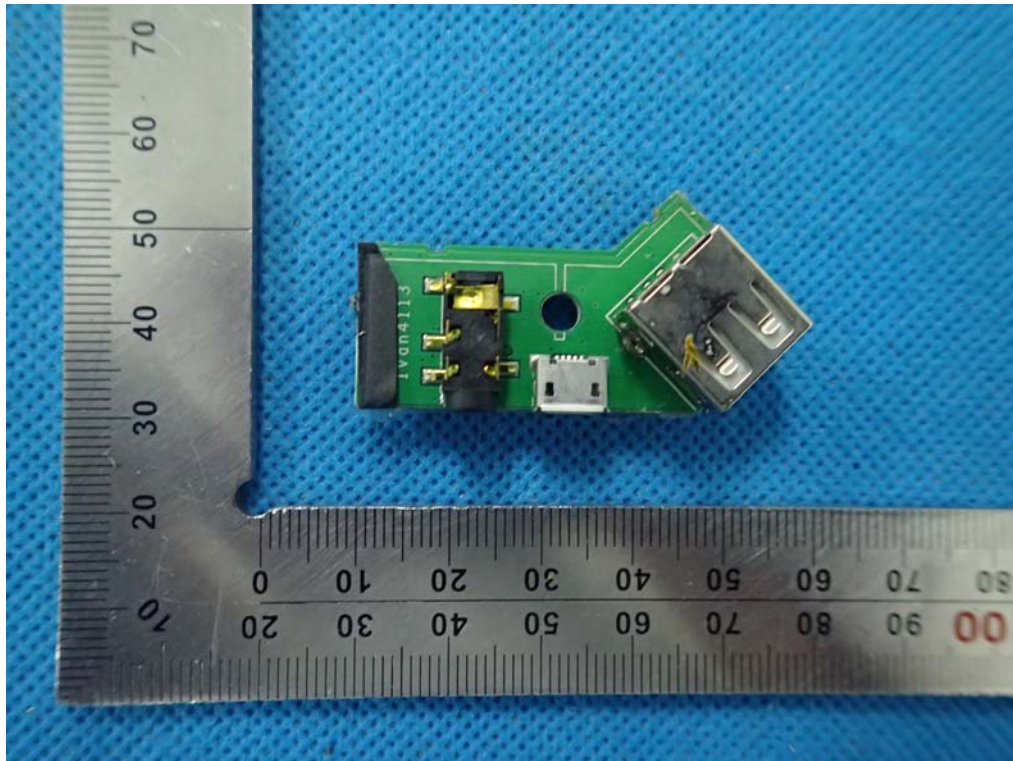

----END OF REPORT----