

Test Laboratory: BTL,Inc

Date: 2022/5/27

B04_2.4G SRD_CH39_Top Side_0cm**DUT: Keyboard;**

Communication System: UID 0, SRD (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.775$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.2 °C; Liquid Temperature: 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.51, 7.51, 7.51) @ 2441 MHz; Calibrated: 2021/12/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2022/1/21
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.0734 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0.6630 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.186 W/kg
SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.017 W/kg
Maximum value of SAR (measured) = 0.117 W/kg

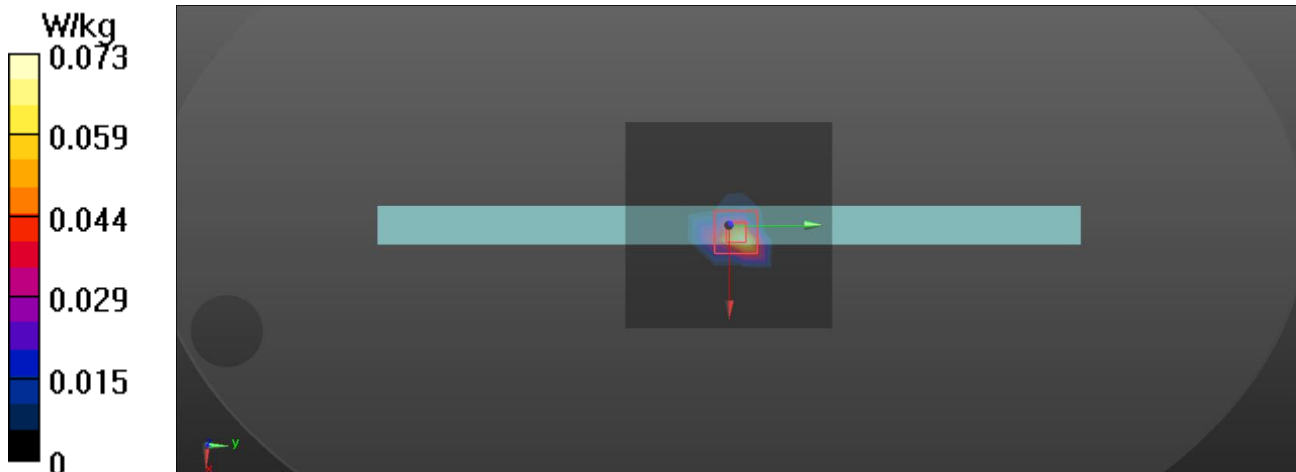

Test Laboratory: BTL,Inc

Date: 2022/5/27

B11_BLE_CH39_Top Side_0cm**DUT: Keyboard;**

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.635$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.2 °C; Liquid Temperature: 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.51, 7.51, 7.51) @ 2480 MHz; Calibrated: 2021/12/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2022/1/21
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.106 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.489 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.160 W/kg

