

# **FCC Test Report**

FCC ID : 2AWC2-AIRH201

Equipment : NUWA ROBOT

Model No. : AIR-H201

Brand Name : NUWAROBOTICS

Applicant : NUWA ROBOTICS (HK) LIMITED TAIWAN

**BRANCH** 

Address : 9F., No. 101, Sec. 3, Nanjing E. Rd., Zhongshan

Dist., Taipei City 104, Taiwan (R.O.C.)

Standard : 47 CFR FCC Part 15.247

Received Date : Mar. 03, 2020

Tested Date : Mar. 06 ~ Mar. 13, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen Assistant Manager Gary Chang / Manager

Taf Testing Laboratory

Page: 1 of 59

2732

Report No.: FR030301-02AD



# **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	g
1.5	Test Standards	10
1.6	Deviation from Test Standard and Measurement Procedure	1C
1.7	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS	12
3.1	Conducted Emissions	12
3.2	Unwanted Emissions into Restricted Frequency Bands	15
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	32
3.4	Conducted Output Power	37
3.5	Number of Hopping Frequency	40
3.6	20dB and Occupied Bandwidth	43
3.7	Channel Separation	48
3.8	Number of Dwell Time	53
4	TEST LABORATORY INFORMATION	59



# **Release Record**

Report No.	Version	Description	Issued Date
FR030301-02AD	Rev. 01	Initial issue	Jun. 01, 2020

Report No.: FR030301-02AD Page: 3 of 59



# **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.727MHz 44.87 (Margin -11.13dB) - QP	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 245.34MHz 38.40 (Margin -7.60dB) - PK	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 12.21	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

#### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

#### **Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR030301-02AD Page: 4 of 59



# 1 General Description

### 1.1 Information

Test results can be referred to ICC report no. TR030301AD.

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz) Bluetooth Ch. Frequency (MHz) Channel Number Data Rate							
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps			
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps			
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps			

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: Bluetooth BR uses a GFSK.

Note 3: Bluetooth EDR uses a combination of  $\pi/4$ -DQPSK and 8DPSK.

#### 1.1.2 Antenna Details

Ant. No.	Туре	Connector	Gain (dBi)	Remarks
1	PIFA	No	2.4	

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

I POWAR SIIDDIV I VDA	DC 3.7V from battery DC 5V-3A / 9V-2A / 12V-1.5A from adapter
-----------------------	--

#### 1.1.4 Accessories

No.	Equipment	Description
1	Adapter	Brand: NUWA Model: KA1803A-TW I/P: 100-240V, 50/60Hz, 0.5A Max O/P: 5V-3A / 9V-2A / 12V-1.5A
2	Li-ion Battery	Brand: SCUD (FUJIAN) EIECTRONICS CO. LTD. Model: NB1 Rating: 3.7Vdc, 9100mA, 33.67Wh
3	USB charger Cable	1.20m non-shielded without core.

Report No.: FR030301-02AD Page: 5 of 59



## 1.1.5 Channel List

	Frequency band (MHz)				2400~	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Report No.: FR030301-02AD Page: 6 of 59



## 1.1.6 Test Tool and Duty Cycle

Test Tool	QRCT, v3.0-00249		
Duty Cycle and Duty Factor	Duty Cycle (%)	Duty Factor (dB)	
DH5	79.15%	1.02	
2DH5	79.15%	1.02	
3DH5	79.15%	1.02	

## 1.1.7 Power Index of Test Tool

Modulation Mode			
Modulation Mode	2402	2441	2480
GFSK/1Mbps	default	default	default
π/4-DQPSK /2Mbps	default	default	default
8DPSK/3Mbps	default	default	default


Report No.: FR030301-02AD Page: 7 of 59



## 1.2 Local Support Equipment List

	Support Equipment List						
No.	No. Equipment Brand Model FCC ID Remarks						
1	Notebook	DELL	Latitude E6430	DoC	Provided by applicant.		

# 1.3 Test Setup Chart

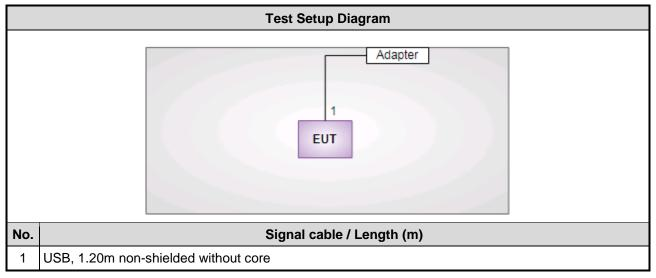

Note: The notebook is disconnected from EUT and removed from test table when EUT is set to transmit continuously.

Report No.: FR030301-02AD Page: 8 of 59



# 1.4 The Equipment List

Test Item	Conducted Emission	Conducted Emission							
Test Site	Conduction room 1 / (	CO01-WS)							
Tested Date	Mar. 13, 2020								
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until				
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020				
LISN	R&S ENV216 100003 Sep. 23, 2019 Sep. 22, 2020								
RF Cable-CON	Woken CFD200-NL CFD200-NL-001 Oct. 22, 2019 Oct. 21, 2020								
Measurement Software	AUDIX e3 6.120210k NA NA								
Note: Calibration Inte	Note: Calibration Interval of instruments listed above is one year.								

Test Item	Radiated Emission						
Test Site	966 chamber1 / (03Cl	H01-WS)					
Tested Date	Mar. 06 ~ Mar. 12, 2020						
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until		
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020		
Receiver	Agilent	N9038A	MY53290044	Sep. 17, 2019	Sep. 16, 2020		
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020		
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020		
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020		
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020		
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020		
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020		
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020		
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020		
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 07, 2019	Oct. 06, 2020		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020		
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 07, 2019	Oct. 06, 2020		
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020		
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020		
Measurement Software	AUDIX	e3	6.120210g	NA	NA		
Note: Calibration Inter	val of instruments liste	d above is one year.					

Report No.: FR030301-02AD Page: 9 of 59



Test Item	RF Conducted							
Test Site	(TH01-WS)							
Tested Date	Mar. 13, 2020							
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
Spectrum Analyzer	R&S	FSV40	101063	Apr. 17, 2019	Apr. 16, 2020			
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020			
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020			
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020			
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 02, 2019	Dec. 01, 2020			
Measurement Software	Sporton Sporton_1 1.3.30 NA NA							
Note: Calibration Inter	rval of instruments liste	d above is one year.						

### 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.6 Deviation from Test Standard and Measurement Procedure

None

## 1.7 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty					
Parameters Uncertainty					
Bandwidth	±34.130 Hz				
Conducted power	±0.808 dB				
Power density	±0.583 dB				
Conducted emission	±2.715 dB				
AC conducted emission	±2.92 dB				
Radiated emission ≤ 1GHz	±3.41 dB				
Radiated emission > 1GHz	±4.59 dB				

Report No.: FR030301-02AD Page: 10 of 59



# 2 Test Configuration

## 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 61%	Alex Tsai
Radiated Emissions	03CH01-WS	21-23°C / 62-66%	Akun Chung Roger Lu
RF Conducted	TH01-WS	20°C / 65%	Roger Lu

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

## 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Mode
AC Power Line Conducted Emissions	8DPSK	2402	3Mbps	-
Radiated Emissions ≤ 1GHz	8DPSK	2402	3Mbps	-
Radiated Emissions > 1GHz	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	-
Conducted Output Power	GFSK л /4 DQPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	-
Number of Hopping Channels	GFSK л /4 DQPSK 8DPSK	2402 ~ 2480 2402 ~ 2480 2402 ~ 2480	1Mbps 2Mbps 3Mbps	-
Hopping Channel Separation	GFSK л /4 DQPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	-
Dwell Time	GFSK л/4 DQPSK 8DPSK	2441 2441 2441	1Mbps 2Mbps 3Mbps	-

Report No.: FR030301-02AD Page: 11 of 59



## 3 Transmitter Test Results

#### 3.1 Conducted Emissions


#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit					
Frequency Emission (MHz) Quasi-Peak Average					
0.15-0.5	66 - 56 *	56 - 46 *			
0.5-5	56	46			
5-30	60	50			
Note 1: * Decreases with the logarithm of the frequency.					

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

#### 3.1.3 Test Setup

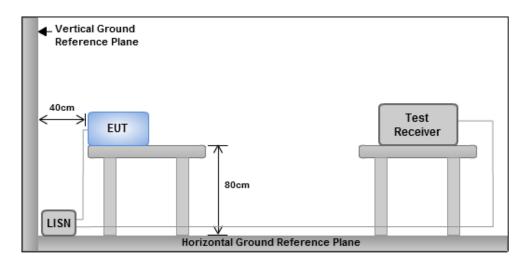


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR030301-02AD Page: 12 of 59




#### **Test Result of Conducted Emissions** 3.1.4

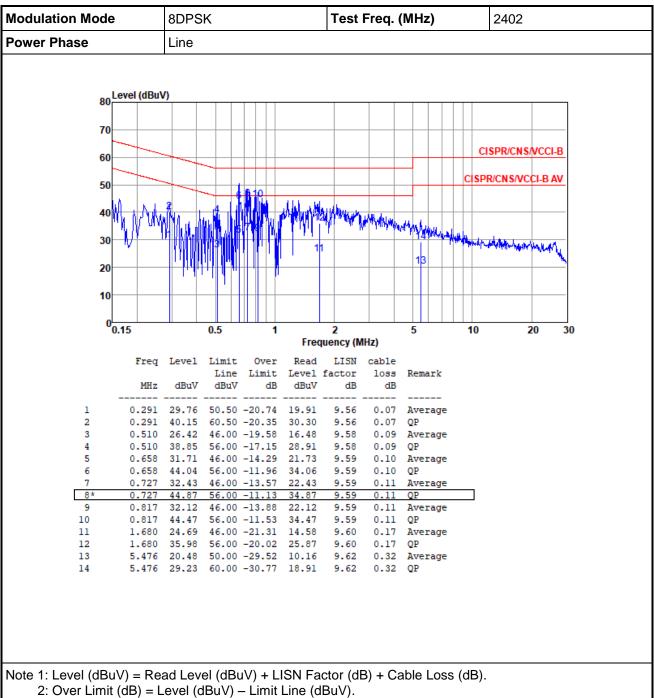

Report No.: FR030301-02AD Page: 13 of 59



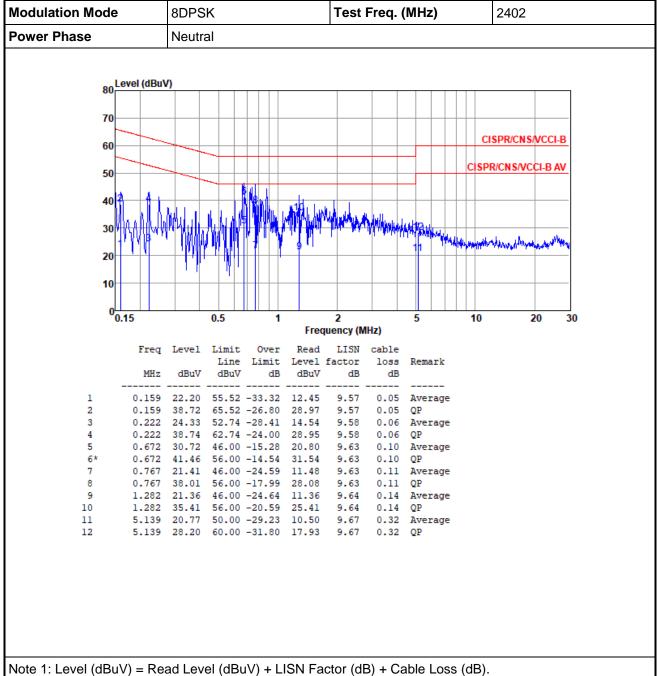

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).

Report No.: FR030301-02AD Page: 14 of 59



## 3.2 Unwanted Emissions into Restricted Frequency Bands

#### 3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit							
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)				
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300				
0.490~1.705	24000/F(kHz)	33.8 - 23	30				
1.705~30.0	30	29	30				
30~88	100	40	3				
88~216	150	43.5	3				
216~960	200	46	3				
Above 960	500	54	3				

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Report No.: FR030301-02AD Page: 15 of 59



#### 3.2.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

#### Note:

3.

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. Radiated emission above 1GHz / Peak value RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission above 1GHz / Average value for harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:


20log (Duty cycle) = 20log 
$$\frac{1s / 1600 * 5}{100 \text{ ms}}$$
 = -30.1dB

4. Radiated emission above 1GHz / Average value for other emissions RBW=1MHz, VBW=1/T and Peak detector

Report No.: FR030301-02AD Page: 16 of 59




## 3.2.3 Test Setup

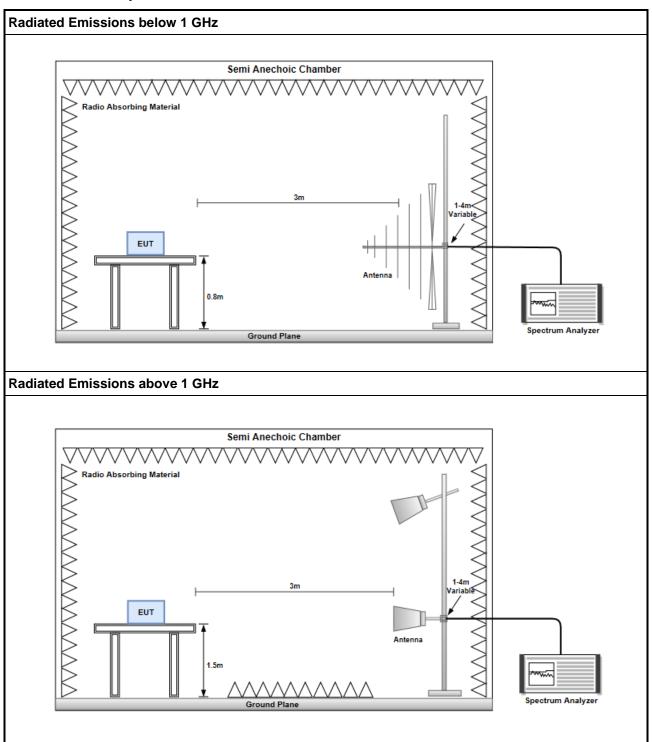

Report No.: FR030301-02AD Page: 17 of 59



### 3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

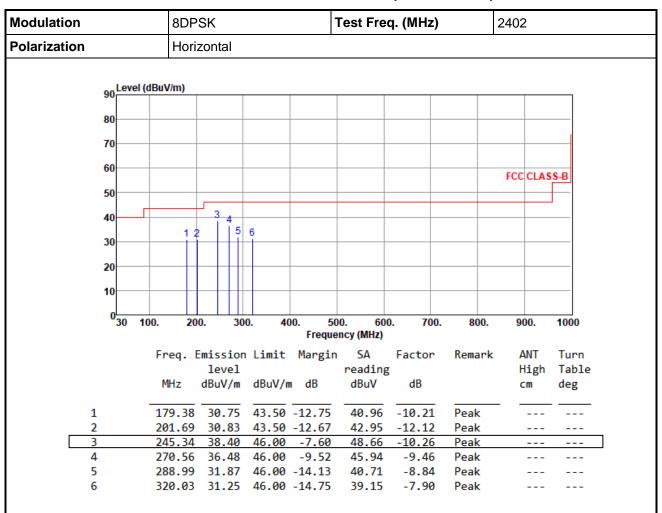

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR030301-02AD Page: 18 of 59




Modulation	8DPSK	Test	Freq. (MHz)	2402
Polarization	Vertical	Vertical		
90 Level (dBu	ıV/m)			
80				
80				
70				
60				
				FCC CLASS-B
50				
40	4 5	6		
30 1	2 3			
	ī			
20				
10				
030 100.	200. 300.	400. 500. Frequency (N		300. 900. 1000
F	req. Emission Li	mit Margin S/	A Factor Rem	ark ANT Turr
	level	read		High Tabl
	MHz dBuV/m dB	uV/m dB dBı	ıV dB	cm deg
1	36.79 29.08 40	.00 -10.92 38	73 -9.65 Pea	ık
	52.22 27.17 43	.50 -16.33 35	80 -8.63 Pea	ık
			61 -10.21 Pea	
			33 -12.14 Pea	
	68.62 35.76 46 39.25 34.44 46	.00 -10.24 45	.33 -9.57 Pea .49 -3.05 Pea	

\*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR030301-02AD Page: 19 of 59



### 3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

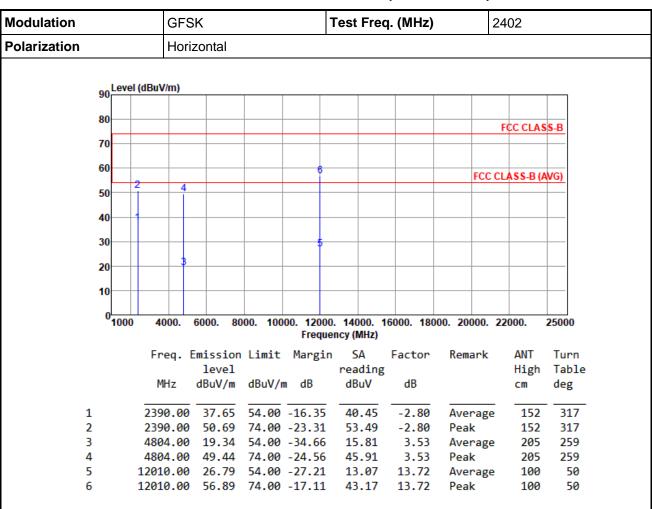

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR030301-02AD Page: 20 of 59



Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

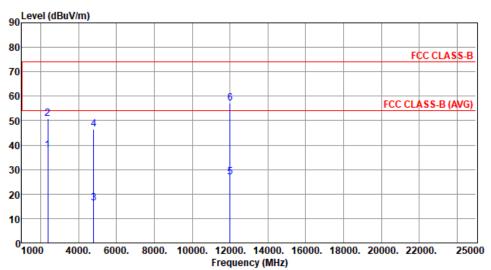

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
	2200 00			15.11	40.60			400	427
1	2390.00	37.89	54.00	-16.11	40.69	-2.80	Average	100	137
2	2390.00	50.75	74.00	-23.25	53.55	-2.80	Peak	100	137
3	4804.00	16.28	54.00	-37.72	12.75	3.53	Average	229	102
4	4804.00	46.38	74.00	-27.62	42.85	3.53	Peak	229	102
5	12010.00	26.89	54.00	-27.11	13.17	13.72	Average	100	20
6	12010.00	56.99	74.00	-17.01	43.27	13.72	Peak	100	20

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR030301-02AD Page: 21 of 59



Modulation	GFSK		Test Freq	ı. (MHz)	24	141	
Polarization	Horizontal				1		
90 Level (dE	BuV/m)						
80						FCC CLAS	S-B
70							
60	8						
<u> </u>	6				FCC CI	ASS-B (A	VG)
50	Ĭ						
40							
30							
30							
20	7						
10							
1000	4000. 6000. 80	00. 10000. 1200 Frequ	0. 14000. 16 ency (MHz)	6000. 1800	00. 20000. 22	2000.	25000
	Freq. Emission			Factor	Remark	ANT	Turn
	level		reading			High	Table
	MHz dBuV/m	dBuV/m dB	dBuV	dB		cm	deg
1 2	390.00 37.49	54.00 -16.51	40.29	-2.80	Average	151	316
		74.00 -23.33		-2.80	Peak	151	316
3 2	483.50 37.30	54.00 -16.70	40.33	-3.03	Average	151	316

74.00 -23.79

54.00 -35.06

53.24

15.31

45.41

17.37

-3.03

3.63

3.63

9.21

9.21

Peak

Peak

Peak

Average

Average

151

203

203

261

261

316

258

258

207

207

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

2483.50 50.21

4882.00 18.94

4882.00 49.04 74.00 -24.96

7323.00 26.58 54.00 -27.42

7323.00 56.68 74.00 -17.32 47.47

5

6


7

8

Report No.: FR030301-02AD Page: 22 of 59



Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical		

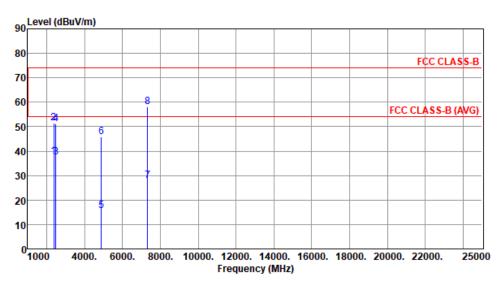

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	37.79	54.00	-16 21	40.59	-2.80	Average	105	143
2	2390.00		74.00		54.12	-2.80	Peak	105	143
3	2483.50	37.54	54.00	-16.46	40.57	-3.03	Average	105	143
4	2483.50	51.30	74.00	-22.70	54.33	-3.03	Peak	105	143
5	4882.00	15.67	54.00	-38.33	12.04	3.63	Average	242	95
6	4882.00	45.77	74.00	-28.23	42.14	3.63	Peak	242	95
7	7323.00	27.94	54.00	-26.06	18.73	9.21	Average	129	147
8	7323.00	58.04	74.00	-15.96	48.83	9.21	Peak	129	147

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR030301-02AD Page: 23 of 59



6

Modulation			GF:	SK			Test Fre	q. (MHz)		2480	
Polarization			Hor	izontal							
			*								
	90	Level	(dBuV/m)								
	80										
	70									FCC CLAS	S-B
	70										
	60		2		5				FCC	CLASS-B (A	WG)
	50		4								-
	40										
	30										
	20		3								
	10										
	0	1000	4000.	6000.	8000. 1	0000. 12000	). <b>14000</b> . 1	16000. 180	00. 20000.	22000.	25000
						Freque	ency (MHz)				
			Freq.			t Margir		Factor	Remark	ANT	Turn
				level			reading			High	Table
			MHz	dBuV/n	ı dBuV	/m dB	dBuV	dB		CM	deg
	1		2483.50	38.99	54.0	0 -15.01	42.02	-3.03	Average	155	318
	2					0 -20.46	56.57	-3.03	Peak	155	318
	3		4960.00	18.59	54.0	0 -35.41	14.76	3.83	Average	205	256
	4		4960.00	48.69	74.0	0 -25.31	44.86	3.83	Peak	205	256
	5		7440.00	25.32	54.0	0 -28.68	16.11	9.21	Average	255	206
	6		7//0 00	55 //2	7/ 0	0 19 59	46 21	9 21	Poak	255	206

9.21

Peak

255

206

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

7440.00 25.32 54.00 -28.68 16.11 7440.00 55.42 74.00 -18.58 46.21


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR030301-02AD Page: 24 of 59



Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

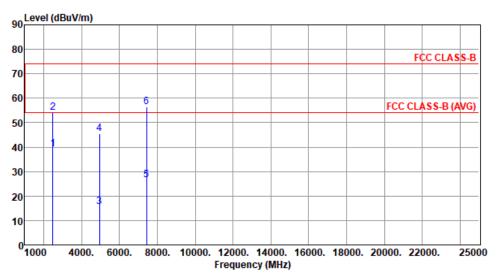


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.34	54.00	-14.66	42.37	-3.03	Average	111	153
2	2483.50	54.19	74.00	-19.81	57.22	-3.03	Peak	111	153
3	4960.00	15.49	54.00	-38.51	11.66	3.83	Average	242	98
4	4960.00	45.59	74.00	-28.41	41.76	3.83	Peak	242	98
5	7440.00	26.50	54.00	-27.50	17.29	9.21	Average	143	155
6	7440.00	56.60	74.00	-17.40	47.39	9.21	Peak	143	155

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR030301-02AD Page: 25 of 59



### 3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK

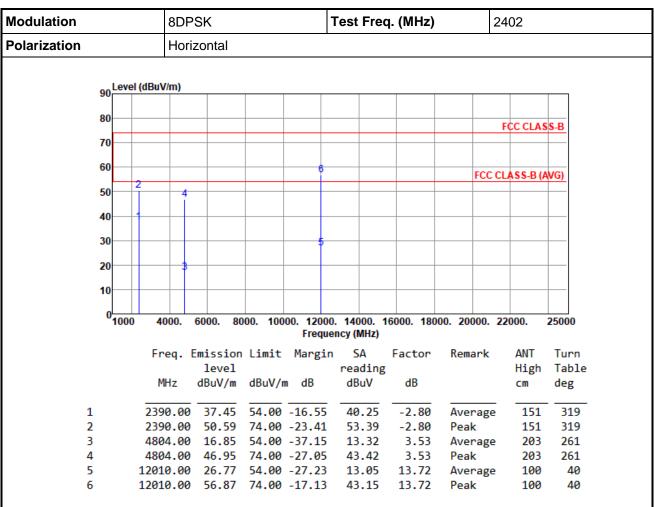

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR030301-02AD Page: 26 of 59



Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical		

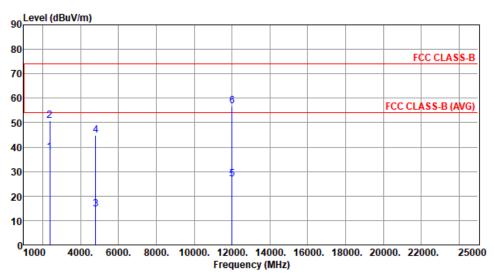


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.78	54.00	-16.22	40.58	-2.80	Average	100	135
2	2390.00	50.89	74.00	-23.11	53.69	-2.80	Peak	100	135
3	4804.00	14.69	54.00	-39.31	11.16	3.53	Average	225	103
4	4804.00	44.79	74.00	-29.21	41.26	3.53	Peak	225	103
5	12010.00	26.79	54.00	-27.21	13.07	13.72	Average	100	30
6	12010.00	56.89	74.00	-17.11	43.17	13.72	Peak	100	30

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR030301-02AD Page: 27 of 59



Modulation		8DPS	K		Test	Freq.	(MHz)	)	24	41	
Polarization	Horizo	ontal									
90											
80									F	CC CLAS	S-B
70											-

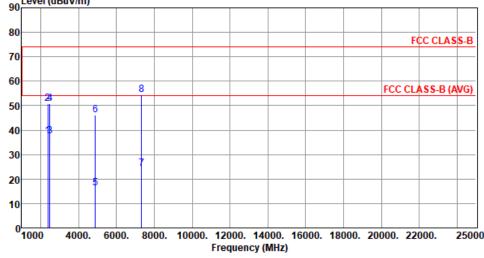


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.59	54.00	-16.41	40.39	-2.80	Average	149	318
2	2390.00	50.79	74.00	-23.21	53.59	-2.80	Peak	149	318
3	2483.50	37.43	54.00	-16.57	40.46	-3.03	Average	149	318
4	2483.50	50.65	74.00	-23.35	53.68	-3.03	Peak	149	318
5	4882.00	16.12	54.00	-37.88	12.49	3.63	Average	202	261
6	4882.00	46.22	74.00	-27.78	42.59	3.63	Peak	202	261
7	7323.00	24.37	54.00	-29.63	15.16	9.21	Average	255	209
8	7323.00	54.47	74.00	-19.53	45.26	9.21	Peak	255	209

\*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR030301-02AD Page: 28 of 59



Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical		

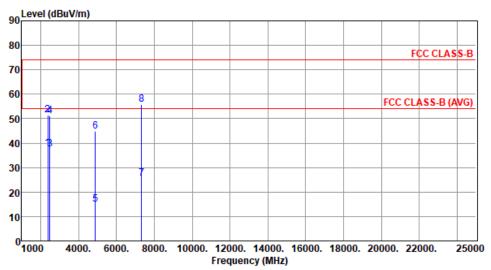


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.88	54.00	-16.12	40.68	-2.80	Average	104	144
2	2390.00		74.00		54.31	-2.80	Peak	104	144
3	2483.50	37.63	54.00	-16.37	40.66	-3.03	Average	104	144
4	2483.50	51.22	74.00	-22.78	54.25	-3.03	Peak	104	144
5	4882.00	14.79	54.00	-39.21	11.16	3.63	Average	241	96
6	4882.00	44.89	74.00	-29.11	41.26	3.63	Peak	241	96
7	7323.00	25.56	54.00	-28.44	16.35	9.21	Average	130	145
8	7323.00	55.66	74.00	-18.34	46.45	9.21	Peak	130	145

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR030301-02AD Page: 29 of 59



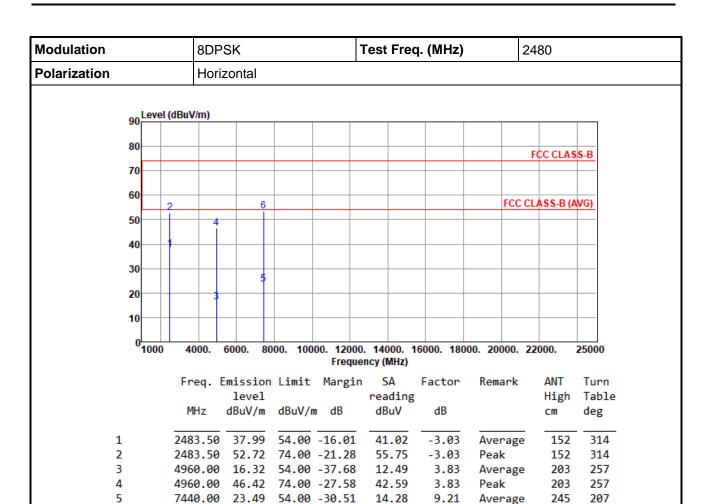

44.38

9.21

Peak

245

207

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor, cable loss and amplifier gain

7440.00 53.59 74.00 -20.41

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Report No.: FR030301-02AD Page: 30 of 59

Report Version: Rev. 01

6



Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical		

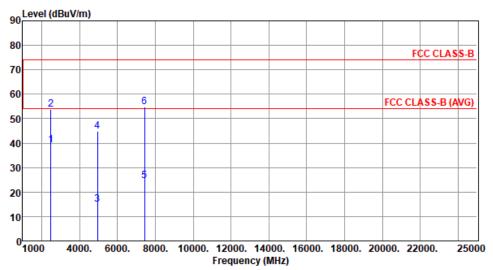

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	39.14	54.00	-14.86	42.17	-3.03	Average	105	157
2	2483.50	53.94	74.00	-20.06	56.97	-3.03	Peak	105	157
3	4960.00	14.85	54.00	-39.15	11.02	3.83	Average	243	95
4	4960.00	44.95	74.00	-29.05	41.12	3.83	Peak	243	95
5	7440.00	24.69	54.00	-29.31	15.48	9.21	Average	145	159
6	7440.00	54.79	74.00	-19.21	45.58	9.21	Peak	145	159

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR030301-02AD Page: 31 of 59



## 3.3 Unwanted Emissions into Non-Restricted Frequency Bands

#### 3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

#### 3.3.2 Test Procedures


#### **Reference Level Measurement**

- 1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

#### **Unwanted Emissions Level Measurement**

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- 4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


#### 3.3.3 Test Setup



Report No.: FR030301-02AD Page: 32 of 59




### 3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

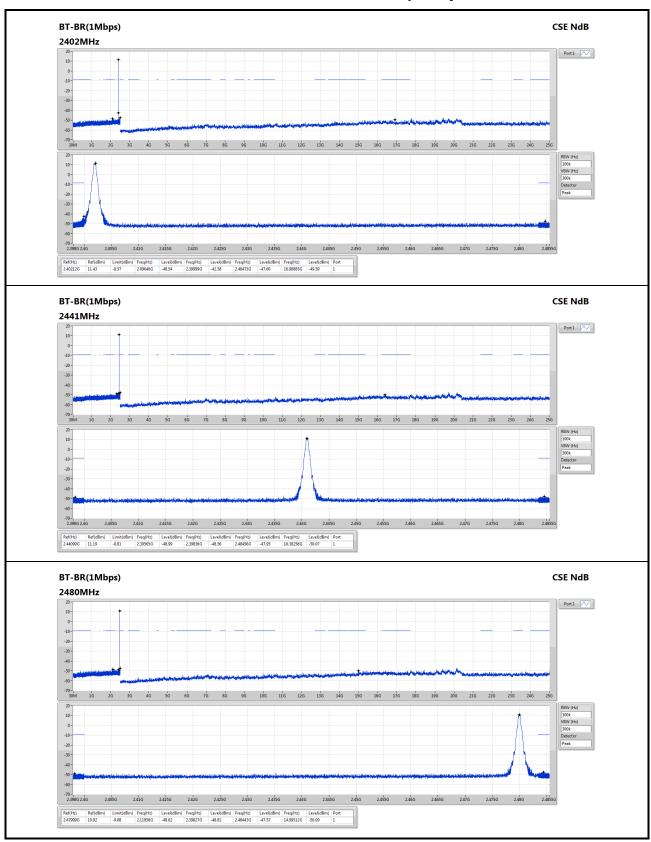


Report No.: FR030301-02AD



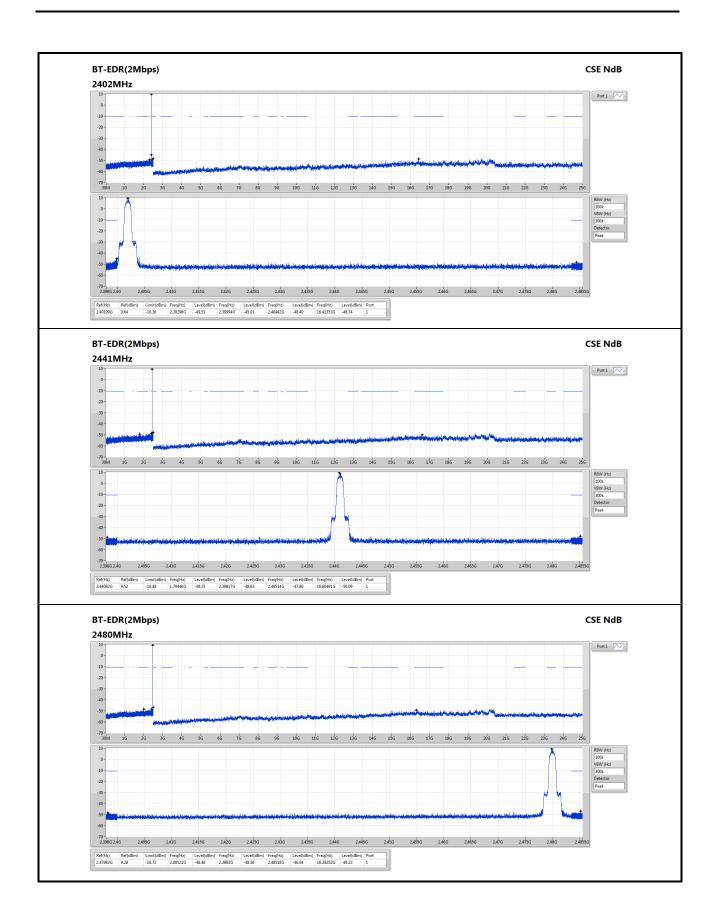


Report No.: FR030301-02AD Page: 34 of 59



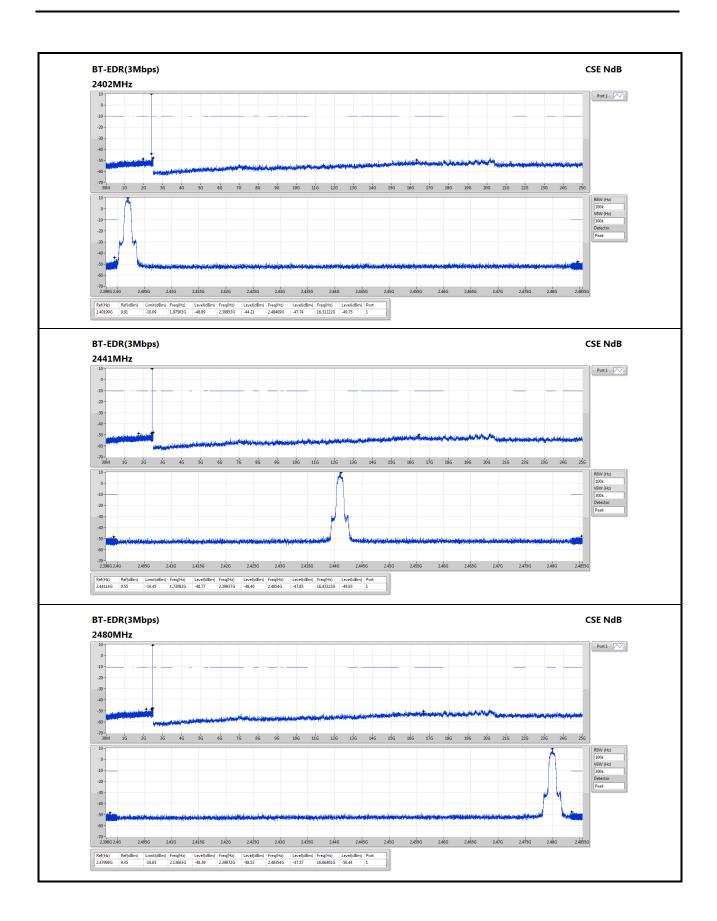

Report No.: FR030301-02AD Page: 35 of 59



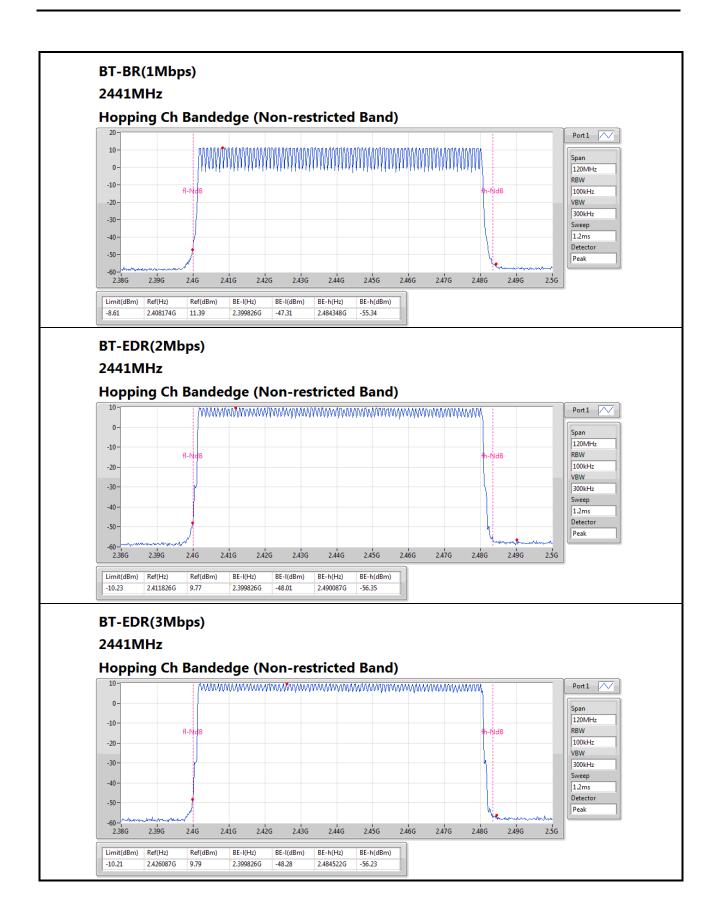

Report No.: FR030301-02AD Page: 36 of 59



# 3.4 Conducted Output Power

## 3.4.1 Limit of Conducted Output Power

1 Watt For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
0.125 Watt For all other frequency hopping systems in the 2400–2483.5 MHz band.
0.125 Watt For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

### 3.4.2 Test Procedures

- 1. A wideband power meter is used for power measurement. Bandwidth of power senor and meter is 50MHz
- 2 If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

## 3.4.3 Test Setup



Report No.: FR030301-02AD Page: 37 of 59



# 3.4.4 Test Result of Conducted Output Power

**Summary of Peak Conducted Output Power** 

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	11.79	0.01510
BT-EDR(2Mbps)	11.84	0.01528
BT-EDR(3Mbps)	12.21	0.01663

### Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	2.40	11.79	21.00
2441MHz	Pass	2.40	11.60	21.00
2480MHz	Pass	2.40	11.35	21.00
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	2.40	11.84	21.00
2441MHz	Pass	2.40	11.65	21.00
2480MHz	Pass	2.40	11.39	21.00
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	2.40	12.21	21.00
2441MHz	Pass	2.40	12.03	21.00
2480MHz	Pass	2.40	11.79	21.00

Report No.: FR030301-02AD Page: 38 of 59



**Summary of Conducted (Average) Output Power** 

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	11.66	0.01466
BT-EDR(2Mbps)	9.52	0.00895
BT-EDR(3Mbps)	9.53	0.00897

### Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	2.40	11.66	-
2441MHz	Pass	2.40	11.48	-
2480MHz	Pass	2.40	11.22	-
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	2.40	9.52	-
2441MHz	Pass	2.40	9.31	-
2480MHz	Pass	2.40	9.03	-
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	2.40	9.53	-
2441MHz	Pass	2.40	9.33	-
2480MHz	Pass	2.40	9.04	-

Note: Average power is for reference only.

Report No.: FR030301-02AD Page: 39 of 59



# 3.5 Number of Hopping Frequency


# 3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### 3.5.2 Test Procedures

- 1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
- 2 Allow trace to stabilize.

## 3.5.3 Test Setup



Report No.: FR030301-02AD Page: 40 of 59



# 3.5.4 Test Result of Number of Hopping Frequency

**Summary** 


January .		
Mode	Max-Hop No	
2.4-2.4835GHz	-	
BT-BR(1Mbps)	79	
BT-EDR(2Mbps)	79	
BT-EDR(3Mbps)	79	

### Result

Mode	Result	Hopping No	Limit
BT-BR(1Mbps)	-	-	-
2441MHz	Pass	79	15
BT-EDR(2Mbps)	-	-	-
2441MHz	Pass	79	15
BT-EDR(3Mbps)	-	-	-
2441MHz	Pass	79	15

Report No.: FR030301-02AD Page: 41 of 59



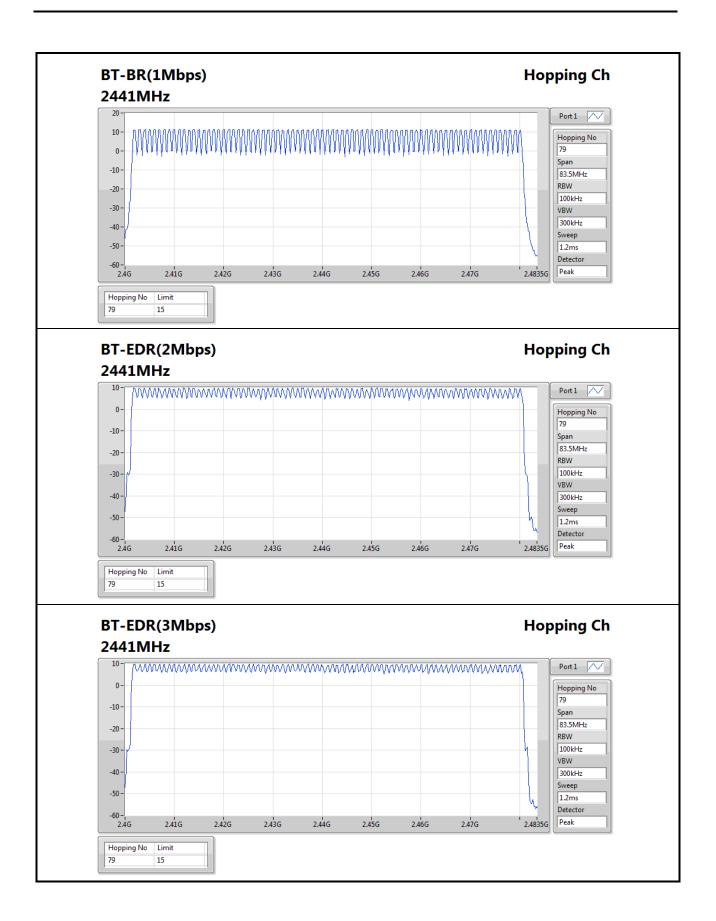

Report No.: FR030301-02AD Page: 42 of 59



# 3.6 20dB and Occupied Bandwidth

### 3.6.1 Test Procedures


#### 20 dB Bandwidth

- Set RBW=10kHz VBW= 30kHz for BT BR mode, RBW=20kHz, VBW=100kHz for other modes, Sweep time = Auto, Detector=Peak, Trace max hold
- 2 Allow trace to stabilize
- 3 Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### **Occupied Bandwidth**

- Set RBW=10kHz VBW= 30kHz for BT BR mode, RBW=20kHz, VBW=100kHz for other modes, Sweep time = Auto, Detector=Sample, Trace max hold
- 2 Allow trace to stabilize
- 3 Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

### 3.6.2 Test Setup



Report No.: FR030301-02AD Page: 43 of 59



# 3.6.3 Test result of 20dB and Occupied Bandwidth

**Summary** 

Mode	Max-N dB	Max-OBW	ITU-Code	Min-N dB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-BR(1Mbps)	920.29k	890.014k	890KF1D	916.667k	882.779k
BT-EDR(2Mbps)	1.333M	1.19M	1M19G1D	1.283M	1.179M
BT-EDR(3Mbps)	1.264M	1.194M	1M19G1D	1.261M	1.176M

**Max-N dB** = Maximum 20dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth; **Min-N dB** = Minimum 20dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


### Result

Mode	Result	Limit	Port 1-N dB	Port 1-OBW
		(Hz)	(Hz)	(Hz)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	Inf	920.29k	886.397k
2441MHz	Pass	Inf	916.667k	890.014k
2480MHz	Pass	Inf	916.667k	882.779k
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.283M	1.179M
2441MHz	Pass	Inf	1.333M	1.19M
2480MHz	Pass	Inf	1.283M	1.183M
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.261M	1.194M
2441MHz	Pass	Inf	1.264M	1.179M
2480MHz	Pass	Inf	1.261M	1.176M

Port X-N dB = Port X 20dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;


Report No.: FR030301-02AD Page: 44 of 59



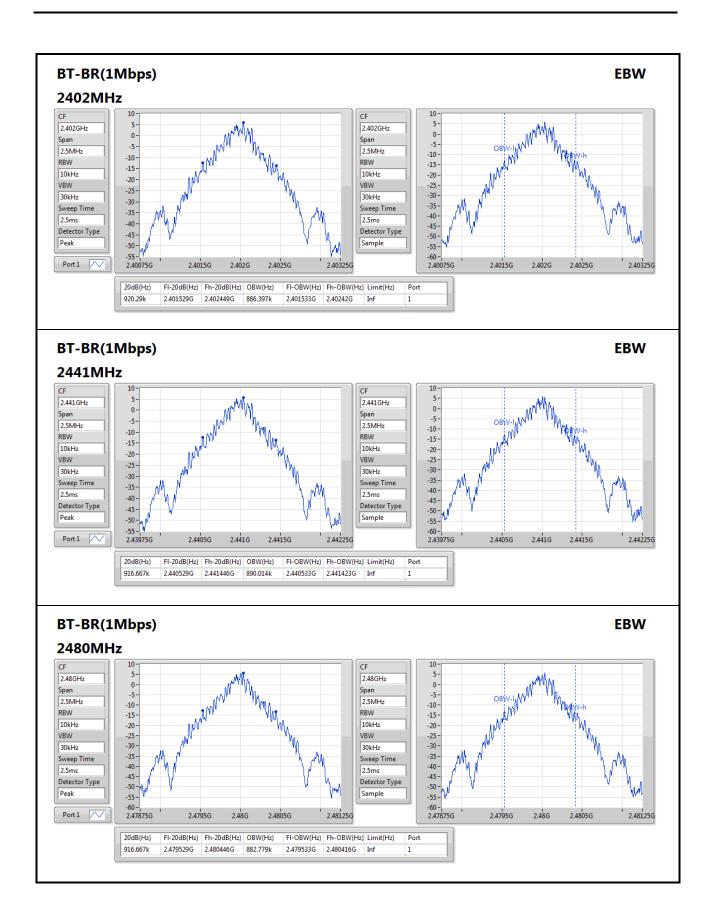


Report No.: FR030301-02AD Page: 45 of 59



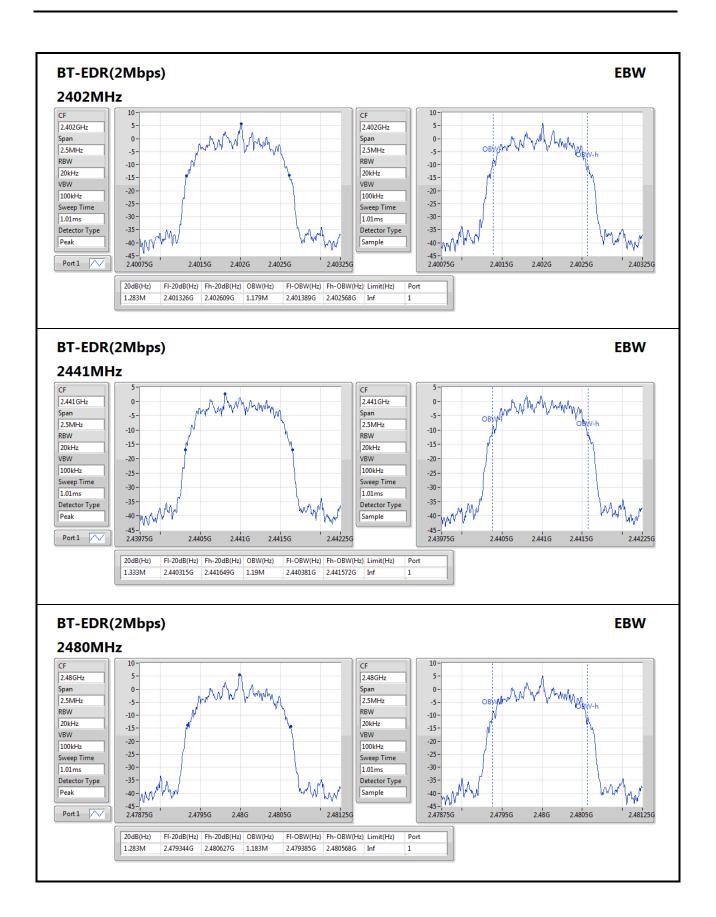

Report No.: FR030301-02AD Page: 46 of 59



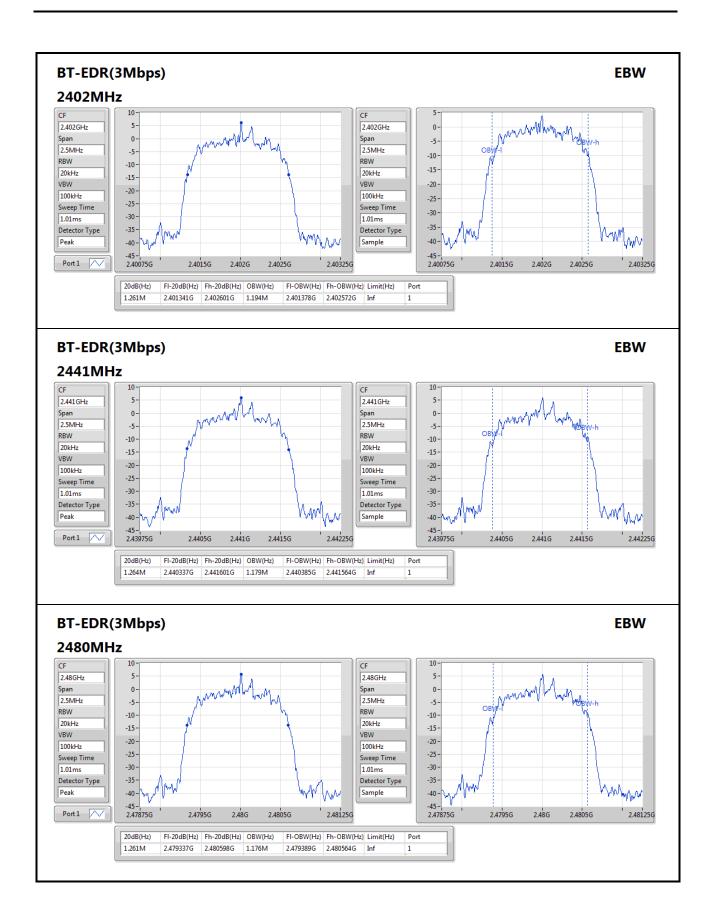

Report No.: FR030301-02AD Page: 47 of 59



# 3.7 Channel Separation


## 3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 3.7.2 Test Procedures

- 1. Set RBW=30kHz, VBW=100kHz,Sweep time = Auto, Detector=Peak Trace max hold
- 2 Allow trace to stabilize
- 3 Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

## 3.7.3 Test Setup



Report No.: FR030301-02AD Page: 48 of 59



# 3.7.4 Test result of Channel Separation

Summary


Mode	Max-Space	Min-Space
	(Hz)	(Hz)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	1.004348M	1M
BT-EDR(2Mbps)	1.004348M	1M
BT-EDR(3Mbps)	1.004348M	1M

### Result

Mode	Result	FI	Fh	Ch.Space	Limit
		(Hz)	(Hz)	(Hz)	(Hz)
BT-BR(1Mbps)	-	-	-	-	-
2402MHz	Pass	2.401996G	2.402996G	1M	612.91314k
2441MHz	Pass	2.440991G	2.441996G	1.004348M	610.500222k
2480MHz	Pass	2.478991G	2.479996G	1.004348M	610.500222k
BT-EDR(2Mbps)	-	-	-	-	-
2402MHz	Pass	2.401991G	2.402996G	1.004348M	854.478k
2441MHz	Pass	2.440991G	2.441996G	1.004348M	887.778k
2480MHz	Pass	2.478996G	2.479996G	1M	854.478k
BT-EDR(3Mbps)	-	-	-	-	-
2402MHz	Pass	2.401991G	2.402996G	1.004348M	839.826k
2441MHz	Pass	2.440991G	2.441996G	1.004348M	841.824k
2480MHz	Pass	2.478996G	2.479996G	1M	839.826k


Report No.: FR030301-02AD Page: 49 of 59



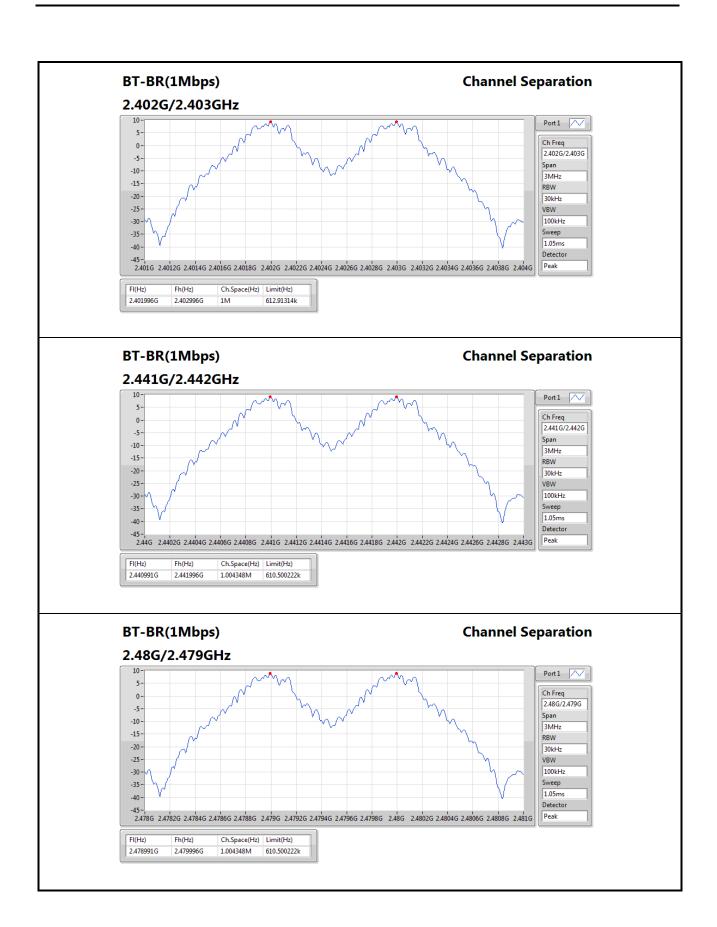


Report No.: FR030301-02AD Page: 50 of 59



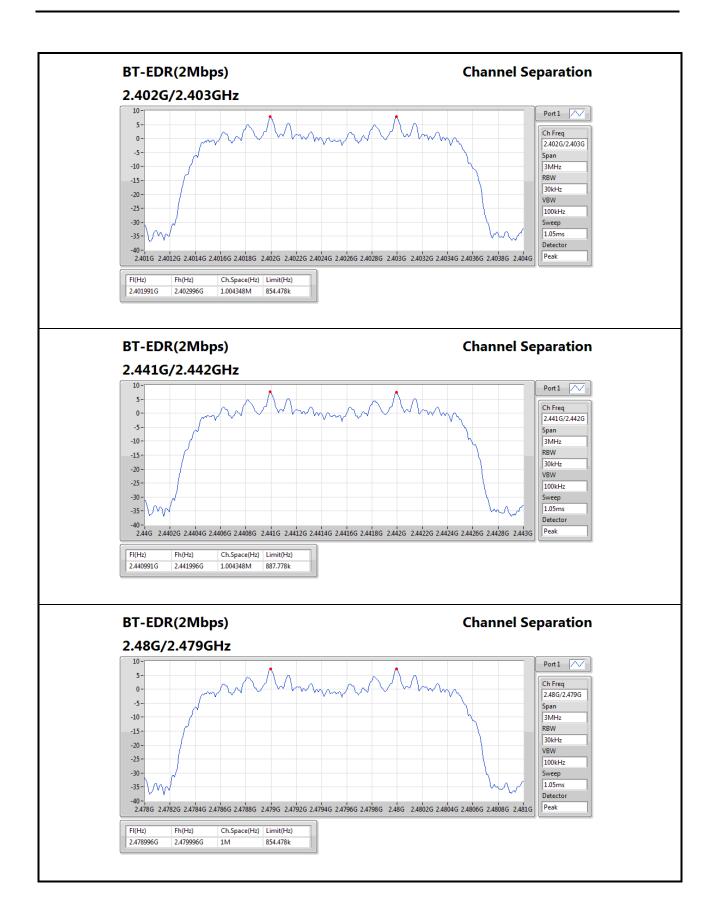

Report No.: FR030301-02AD Page: 51 of 59



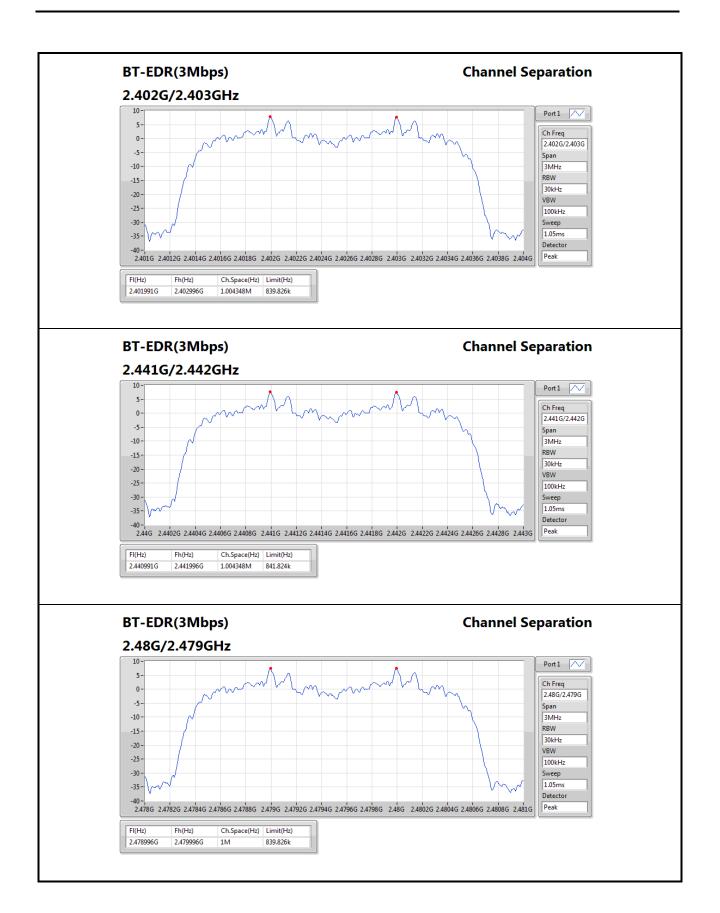

Report No.: FR030301-02AD Page: 52 of 59



### 3.8 Number of Dwell Time

#### 3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 3.8.2 Test Procedures

- 1. Set RBW=300kHz,VBW=1MHz,Sweep time = 10 ms, Detector=Peak, Span=0Hz,Trace max hold
- 2 Enable gating and trigger function of spectrum analyzer to measure burst on time.
- The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. Non AFH mode

The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds. DH1 Packet permit maximum 1600 / 79 / 2 = 10.12 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds. AFH mode

The hopping rate is 800 hops/second so the maximum dwell time is 1/800 seconds. DH1 Packet permit maximum 800/20/2 = 20 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $20 \times 8 = 160$  within 8 seconds.

4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. Non AFH mode

The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160 \text{ within } 31.6 \text{ seconds}$ . AFH mode

The hopping rate is 800hops/second so the maximum dwell time is 3/800 seconds. DH3 Packet permit maximum 800 / 20 / 4 = 10 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10 \times 8 = 80$  within 8 seconds.

The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots.


Non AFH mode

The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds

AFH mode

The hopping rate is 800 hops/second so the maximum dwell time is 5/800 seconds. DH5 Packet permit maximum 800/20 / 6 = 6.667 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $6.667 \times 8 = 53.33$  within 8 seconds

### 3.8.3 Test Setup



Report No.: FR030301-02AD Page: 53 of 59



# 3.8.4 Test Result of Dwell Time

**Summary** 

Mode	Max-Dwell	
	(s)	
2.4-2.4835GHz	-	
BT-BR(1Mbps)	310.530435m_DH5	
BT-EDR(2Mbps)	310.530435m_DH5	
BT-EDR(3Mbps)	310.530435m_DH5	

### Result/ Non AFH mode

Mode	Result	Period	Dwell	Limit	Tx On
		(s)	(s)	(s)	(s)
BT-BR(1Mbps)	-	-	-	-	-
2441MHz	Pass	31.6	310.530435m_DH5	400m	2.913043m
2441MHz	Pass	31.6	264.347826m_DH3	400m	1.652174m
2441MHz	Pass	31.6	129.855072m_DH1	400m	405.797101u
BT-EDR(2Mbps)	-	-	-	-	-
2441MHz	Pass	31.6	310.530435m_DH5	400m	2.913043m
2441MHz	Pass	31.6	264.347826m_DH3	400m	1.652174m
2441MHz	Pass	31.6	129.855072m_DH1	400m	405.797101u
BT-EDR(3Mbps)	-	-	-	-	-
2441MHz	Pass	31.6	310.530435m_DH5	400m	2.913043m
2441MHz	Pass	31.6	264.347826m_DH3	400m	1.652174m
2441MHz	Pass	31.6	129.855072m_DH1	400m	405.797101u

Report No.: FR030301-02AD Page: 54 of 59




## Result/ AFH mode

Mode	Result	Period	Dwell	Limit	Tx On
		(s)	(s)	(s)	(s)
BT-BR(1Mbps)	-	-	-	-	-
2441MHz	Pass	8	155.3526m_DH5	400m	2.913043m
2441MHz	Pass	8	132.1739m_DH3	400m	1.652174m
2441MHz	Pass	8	64.92754m_DH1	400m	405.797101u
BT-EDR(2Mbps)	-	-	-	-	-
2441MHz	Pass	8	155.3526m_DH5	400m	2.913043m
2441MHz	Pass	8	132.1739m_DH3	400m	1.652174m
2441MHz	Pass	8	64.92754m_DH1	400m	405.797101u
BT-EDR(3Mbps)	-	-	-	-	-
2441MHz	Pass	8	155.3526m_DH5	400m	2.913043m
2441MHz	Pass	8	132.1739m_DH3	400m	1.652174m
2441MHz	Pass	8	64.92754m_DH1	400m	405.797101u


Report No.: FR030301-02AD Page : 55 of 59



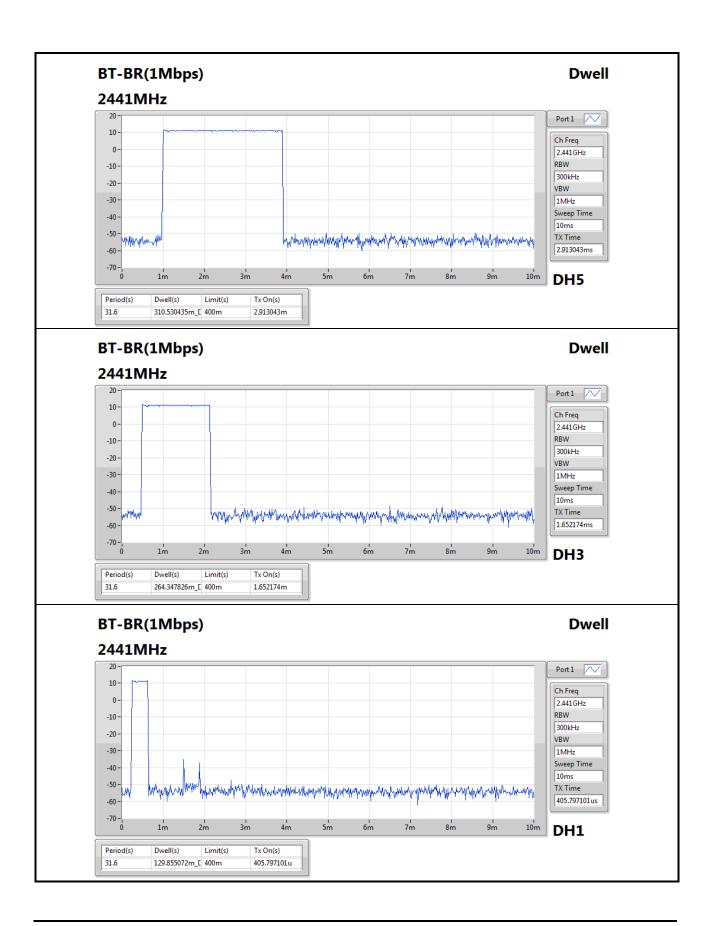


Report No.: FR030301-02AD Page: 56 of 59



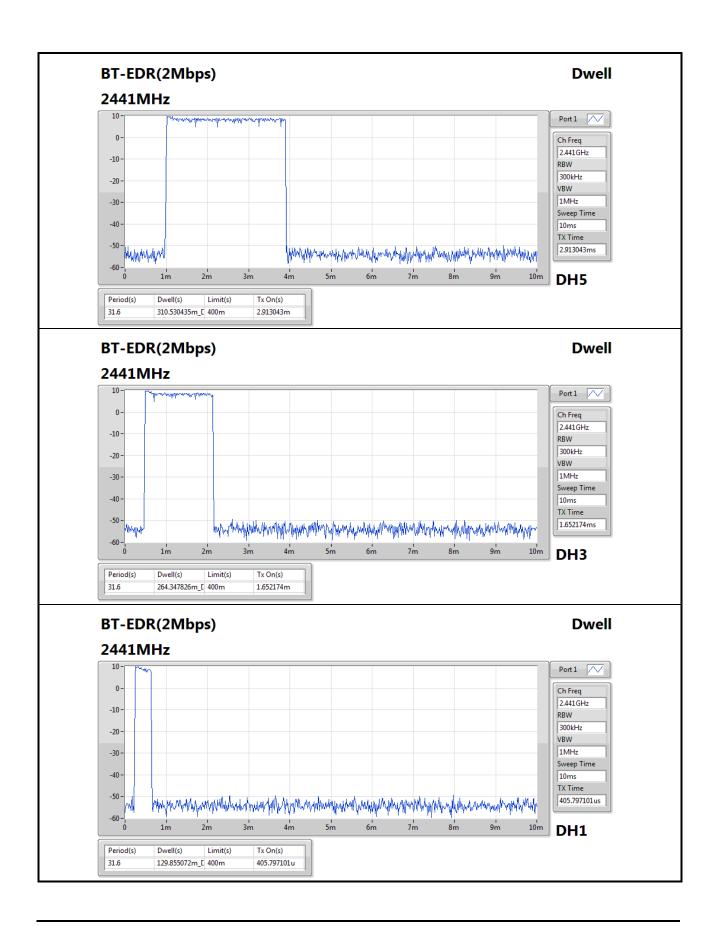

Report No.: FR030301-02AD Page: 57 of 59



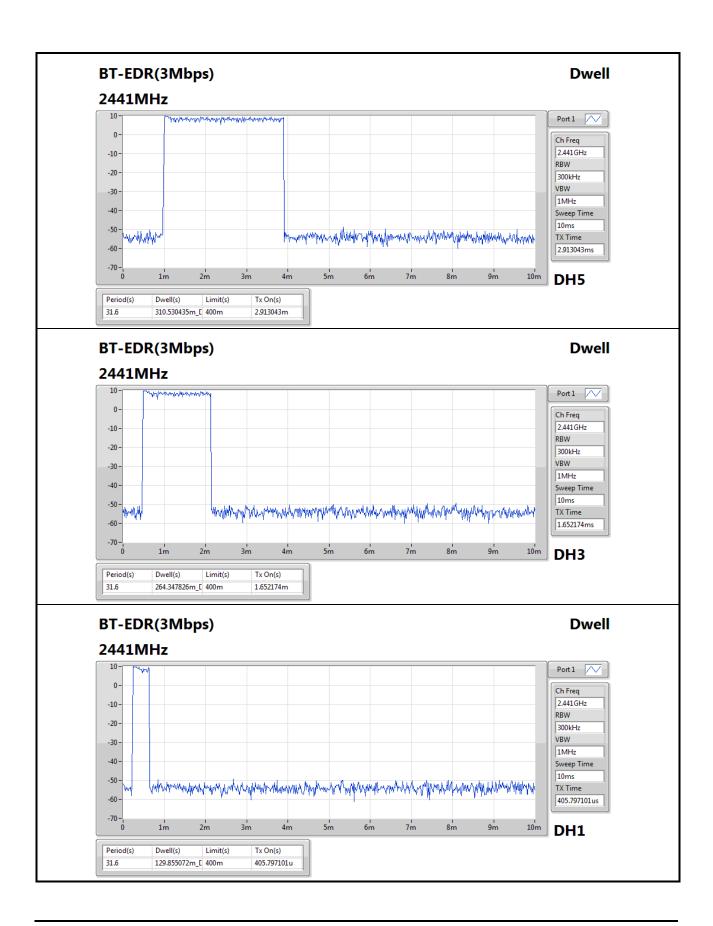

Report No.: FR030301-02AD Page: 58 of 59



# 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan,

R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR030301-02AD Page: 59 of 59