

TEST REPORT

Product Name : 6221B-UUC
Brand Mark : HUNAN FN-LINK
Model No. : 6221B-UUC
FCC ID : 2AATL-6221B-UUC
Report Number : BLA-EMC-202012-A2903
Date of Sample Receipt : 2020/12/8
Date of Test : 2020/12/10 to 2021/1/11
Date of Issue : 2021/1/11
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

HUNAN FN-LINK TECHNOLOGY LIMITED
No. 8, Litong Road, Liuyang Economic Development Zone,
Liuyang China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

hason

Review by:

Sweet. Liang

Approved by:

Jamen Li

Date:

2021/1/11



REPORT REVISE RECORD

Version No.	Date	Description
00	2021/1/11	Original

BlueAsia

TABLE OF CONTENTS

1 TEST SUMMARY	5
2 GENERAL INFORMATION	6
3 GENERAL DESCRIPTION OF E.U.T.....	6
4 TEST ENVIRONMENT	7
5 TEST MODE.....	7
6 MEASUREMENT UNCERTAINTY	7
7 DESCRIPTION OF SUPPORT UNIT	8
8 LABORATORY LOCATION	8
9 TEST INSTRUMENTS LIST.....	9
1 RADIATED SPURIOUS EMISSIONS	12
1.1 LIMITS	12
1.2 BLOCK DIAGRAM OF TEST SETUP	13
1.3 PROCEDURE.....	13
1.4 TEST DATA	15
2 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	23
2.1 LIMITS.....	23
2.2 BLOCK DIAGRAM OF TEST SETUP	24
2.3 PROCEDURE.....	24
2.4 TEST DATA	26
3 CONDUCTED PEAK OUTPUT POWER	42
3.1 LIMITS.....	42
3.2 BLOCK DIAGRAM OF TEST SETUP	42
3.3 TEST DATA	43
4 MINIMUM 6DB BANDWIDTH.....	44
4.1 LIMITS.....	44
4.2 BLOCK DIAGRAM OF TEST SETUP	44
4.3 TEST DATA	44
5 CONDUCTED SPURIOUS EMISSIONS.....	45
5.1 LIMITS.....	45
5.2 BLOCK DIAGRAM OF TEST SETUP	45

5.3 TEST DATA	46
6 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	47
6.1 LIMITS	47
6.2 BLOCK DIAGRAM OF TEST SETUP	47
6.3 PROCEDURE	47
6.4 TEST DATA	49
7 ANTENNA REQUIREMENT	51
7.1 CONCLUSION	51
8 POWER SPECTRUM DENSITY	52
8.1 LIMITS	52
8.2 BLOCK DIAGRAM OF TEST SETUP	52
8.3 TEST DATA	52
10 APPENDIX	53
10.1 APPENDIX A: DTS BANDWIDTH	53
<i>Test Result</i>	53
<i>Test Graphs</i>	54
10.2 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	58
<i>Test Result</i>	58
<i>Test Graphs</i>	59
10.3 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	63
<i>Test Result</i>	63
<i>Test Graphs</i>	64
10.4 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	69
<i>Test Result</i>	69
<i>Test Graphs</i>	70
10.5 APPENDIX E: BAND EDGE MEASUREMENTS	75
<i>Test Result</i>	75
<i>Test Graphs</i>	76
10.6 APPENDIX F: CONDUCTED SPURIOUS EMISSION	79
<i>Test Result</i>	79
<i>Test Graphs</i>	80
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	92
APPENDIX B: PHOTOGRAPHS OF EUT	94

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass

2 GENERAL INFORMATION

Applicant	HUNAN FN-LINK TECHNOLOGY LIMITED
Address	No. 8, Litong Road, Liuyang Economic Development Zone, Liuyang China
Manufacturer	HUNAN FN-LINK TECHNOLOGY LIMITED
Address	No. 8, Litong Road, Liuyang Economic Development Zone, Liuyang China
Factory	N/A
Address	N/A
Product Name	6221B-UUC
Test Model No.	6221B-UUC

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	1.4
Software Version	1.4
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	5MHz
Number of Channels:	802.11b/g/n(HT20):11 802.11n(HT40):7
Antenna Type:	Internal antenna
Antenna Gain:	2dBi(Provided by customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25℃	DC3.3V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in continuously transmitting mode with modulation. (the dutycycle >98%)
Remark: Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25

Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Minimum 6dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11

Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Antenna Requirement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
-----------	--------------	-------	-----	----------	---------

Test Equipment Of Power Spectrum Density

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

1 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX Low channel;TX middle channel;TX high channel
Test Mode (Final Test)	TX Low channel;TX middle channel;TX high channel
Tester	Eason
Temperature	22℃
Humidity	50%

1.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

1.2 BLOCK DIAGRAM OF TEST SETUP

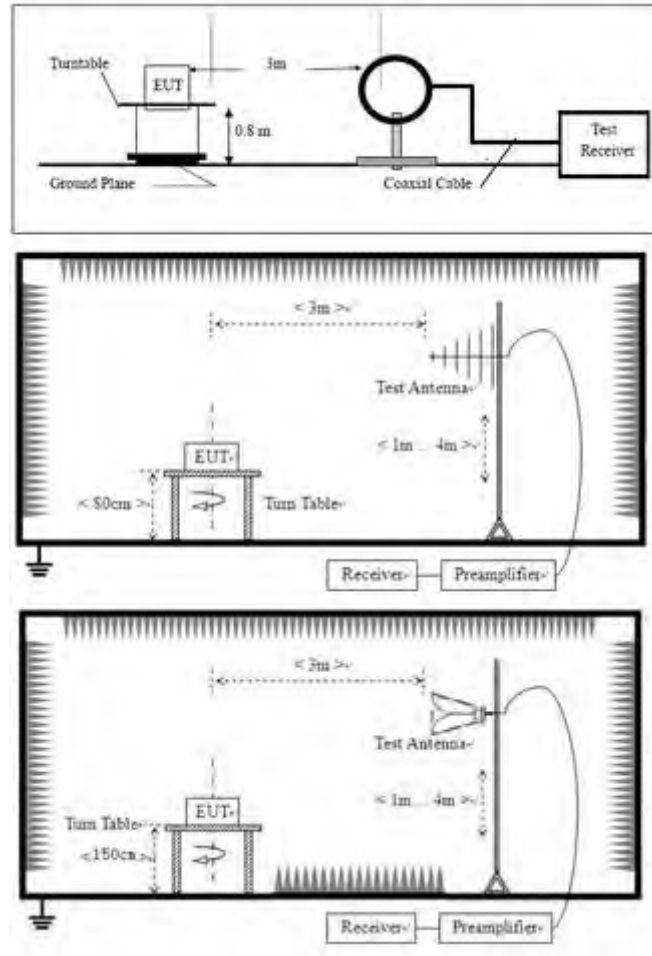

1.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

1.4 TEST DATA

Below 1GHz:

[Polarity: Horizontal]

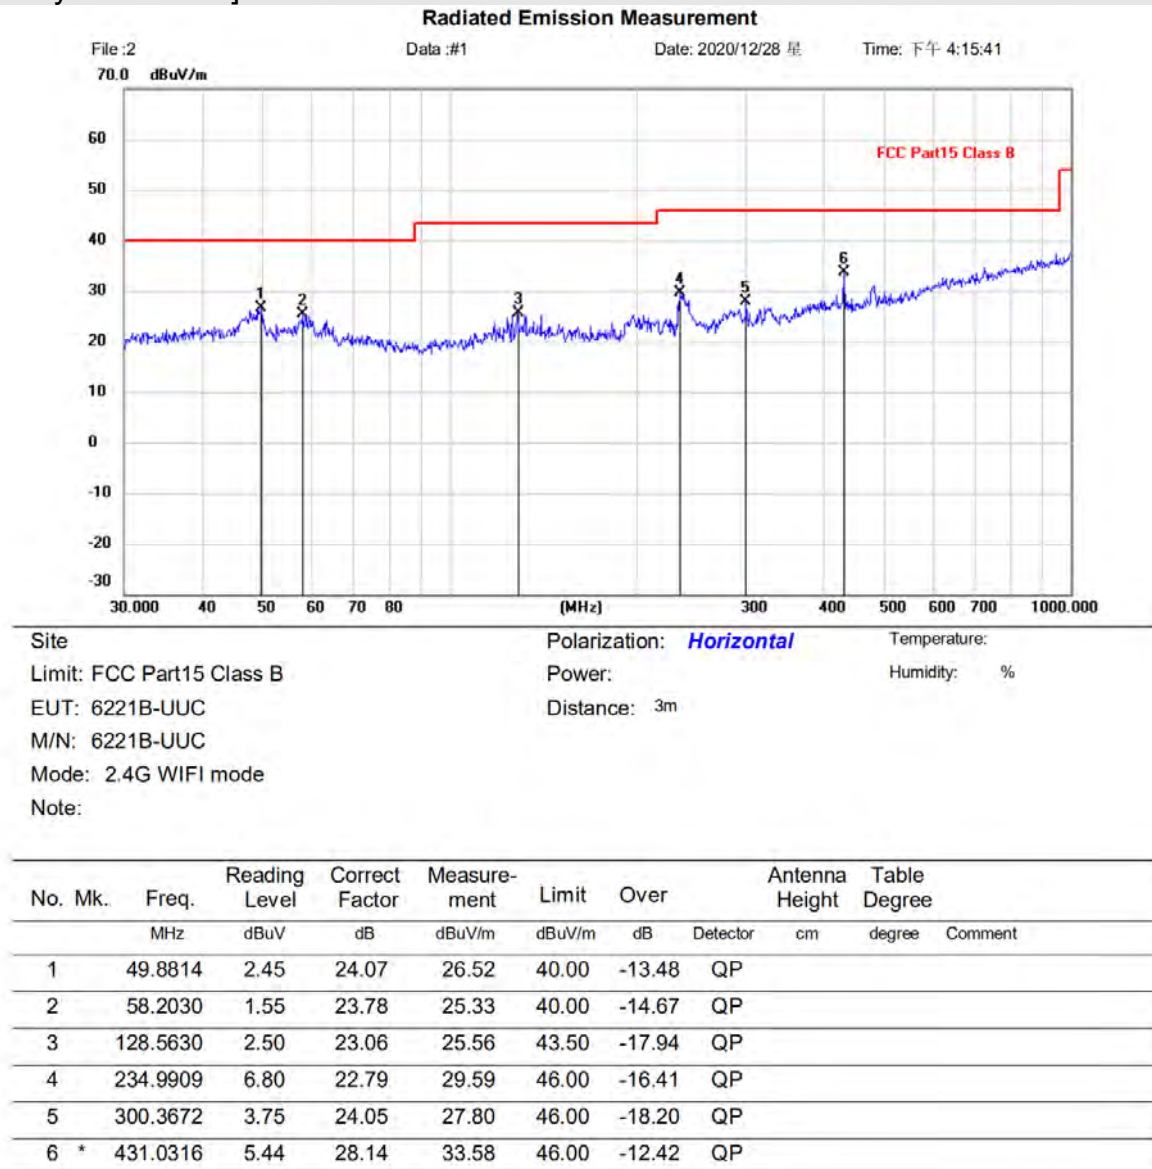


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[Polarity: Vertical]

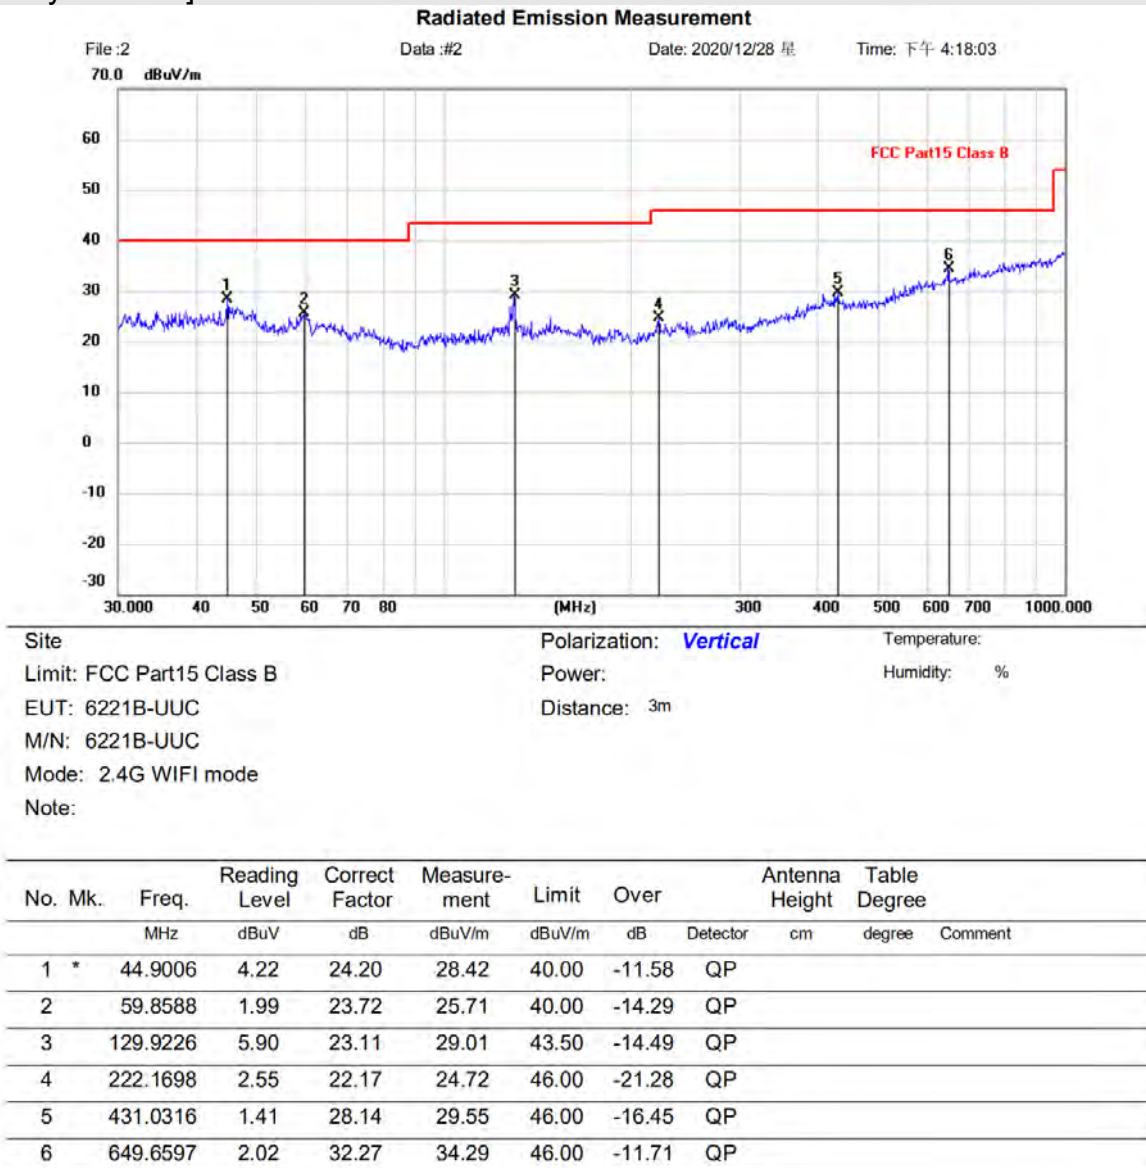

*:Maximum data x:Over limit !:over margin


<Reference Only

Test Result: Pass

Above 1GHz:


Remark: During the test, pre-scan the 802.11b/g/n mode, and found the 802.11g mode which it is worse case.

[Polarity: Horizontal][lowest channel]

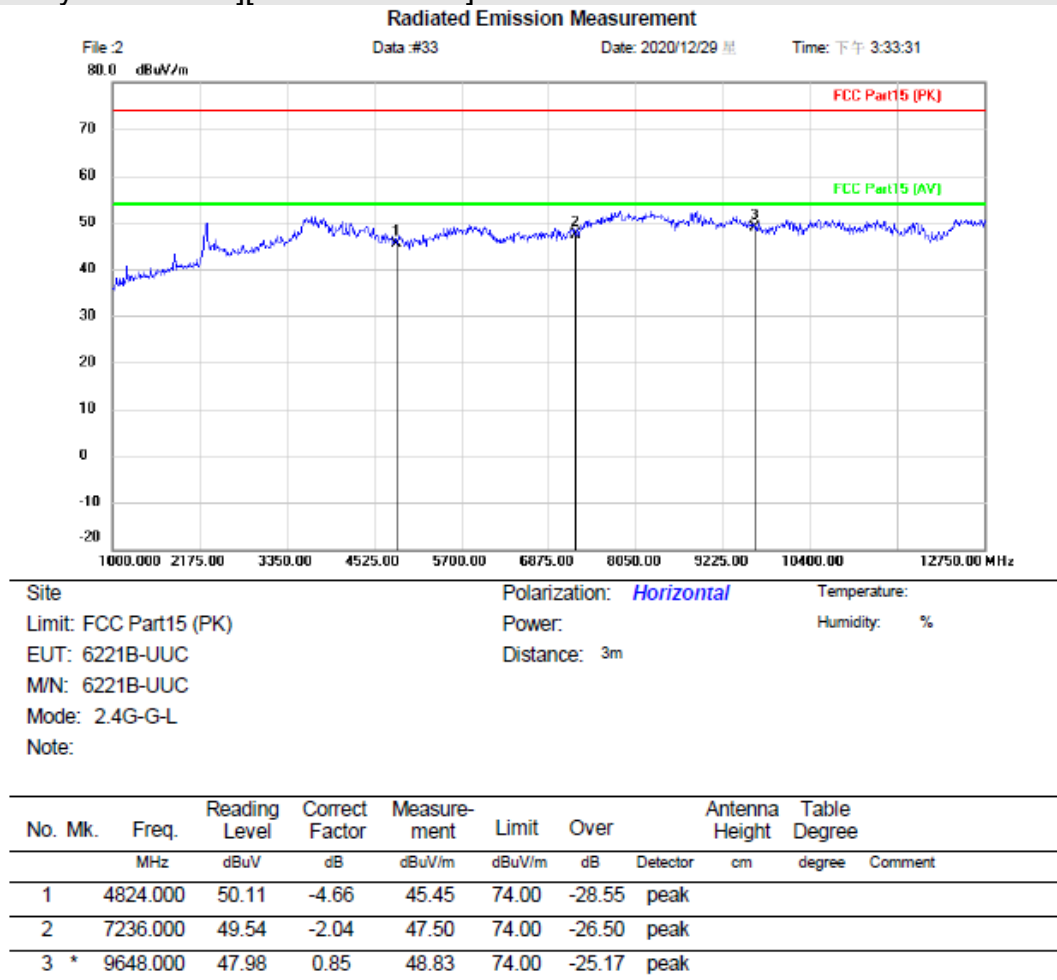


Test Result: Pass

[Polarity: Vertical] [lowest channel]

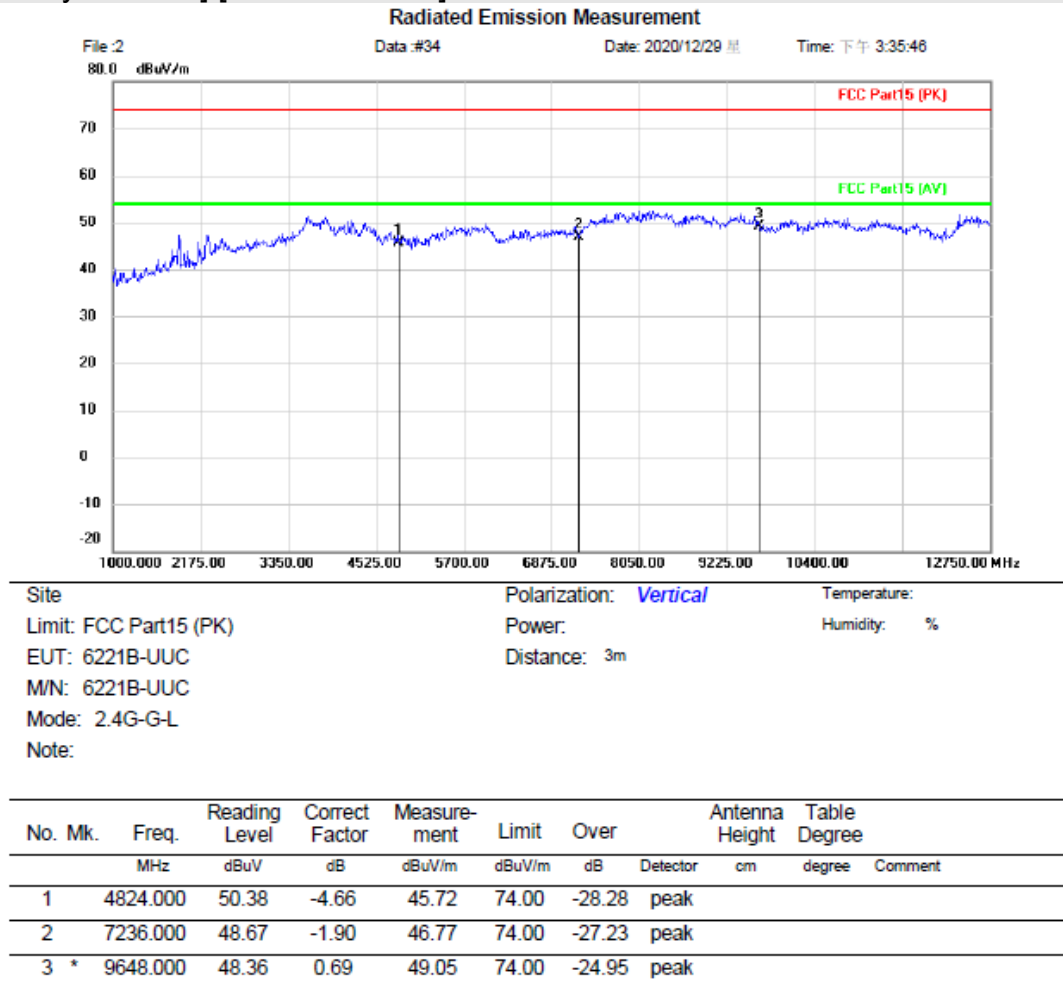


Test Result: Pass

[Polarity: Horizontal] [Middel channel]

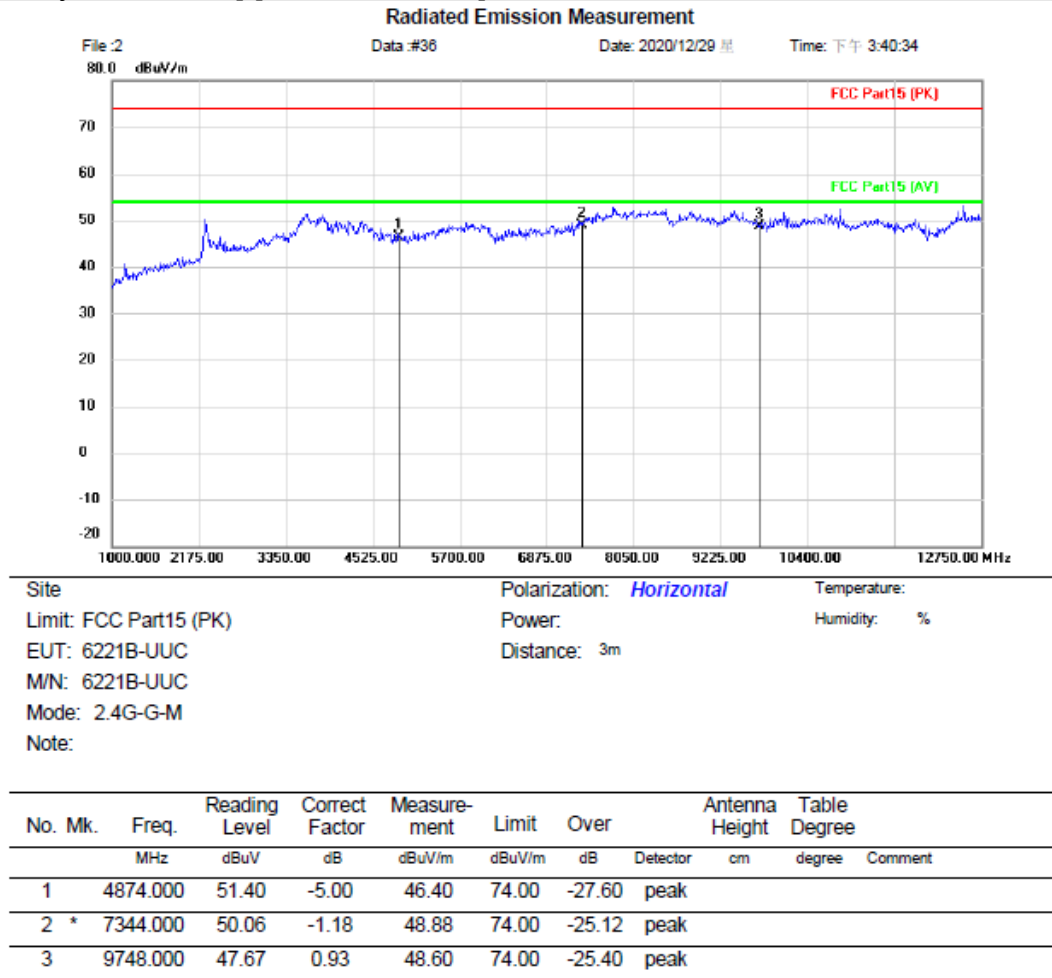


Test Result: Pass

[Polarity: Vertical] [Middel channel]

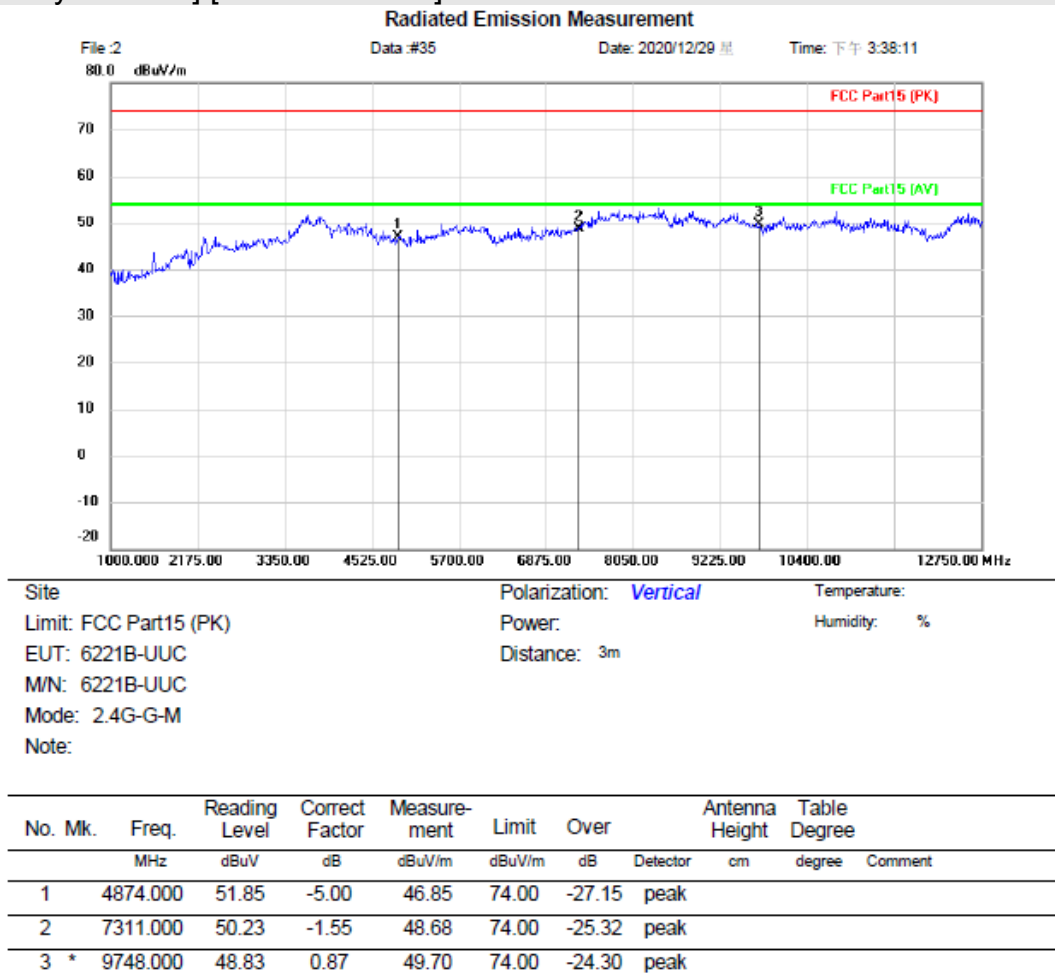


Test Result: Pass

[Polarity: Horizontal][highest channel]

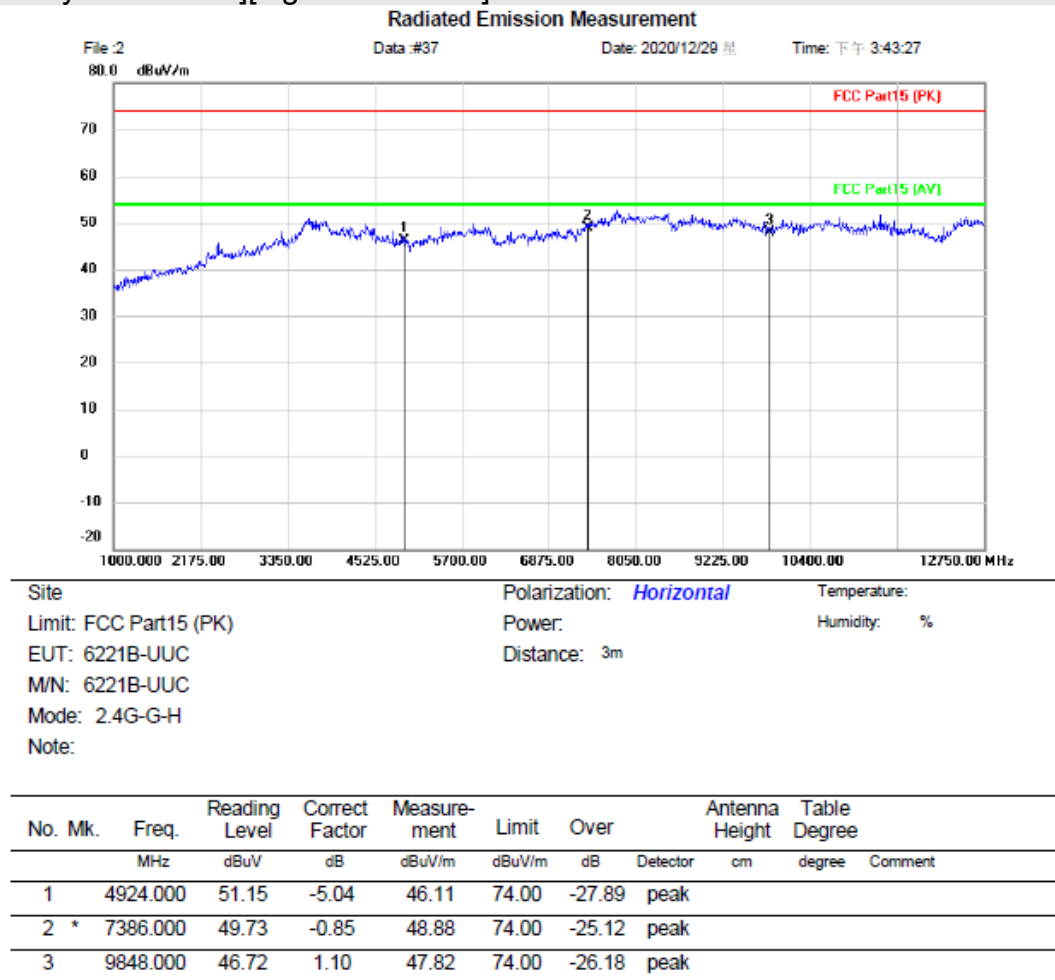

Test Result: Pass

[Polarity: Vertical] [highest channel]

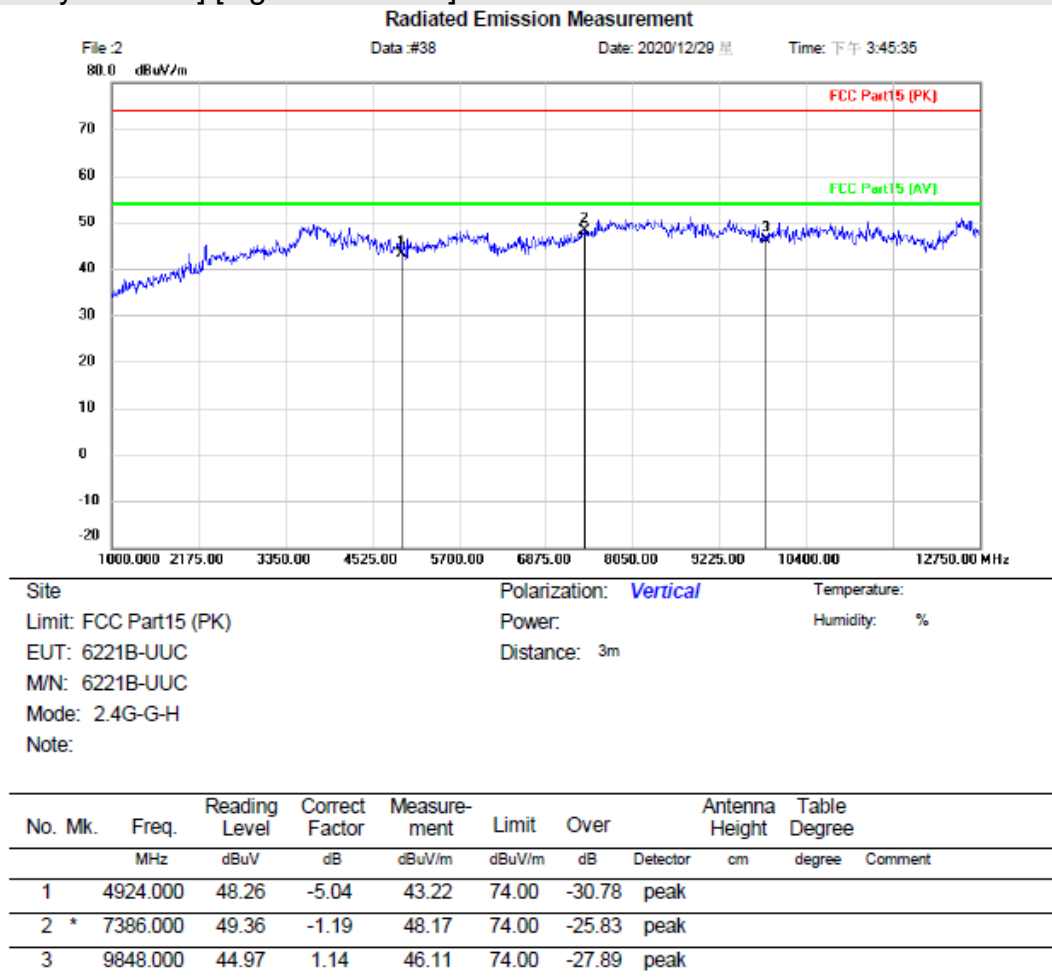

Test Result: Pass

2 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX Low channel;TX high channel
Test Mode (Final Test)	TX Low channel;TX high channel
Tester	Eason
Temperature	22℃
Humidity	50%

2.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

2.2 BLOCK DIAGRAM OF TEST SETUP

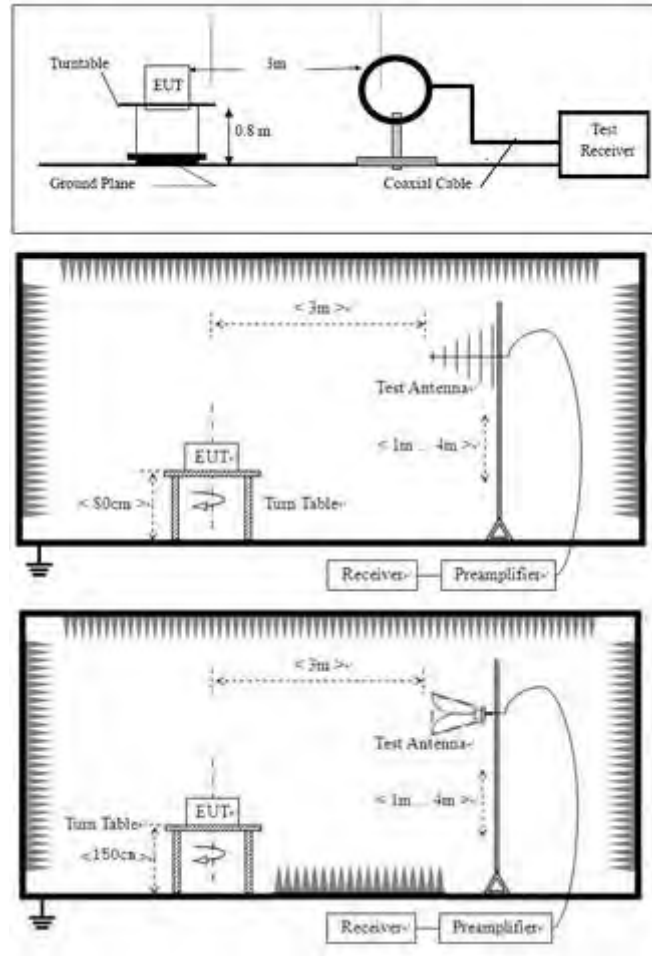

2.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

2.4 TEST DATA

802.11B:

[Polarity: Horizontal]

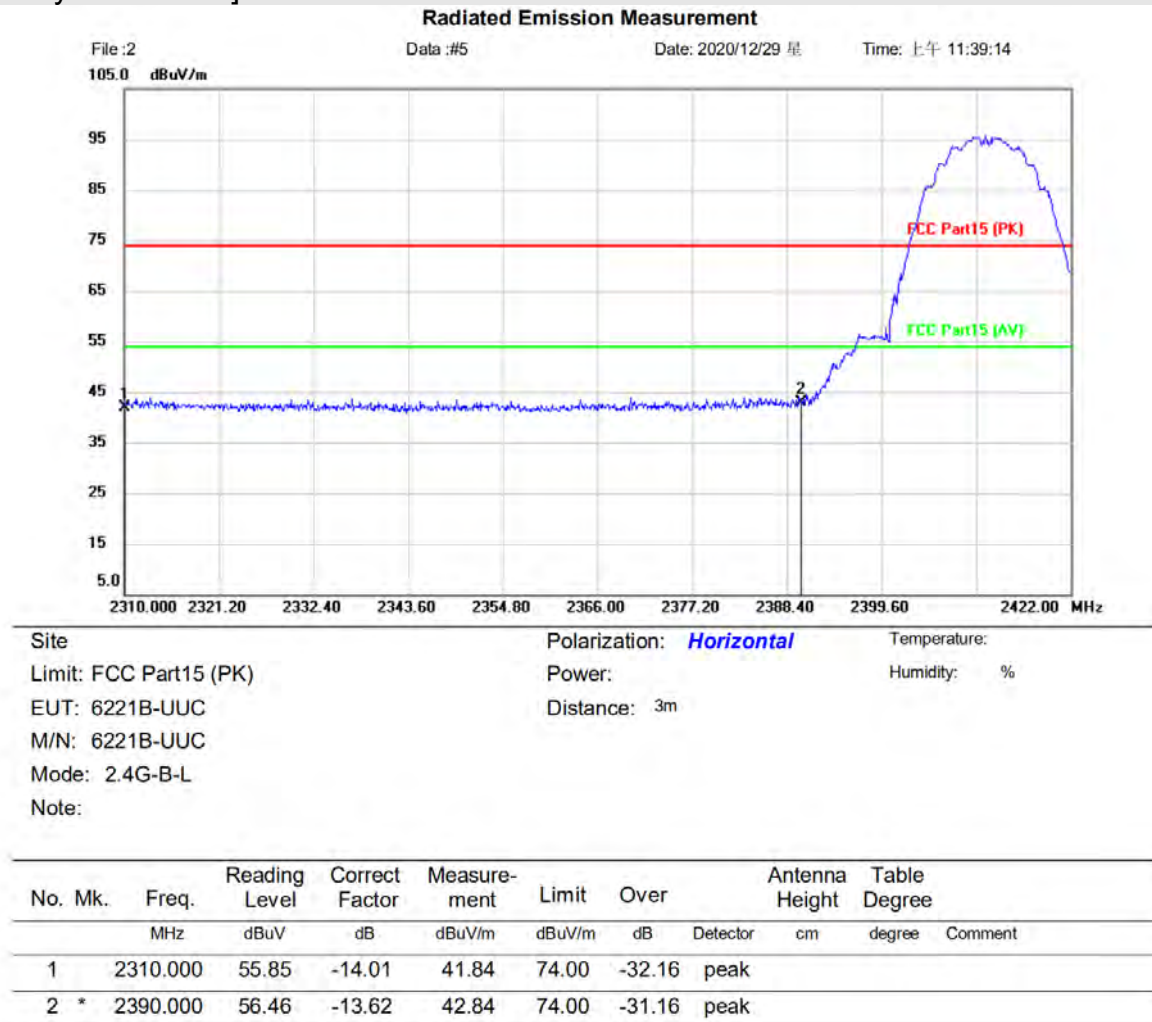


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[Polarity: Vertical]

Radiated Emission Measurement

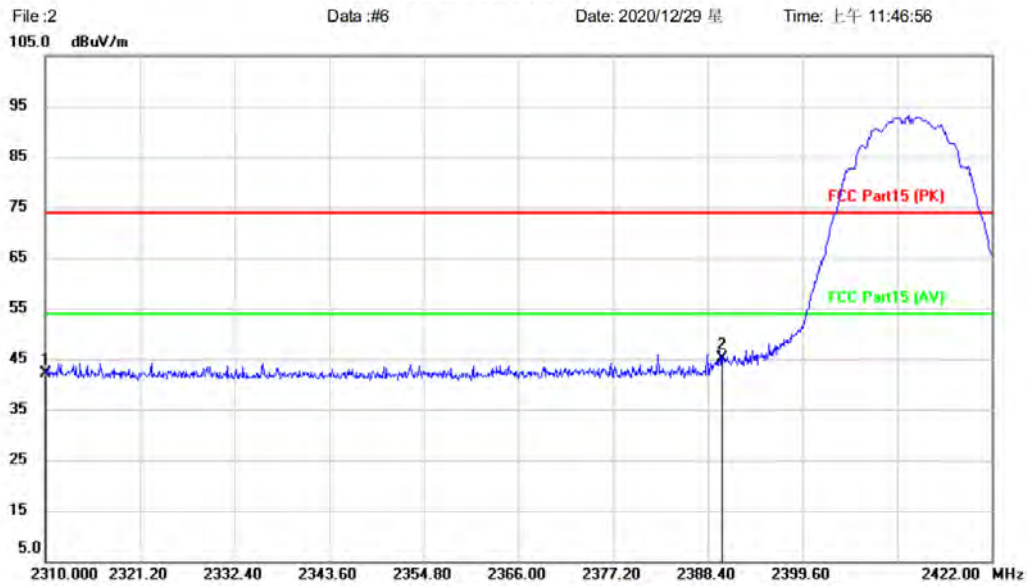

Site Limit: FCC Part15 (PK) Polarization: **Vertical** Temperature:
EUT: 6221B-UUC Power: Humidity: %
M/N: 6221B-UUC Distance: 3m
Mode: 2.4G-B-L
Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2310.000	56.54	-14.30	42.24	74.00	-31.76	peak		
2	*	2390.000	59.03	-13.95	45.08	74.00	-28.92	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Horizontal]

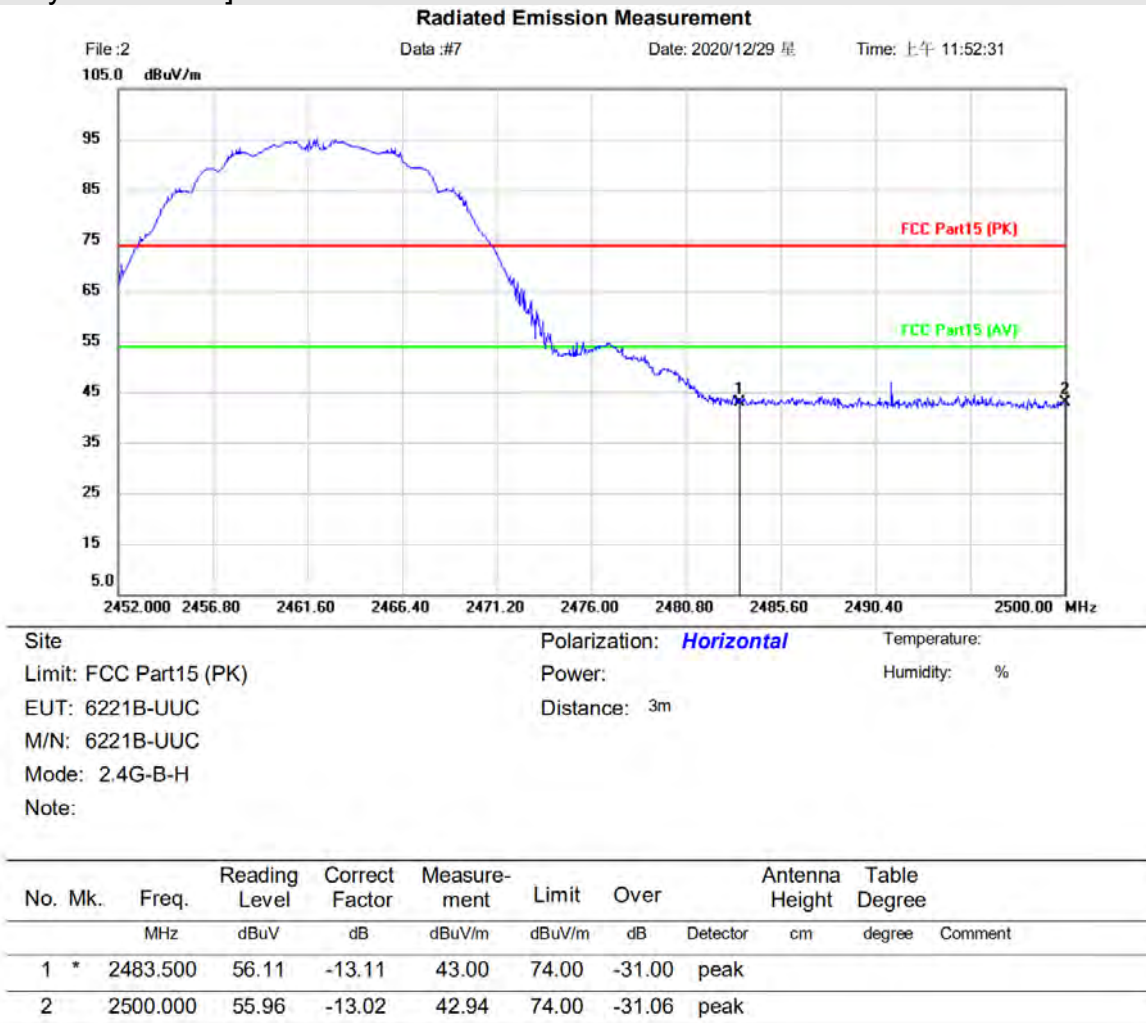


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Vertical]

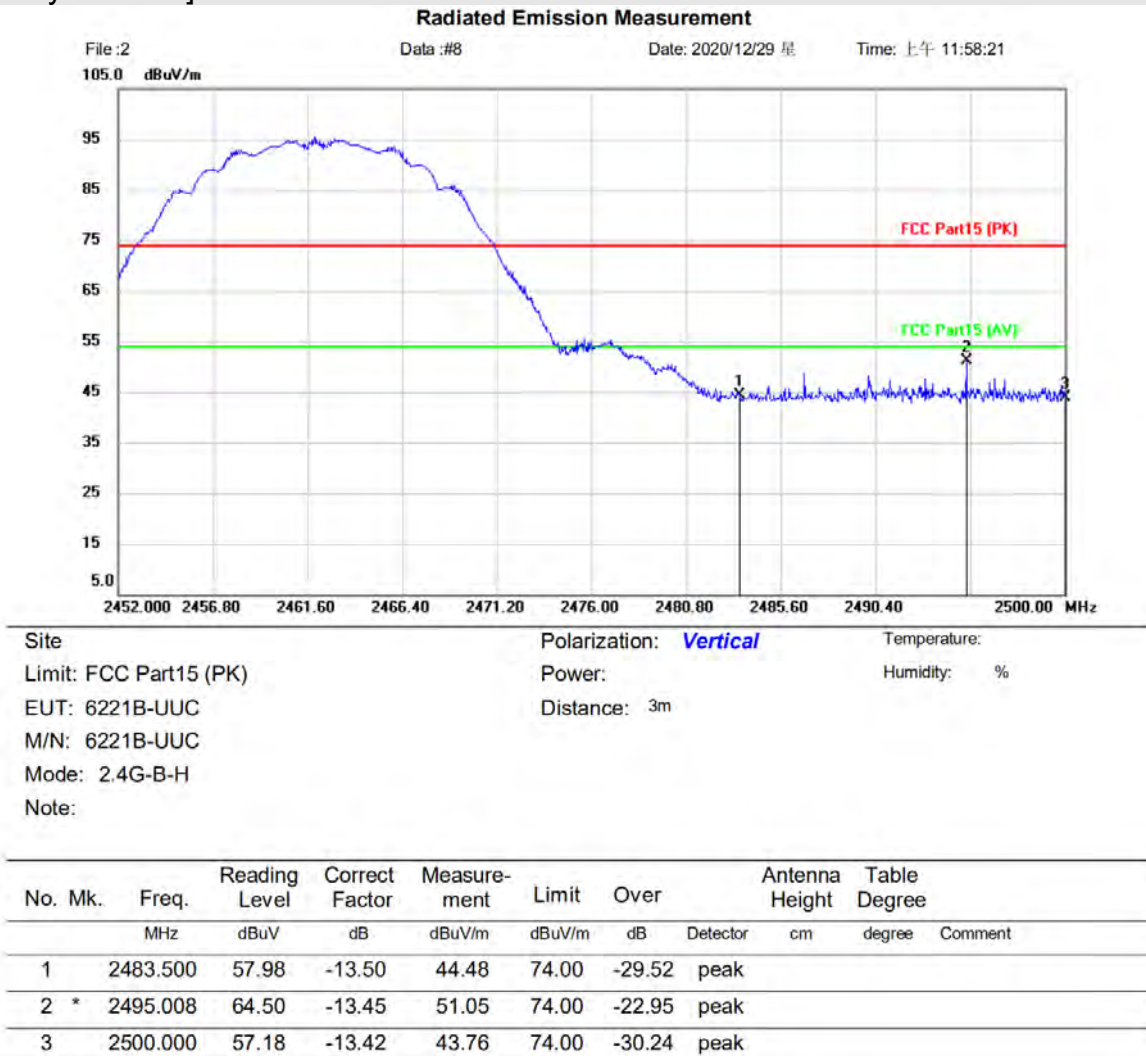


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

802.11G:

[Polarity: Horizontal]

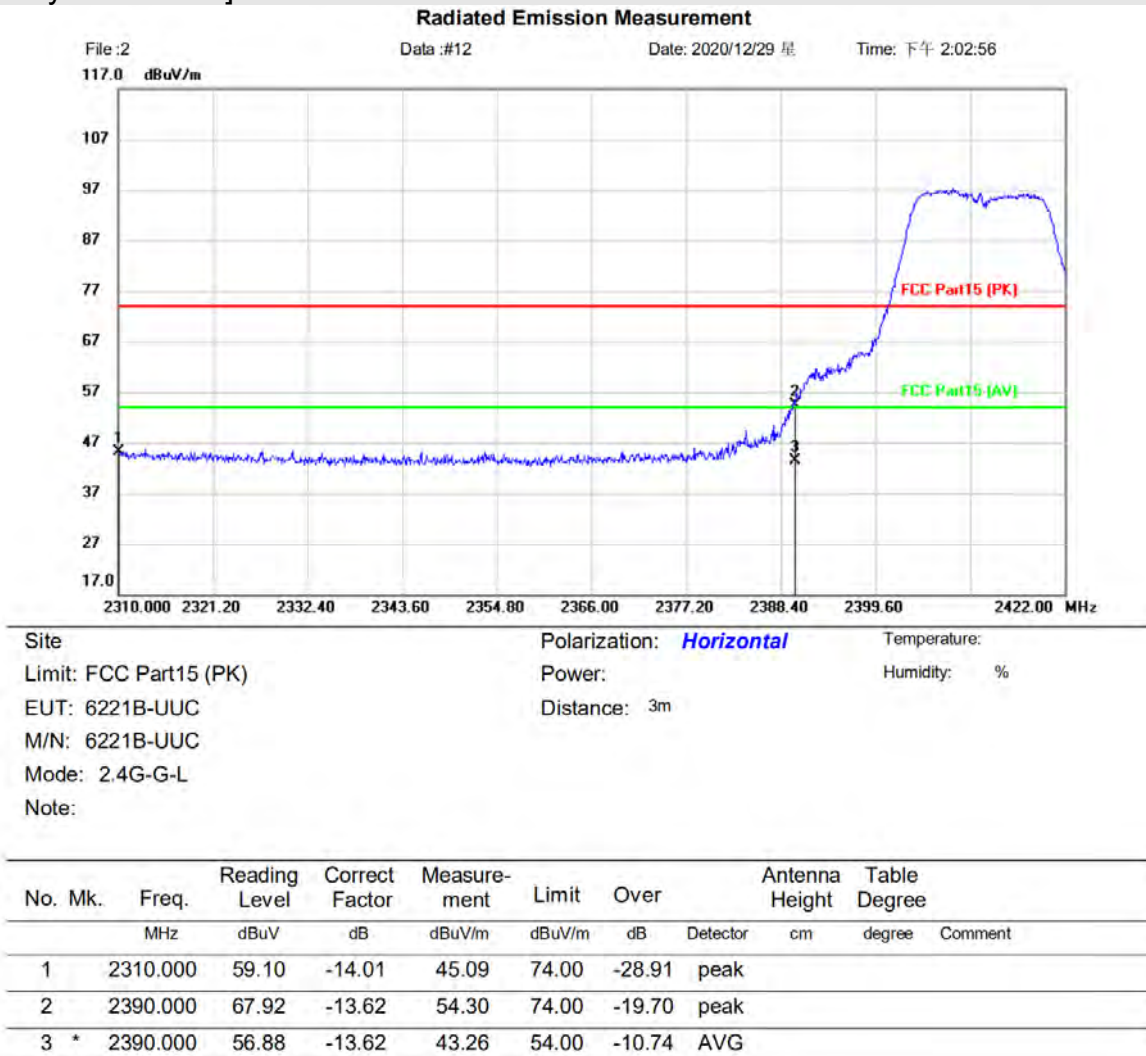


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Vertical]

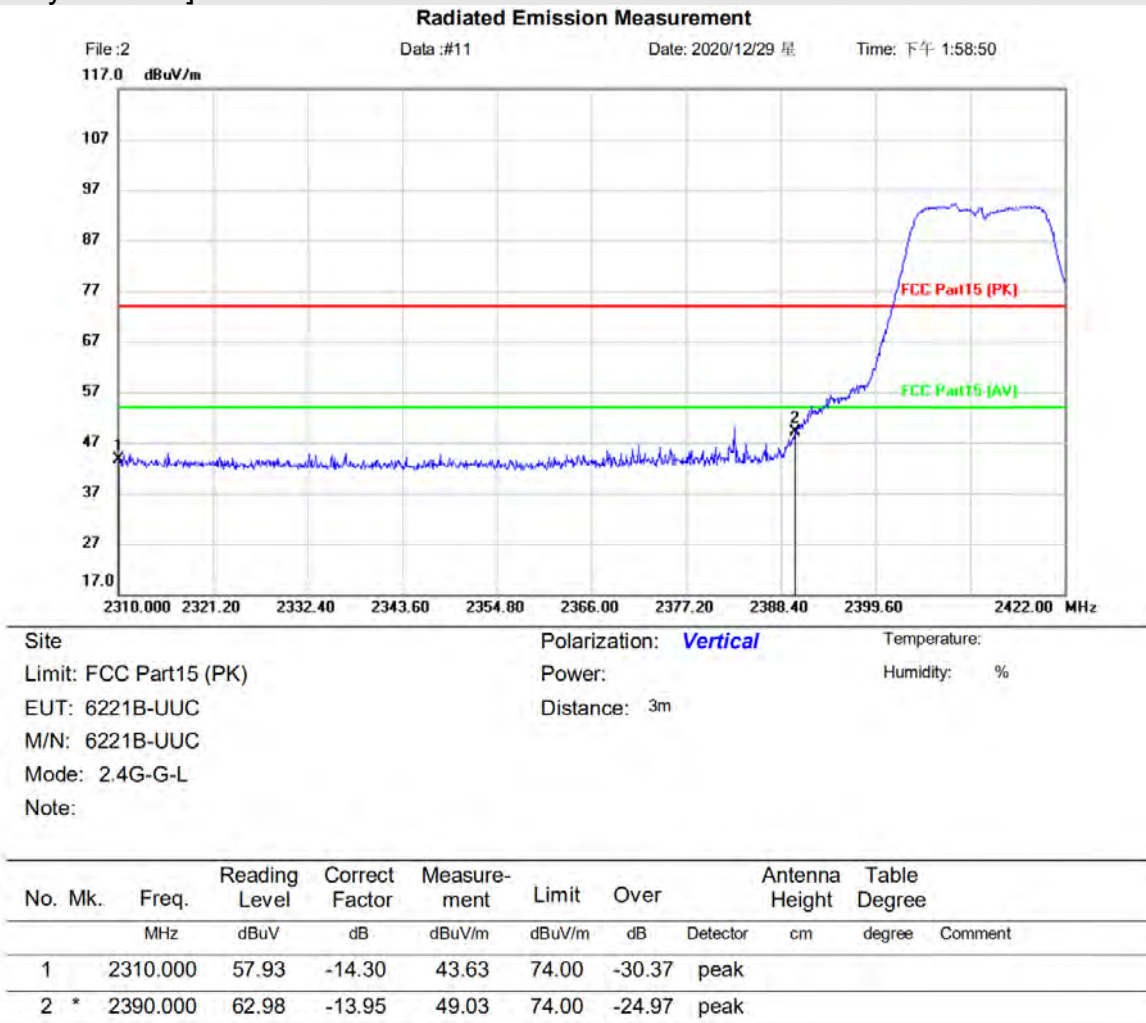


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[Polarity: Horizontal]

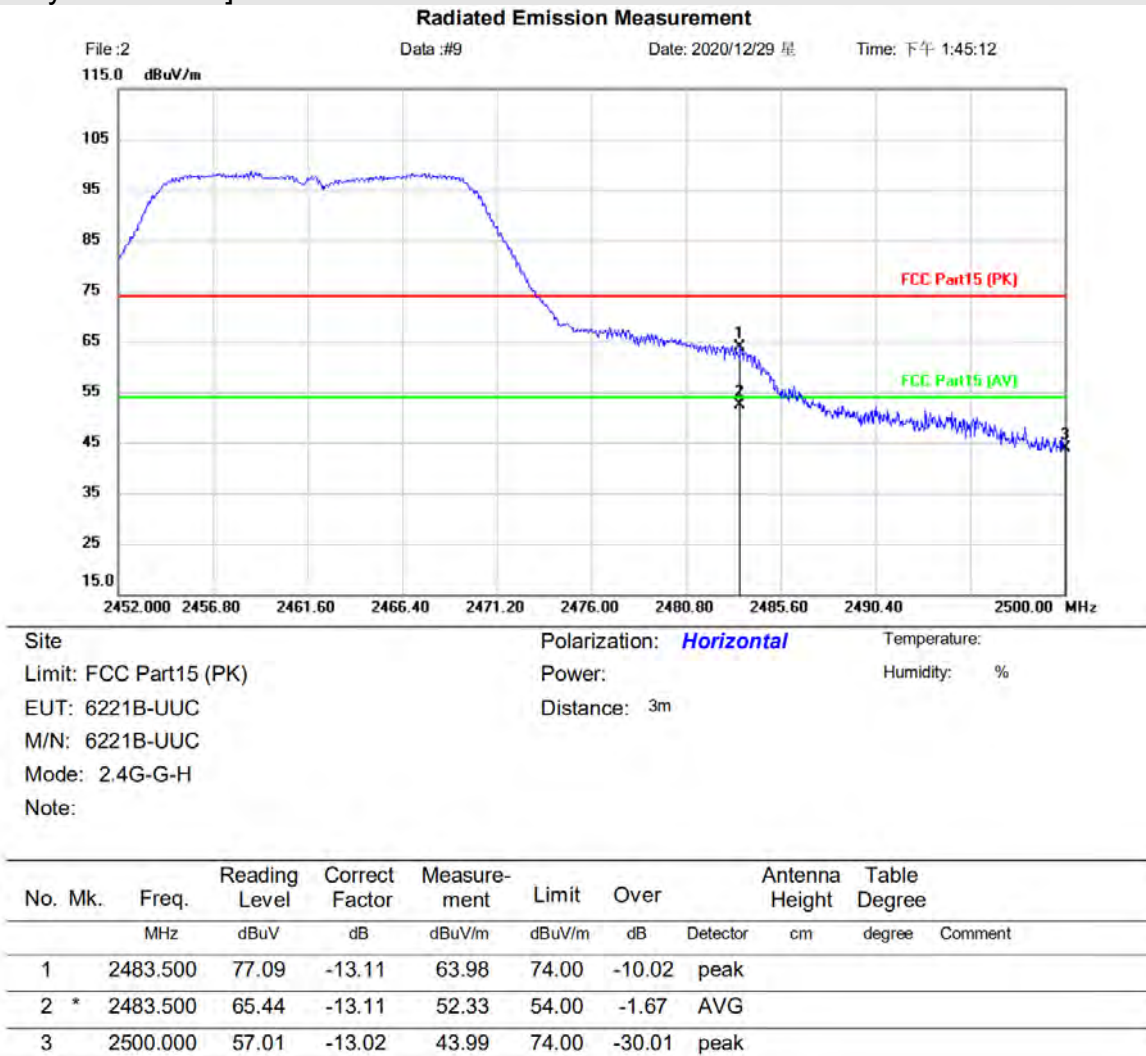


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[Polarity: Vertical]

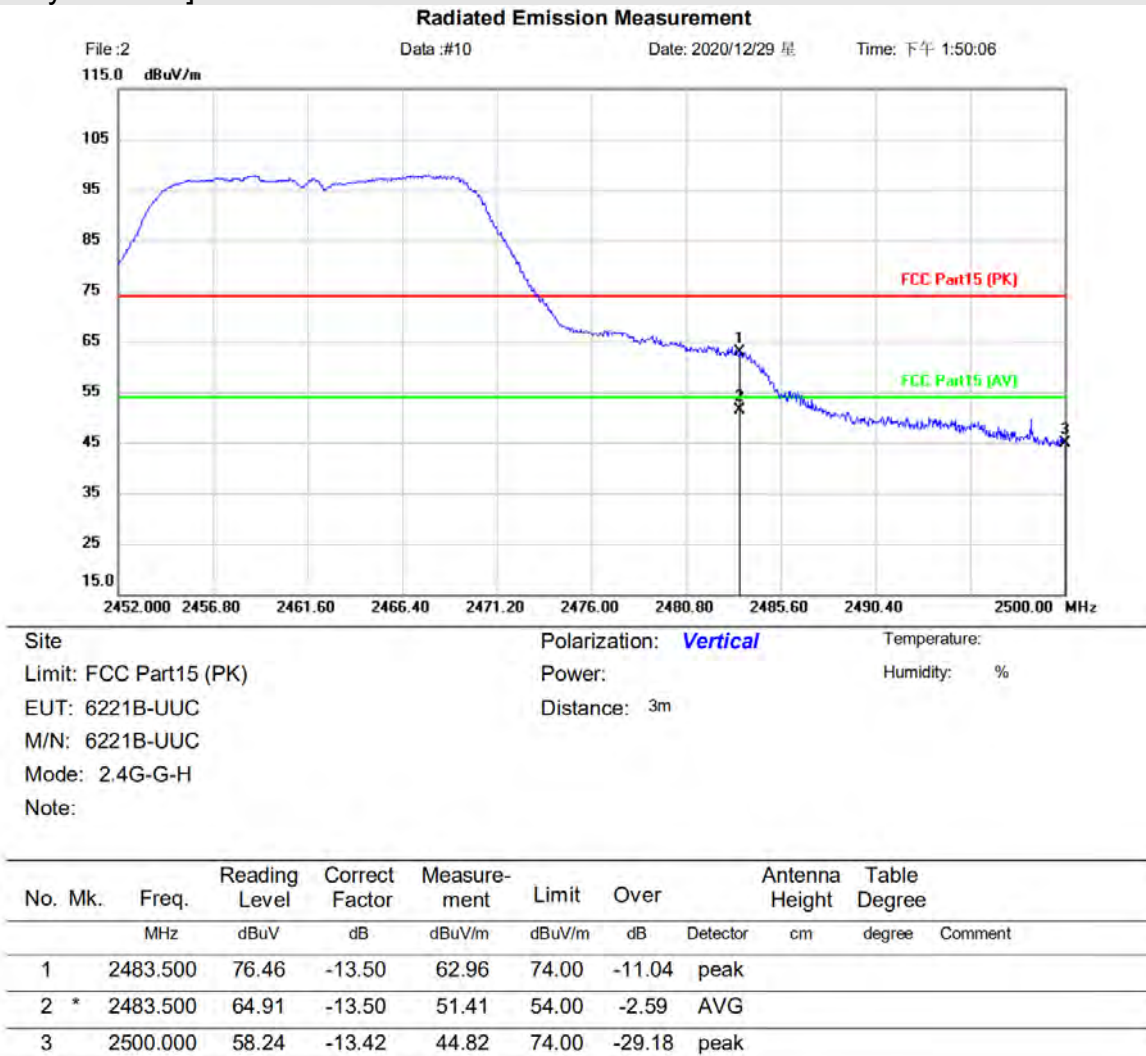


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

802.11N20:

[Polarity: Horizontal]

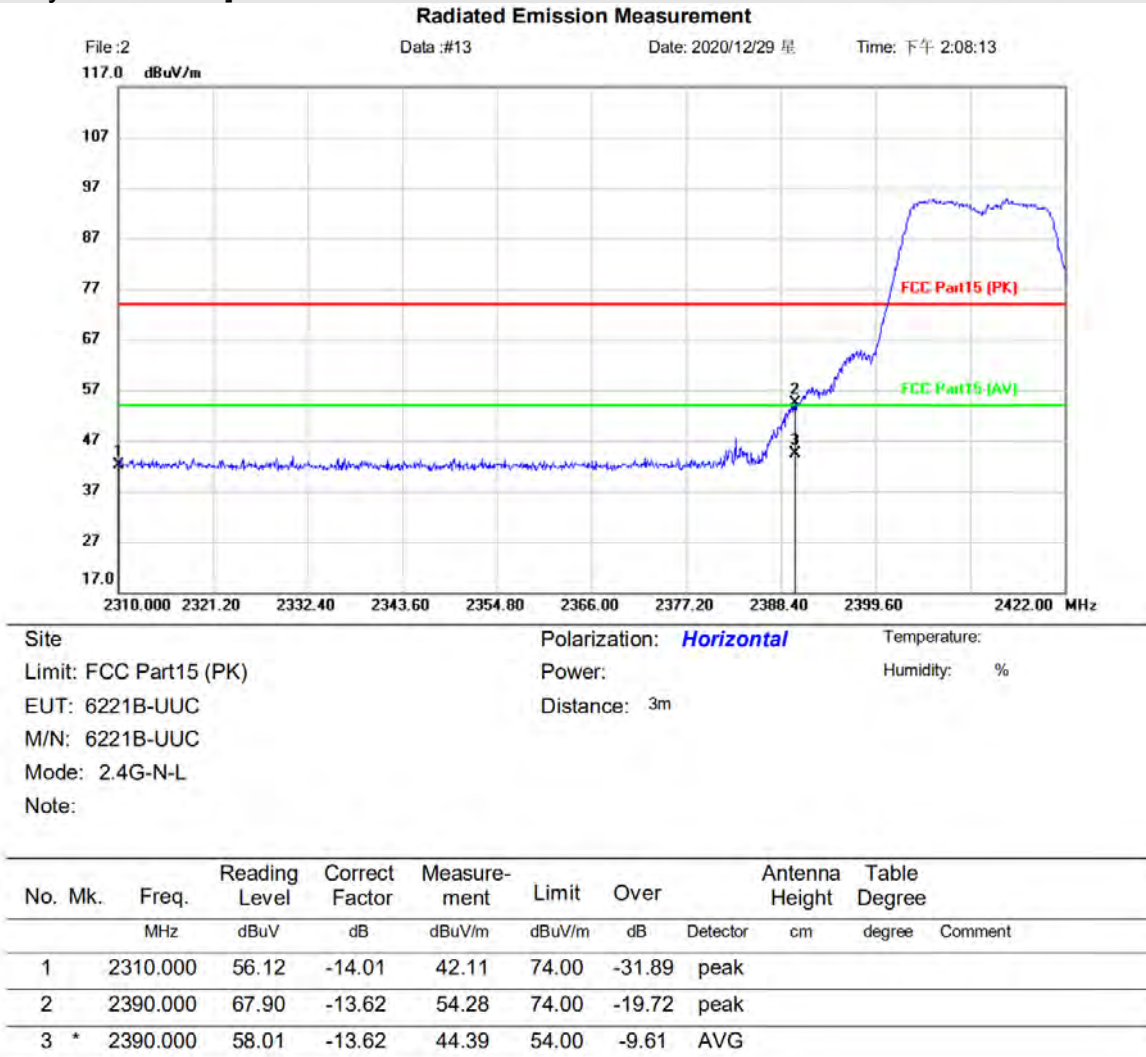


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Vertical]

Radiated Emission Measurement

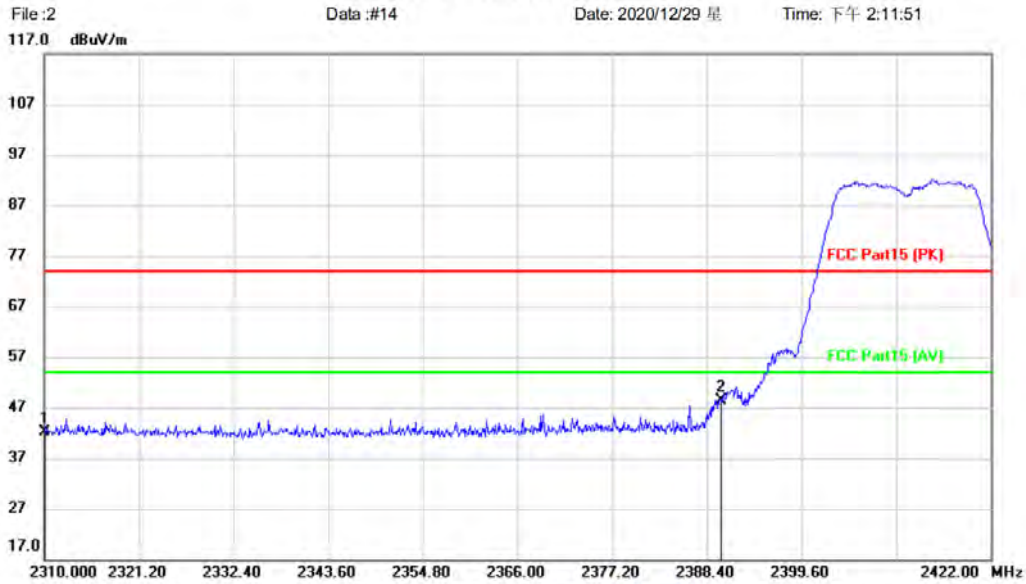

Site Limit: FCC Part15 (PK) Polarization: **Vertical** Temperature:
EUT: 6221B-UUC Power: Humidity: %
M/N: 6221B-UUC Distance: 3m
Mode: 2.4G-N-L
Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2310.000	56.54	-14.30	42.24	74.00	-31.76	peak		
2	*	2390.000	62.31	-13.95	48.36	74.00	-25.64	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Horizontal]

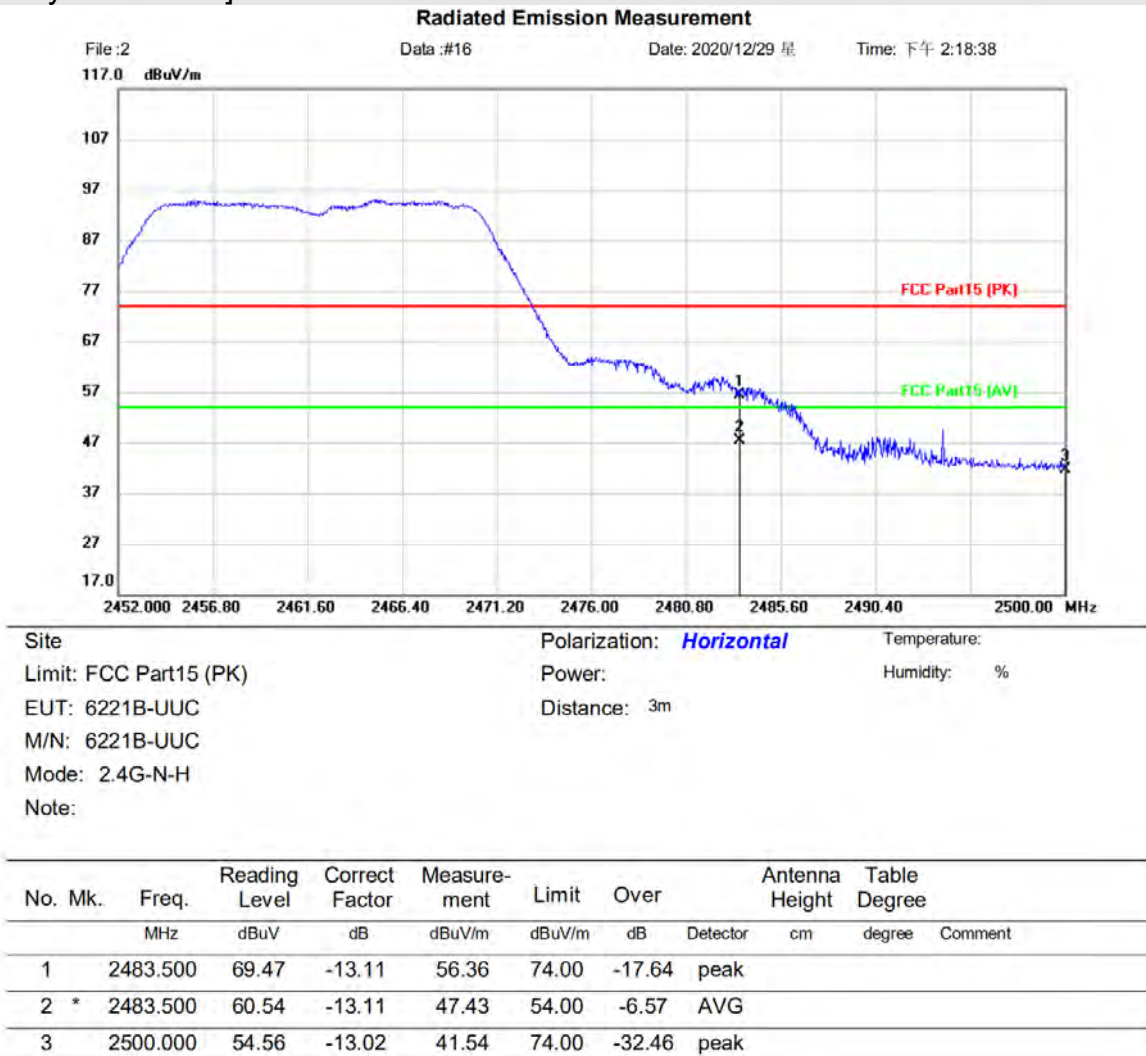


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Vertical]

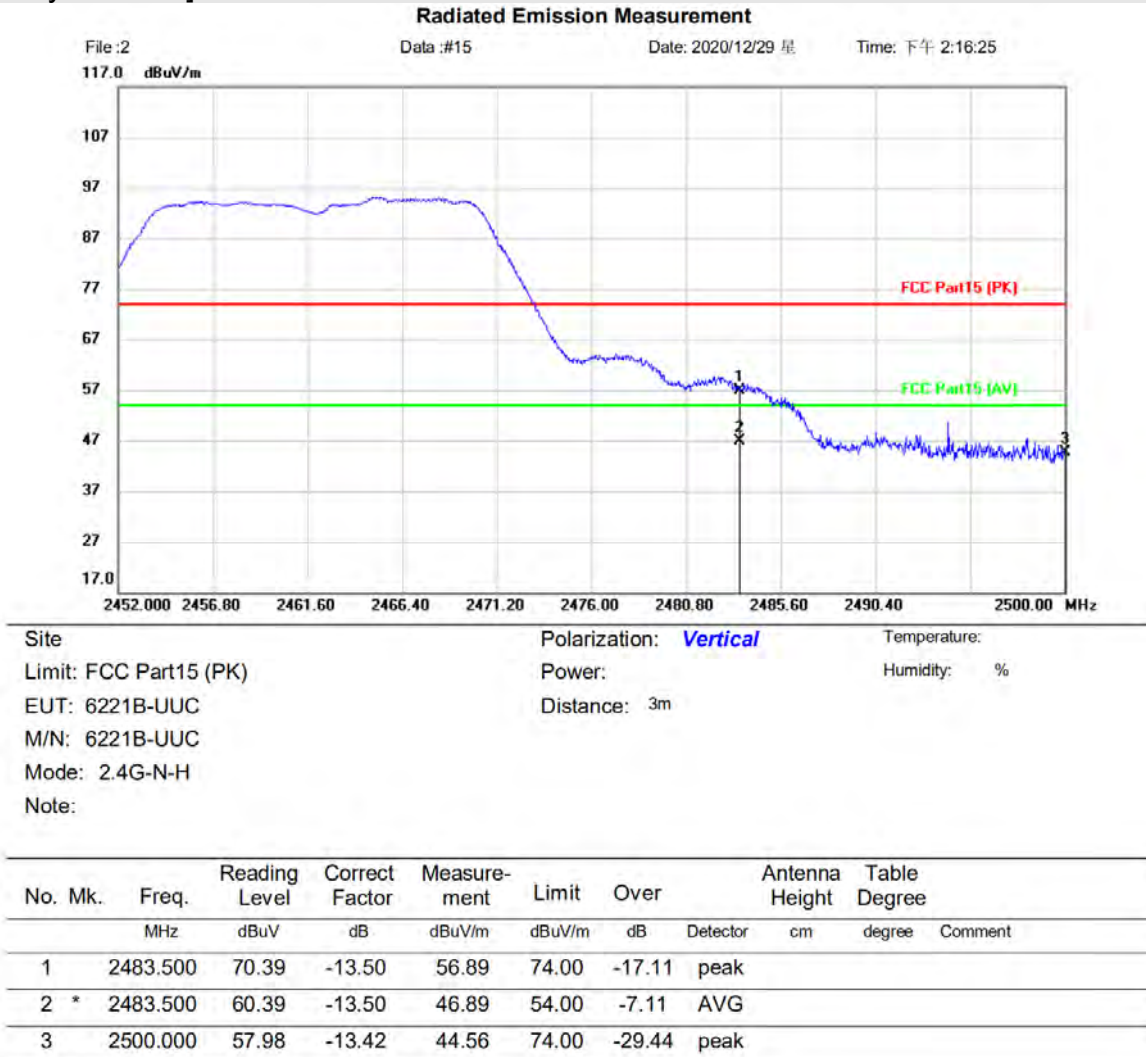


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

802.11N40

[Polarity: Horizontal]

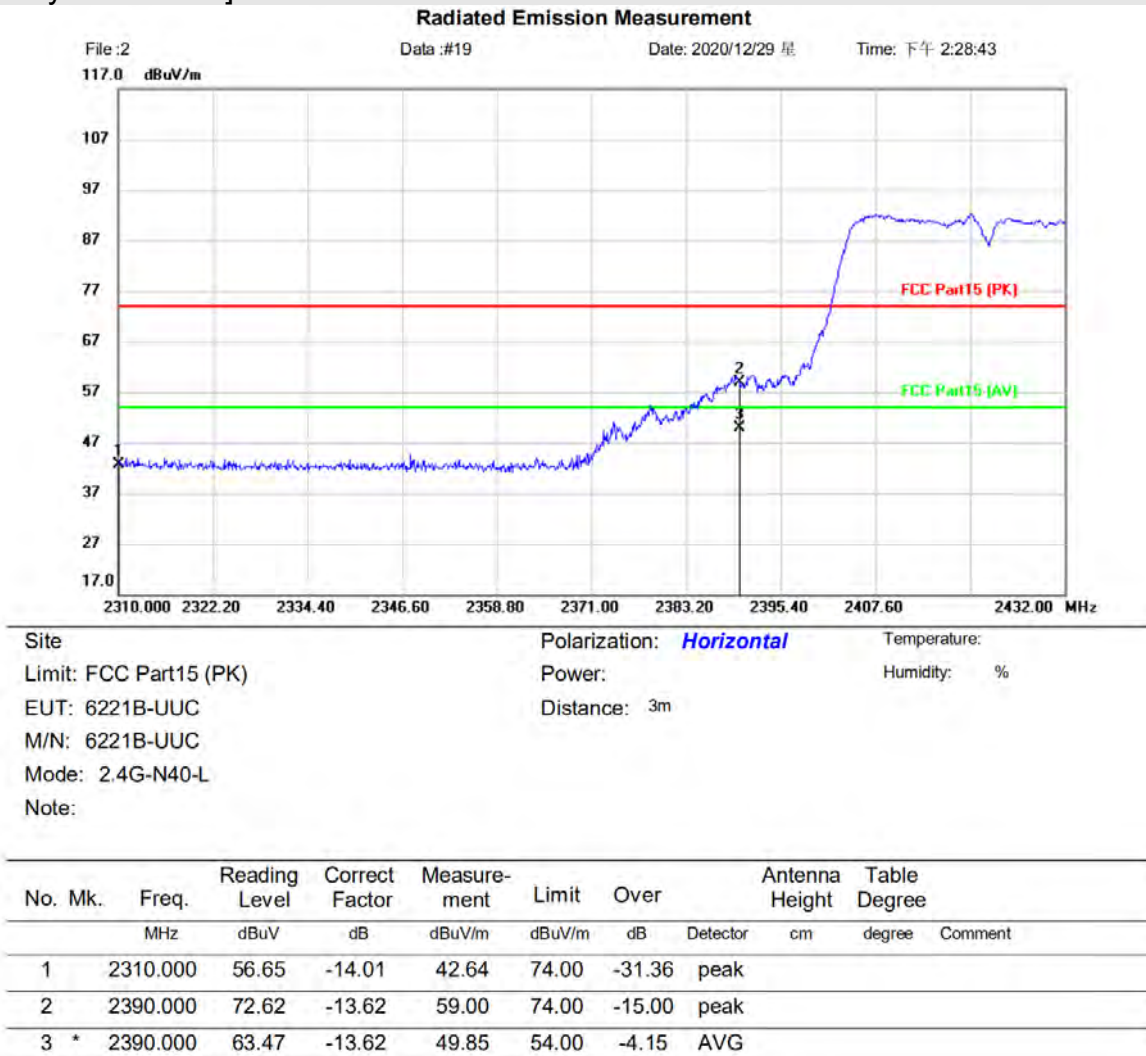


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Vertical]

Radiated Emission Measurement

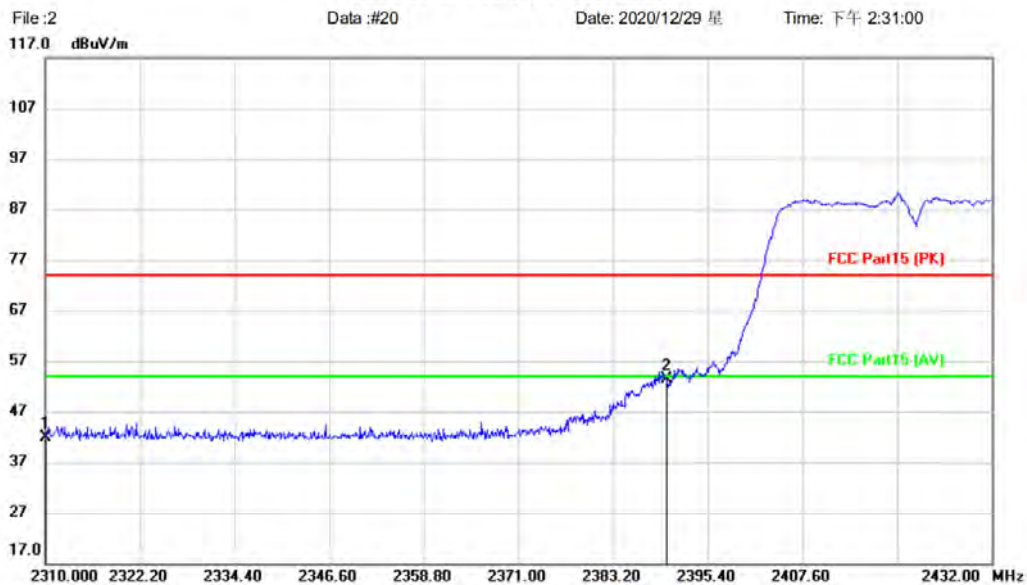

Site
Limit: FCC Part15 (PK)
EUT: 6221B-UUC
M/N: 6221B-UUC
Mode: 2.4G-N40-L
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature:
Humidity: %


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2310.000	56.24	-14.30	41.94	74.00	-32.06	peak			
2	*	2390.000	67.32	-13.95	53.37	74.00	-20.63	peak			

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Horizontal]

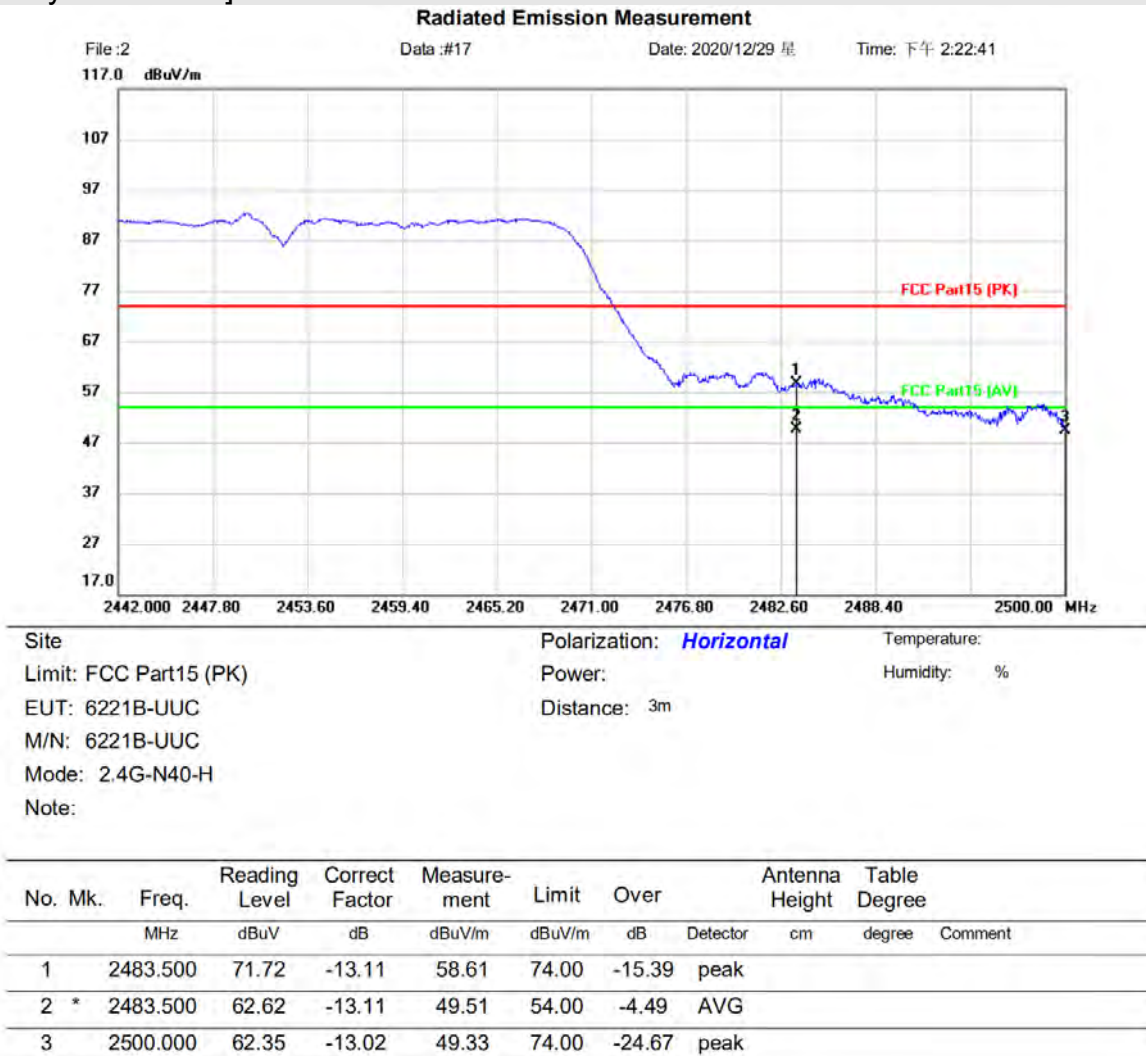


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[Polarity: Vertical]

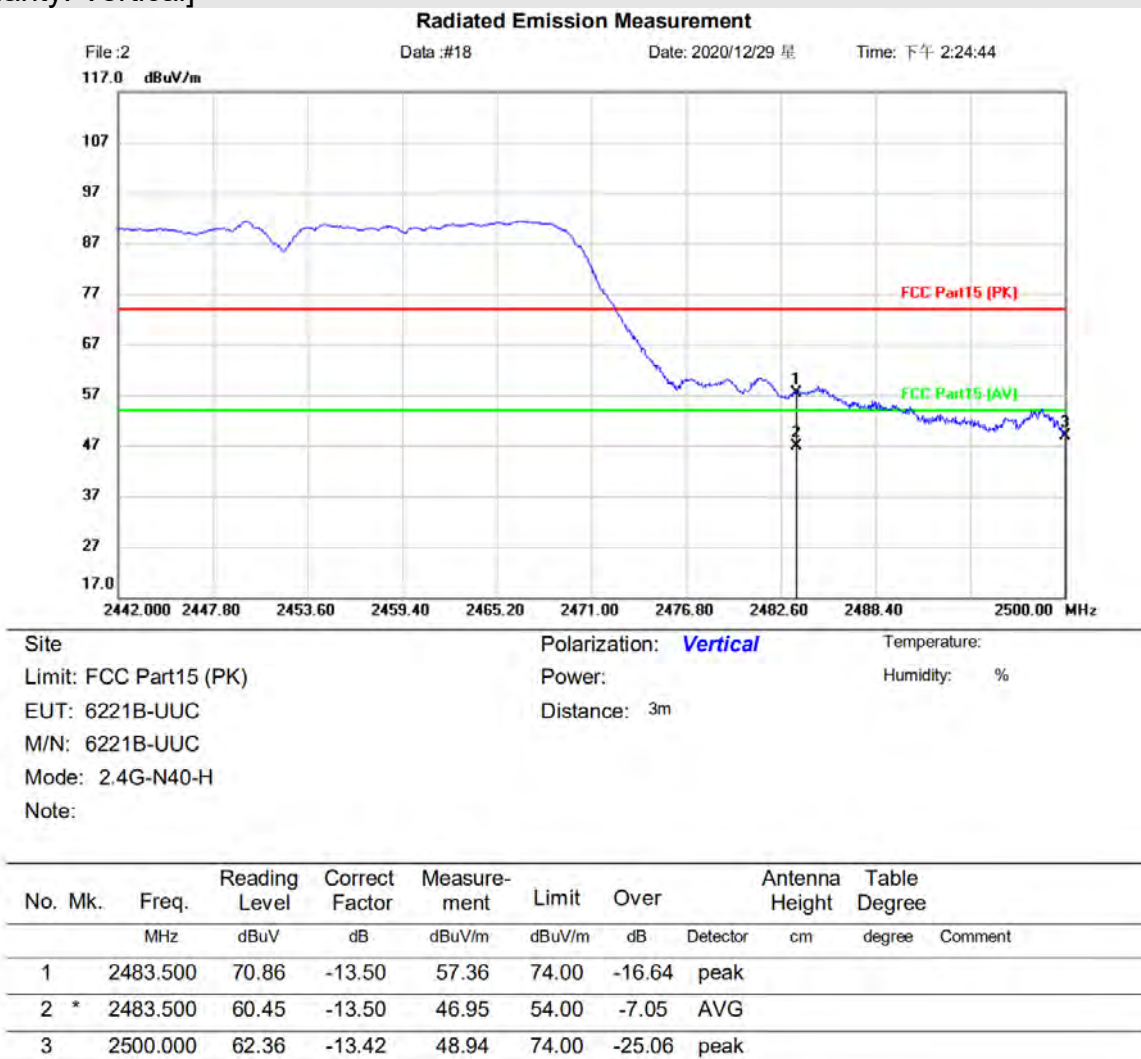

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


3 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	22℃
Humidity	50%

3.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

3.2 BLOCK DIAGRAM OF TEST SETUP

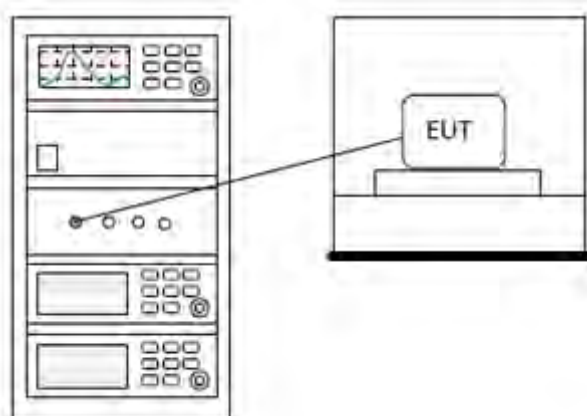

3.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


4 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	22°C
Humidity	50%

4.1 LIMITS

Limit:	≥ 500 kHz
---------------	----------------

4.2 BLOCK DIAGRAM OF TEST SETUP

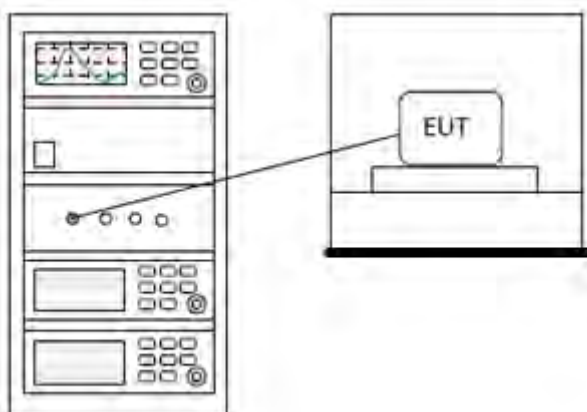

4.3 TEST DATA

Pass: Please Refer To Appendix: For Details


5 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	22°C
Humidity	50%

5.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

5.2 BLOCK DIAGRAM OF TEST SETUP

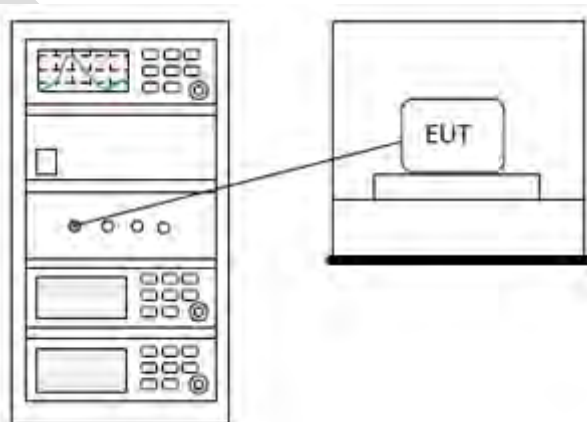

5.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia

6 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	22°C
Humidity	50%

6.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

6.2 BLOCK DIAGRAM OF TEST SETUP

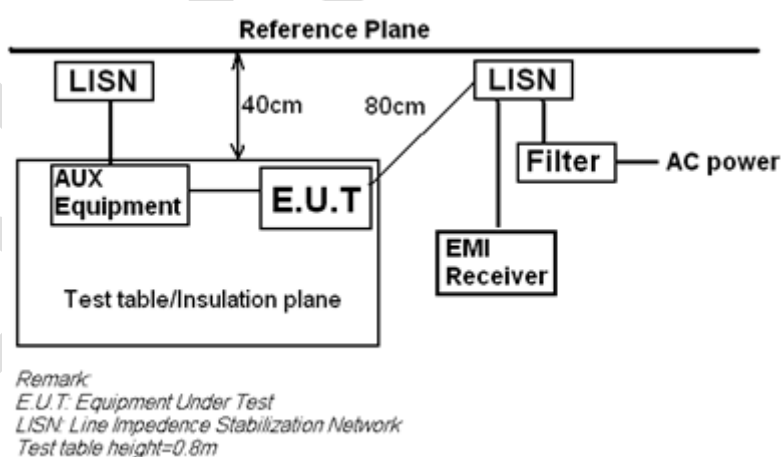

6.3 PROCEDURE


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50?H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $LISN = Read\ Level + Cable\ Loss + LISN\ Factor$

6.4 TEST DATA

[Line: Line][Power: AC120V/60Hz]

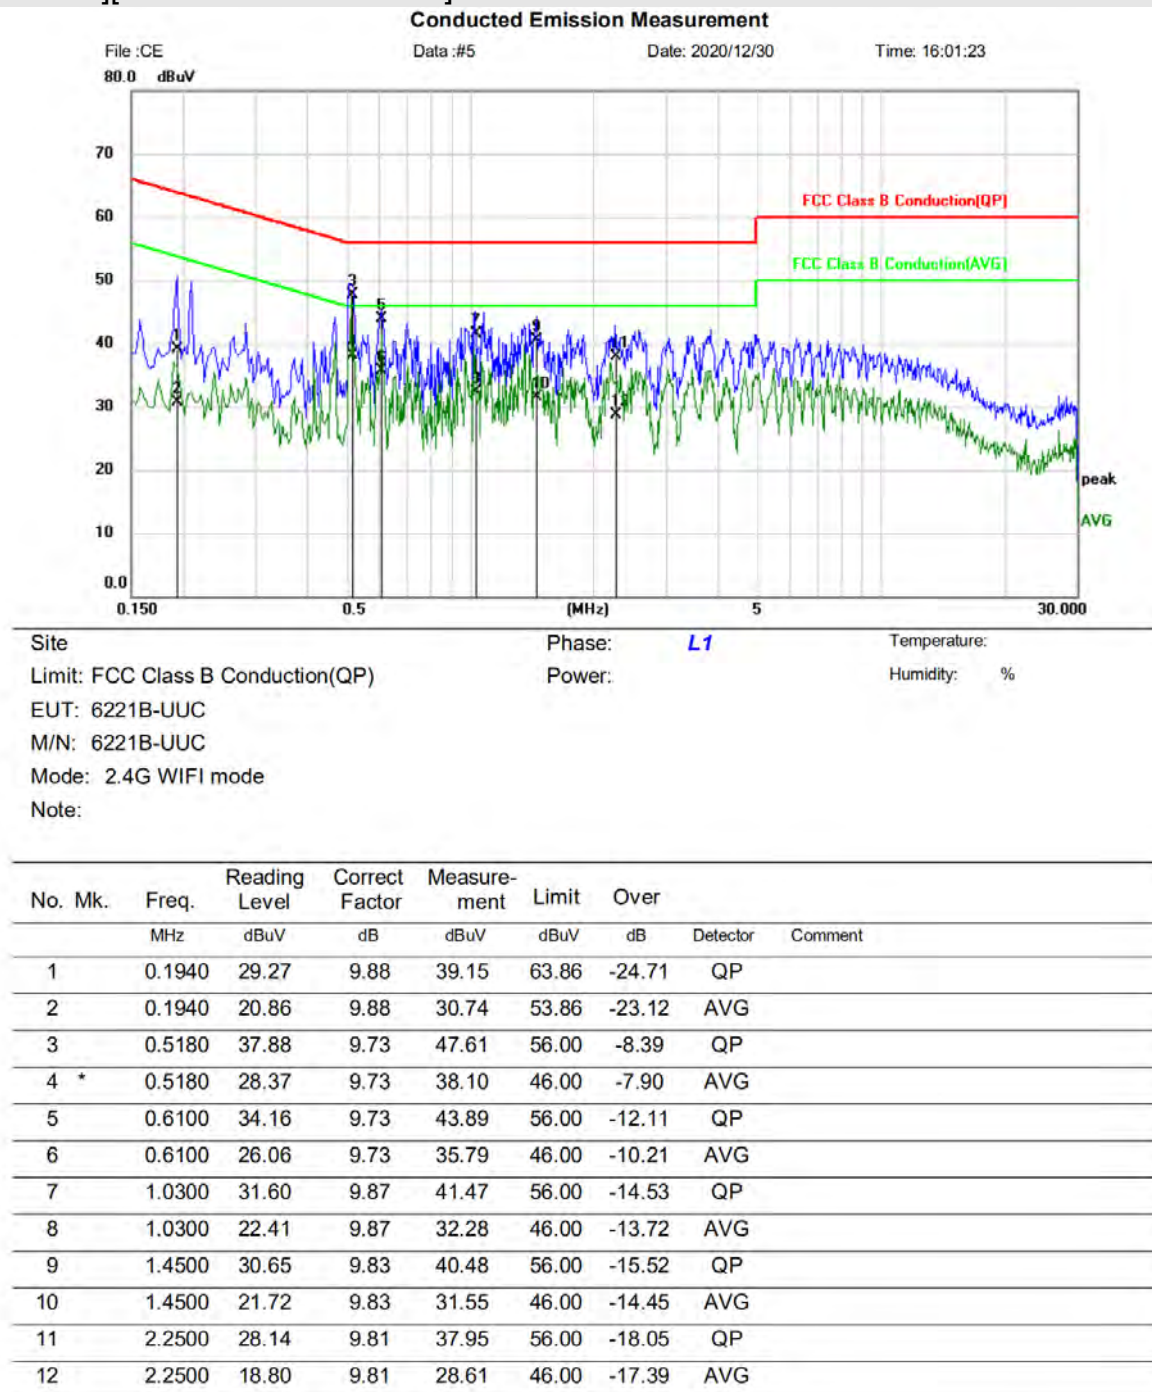


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Line: Nutral] [Power: AC120V/60Hz]

Conducted Emission Measurement

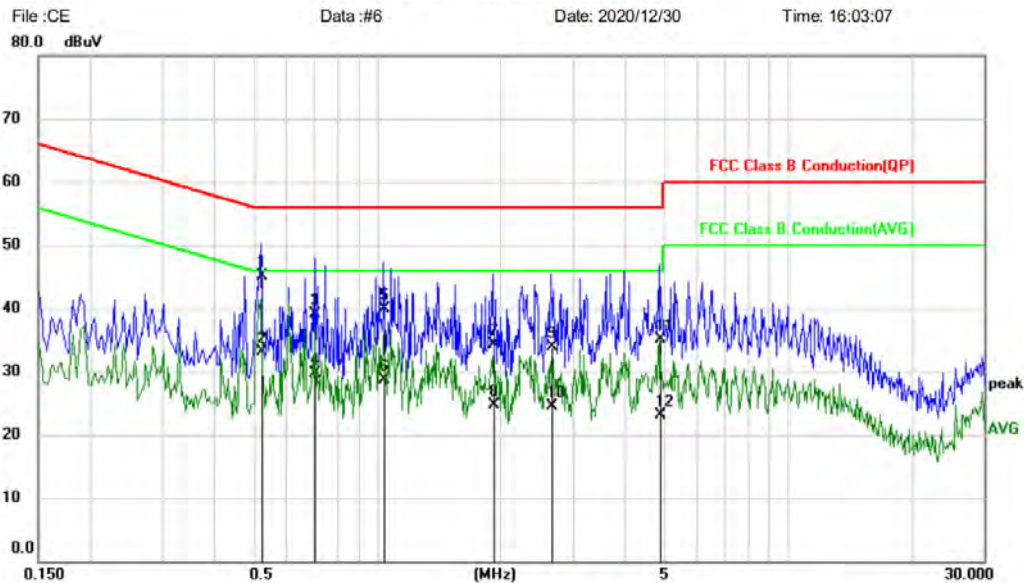

Site: Limit: FCC Class B Conduction(QP) Phase: **N** Temperature:
EUT: 6221B-UUC Power: Humidity: %
M/N: 6221B-UUC
Mode: 2.4G WIFI mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.5220	35.37	9.72	45.09	56.00	-10.91	QP	
2		0.5220	23.42	9.72	33.14	46.00	-12.86	AVG	
3		0.7060	29.39	9.74	39.13	56.00	-16.87	QP	
4		0.7060	20.04	9.74	29.78	46.00	-16.22	AVG	
5		1.0420	30.19	9.79	39.98	56.00	-16.02	QP	
6		1.0420	18.96	9.79	28.75	46.00	-17.25	AVG	
7		1.9260	24.41	9.86	34.27	56.00	-21.73	QP	
8		1.9260	14.78	9.86	24.64	46.00	-21.36	AVG	
9		2.6580	24.03	9.88	33.91	56.00	-22.09	QP	
10		2.6580	14.56	9.88	24.44	46.00	-21.56	AVG	
11		4.8740	25.23	9.90	35.13	56.00	-20.87	QP	
12		4.8740	13.26	9.90	23.16	46.00	-22.84	AVG	

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

7 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


7.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.0dBi.

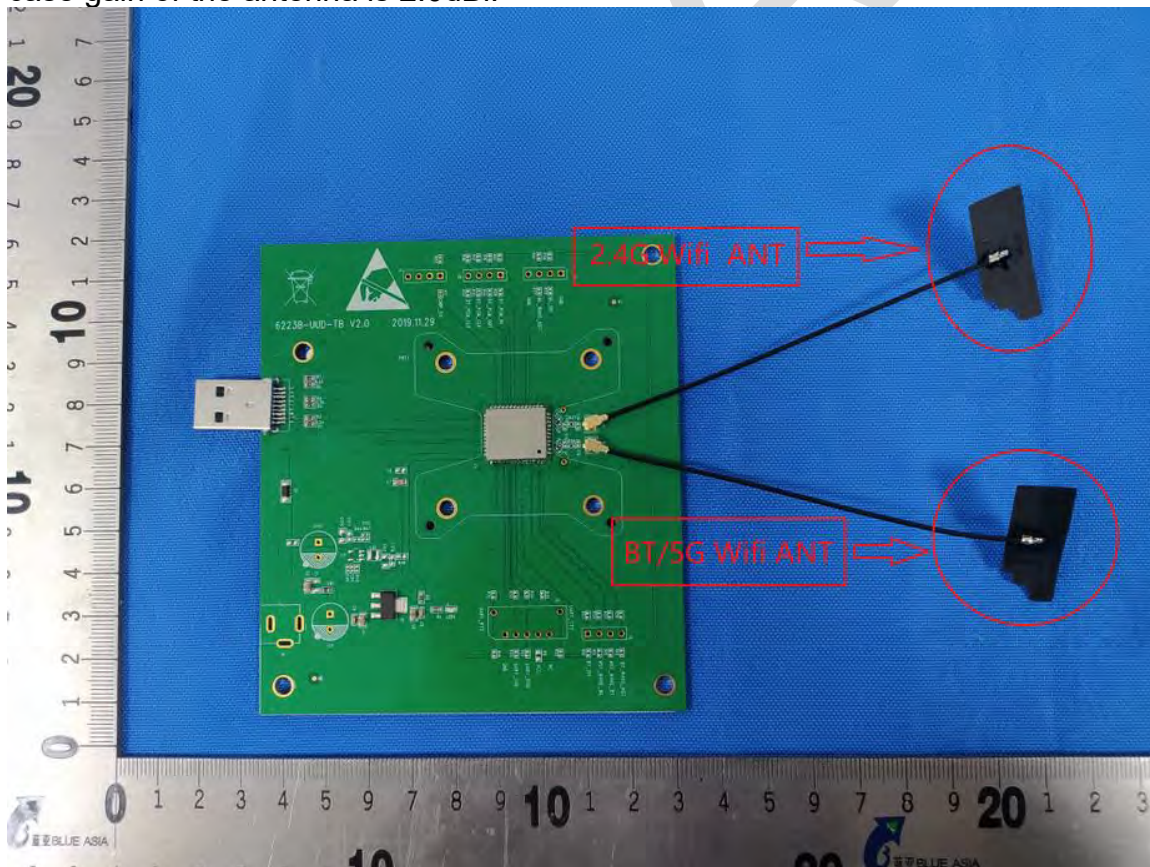


8 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	22°C
Humidity	50%

8.1 LIMITS

Limit:	$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission
---------------	--

8.2 BLOCK DIAGRAM OF TEST SETUP

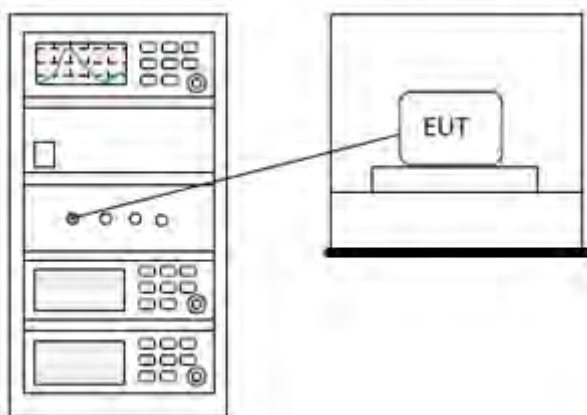

8.3 TEST DATA

Pass: Please Refer To Appendix: For Details

10 APPENDIX

10.1 APPENDIX A: DTS BANDWIDTH

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.120	2406.960	2417.080	≥ 0.5	PASS
		2437	10.120	2431.960	2442.080	≥ 0.5	PASS
		2462	10.160	2456.920	2467.080	≥ 0.5	PASS
11G	Ant1	2412	16.400	2403.800	2420.200	≥ 0.5	PASS
		2437	16.440	2428.760	2445.200	≥ 0.5	PASS
		2462	16.400	2453.800	2470.200	≥ 0.5	PASS
11N20SISO	Ant1	2412	17.000	2403.560	2420.560	≥ 0.5	PASS
		2437	17.120	2428.440	2445.560	≥ 0.5	PASS
		2462	17.080	2453.480	2470.560	≥ 0.5	PASS
11N40SISO	Ant1	2422	35.360	2404.320	2439.680	≥ 0.5	PASS
		2437	35.680	2419.000	2454.680	≥ 0.5	PASS
		2452	35.520	2434.160	2469.680	≥ 0.5	PASS

Test Graphs

11B Ant1 2412



11B Ant1 2437



11B Ant1 2462



11G Ant1 2412







10.2 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH

Test Result


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	14.948	2404.525	2419.473	---	PASS
		2437	14.976	2429.463	2444.439	---	PASS
		2462	14.961	2454.498	2469.459	---	PASS
11G	Ant1	2412	16.972	2403.556	2420.528	---	PASS
		2437	16.965	2428.511	2445.476	---	PASS
		2462	16.956	2453.516	2470.472	---	PASS
11N20SISO	Ant1	2412	17.920	2403.049	2420.969	---	PASS
		2437	17.927	2428.001	2445.928	---	PASS
		2462	17.909	2453.019	2470.928	---	PASS
11N40SISO	Ant1	2422	36.531	2403.810	2440.341	---	PASS
		2437	36.498	2418.727	2455.225	---	PASS
		2452	36.353	2433.782	2470.135	---	PASS

Test Graphs







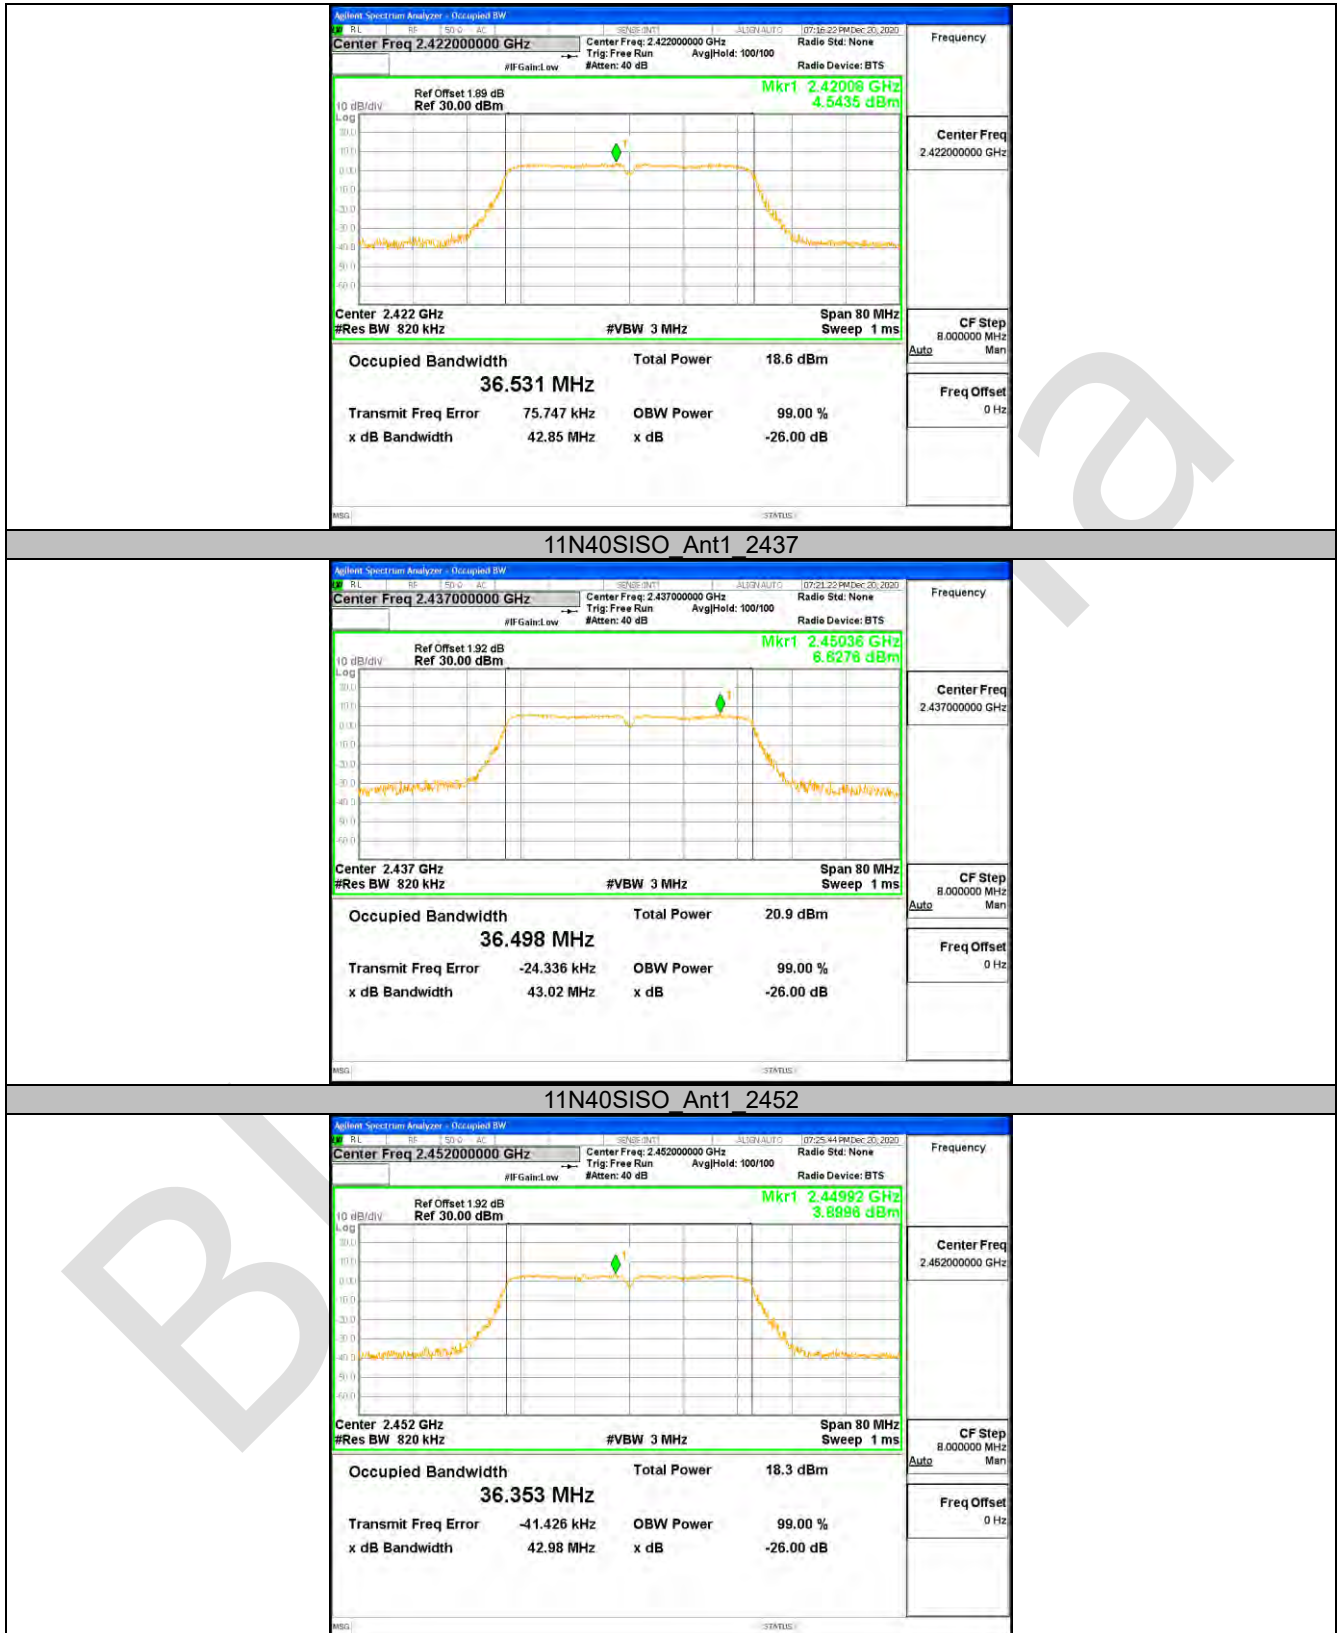


10.3 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	12.75	<=30	PASS
		2437	12.98	<=30	PASS
		2462	12.54	<=30	PASS
11G	Ant1	2412	13.77	<=30	PASS
		2437	13.94	<=30	PASS
		2462	13.26	<=30	PASS
11N20SISO	Ant1	2412	11.81	<=30	PASS
		2437	13.84	<=30	PASS
		2462	12.24	<=30	PASS
11N40SISO	Ant1	2422	11.82	<=30	PASS
		2437	14.02	<=30	PASS
		2452	11.46	<=30	PASS

Test Graphs



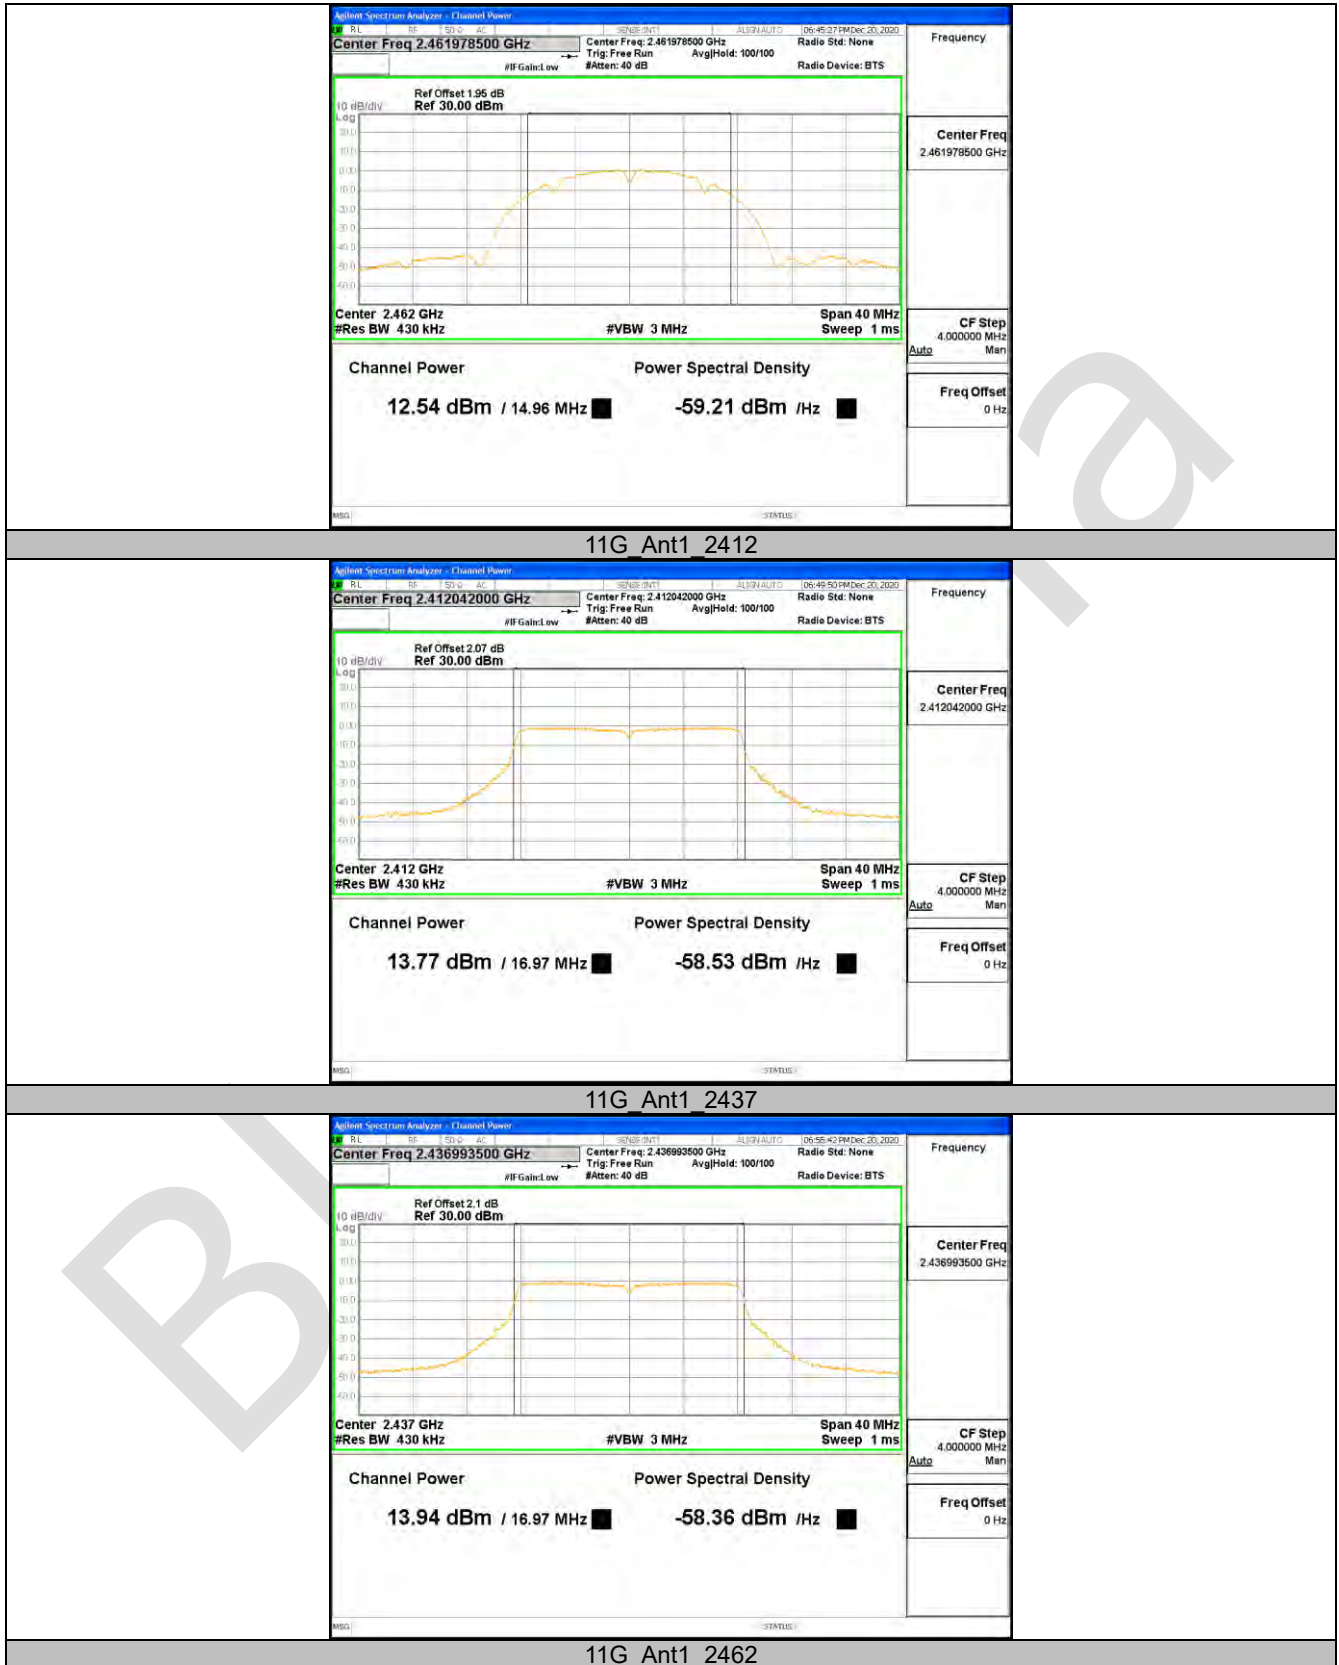








10.4 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY


Test Result


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-14.59	<=8	PASS
		2437	-14.04	<=8	PASS
		2462	-14.1	<=8	PASS
11G	Ant1	2412	-14.37	<=8	PASS
		2437	-14.29	<=8	PASS
		2462	-14.3	<=8	PASS
11N20SISO	Ant1	2412	-15.72	<=8	PASS
		2437	-13.3	<=8	PASS
		2462	-14.52	<=8	PASS
11N40SISO	Ant1	2422	-18.3	<=8	PASS
		2437	-15.86	<=8	PASS
		2452	-18.58	<=8	PASS


Test Graphs



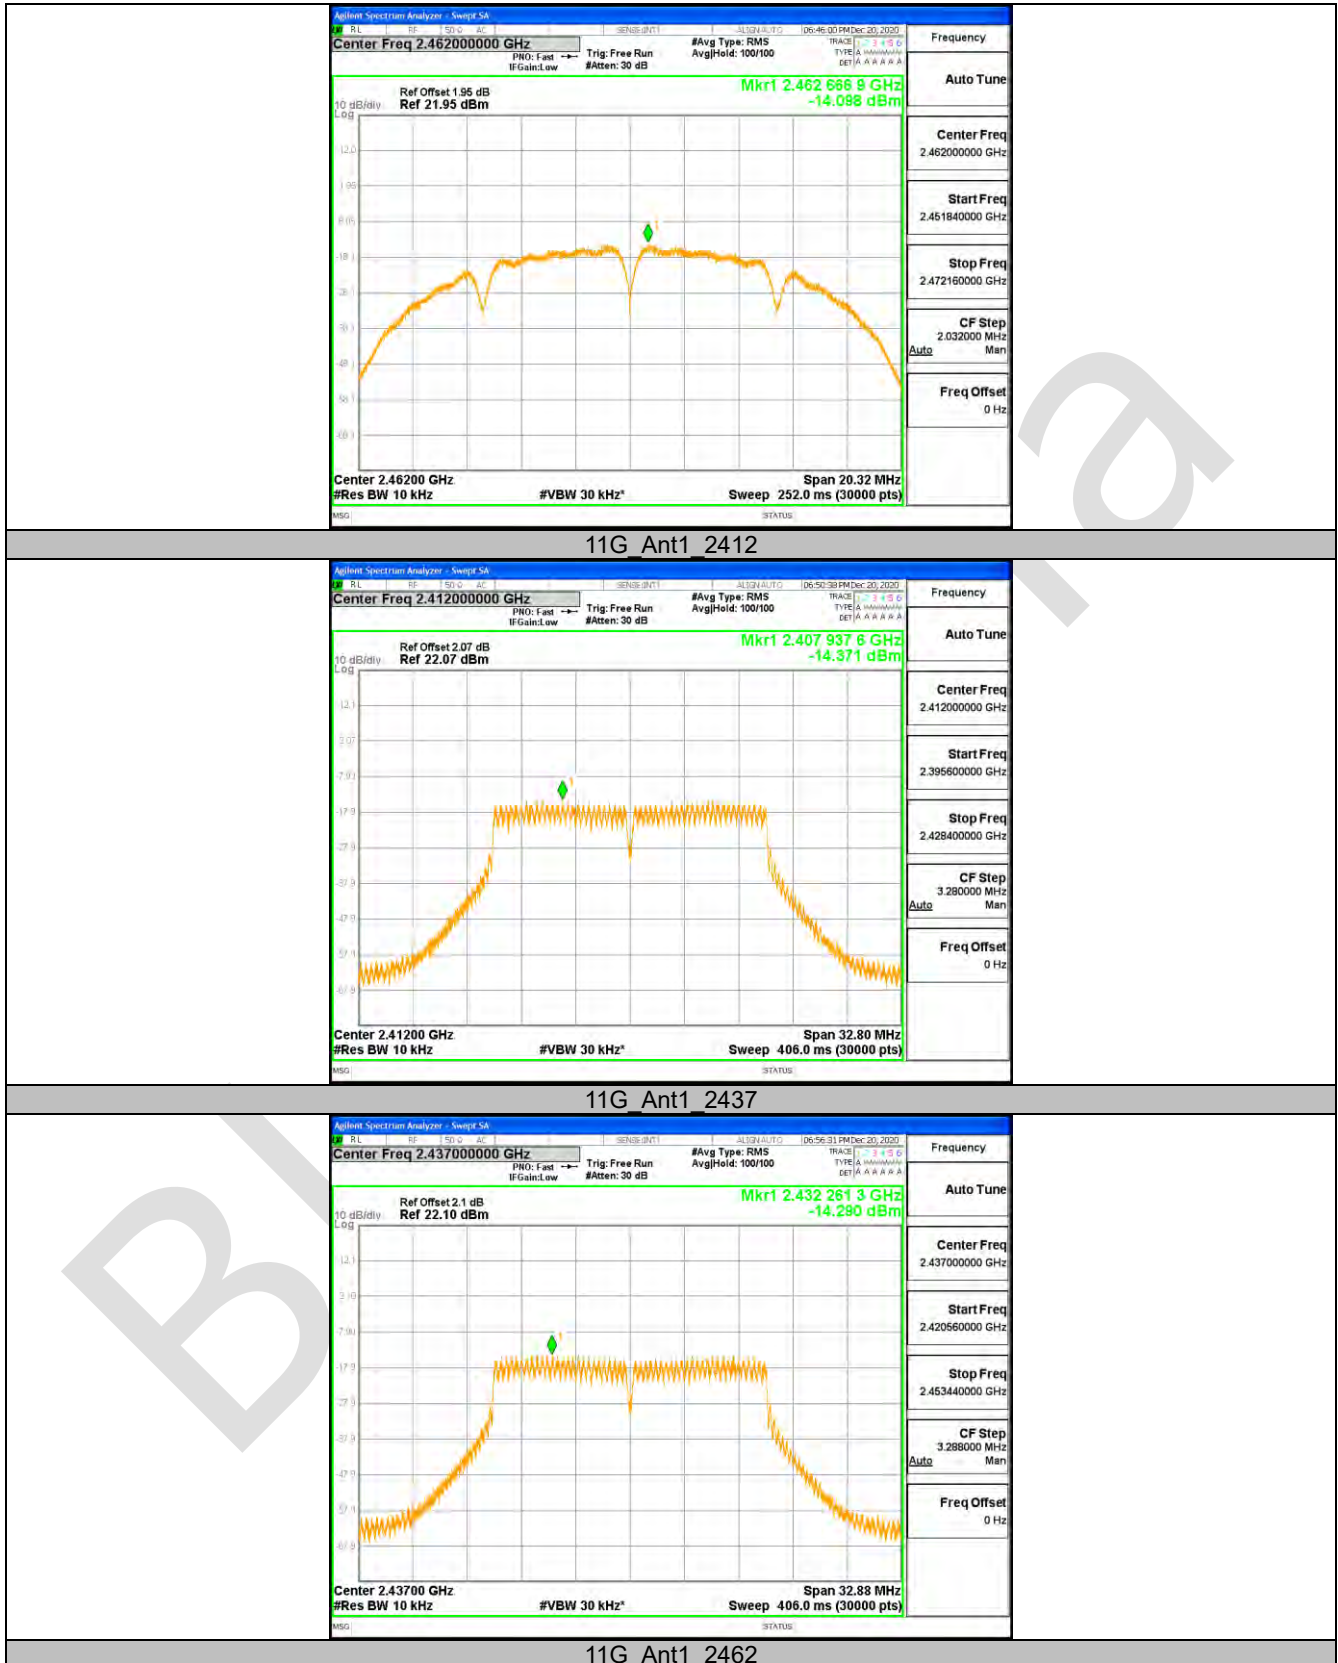

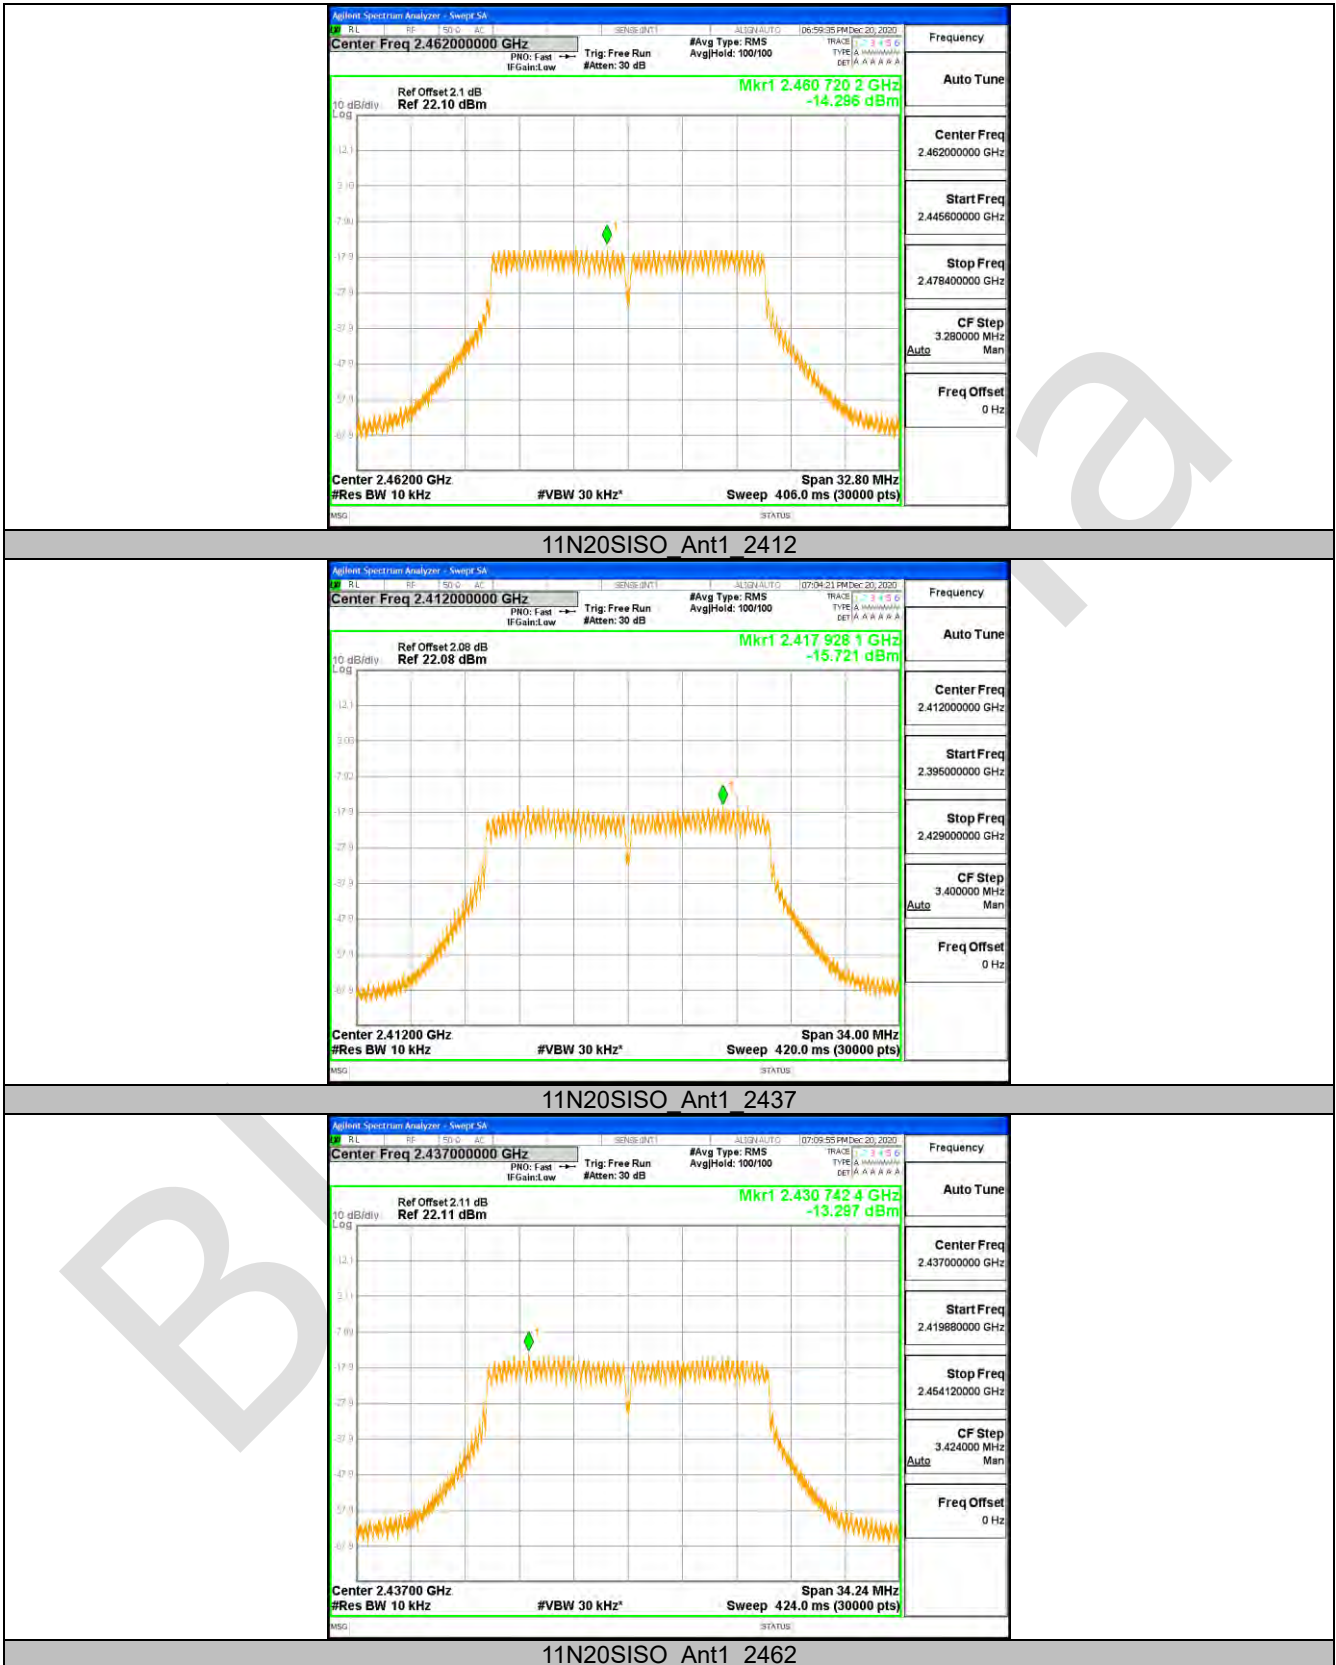

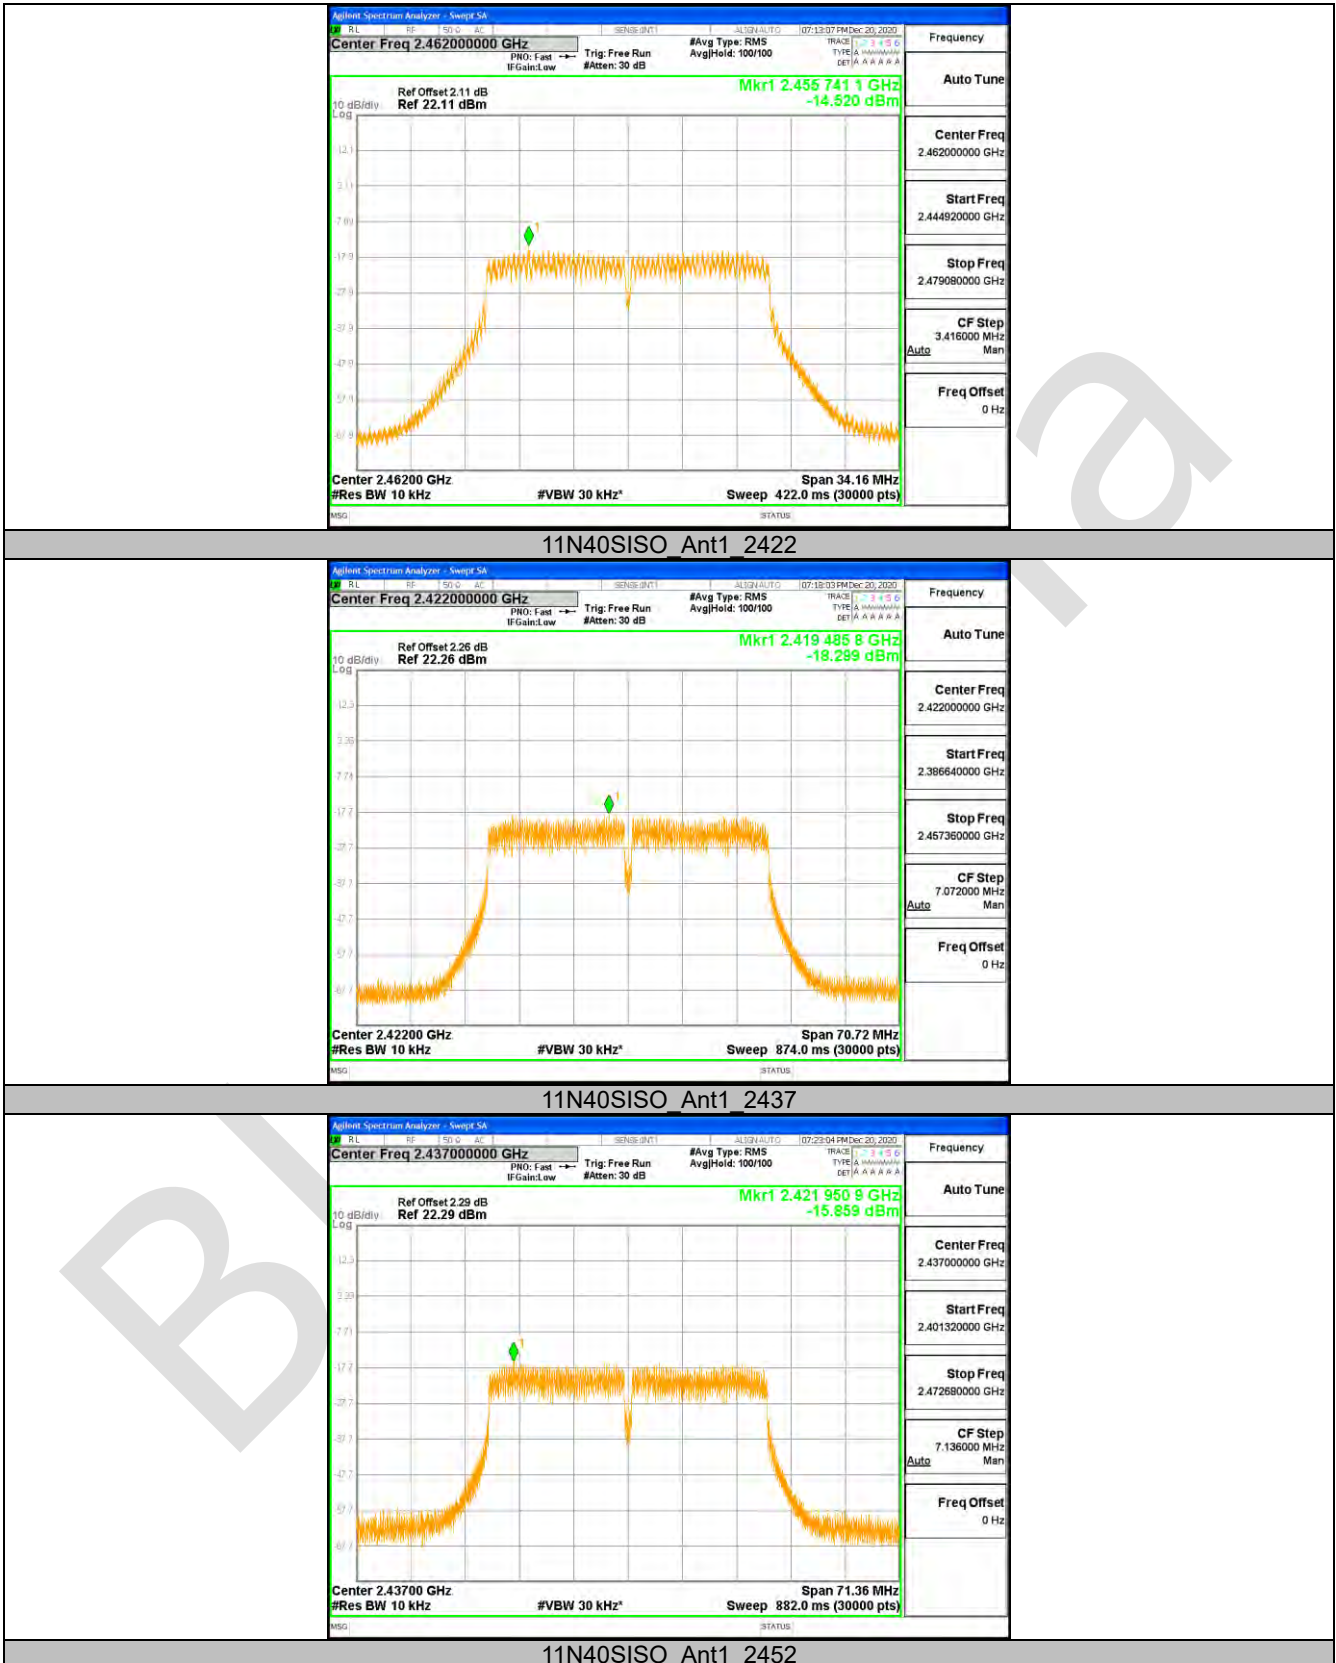

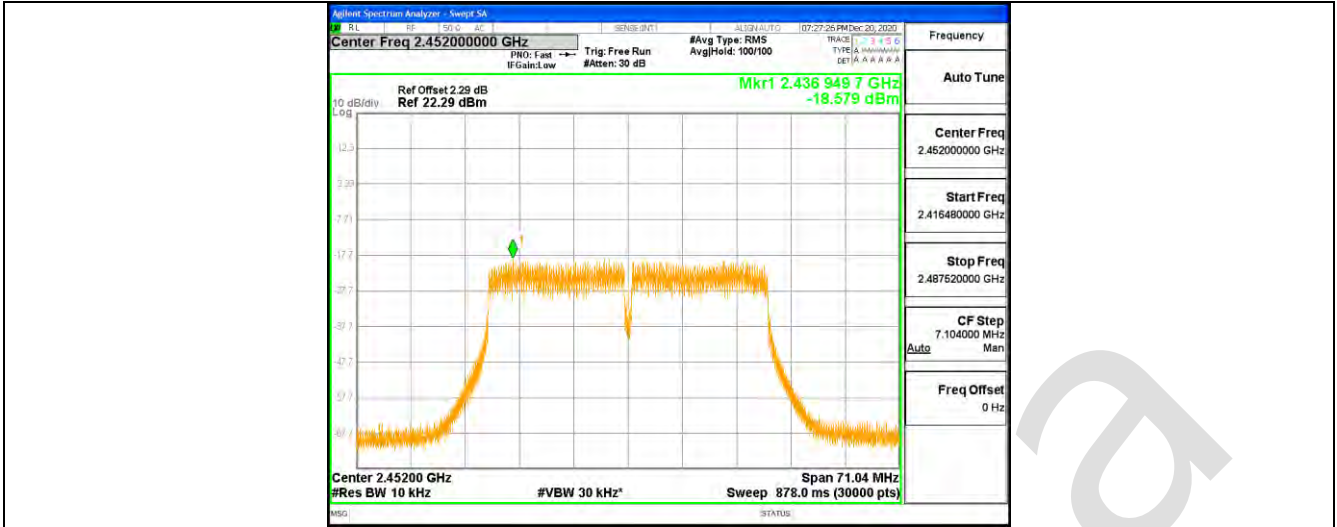


10.5 APPENDIX E: BAND EDGE MEASUREMENTS

Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	3.29	-53.19	<=-26.71	PASS
		High	2462	3.28	-55.09	<=-26.72	PASS
11G	Ant1	Low	2412	2.93	-47.42	<=-27.07	PASS
		High	2462	2.38	-52.56	<=-27.63	PASS
11N20SISO	Ant1	Low	2412	0.71	-48.65	<=-29.29	PASS
		High	2462	1.42	-53.04	<=-28.59	PASS
11N40SISO	Ant1	Low	2422	-2.06	-44.11	<=-32.06	PASS
		High	2452	-2.57	-52.76	<=-32.57	PASS

Test Graphs


11B Ant1 Low 2412

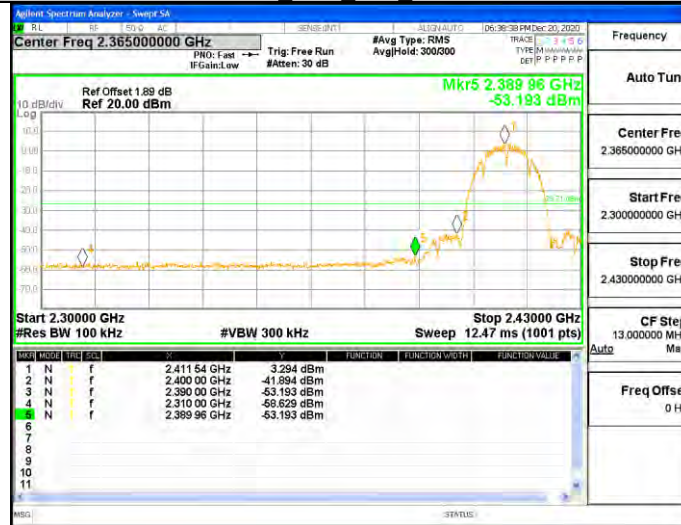

11B Ant1 High 2462




11G Ant1 Low 2412

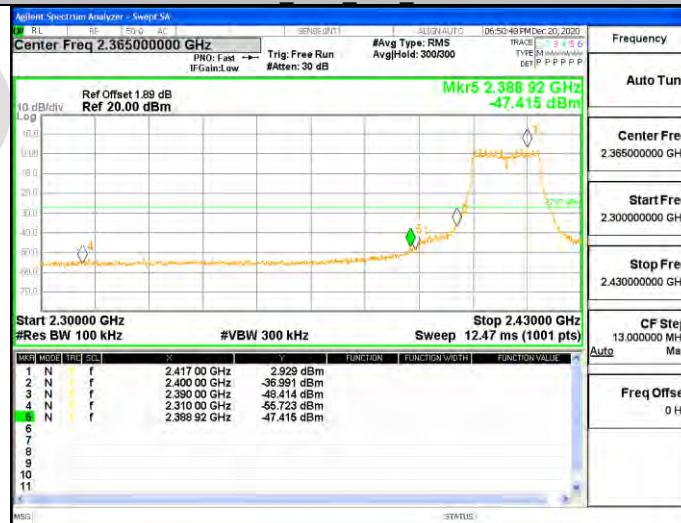

11G Ant1 High 2462



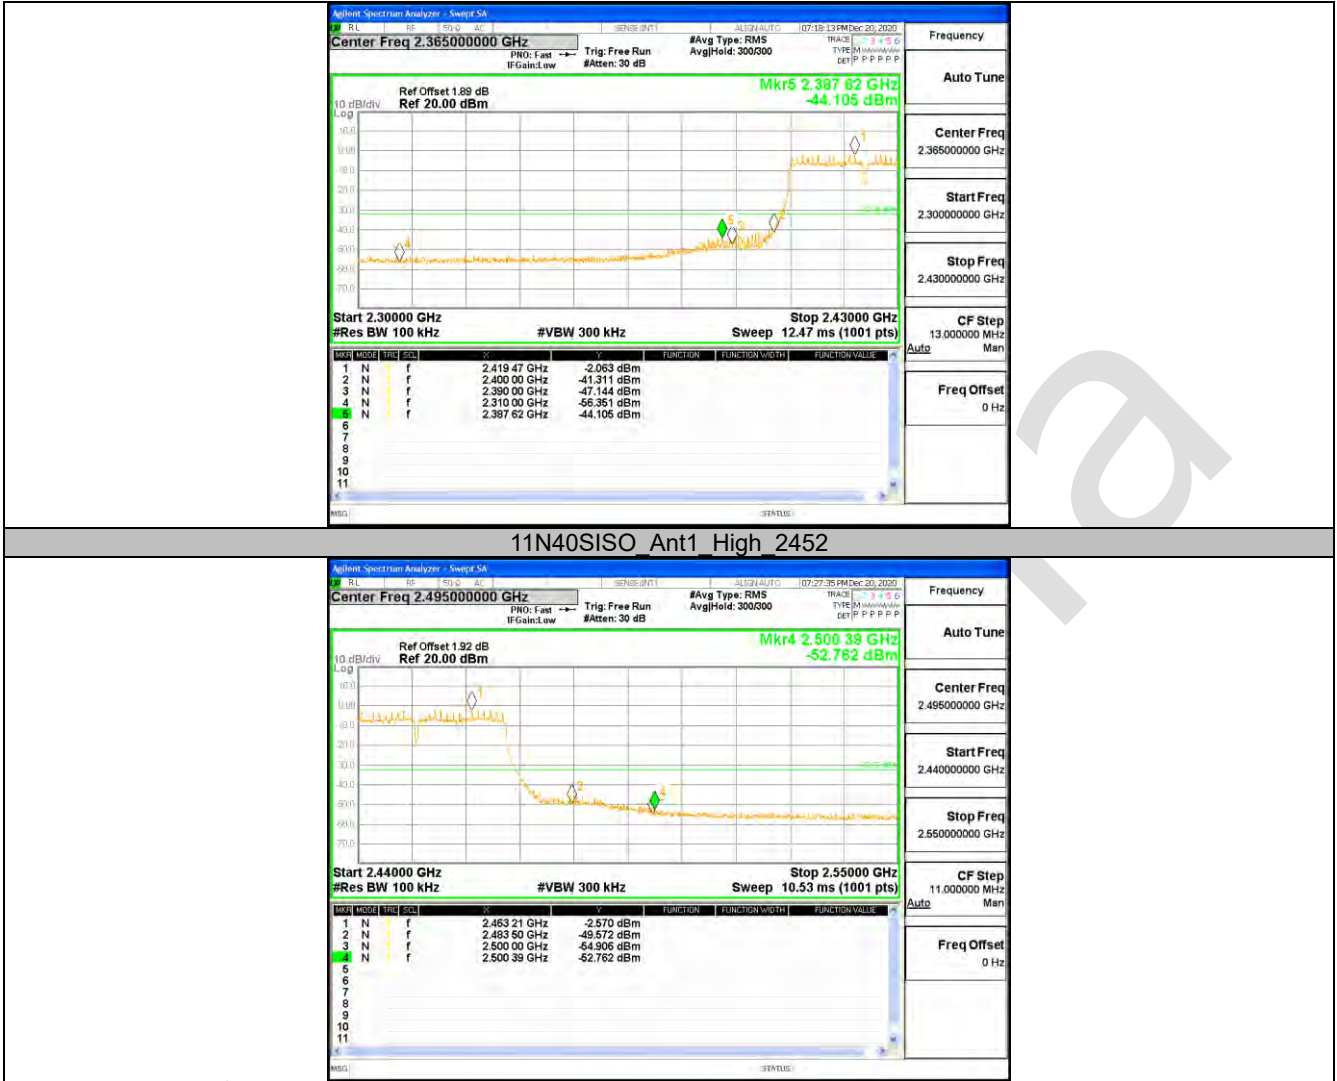


10.6 APPENDIX F: CONDUCTED SPURIOUS EMISSION


Test Result


TestMode	Antenna	Channel	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	2.89	2.89	---	PASS
			30~1000	30~1000	-67.855	<=-27.114	PASS
			1000~26500	1000~26500	-54.565	<=-27.114	PASS
		2437	Reference	3.46	3.46	---	PASS
			30~1000	30~1000	-67.587	<=-26.536	PASS
			1000~26500	1000~26500	-54.524	<=-26.536	PASS
		2462	Reference	2.79	2.79	---	PASS
			30~1000	30~1000	-66.082	<=-27.208	PASS
			1000~26500	1000~26500	-53.458	<=-27.208	PASS
11G	Ant1	2412	Reference	2.82	2.82	---	PASS
			30~1000	30~1000	-66.836	<=-27.183	PASS
			1000~26500	1000~26500	-54.016	<=-27.183	PASS
		2437	Reference	3.27	3.27	---	PASS
			30~1000	30~1000	-67.637	<=-26.73	PASS
			1000~26500	1000~26500	-53.155	<=-26.73	PASS
		2462	Reference	2.38	2.38	---	PASS
			30~1000	30~1000	-67.47	<=-27.62	PASS
			1000~26500	1000~26500	-53.941	<=-27.62	PASS
11N20SISO	Ant1	2412	Reference	0.58	0.58	---	PASS
			30~1000	30~1000	-67.556	<=-29.42	PASS
			1000~26500	1000~26500	-54.376	<=-29.42	PASS
		2437	Reference	3.18	3.18	---	PASS
			30~1000	30~1000	-67.5	<=-26.824	PASS
			1000~26500	1000~26500	-54.567	<=-26.824	PASS
		2462	Reference	1.43	1.43	---	PASS
			30~1000	30~1000	-67.422	<=-28.572	PASS
			1000~26500	1000~26500	-54.578	<=-28.572	PASS
11N40SISO	Ant1	2422	Reference	-2.03	-2.03	---	PASS
			30~1000	30~1000	-67.734	<=-32.025	PASS
			1000~26500	1000~26500	-54.423	<=-32.025	PASS
		2437	Reference	-0.20	-0.20	---	PASS
			30~1000	30~1000	-67.755	<=-30.196	PASS
			1000~26500	1000~26500	-53.426	<=-30.196	PASS
		2452	Reference	-2.69	-2.69	---	PASS
			30~1000	30~1000	-66.405	<=-32.686	PASS
			1000~26500	1000~26500	-54.214	<=-32.686	PASS


Test Graphs




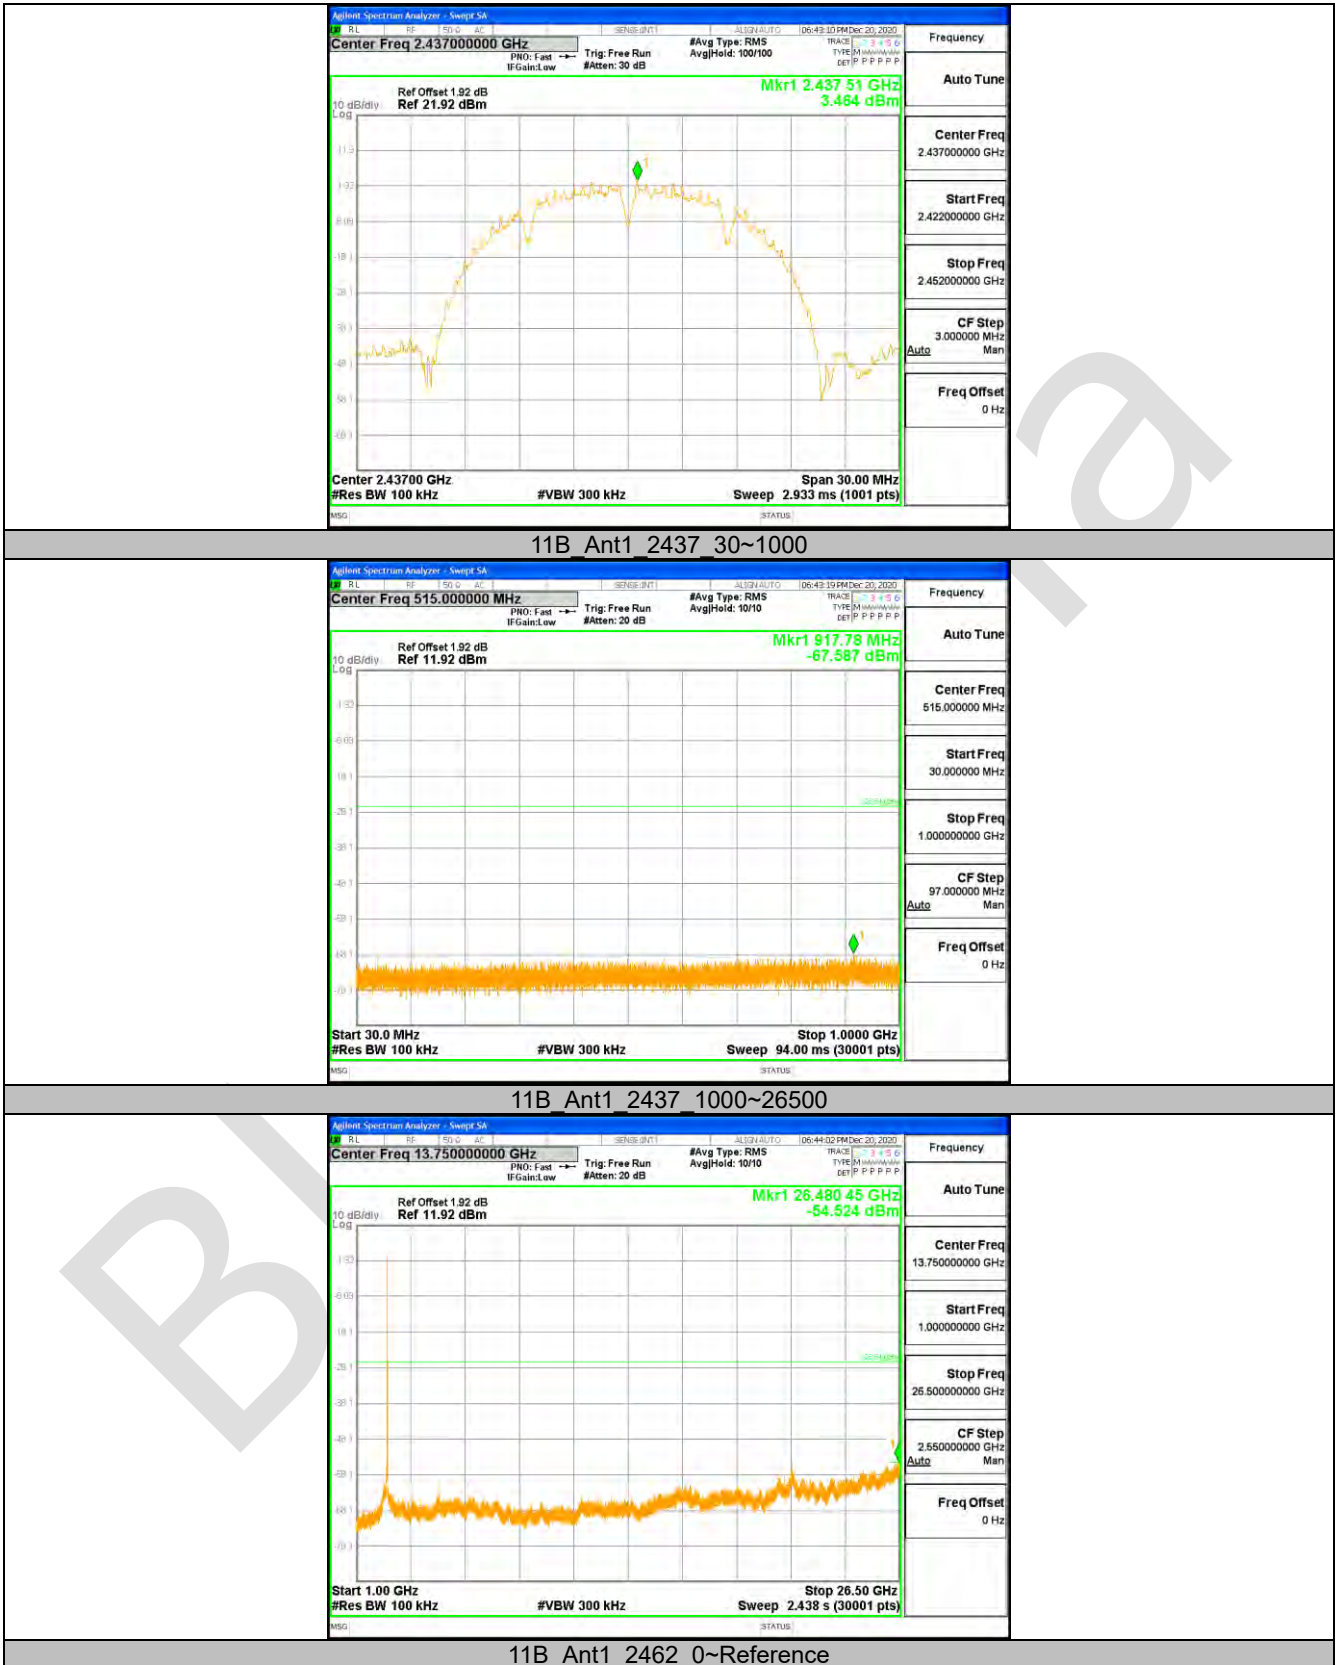


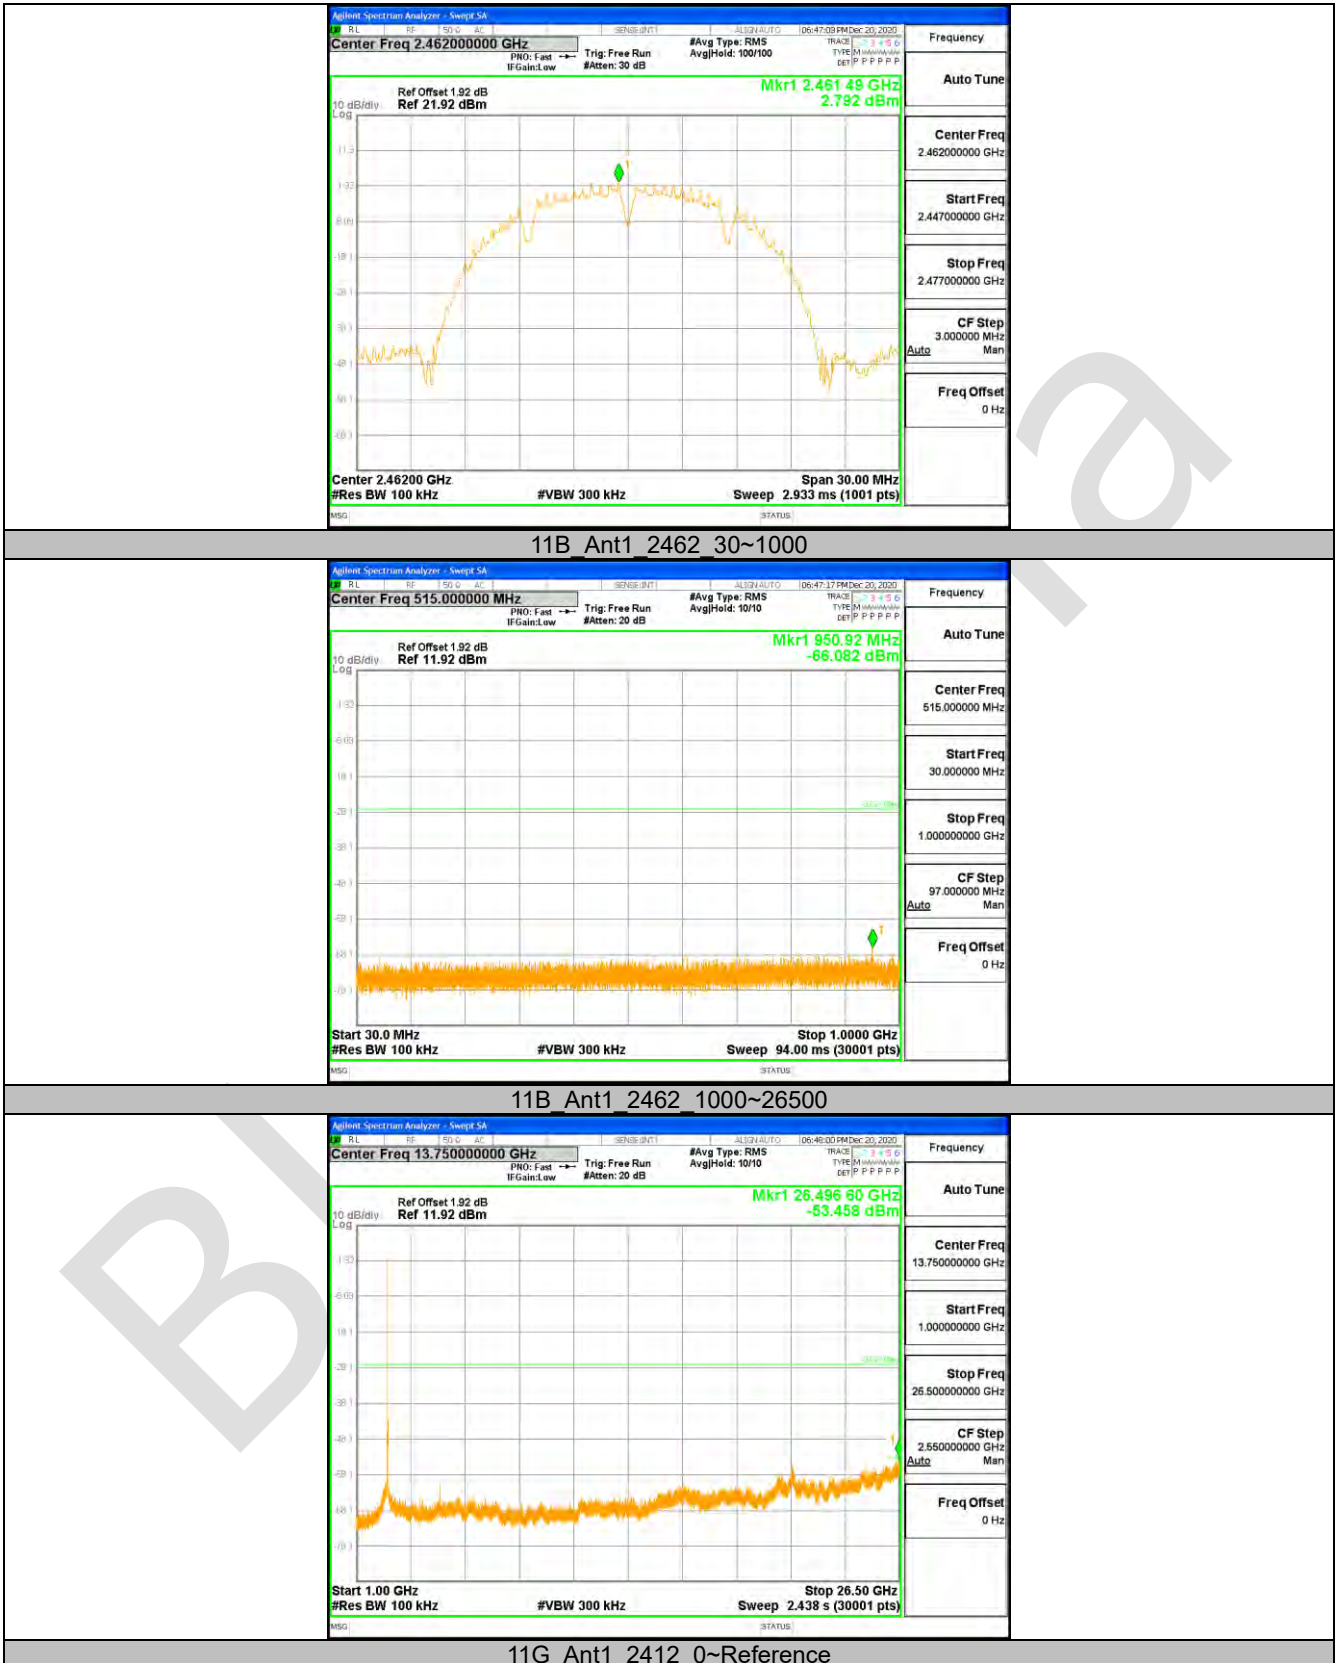


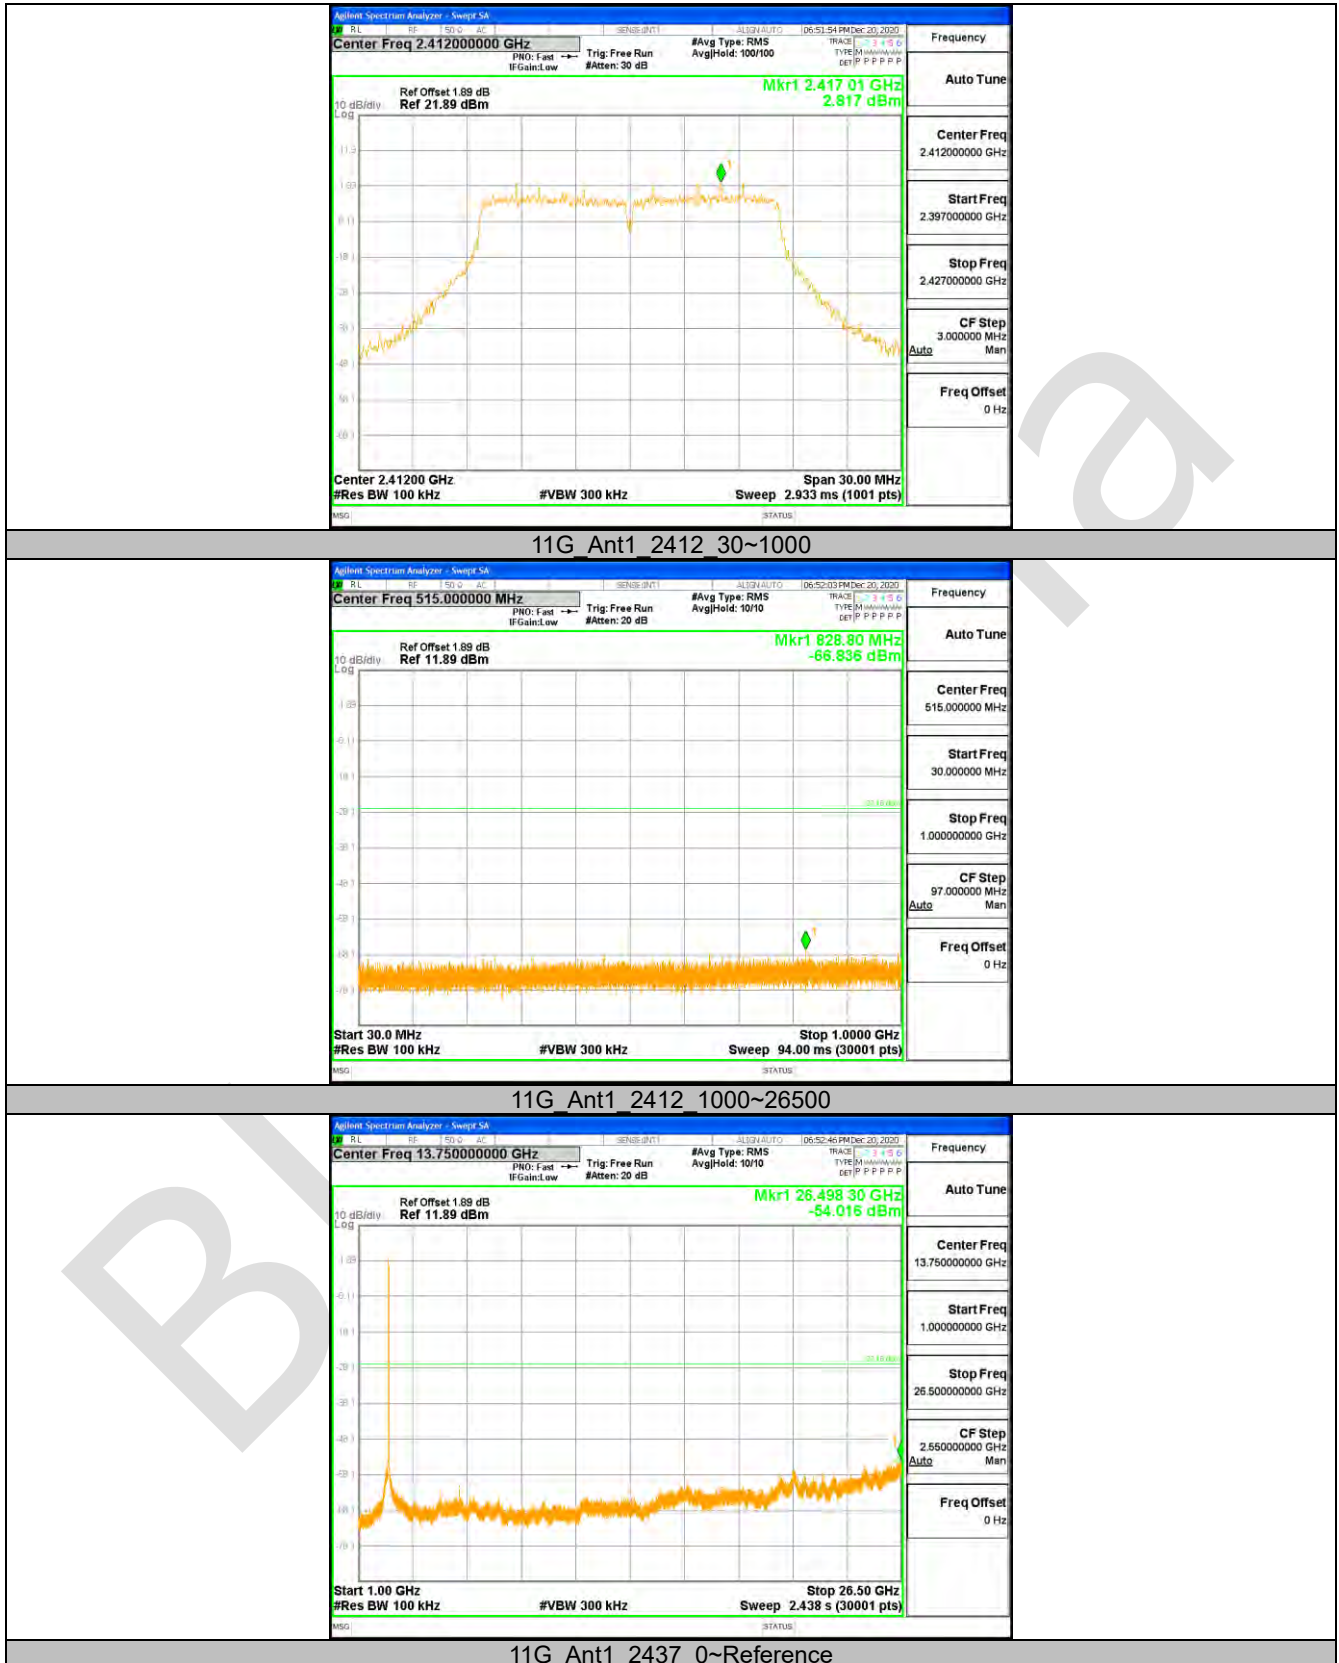


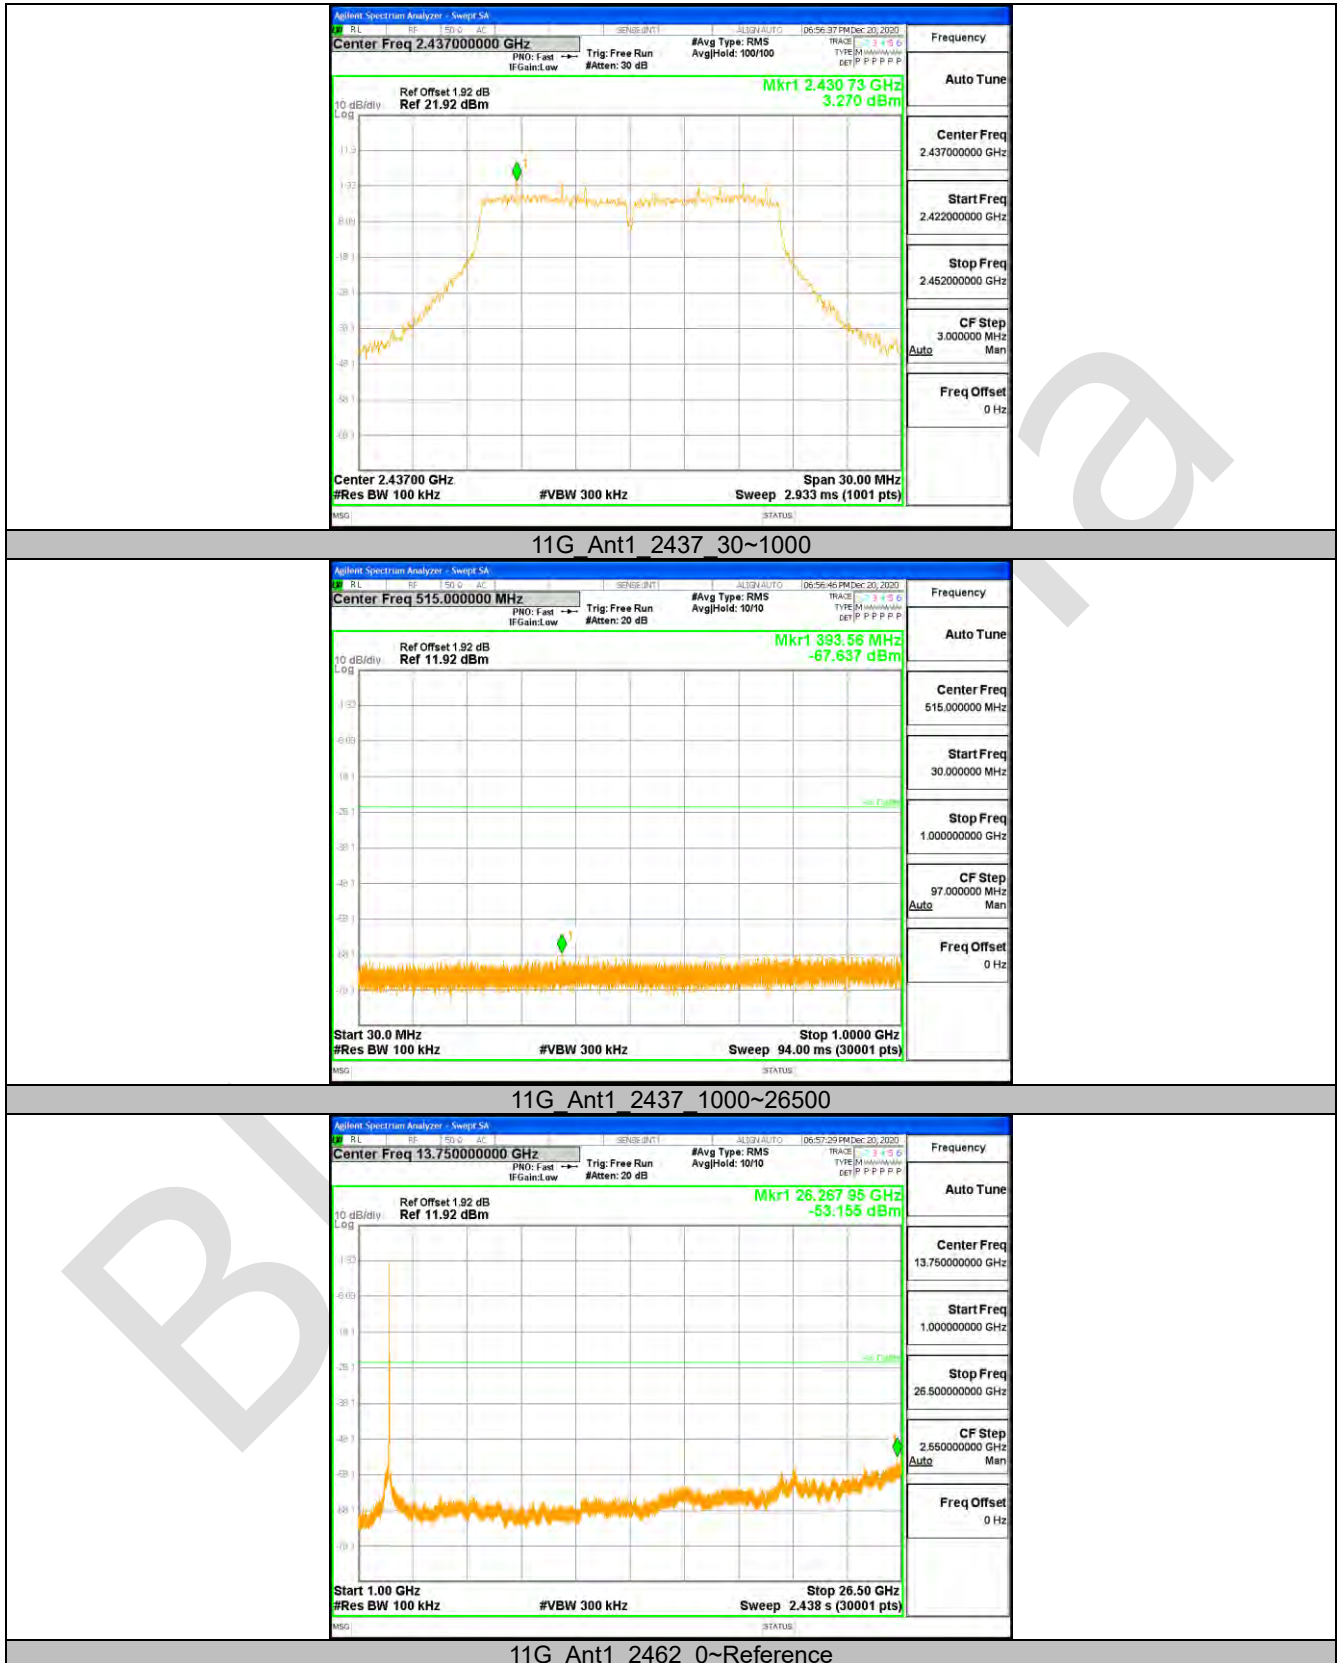


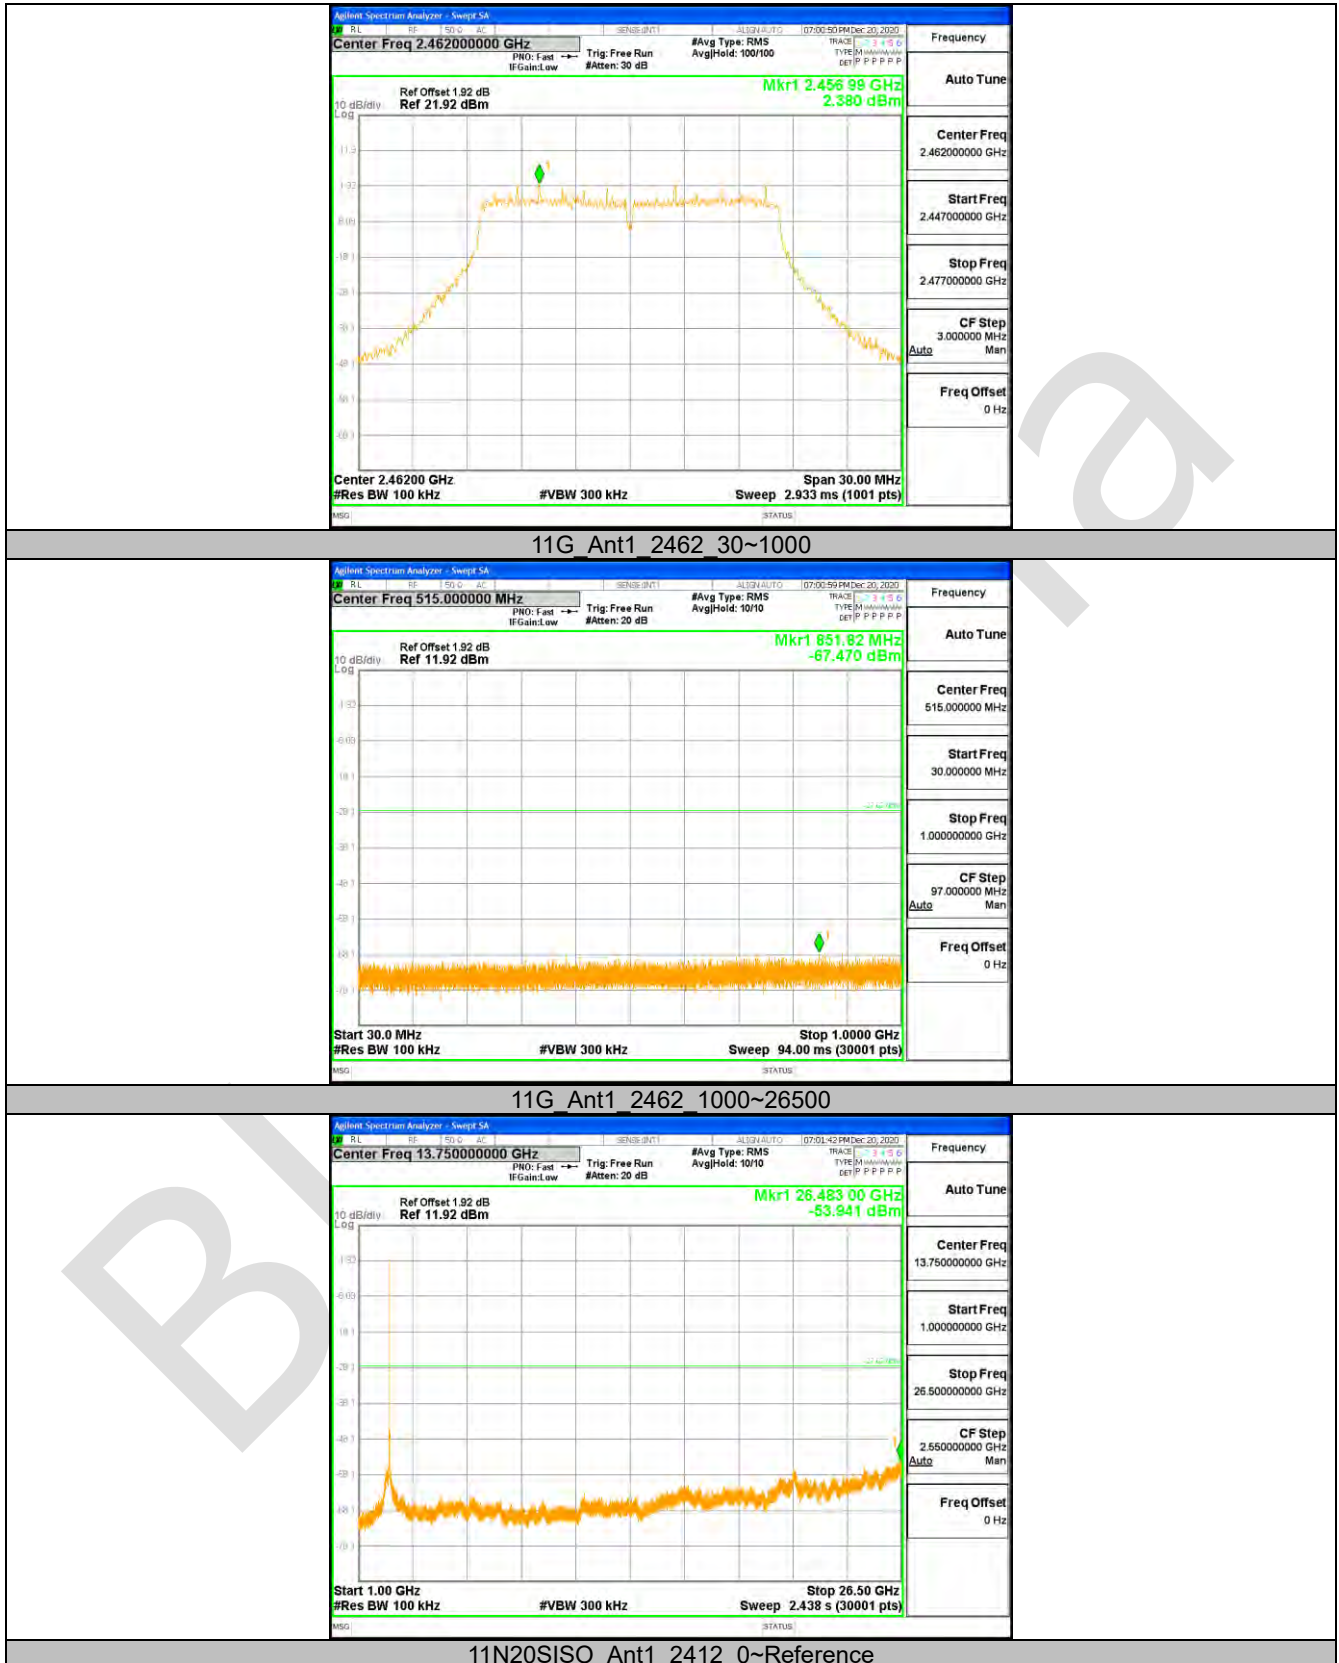

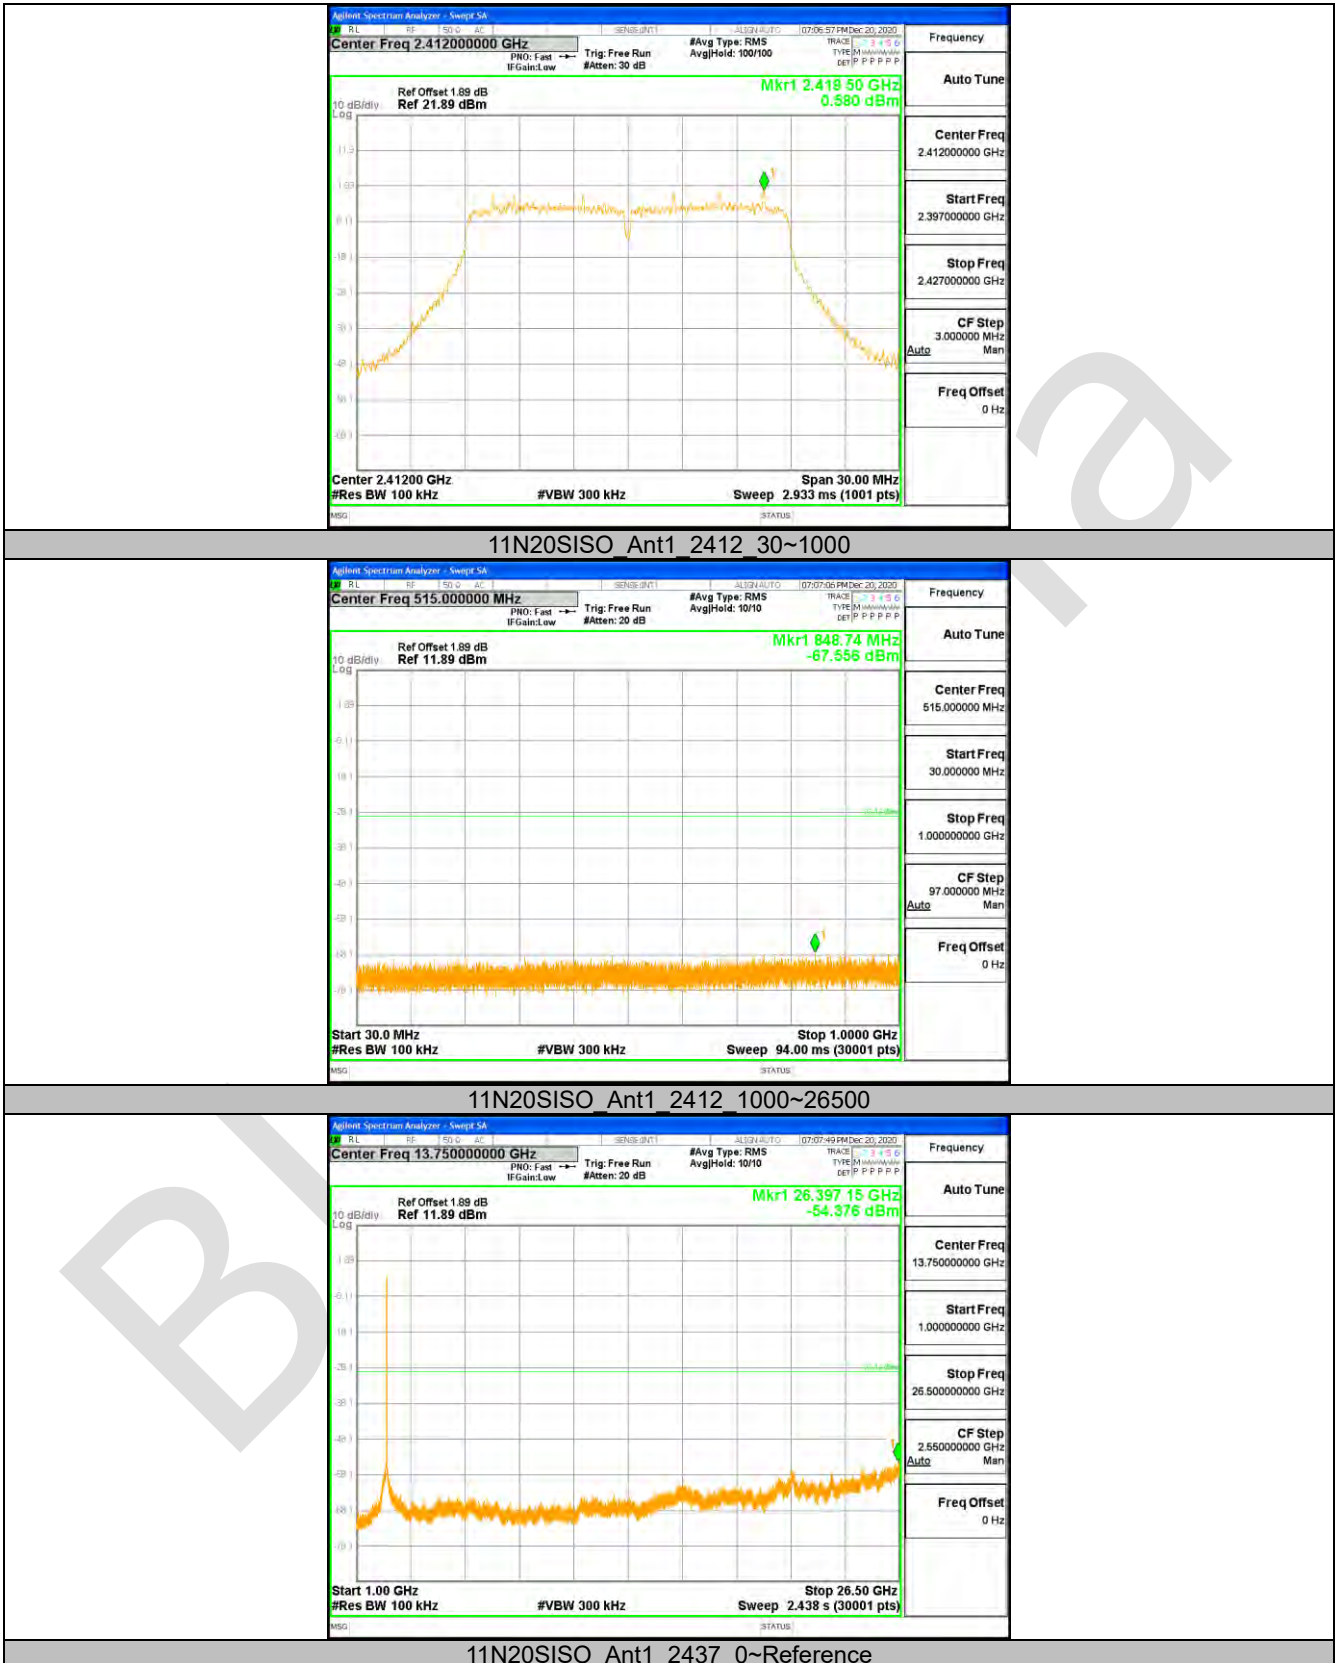


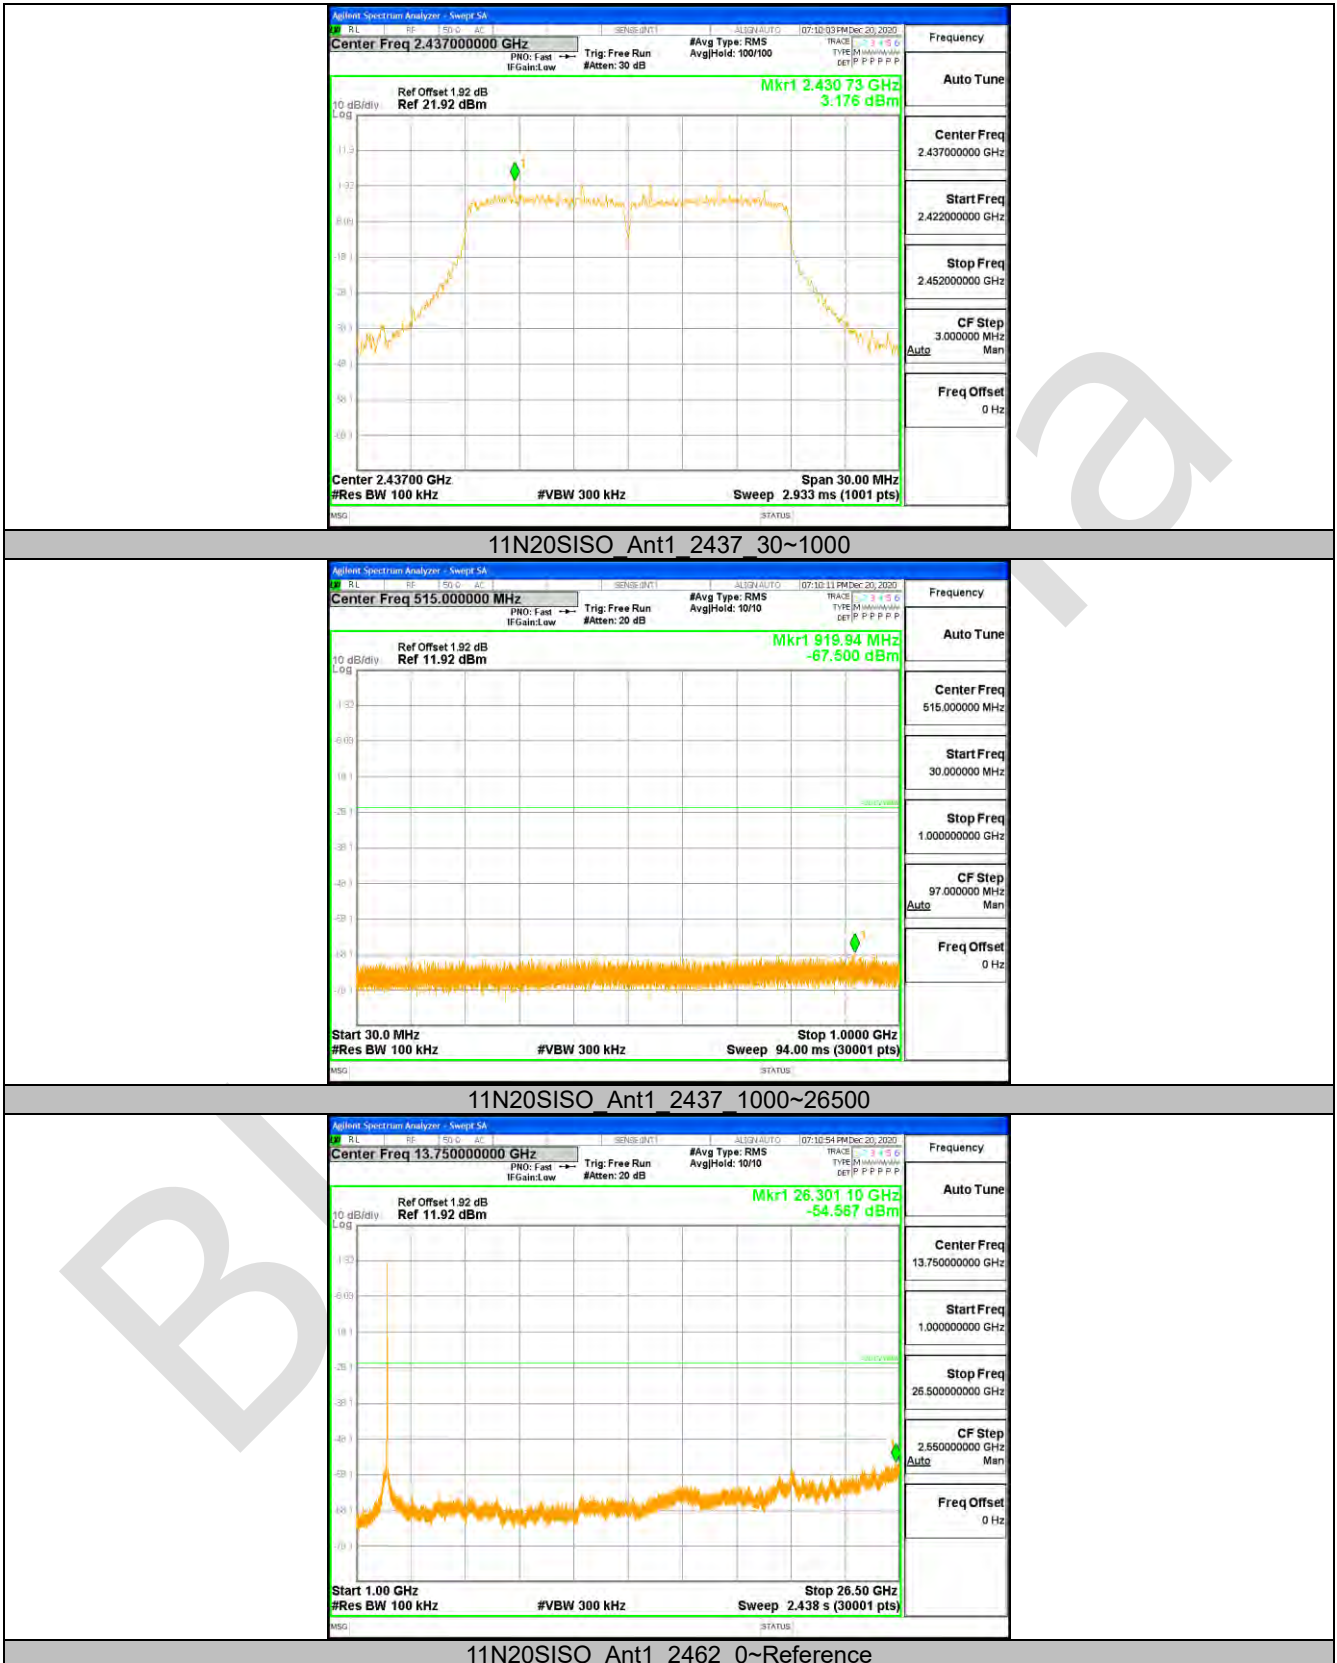

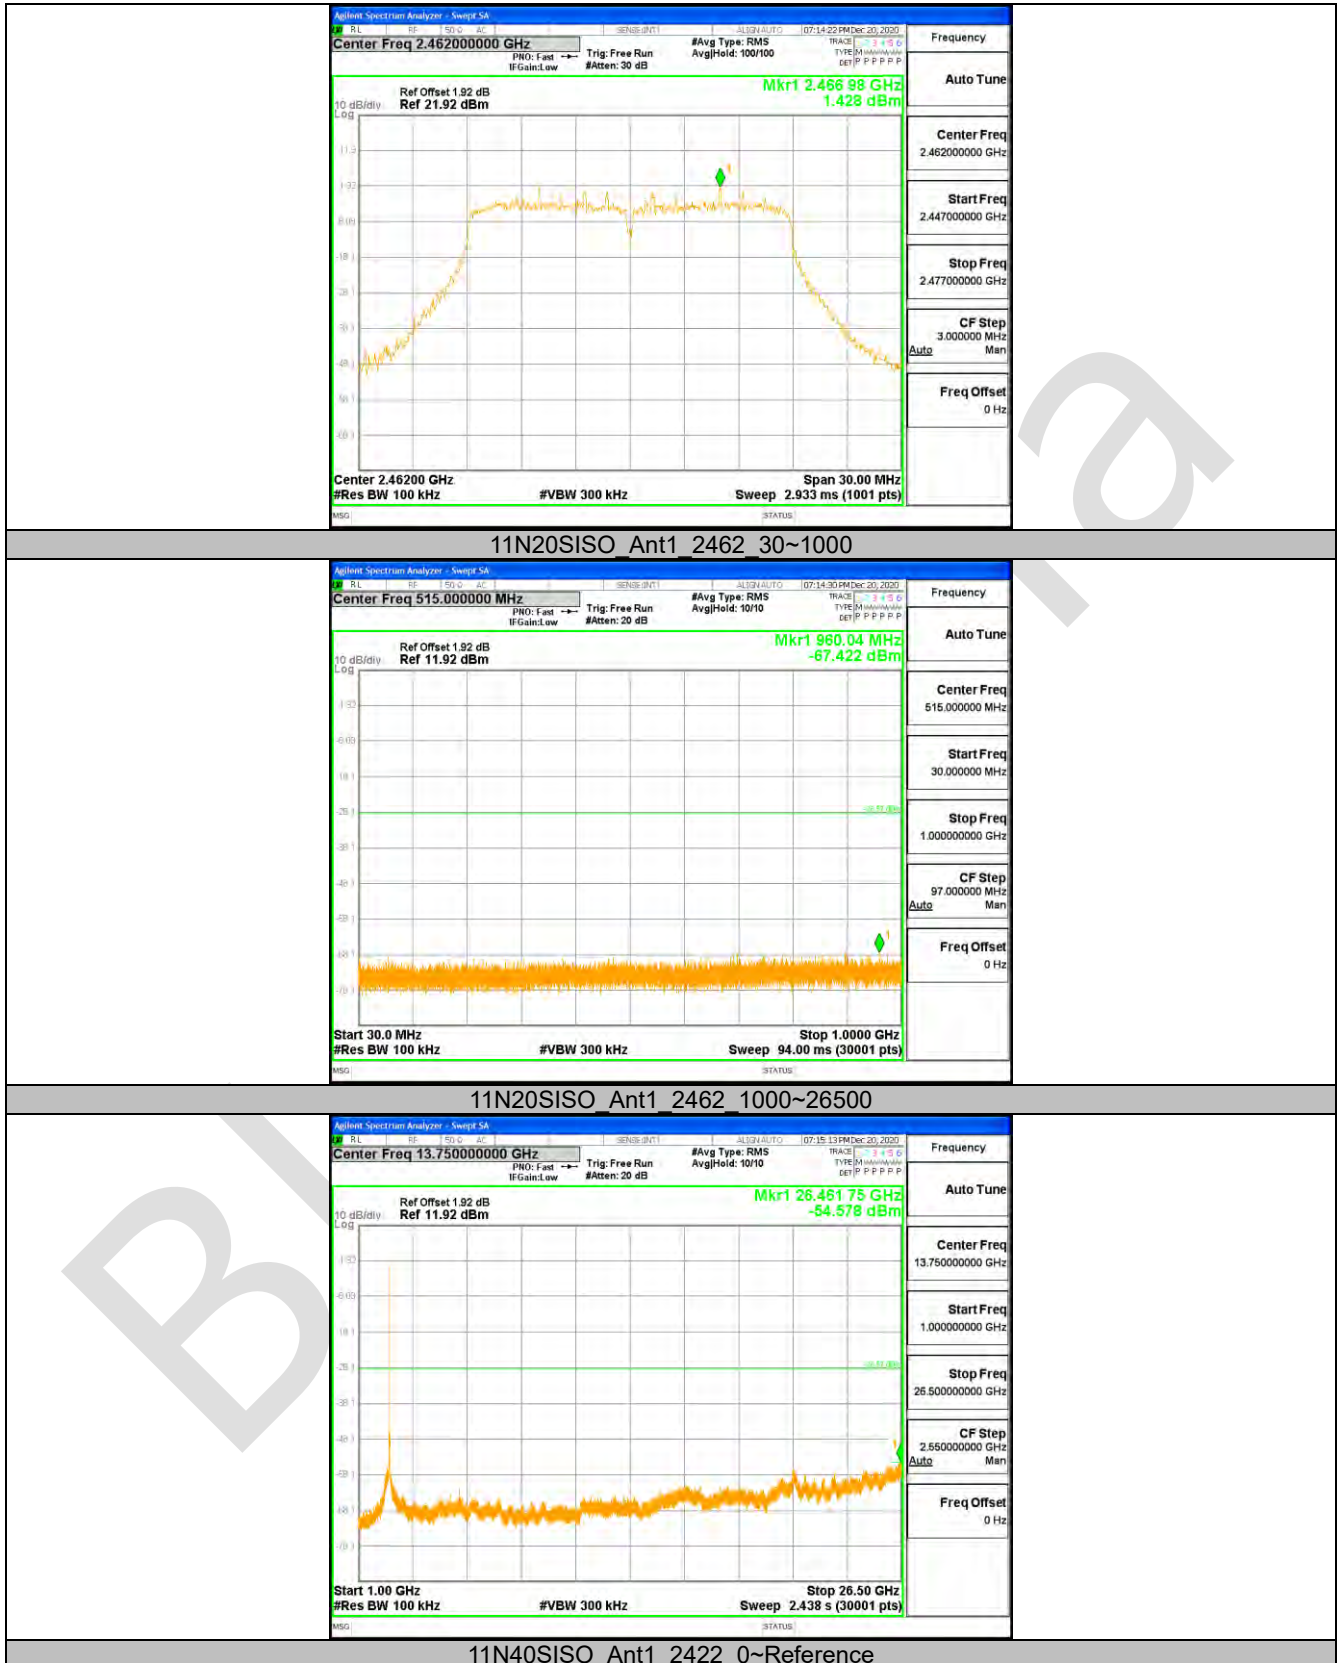

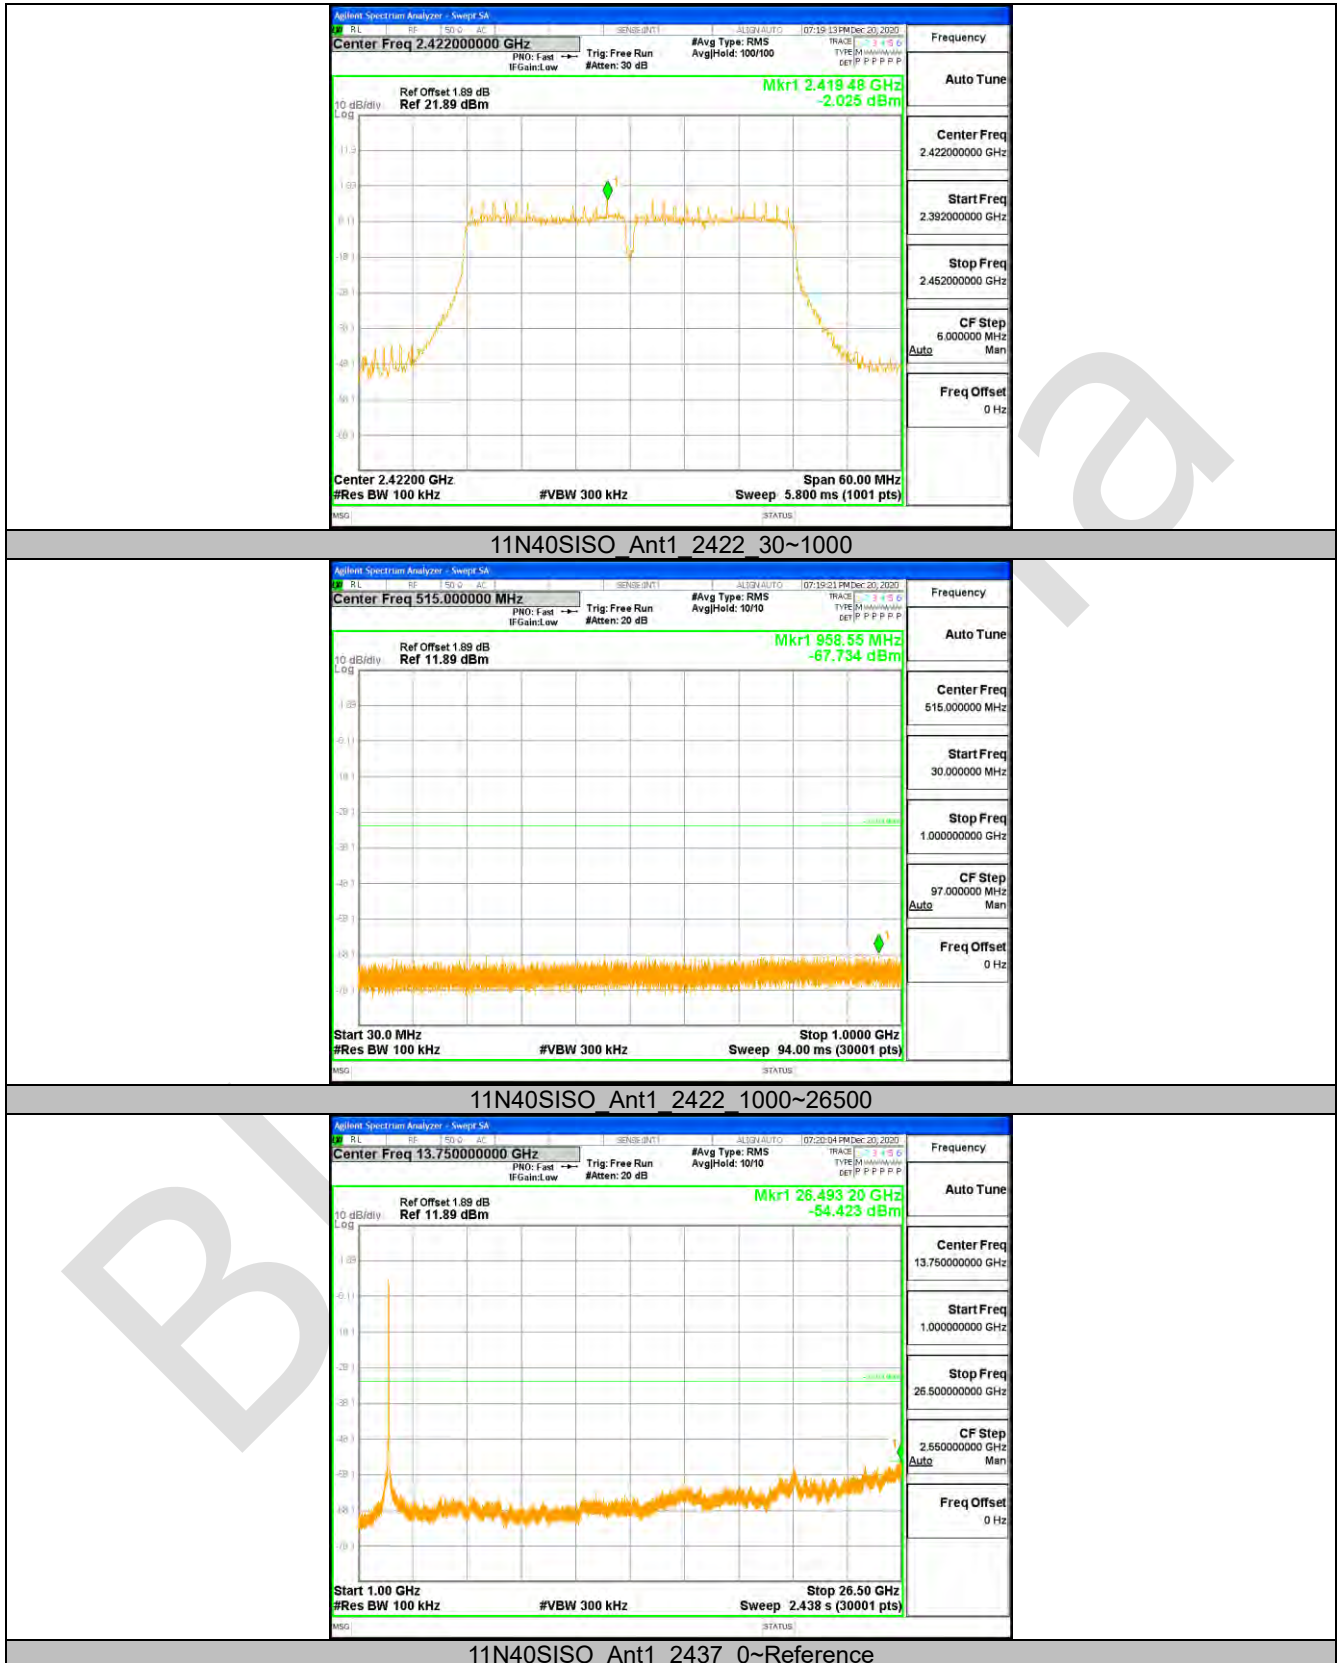



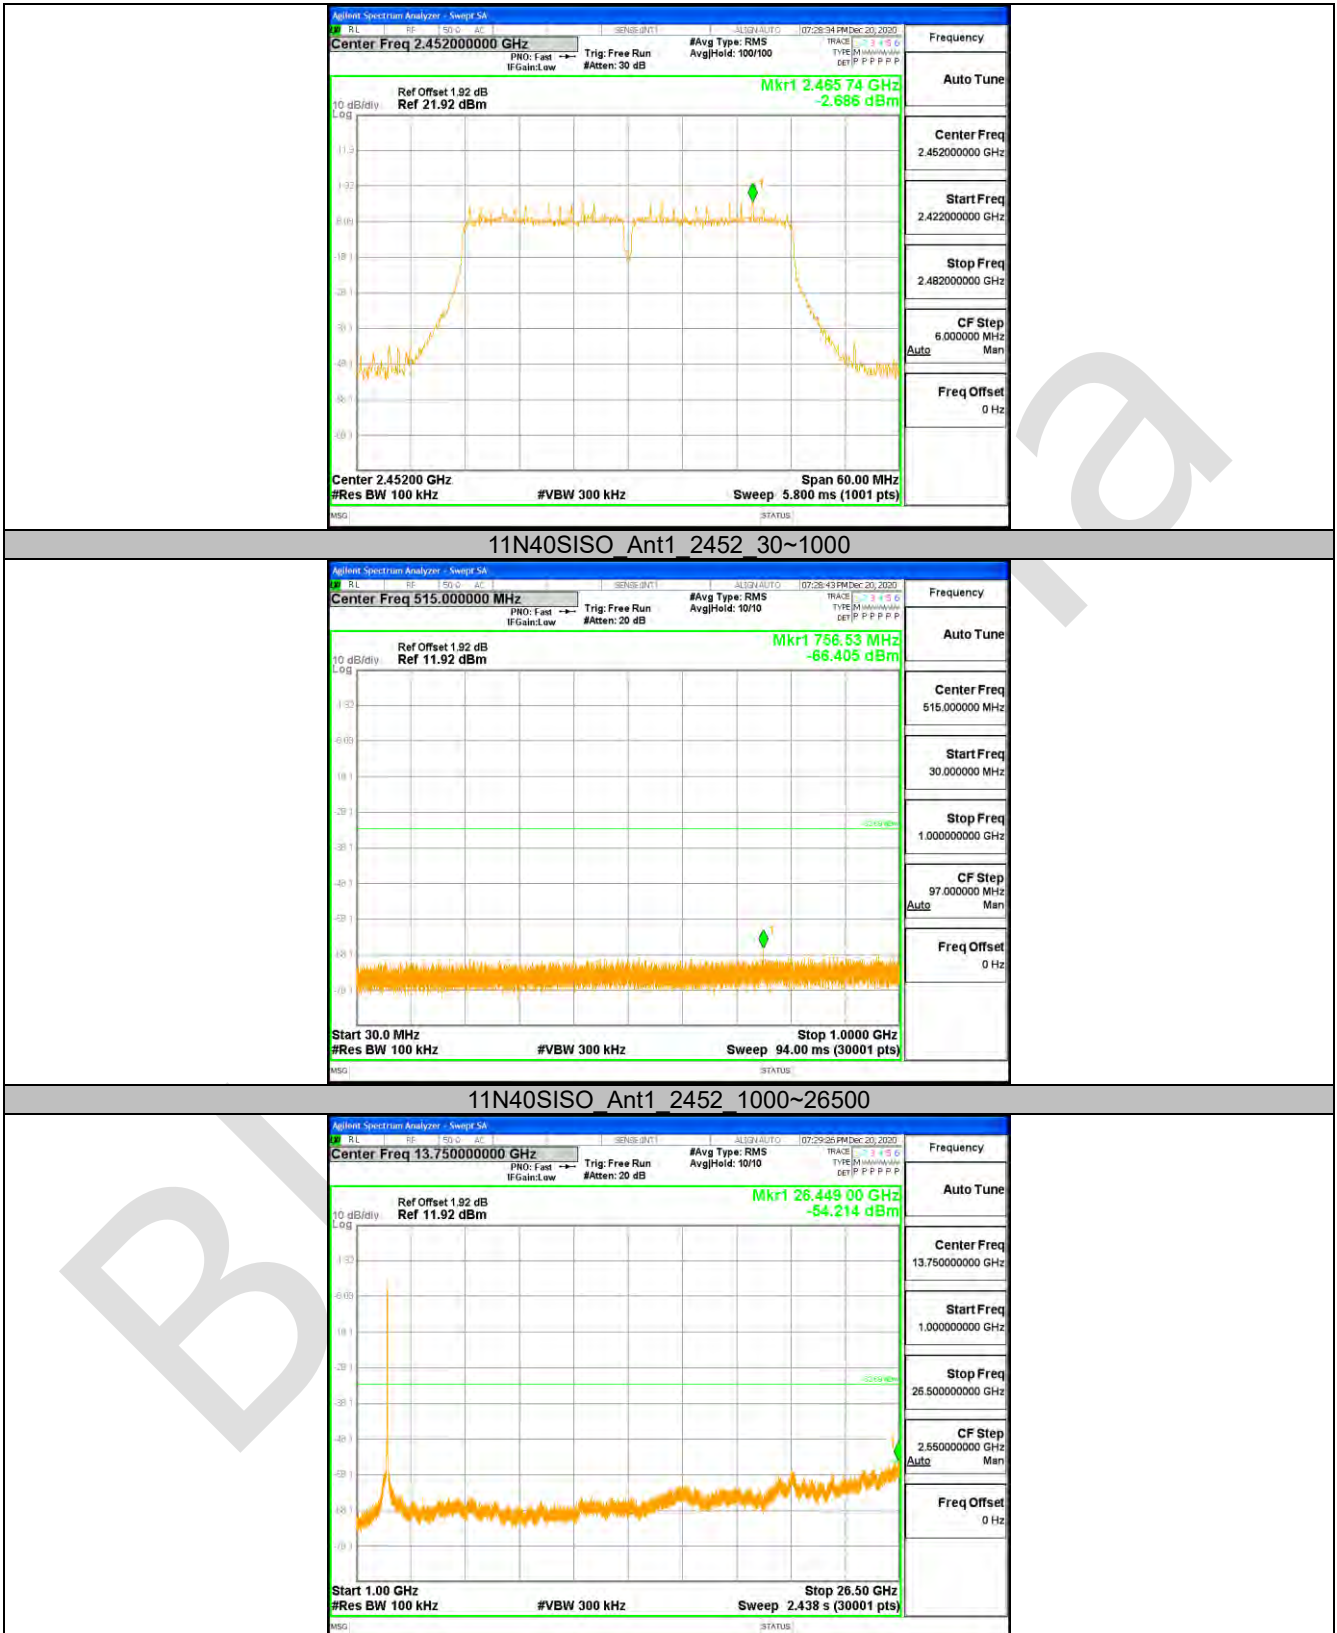

APPENDIX A: PHOTOGRAPHS OF TEST SETUP



Radiated Spurious Emissions






Conducted Emissions at AC Power Line (150kHz-30MHz)



APPENDIX B: PHOTOGRAPHS OF EUT

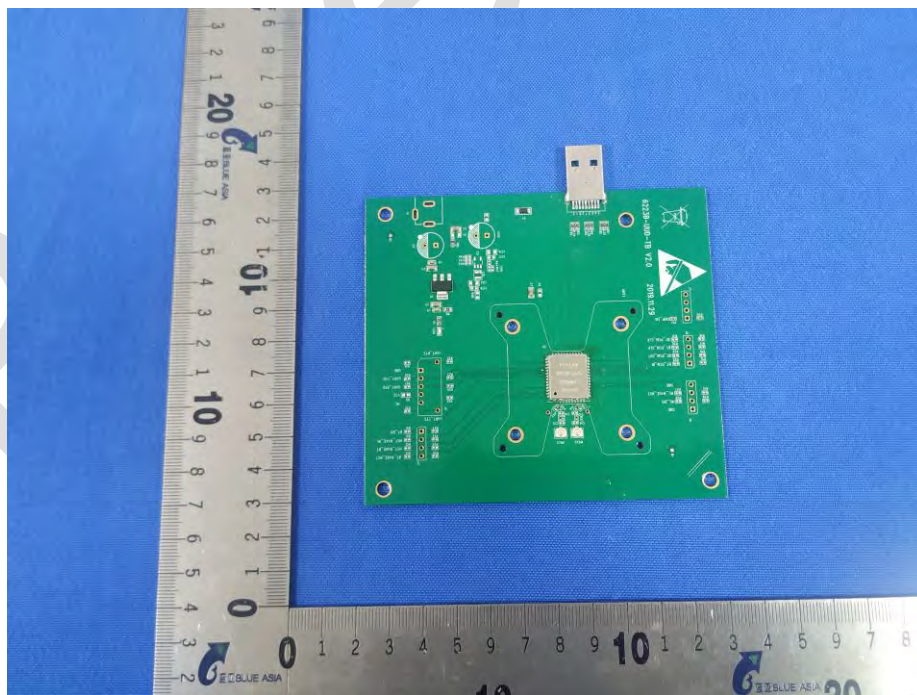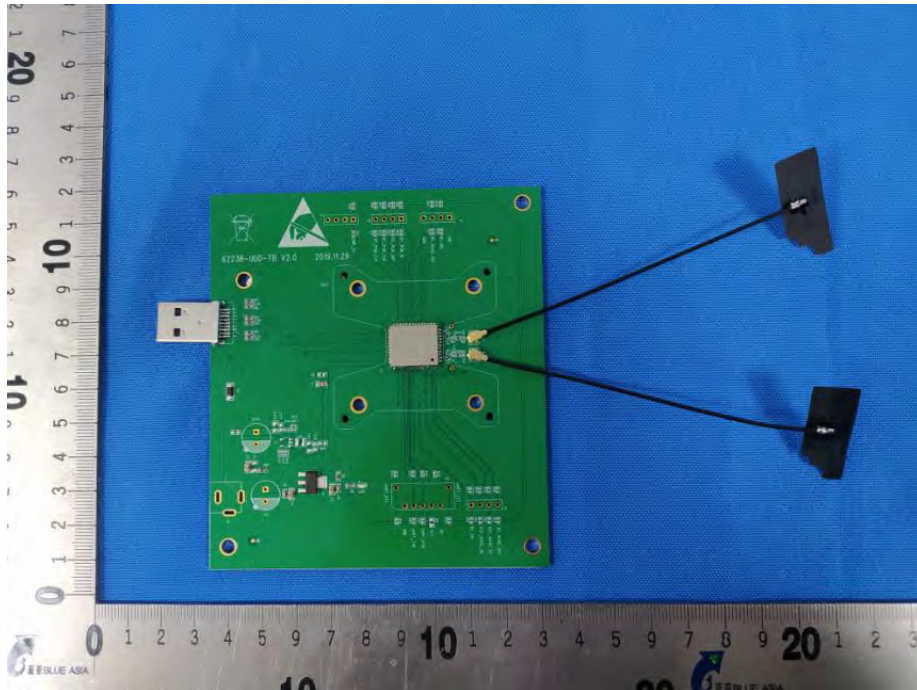

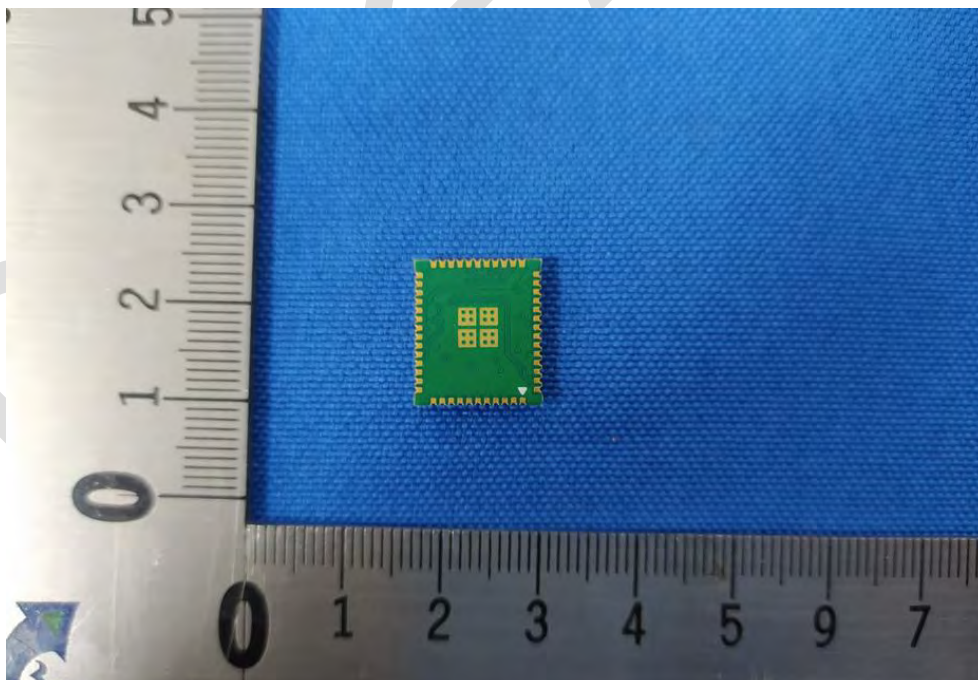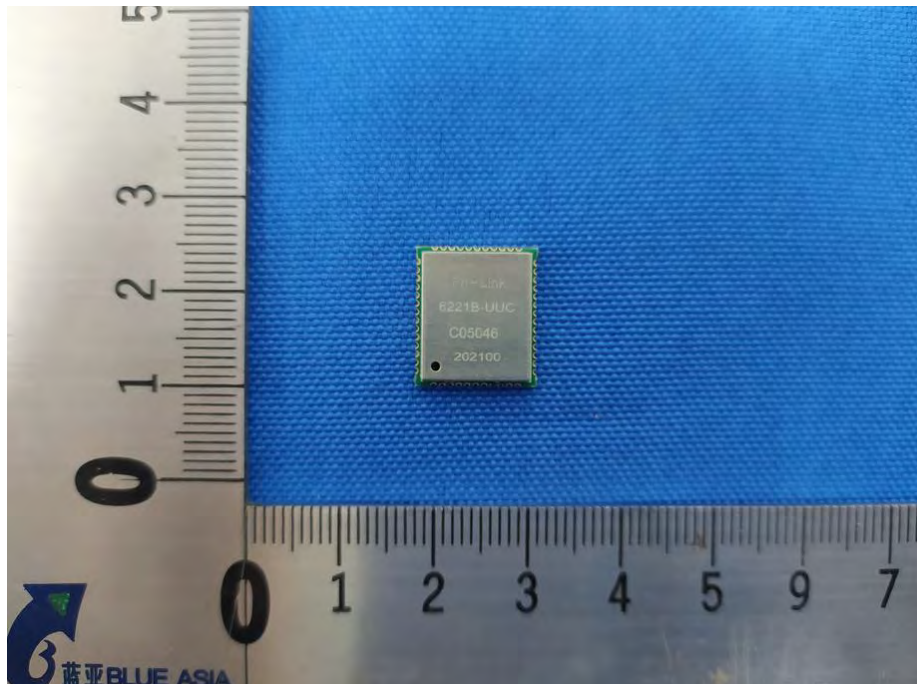

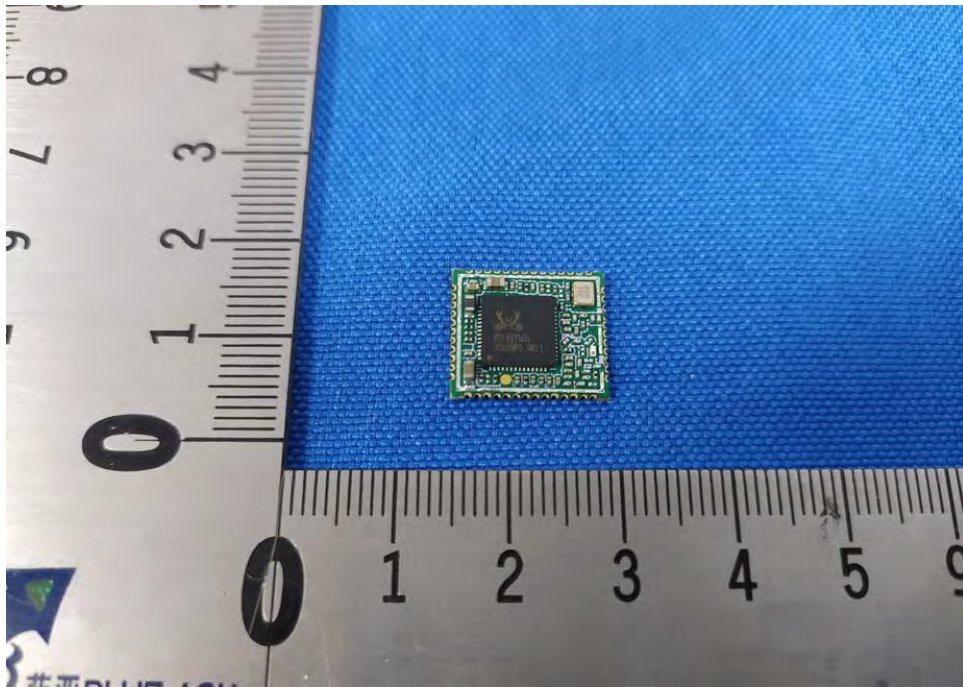

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.