




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	2.987	30	Pass
NVNT	BLE	2442	Ant1	3.351	30	Pass
NVNT	BLE	2480	Ant1	2.307	30	Pass



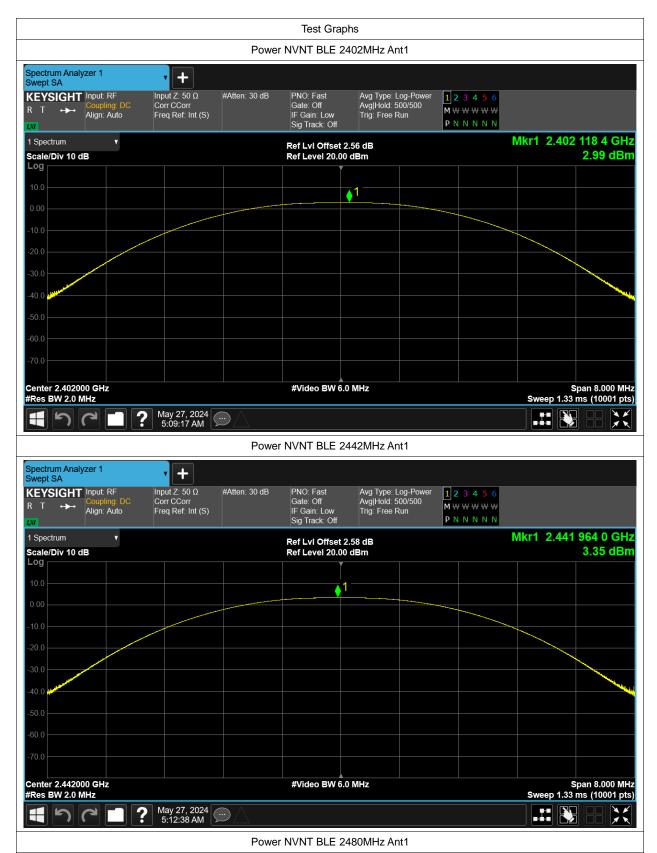



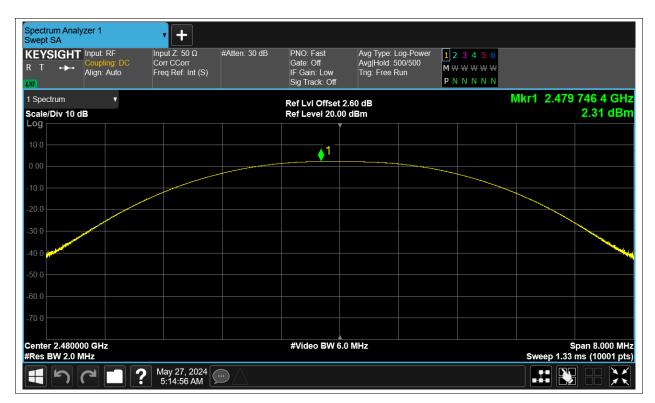





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.689	0.5	Pass
NVNT	BLE	2442	Ant1	0.686	0.5	Pass
NVNT	BLE	2480	Ant1	0.681	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.052	
NVNT	BLE	2442	Ant1	1.055	
NVNT	BLE	2480	Ant1	1.052	













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-3.237	8	Pass
NVNT	BLE	2442	Ant1	-2.893	8	Pass
NVNT	BLE	2480	Ant1	-3.948	8	Pass















Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-55.75	-20	Pass
NVNT	BLE	2480	Ant1	-54.72	-20	Pass



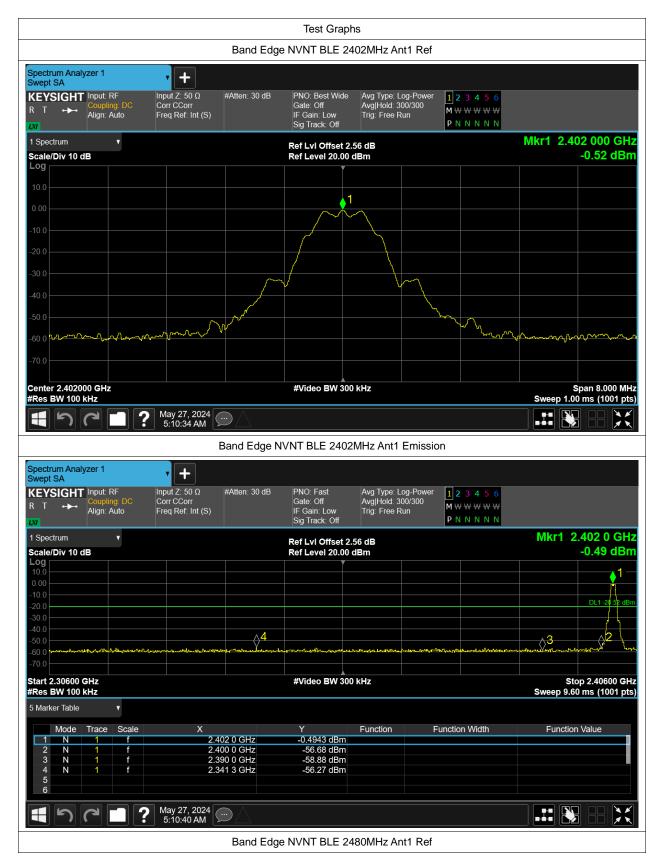



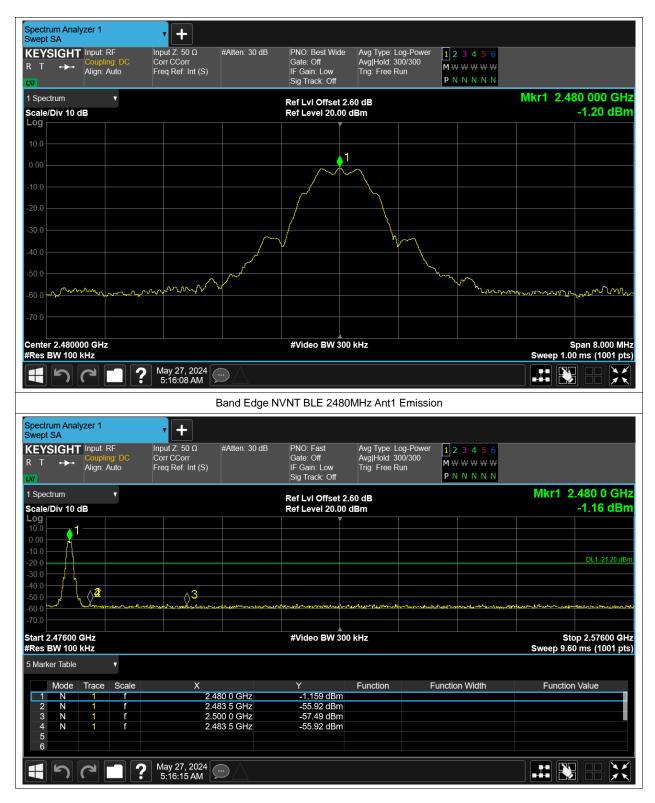






Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-49.48	-20	Pass
NVNT	BLE	2442	Ant1	-49.77	-20	Pass
NVNT	BLE	2480	Ant1	-48.39	-20	Pass







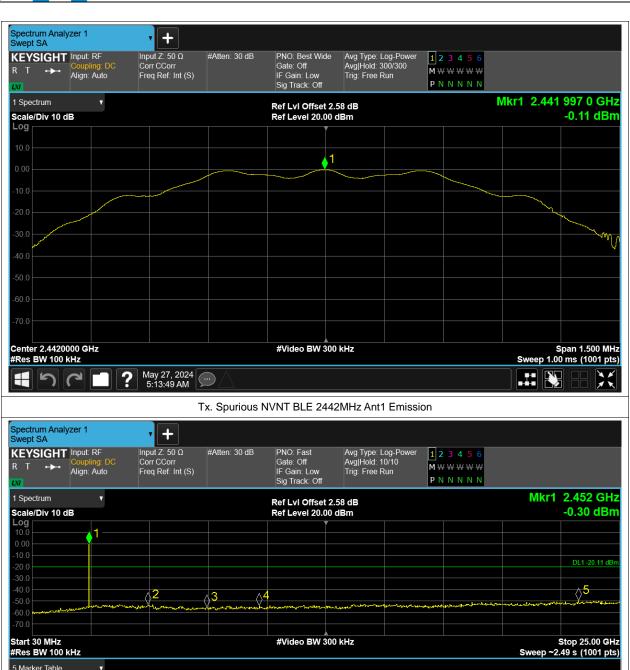

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

-0.3046 dBm

-53.51 dBm -55.61 dBm -54.41 dBm

-49.88 dBm

Function

Function Width

Trace

Mode

N N

3 N 4 N 5 N Scale

Function Value

2.452 GHz

4.974 GHz 7.471 GHz 9.693 GHz

23.252 GHz

May 27, 2024 5:14:17 AM



