



# **CERTIFICATION TEST REPORT**

**Report Number. :** 12132873-E3V2

**Applicant :** SONY MOBILE COMMUNICATIONS, INC.  
4-12-3 HIGASHI-SHINAGAWA,  
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

**FCC ID :** PY7-34118S

**EUT Description :** GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C

**Date Of Issue:**

March 30, 2018

**Prepared by:**

UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888



---

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	03/21/18	Initial Review	
V2	03/30/18	Added Section 6 & Updated section 8	Kiya Kedida

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	6
4.2. SAMPLE CALCULATION .....	6
4.3. MEASUREMENT UNCERTAINTY.....	6
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. DESCRIPTION OF EUT .....	7
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>8</b>
<b>7. REUSE OF TEST DATA.....</b>	<b>9</b>
7.1. INTRODUCTION .....	9
7.2. DEVICES DIFFERENCES .....	9
7.3. SPOT CHECK VERIFICATION RESULTS SUMMARY .....	9
7.4. REFERENCE DETAIL .....	9
<b>8. SPOT CHECK DATA.....</b>	<b>10</b>
8.1. TRANSMITTER ABOVE 1GHz .....	11
8.1.1. BANDEDGE (HIGH CHANNEL) 2Mbps .....	11
8.1.2. HARMONICS AND SPURIOUS EMISSIONS 2Mbps.....	13
<b>9. SETUP PHOTOS.....</b>	<b>15</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SONY MOBILE COMMUNICATIONS, INC.  
4-12-3 HIGASHI-SHINAGAWA,  
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac &  
NFC

**SERIAL NUMBER:** BH90005QBJ

**DATE TESTED:** MARCH 12 - 14, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By

Reviewed By:



Dan Corona  
Operations Leader  
UL Verification Services Inc.



Kiya Kedida  
Project Engineer  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013 and KDB 484596 D01 v01 Referencing Test Data DR01-42712.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 22541-1)
<input checked="" type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 22541-2)
<input type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 22541-3)
	<input type="checkbox"/> Chamber G(IC: 22541-4)
	<input type="checkbox"/> Chamber H(IC: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. Chambers A through C are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under Industry Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

## **5. EQUIPMENT UNDER TEST**

### **5.1. DESCRIPTION OF EUT**

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC.

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T1165	06/24/2018	06/24/2017
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T862	07/10/2018	07/10/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1466	04/11/2018	04/11/2017
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T493	06/23/2018	06/23/2017
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T863	06/09/2018	06/09/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T917	06/29/2018	06/29/2017

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, Dec 1, 2016

NOTE: \*testing is completed before equipment calibration expiration



## 7. REUSE OF TEST DATA

### 7.1. INTRODUCTION

According to the manufacturer, FCC ID: PY7-11821Y and FCC ID: PY7-34118S unlicensed radios (WLAN/BT/BLE/NFC) are electrically identical. The FCC ID: PY7-11821Y test data shall remain representative of FCC ID: PY7-34118S so, FCC ID: PY7-34118S leverages test data from FCC ID: PY7-11821Y.

The applicant takes full responsibility that the test data as referenced in this section represents compliance for this FCC ID.

### 7.2. DEVICES DIFFERENCES

Difference between PY7-11821Y and PY7-34118S:

Sony Mobile Communications Inc. hereby declares that the difference between PY7-11821Y and PY7-34118S is related only to the cellular part and no change is non-cellular (WLAN/Bluetooth/NFC) parts. The non-cellular parts which are electrically identical, and therefore the following report/data of PY7-11821Y may represent for PY7-34118S.

### 7.3. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device PY7-34118S for radiated harmonic spurious. The data from the application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the summary and appendix A.

### 7.4. REFERENCE DETAIL

Equipment Class	Reference FCC ID	Report Title/Section
DTS (BLE)	PY7-11821Y	12132671-E3V2 FCC Report BLE

## 8. SPOT CHECK DATA

### LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.


For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to worst case mode BLE (2Mbps).

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 8.1. TRANSMITTER ABOVE 1GHz

### 8.1.1. BANDEDGE (HIGH CHANNEL) 2Mbps

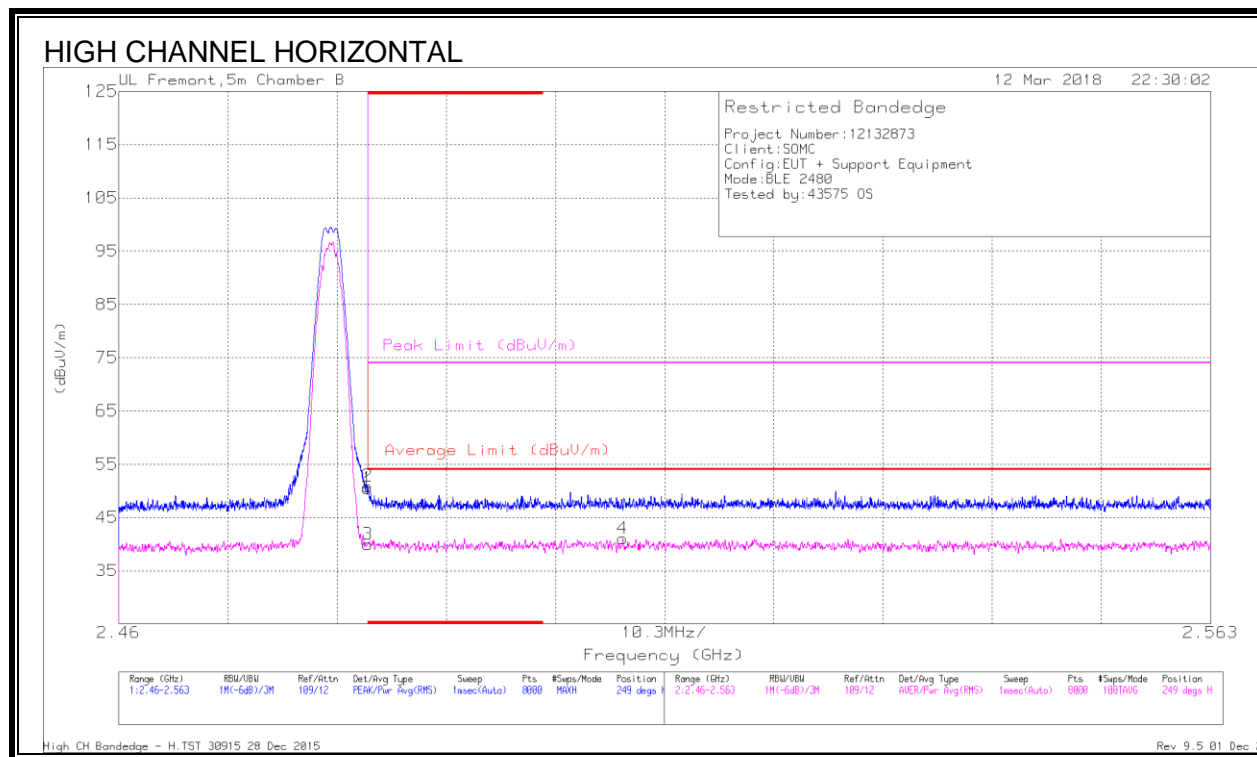


#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.23	Pk	32.5	-21.3	0	50.43	-	-	74	-23.57	249	275	H
2	* 2.484	39.65	Pk	32.5	-21.3	0	50.85	-	-	74	-23.15	249	275	H
3	* 2.484	26.31	RMS	32.5	-21.3	2.41	39.92	54	-14.08	-	-	249	275	H
4	2.508	27.11	RMS	32.6	-21.1	2.41	41.02	54	-12.98	-	-	249	275	H

\* - indicates frequency in CFR47 Pt 15 Restricted Band

Pk - Peak detector

RMS - RMS detection

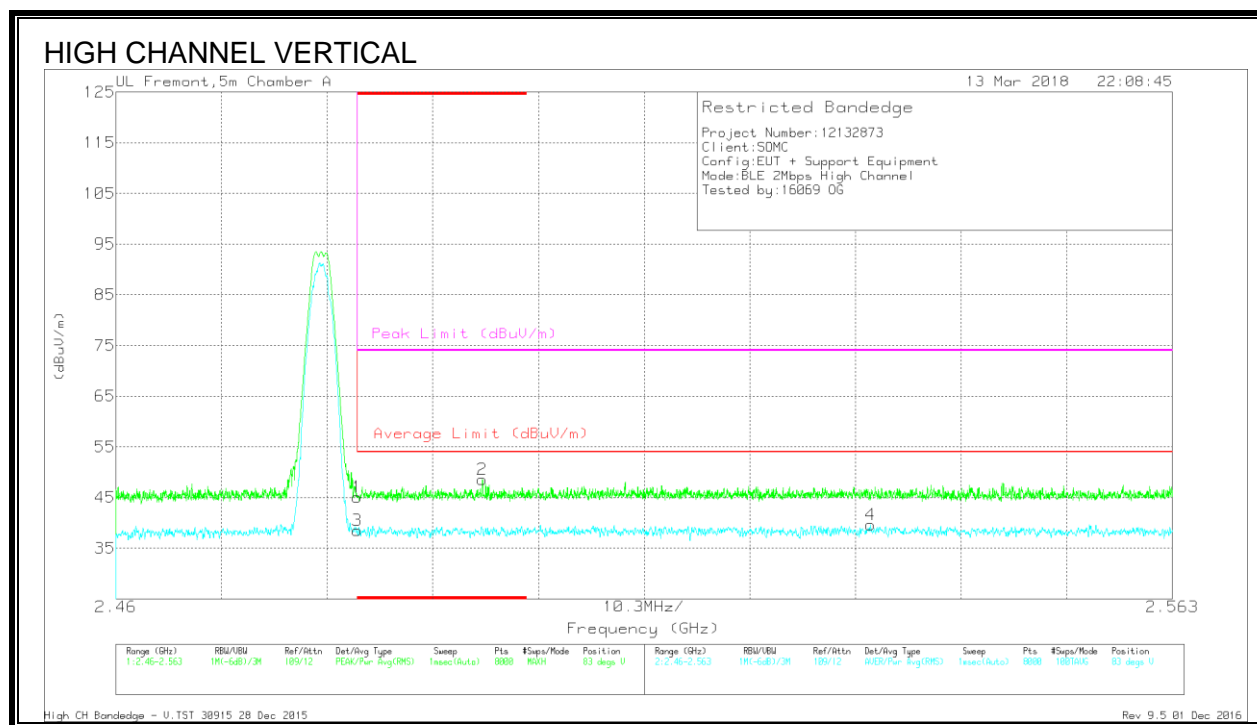

## Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.22	Pk	32.3	-23.4	0	45.12	-	-	74	-28.88	83	132	V
2	* 2.496	39.61	Pk	32.4	-23.4	0	48.61	-	-	74	-25.39	83	132	V
3	* 2.484	27.2	RMS	32.3	-23.4	2.41	38.51	54	-15.49	-	-	83	132	V
4	2.534	28.06	RMS	32.4	-23.3	2.41	39.57	54	-14.43	-	-	83	132	V

\* - indicates frequency in CFR47 Pt Restricted Band

Pk - Peak detector

RMS - RMS detection

## 8.1.2. HARMONICS AND SPURIOUS EMISSIONS 2Mbps

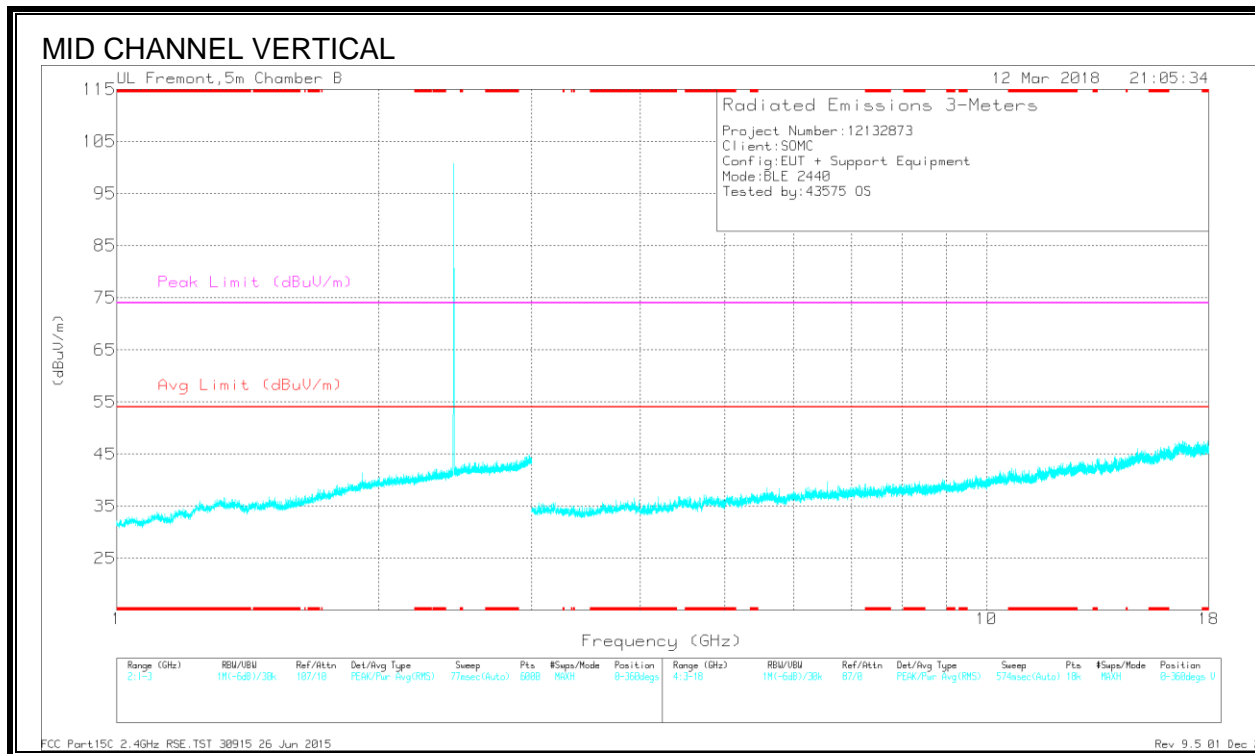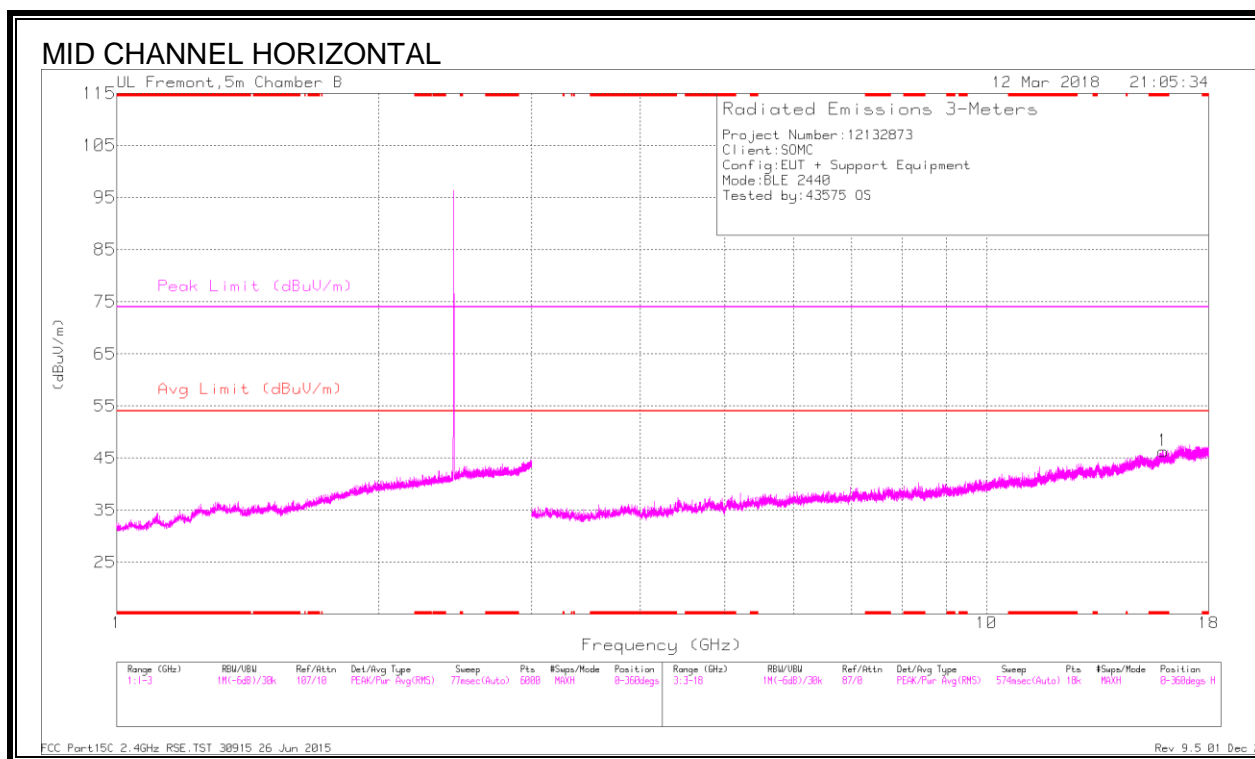

## Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 15.966	27.14	Pk	41.1	-21.9	0	46.34	-	-	74	-27.66	0-360	102	H

\* - indicates frequency in CFR47 Pt 15 Restricted Band

Pk - Peak detector

## Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 15.967	33.18	PK2	41.1	-21.9	0	52.38	-	-	74	-21.62	59	255	H
* 15.966	21.22	MAv1	41.1	-21.9	2.41	42.83	54	-11.17	-	-	59	255	H

\* - indicates frequency in CFR47 Pt 15 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

## APPENDIX A

PY7-34118S SPOT CHECK RESULTS									
Technology	Test Item	Channel	Measured Frequency	PY7-11821Y		PY7-34118S		Delta (dB)	
				Peak	Ave	Peak	Peak	Ave	Peak
BLE	RBE	39	2484MHz	52.53	41.47	50.85	41.02	-1.68	-0.45
	RSE	19	15963MHz	52.03	43.91	52.38	42.83	0.35	-1.08
Note:2Mbps is the worst mode									

## END OF REPORT