



FCC TEST REPORT

FCC ID: SY4-A01014

On Behalf of

Shanghai Huace Navigation Technology LTD.

Geodetic GNSS Receiver (i50U)

Model No.: 1150322131145

Prepared for : Shanghai Huace Navigation Technology LTD.
Address : Building D, 599 Gaojing Road, Qingpu District, Shanghai,
China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : T1881531 01
Date of Receipt : September 25, 2018
Date of Test : September 25, 2018-November 21, 2018
Date of Report : November 21, 2018
Version Number : REV0

TABLE OF CONTENTS

Description	Page
1. General Information	5
1.1. Description of Device (EUT).....	5
1.2. Accessories of Device (EUT)	5
1.3. Tested Supporting System Details.	6
1.4. Block Diagram of connection between EUT and simulators.....	6
2. Summary Of Standards And Results	7
2.1. Description of Standards and Results	7
2.2. Test Mode Description.....	8
2.3. Test Equipment List	9
2.4. Test Facility	10
2.5. Measurement Uncertainty	10
3. Power Line Conducted Emission Test	11
3.1. Test Limits	11
3.2. Block Diagram of Test Setup.....	11
3.3. Configuration of EUT on Test	12
3.4. Operating Condition of EUT	12
3.5. Test Procedure	12
3.6. Test Results	13
4. Radiated Emission Test.....	16
4.1. Test Limit.....	16
4.2. Block Diagram of Test Setup.....	17
4.3. Configuration of EUT on Test	18
4.4. Operating Condition of EUT	18
4.5. Test Procedure	18
4.6. Test Results.....	19
5. Photograph	25
5.1. Photo of Radiated Emission Test (In Semi Anechoic Chamber).....	25
5.2. Photo of Power Line Conducted Emission Test	26
6. Photos Of The EUT	27

TEST REPORT DECLARATION


Applicant : Shanghai Huace Navigation Technology LTD.
 Address : Building D, 599 Gaojing Road, Qingpu District, Shanghai, China
 Manufacturer : Shanghai Huace Navigation Technology LTD.
 Address : Building D, 599 Gaojing Road, Qingpu District, Shanghai, China
 EUT Description : Geodetic GNSS Receiver (i50U)
 (A) Model No. : 1150322131145
 (B) Trademark : 

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart B Class B 2017, ANSI C63.4:2014

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Reak Yang
 Project Engineer 

Approved by (name + signature).....: Simple Guan
 Project Manager 

Date of issue..... : November 21, 2018

Revision History

Revision	Issue Date	Revisions	Revised By
REV0	November 21, 2018	Initial released Issue	Simple Guan

1. General Information

1.1. Description of Device (EUT)

Product Name	:	Geodetic GNSS Receiver (i50U)
Model Number	:	1150322131145
Note	:	The model name “1150322131145” corresponding client’s internal model is “Geodetic GNSS Receiver (i50U).
Trademark	:	
Highest Frequency	:	More than 108MHz
Test Voltage	:	12-36V $\overline{=}$, 2A (for DC port) or 7.4V $\overline{=}$, 3400mAh (for replaceable lithium battery)
Software version	:	V1.0.2ST
Hardware version	:	V2.2

1.2. Accessories of Device (EUT)

Accessories1	:	AC/DC ADAPTER
Manufacturer	:	Shanghai Huace Navigation Technology LTD.
Model	:	GM601-120400
Ratings	:	Input: 100-240V, 50/60Hz, 2.0A Output: 12VDC, 4.0A


1.3. Tested Supporting System Details.

Manufacturer	Description	Model	Serial Number	FCC Approval
ACER	USB Keyboard	SK-9625	KBUSB1580500037E010 0	FCC DoC
ACER	USB Mouse	MS.11200.014	M-UAY-ACR2	FCC DoC
HP	Printer	HP1020	CNCJ410726	CE
ACER	Monitor	G205HV	SNID:10306738385	CE
ACER	Personal Computer	ASPIRE M1830	PTSF90C00305005CAC3 000	DOC

1.4. Block Diagram of connection between EUT and simulators

For Test

Data Transmitting Mode



EUT: Geodetic GNSS Receiver (i50U)

Signal Cable Description of the above Support Units

No.	Port Name	Cable	Length	Shielded (Yes or No)	Detachable (Yes or No)
/	/	/	/	/	/
/	/	/	/	/	/

2. Summary Of Standards And Results

2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

EMISSION			
Description of Test Item	Standard	Limits	Results
Power Line Conducted Emission Test	FCC Part 15:2017 ANSI C63.4:2014	Class B	P
Radiated Emission Test	FCC Part 15:2017 ANSI C63.4:2014	Class B	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.			

2.2. Test Mode Description

For Radiated Emission Test		
Mode No.	Test Mode	Test Voltage
※1.	Data transmitting	DC 12V From adapter
2.	GPS Receiver	DC 12V From adapter

Note: ※2 is worst case mode tests, so this report only reflected the worst mode in each part.

For Power Line Conducted Emission Test		
Mode No.	Test Mode	Test Voltage
1.	Data transmitting	DC 12V From adapter
2.	GPS Receiver	DC 12V From adapter

2.3. Test Equipment List

For Power Line Conducted Emission Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	101165	2018.09.21	1 Year
2.	L.I.S.N.#1	Schwarz beck	NSLK8126	8126-466	2018.09.21	1 Year
3.	L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2018.09.21	1 Year
4.	Pulse Limiter	Schwarz beck	9516F	9618	2018.09.21	1 Year

For Frequency Range 30MHz~1GHz Radiated Emission Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	Rohde&Schwarz	ESR	1316.3003K03-102082-Wa	2018.09.21	1 Year
2	Bilog Antenna	Schwarz beck	VULB 9168	9168-627	2018.09.24	2 Year

For Frequency Range above 1GHz Radiated Emission Test Equipment:						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	ROHDE&SCHWARZ	FSU	1166.1660.26	2018.09.21	1 Year
2	Horn Antenna	Schwarz beck	BBHA 9120 D	BBHA 9120 D(1201)	2018.04.13	2 Year
3	Amplifier	Agilent	8449B	3008A02664	2018.09.21	1 Year

2.4. Test Facility

Shenzhen Alpha Product Testing Co., Ltd.

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 25, 2017 Certificated by IC

Registration Number: 12135A

2.5. Measurement Uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.74dB
Uncertainty for Radiation Emission test (<1G)	3.77 dB (Distance: 3m Polarize: V)
	3.80 dB (Distance: 3m Polarize: H)
Uncertainty for Radiation Emission test (>1G)	4.13 dB (Distance: 3m Polarize: V)
	4.16 dB (Distance: 3m Polarize: H)
(95% confidence levels, k=2)	


3. Power Line Conducted Emission Test

3.1. Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes:
1. Emission level=Read level + LISN factor-Preamplifier factor + Cable loss
 2. * Decreasing linearly with logarithm of frequency.
 3. The lower limit shall apply at the transition frequencies.

3.2. Block Diagram of Test Setup

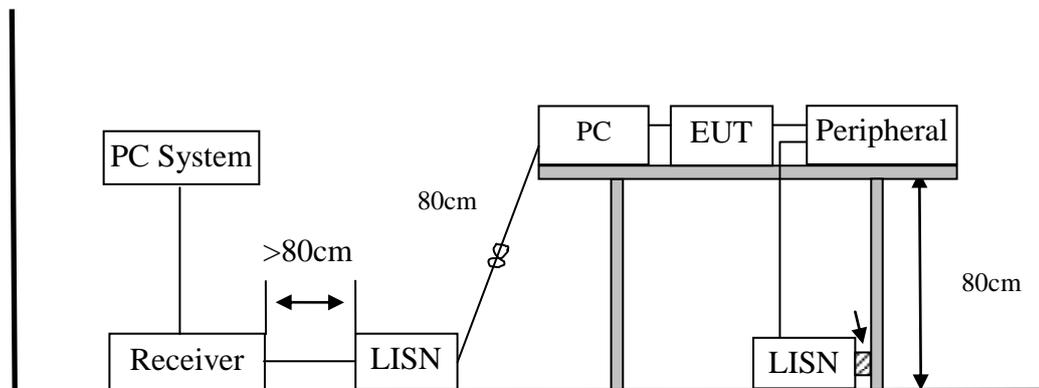

3.3. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 3.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

3.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4:2014 on conducted Emission test.
- (2) The frequency range from 150kHz to 30MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 9kHz.

3.6. Test Results

Test Date	:	2018.09.27	Temperature	:	23.9°C
Test Engineer	:	Reak Yang	Humidity	:	46%
Test Mode	:	Data transmitting			
Test Results	:	Pass			
Note:	1. The test results are listed in next pages.				
	1. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.				
	2. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.				


Polarity: L

File :T1881531 01

Data :#2

Date: 2018-9-27

Time: 17:14:28

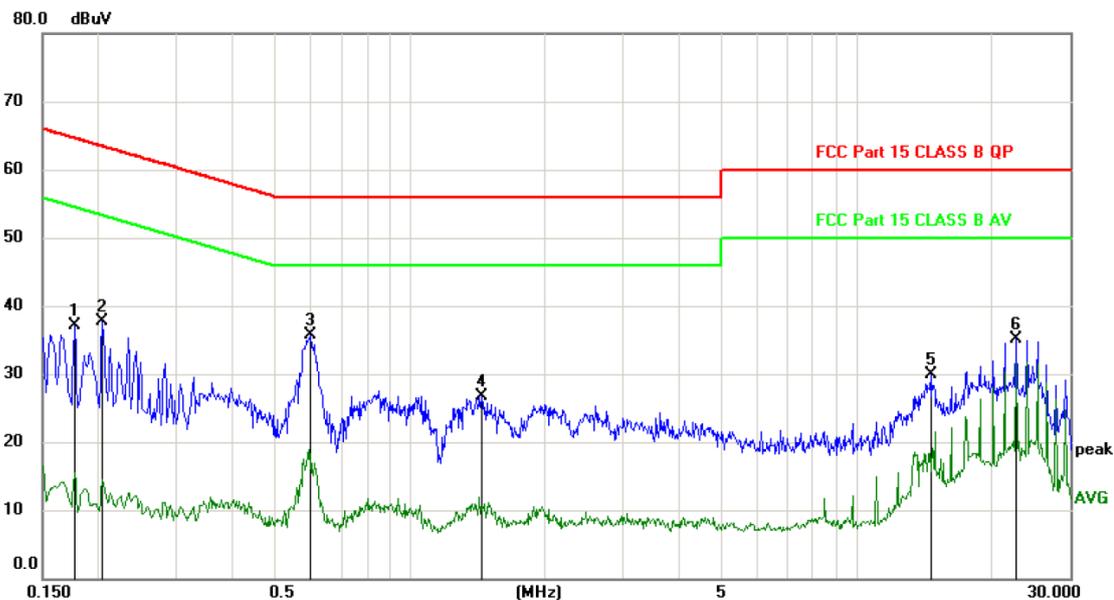


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1770	36.98	0.13	37.11	64.63	-27.52	peak	
2		0.2040	37.62	0.13	37.75	63.45	-25.70	peak	
3	*	0.6000	35.63	0.13	35.76	56.00	-20.24	peak	
4		1.4430	26.56	0.15	26.71	56.00	-29.29	peak	
5		14.6640	29.52	0.48	30.00	60.00	-30.00	peak	
6		22.7700	34.22	0.82	35.04	60.00	-24.96	peak	

*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Polarity: N

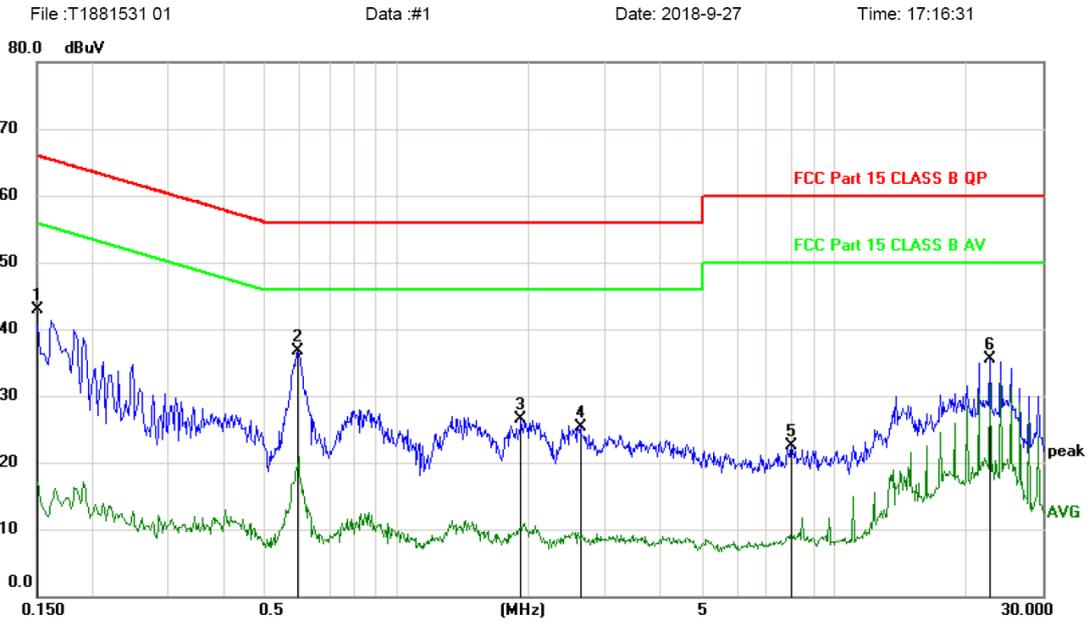

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	42.85	0.13	42.98	66.00	-23.02	peak	
2	*	0.5940	36.55	0.13	36.68	56.00	-19.32	peak	
3		1.9260	26.30	0.16	26.46	56.00	-29.54	peak	
4		2.6280	25.05	0.19	25.24	56.00	-30.76	peak	
5		7.9890	22.21	0.31	22.52	60.00	-37.48	peak	
6		22.7610	34.61	0.82	35.43	60.00	-24.57	peak	

*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

4. RADIATED EMISSION TEST

4.1. Test Limit


Frequency MHz			Distance (Meters)	Distance (Meters)
30	~	88	3	40.0
88	~	216	3	43.5
216	~	960	3	46.0
960	~	1000	3	54.0
Above 1GHz			3	74(Peak) 54(Average)

- Notes:
1. The smaller limit shall apply at the cross point between two frequency bands.
 2. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 3. Frequency range of radiated measurements:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

4.2. Block Diagram of Test Setup

In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

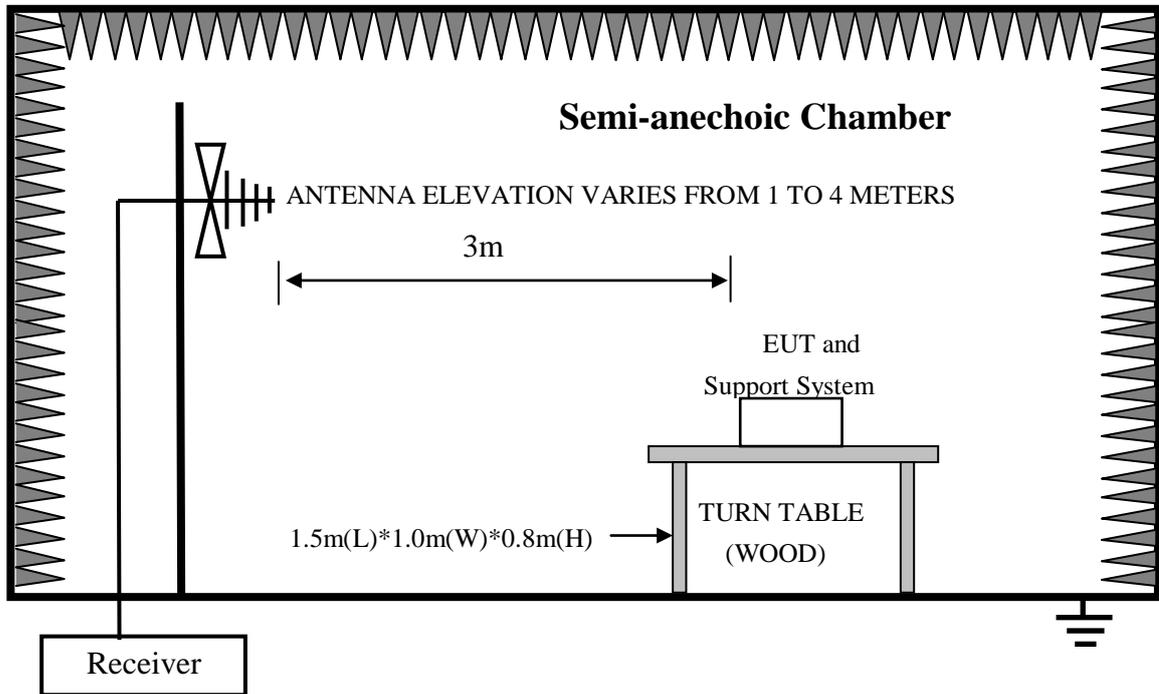

In Semi Anechoic Chamber (3m) Test Setup Diagram for Above 1GHz

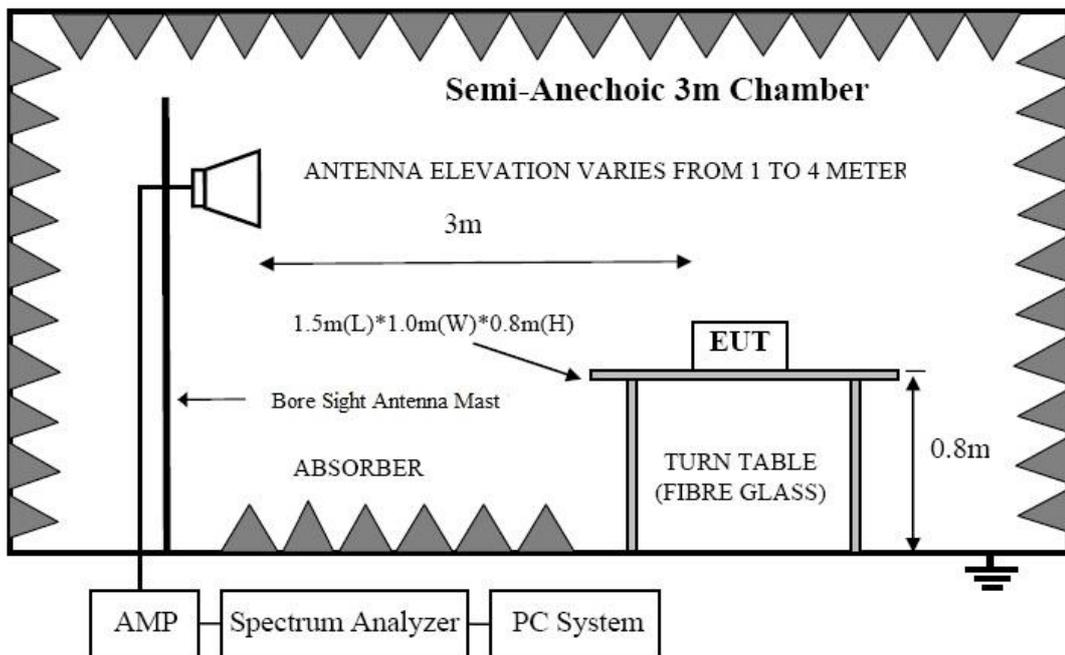

4.3. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

4.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 4.2.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode and 15 minutes before taking the test.

4.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4:2014 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) The frequency range from 30MHz to 1000MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESR) is set at 120kHz.
- (4) The frequency range from above 1GHz is checked, the bandwidth of spectrum analyzer (Spectrum Analyzer FSU) is set at 1MHz.
- (5) The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values, the frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (6) The test results are reported on Section 4.7.

4.6. Test Results

Frequency Range	: 30MHz~1000MHz		
Test Date	: 2018.09.26	Temperature	: 24.2°C
Test Engineer	: Reak Yang	Humidity	: 53%
Test Mode	: Data transmitting		
Test Results	: PASS		
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.		


Antenna polarity: Vertical

File :1150322131145

Data :#3

Date: 2018/9/26

Time: 0:11:05

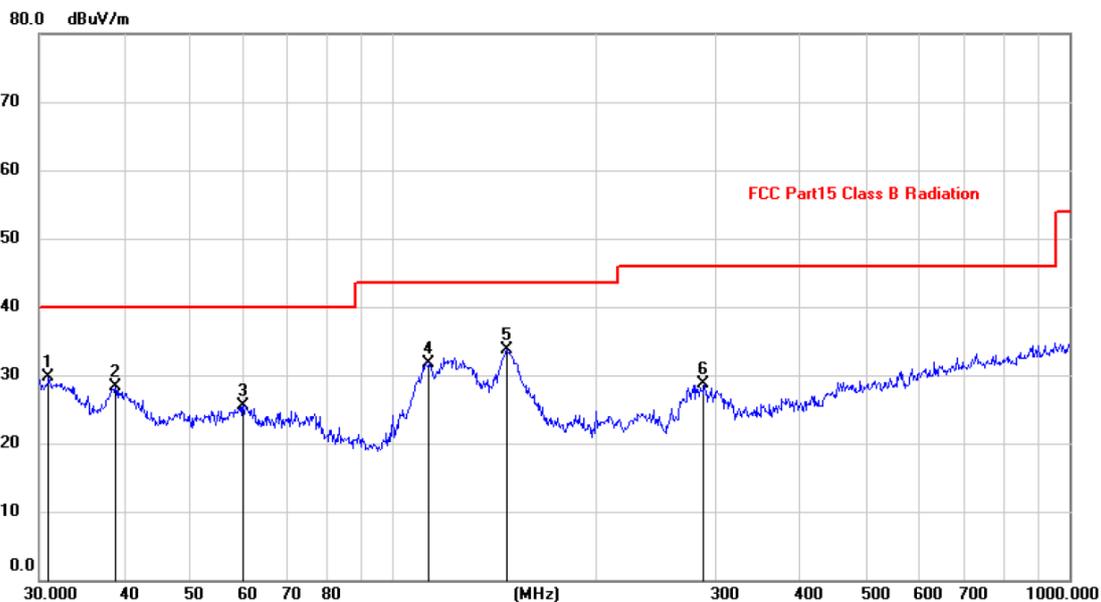

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.9618	16.26	13.35	29.61	40.00	-10.39			peak
2		39.0243	14.13	14.20	28.33	40.00	-11.67			peak
3		60.0690	12.47	12.96	25.43	40.00	-14.57			peak
4		113.3161	19.80	11.87	31.67	43.50	-11.83			peak
5	*	147.4036	19.27	14.36	33.63	43.50	-9.87			peak
6		289.0020	15.68	13.11	28.79	46.00	-17.21			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Antenna polarity: Horizontal

File :1150322131145

Data :#4

Date: 2018/9/26

Time: 0:13:25

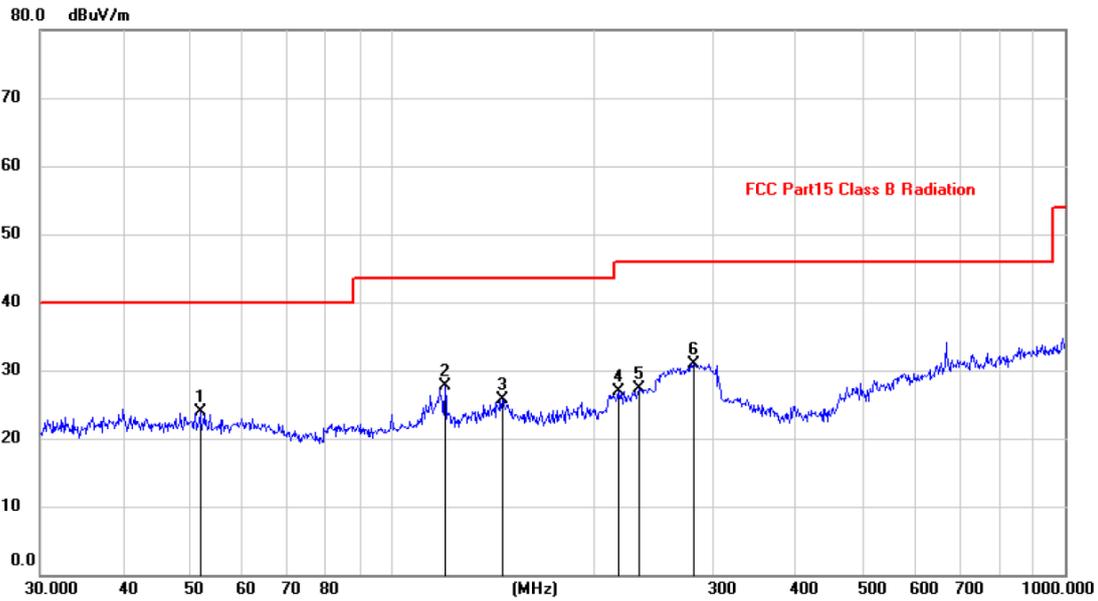

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		51.8430	10.32	13.62	23.94	40.00	-16.06	peak	
2		119.8555	15.14	12.58	27.72	43.50	-15.78	peak	
3		145.8610	11.46	14.25	25.71	43.50	-17.79	peak	
4		216.7828	15.77	11.11	26.88	46.00	-19.12	peak	
5		233.3486	15.44	11.85	27.29	46.00	-18.71	peak	
6	*	281.9945	17.98	13.00	30.98	46.00	-15.02	peak	


Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Frequency Range : Above 1GHz	
Test Date : 2018.10.26	Temperature : 24.2°C
Test Engineer : Reak Yang	Humidity : 53%
Test Mode : Data transmitting	
Test Results : Pass	
Note: 1. The data is shown in the next page. 2. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.	

Antenna polarity: Vertical

File : Data :#13 Date: 2018/9/26 Time: 23:23:03

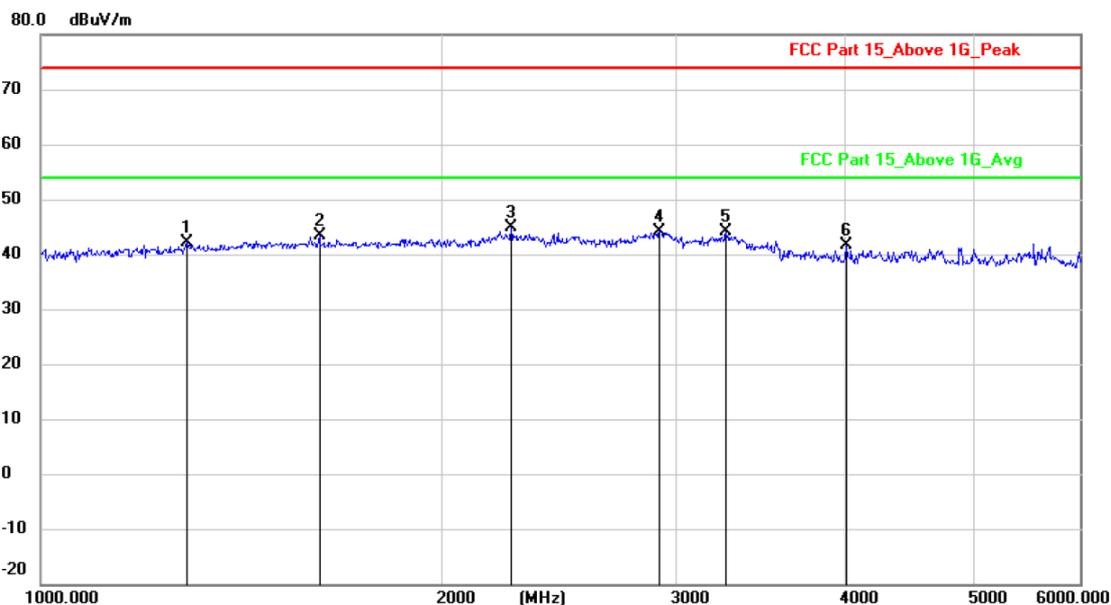


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1287.743	49.68	-7.43	42.25	74.00	-31.75			peak
2		1617.161	50.24	-6.84	43.40	74.00	-30.60			peak
3	*	2249.450	48.27	-3.33	44.94	74.00	-29.06			peak
4		2912.342	46.65	-2.57	44.08	74.00	-29.92			peak
5		3260.731	46.54	-2.33	44.21	74.00	-29.79			peak
6		4014.864	46.73	-5.01	41.72	74.00	-32.28			peak

Note: 1. *:Maximum data; x:Over limit; l:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Antenna polarity: Horizontal

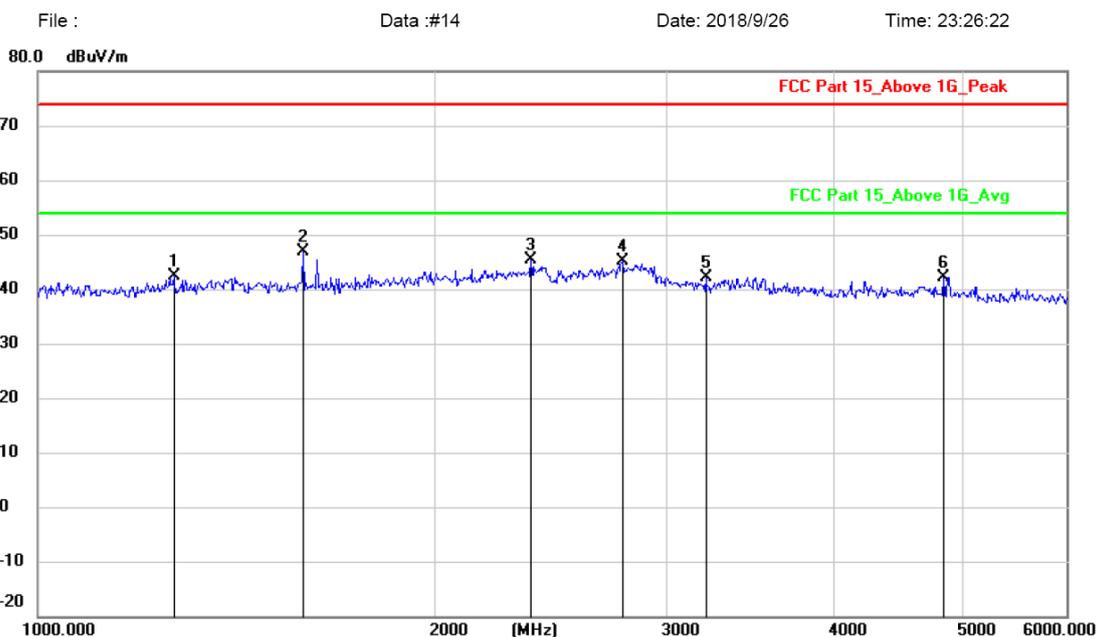

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1267.123	49.93	-7.63	42.30	74.00	-31.70			peak
2	*	1591.266	53.78	-6.84	46.94	74.00	-27.06			peak
3		2365.301	48.69	-3.38	45.31	74.00	-28.69			peak
4		2774.669	47.98	-2.85	45.13	74.00	-28.87			peak
5		3202.769	44.25	-2.16	42.09	74.00	-31.91			peak
6		4846.839	44.92	-2.83	42.09	74.00	-31.91			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

5. PHOTOGRAPH

5.1. Photo of Radiated Emission Test (In Semi Anechoic Chamber)




Below 1G





Above 1GHz


5.2.Photo of Power Line Conducted Emission Test

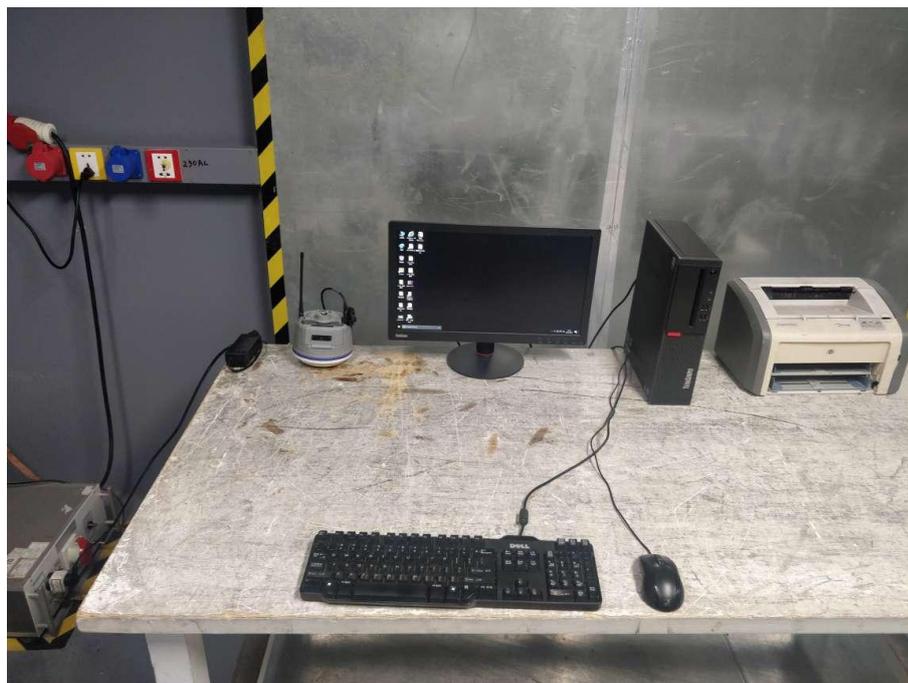


6. PHOTOS OF THE EUT


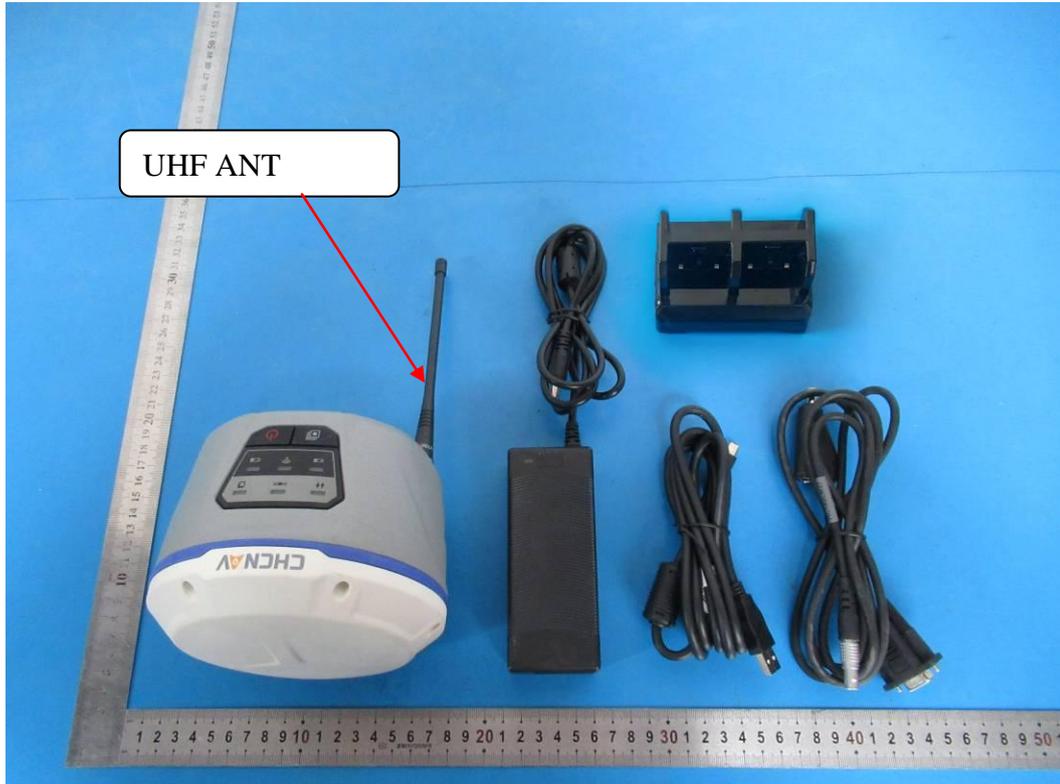



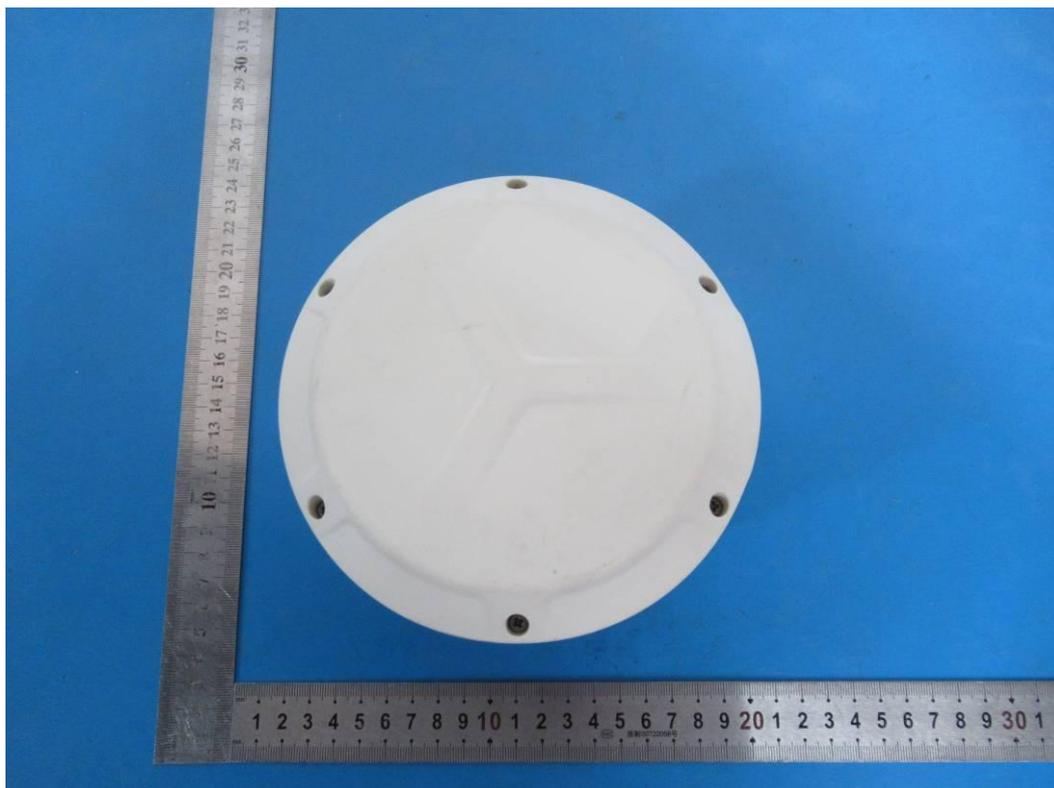



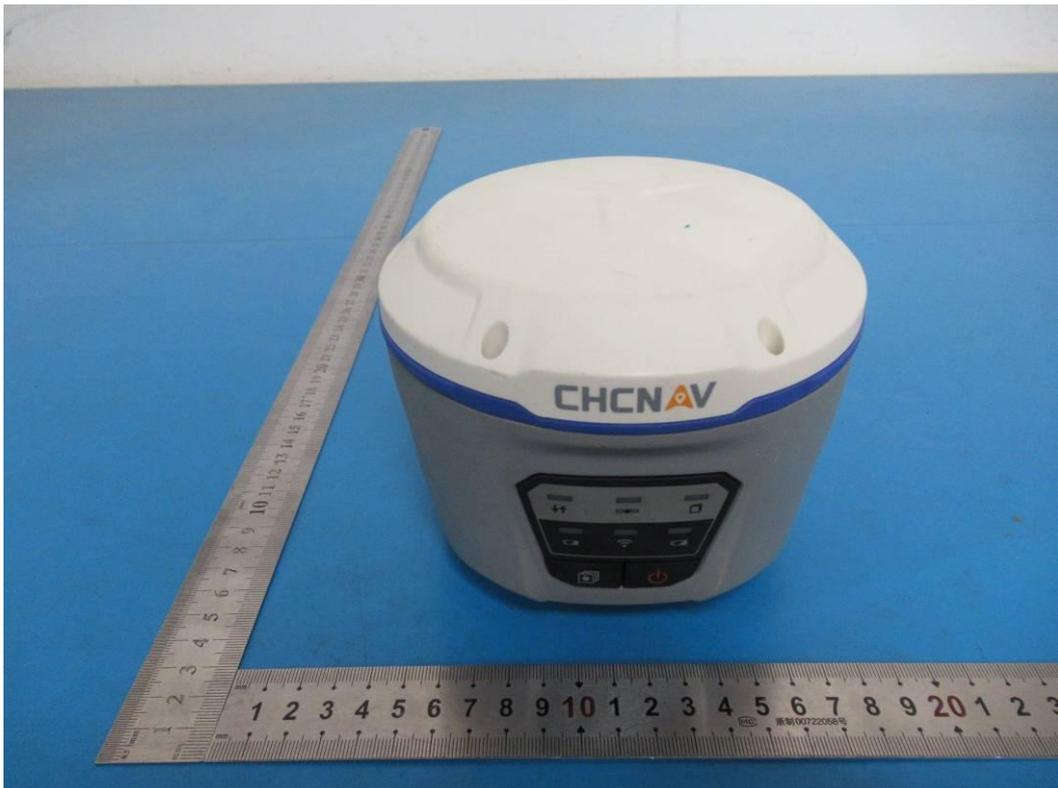



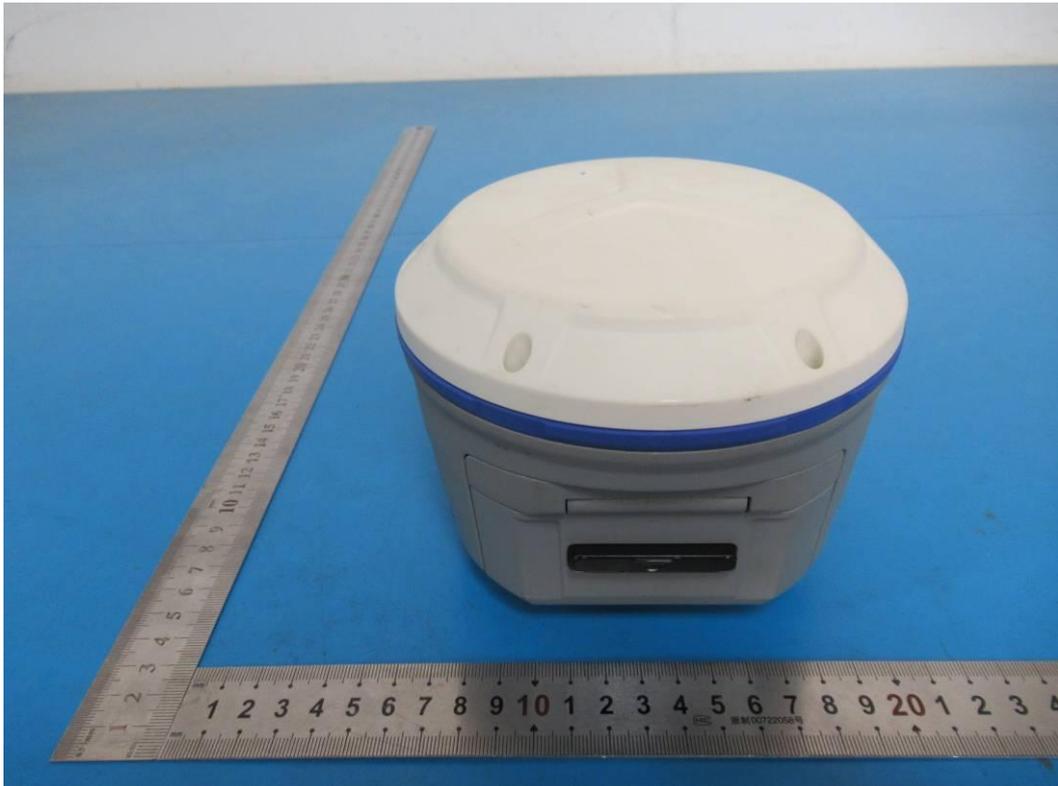






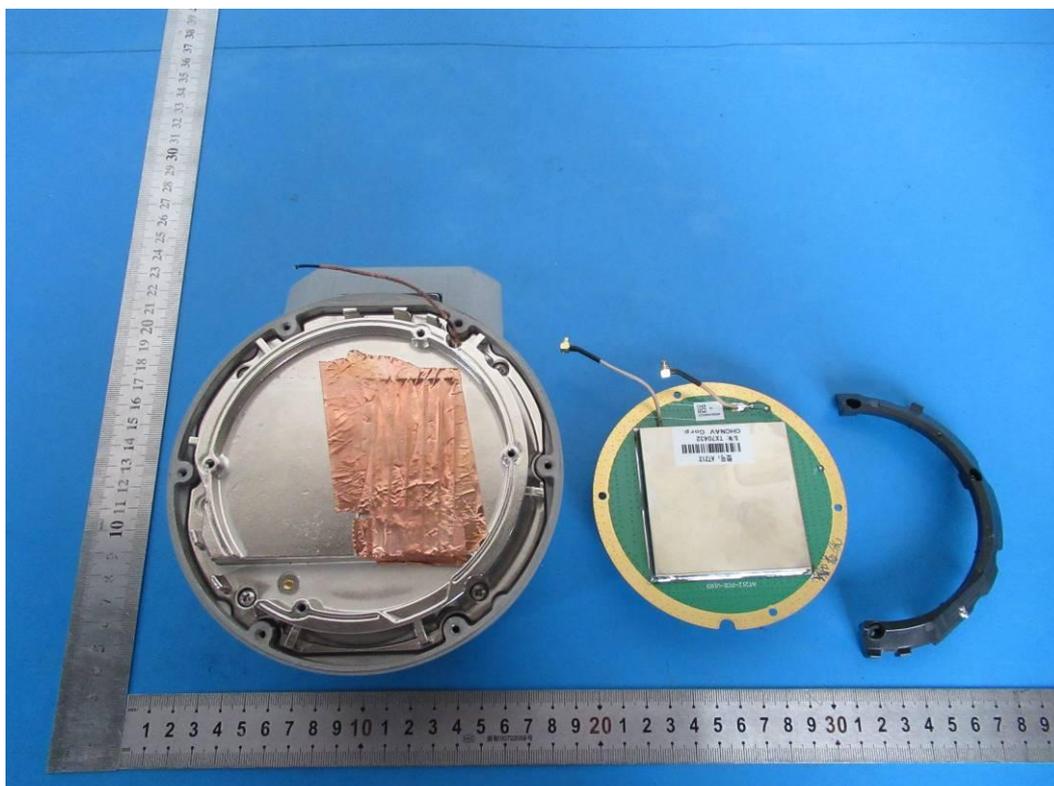
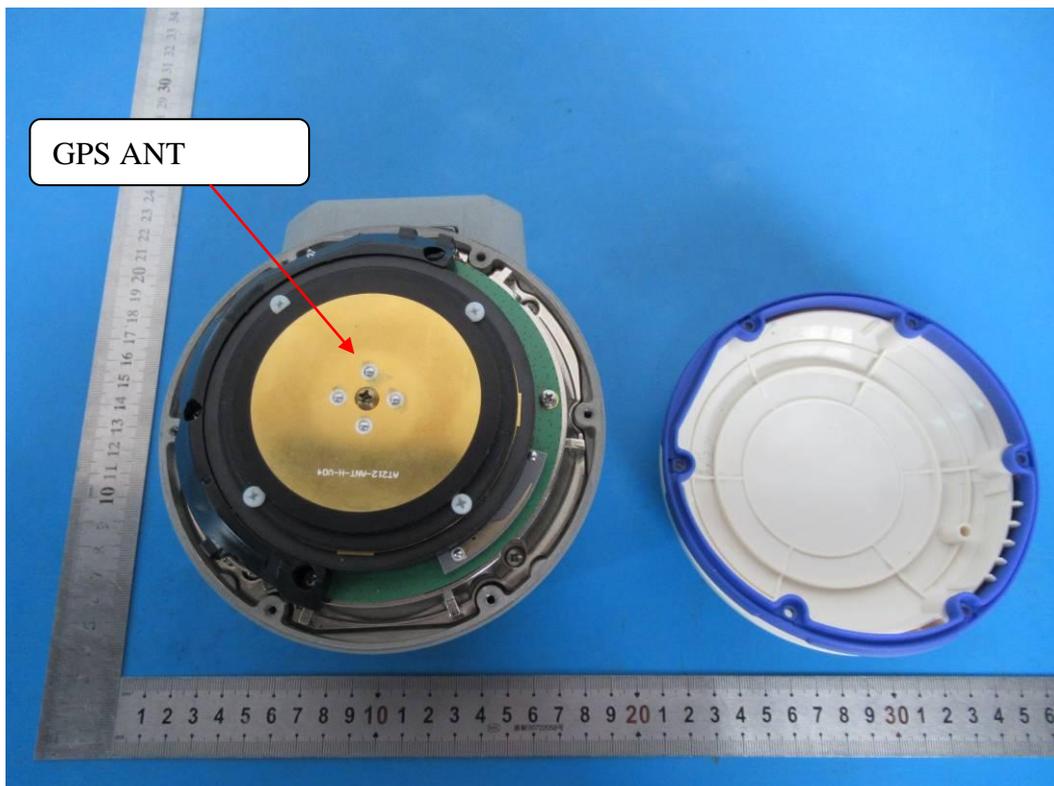


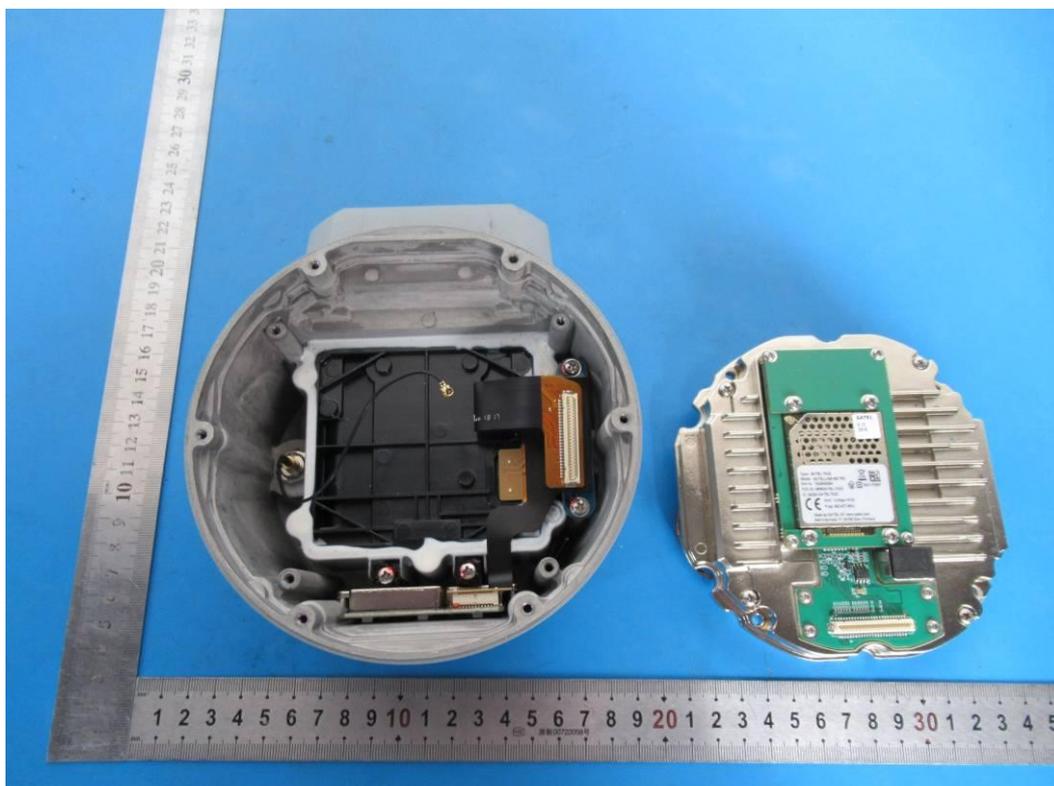
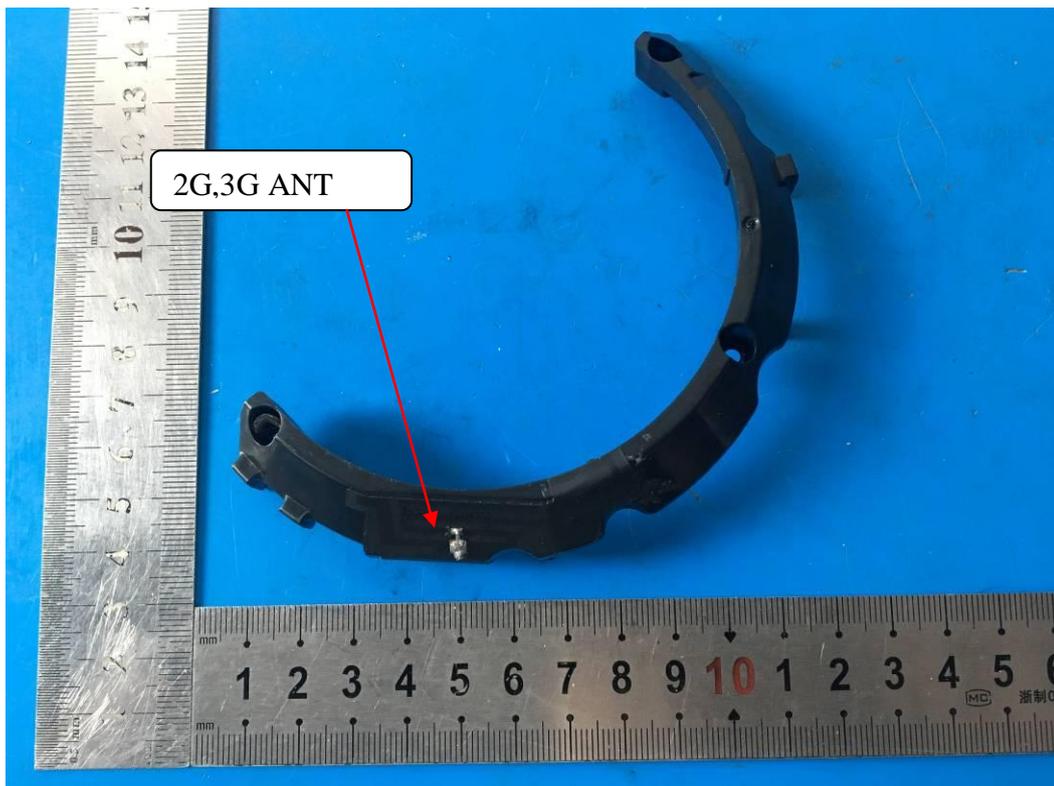


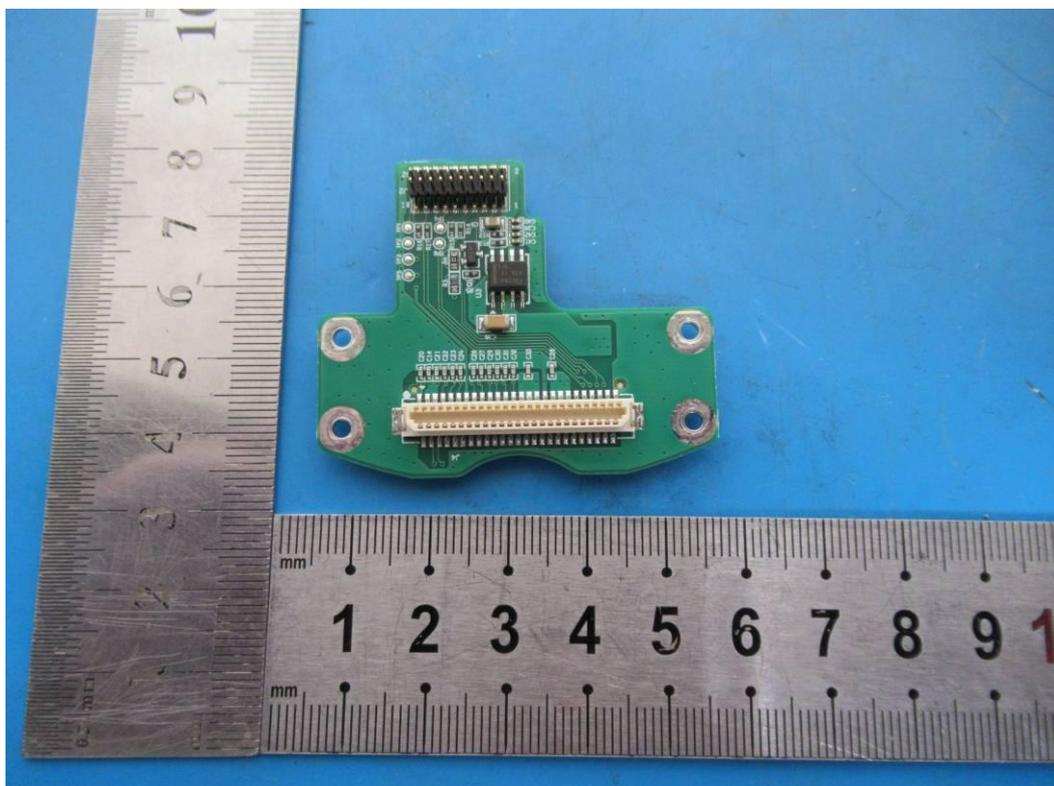
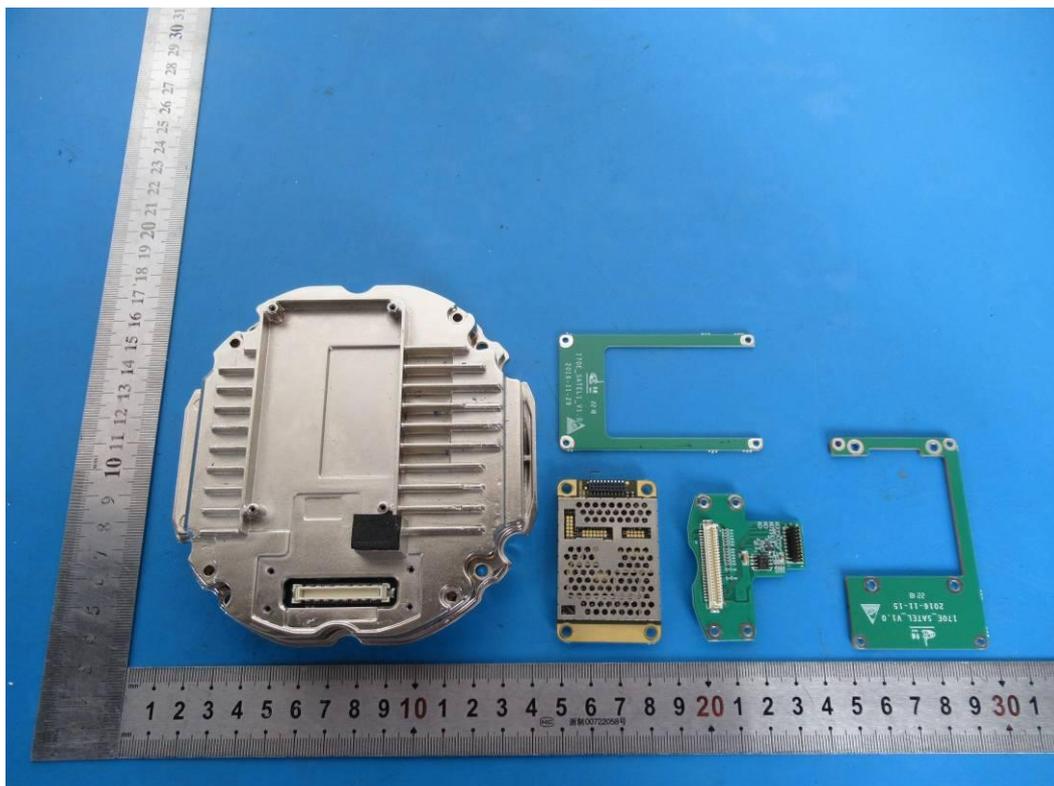


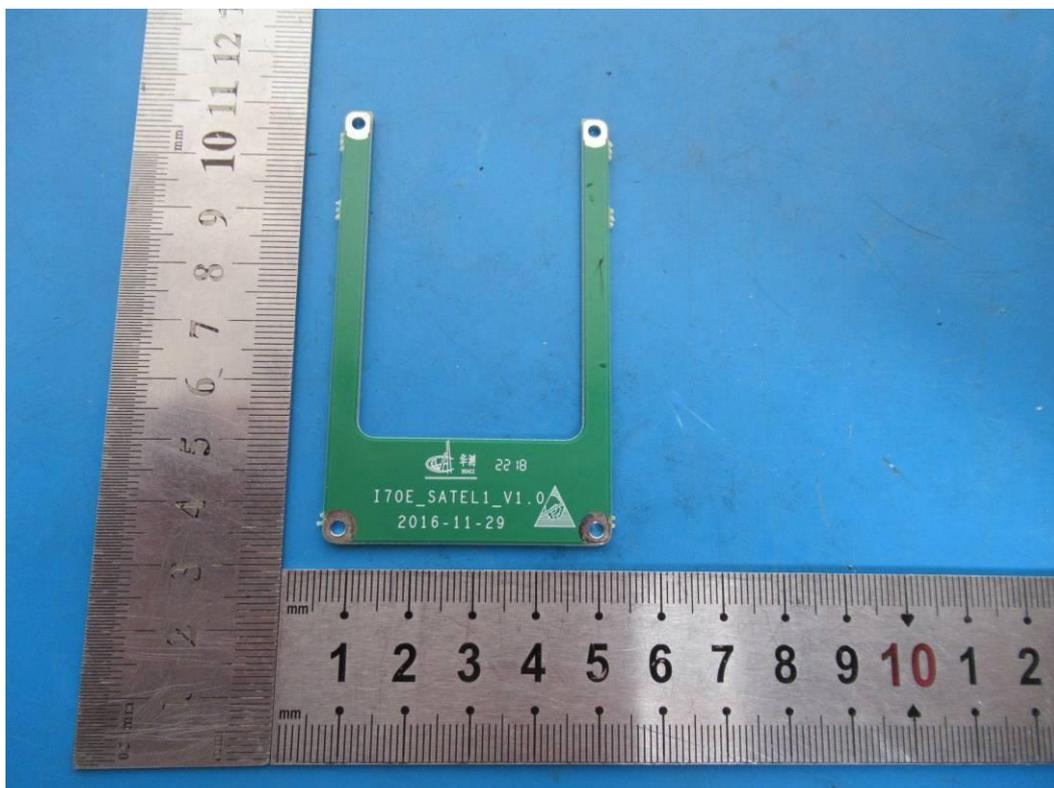
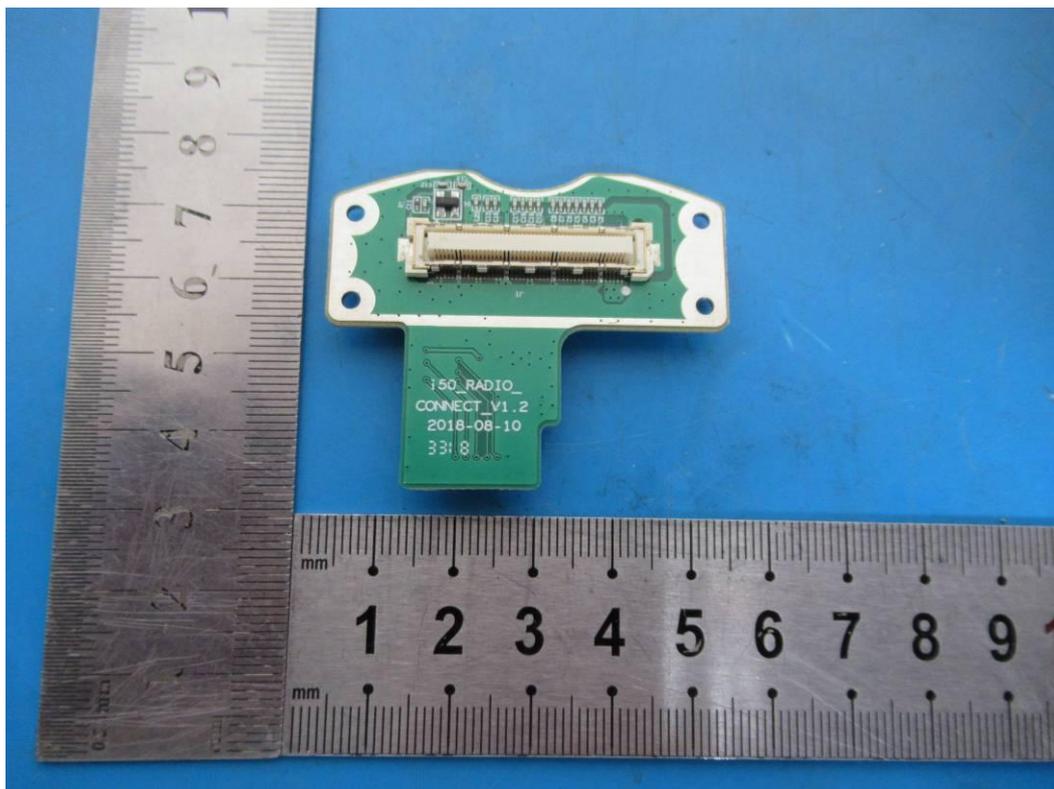


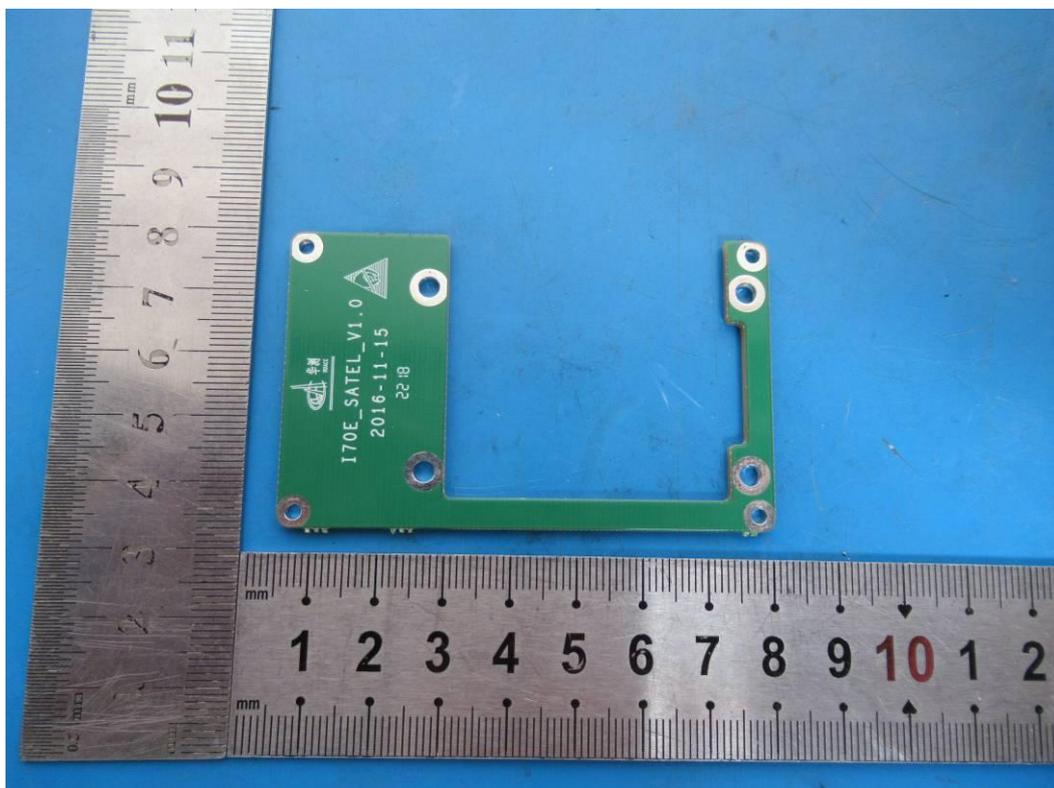
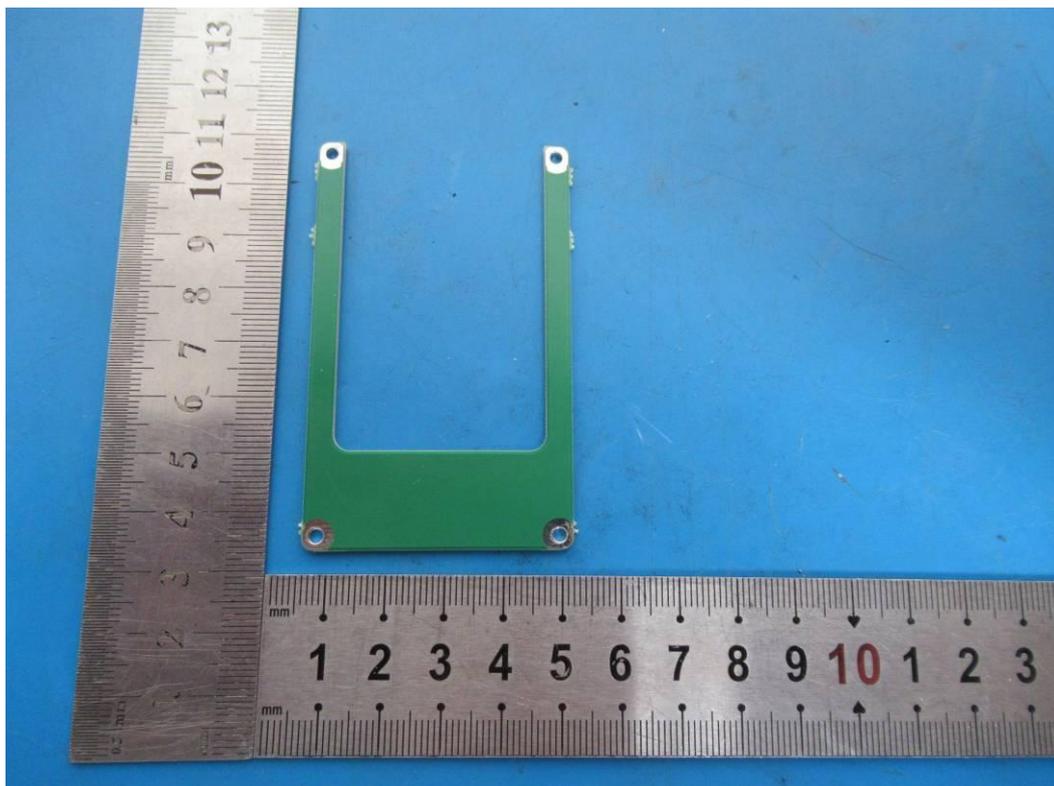


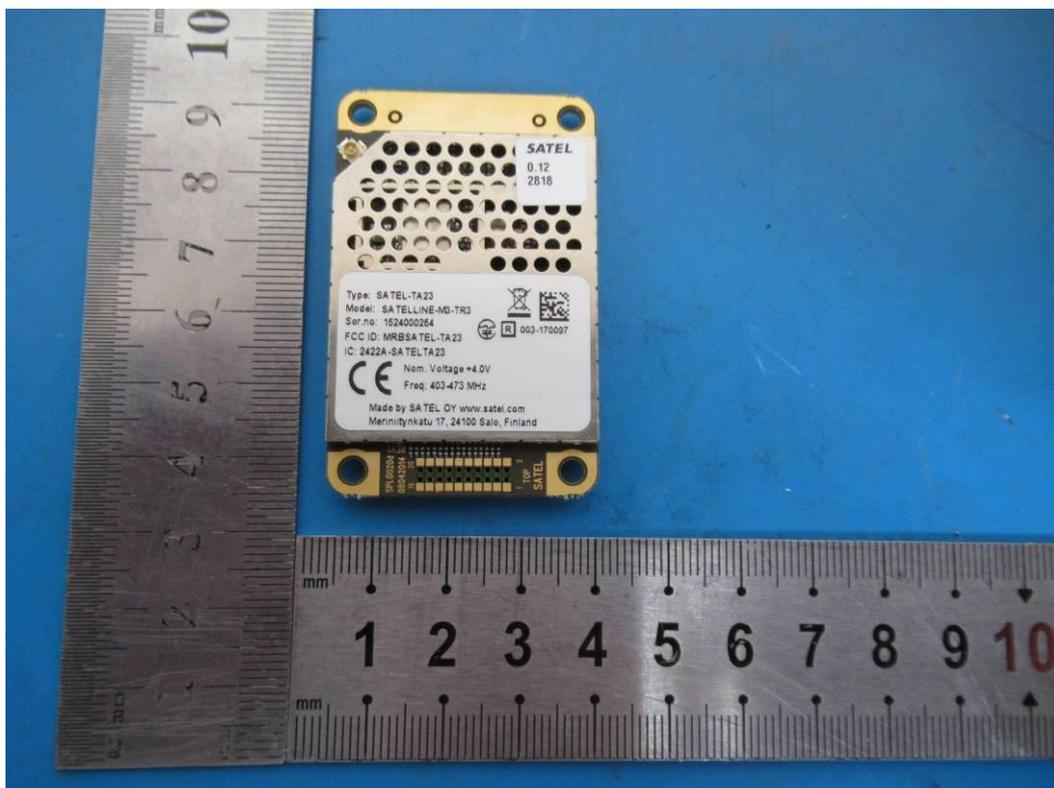
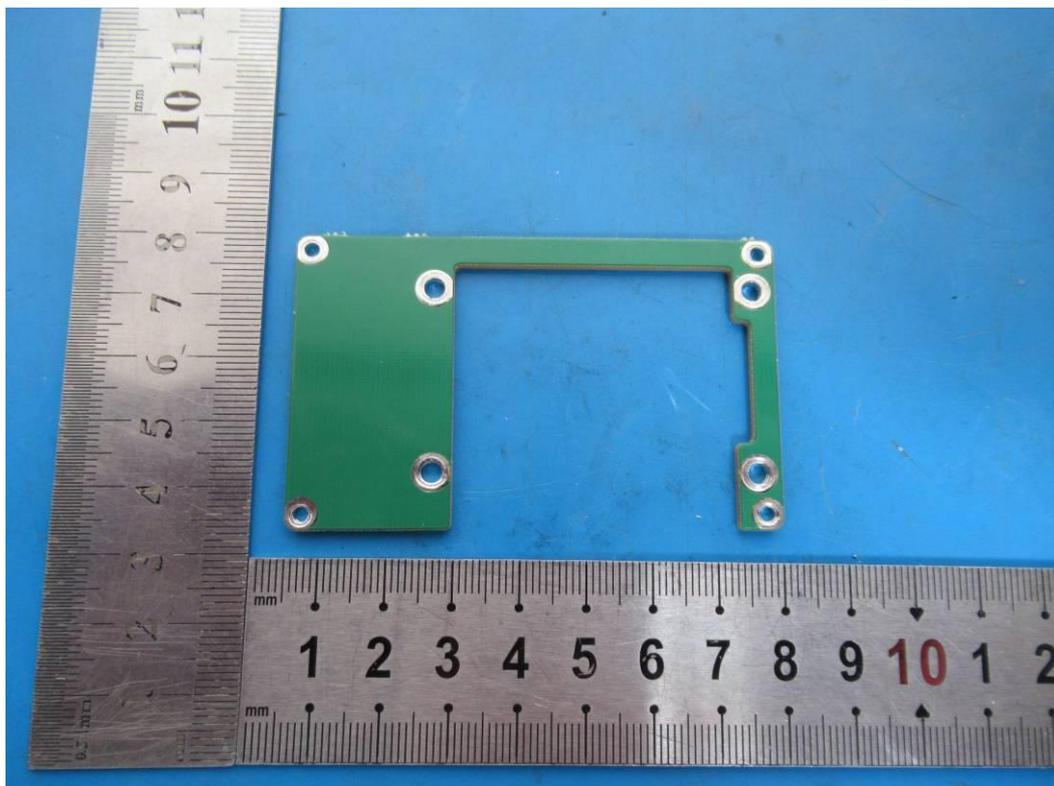


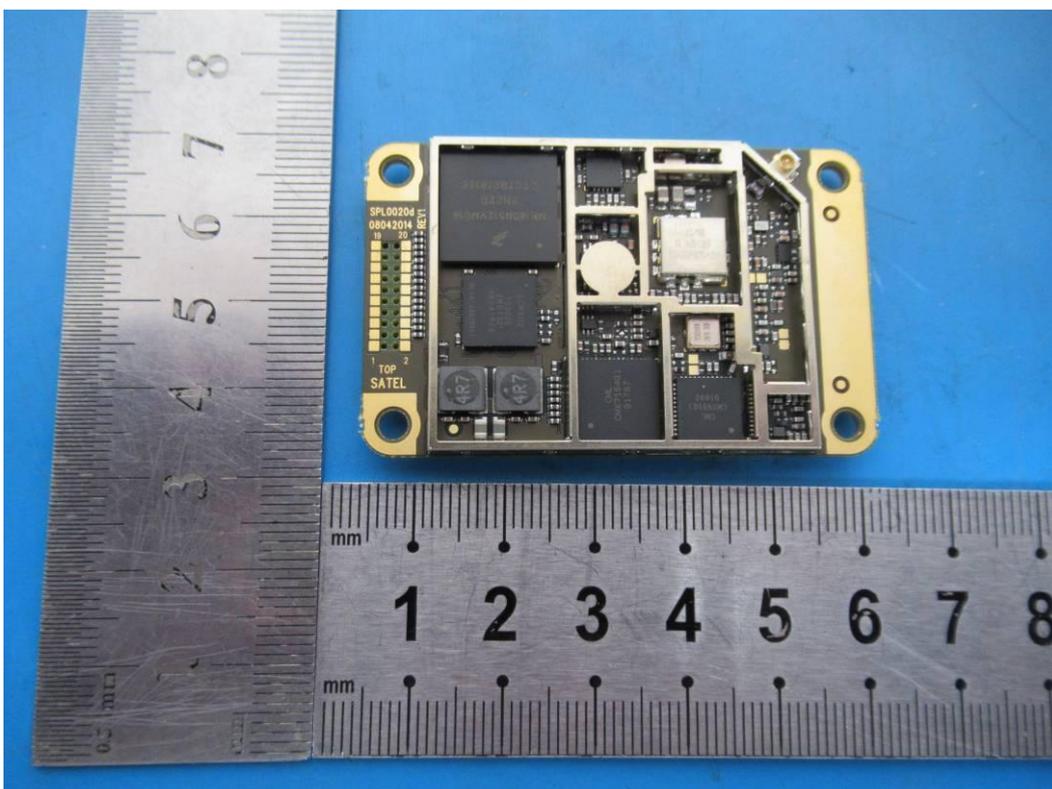
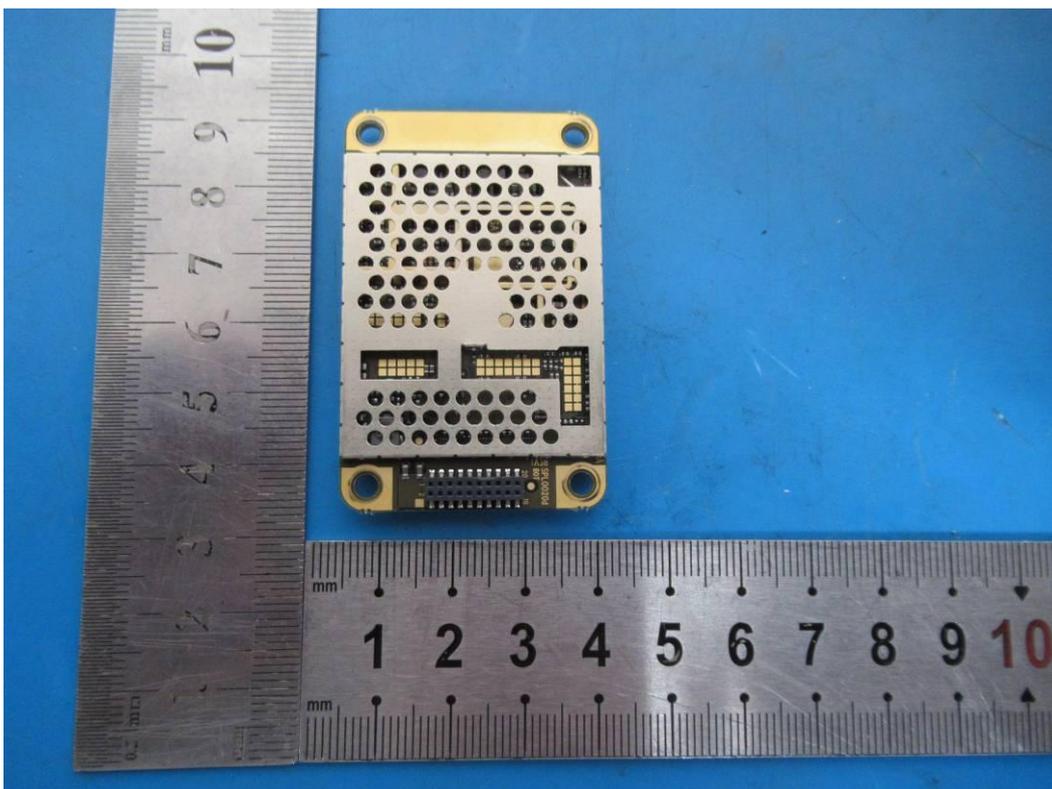


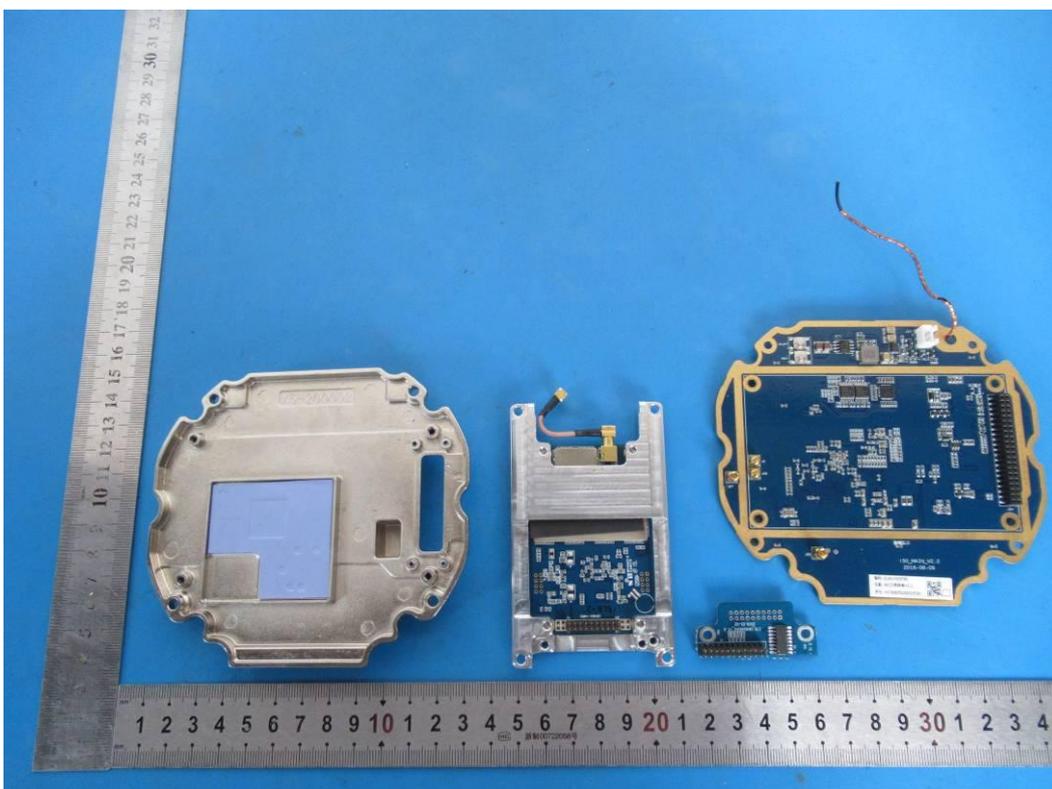
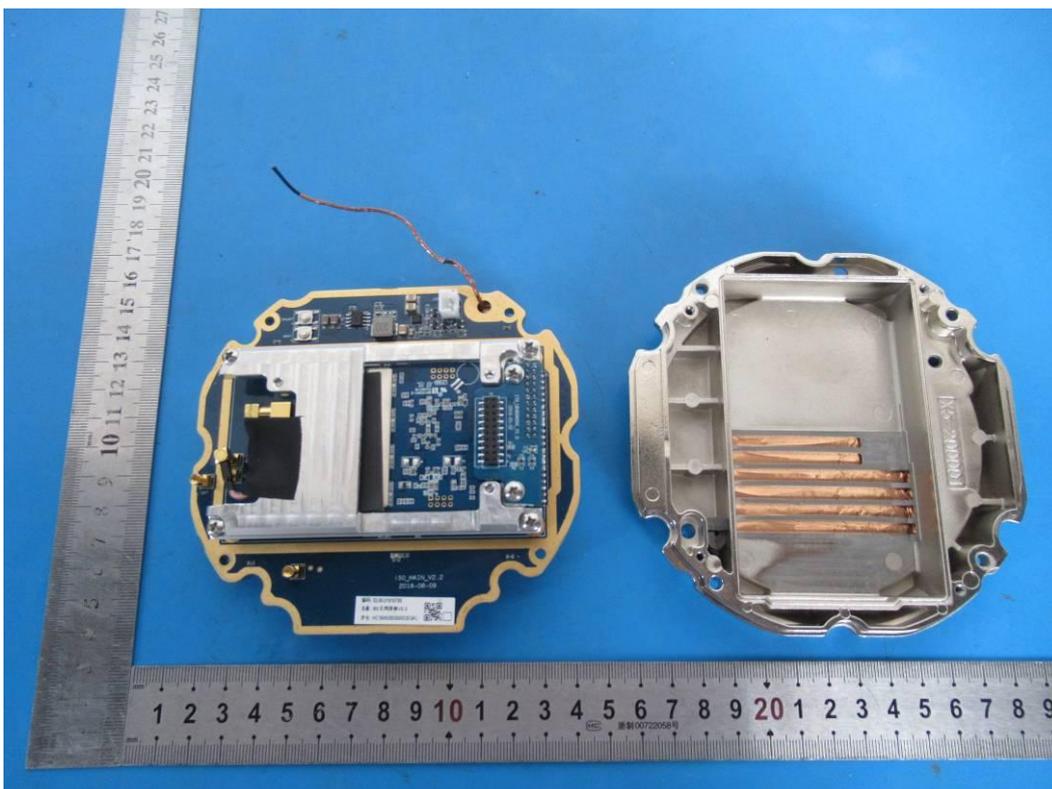


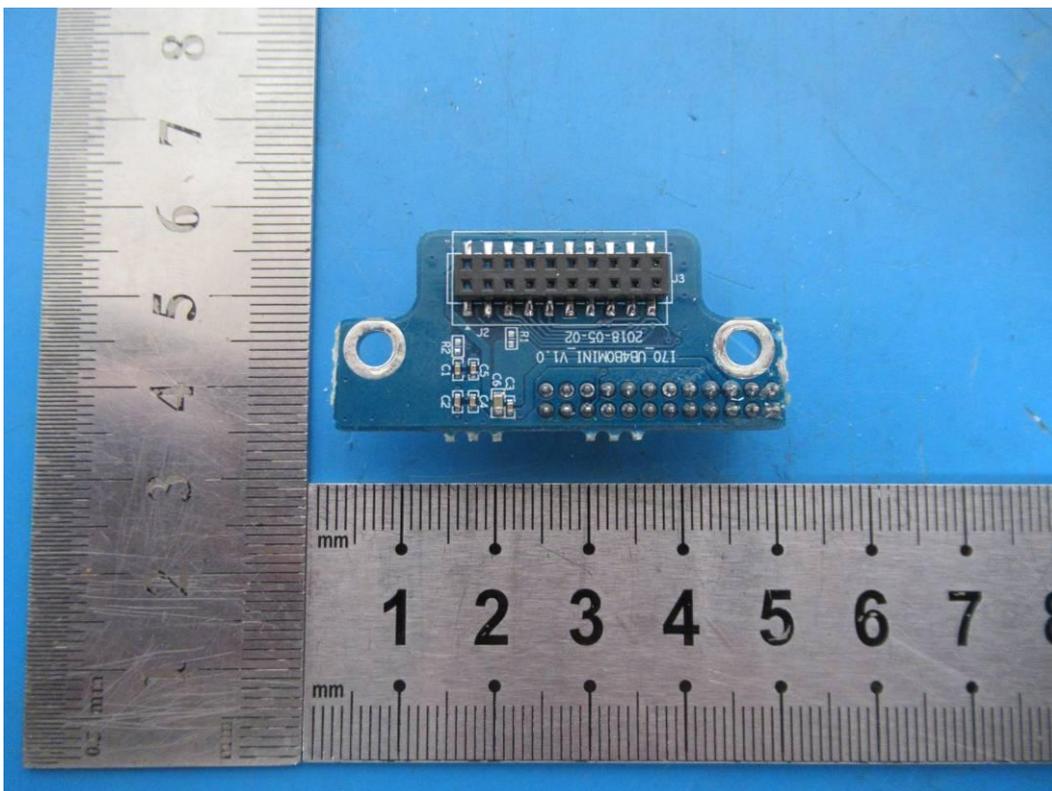
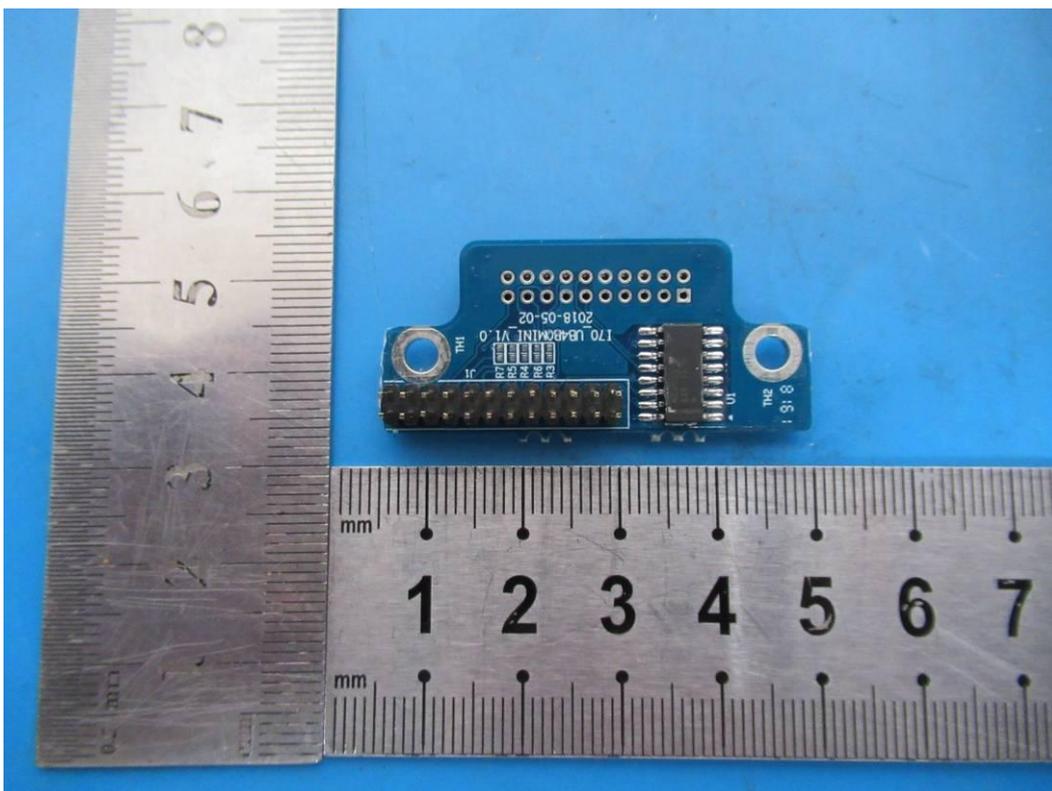


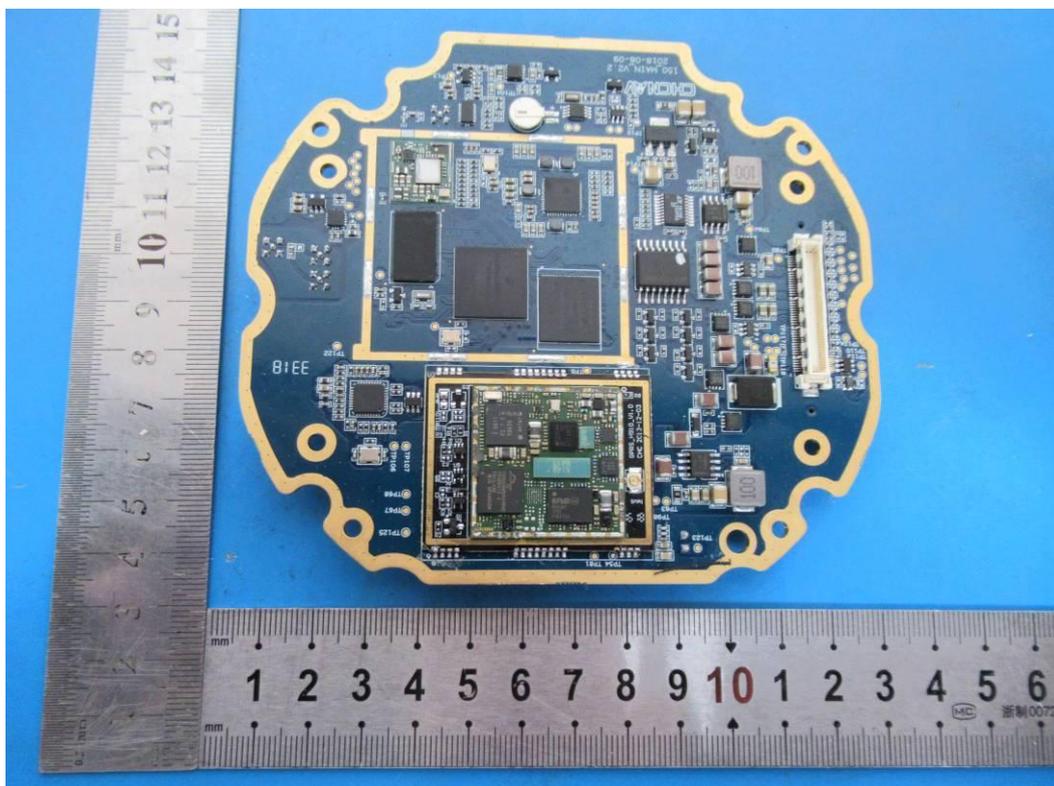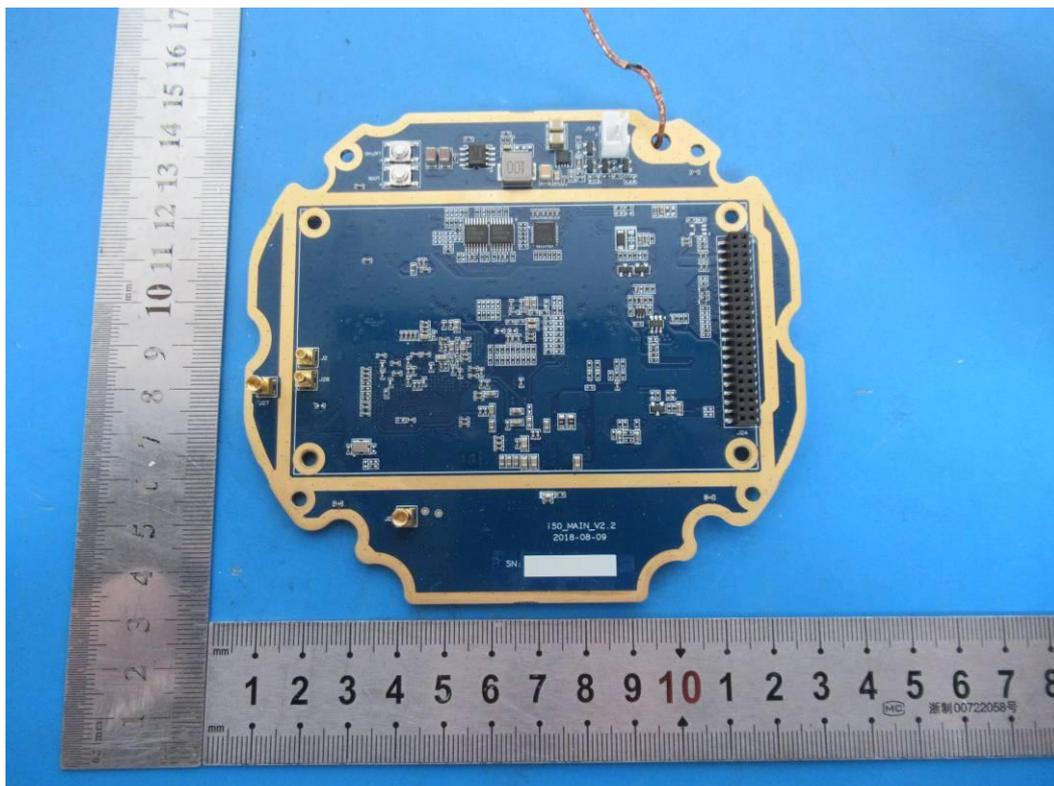


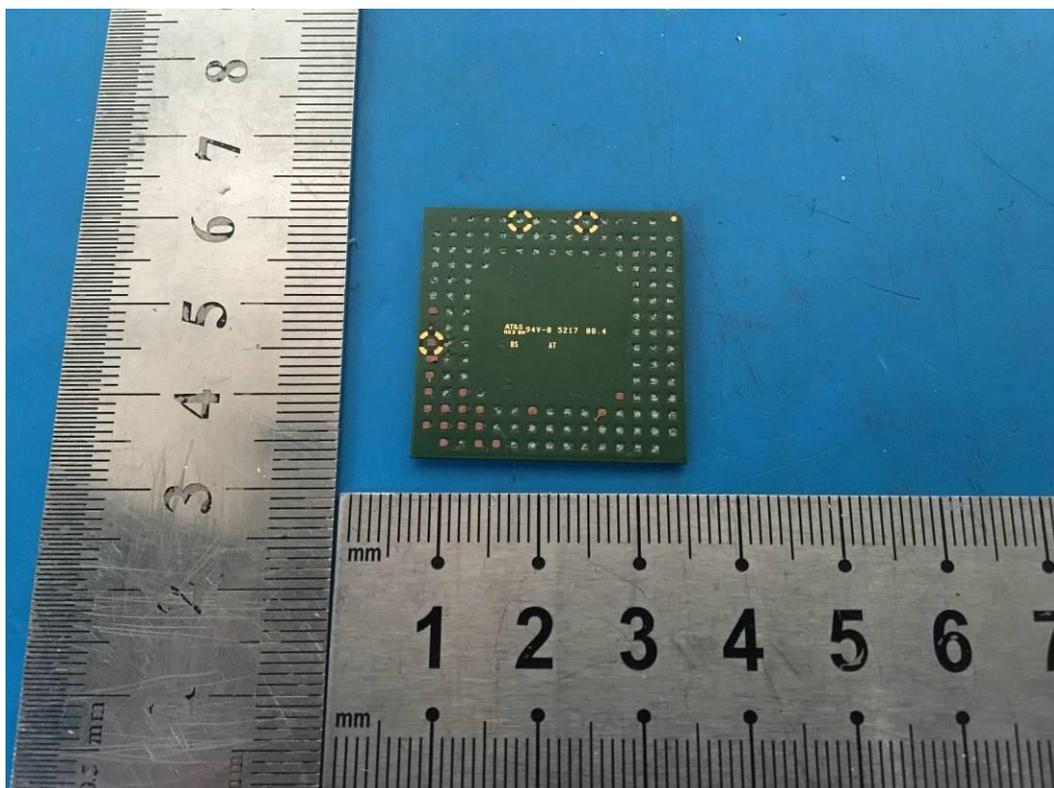
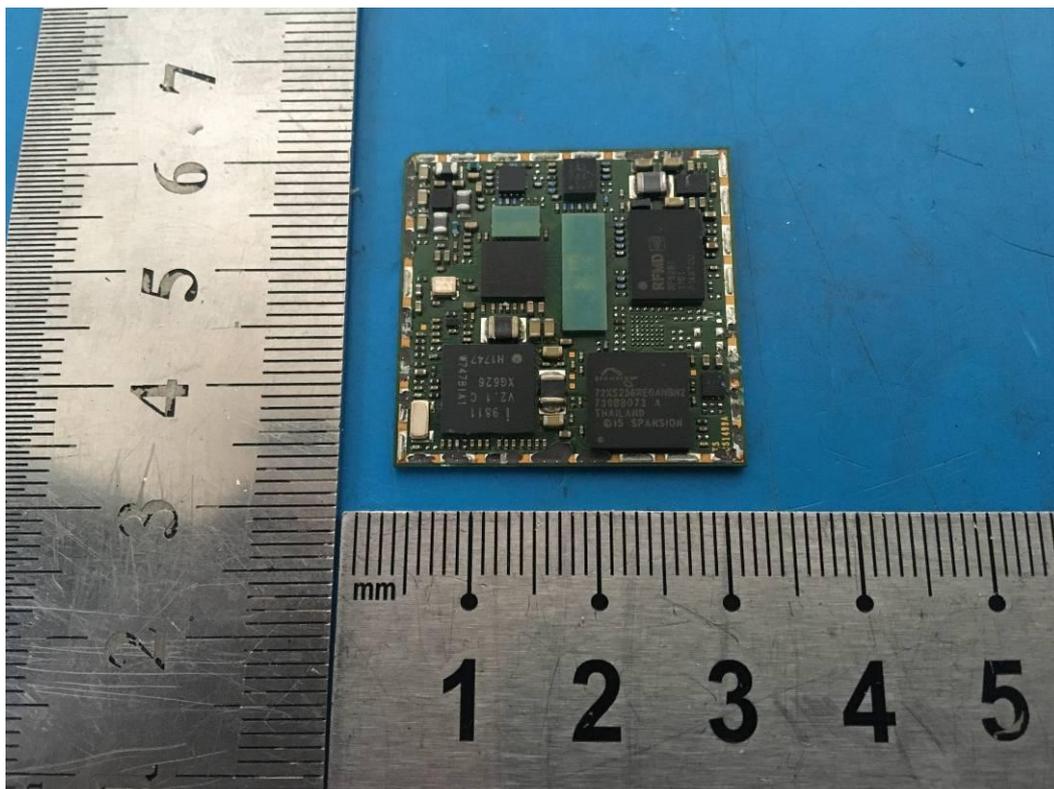


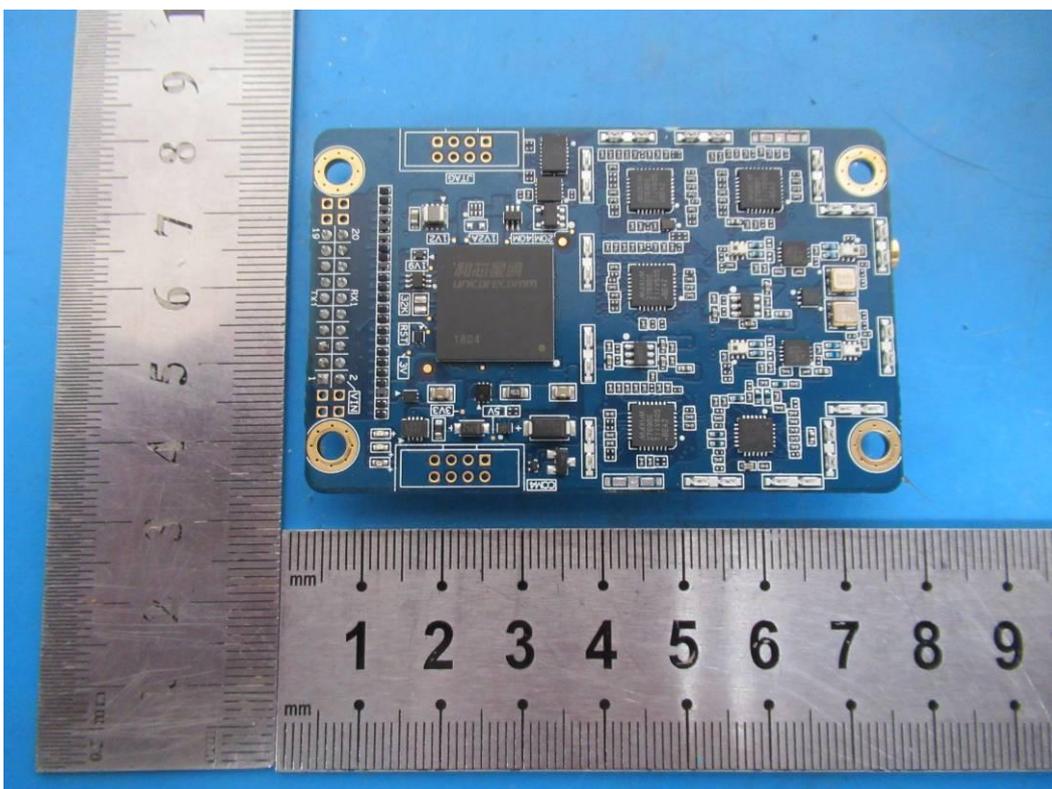
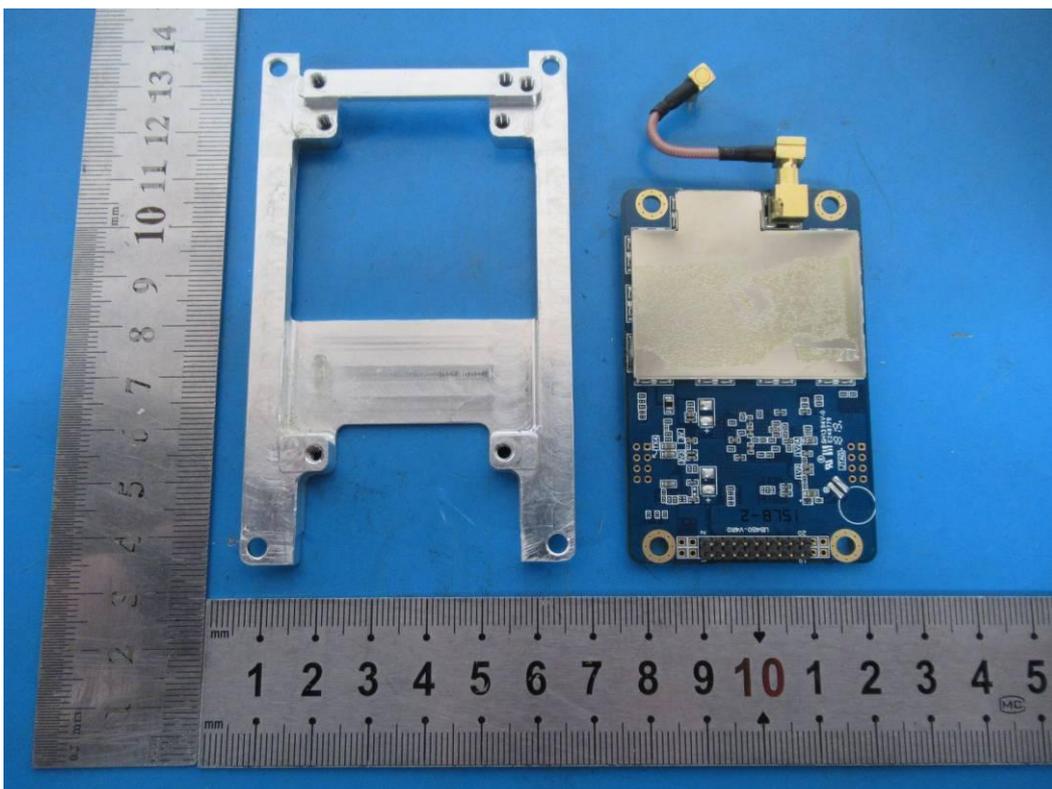


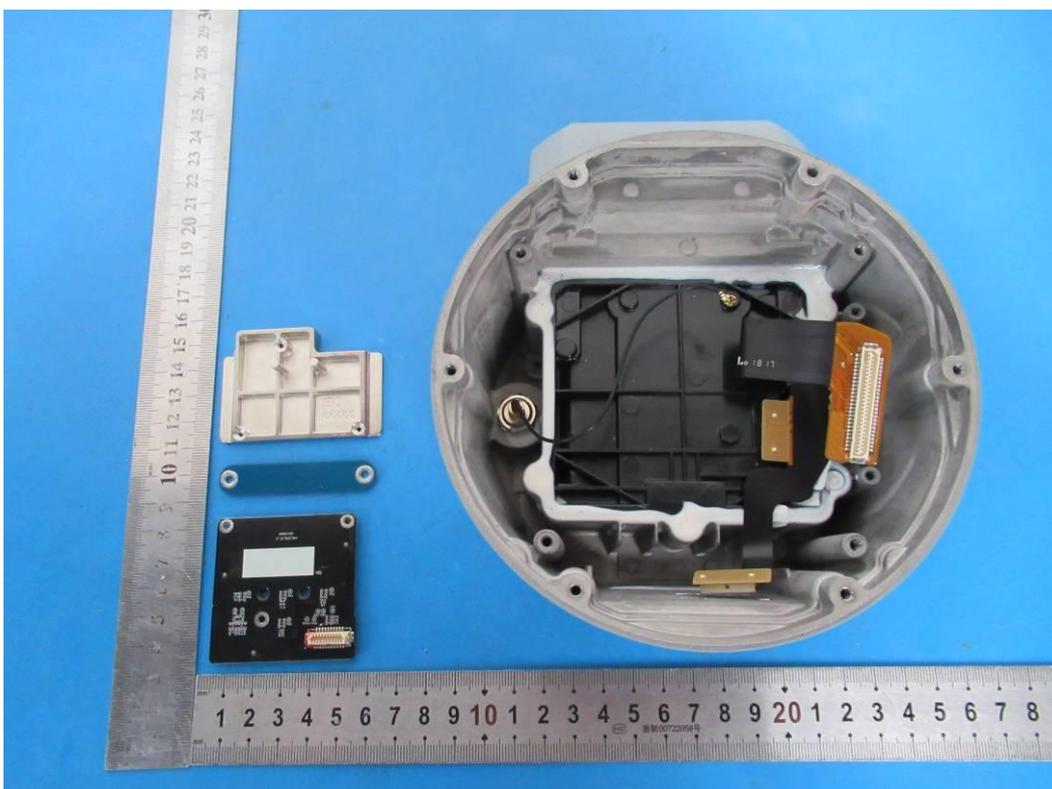
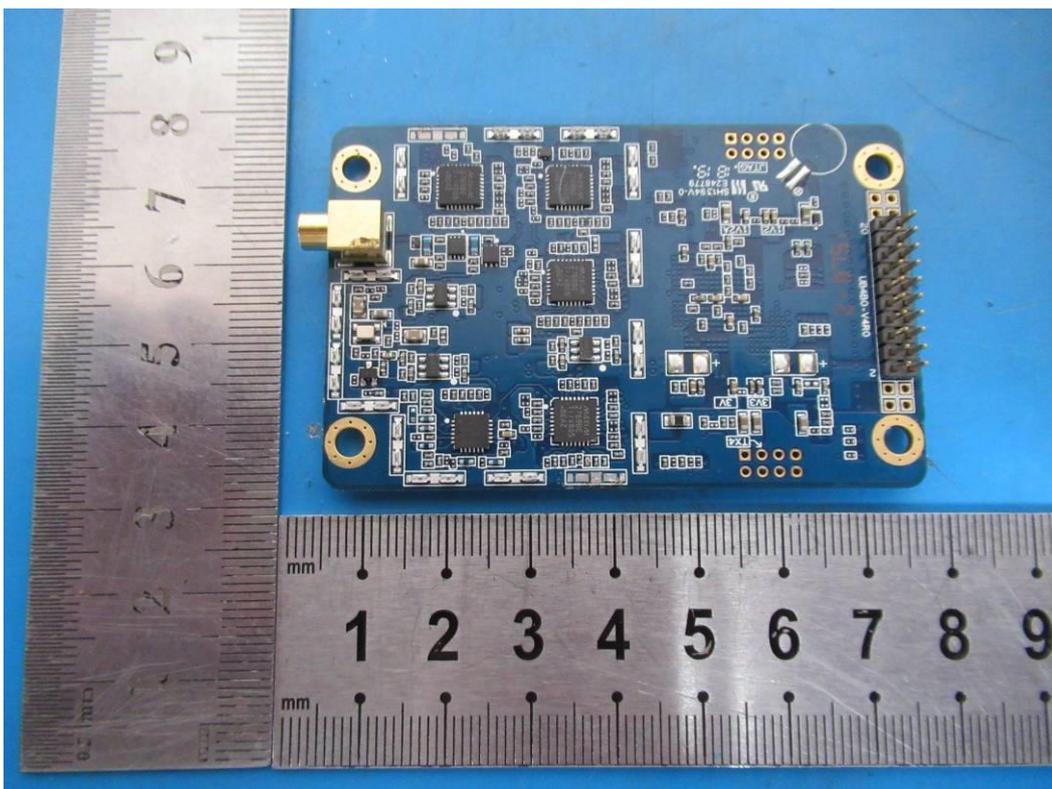


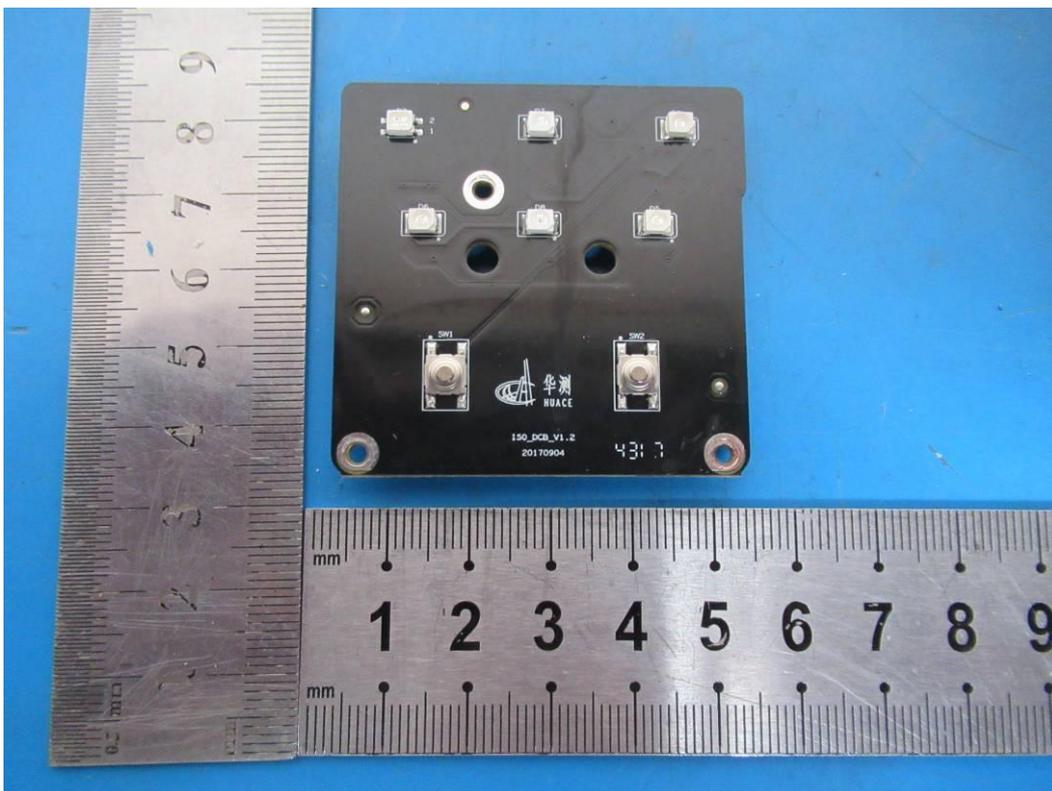
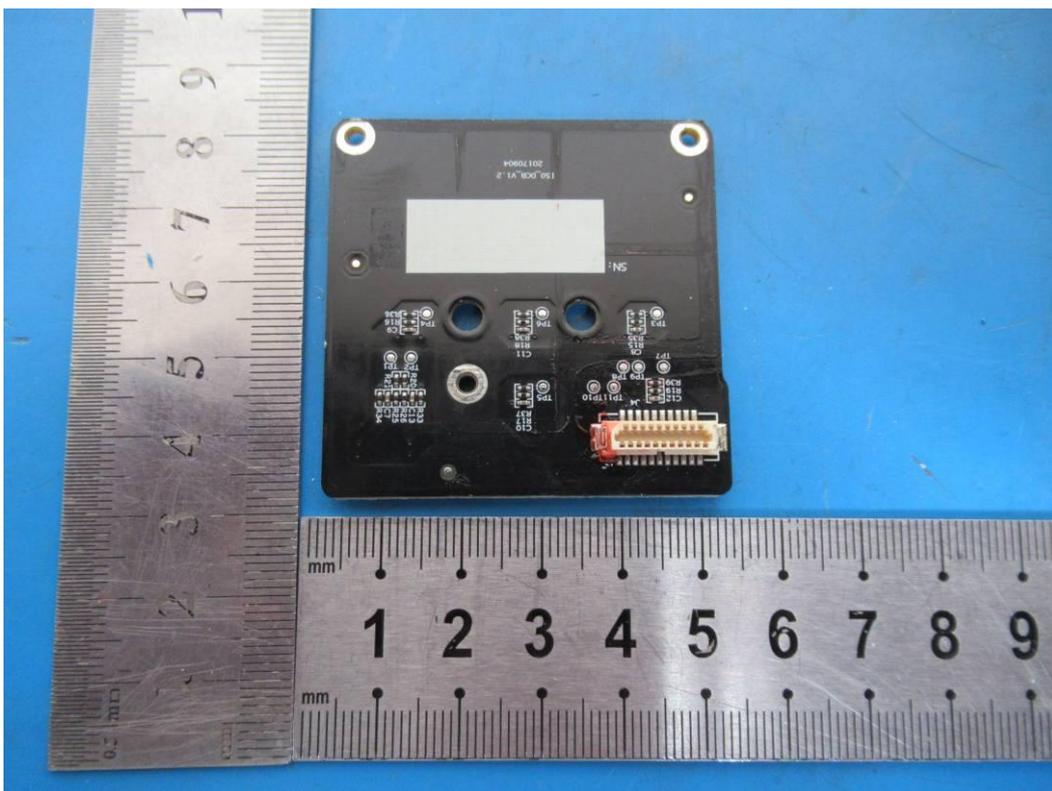


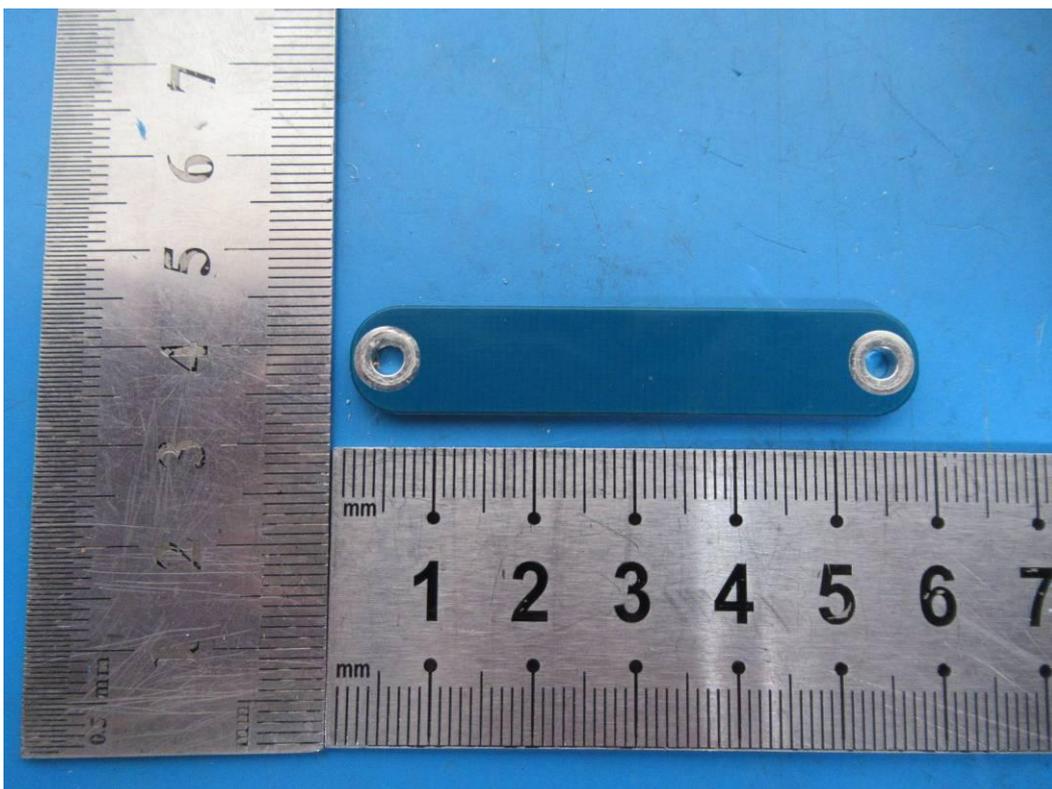

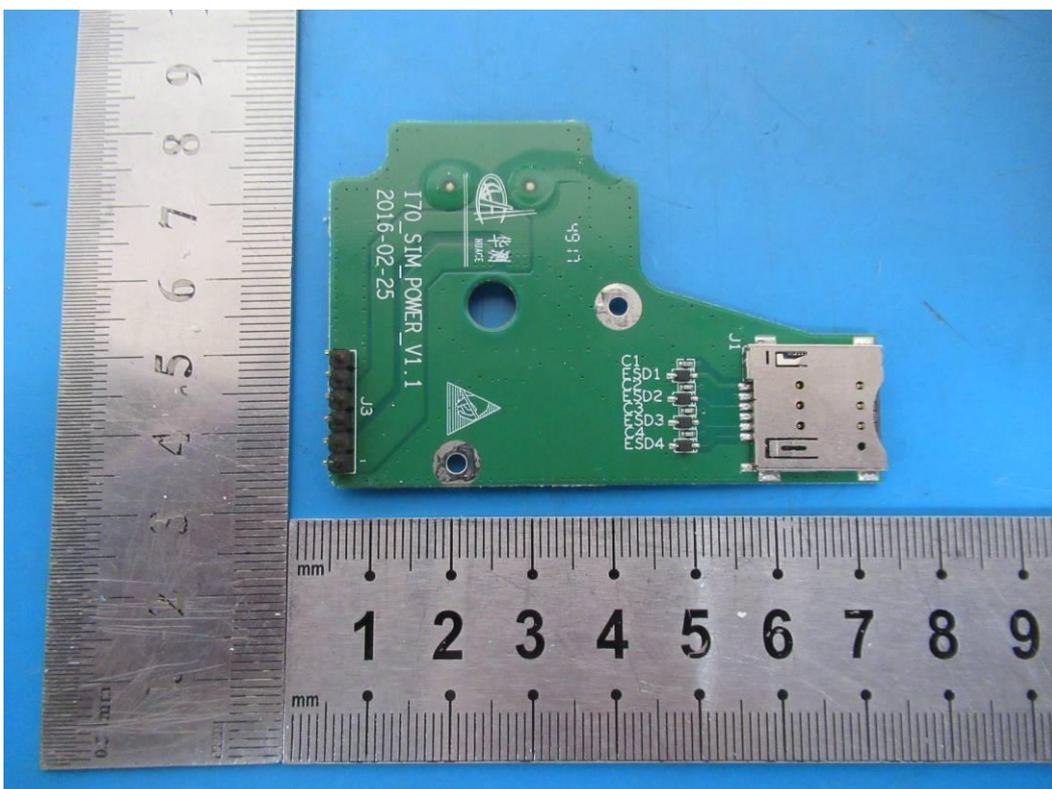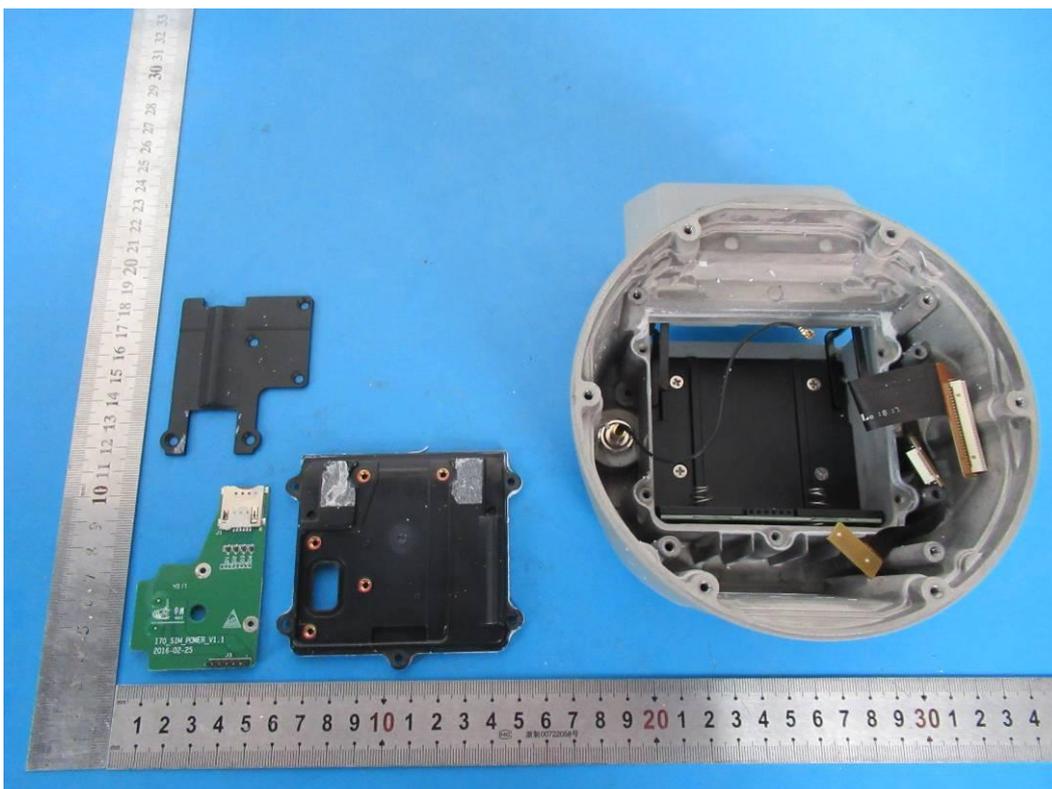

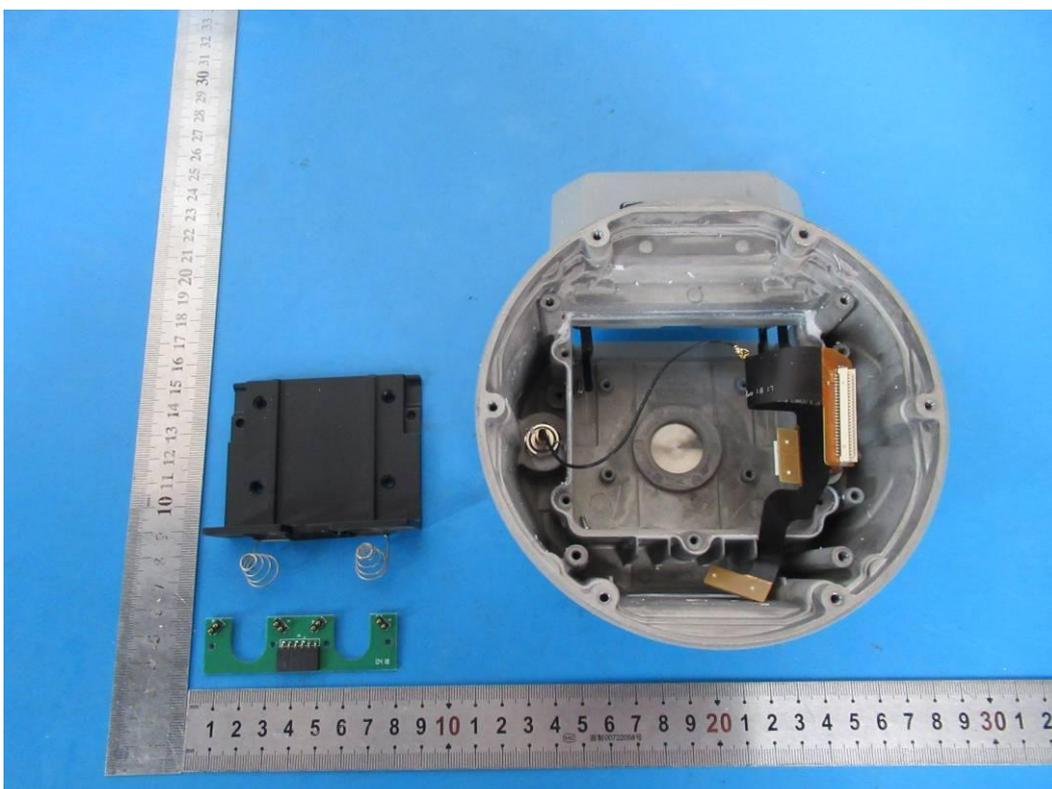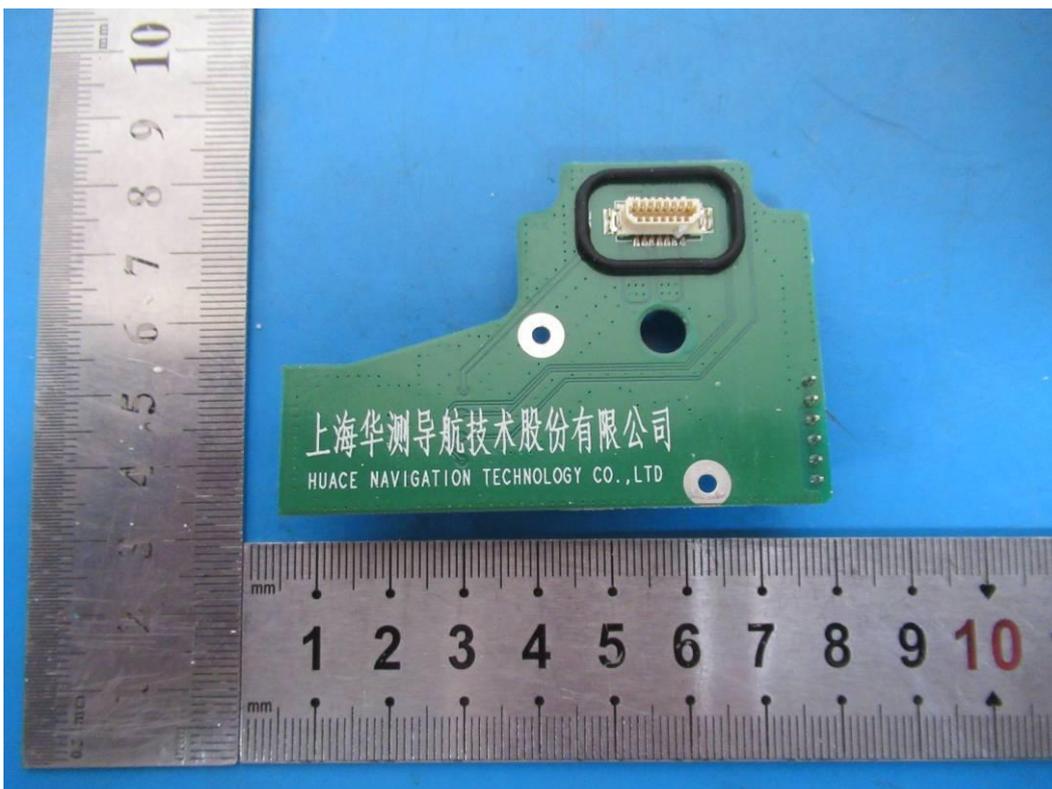

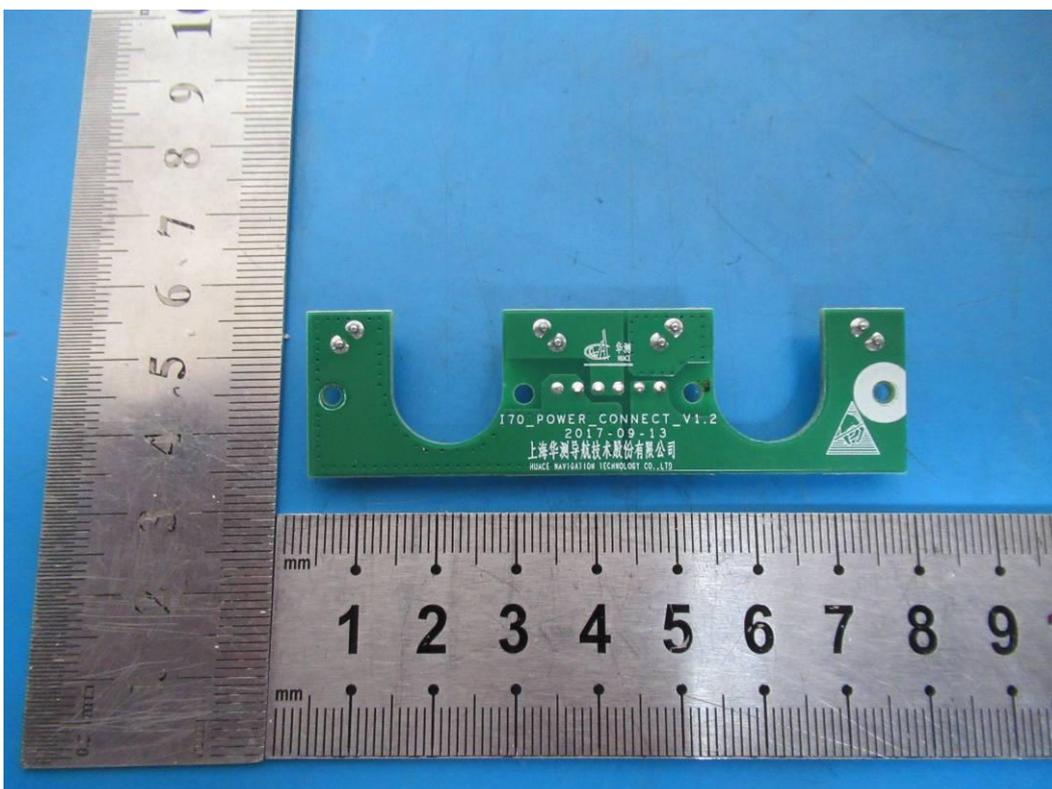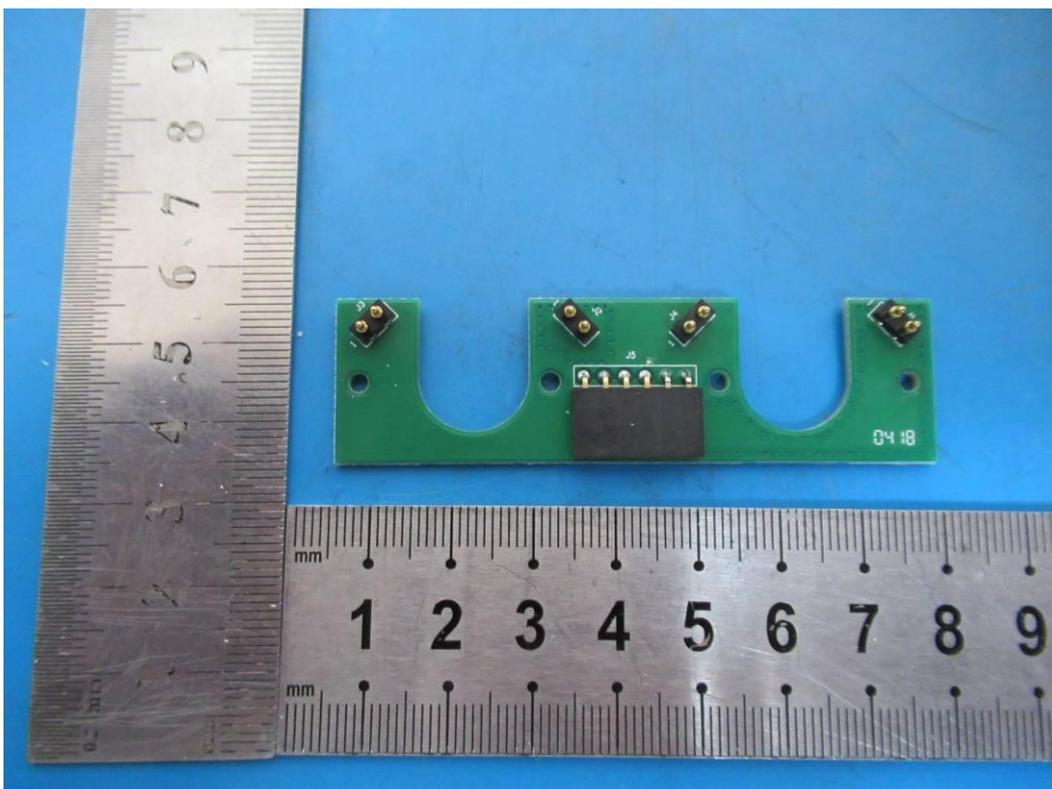

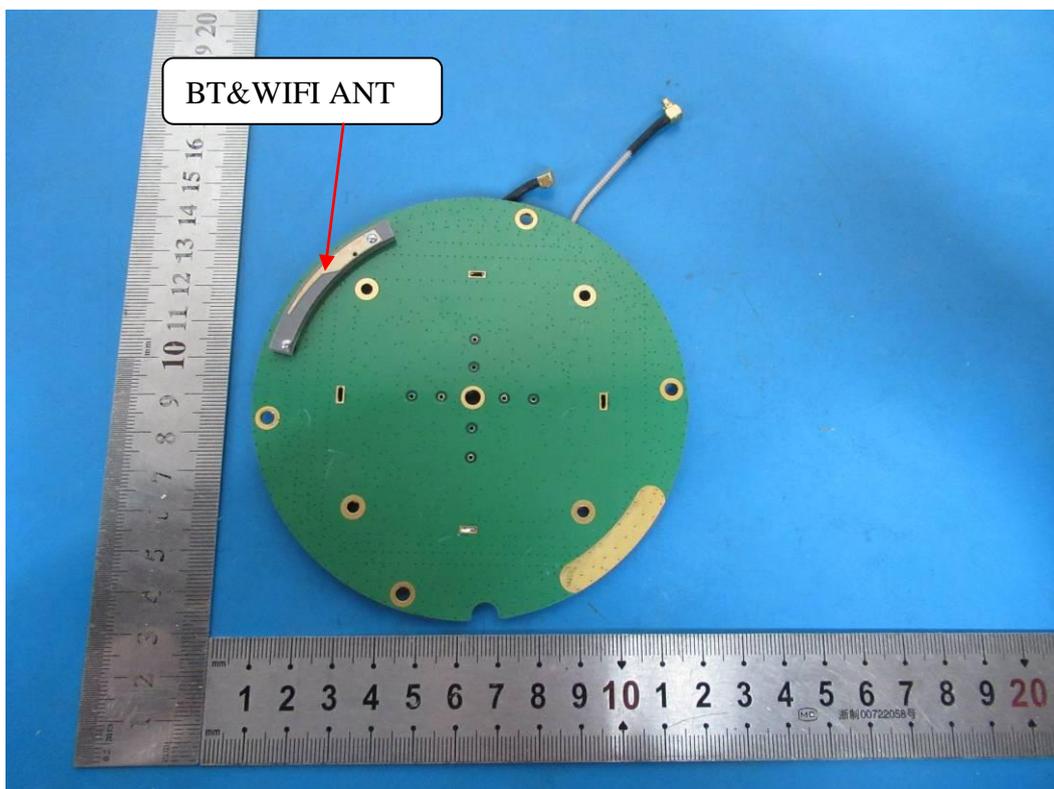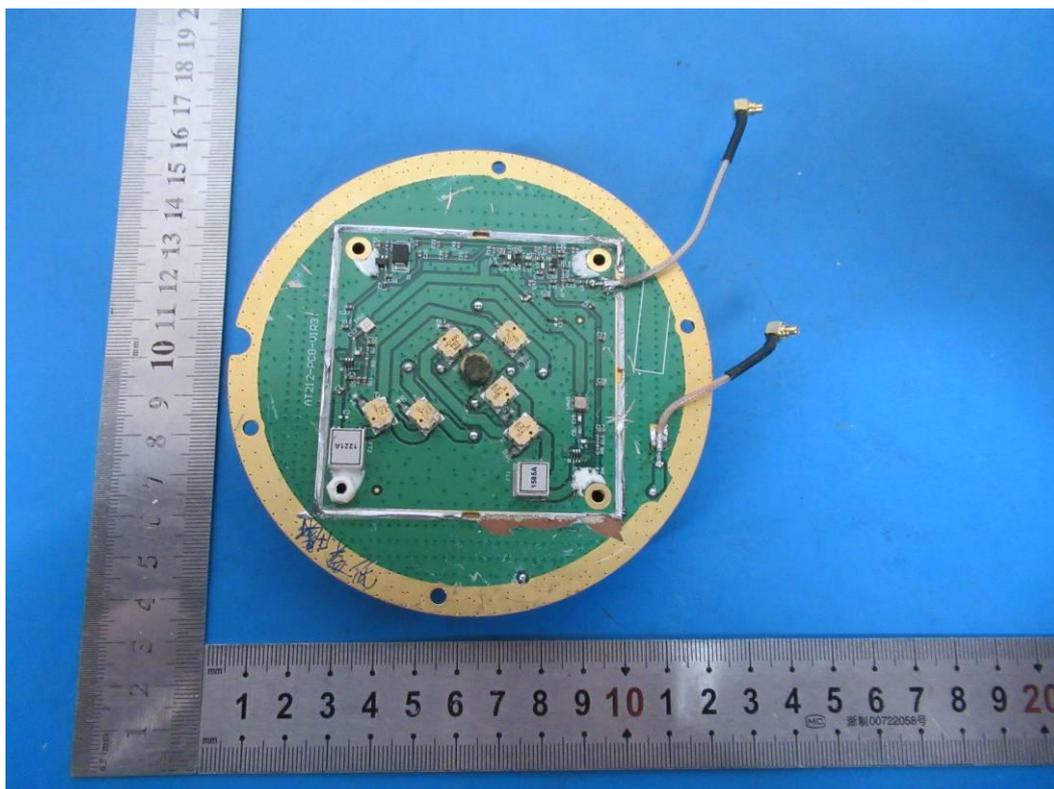

-----End of report-----