

FCC TEST REPORT  
for  
High-Flying Electronics Technology Co., Ltd.

HF-BL100-CU  
Model No.: HF-BL100-CU

Prepared for : High-Flying Electronics Technology Co., Ltd.  
Address : Room 1002, Building 1, No.3000, Longdong Avenue, Pudong  
New Area, Shanghai, 201203, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited  
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,  
Nanshan District, Shenzhen, Guangdong, China  
Tel: (86) 755-26066544  
Fax: (86) 755-26014772

Report Number : R011610322I  
Date of Test : Oct. 14~ Nov. 01, 2016  
Date of Report : Nov. 02, 2016

## TABLE OF CONTENT

Description

Page

Test Report

|                                                                            |           |
|----------------------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION.....</b>                                         | <b>4</b>  |
| 1.1. Description of Device (EUT).....                                      | 4         |
| 1.2. Auxiliary Equipment Used during Test.....                             | 5         |
| 1.3. Description of Test Facility.....                                     | 5         |
| 1.4. Measurement Uncertainty.....                                          | 5         |
| <b>2. TEST METHODOLOGY.....</b>                                            | <b>6</b>  |
| 2.1. Summary of Test Results.....                                          | 6         |
| 2.2. Description of Test Modes.....                                        | 6         |
| <b>3. CONDUCTED EMISSION TEST.....</b>                                     | <b>7</b>  |
| 3.1. Block Diagram of Test Setup.....                                      | 7         |
| 3.2. Power Line Conducted Emission Measurement Limits (15.207).....        | 7         |
| 3.3. Configuration of EUT on Measurement.....                              | 7         |
| 3.4. Operating Condition of EUT.....                                       | 7         |
| 3.5. Test Procedure.....                                                   | 8         |
| 3.6. Test equipment.....                                                   | 8         |
| 3.7. Power Line Conducted Emission Measurement Results.....                | 8         |
| <b>4. FCC PART 15.247 REQUIREMENTS FOR DSSS &amp; OFDM MODULATION.....</b> | <b>13</b> |
| 4.1 Test Setup.....                                                        | 13        |
| 4.2 6dB Bandwidth.....                                                     | 13        |
| 4.3. Maximum Peak output power test.....                                   | 17        |
| 4.4. Band Edges Measurement.....                                           | 20        |
| 4.5. Peak Power Spectral Density.....                                      | 31        |
| 4.6. Radiated Emissions.....                                               | 34        |
| <b>5. ANTENNA APPLICATION.....</b>                                         | <b>45</b> |
| 5.1. Antenna requirement.....                                              | 45        |
| 5.2. Result.....                                                           | 45        |
| <b>6. PHOTOGRAPH.....</b>                                                  | <b>46</b> |
| 6.1 Photo of Conducted Emission Test.....                                  | 46        |
| 6.2 Photo of Radiation Emission Test.....                                  | 46        |
| <b>APPENDIX I (EXTERNAL PHOTOS).....</b>                                   | <b>48</b> |
| <b>APPENDIX II (INTERNAL PHOTOS).....</b>                                  | <b>50</b> |

## TEST REPORT


Applicant : High-Flying Electronics Technology Co., Ltd.  
Manufacturer : High-Flying Electronics Technology Co., Ltd.  
EUT : HF-BL100-CU  
Model No. : HF-BL100-CU  
Serial No. : N.A.  
Trade Mark : High-Flying  
Rating : Input: DC 3.6V, 16.4mA

Measurement Procedure Used:  
FCC Part15 Subpart C 2016, Paragraph 15.247


The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Oct. 14~ Nov. 01, 2016

Prepared by :   
(Tested Engineer / Baron Wen)

Reviewer :   
(Project Manager / Amy Ding)

Approved & Authorized Signer :   
(Manager / Tom Chen)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : HF-BL100-CU

Model Number : HF-BL100-CU

Test Power Supply : AC 120V, 60Hz for adapter/  
AC 240V, 60Hz for adapter

Frequency : 2402~2480MHz

Modulation : GFSK

Channel Spacing : 2MHz

Number of Channels : 40

Antenna Type : PCB Antenna

Antenna Gain : 2 dBi

Applicant : High-Flying Electronics Technology Co., Ltd.  
Address : Room 1002, Building 1, No.3000, Longdong Avenue, Pudong New Area, Shanghai, 201203, China

Manufacturer : High-Flying Electronics Technology Co., Ltd.  
Address : Room 1002, Building 1, No.3000, Longdong Avenue, Pudong New Area, Shanghai, 201203, China

Factory : High-Flying Electronics Technology Co., Ltd.  
Address : Room 1002, Building 1, No.3000, Longdong Avenue, Pudong New Area, Shanghai, 201203, China

Date of receipt : Oct. 14, 2016  
Date of Test : Oct. 14~ Nov. 01, 2016

## 1.2. Auxiliary Equipment Used during Test

Adapter : Manufacturer: ZTE  
M/N: STC-A2050I1000USBA-C  
S/N: 201202102100876  
Input: 100-240V~50/60Hz 0.3A  
Output: DC 5V, 1000mA

## 1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC-Registration No.: 752021**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 06, 2016.

### **IC-Registration No.: 8058A-1**

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, Jun. 13, 2016.

### **Test Location**

All Emissions tests were performed at  
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC  
Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong,  
China

## 1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.1 dB (Horizontal)  
Ur = 4.3 dB (Vertical)  
Conduction Uncertainty : Uc = 3.4dB

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC Part 15, Paragraph 15.247.

### 2.1. Summary of Test Results

The EUT has been tested according to the following specifications:

| Standard                                 | Test Type                                | Result | Notes    |
|------------------------------------------|------------------------------------------|--------|----------|
| FCC Part 15, Paragraph 15.107, 15.207    | Conducted Emission Test                  | PASS   | Complies |
| FCC Part 15, Paragraph 15.247(b)(1)      | Peak Output Power                        | PASS   | Complies |
| FCC Part 15, Paragraph 15.247(a)(2)      | 6dB Bandwidth                            | PASS   | Complies |
| FCC Part 15, Paragraph 15.247(c)         | 100kHz Bandwidth of Frequency Band Edges | PASS   | Complies |
| FCC Part 15, Paragraph 15.209(a)(f)      | Spurious Emission                        | PASS   | Complies |
| FCC Part 15, Paragraph 15.247(a)(1)      | Frequency Separation                     | -      | N/A      |
| FCC Part 15, Paragraph 15.247(a)(1)(iii) | Number of Hopping Frequency              | -      | N/A      |
| FCC Part 15, Paragraph 15.247(a)(1)(iii) | Time of Occupancy                        | -      | N/A      |
| FCC Part 15, Paragraph 15.247(c)         | Peak Power Density                       | PASS   | Complies |

### 2.2. Description of Test Modes

The EUT has been tested under operating condition.


Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel Low(2402MHz), Channel Middle(2440MHz) and Channel High(2480MHz) are chosen for the final testing.

### 3. Conducted Emission Test

#### 3.1. Block Diagram of Test Setup

##### 3.1.1. Block diagram of connection between the EUT and simulators

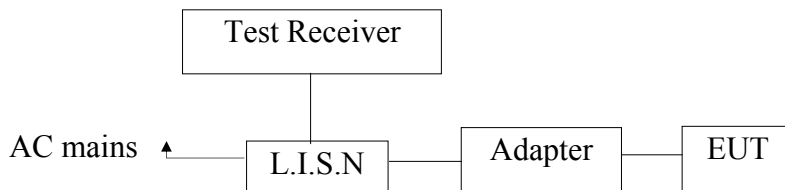

#### 3.2. Power Line Conducted Emission Measurement Limits (15.207)

| Frequency<br>MHz | Limits dB(μV)    |               |
|------------------|------------------|---------------|
|                  | Quasi-peak Level | Average Level |
| 0.15 ~ 0.50      | 66 ~ 56*         | 56 ~ 46*      |
| 0.50 ~ 5.00      | 56               | 46            |
| 5.00 ~ 30.00     | 60               | 50            |

Notes: 1. \*Decreasing linearly with logarithm of frequency.  
2. The lower limit shall apply at the transition frequencies.

#### 3.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

#### 3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT and simulator as shown as Section 3.1.
- 3.4.2. Turn on the power of all equipment.
- 3.4.3. Let the EUT work in test mode (BT Mode) and measure it.

### 3.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 3.6.

### 3.6. Test equipment

| Item | Equipment          | Manufacturer         | Model No. | Serial No. | Last Cal.     | Cal. Interval |
|------|--------------------|----------------------|-----------|------------|---------------|---------------|
| 1.   | Two-Line V-network | Rohde & Schwarz      | ENV216    | 100055     | Apr. 16, 2016 | 1 Year        |
| 2.   | EMI Test Receiver  | Rohde & Schwarz      | ESCI      | 100627     | Apr. 16, 2016 | 1 Year        |
| 3.   | RF Switching Unit  | Compliance Direction | RSU-M2    | 38303      | Apr. 16, 2016 | 1 Year        |

### 3.7. Power Line Conducted Emission Measurement Results

**PASS.**


The frequency range from 150KHz to 30 MHz is investigated.

Please refer the following pages.



# **CONDUCTED EMISSION TEST DATA**


Test Site: 1# Shielded Room  
Operating Condition: BT Mode  
Test Specification: AC 120V, 60Hz for adapter  
Comment: Live Line  
Tem.:24℃ Hum.:49%

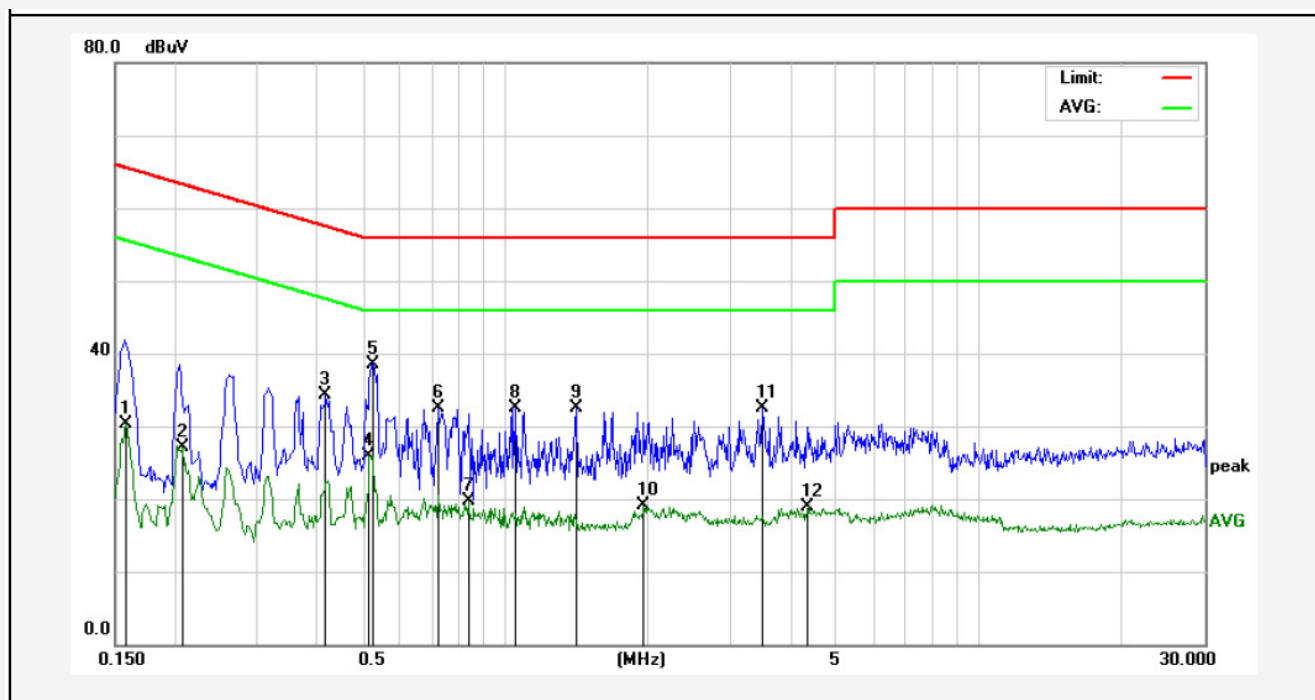

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1   | 0.1582      | 10.38          | 19.90       | 30.28         | 55.55      | -25.27          | AVG      |        |
| 2   | 0.2083      | 7.12           | 19.90       | 27.02         | 53.27      | -26.25          | AVG      |        |
| 3   | 0.4178      | 14.30          | 19.94       | 34.24         | 57.49      | -23.25          | QP       |        |
| 4   | 0.5180      | 5.99           | 19.99       | 25.98         | 46.00      | -20.02          | AVG      |        |
| 5   | 0.5260      | 18.61          | 19.99       | 38.60         | 56.00      | -17.40          | QP       |        |
| 6   | 0.7217      | 12.50          | 20.05       | 32.55         | 56.00      | -23.45          | QP       |        |
| 7   | 0.8378      | -0.31          | 20.08       | 19.77         | 46.00      | -26.23          | AVG      |        |
| 8   | 1.0500      | 12.47          | 20.12       | 32.59         | 56.00      | -23.41          | QP       |        |
| 9   | 1.4178      | 12.30          | 20.13       | 32.43         | 56.00      | -23.57          | QP       |        |
| 10  | 1.9658      | -1.13          | 20.14       | 19.01         | 46.00      | -26.99          | AVG      |        |
| 11  | 3.4980      | 12.32          | 20.17       | 32.49         | 56.00      | -23.51          | QP       |        |
| 12  | 4.3778      | -1.33          | 20.19       | 18.86         | 46.00      | -27.14          | AVG      |        |

## CONDUCTED EMISSION TEST DATA


Test Site: 1# Shielded Room  
Operating Condition: BT Mode  
Test Specification: AC 120V, 60Hz for adapter  
Comment: Neutral Line  
Tem.:24°C Hum.:49%

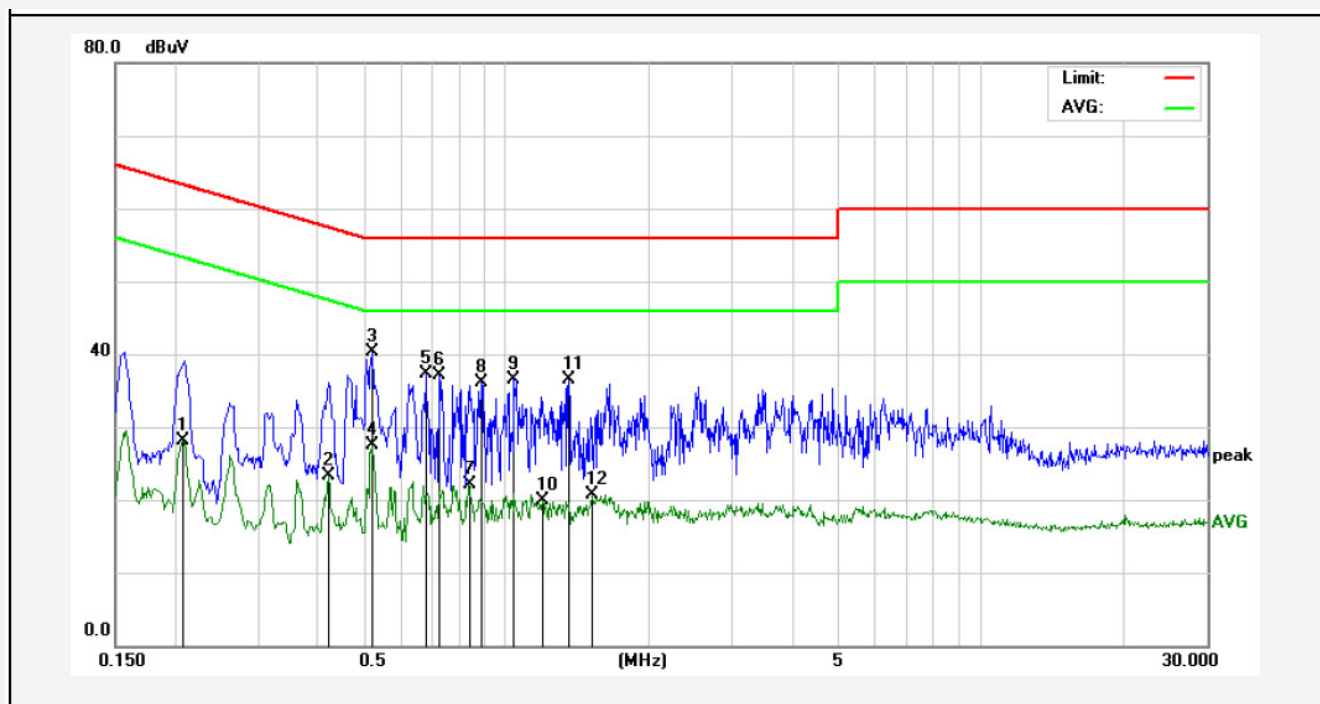

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|--------------|-----------------|----------|--------|
| 1   | 0.2083      | 8.20           | 19.90       | 28.10         | 53.27        | -25.17          | AVG      |        |
| 2   | 0.4219      | 3.27           | 19.94       | 23.21         | 47.41        | -24.20          | AVG      |        |
| 3   | 0.5220      | 20.41          | 19.99       | 40.40         | 56.00        | -15.60          | peak     |        |
| 4   | 0.5220      | 7.48           | 19.99       | 27.47         | 46.00        | -18.53          | AVG      |        |
| 5   | 0.6780      | 17.18          | 20.03       | 37.21         | 56.00        | -18.79          | peak     |        |
| 6   | 0.7219      | 17.06          | 20.05       | 37.11         | 56.00        | -18.89          | peak     |        |
| 7   | 0.8339      | 2.02           | 20.08       | 22.10         | 46.00        | -23.90          | AVG      |        |
| 8   | 0.8860      | 15.98          | 20.09       | 36.07         | 56.00        | -19.93          | peak     |        |
| 9   | 1.0380      | 16.35          | 20.12       | 36.47         | 56.00        | -19.53          | peak     |        |
| 10  | 1.1939      | -0.26          | 20.12       | 19.86         | 46.00        | -26.14          | AVG      |        |
| 11  | 1.3540      | 16.33          | 20.13       | 36.46         | 56.00        | -19.54          | peak     |        |
| 12  | 1.5140      | 0.56           | 20.13       | 20.69         | 46.00        | -25.31          | AVG      |        |

### CONDUCTED EMISSION TEST DATA


Test Site: 1# Shielded Room  
Operating Condition: BT Mode  
Test Specification: AC 240V, 60Hz for adapter  
Comment: Live Line  
Tem.:24℃ Hum.:49%

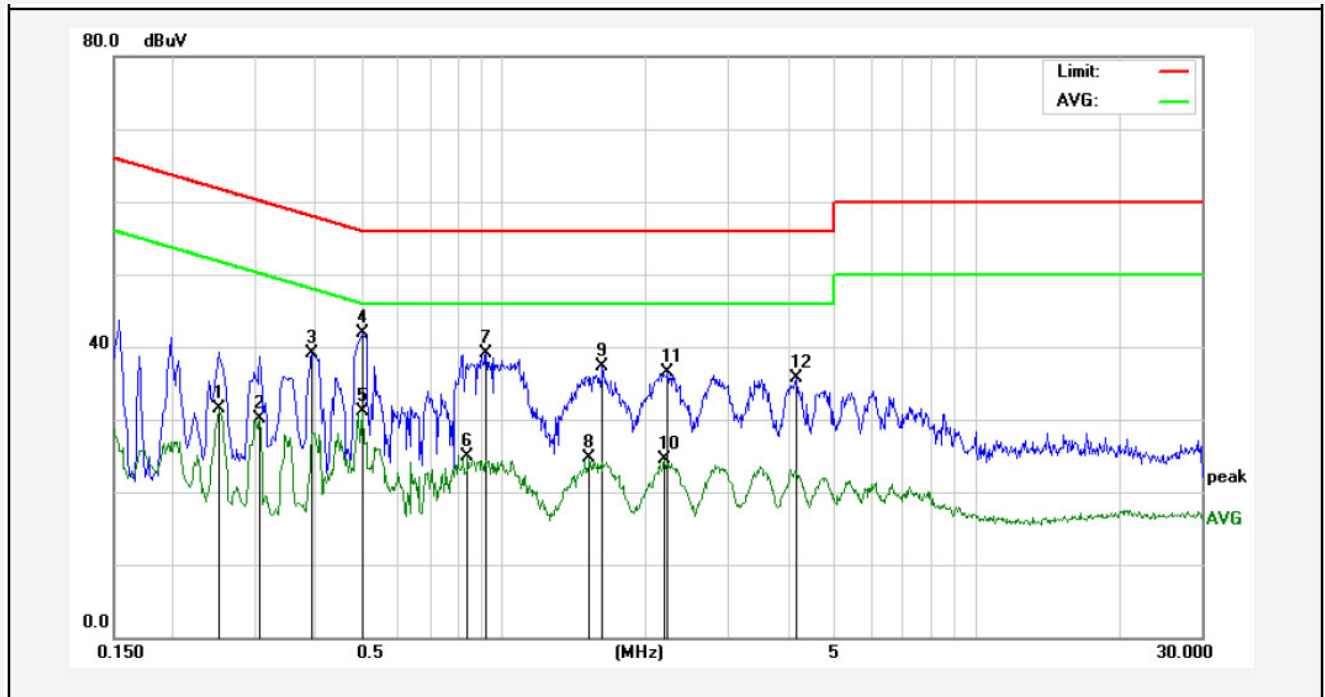

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1   | 0.2500      | 11.59          | 19.89       | 31.48         | 51.75      | -20.27          | AVG      |        |
| 2   | 0.3059      | 10.24          | 19.89       | 30.13         | 50.08      | -19.95          | AVG      |        |
| 3   | 0.3940      | 19.21          | 19.93       | 39.14         | 57.98      | -18.84          | peak     |        |
| 4   | 0.5020      | 21.85          | 19.98       | 41.83         | 56.00      | -14.17          | peak     |        |
| 5   | 0.5060      | 11.12          | 19.98       | 31.10         | 46.00      | -14.90          | AVG      |        |
| 6   | 0.8417      | 4.92           | 20.08       | 25.00         | 46.00      | -21.00          | AVG      |        |
| 7   | 0.9220      | 18.93          | 20.10       | 39.03         | 56.00      | -16.97          | peak     |        |
| 8   | 1.5220      | 4.57           | 20.13       | 24.70         | 46.00      | -21.30          | AVG      |        |
| 9   | 1.6220      | 17.19          | 20.13       | 37.32         | 56.00      | -18.68          | peak     |        |
| 10  | 2.1939      | 4.31           | 20.14       | 24.45         | 46.00      | -21.55          | AVG      |        |
| 11  | 2.2299      | 16.29          | 20.14       | 36.43         | 56.00      | -19.57          | peak     |        |
| 12  | 4.1577      | 15.59          | 20.18       | 35.77         | 56.00      | -20.23          | peak     |        |

# **CONDUCTED EMISSION TEST DATA**


Test Site: 1# Shielded Room  
Operating Condition: BT Mode  
Test Specification: AC 240V, 60Hz for adapter  
Comment: Neutral Line  
Tem.:24℃ Hum.:49%

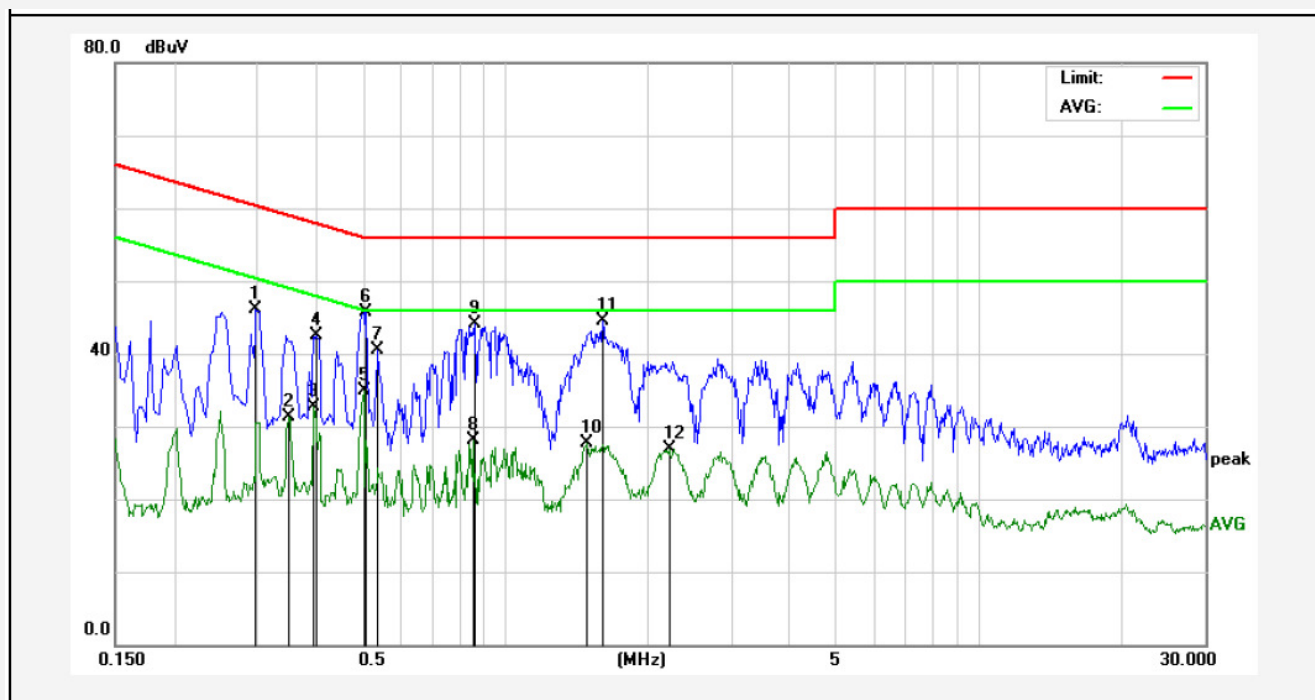

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1   | 0.2977      | 26.15          | 19.89       | 46.04         | 60.30      | -14.26          | QP       |        |
| 2   | 0.3497      | 11.30          | 19.91       | 31.21         | 48.97      | -17.76          | AVG      |        |
| 3   | 0.3940      | 12.70          | 19.93       | 32.63         | 47.98      | -15.35          | AVG      |        |
| 4   | 0.3996      | 22.58          | 19.93       | 42.51         | 57.86      | -15.35          | QP       |        |
| 5   | 0.5020      | 14.95          | 19.98       | 34.93         | 46.00      | -11.07          | AVG      |        |
| 6   | 0.5100      | 25.82          | 19.98       | 45.80         | 56.00      | -10.20          | QP       |        |
| 7   | 0.5380      | 20.59          | 19.99       | 40.58         | 56.00      | -15.42          | QP       |        |
| 8   | 0.8538      | 8.08           | 20.08       | 28.16         | 46.00      | -17.84          | AVG      |        |
| 9   | 0.8618      | 24.07          | 20.08       | 44.15         | 56.00      | -11.85          | QP       |        |
| 10  | 1.4899      | 7.60           | 20.13       | 27.73         | 46.00      | -18.27          | AVG      |        |
| 11  | 1.6019      | 24.41          | 20.13       | 44.54         | 56.00      | -11.46          | QP       |        |
| 12  | 2.2179      | 6.82           | 20.14       | 26.96         | 46.00      | -19.04          | AVG      |        |

## 4. FCC Part 15.247 Requirements for DSSS & OFDM Modulation

### 4.1 Test Setup



### 4.2 6dB Bandwidth

#### a. Limit

For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

#### b. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
RBW = 100kHz, VBW  $\geq 3 \times$  RBW = 300kHz,  
Detector = Peak  
Trace mode = Max hold.  
Sweep - auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



### c. Test Setup See 4.1

### d. Test Equipment

| Item | Equipment                      | Manufacturer            | Model No.    | Serial No.    | Last Cal.     | Cal. Interval |
|------|--------------------------------|-------------------------|--------------|---------------|---------------|---------------|
| 1.   | Spectrum Analysis              | Agilent                 | E4407B       | US39390582    | Apr. 16, 2016 | 1 Year        |
| 2.   | Preamplifier                   | Instruments corporation | EMC011830    | 980100        | Apr. 16, 2016 | 1 Year        |
| 3.   | EMI Test Receiver              | Rohde & Schwarz         | ESPI         | 101604        | Apr. 16, 2016 | 1 Year        |
| 4.   | Double Ridged Horn Antenna     | Instruments corporation | GTH-0118     | 351600        | Apr. 19, 2016 | 1 Year        |
| 5.   | Bilog Broadband Antenna        | Schwarzbeck             | VULB9163     | VULB 9163-289 | Apr. 19, 2016 | 1 Year        |
| 6.   | Pre-amplifier                  | SONOMA                  | 310N         | 186860        | Apr. 16, 2016 | 1 Year        |
| 7.   | EMI Test Software EZ-EMC       | SHURPLE                 | N/A          | N/A           | N/A           | N/A           |
| 8    | Power Sensor                   | DAER                    | RPR3006W     | 15I00041SN046 | Jun 30, 2016  | 1 Year        |
| 9    | MXA Spectrum Analysis          | Agilent                 | N9020A       | MY51170037    | Jun 30, 2016  | 1 Year        |
| 10   | MXG RF Vector Signal Generator | Agilent                 | N5182A       | MY48180656    | Jun 30, 2016  | 1 Year        |
| 11   | Signal Generator               | Agilent                 | E4421B       | MY41000743    | Jun 30, 2016  | 1 Year        |
| 12   | DC Power supply                | IV                      | IV-8080      | YQSB0096      | Jun 30, 2016  | 1 Year        |
| 13   | TEMP&HUMI PROGRAMMABLE CHAMBER | Bell Group              | BE-THK-150M8 | SE-0137       | Mar. 16, 2016 | 1 Year        |

### e. Test Results


Pass.

## f. Test Data


| Channel | Frequency<br>(MHz) | Bandwidth<br>(kHz) | Limit<br>(kHz) | Results |
|---------|--------------------|--------------------|----------------|---------|
| Low     | 2402               | 505.3              |                | Pass    |
| Mid     | 2440               | 505.2              | >500           | Pass    |
| High    | 2480               | 506.6              |                | Pass    |

Test Plots See the following page.


CH Low

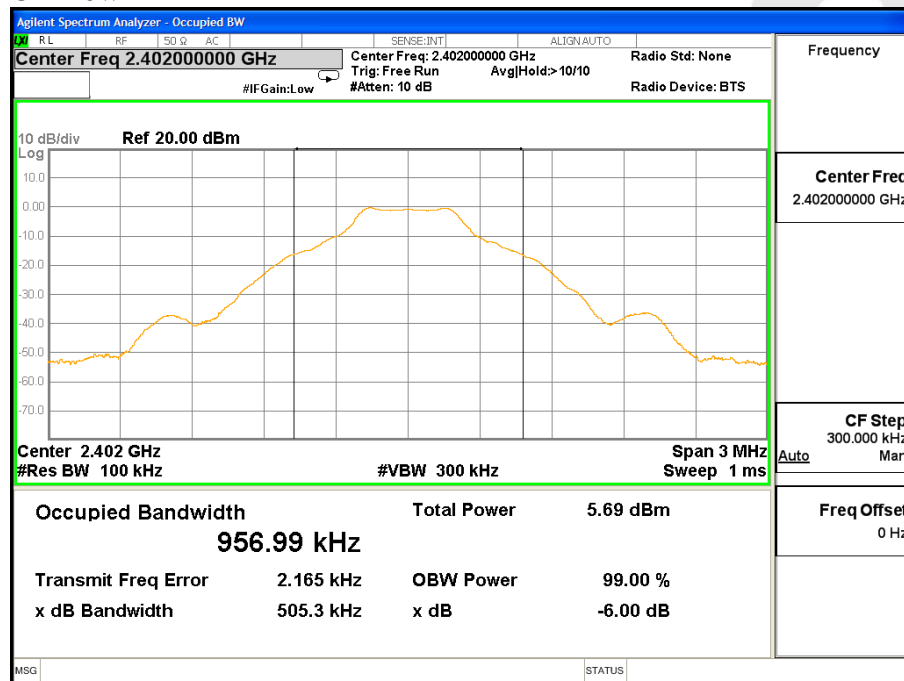

### CH Mid

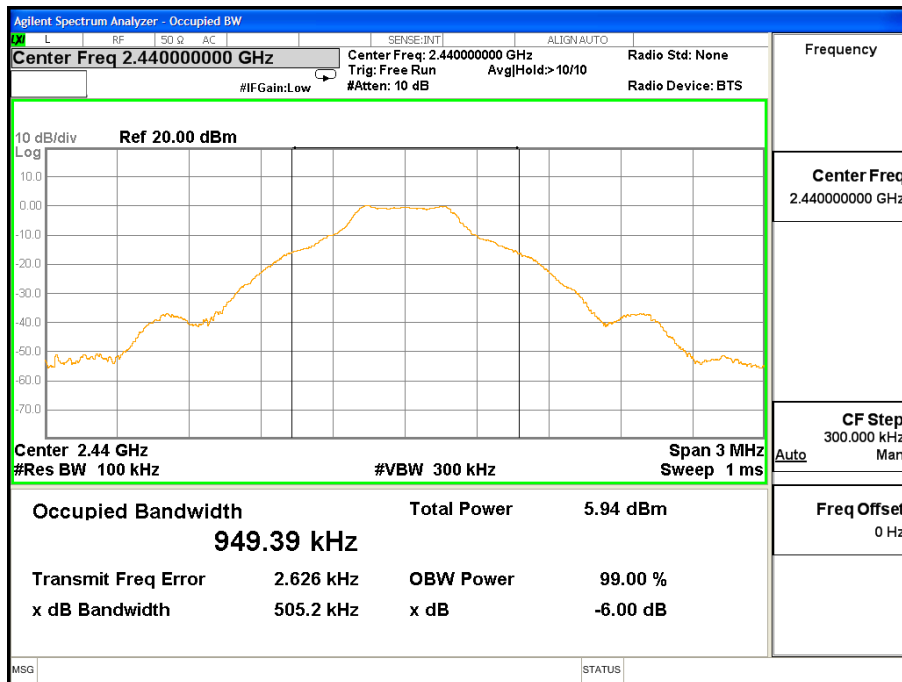

### CH High

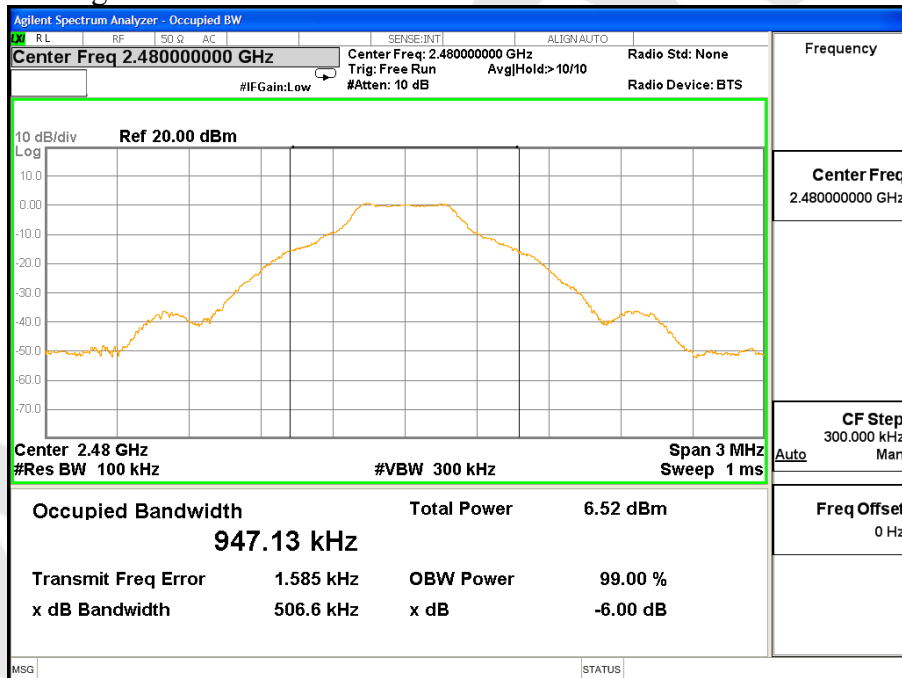




### 4.3. Maximum Peak output power test

#### a. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt (30dBm).
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antenna of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### b. Configuration of Measurement



#### c. Test Procedure

**This test was according the kDB 558074 D01 DTS Meas Guidance v03r05 9.1.1:**

1. This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.
2. Set the RBW  $\geq$  DTS bandwidth.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use peak marker function to determine the peak amplitude level.

#### d. Test Equipment

Same as the equipment listed in 4.2.


#### e. Test Results

Pass.


**g. Test Data**

| Channel | Frequency (MHz) | Maximum transmit power | Limit |         | Result |
|---------|-----------------|------------------------|-------|---------|--------|
|         |                 | (dBm)                  | (dBm) | (watts) |        |
| Low     | 2402            | 0.393                  | 30    | 1       | Pass   |
| Mid     | 2440            | 0.117                  |       |         | Pass   |
| High    | 2480            | 2.045                  |       |         | Pass   |


**CH Low**

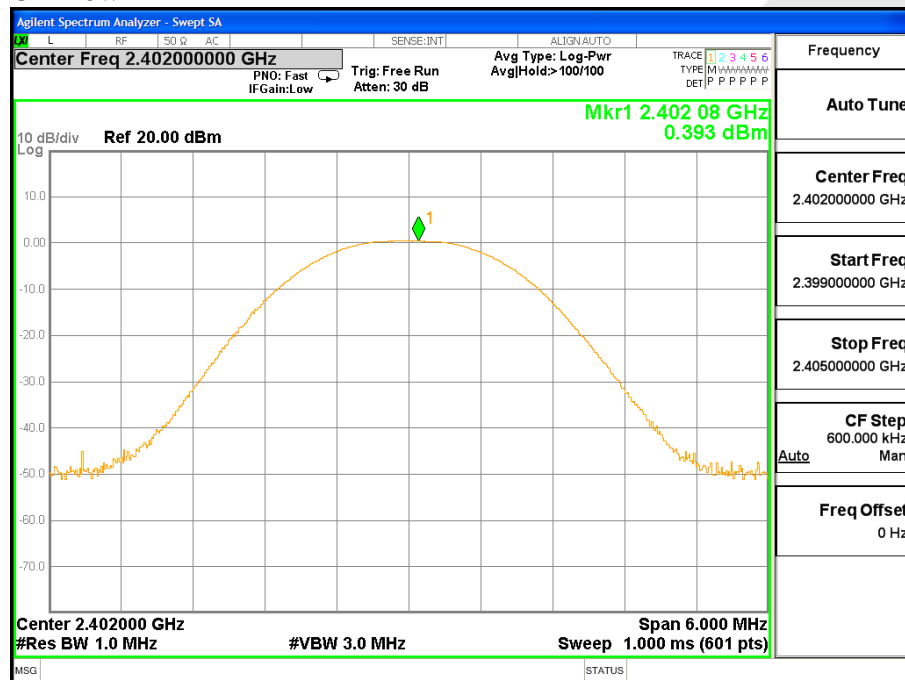

### CH Mid

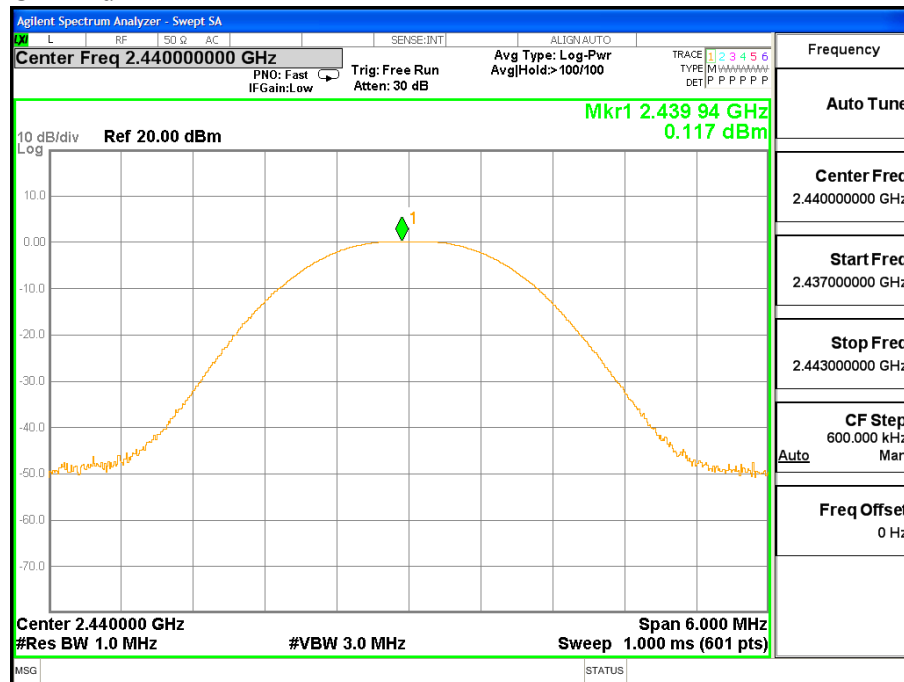

### CH High

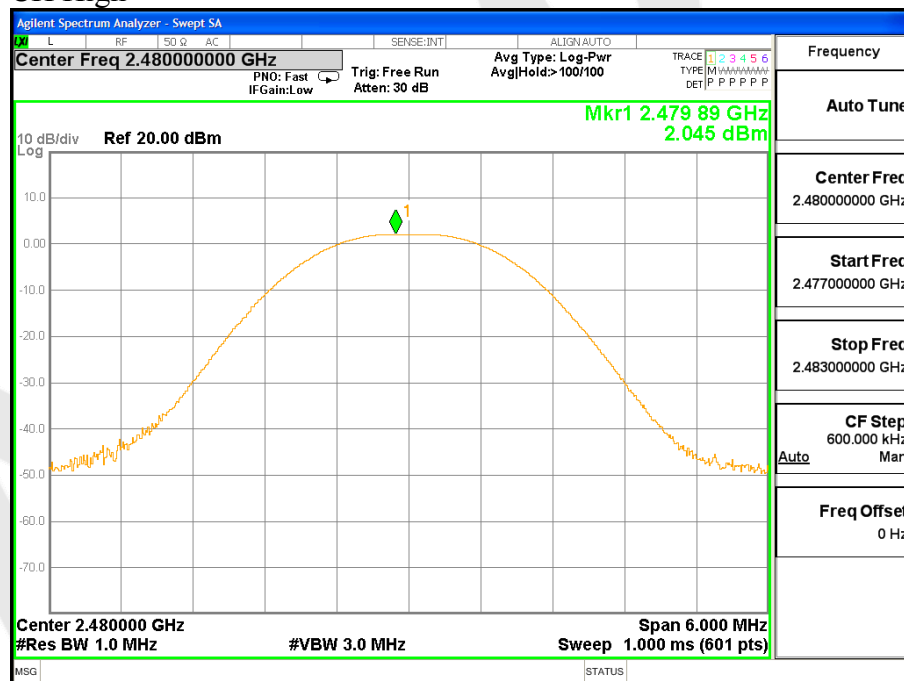

#### 4.4. Band Edges Measurement

##### a. Limit

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

##### b. Test Procedure

###### 1. Conducted Method:

- 1) Set RBW=100KHz, VBW=300KHz
- 2) Detector=peak
- 3) Sweep time= auto
- 4) Trace mode=max hold.

###### 2. Radiated Method:

- 1) For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane. The EUT is tested in 9\*6\*6 Chamber.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane. The EUT is tested in 9\*6\*6 Chamber.

- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Set RBW=100KHz, VBW=300KHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT. If pass then set Spectrum Analyzer as below:

For below 1GHz:

The resolution bandwidth and video bandwidth of test receiver/ spectrum analyzer is 120kHz.

Detector: **Quasi-Peak**

For above 1GHz Peak measurement:

The resolution bandwidth of test receiver/ spectrum analyzer is 1MHz and video bandwidth is 3MHz.

Detector: **Peak**


For above 1GHz average measurement:

The resolution bandwidth of test receiver/ spectrum analyzer is 1MHz and the video bandwidth is 1kHz.


Detector: **Peak**

- 5) Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

30M to 1G emissions:

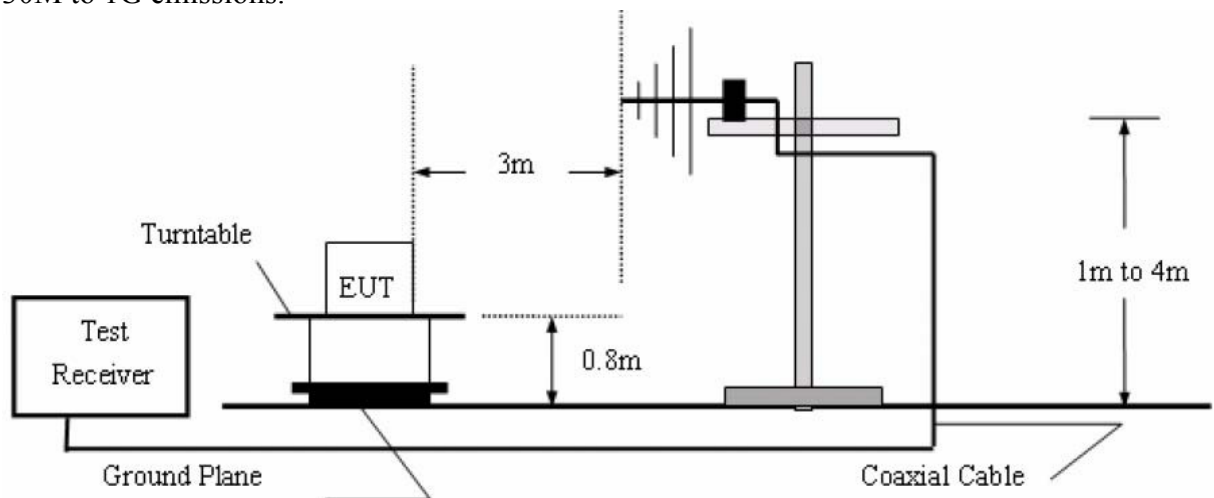

1G to 40G emissions:

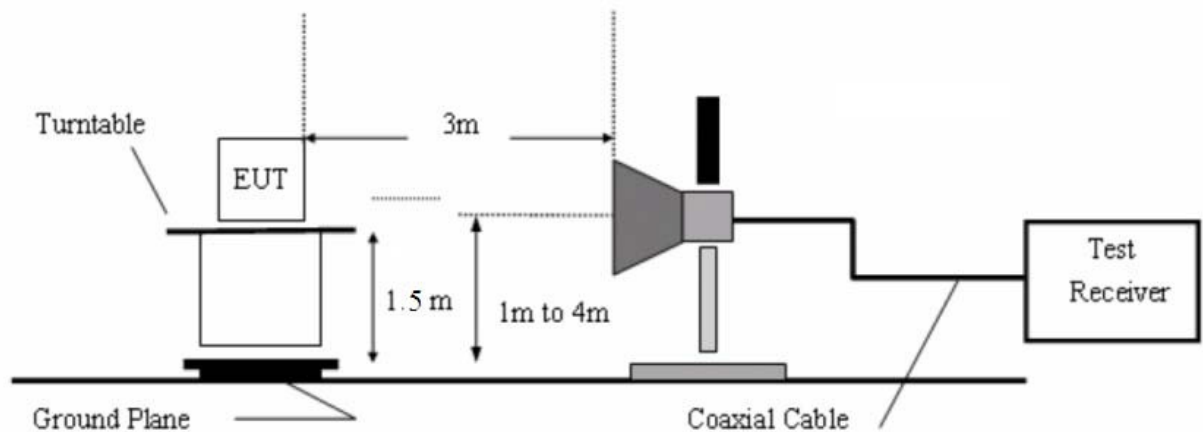

**c. Test Equipment**

Same as the equipment listed in 4.2.


**d. Test Results**

Pass.


**e. Test Plots**

See the following page.

### CH Low

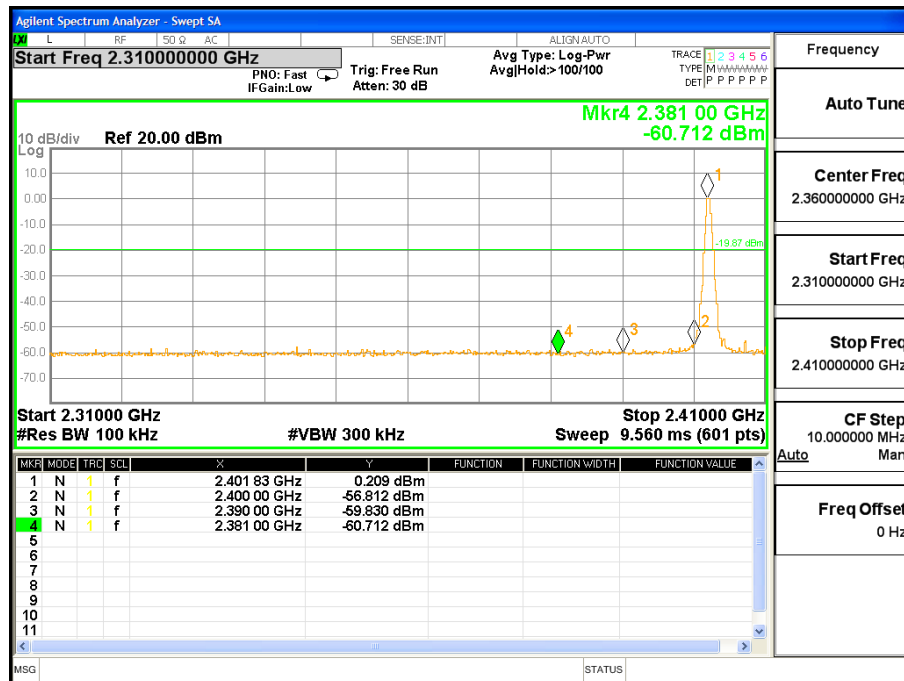


### CH High

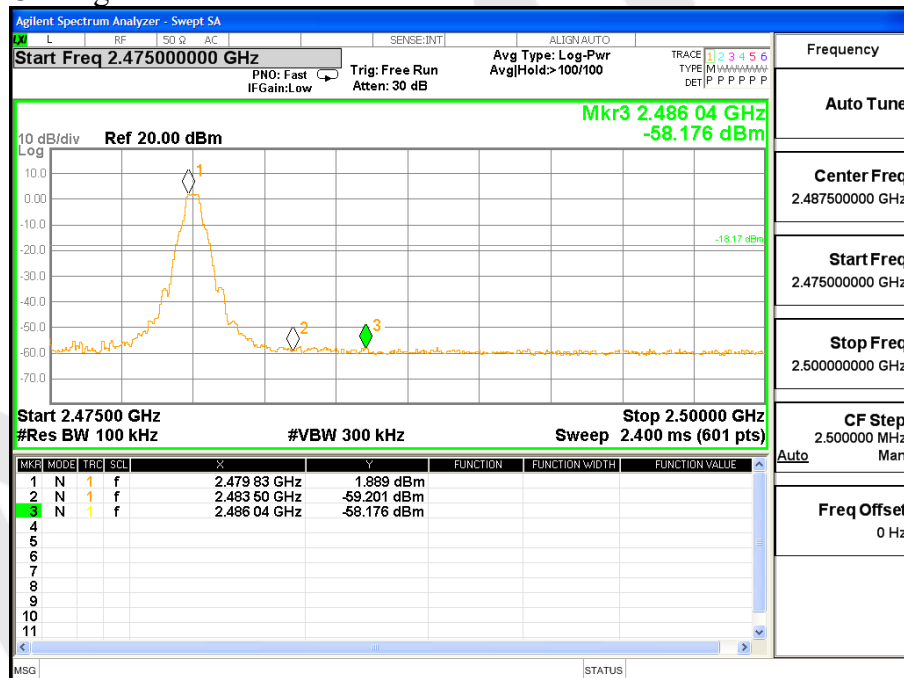

2402MHz


Horizontal-PEAK:

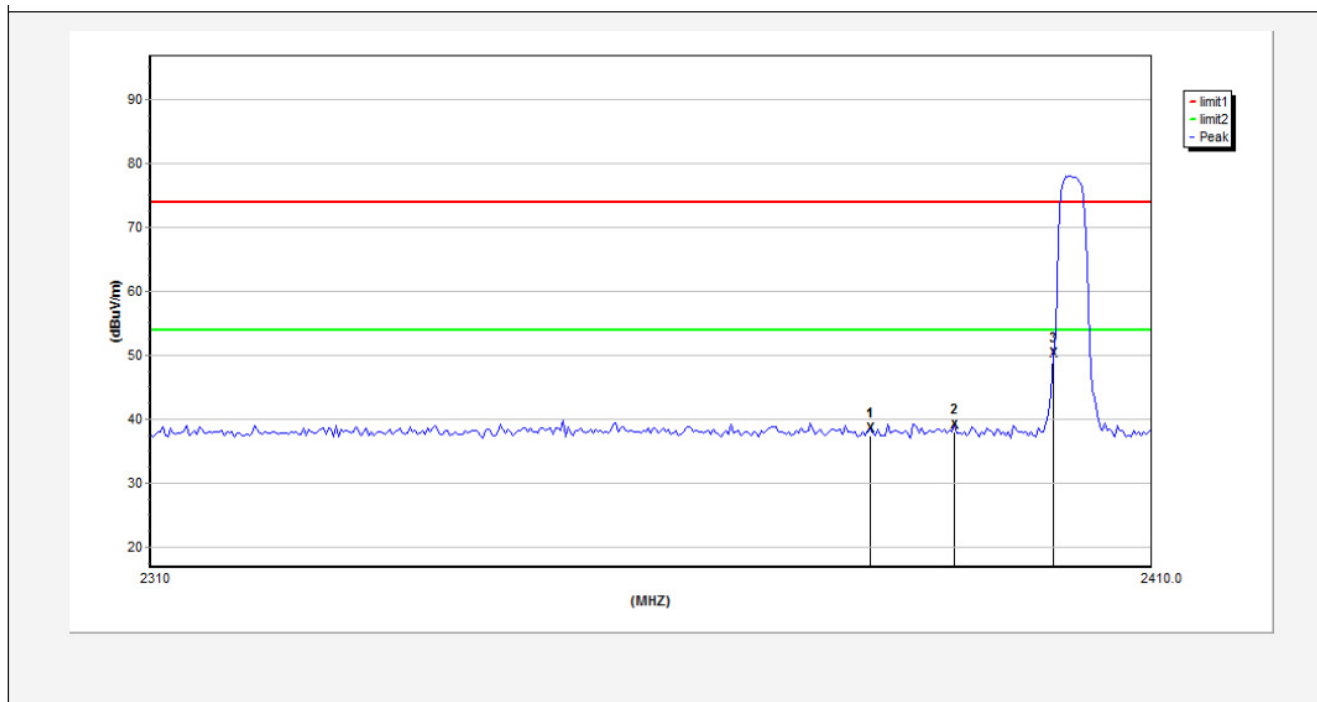

| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 2381.5000   | 39.96            | 29.13          | 34.01       | 3.4          | 38.48           | 74.00          | -35.52          | peak     | ---         | ---          |
| 2   | 2390.0000   | 40.48            | 29.15          | 34.01       | 3.41         | 39.03           | 74.00          | -34.97          | peak     | ---         | ---          |
| 3   | 2400.0000   | 51.71            | 29.16          | 34.01       | 3.43         | 50.29           | 74.00          | -23.71          | peak     | ---         | ---          |




Horizontal-AV:

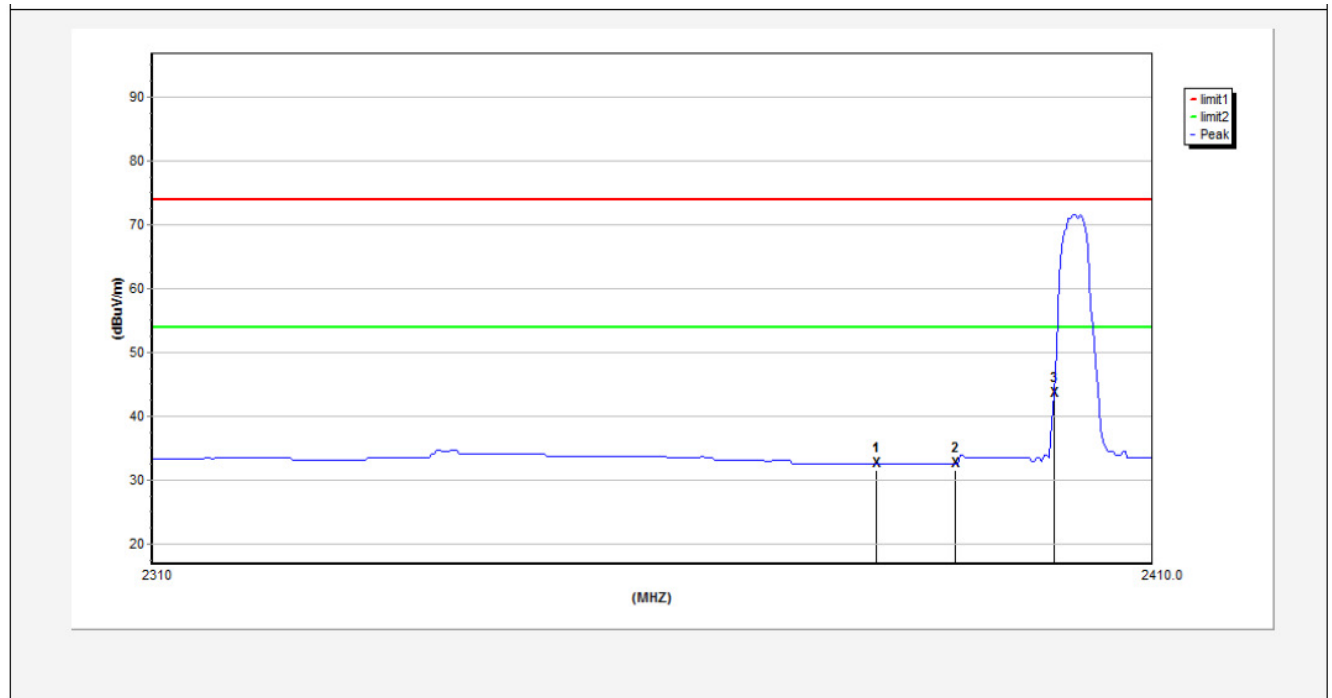

| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 2382.0000   | 34.10            | 29.13          | 34.01       | 3.4          | 32.62           | 54.00          | -21.38          | AVG      | ---         | ---          |
| 2   | 2390.0000   | 33.98            | 29.15          | 34.01       | 3.41         | 32.53           | 54.00          | -21.47          | AVG      | ---         | ---          |
| 3   | 2400.0000   | 44.94            | 29.16          | 34.01       | 3.43         | 43.52           | 54.00          | -10.48          | AVG      | ---         | ---          |


2402MHz

Vertical-PEAK:

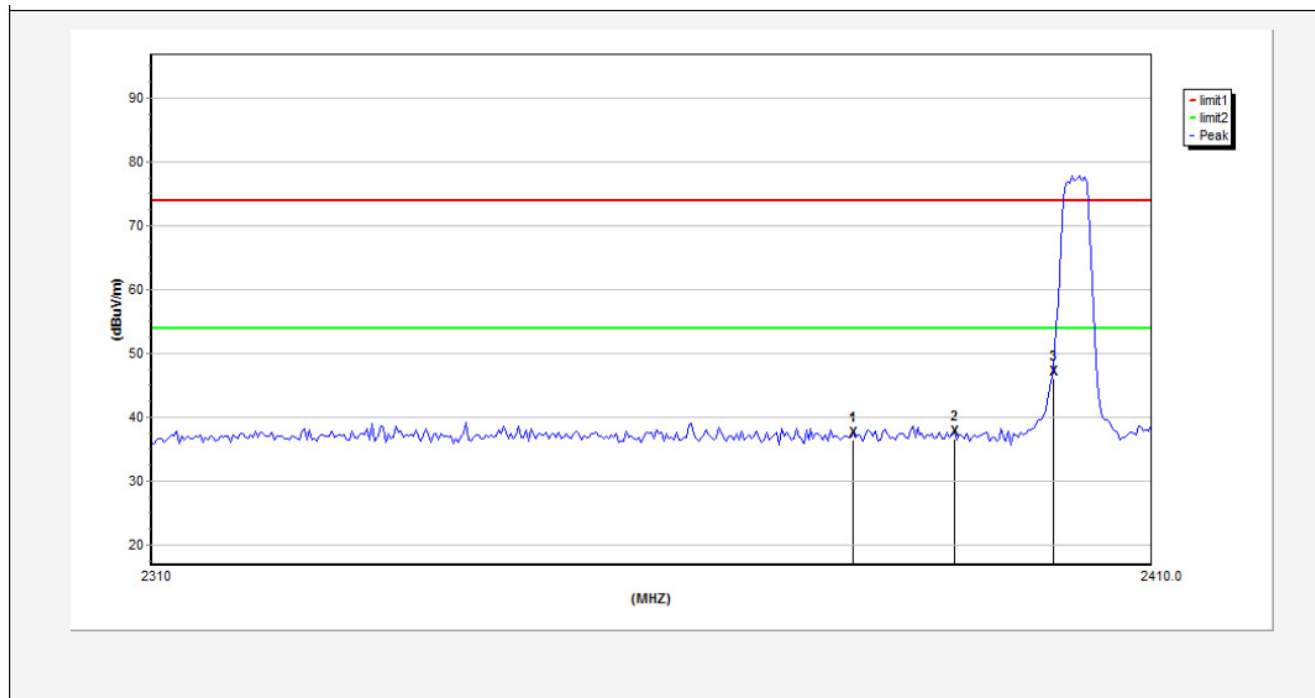

| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 2379.7500   | 39.06            | 29.13          | 34.01       | 3.4          | 37.58           | 74.00          | -36.42          | peak     | ---         | ---          |
| 2   | 2390.0000   | 39.04            | 29.15          | 34.01       | 3.41         | 37.59           | 74.00          | -36.41          | peak     | ---         | ---          |
| 3   | 2400.0000   | 48.61            | 29.16          | 34.01       | 3.43         | 47.19           | 74.00          | -26.81          | peak     | ---         | ---          |


Vertical-AV:

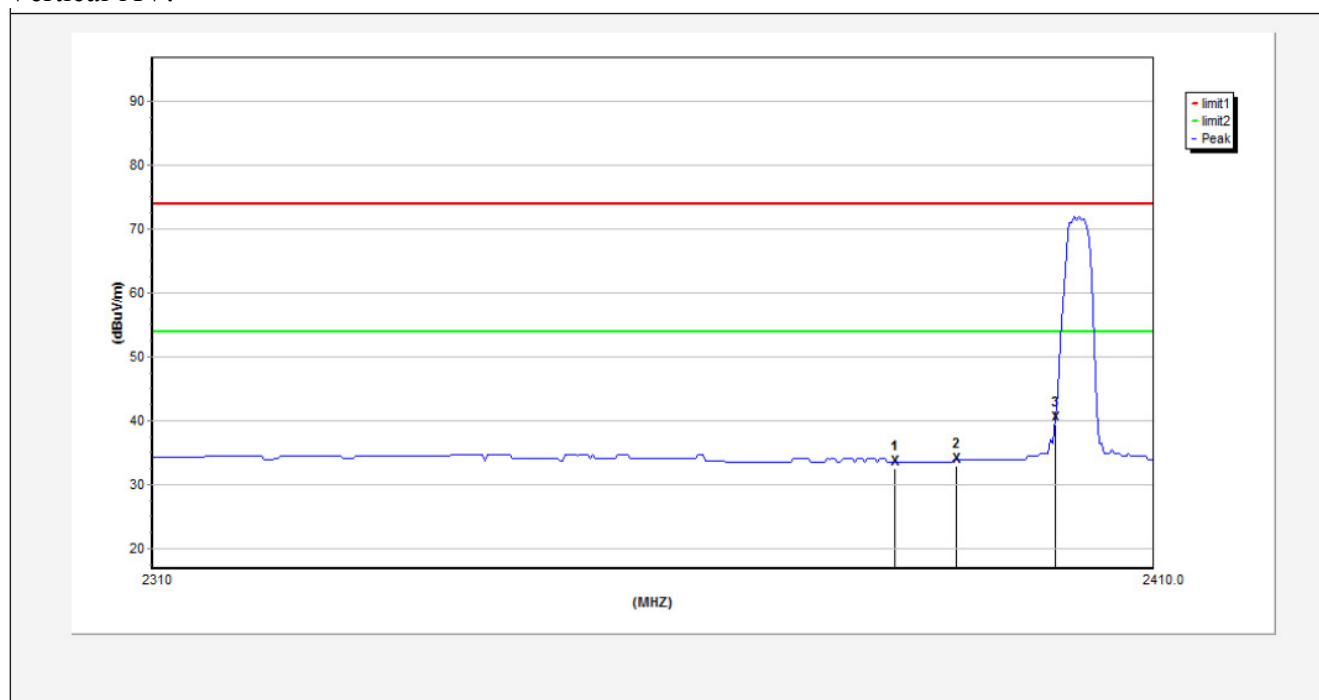

| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 2383.7500   | 35.03            | 29.14          | 34.01       | 3.4          | 33.56           | 54.00          | -20.44          | AVG      | ---         | ---          |
| 2   | 2390.0000   | 35.43            | 29.15          | 34.01       | 3.41         | 33.98           | 54.00          | -20.02          | AVG      | ---         | ---          |
| 3   | 2400.0000   | 41.94            | 29.16          | 34.01       | 3.43         | 40.52           | 54.00          | -13.48          | AVG      | ---         | ---          |


2480MHz

Horizontal-PEAK:

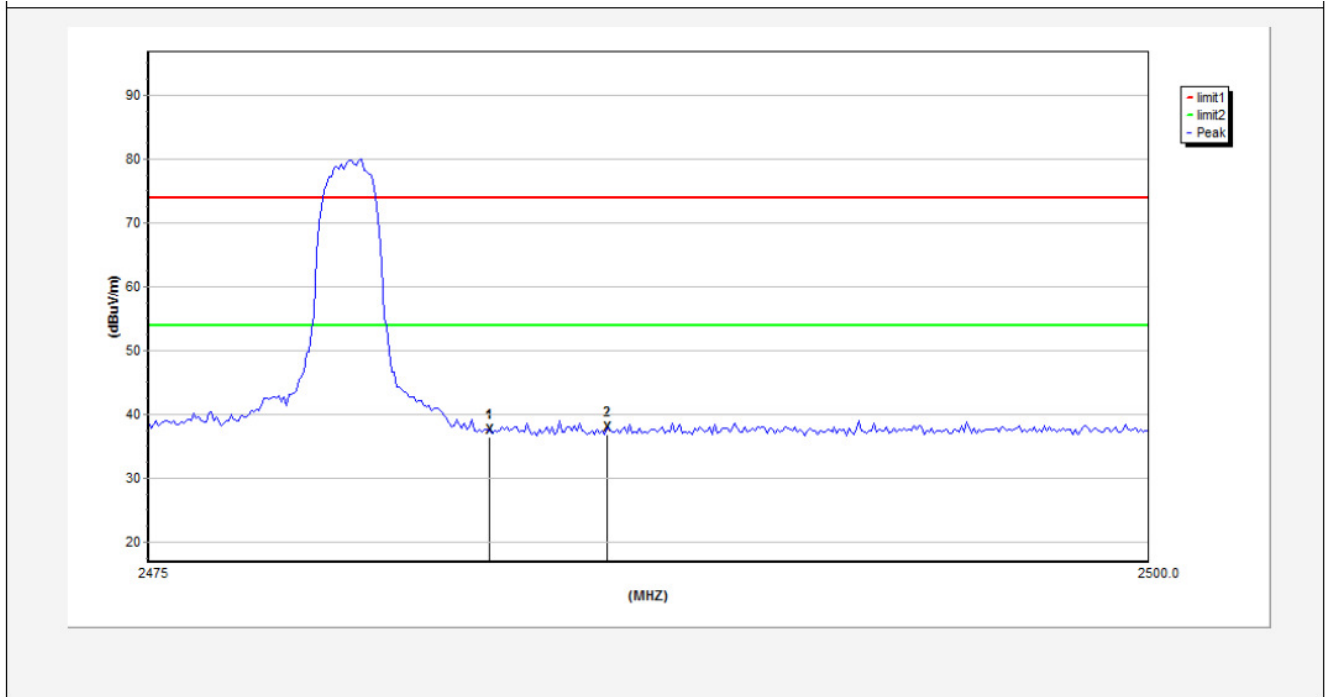


| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 2483.5000   | 38.67            | 29.28          | 34.03       | 3.53         | 37.45           | 74.00          | -36.55          | peak     | ---         | ---          |
| 2   | 2486.4375   | 39.18            | 29.28          | 34.03       | 3.54         | 37.97           | 74.00          | -36.03          | peak     | ---         | ---          |

Horizontal-AV:

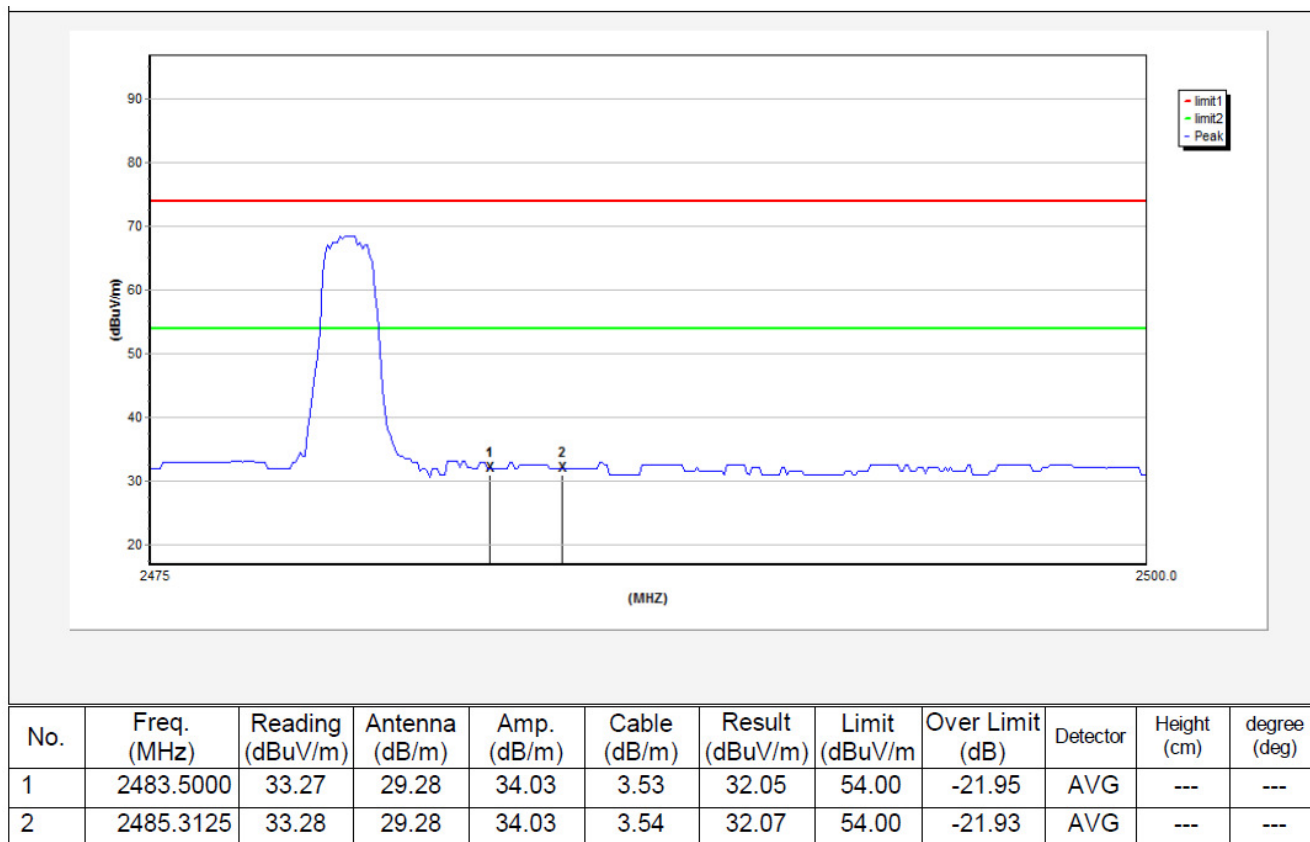


2480MHz

Vertical-PEAK:

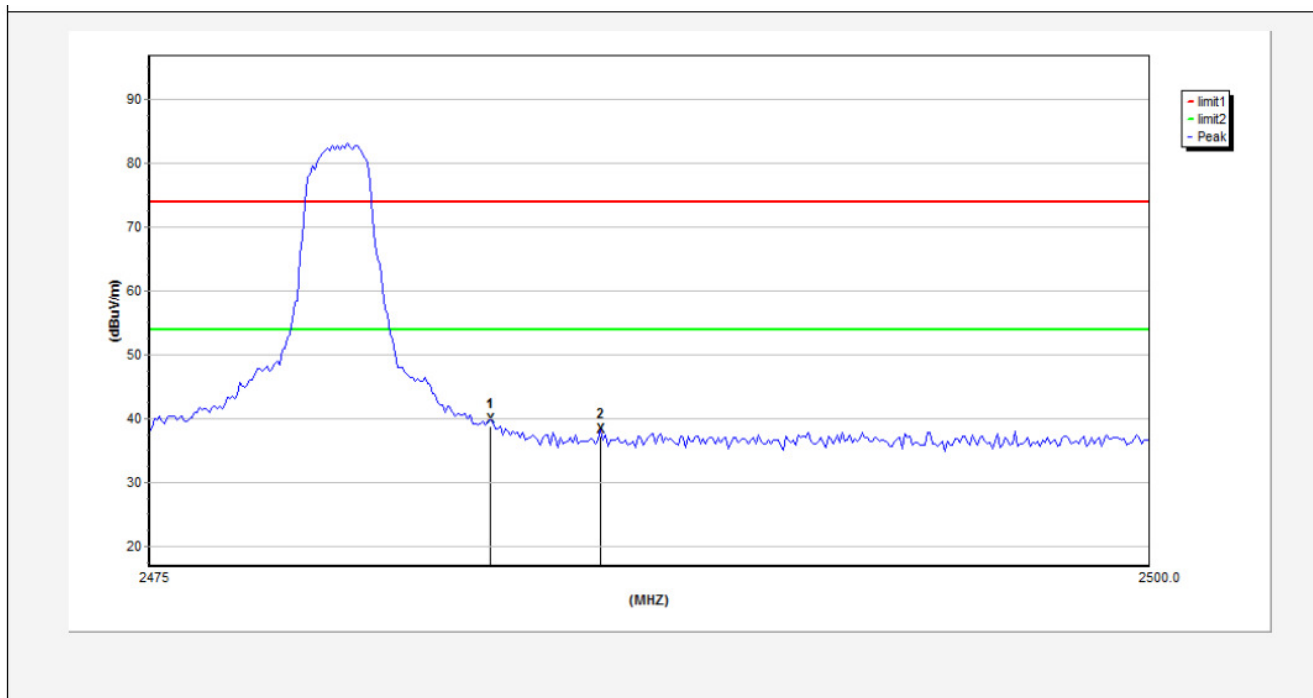

| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 2483.5000   | 41.13            | 29.28          | 34.03       | 3.53         | 39.91           | 74.00          | -34.09          | peak     | ---         | ---          |
| 2   | 2486.2500   | 39.50            | 29.28          | 34.03       | 3.54         | 38.29           | 74.00          | -35.71          | peak     | ---         | ---          |

Vertical-AV:

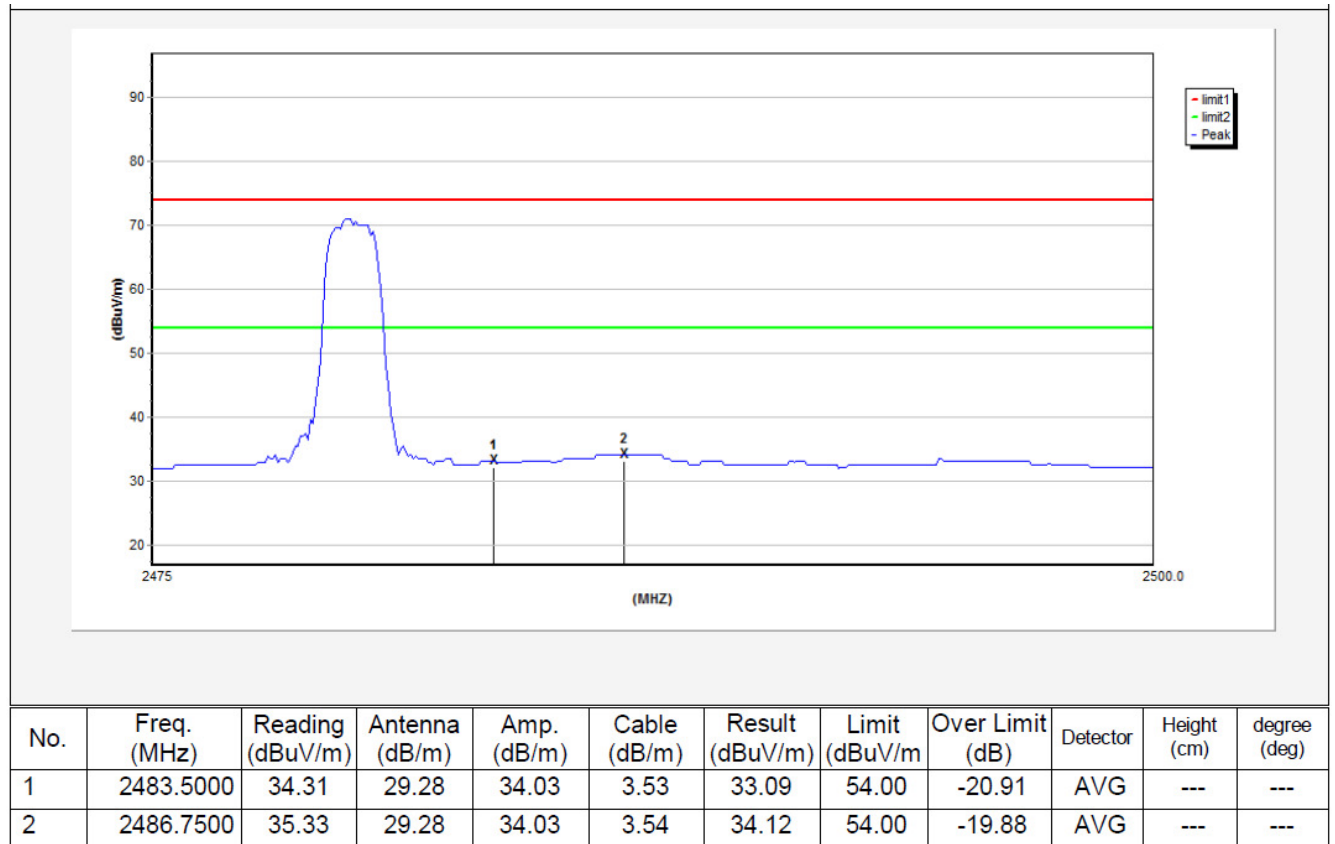

#### 4.5. Peak Power Spectral Density

##### **a. Limit**

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

##### **b. Test Procedure**

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

##### **c. Test Equipment**

Same as the equipment listed in 4.2.

##### **d. Test Setup**

See 3.1

##### **e. Test Results**

Pass

##### **f. Test Data**

Please refer to the following data.


##### **g. Test Plot** See the following pages




Test mode: IEEE 802.11b

| Channel | Frequency<br>(MHz) | PPSD<br>(dBm/3KHz) | $\Sigma$ PPSD<br>(dBm/3KHz) | Limit<br>(dBm) | Result |
|---------|--------------------|--------------------|-----------------------------|----------------|--------|
| Low     | 2402               | -13.878            | -                           | 8.00           | Pass   |
| Mid     | 2440               | -14.438            | -                           | 8.00           | Pass   |
| High    | 2480               | -11.620            | -                           | 8.00           | Pass   |


CH Low

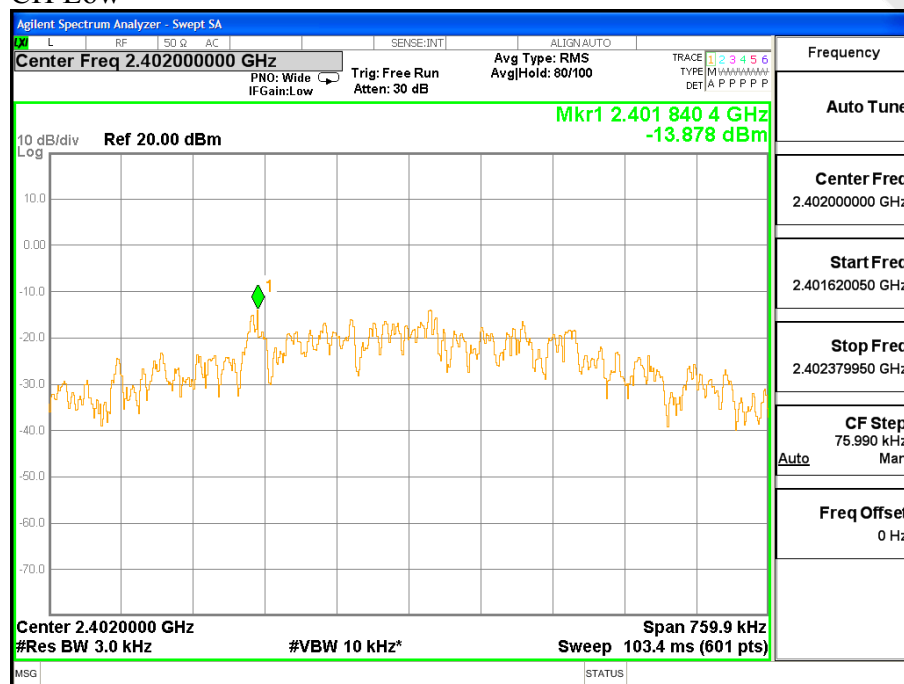

## CH Mid

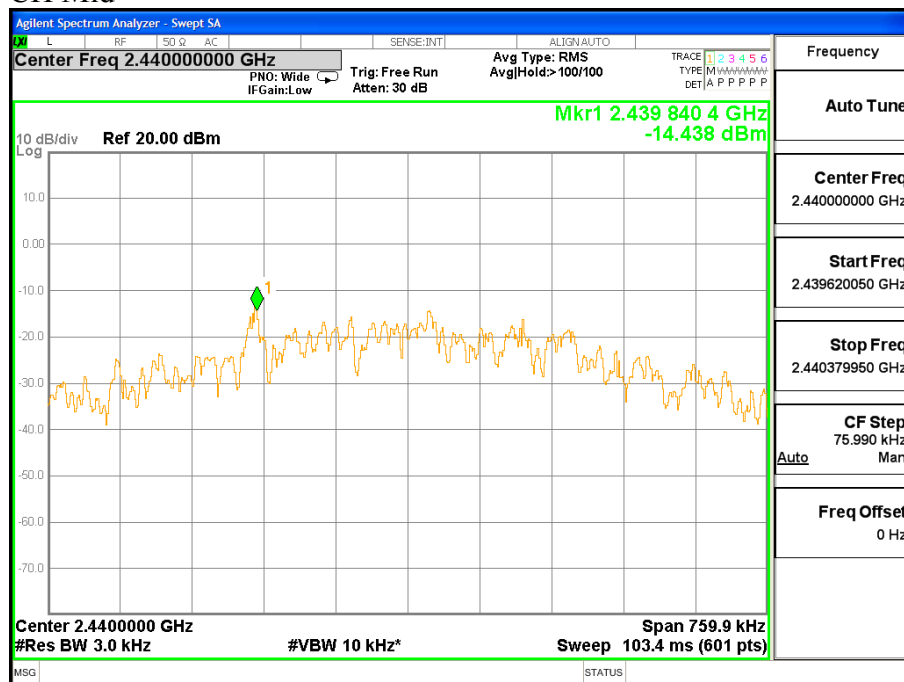

## CH High

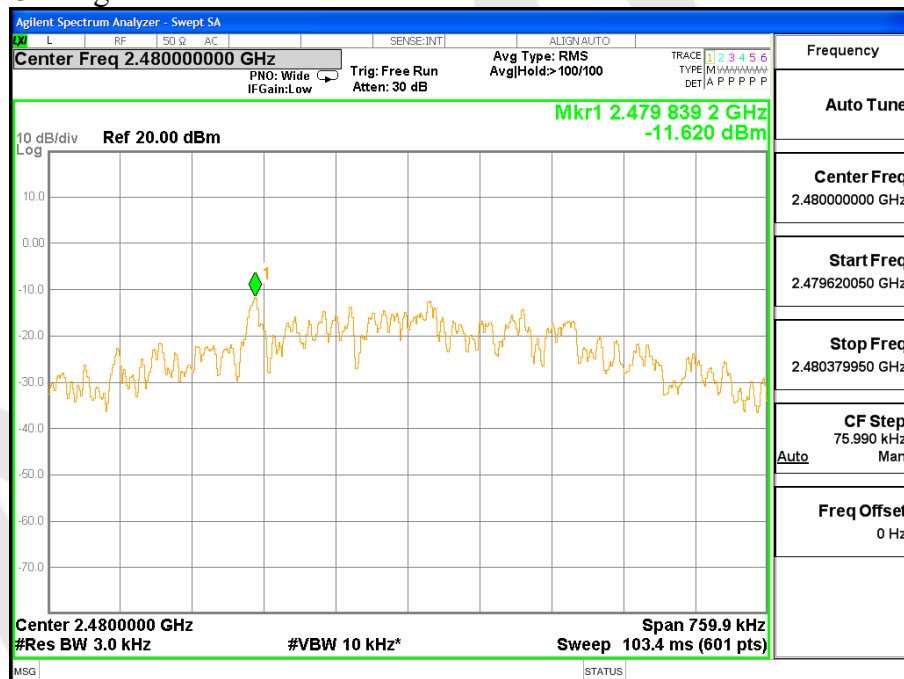

## 4.6. Radiated Emissions

### 4.6.1.1. Test Limits (< 30 MHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meter) |
|-----------------|-----------------------------------|------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                          |
| 0.490-1.705     | 24000/F(kHz)                      | 30                           |
| 1.705-30.0      | 30                                | 30                           |

### 4.6.1.2. Test Limits (≥ 30 MHz)

| FIELD STRENGTH of Fundamental: @3M | FIELD STRENGTH of Harmonics | S15.209 30 - 88 MHz | 40 dBuV/m |
|------------------------------------|-----------------------------|---------------------|-----------|
| 902-928 MHz                        |                             | 88 - 216 MHz        | 43.5      |
| 2.4-2.4835 GHz                     |                             | 216 - 960 MHz       | 46        |
| 94 dBμV/m @3m                      | 54 dBμV/m @3m               | ABOVE 960 MHz       | 54dBuV/m  |


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### Test Equipment


| Item | Equipment                      | Manufacturer            | Model No.    | Serial No.    | Last Cal.     | Cal. Interval |
|------|--------------------------------|-------------------------|--------------|---------------|---------------|---------------|
| 1.   | Spectrum Analysis              | Agilent                 | E4407B       | US39390582    | Apr. 16, 2016 | 1 Year        |
| 2.   | Preamplifier                   | Instruments corporation | EMC011830    | 980100        | Apr. 16, 2016 | 1 Year        |
| 3.   | EMI Test Receiver              | Rohde & Schwarz         | ESPI         | 101604        | Apr. 16, 2016 | 1 Year        |
| 4.   | Double Ridged Horn Antenna     | Instruments corporation | GTH-0118     | 351600        | Apr. 19, 2016 | 1 Year        |
| 5.   | Bilog Broadband Antenna        | Schwarzbeck             | VULB9163     | VULB 9163-289 | Apr. 19, 2016 | 1 Year        |
| 6.   | Pre-amplifier                  | SONOMA                  | 310N         | 186860        | Apr. 16, 2016 | 1 Year        |
| 7.   | EMI Test Software EZ-EMC       | SHURPLE                 | N/A          | N/A           | N/A           | N/A           |
| 8    | Power Sensor                   | DAER                    | RPR3006W     | 15I00041SN046 | Jun 30, 2016  | 1 Year        |
| 9    | MXA Spectrum Analysis          | Agilent                 | N9020A       | MY51170037    | Jun 30, 2016  | 1 Year        |
| 10   | MXG RF Vector Signal Generator | Agilent                 | N5182A       | MY48180656    | Jun 30, 2016  | 1 Year        |
| 11   | Signal Generator               | Agilent                 | E4421B       | MY41000743    | Jun 30, 2016  | 1 Year        |
| 12   | DC Power supply                | IV                      | IV-8080      | YQSB0096      | Jun 30, 2016  | 1 Year        |
| 13   | TEMP&HUMI PROGRAMMABLE CHAMBER | Bell Group              | BE-THK-150M8 | SE-0137       | Mar. 16, 2016 | 1 Year        |

#### 4.6.2. Test Configuration:


##### 4.6.2.1. 9k to 30MHz emissions:

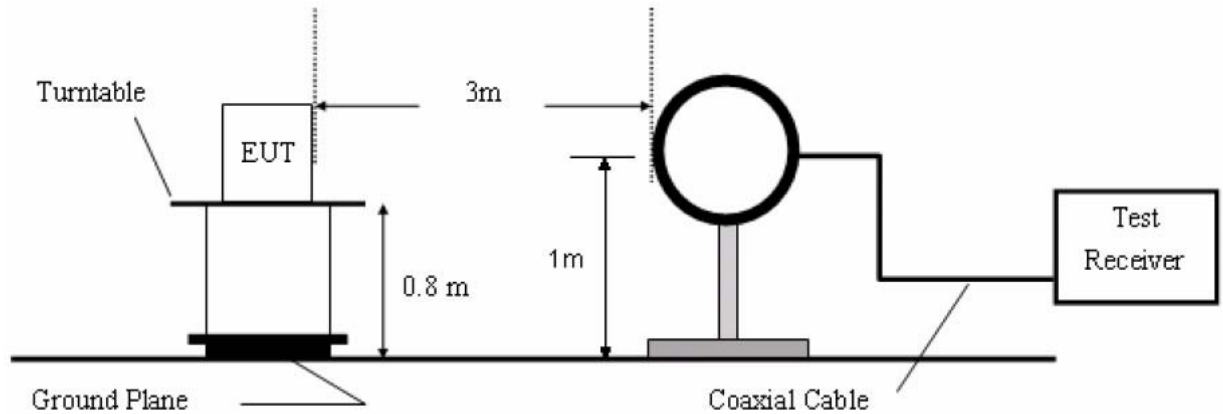

##### 4.6.2.2. 30M to 1G emissions:

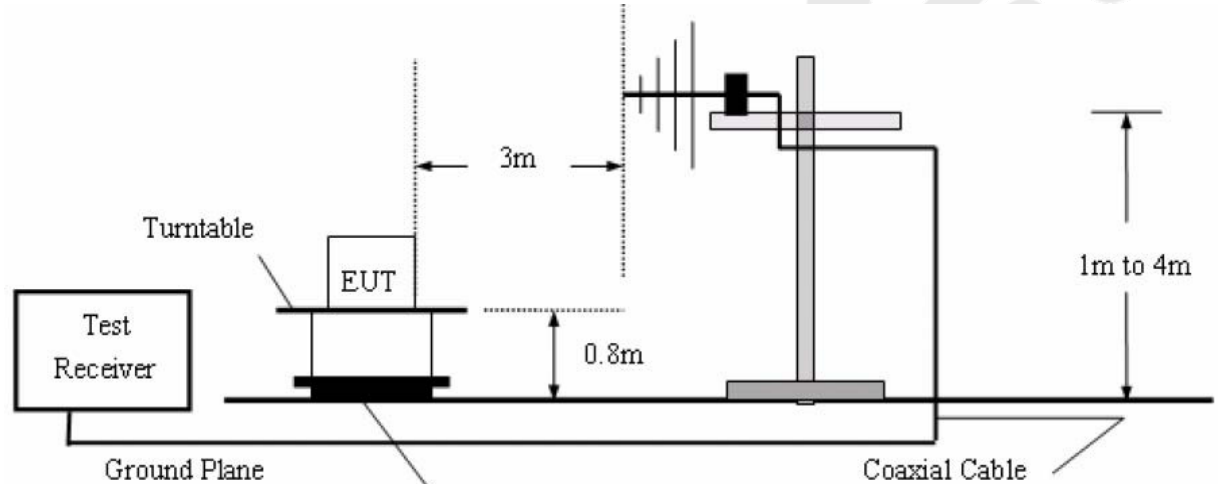

##### 4.6.2.3. 1G to 40G emissions:

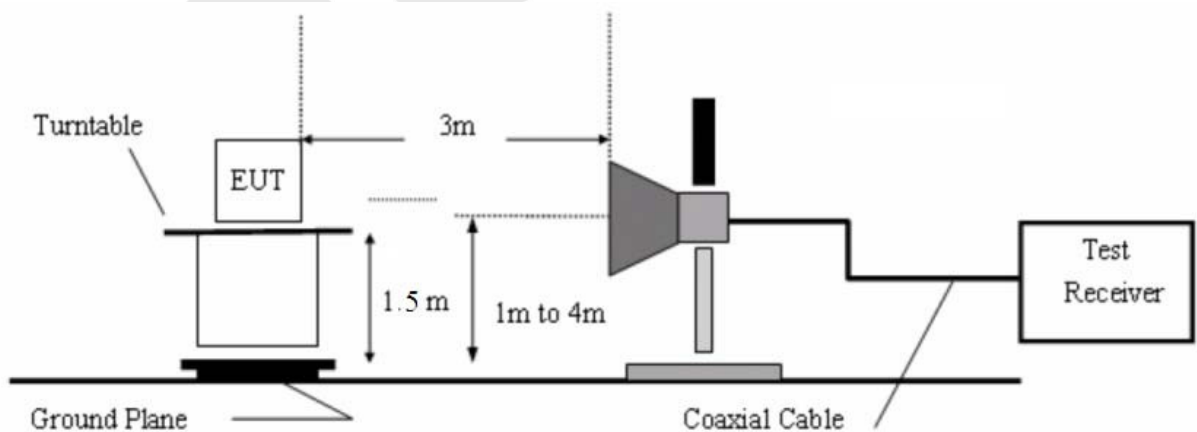

#### 4.6.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.  
For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.  
The turn table can rotate 360 degrees to determine the position of the maximum emission level.  
The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower.  
The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Measurements are made on 9KHz to 30MHz and 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz.

The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

The test results are listed in Section 4.6.4.


#### 4.6.4. Test Results

PASS.

Please refer the following pages. Only the worst case (x orientation).


The test results of above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

|            |                     |                     |                           |
|------------|---------------------|---------------------|---------------------------|
| Job No.:   | 011610322I          | Polarization:       | Horizontal                |
| Standard:  | (RE)FCC PART15 C_3m | Power Source:       | AC 120V, 60Hz for adapter |
| Test item: | Radiation Test      | Temp.(C)/Hum.(%RH): | 24.4(C)/50% RH            |
| Test Mode: | BT Mode             | Distance:           | 3m                        |

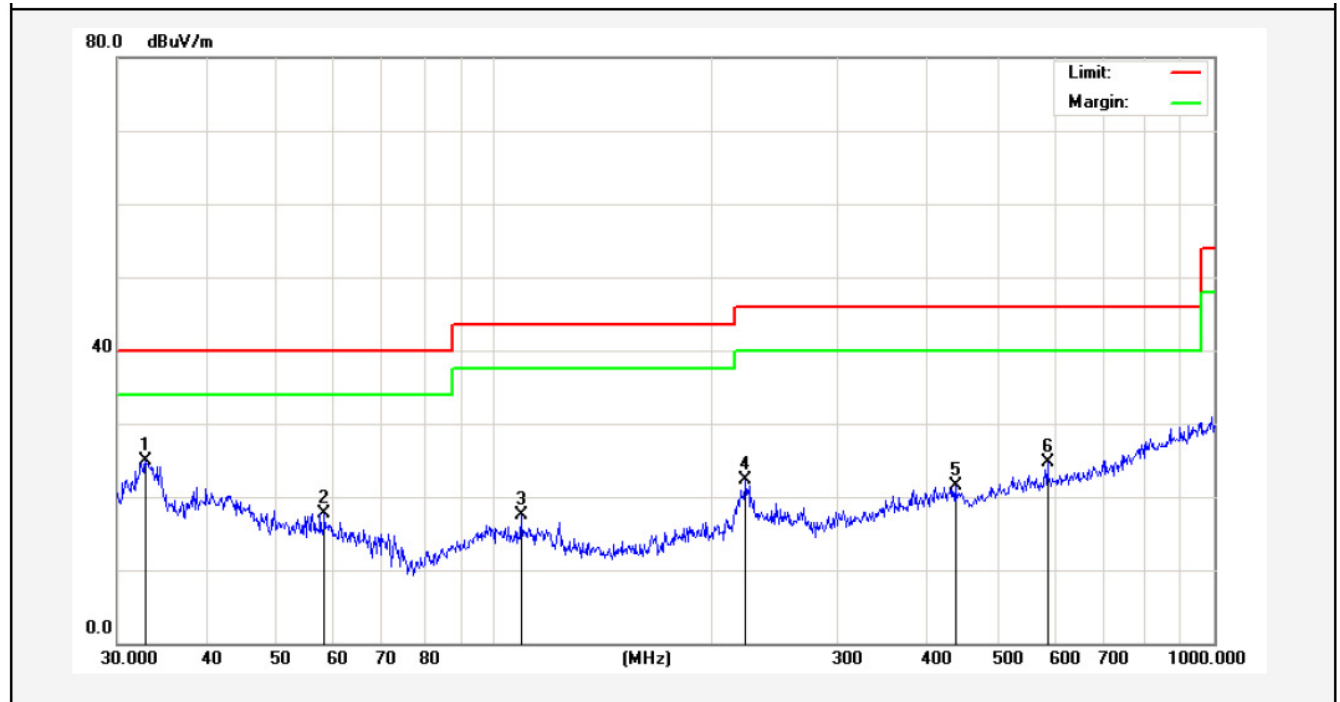


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 32.8637     | 40.33            | -15.43        | 24.90           | 40.00         | -15.10          | peak     |             |              |        |
| 2   | 58.2030     | 33.00            | -15.23        | 17.77           | 40.00         | -22.23          | peak     |             |              |        |
| 3   | 109.0286    | 38.22            | -20.63        | 17.59           | 43.50         | -25.91          | peak     |             |              |        |
| 4   | 223.7334    | 42.02            | -19.73        | 22.29           | 46.00         | -23.71          | peak     |             |              |        |
| 5   | 437.1199    | 33.64            | -12.23        | 21.41           | 46.00         | -24.59          | peak     |             |              |        |
| 6   | 586.8437    | 35.99            | -11.20        | 24.79           | 46.00         | -21.21          | peak     |             |              |        |

|            |                      |                     |                           |
|------------|----------------------|---------------------|---------------------------|
| Job No.:   | 011610322I           | Polarization:       | Vertical                  |
| Standard:  | (RE)FCC PART15 C _3m | Power Source:       | AC 120V, 60Hz for adapter |
| Test item: | Radiation Test       | Temp.(C)/Hum.(%RH): | 24.4(C)/50% RH            |
| Test Mode: | BT Mode              | Distance:           | 3m                        |

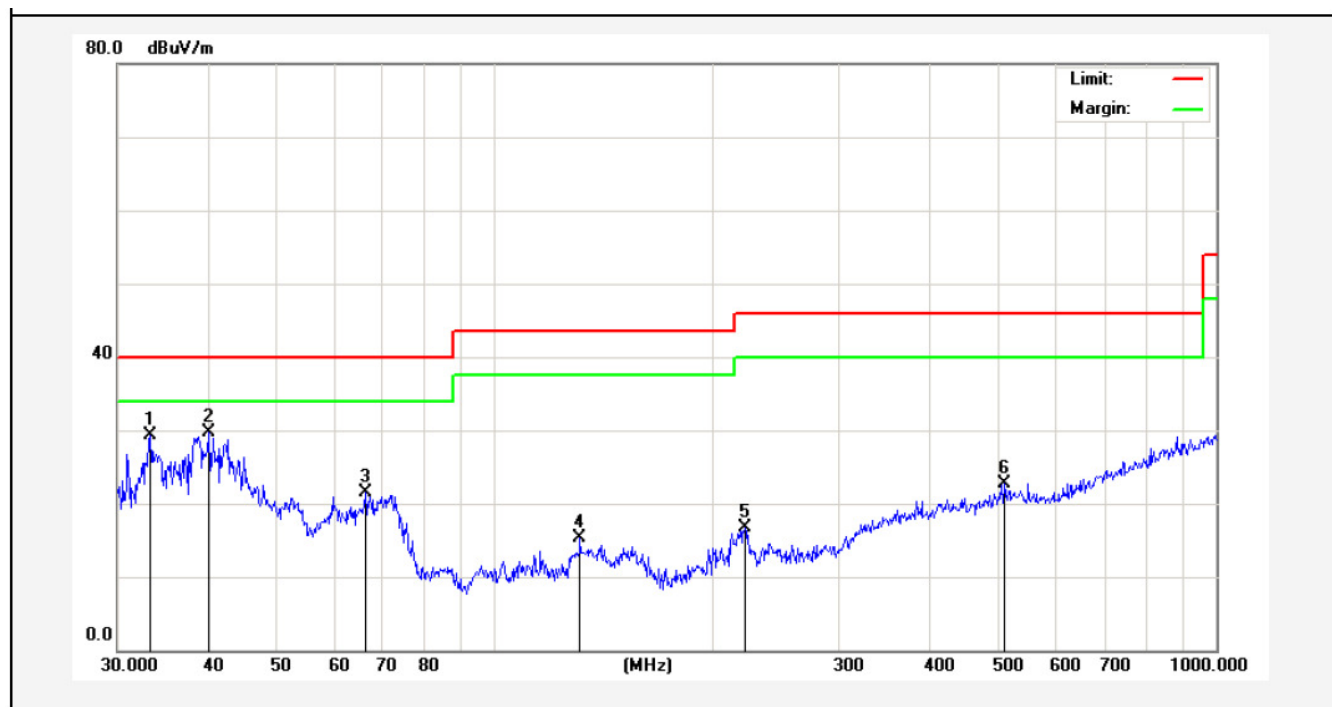

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 33.3279     | 44.44            | -15.18        | 29.26           | 40.00         | -10.74          | peak     |             |              |        |
| 2   | 40.1347     | 40.12            | -10.42        | 29.70           | 40.00         | -10.30          | peak     |             |              |        |
| 3   | 66.2662     | 39.51            | -18.01        | 21.50           | 40.00         | -18.50          | peak     |             |              |        |
| 4   | 131.2965    | 33.29            | -17.90        | 15.39           | 43.50         | -28.11          | peak     |             |              |        |
| 5   | 222.1698    | 31.78            | -15.00        | 16.78           | 46.00         | -29.22          | peak     |             |              |        |
| 6   | 508.2582    | 33.56            | -10.81        | 22.75           | 46.00         | -23.25          | peak     |             |              |        |


|            |                      |                     |                           |
|------------|----------------------|---------------------|---------------------------|
| Job No.:   | 011610322I           | Polarization:       | Horizontal                |
| Standard:  | (RE)FCC PART15 C _3m | Power Source:       | AC 120V, 60Hz for adapter |
| Test item: | Radiation Test       | Temp.(C)/Hum.(%RH): | 24.4(C)/50 % RH           |
| Note:      | 2402MHz              | Distance:           | 3m                        |

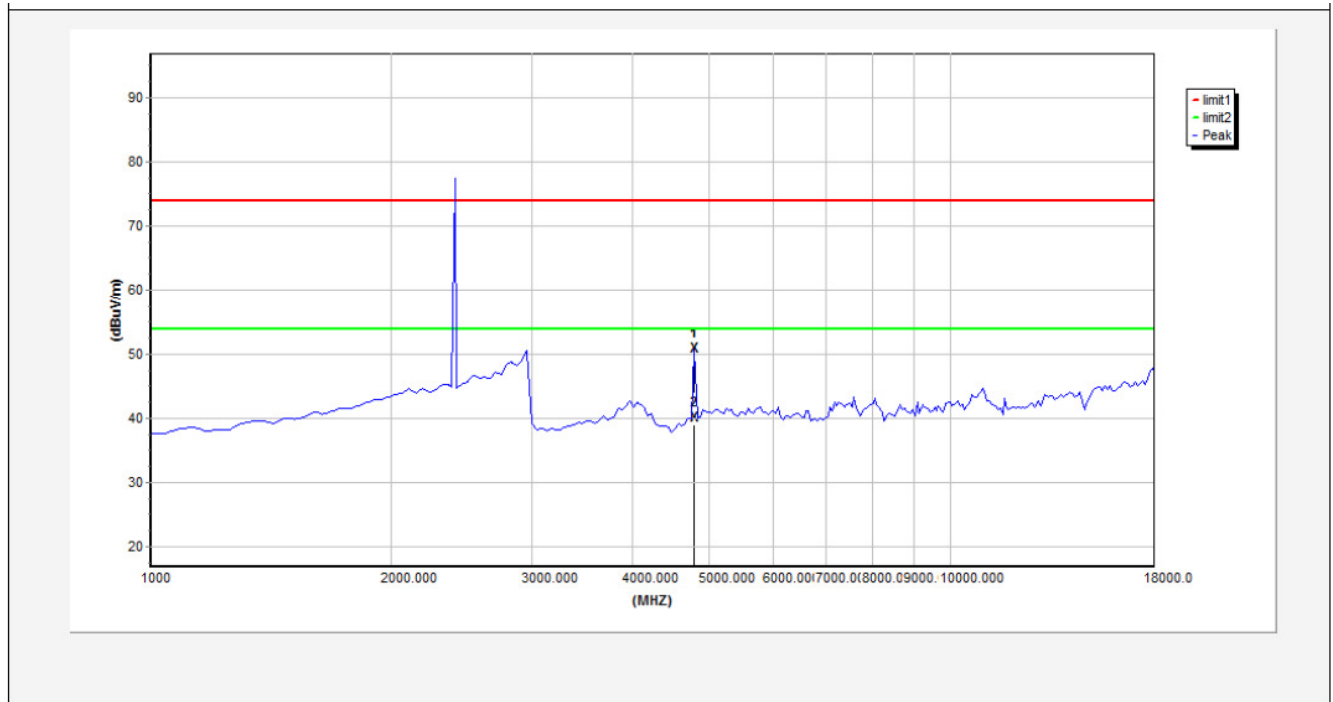

| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 4782.5000   | 44.44            | 33.94          | 34.09       | 6.55         | 50.84           | 74.00          | -23.16          | peak     | ---         | ---          |
| 2   | 4782.5000   | 33.72            | 33.94          | 34.09       | 6.55         | 40.12           | 54.00          | -13.88          | AVG      | ---         | ---          |




|            |                      |                     |                           |
|------------|----------------------|---------------------|---------------------------|
| Job No.:   | 011610322I           | Polarization:       | Vertical                  |
| Standard:  | (RE)FCC PART15 C _3m | Power Source:       | AC 120V, 60Hz for adapter |
| Test item: | Radiation Test       | Temp.(C)/Hum.(%RH): | 24.4(C)/50 % RH           |
| Note:      | 2402MHz              | Distance:           | 3m                        |

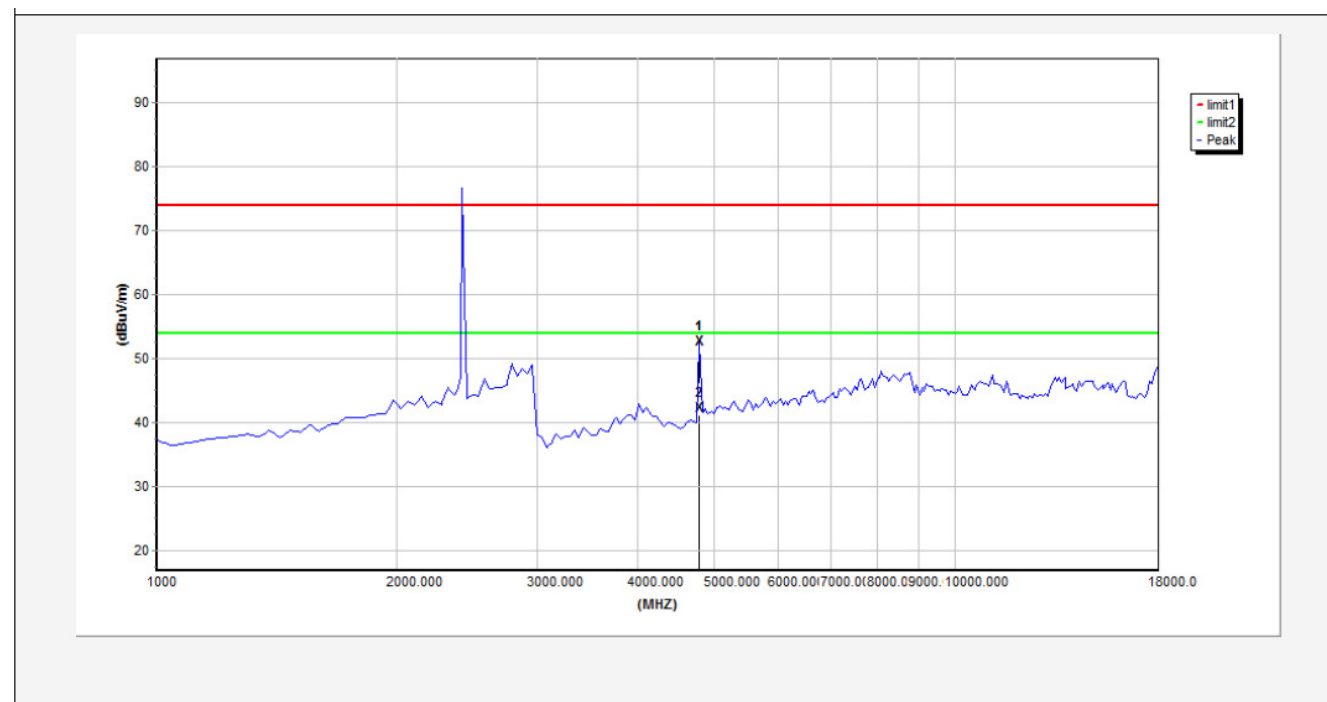


| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 4782.5000   | 46.25            | 33.94          | 34.09       | 6.55         | 52.65           | 74.00          | -21.35          | peak     | ---         | ---          |
| 2   | 4782.5000   | 35.71            | 33.94          | 34.09       | 6.55         | 42.11           | 54.00          | -11.89          | AVG      | ---         | ---          |

|            |                      |                     |                           |
|------------|----------------------|---------------------|---------------------------|
| Job No.:   | 0116103221           | Polarization:       | Horizontal                |
| Standard:  | (RE)FCC PART15 C _3m | Power Source:       | AC 120V, 60Hz for adapter |
| Test item: | Radiation Test       | Temp.(C)/Hum.(%RH): | 24.4(C)/50 % RH           |
| Note:      | 2440MHz              | Distance:           | 3m                        |

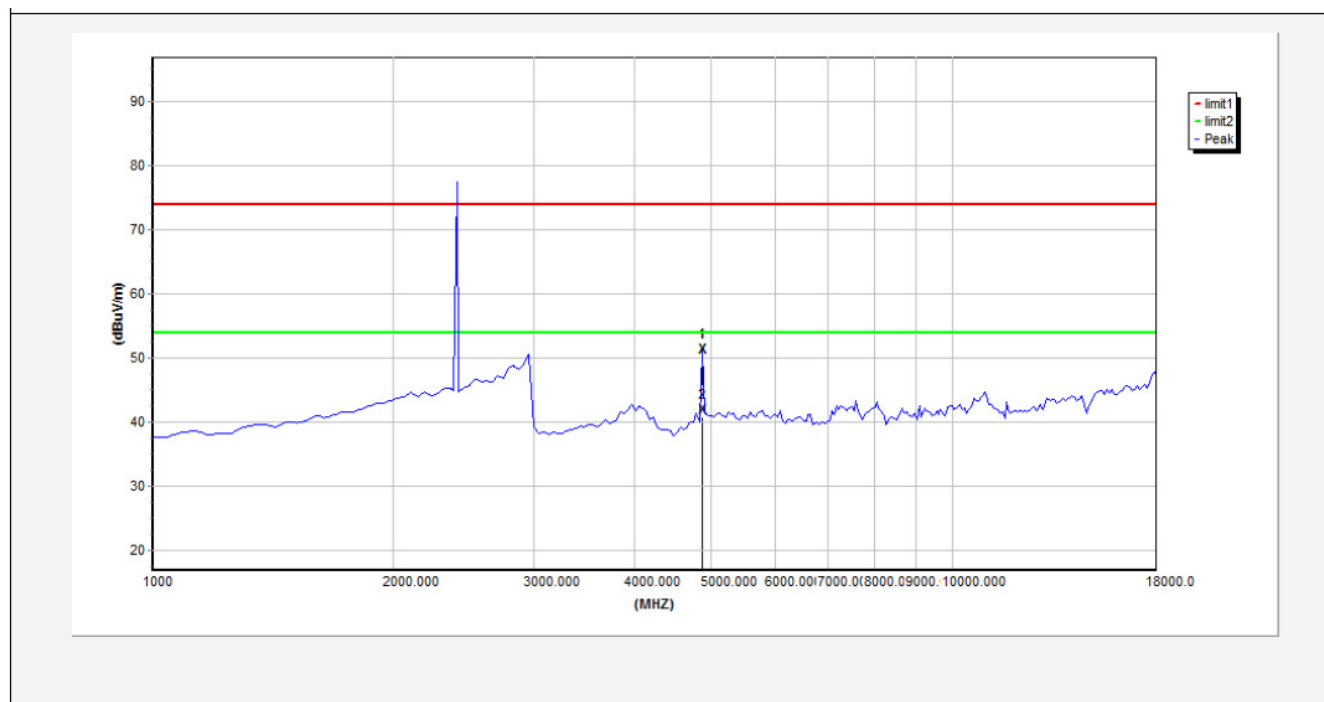


| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 4867.5000   | 44.28            | 34.32          | 34.09       | 6.67         | 51.18           | 74.00          | -22.82          | peak     | ---         | ---          |
| 2   | 4867.5000   | 34.87            | 34.32          | 34.09       | 6.67         | 41.77           | 54.00          | -12.23          | AVG      | ---         | ---          |

|            |                      |                     |                           |
|------------|----------------------|---------------------|---------------------------|
| Job No.:   | 011610322I           | Polarization:       | Vertical                  |
| Standard:  | (RE)FCC PART15 C _3m | Power Source:       | AC 120V, 60Hz for adapter |
| Test item: | Radiation Test       | Temp.(C)/Hum.(%RH): | 24.4(C)/50 % RH           |
| Note:      | 2440MHz              | Distance:           | 3m                        |

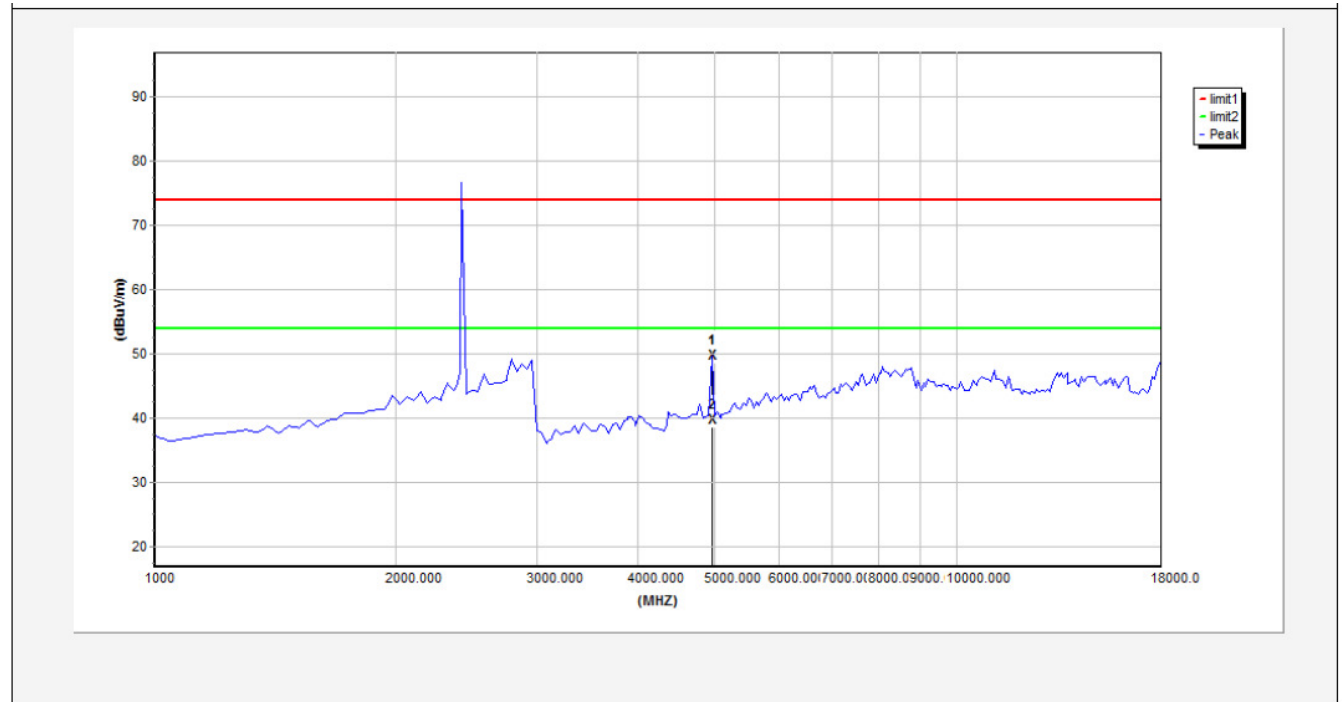


| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 4952.5000   | 42.32            | 34.69          | 34.09       | 6.78         | 49.70           | 74.00          | -24.30          | peak     | ---         | ---          |
| 2   | 4952.5000   | 32.31            | 34.69          | 34.09       | 6.78         | 39.69           | 54.00          | -14.31          | AVG      | ---         | ---          |

|            |                      |                     |                           |
|------------|----------------------|---------------------|---------------------------|
| Job No.:   | 011610322I           | Polarization:       | Horizontal                |
| Standard:  | (RE)FCC PART15 C _3m | Power Source:       | AC 120V, 60Hz for adapter |
| Test item: | Radiation Test       | Temp.(C)/Hum.(%RH): | 24.4(C)/50 % RH           |
| Note:      | 2480MHz              | Distance:           | 3m                        |

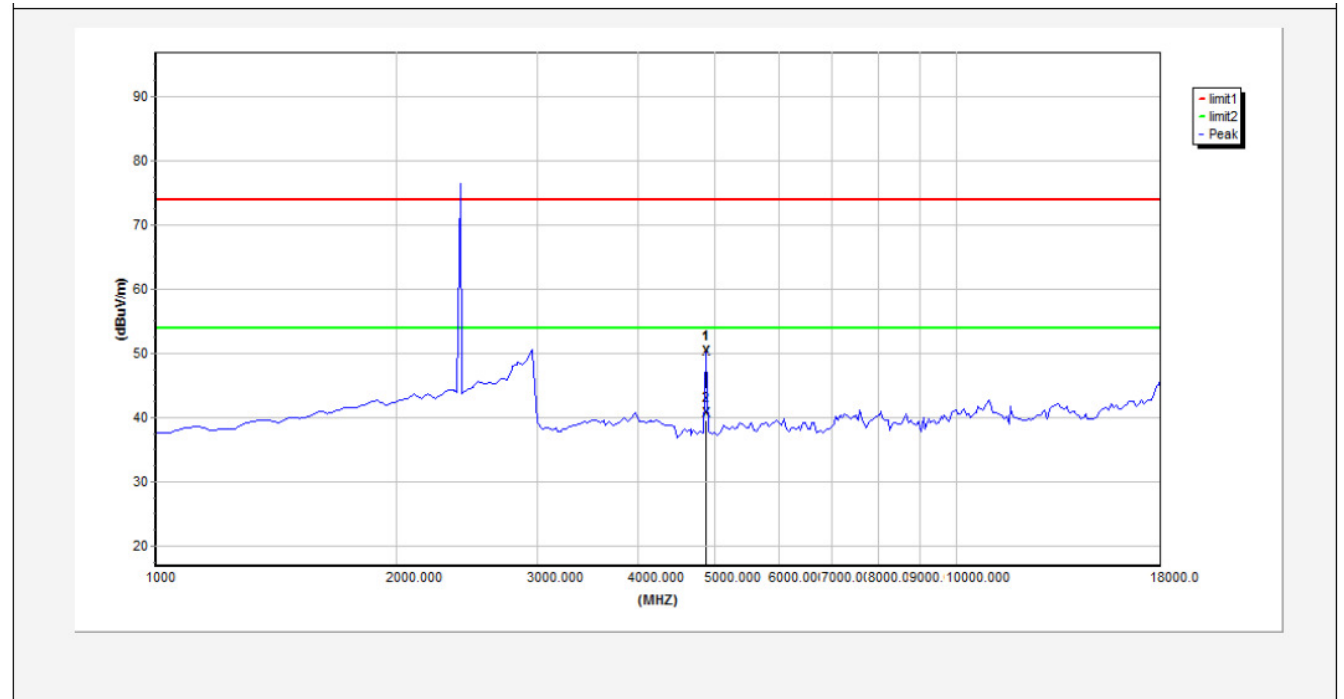

| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 4867.5000   | 43.28            | 34.32          | 34.09       | 6.67         | 50.18           | 74.00          | -23.82          | peak     | ---         | ---          |
| 2   | 4867.5000   | 33.73            | 34.32          | 34.09       | 6.67         | 40.63           | 54.00          | -13.37          | AVG      | ---         | ---          |

|            |                     |                      |                           |
|------------|---------------------|----------------------|---------------------------|
| Job No.:   | 011610322I          | Polarization:        | Vertical                  |
| Standard:  | (RE)FCC PART15 C_3m | Power Source:        | AC 120V, 60Hz for adapter |
| Test item: | Radiation Test      | Temp.(C)/Hum.(% RH): | 24.4(C)/50% RH            |
| Note:      | 2480MHz             | Distance:            | 3m                        |

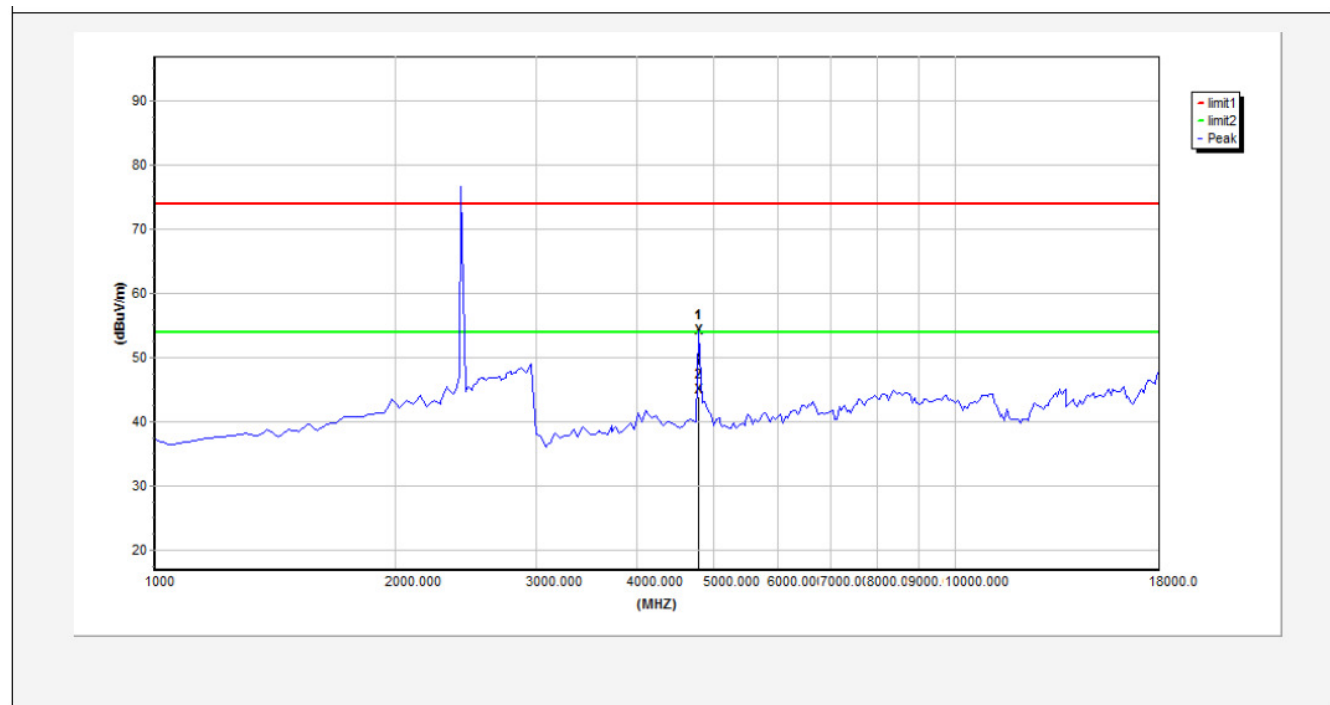

| No. | Freq. (MHz) | Reading (dBuV/m) | Antenna (dB/m) | Amp. (dB/m) | Cable (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) |
|-----|-------------|------------------|----------------|-------------|--------------|-----------------|----------------|-----------------|----------|-------------|--------------|
| 1   | 4782.5000   | 47.75            | 33.94          | 34.09       | 6.55         | 54.15           | 74.00          | -19.85          | peak     | ---         | ---          |
| 2   | 4782.5000   | 38.57            | 33.94          | 34.09       | 6.55         | 44.97           | 54.00          | -9.03           | AVG      | ---         | ---          |

## 5. ANTENNA APPLICATION


### 5.1. Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 5.2. Result

The EUT's antenna used a PCB antenna which is permanently attached, The antenna's gain is 2dBi and meets the requirement.

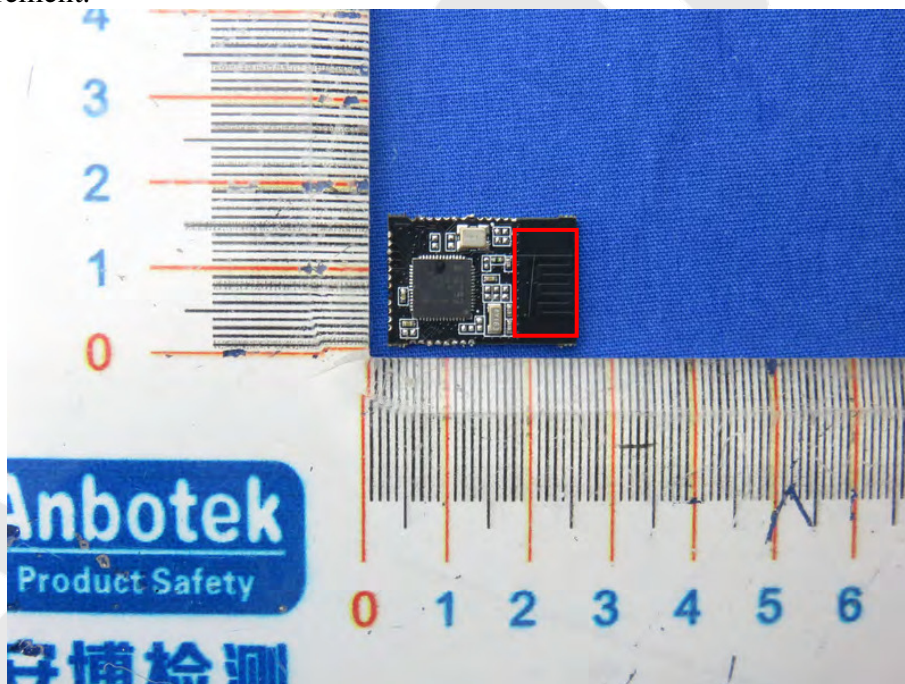





## 6. PHOTOGRAPH

### 6.1 Photo of Conducted Emission Test



### 6.2 Photo of Radiation Emission Test

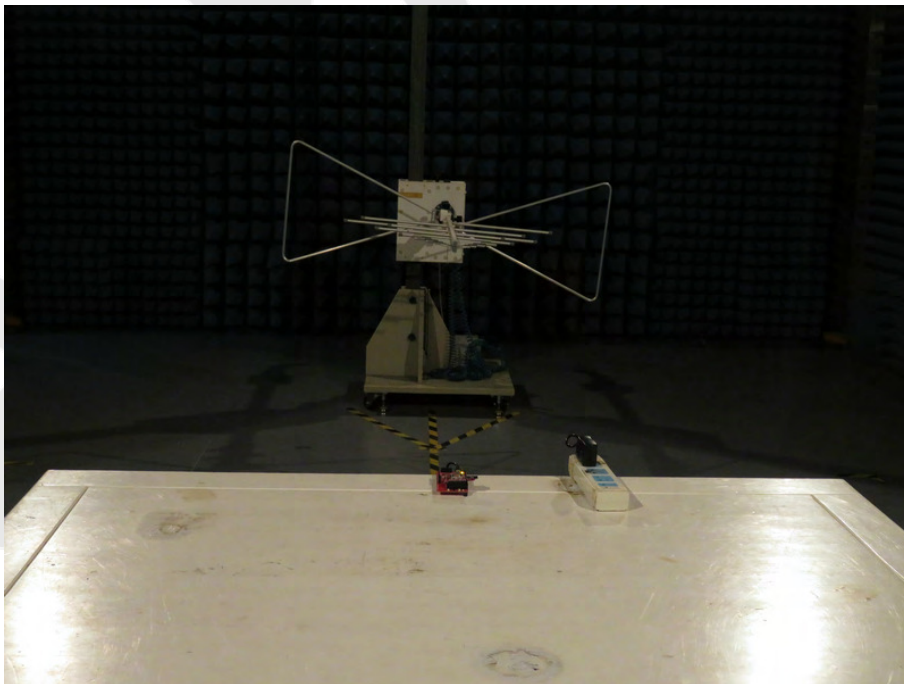


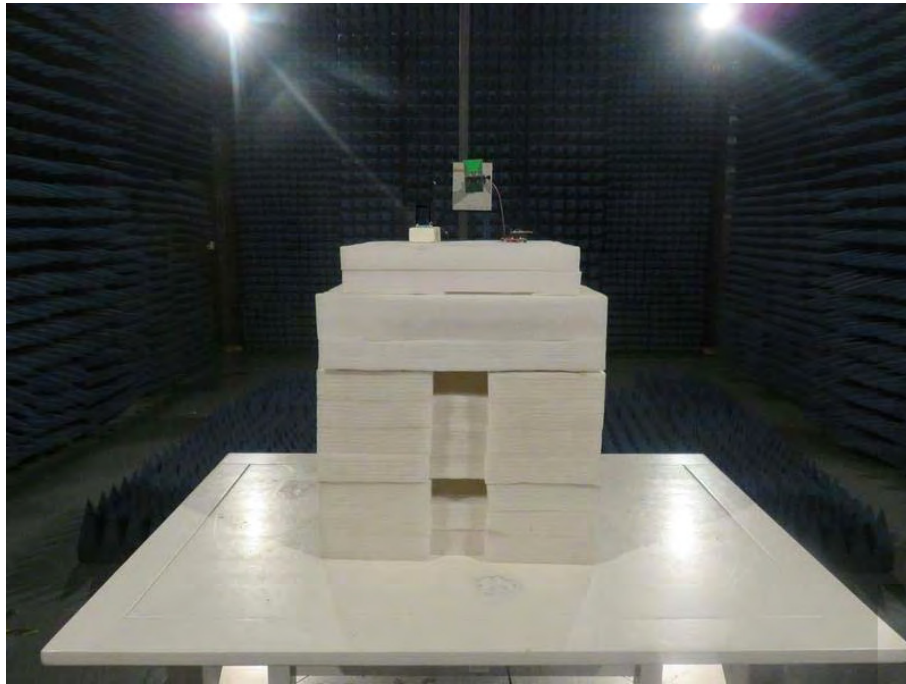




## APPENDIX I (EXTERNAL PHOTOS)

1. Figure  
The EUT-Front View

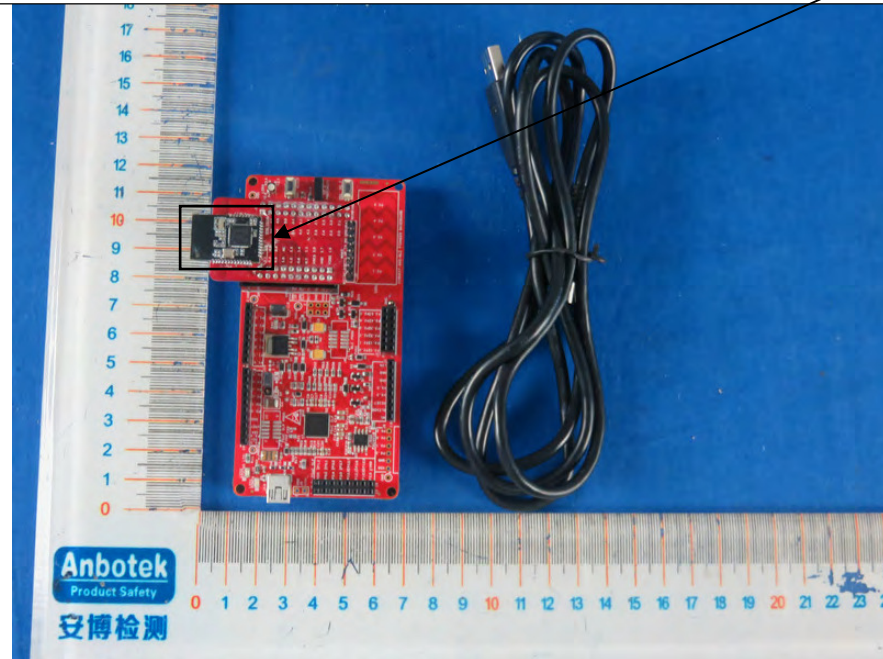


EUT is placed  
on the host


2. Figure  
The EUT-Back View

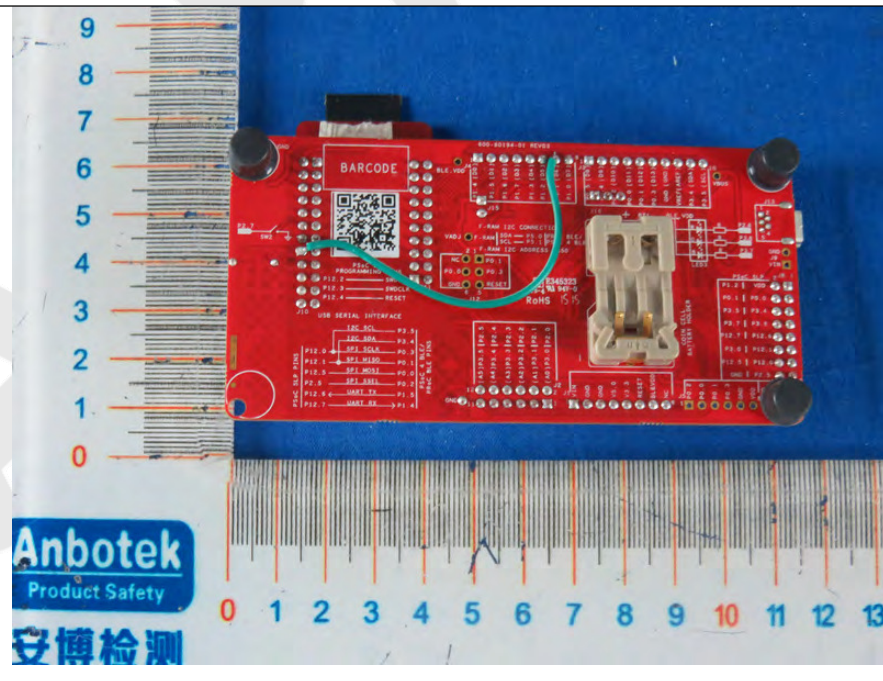

3. Figure  
The EUT-Front View

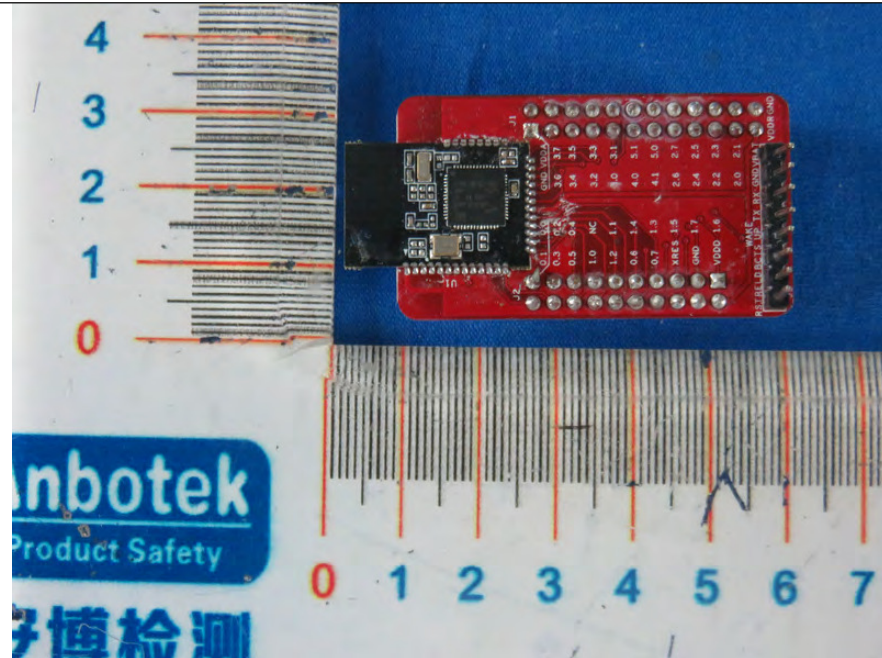


4. Figure  
The EUT-Back View

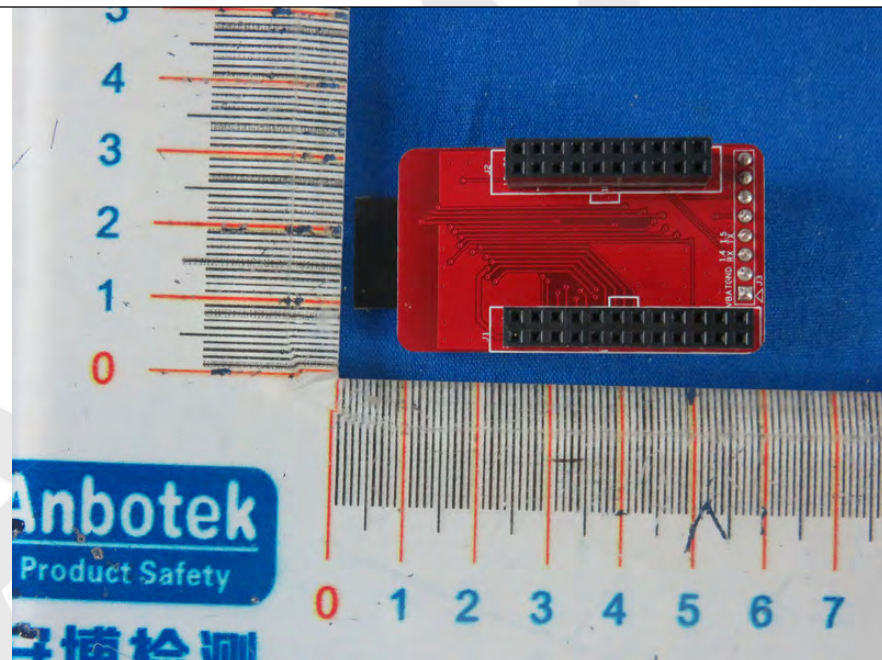



## APPENDIX II (INTERNAL PHOTOS)

1. Figure  
The EUT-Inside View

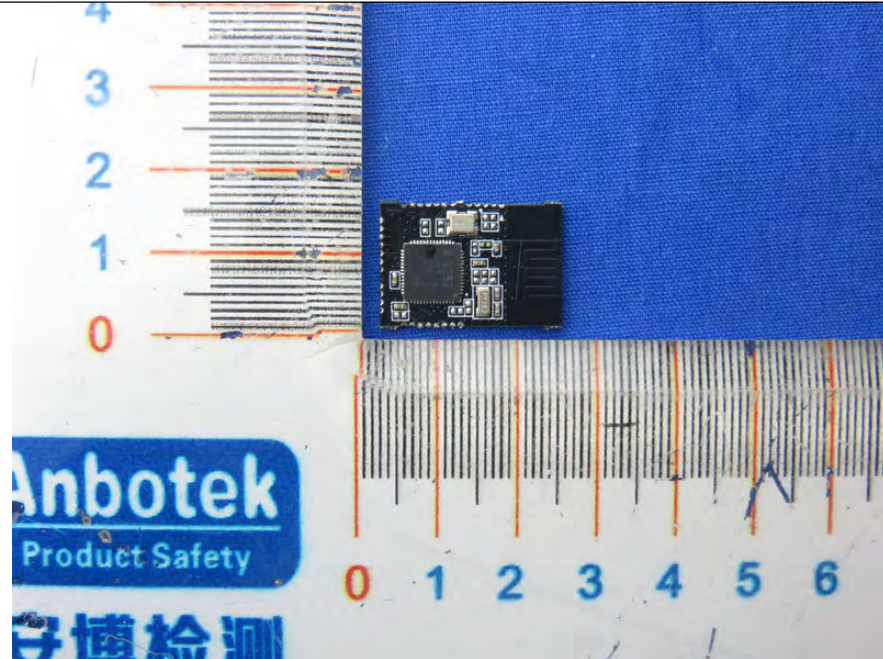

2. Figure  
The EUT-Inside View

