



FCC / IC Test Report

FOR:
Zonar Systems

Model Number:
ZTCU4B

Product Description:
Vehicle mounted Telematics device

FCC ID: SEJ-ZTCU4B
IC ID: 5266A-ZTCU4B

Applied Rules and Standards:
47 CFR Part 15.247 (DTS)
RSS-247 Issue 2 (DTS) & RSS-Gen Issue 5

REPORT #: EMC_ZONAR_019_19001_15.247_BT_DTS

DATE: 2019-06-10



A2LA Accredited

IC recognized #
3462B-1

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecom.com ♦ <http://www.cetecom.com>
CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1	ASSESSMENT	3
2	ADMINISTRATIVE DATA.....	4
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT	4
2.2	IDENTIFICATION OF THE CLIENT	4
2.3	IDENTIFICATION OF THE MANUFACTURER	4
3	EQUIPMENT UNDER TEST (EUT).....	5
3.1	EUT SPECIFICATIONS	5
3.2	EUT SAMPLE DETAILS.....	6
3.3	ACCESSORY EQUIPMENT (AE) DETAILS	6
3.4	SUPPORT EQUIPMENT	6
3.5	TEST SAMPLE CONFIGURATION	7
3.6	JUSTIFICATION FOR WORST CASE MODE OF OPERATION	7
4	SUBJECT OF INVESTIGATION	7
5	MEASUREMENT RESULTS SUMMARY	8
6	MEASUREMENT UNCERTAINTY	9
6.1	ENVIRONMENTAL CONDITIONS DURING TESTING:.....	9
6.2	DATES OF TESTING:.....	9
7	MEASUREMENT PROCEDURES.....	10
7.1	RADIATED MEASUREMENT	10
7.2	RF CONDUCTED MEASUREMENT PROCEDURE	12
8	TEST RESULT DATA	13
8.1	RADIATED TRANSMITTER SPURIOUS EMISSIONS AND RESTRICTED BANDS	13
9	TEST SETUP PHOTOS.....	39
10	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING	39
11	REVISION HISTORY	40

Test Report #: EMC_ZONAR-019-19001_15.247_BT_DTS
Date of Report 2019-06-10

FCC ID: SEJ-ZTCU4B
IC ID: 5266A-ZTCU4B



1 Assessment

The following device was evaluated against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and the relevant ISED Canada standard RSS-247.

No deviations were ascertained.

Company	Description	Model #
Zonar Systems	Vehicle mounted Telematics device	ZTCU4B

Responsible for Testing Laboratory:

2019-06-10	Compliance	Cindy Li (EMC Lab Manager)	
Date	Section	Name	Signature

Responsible for the Report:

2019-06-10	Compliance	Yuchan Lu (Test Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3.
CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Street Address:	411 Dixon Landing Road
City/Zip Code	Milpitas, CA 95035
Country	USA
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
EMC Lab Manager:	Cindy Li
Responsible Project Leader:	Sangeetha Sivaraman

2.2 Identification of the Client

Applicant's Name:	Zonar Systems
Street Address:	18200 Cascade Avenue North
City/Zip Code:	Seattle Washington, 98188
Country:	USA

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as Client
Manufacturers Address:	
City/Zip Code	
Country	

3 Equipment Under Test (EUT)

3.1 EUT Specifications

Model No:	ZTCU4B
HW Version :	2
SW Version :	4.8
FCC-ID:	SEJ-ZTCU4B
IC-ID:	5266A-ZTCU4B
PMN:	V4 Base
Product Description:	Vehicle mounted Telematics device
Frequency Range / number of channels:	Nominal band: 2400 MHz – 2483.5 MHz; Center to center: 2402 MHz (ch 0) – 2480 MHz (ch 39), 40 channels
Type(s) of Modulation:	Bluetooth Low Energy, using Dynamic Sequence Spread Spectrum with GFSK modulation.
Modes of Operation:	Bluetooth LE in both advertising and connected mode of operation
Module and Antenna Information as declared:	<ul style="list-style-type: none"> • Module name: ublox • Module number: NINA-B222 • FCC/IC ID: XPYNINAB22 / 8595A-NINAB22 • PIFA 3 dBi
Max. Peak Output Power:	Conducted Power 11.5 dBm
Power Supply/ Rated Operating Voltage Range:	Battery / Vmin: 9 VDC/ Vnom: 13-14 VDC / Vmax: 32 VDC
Operating Temperature Range:	Low -40° C, Nominal 23° C, High 85° C
Other Radios included in the device:	<ul style="list-style-type: none"> ❖ <u>Bluetooth Classic</u> ❖ <u>GSM, WCDMA, LTE</u> <ul style="list-style-type: none"> • Module name: ublox • Module number: TOBY-R200 • FCC/IC ID: XPYTOBYL200 / 8595A-TOBYL200 ❖ <u>WLAN:</u> <ul style="list-style-type: none"> • Module name: ublox • Module number: ELLA-W131 • FCC/IC ID: PV7-WIBEAR11N-SF1 / 7738A-WB11NSF1 ❖ <u>GPS</u>

	<ul style="list-style-type: none">Module name: ubloxModule number: MAX-M8Q-0-01
Sample Revision:	<input type="checkbox"/> Prototype Unit; <input checked="" type="checkbox"/> Production Unit; <input type="checkbox"/> Pre-Production

3.2 EUT Sample details

EUT #	IMEI Number	HW Version	SW Version	Notes/Comments
1	352254061995095	2	4.8	Radiated Emissions

3.3 Accessory Equipment (AE) Details

AE #	Comments
1	Power cable(4-pin connector)

3.4 Support Equipment

SE #	Comments
1	USB cable for interface with different vehicles (8-pin connector)
2	USB cable for WiFi/Cellular interface with different vehicles (6-pin connector)

3.5 Test Sample Configuration

EUT Set-up #	Combination of AE/SE used for test set up	Comments
1	EUT#1+ AE#1 + SE#1 +SE#2	BLE was tested on Low, Mid, High Channels at the maximum power in a co-transmission mode. Special commands through command window used to configure the Cellular GSM850 High channel provided by the client that will not be available to the end user For radiated measurements: The internal antenna was connected.
2	EUT#1+ AE#1 + SE#1 +SE#2	BLE was tested on Low, Mid, High Channels at the maximum power in a co-transmission mode. Special commands through command window used to configure the 802.11n HT40 Low channel provided by the client that will not be available to the end user For radiated measurements: The internal antenna was connected.

3.6 Justification for Worst Case Mode of Operation

During the testing process the EUT was tested with transmitter sets on low, mid and high channels at the maximum power simultaneous transmission with Cellular GSM850 High channel or 802.11n HT40 Low channel. Which they are the worst cases of the radios supported, based on the maximum conducted output power from the grants.

For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.

4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to assess the performance of the EUT according to the relevant requirements specified in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Radio Standard Specification RSS-247 of ISED Canada.

Testing procedures are based on 558074 D01 DTS Meas Guidance v04 – “GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247” - April 5, 2017, by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.

5 Measurement Results Summary

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	NA	NP	Result
§15.247(a)(1) RSS-247 5.2(1)	Emission Bandwidth	Nominal	-	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Note 1 Note 2
§15.247(e) RSS-247 5.2(2)	Power Spectral Density	Nominal	-	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Note 1 Note 2
§15.247(b)(1) RSS-247 5.4(4)	Maximum Conducted Output Power and EIRP	Nominal	-	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Note 1 Note 2
§15.247(d) RSS-247 5.5	Band edge compliance Unrestricted Band Edges	Nominal	-	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Note 1 Note 2
§15.247; 15.209; 15.205 RSS-Gen 8.9; 8.10	Band edge compliance Restricted Band Edges	Nominal	-	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Note 1 Note 2
§15.247(d); §15.209 RSS-Gen 6.13	TX Spurious emissions-Radiated	Nominal	BTLE	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Complies
§15.207(a) RSS Gen 8.8	AC Conducted Emissions	Nominal	-	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	N/A ³

Note1: NA= Not Applicable; NP= Not Performed.

Note2: Leveraged from module certification FCC ID:/IC ID: XPYNINAB22 / 8595A-NINAB22

Note3: EUT is powered by Battery

6 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=1.

Radiated measurement

9 kHz to 30 MHz	±2.5 dB (Magnetic Loop Antenna)
30 MHz to 1000 MHz	±2.0 dB (Biconilog Antenna)
1 GHz to 40 GHz	±2.3 dB (Horn Antenna)

Conducted measurement

150 kHz to 30 MHz	±0.7 dB (LISN)
-------------------	----------------

RF conducted measurement	±0.5 dB
--------------------------	---------

According to TR 102 273 a multiplicative propagation of error is assumed for RF measurement systems. For this reason the RMS method is applied to dB values and not to linear values as appropriate for additive propagation of error. Also used: <http://physics.nist.gov/cuu/Uncertainty/typeb.html>. The above calculated uncertainties apply to direct application of the Substitution method. The Substitution method is always used when the EUT comes closer than 3 dB to the limit.

6.1 Environmental Conditions During Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25° C
- Relative humidity: 40-60%

6.2 Dates of Testing:


05/16/2019 - 05/21/2019

7 Measurement Procedures


7.1 Radiated Measurement

The radiated measurement is performed according to ANSI C63.10 (2013)


- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.

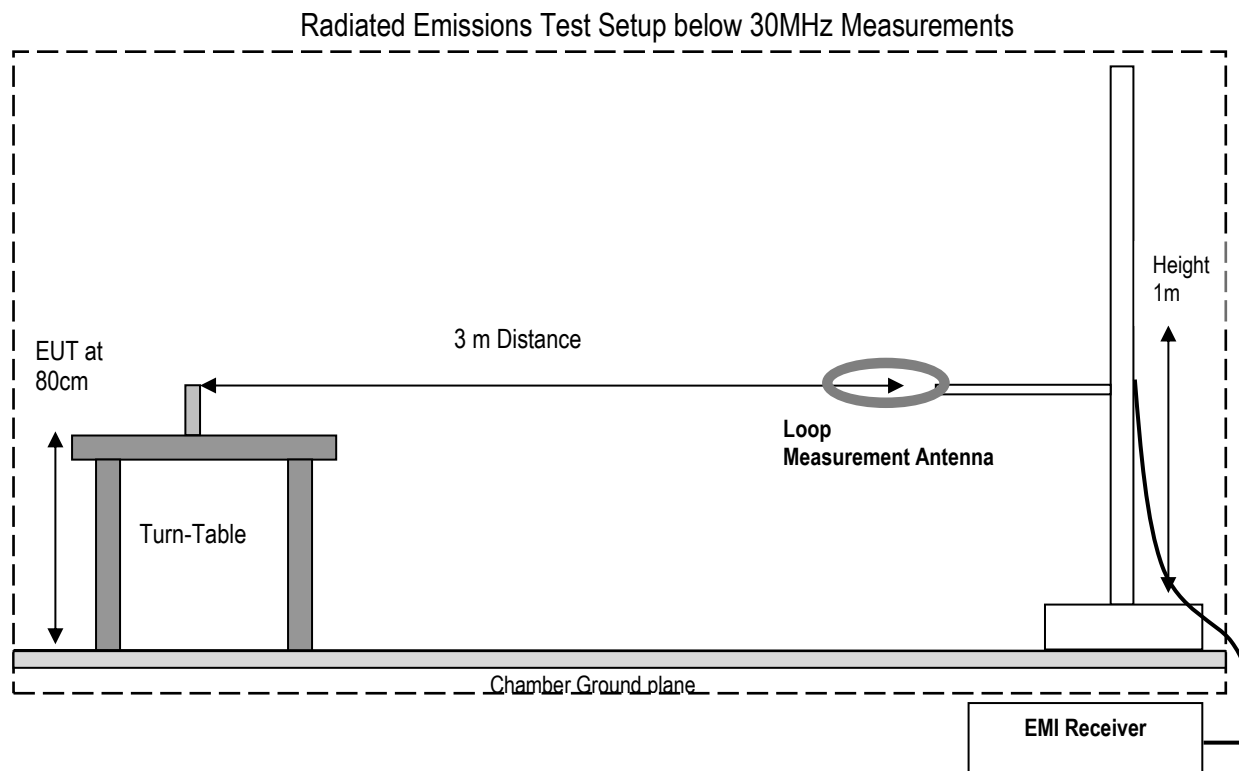

Radiated Emissions Test Setup 30MHz-1GHz Measurements

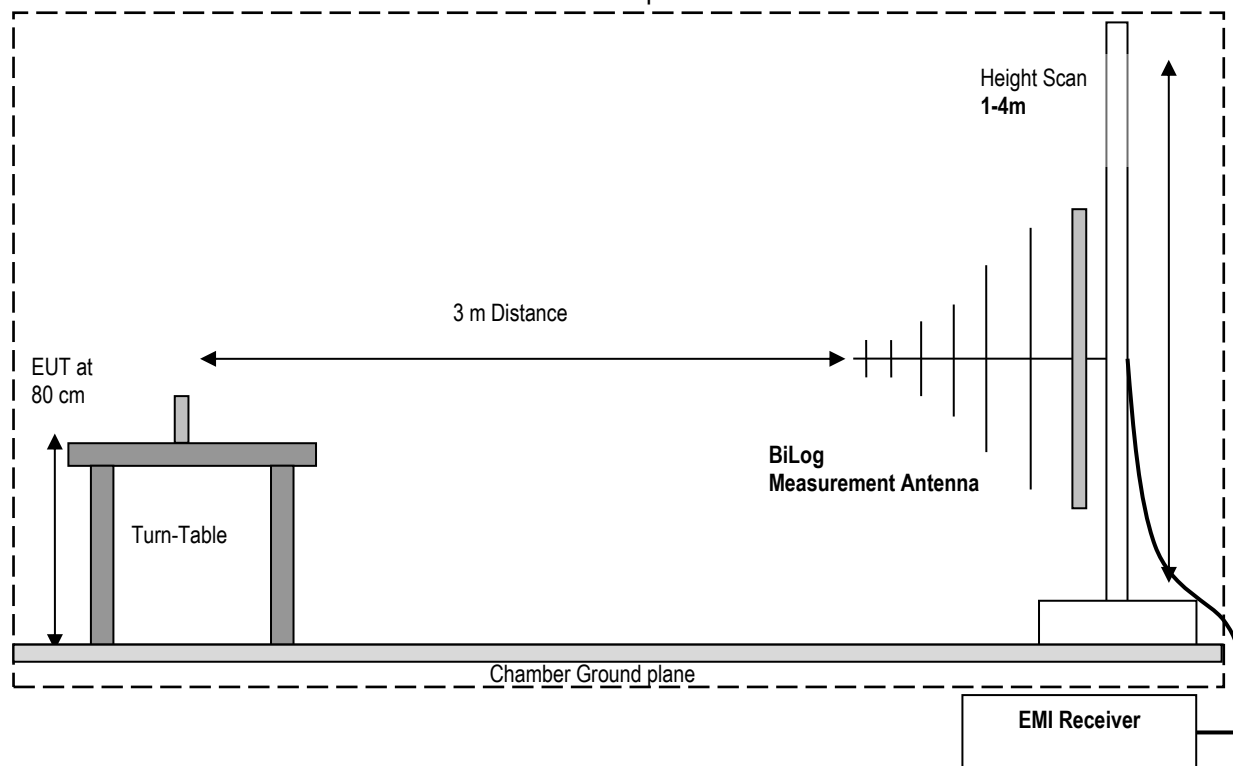

Radiated Emissions Test Setup above 1GHz Measurements

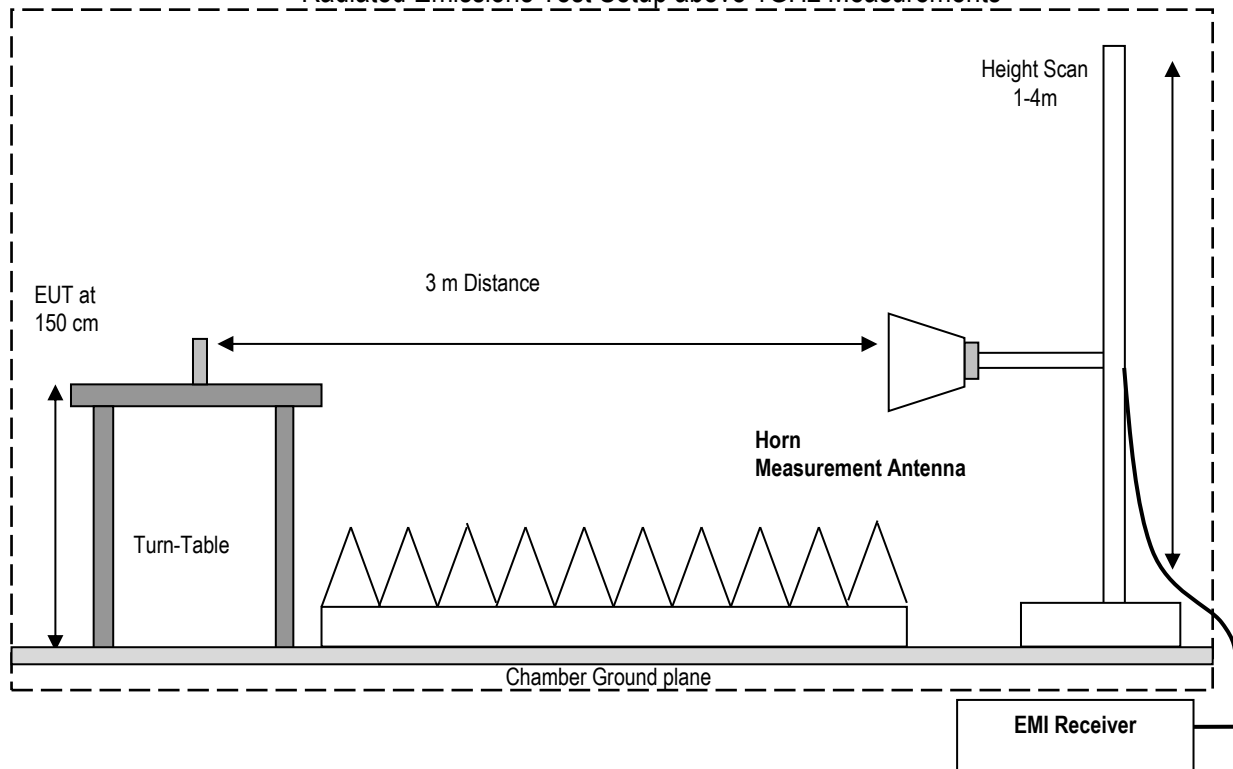

7.1.1 Sample Calculations for Field Strength Measurements

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dB μ V
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} - \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:

Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dB μ V/m)
1000	80.5	3.5	14	98.0

7.2 RF Conducted Measurement Procedure

Testing procedures are based on 558074 D01 DTS Meas Guidance v04 – “GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247” - April 5, 2017, by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.



- Connect the equipment as shown in the above diagram.
- Adjust the settings of the SA (Rohde-Schwarz Spectrum Analyzer) to connect the EUT at the required mode of test.
- Measurements are to be performed with the EUT set to the low, middle and high channels and for worst case modulation schemes.
- Calculate the conducted power by taking into account attenuation of the cable and the attenuator

8 Test Result Data

8.1 Radiated Transmitter Spurious Emissions and Restricted Bands

8.1.1 Measurement according to ANSI C63.10 (2013)

Spectrum Analyzer Settings:

- Frequency = 9 KHz – 30 MHz
- RBW = 9 KHz
- Detector: Peak

- Frequency = 30 MHz – 1 GHz
- Detector = Peak / Quasi-Peak
- RBW= 120 KHz (<1GHz)

- Frequency > 1 GHz
- Detector = Peak / Average
- RBW = 1 MHz

- Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements.
- The highest (or worst-case) data rate shall be recorded for each measurement.
- For testing at distance other than the specified in the standard, the limit conversion is calculated by using 40 dB/decade extrapolation factor as follow: Conversion factor (CF) = $40 \log (D/d) = 40 \log (300\text{m} / 3\text{m}) = 80\text{dB}$

8.1.2 Limits:

FCC §15.247

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

FCC §15.209 & RSS-Gen 8.9

- Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency of emission (MHz)	Field strength (μV/m)	Measurement Distance (m)	Field strength @ 3m (dBμV/m)
0.009–0.490	2400/F(kHz) / -----	300	-
0.490–1.705	24000/F(kHz) / -----	30	-
1.705–30.0	30 / (29.5)	30	-
30–88	100	3	40 dBμV/m
88–216	150	3	43.5 dBμV/m
216–960	200	3	46 dBμV/m
Above 960	500	3	54 dBμV/m

FCC §15.205 & RSS-Gen 8.10

- Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

- Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

*PEAK LIMIT= 74 dBμV/m

*AVG. LIMIT= 54 dBμV/m

8.1.3 BLE Co-Transmission with Cellular GSM850 High Channel Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
23° C	1	GFSK continuous fixed channel	12 VDC

8.1.4 Measurement result:

Plot #	Channel #	Scan Frequency	Limit	Result
1-3	Low	30 MHz – 18 GHz	See section 8.5.2	Pass
4-8	Mid	9 kHz – 26 GHz	See section 8.5.2	Pass
9-11	High	30 MHz – 18 GHz	See section 8.5.2	Pass

8.1.5 Measurement Plots:

Plot #1 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE


Channel: Low

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
105.720929	25.72	43.52	17.80	200.0	100.000	151.0	V	117.0	13.9
179.986561	32.00	43.52	11.52	200.0	100.000	174.0	H	20.0	20.8
500.002079	40.17	46.02	5.85	200.0	100.000	157.0	H	41.0	27.0
539.996804	38.99	46.02	7.03	200.0	100.000	162.0	H	179.0	27.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Comment
105.720929	6:32:18 PM - 5/16/2019
179.986561	6:34:13 PM - 5/16/2019
500.002079	6:36:00 PM - 5/16/2019
539.996804	6:37:58 PM - 5/16/2019

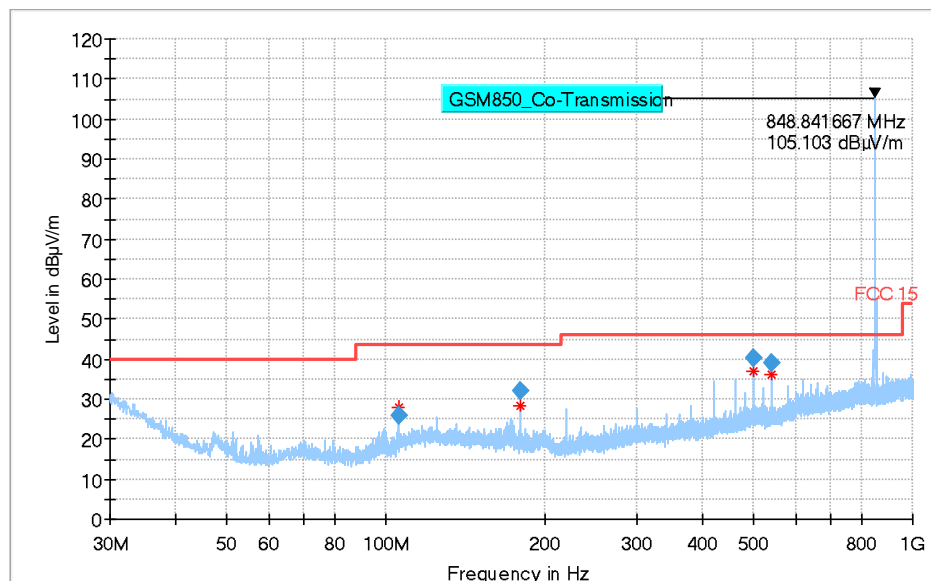

— Preview Result 1-PK+ * Critical_Freqs PK+ — FCC 15 ◆ Final_Result PK+



Plot #2 Radiated Emissions: 1-3 GHz

Modulation: BT LE


Channel: Low


Final_Result


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
1331.645500	---	30.73	54.00	23.27	200.0	1000.000	292.0	V	-69.0
1331.645500	44.18	---	74.00	29.82	200.0	1000.000	292.0	V	-69.0
1673.361000	---	49.73	54.00	4.27	200.0	1000.000	195.0	H	249.0
1673.361000	69.16	---	74.00	4.84	200.0	1000.000	195.0	H	249.0
2443.036250	---	34.38	54.00	19.62	200.0	1000.000	325.0	H	41.0
2443.036250	47.28	---	74.00	26.72	200.0	1000.000	325.0	H	41.0
2510.097000	---	37.56	54.00	16.44	200.0	1000.000	192.0	H	25.0
2510.097000	52.53	---	74.00	21.47	200.0	1000.000	192.0	H	25.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB)	Comment
1331.645500	7.9	4:46:37 PM - 5/16/2019
1331.645500	7.9	4:46:37 PM - 5/16/2019
1673.361000	10.3	4:48:55 PM - 5/16/2019
1673.361000	10.3	4:48:55 PM - 5/16/2019
2443.036250	12.2	4:50:49 PM - 5/16/2019
2443.036250	12.2	4:50:49 PM - 5/16/2019
2510.097000	12.9	4:52:39 PM - 5/16/2019
2510.097000	12.9	4:52:39 PM - 5/16/2019

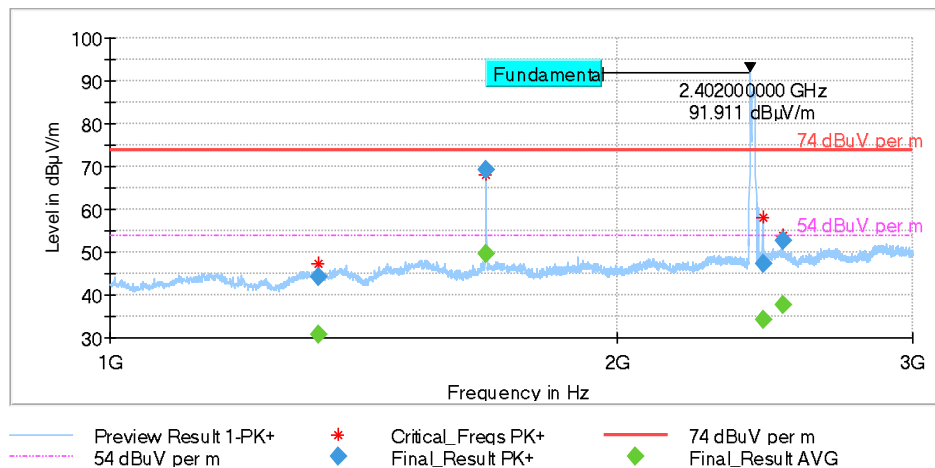

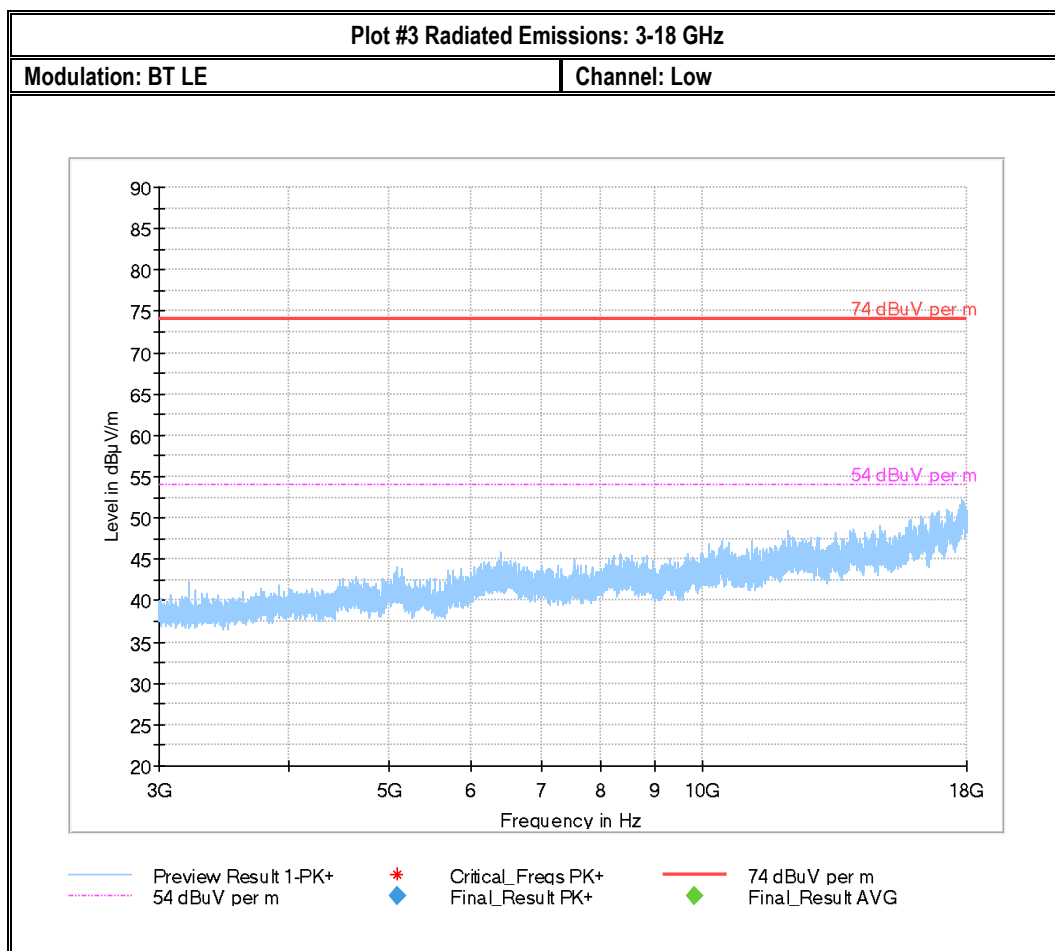

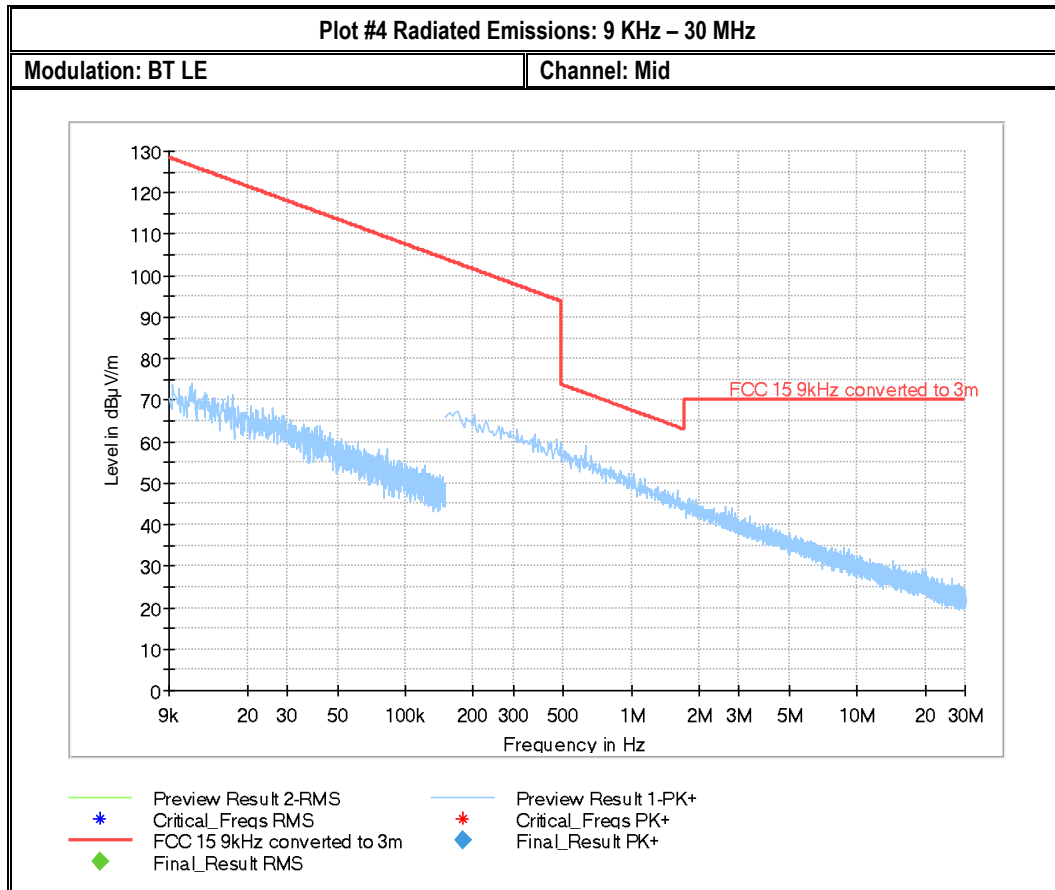

Plot #5 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE


Channel: Mid

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
105.682993	31.98	43.52	11.55	200.0	100.000	193.0	H	20.0	21.1
500.004969	40.84	46.02	5.18	200.0	100.000	157.0	H	32.0	27.0
742.167896	34.82	46.02	11.20	200.0	100.000	291.0	H	267.0	30.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Comment
105.682993	6:46:58 PM - 5/16/2019
500.004969	6:48:46 PM - 5/16/2019
742.167896	6:50:34 PM - 5/16/2019

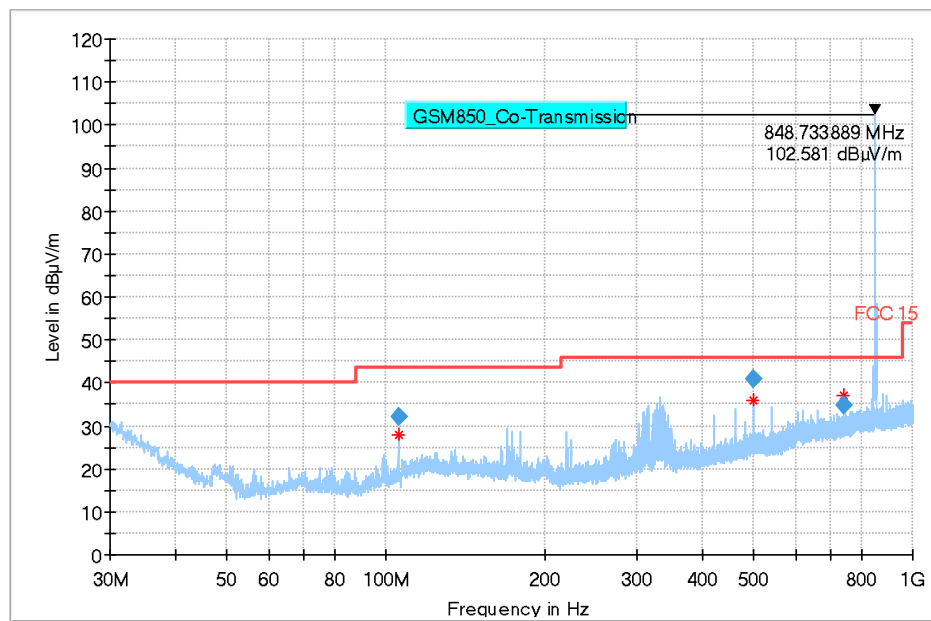

— Preview Result 1-PK+ * Critical_Freqs PK+ — FCC 15 ◆ Final_Result PK+

Plot #6 Radiated Emissions: 1-3 GHz

Modulation: BT LE


Channel: Mid

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
1673.308500	---	51.40	54.00	2.60	200.0	1000.000	322.0	V	187.0
1673.308500	70.77	---	74.00	3.23	200.0	1000.000	322.0	V	187.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB)	Comment
1673.308500	10.3	5:11:00 PM - 5/16/2019
1673.308500	10.3	5:11:00 PM - 5/16/2019

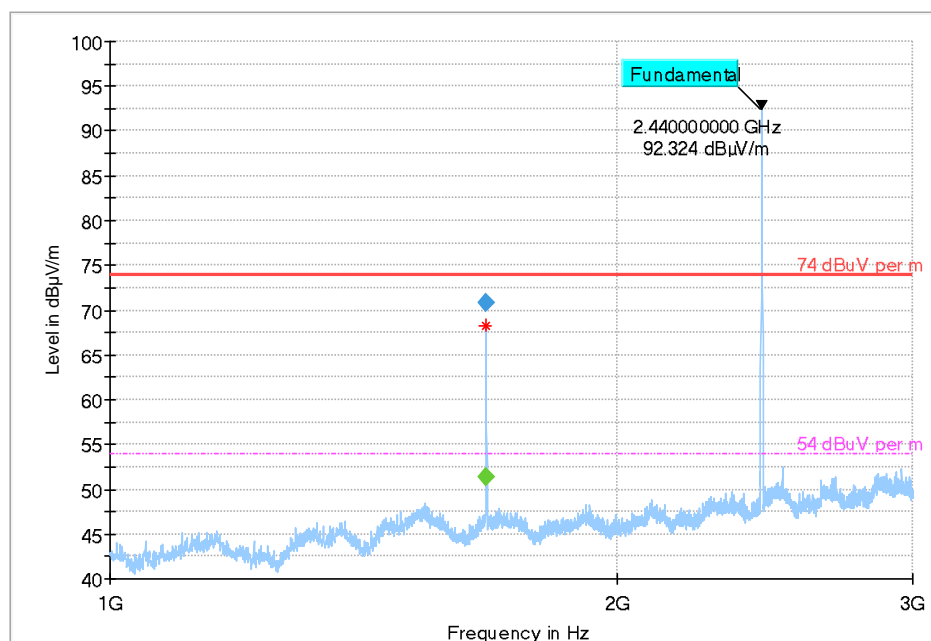

— Preview Result 1-PK+
— 54 dBμV per m

◆ Critical_Freqs PK+
◆ Final_Result PK+

— 74 dBμV per m
◆ Final_Result AVG

Plot #7 Radiated Emissions: 3-18 GHz

Modulation: BT LE


Channel: Mid

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
3253.371000	---	39.31	54.00	14.69	200.0	1000.000	187.0	H	100.0
3253.371000	45.98	---	74.00	28.02	200.0	1000.000	187.0	H	100.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB)	Comment
3253.371000	-8.4	3:18:40 PM - 5/16/2019
3253.371000	-8.4	3:18:39 PM - 5/16/2019

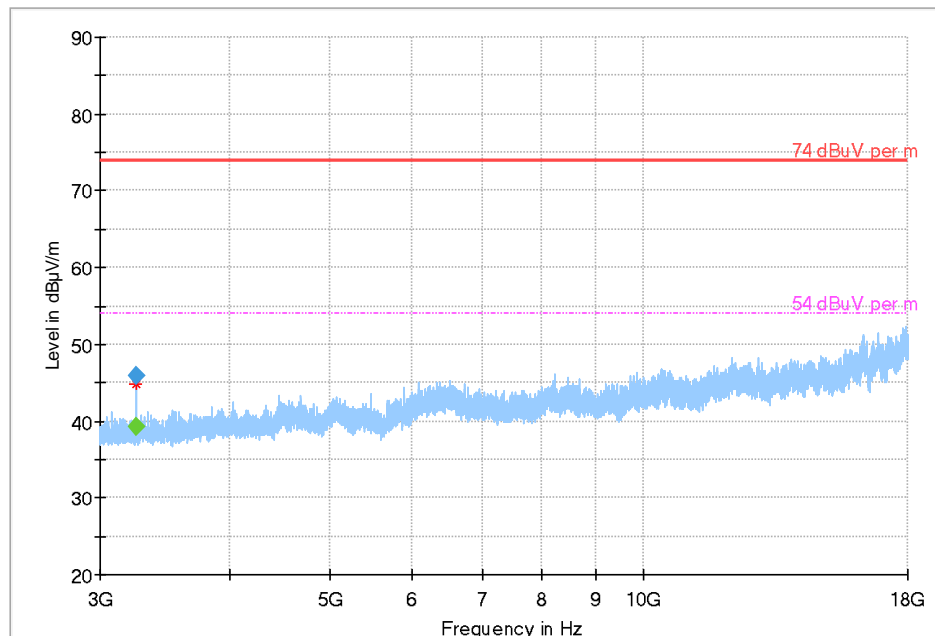

— Preview Result 1-PK+
 * Critical_Freqs PK+
 — 74 dBμV per m
- - - 54 dBμV per m
 ◆ Final_Result PK+
 ◆ Final_Result AVG

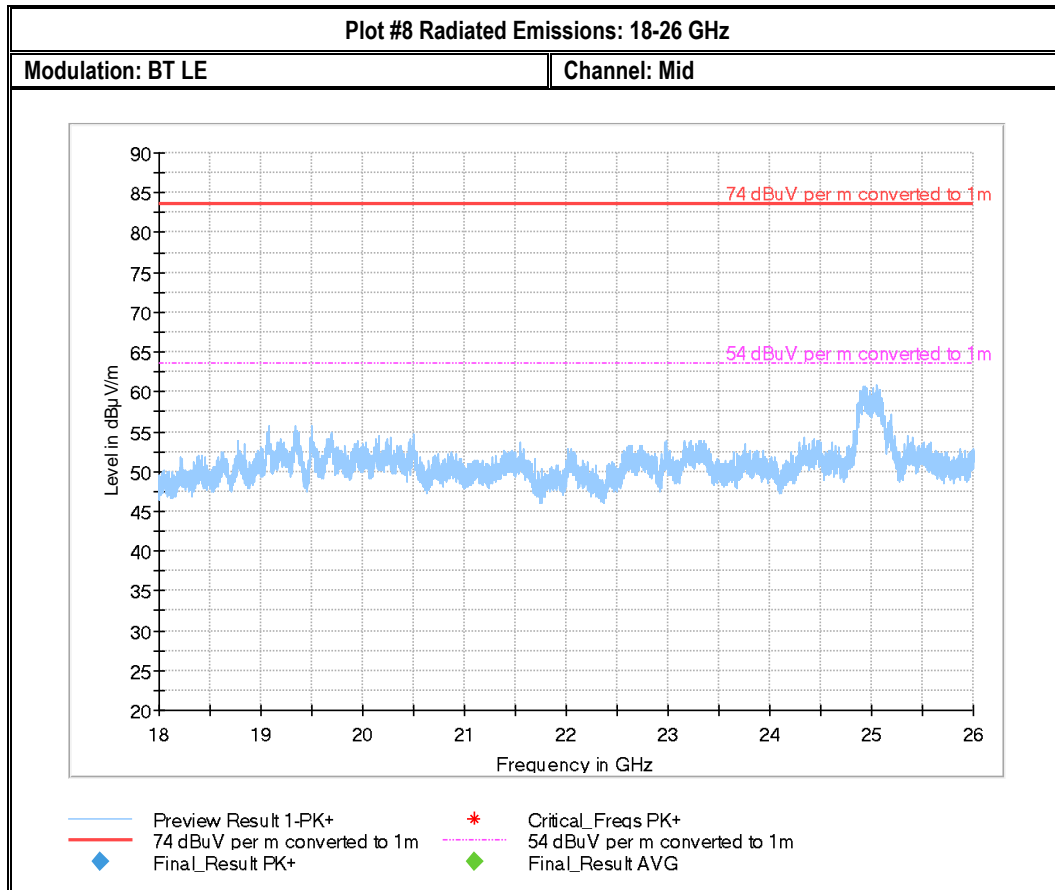

Plot #9 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE


Channel: High

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
105.732691	32.87	43.52	10.65	200.0	100.000	194.0	H	331.0	21.1
419.999556	41.69	46.02	4.33	200.0	100.000	245.0	H	224.0	24.9
499.998496	39.74	46.02	6.28	200.0	100.000	166.0	H	37.0	27.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Comment
105.732691	7:05:23 PM - 5/16/2019
419.999556	7:07:16 PM - 5/16/2019
499.998496	7:09:20 PM - 5/16/2019

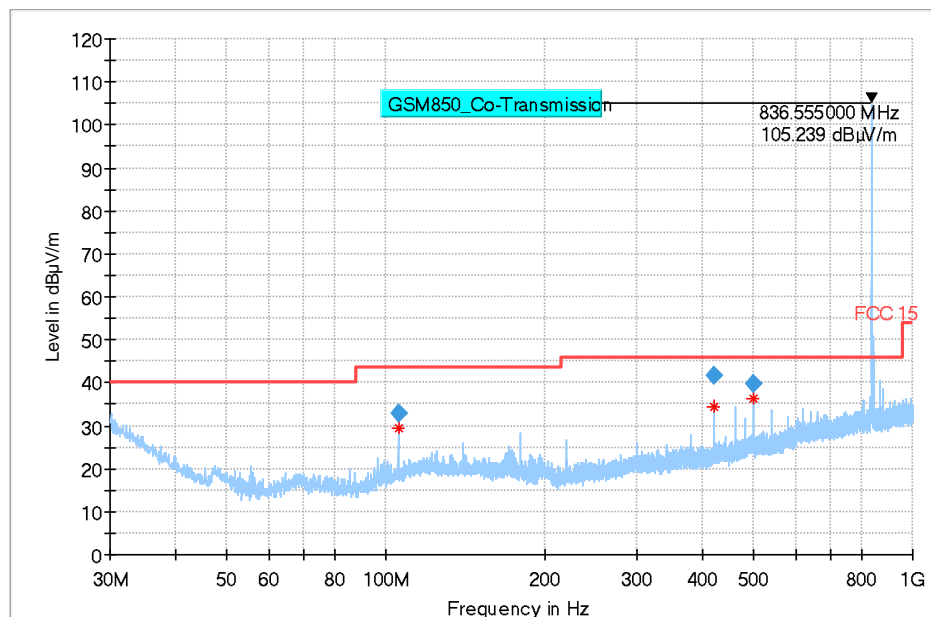

— Preview Result 1-PK+ * Critical_Freqs PK+ — FCC 15 ◆ Final_Result PK+

Plot #10 Radiated Emissions: 1-3 GHz

Modulation: BT LE


Channel: High


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
1673.374250	---	51.08	54.00	2.92	200.0	1000.000	156.0	H	251.0
1673.374250	70.69	---	74.00	3.31	200.0	1000.000	156.0	H	251.0
2401.671750	---	32.85	54.00	21.15	200.0	1000.000	270.0	V	256.0
2401.671750	44.43	---	74.00	29.57	200.0	1000.000	270.0	V	256.0
2877.198500	---	36.44	54.00	17.56	200.0	1000.000	197.0	V	210.0
2877.198500	48.85	---	74.00	25.15	200.0	1000.000	197.0	V	210.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB)	Comment
1673.374250	10.3	5:19:07 PM - 5/16/2019
1673.374250	10.3	5:19:06 PM - 5/16/2019
2401.671750	12.0	5:20:51 PM - 5/16/2019
2401.671750	12.0	5:20:51 PM - 5/16/2019
2877.198500	14.3	5:22:42 PM - 5/16/2019
2877.198500	14.3	5:22:42 PM - 5/16/2019

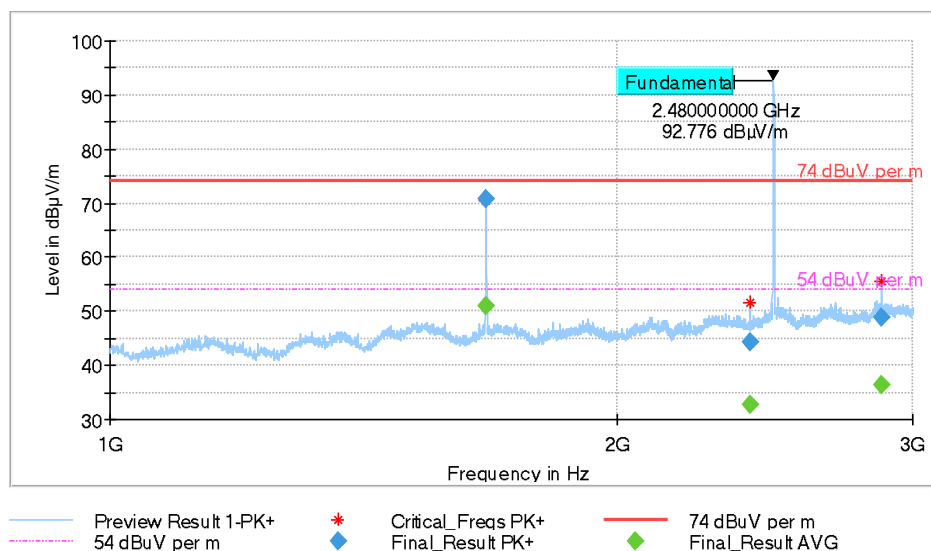

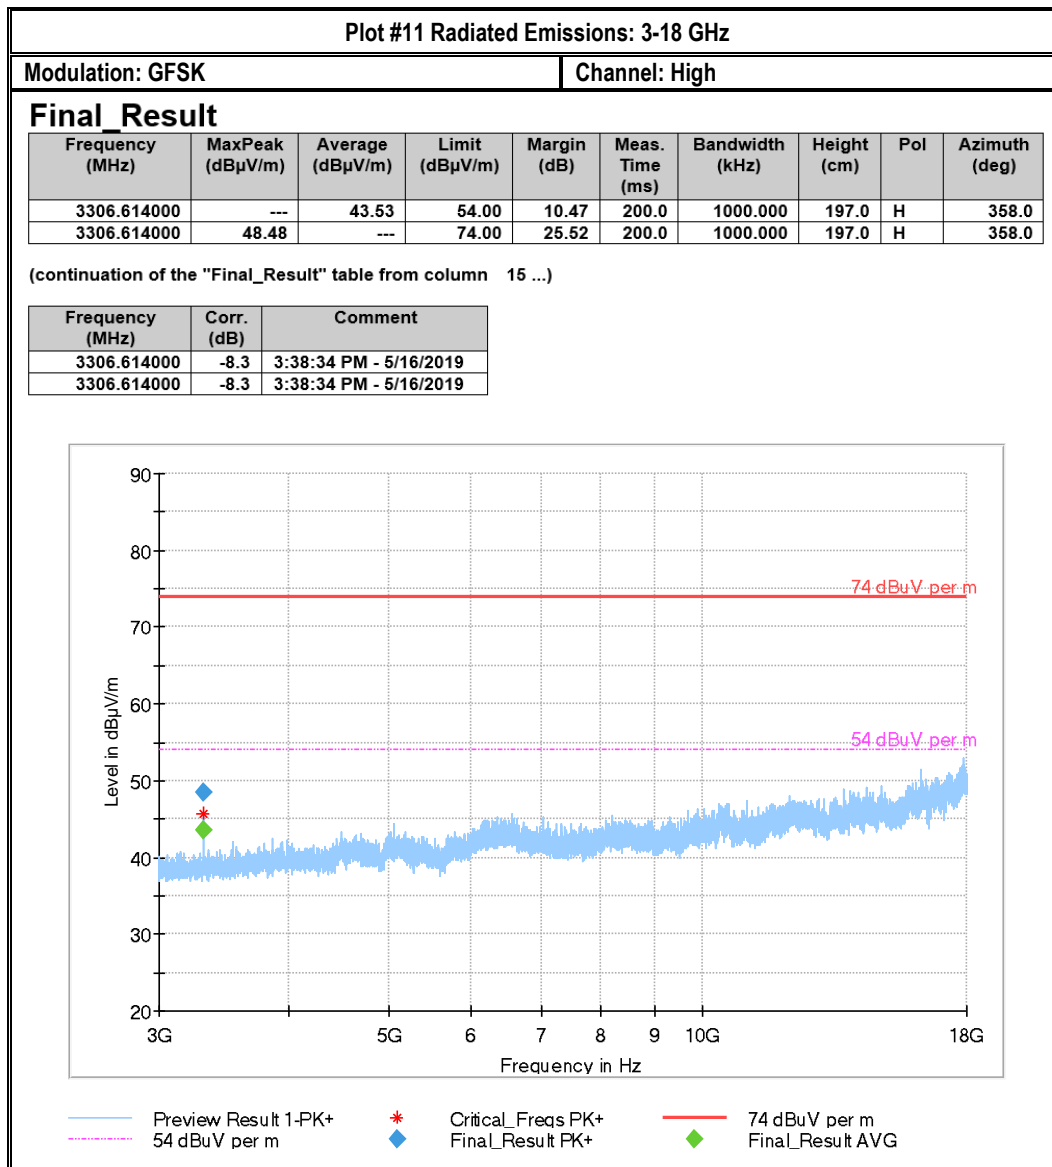

8.1.6 BLE Co-Transmission with WiFi 802.11n HT40 Low Channel Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
23° C	2	GFSK continuous fixed channel	12 VDC

8.1.7 Measurement result:

Plot #	Channel #	Scan Frequency	Limit	Result
1-3	Low	30 MHz – 18 GHz	See section 8.5.2	Pass
4-8	Mid	9 kHz – 26 GHz	See section 8.5.2	Pass
9-11	High	30 MHz – 18 GHz	See section 8.5.2	Pass

8.1.8 Measurement Plots:

Plot #1 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE


Channel: Low

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
105.704103	28.08	43.52	15.44	200.0	100.000	166.0	V	234.0	13.9
499.996520	40.17	46.02	5.85	200.0	100.000	188.0	H	298.0	27.0
604.892889	41.50	46.02	4.52	200.0	100.000	199.0	H	34.0	28.3
940.258374	38.83	46.02	7.19	200.0	100.000	216.0	H	96.0	32.6


(continuation of the "Final_Result" table from column 16 ...)


Frequency (MHz)	Comment
105.704103	1:23:28 PM - 5/21/2019
499.996520	1:25:21 PM - 5/21/2019
604.892889	1:27:25 PM - 5/21/2019
940.258374	1:29:17 PM - 5/21/2019

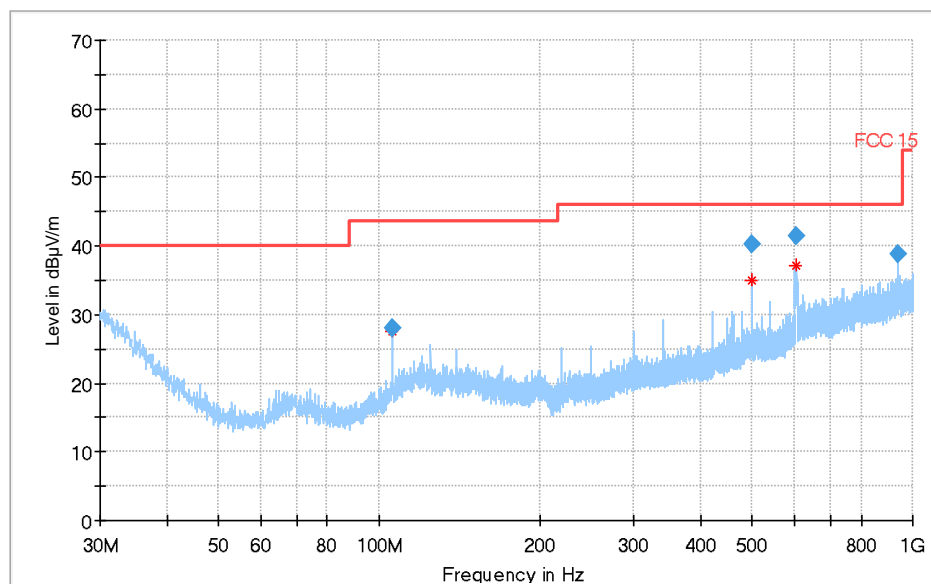

— Preview Result 1-PK+ * Critical_Freqs PK+ — FCC 15 ◆ Final_Result PK+

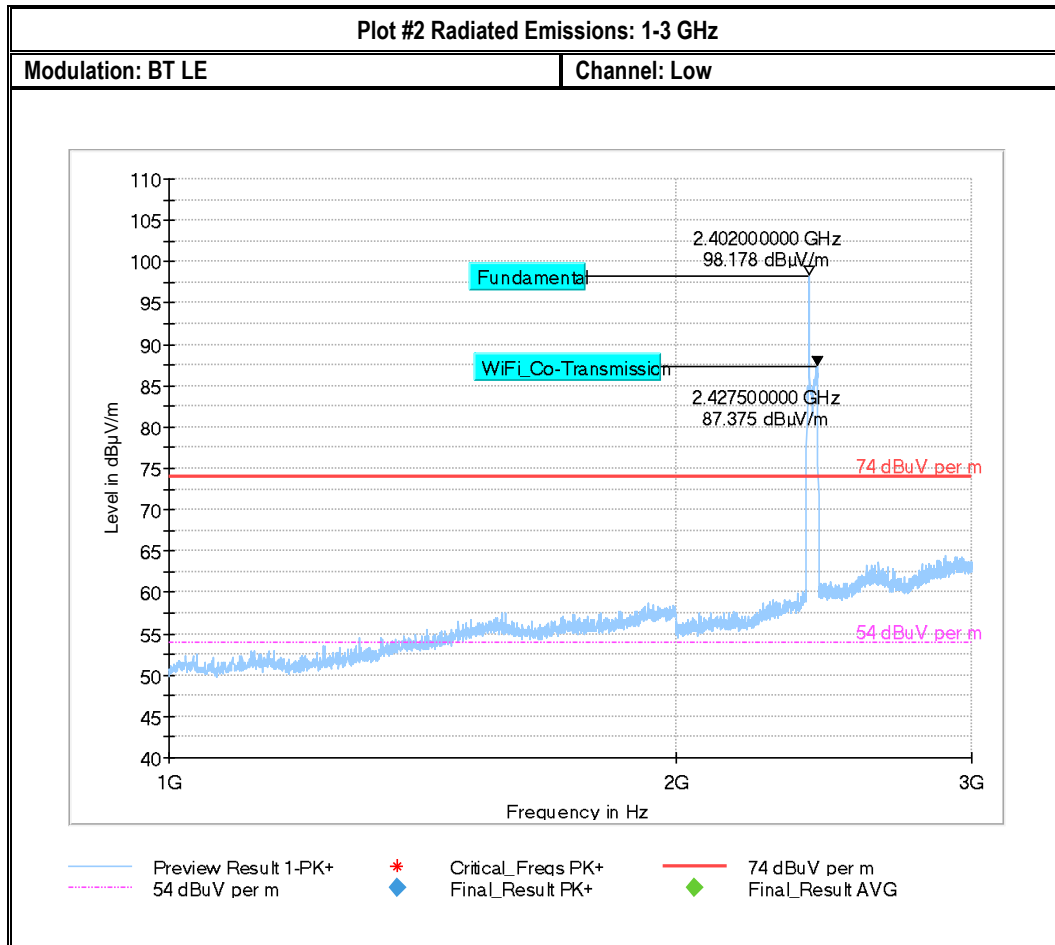

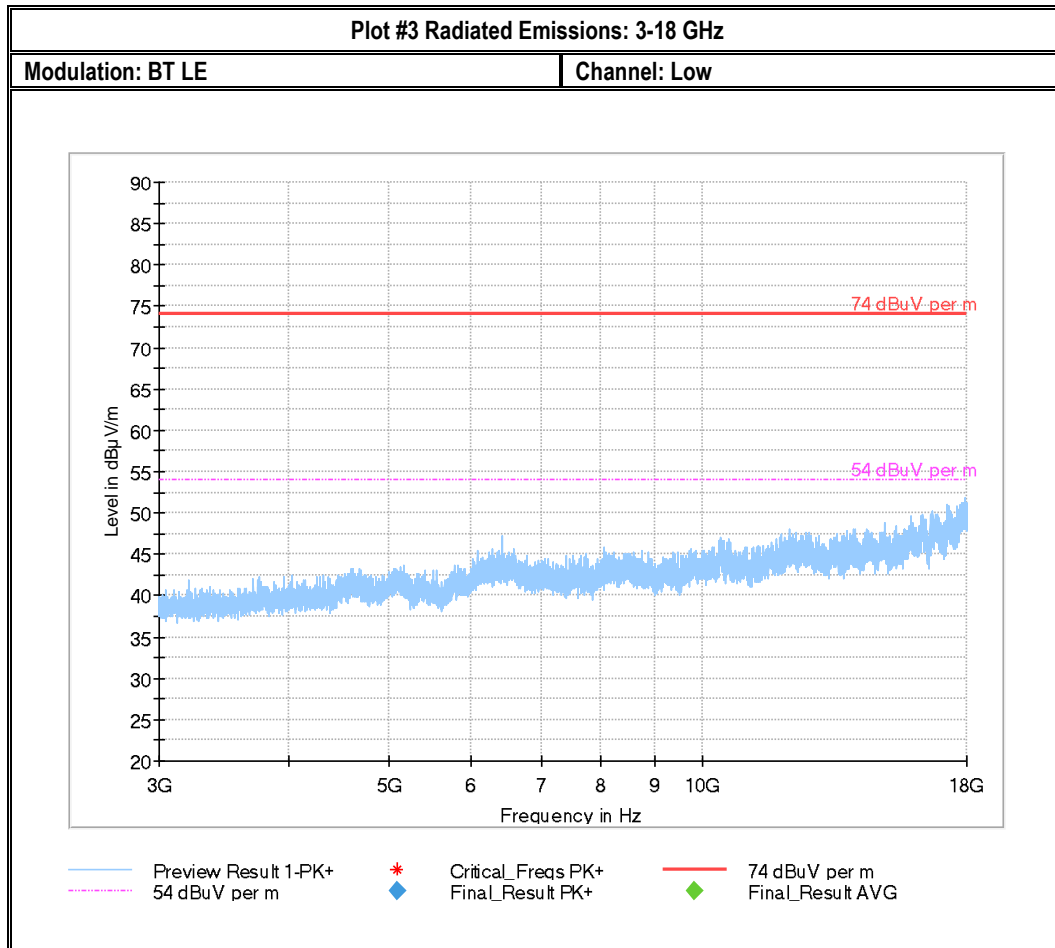

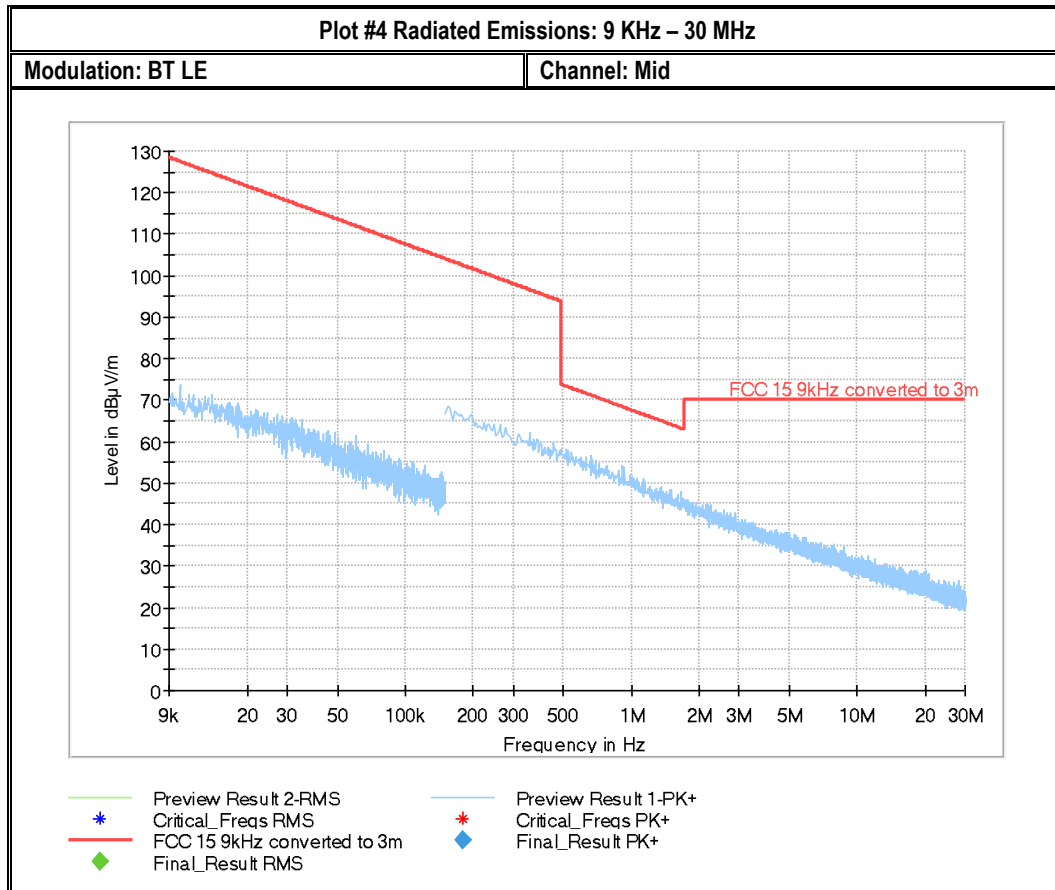

Plot #5 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE


Channel: Mid

Final_Result


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
105.707220	33.49	43.52	10.03	200.0	100.000	152.0	H	-18.0	21.1
602.317663	43.08	46.02	2.94	200.0	100.000	314.0	H	234.0	28.2
940.269474	38.10	46.02	7.92	200.0	100.000	292.0	H	240.0	32.6

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Comment
105.707220	1:10:23 PM - 5/21/2019
602.317663	1:12:21 PM - 5/21/2019
940.269474	1:14:09 PM - 5/21/2019

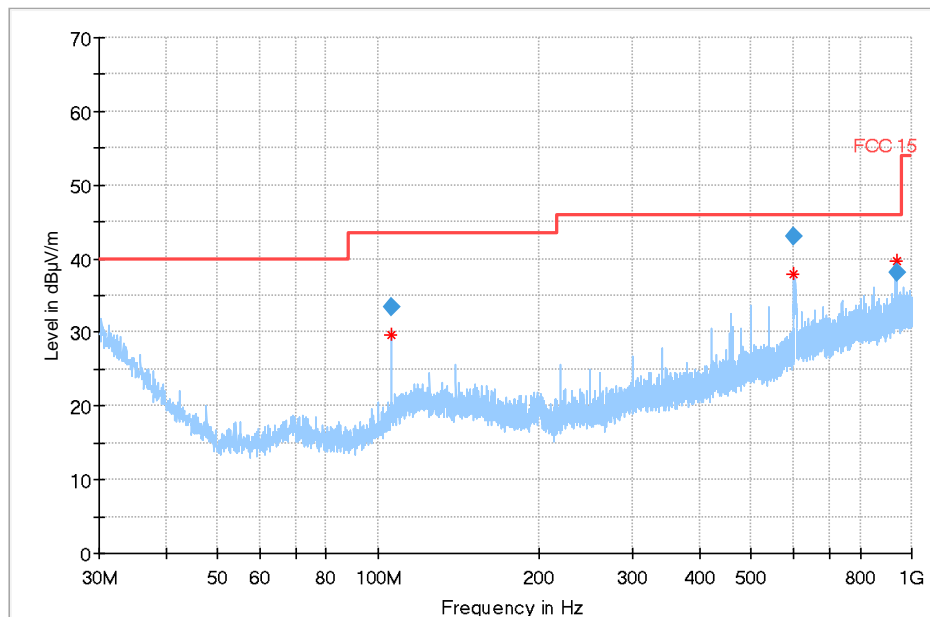

— Preview Result 1-PK+ * Critical_Freqs PK+ — FCC 15 ◆ Final_Result PK+

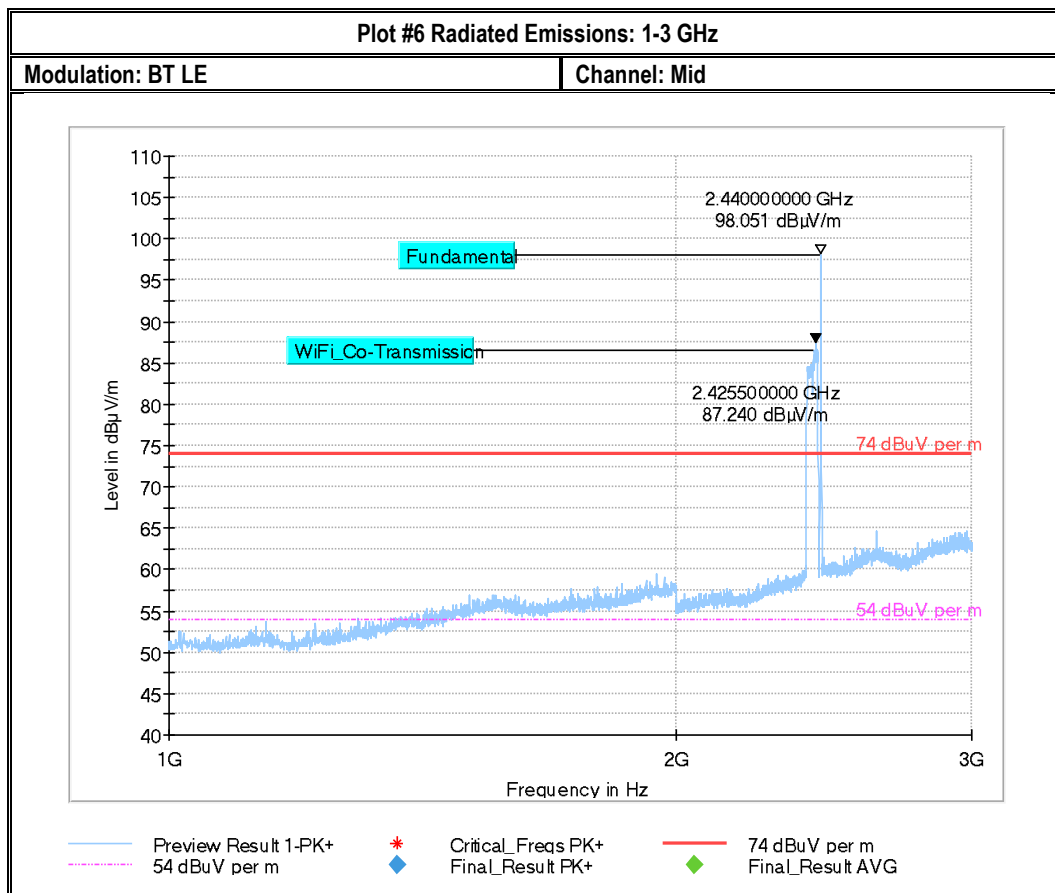

Plot #7 Radiated Emissions: 3-18 GHz

Modulation: BT LE


Channel: Mid

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
3253.287333	---	38.73	54.00	15.27	200.0	1000.000	140.0	H	106.0
3253.287333	45.05	---	74.00	28.95	200.0	1000.000	140.0	H	106.0
6431.988000	---	42.65	54.00	11.35	200.0	1000.000	175.0	V	340.0
6431.988000	48.59	---	74.00	25.41	200.0	1000.000	175.0	V	340.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB)	Comment
3253.287333	-8.4	2:24:36 PM - 5/21/2019
3253.287333	-8.4	2:24:36 PM - 5/21/2019
6431.988000	-0.4	2:26:45 PM - 5/21/2019
6431.988000	-0.4	2:26:45 PM - 5/21/2019

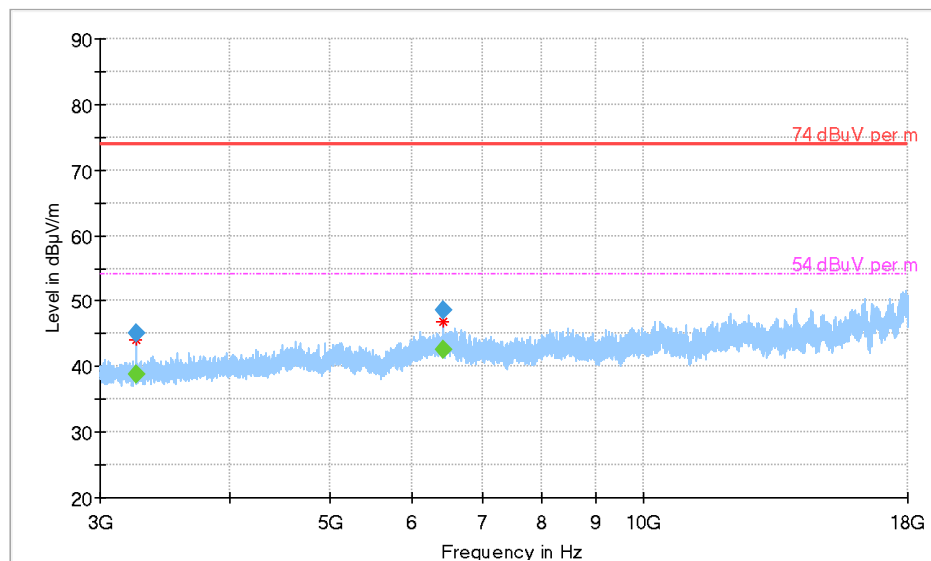

Preview Result 1-PK+ 54 dBuV per m
 Critical_Freqs PK+ Final_Result PK+
 74 dBuV per m
 Final_Result AVG

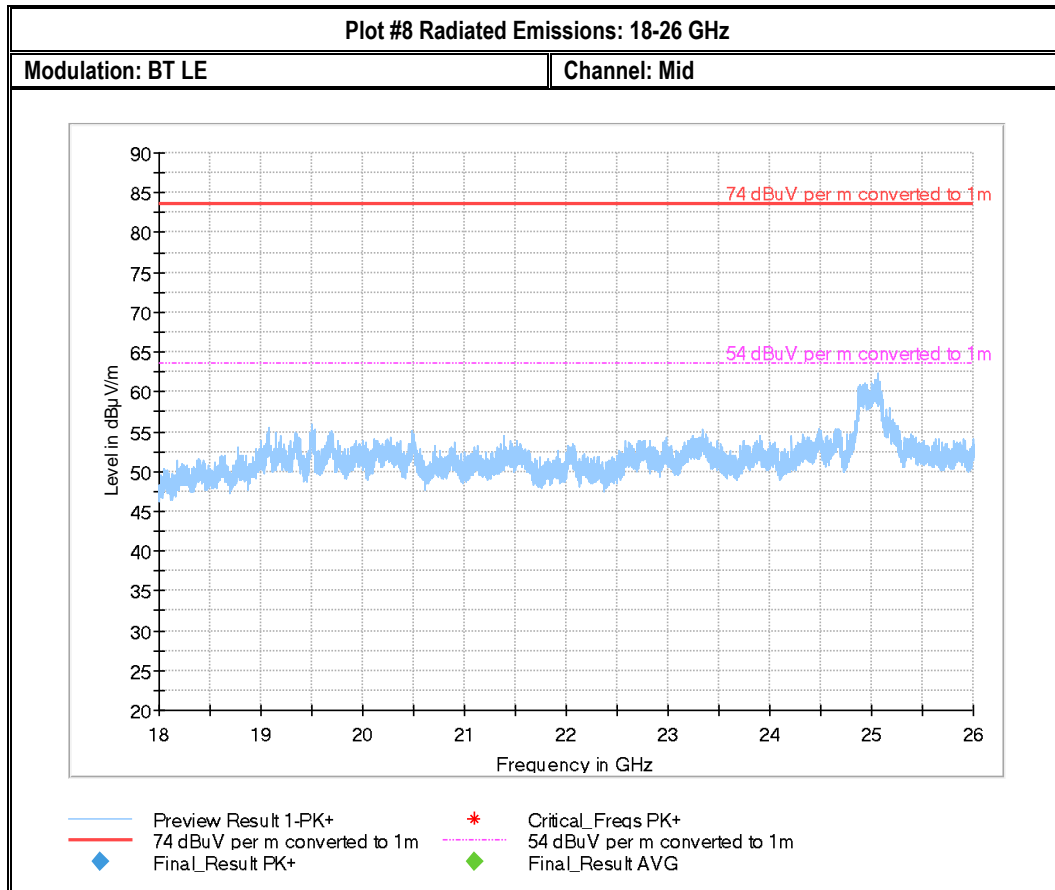

Plot #9 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE


Channel: High

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
105.673550	27.36	43.52	16.16	200.0	100.000	157.0	V	181.0	13.9
499.998172	40.57	46.02	5.45	200.0	100.000	186.0	H	289.0	27.0
602.287817	41.71	46.02	4.31	200.0	100.000	325.0	H	90.0	28.2
940.316974	38.22	46.02	7.80	200.0	100.000	188.0	H	183.0	32.6


(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Comment
105.673550	1:37:58 PM - 5/21/2019
499.998172	1:39:53 PM - 5/21/2019
602.287817	1:41:42 PM - 5/21/2019
940.316974	1:43:51 PM - 5/21/2019

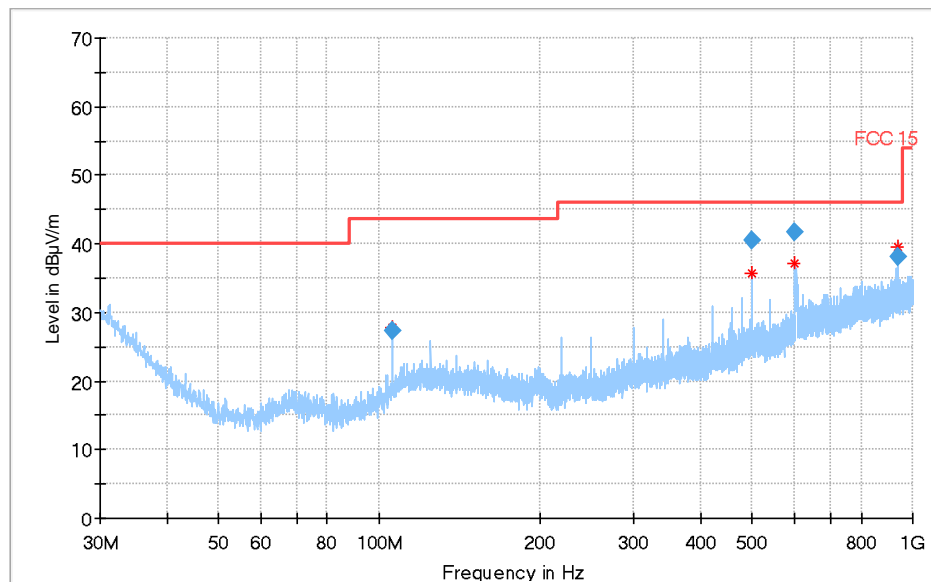

— Preview Result 1-PK+ * Critical_Freqs PK+ — FCC 15 ◆ Final_Result PK+

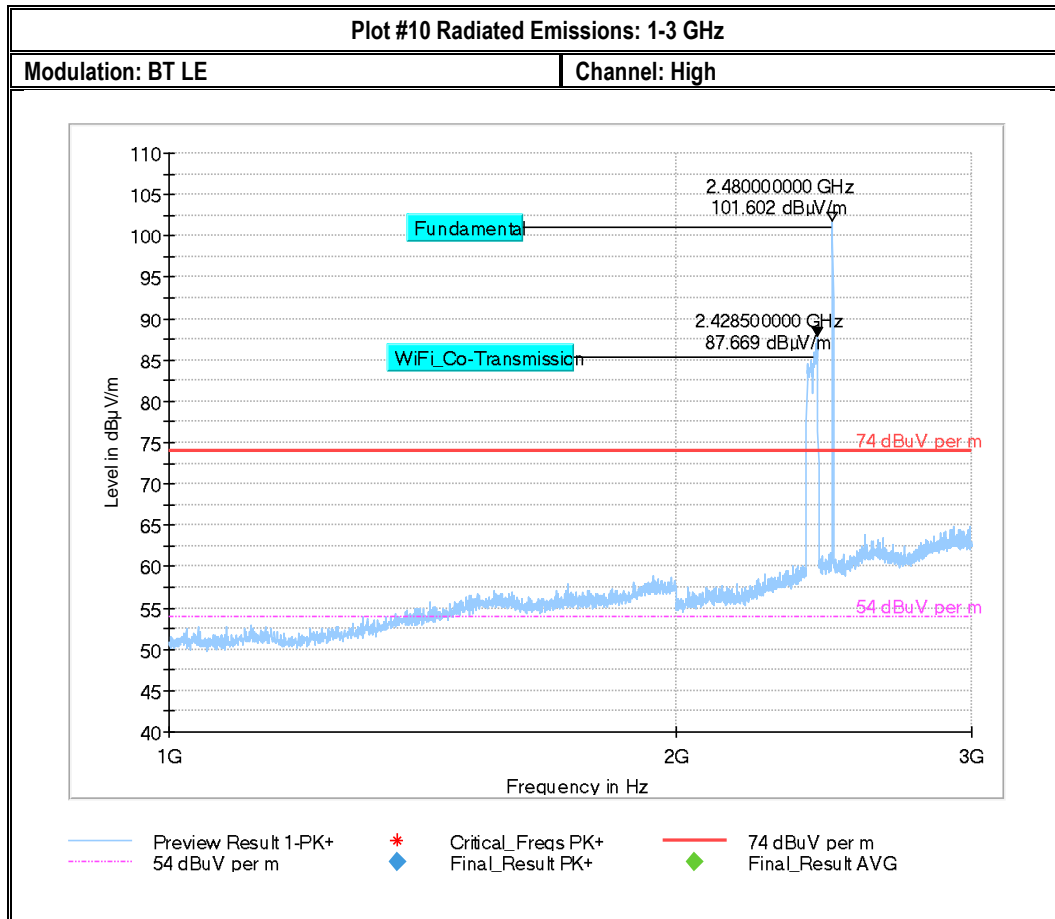

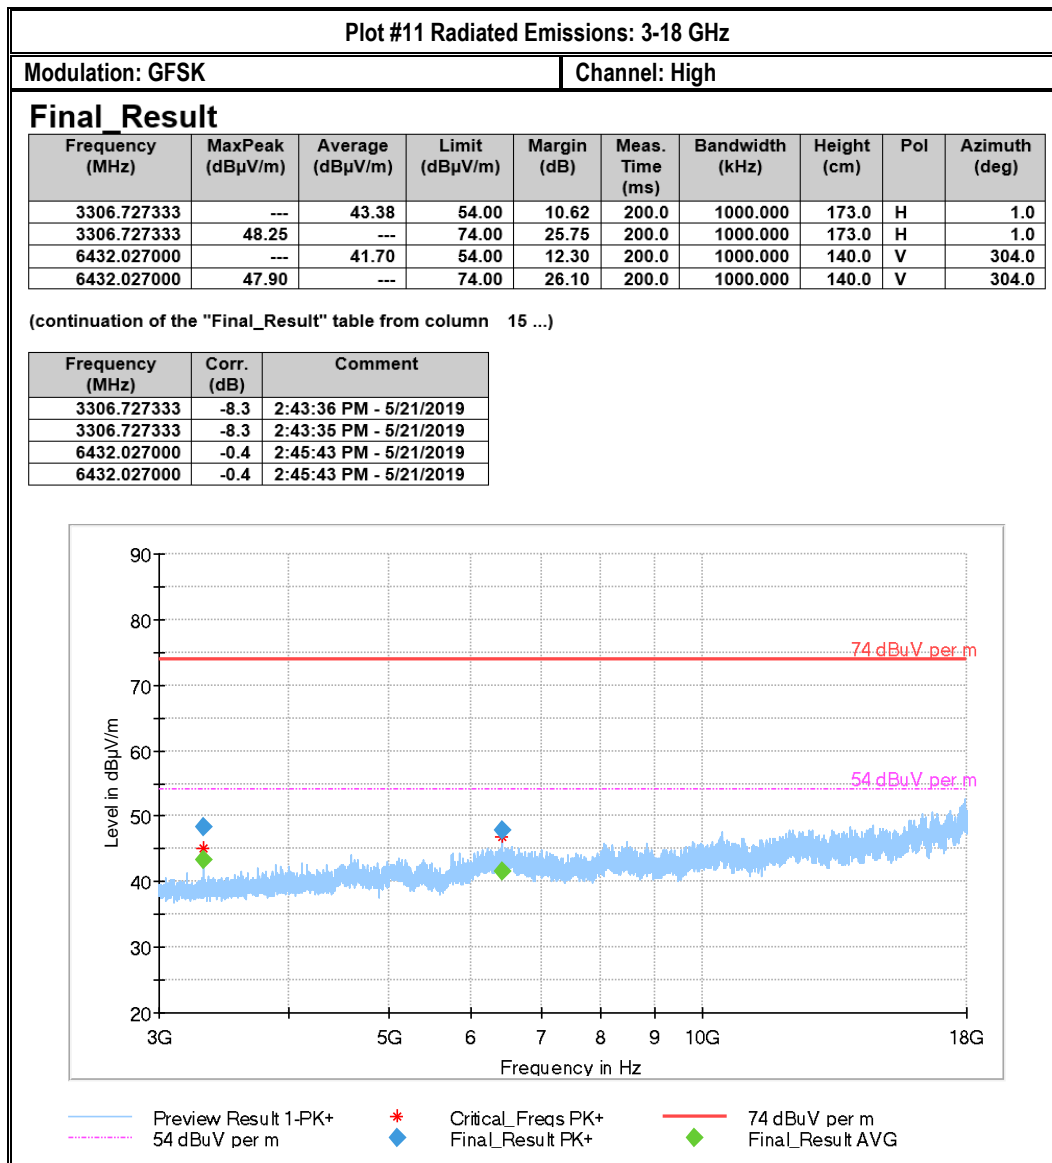

9 Test setup photos

Setup photos are included in supporting file name: "EMC_ZONAR_019_19001_15.247_Setup_Photos.pdf"

10 Test Equipment And Ancillaries Used For Testing

Equipment Type	Manufacturer	Model	Serial #	Calibration Cycle	Last Calibration Date
PASSIVE LOOP	ETS.LINDGREN	6512	00164698	3 YEARS	08/08/2017
BILOG ANTENNA	TESEO	CBL 6141B	41106	3 YEARS	11/01/2017
HORN ANTENNA	ETS.LINDGREN	3115	00035114	3 YEARS	07/31/2017
HORN ANTENNA	ETS.LINDGREN	3117	0167061	3 YEARS	08/08/2017
HORN ANTENNA	ETS.LINDGREN	3116C	00166821	3 YEARS	09/24/2017
SIGNAL ANALYZER	R&S	FSU26	200065	2 YEARS	07/03/2017
SIGNAL ANALYZER	R&S	FSV 40	101022	3 YEARS	07/05/2017
TEST RECEIVER	R&S	ESU.EMI	100256	3 YEARS	01/31/2018
COMPACT DIGITAL BAROMETER	CONTROL COMPANY	35519-055	91119547	2 YEARS	06/20/2017
DIGITAL THERMOMETER	CONTROL COMPANY	36934-164	181230565	2 YEARS	01/10/2019

Note: Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels. Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

Test Report #: EMC_ZONAR-019-19001_15.247_BT_DTS
Date of Report 2019-06-10

FCC ID: SEJ-ZTCU4B
IC ID: 5266A-ZTCU4B



11 Revision History

Date	Report Name	Changes to report	Report prepared by
2019-06-10	EMC_ZONAR_019_19001_15.247_BT_DTS	Initial version	Yuchan Lu