

RF Exposure Evaluation

FCC ID: 2AXTHT10

1 Measuring Standard

KDB 680106 Wireless Power Transfer D01 V04

2 Requirements

All requirements refer to Section 3 of KDB 680106 D01V04:

1.The devices may be considered to meet the § 2.1091-Mobile conditions (“generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source’s radiating structure(s) and [the nearest person]”)

2.Devices Operating at Frequencies Below 4 MHz.


3.For § 2.1091-Mobile devices, the MPE limits between 100 kHz to 300 kHz are to be considered the same as those at 300 kHz in Table 1 of § 1.1310, that is, 614 V/m and 1.63 A/m, for the electric field and magnetic field, respectively.

3 Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

4 Test Setup

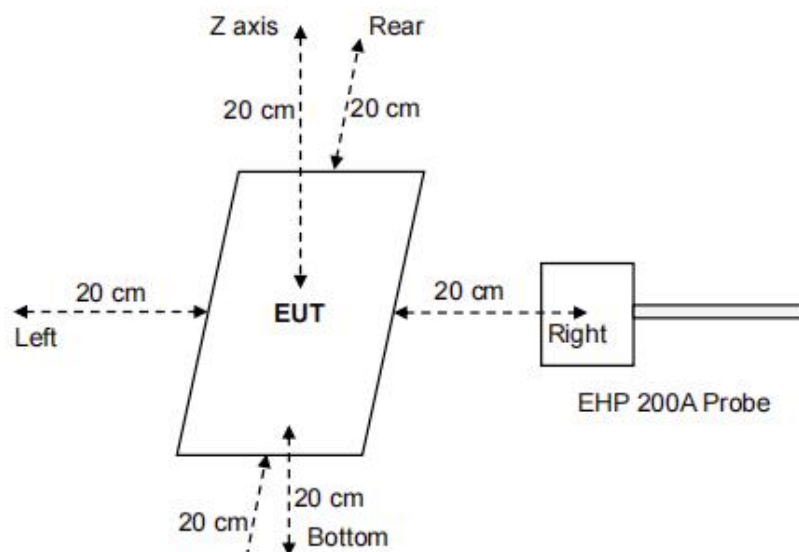

5 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (20 cm from the top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed
- 4) The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.


6. Measurement Uncertainty (95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for H-Field	2.36dB
Uncertainty for E-Field	2.42dB
Uncertainty for conducted RF Power	0.62dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1.1%
Uncertainty for DC and low frequency voltages	0.06%

7. Equipment list

Test Equipment	Manufacturer	Model No.	SN.	Last calibration	Calibrated until
Electric and Magnetic field probe-Analyzer	Narda	EHP-200A	N03565	Aug 28,2024	Aug 27,2025

7 Placement Mode 10 Photo

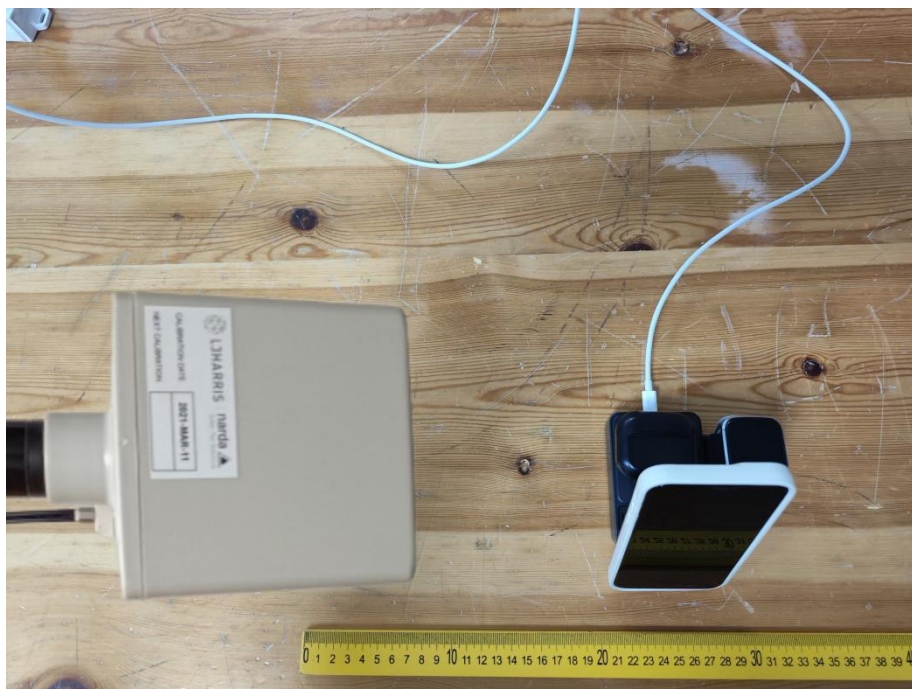

8 Test mode

Mode 1	Watch(2.5W)
Mode 2	Wireless Earbuds(5W)
Mode 3	iPhone 12(5W)
Mode 4	iPhone 12(7.5W)
Mode 5	iPhone 12(10W)
Mode 6	iPhone 12(15W)
Mode 7	Watch(2.5W)+Wireless Earbuds(5W)+iPhone 12(5W)
Mode 8	Watch(2.5W)+Wireless Earbuds(5W)+iPhone 12(7.5W)
Mode 9	Watch(2.5W)+Wireless Earbuds(5W)+iPhone 12(10W)
Mode 10	Watch(2.5W)+Wireless Earbuds(5W)+iPhone 12(15W)

Mode 11	Watch(2.5W)+iPhone 12(5W)
Mode 12	Watch(2.5W)+iPhone 12(7.5W)
Mode 13	Watch(2.5W)+iPhone 12(7.5W)
Mode 14	Watch(2.5W)+iPhone 12(10W)
Mode 15	Watch(2.5W)+Phone(15W)
Mode 16	Wireless Earbuds(5W)+iPhone 12(5W)
Mode 17	Wireless Earbuds(5W)+iPhone 12(7.5W)
Mode 18	Wireless Earbuds(5W)+iPhone 12(10W)
Mode 19	Wireless Earbuds(5W)+iPhone 12(15W)
Mode 20	Watch(2.5W)+Wireless Earbuds(5W)

9 Necessary accessories

	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Phone	Apple	iPhone 12	N/A	This is for testing only in report.
2	Wireless Earbuds	HUAWEI	FreeBuds Pro	N/A	This is for testing only in report.

3	Watch	Xiaomi	S1 Pro	N/A	This is for testing only in report.
4	Adapter	Xiaomi	MDY-11-EB	N/A	This is for testing only in report.

10 Test Result

Placement Mode 10(Worst)

E-Filed Strength at 20 cm from the edges surrounding the EUT (V/m)

Battery power	Frequency Range(MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (V/m)	50%MPE limit (V/m)	Result
1%	0.115-0.205	1.42	1.49	0.61	0.52	614	307	PASS
50%	0.115-0.205	1.54	1.47	0.50	0.62	614	307	PASS
95%	0.115-0.205	1.30	1.51	0.48	0.60	614	307	PASS

E-Filed Strength at 20 cm from the top of the EUT (V/m)

Battery power	Frequency Range(MHz)	Test Position E	Limits (V/m)	50%MPE limit(V/m)	Result
1%	0.115-0.205	1.26	614	307	PASS
50%	0.115-0.205	1.28	614	307	PASS
95%	0.115-0.205	1.36	614	307	PASS

H-Filed Strength at 20 cm from the edges surrounding the EUT (A/m)

Battery power	Frequency Range(MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)	50%MP E limit (A/m)	Result
1%	0.115-0.205	0.65	0.67	0.66	0.64	1.63	0.815	PASS
50%	0.115-0.205	0.65	0.59	0.60	0.68	1.63	0.815	PASS
95%	0.115-0.205	0.65	0.59	0.61	0.64	1.63	0.815	PASS
Stand-by	0.115-0.205	0.64	0.60	0.64	0.66	1.63	0.815	PASS

H-Filed Strength at 20 cm from the top of the EUT (A/m)

Battery power	Frequency Range(MHz)	Test Position E	Limits (A/m)	50%MPE limit (A/m)	Result
1%	0.115-0.205	0.57	1.70	0.815	PASS
50%	0.115-0.205	0.50	1.67	0.815	PASS
95%	0.115-0.205	0.51	1.66	0.815	PASS
Stand-by	0.115-0.205	0.66	1.65	0.815	PASS

Tested by

:



(Duke Qian)

Approved by

:



(Jack Wang)

*****END OF THE REPORT*****