



REGULATORY COMPLIANCE TEST REPORT

FCC Part 15 Subpart C 15.247 (DTS)
ISED RSS-247 Issue 2

Report No.: DIGI110-U2 Rev A

Company: Digi International

Model Name: ConnectCore MP15/ConnectCore MP13

REGULATORY COMPLIANCE TEST REPORT

Company Name: Digi International

Model Name: ConnectCore MP15/ConnectCore MP13

To: FCC Part 15 Subpart C 15.247 (DTS) & ISSED RSS-247 Issue 2

Test Report Serial No.: DIGI110-U2 Rev A

This report supersedes: NONE

Applicant: Digi International
9350 Excelsior Blvd, Suite 700
Hopkins, MN 55343
United States of America

Issue Date: 10th July 2023

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	4
1.1. TESTING ACCREDITATION	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s)	13
5.4. Antenna Details	13
5.5. Cabling and I/O Ports	14
5.6. Test Configurations	15
5.7. Equipment Modifications	15
5.8. Deviations from the Test Standard	15
6. TEST SUMMARY	16
7. TEST EQUIPMENT CONFIGURATION(S)	17
7.1. Radiated Emissions	17
8. MEASUREMENT AND PRESENTATION OF TEST DATA	19
9. TEST RESULTS	20
9.1. Radiated Emissions	20
9.1.1. <i>TX Spurious & Restricted Band Emissions</i>	22
9.1.1.1. GW.48.A151 Dipole	22
9.1.1.2. ANTX100P001B24553 PCB	25
9.1.2. <i>Restricted Edge & Band-Edge Emissions</i>	28
9.1.2.3. GW.48.A151 Dipole	28
9.1.2.3.1. <i>Lower Band-Edge</i>	28
9.1.2.3.2. <i>Upper Band-Edge</i>	28
9.1.2.4. ANTX100P001B24553 PCB	35
9.1.2.4.1. <i>Lower Band-Edge</i>	35
9.1.2.4.2. <i>Upper Band-Edge</i>	35

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



1.2. RECOGNITION

MiCOM Labs, Inc is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM Labs test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Firm Designation#: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 ISED#: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA 2	NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB – Telecommunications Certification Bodies (TCB)

FCB – Foreign Certification Body

CAB – Conformity Assessment Body

NB – Notified Body

AB – Approved Body

MRA – Mutual Recognition Agreement

MRA PhasePhase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
UK – Approved Body (AB), AB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	23 rd May 2023	Initial Draft for Client Review
Rev A	10 th July 2023	Initial release.

In the above table the latest report revision will replace all earlier versions.

3. TEST RESULT CERTIFICATE

Manufacturer: Digi International 9350 Excelsior Blvd, Suite 700 Hopkins MN 55343 United States of America	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: CCMP15/CCMP13	Telephone: +1 925 462 0304
Type Of Equipment: Wireless Module	Fax: +1 925 462 0306
S/N's: MP15: 038 MP13: 023	
Test Date(s): 3rd - 8th May 2023	Website: www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart C 15.247 (DTS) ISED RSS-247 Issue 2	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



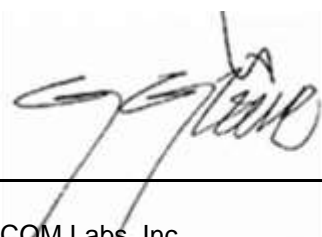

Graeme Grieve
Quality Manager MiCOM Labs, Inc.

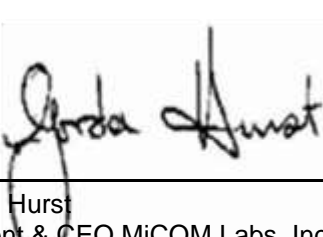

Gordon Hurst
President & CEO MiCOM Labs, Inc.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 558074 D01 v05r02	Apr 2019	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC Rules.
II	A2LA	22nd June 2022	R105 - Requirement's When Making Reference to A2LA Accreditation Status
III	ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices
IV	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
V	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VI	FCC 47 CFR Part 15.247	Apr 2020	Radio Frequency Devices; Subpart C – Intentional Radiators
VII	ICES-003	Issue 7; Oct 2020	Information Technology Equipment (Including Digital Apparatus)
VIII	M 3003	EDITION 4 Oct 2019	Expression of Uncertainty and Confidence in Measurements
IX	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
X	RSS-Gen Issue 5	Amendment 1,2 (Feb 2021)	General Requirements for Compliance of Radio Apparatus. With Amendments 1: March 2019 and 2: Feb 2021.
XI	FCC 47 CFR Part 2.1033	May 2021	FCC requirements and rules regarding photographs and test setup diagrams.
XII	KDB 789033 D02 V02r01	Dec 2017	Guidelines For Compliance Testing Of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Digi International CCMP15/CCMP13 to FCC CFR 47 Part 15 Subpart C 15.247 (DTS) and ISED RSS-247 Issue 2.
Applicant:	Digi International 9350 Excelsior Blvd, Suite 700 Hopkins MN 55343 United States of America
Manufacturer:	Digi International
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	DIGI110-U2
Date EUT received:	29 th March 2023
Standard(s) applied:	FCC CFR 47 Part 15 Subpart C 15.247 (DTS) ISED RSS-247 Issue 2
Dates of test (from - to):	3rd - 8th May 2023
No of Units Tested:	1
Product Family Name:	ConnectCore MP15 & ConnectCore MP13
Model(s):	CCMP15/CCMP13
Location for use:	Both
Declared Frequency Range(s):	2400 - 2483.5 MHz;
Type of Modulation:	CCK & OFDM
EUT Modes of Operation:	2400 - 2483.5 MHz: b; g; HT-20;
Declared Nominal Output Power:	+18.0 dBm
Transmit/Receive Operation:	Transceiver
Rated Input Voltage and Current:	5 VDC 3A
Operating Temperature Range:	-40 - +85
ITU Emission Designator:	12M2G1D
Equipment Dimensions:	1.14 / 0.19 / 1.14 in
Weight:	6.6 grams
Hardware Rev:	55002119-01
Software Rev:	82004595 / 82004689

5.2. Scope Of Test Program

Digi International ConnectCore MP15/ConnectCore MP13

The scope of the test program was to test the Digi International ConnectCore MP15 and ConnectCore MP13 for radiated emissions in its 802.11 configurations in the frequency ranges 2400 - 2483.5 MHz; for compliance against the following specifications:

FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Radio Frequency Devices; Subpart C – Intentional Radiators

ISSED RSS-247 Issue 2

Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and License-Exempt Local Area Network (LE-LEN) Devices

Antenna Additions as per section 5.4 and as such testing was limited to:

Transmitter Spurious & Band Edge Emissions.

Radio Module is pre-certified any additional tests needed may be found in the following test reports:

UL-CCIC Test Report# 4790016144.1-AE-1 Rev. 0 Dated 6/27/2022

UL-CCIC Test Report#4790016144.1-AE-2 Rev. 0 Dated 6/27/2022

UL-CCIC Test Report#4790016144.1-AE-4 Rev. 0 Dated 6/27/2022

Note:

ConnectCore MP15 & ConnectCore MP13 have the same radio module with differences in digital circuitry. As such only the CCMP15 was tested for RF testing.

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description	Manufacturer	Model No.	Serial No.
EUT Conducted	Wireless Radio Module	Digi International	CCMP15	038
EUT Conducted	Wireless Radio Module	Digi International	CCMP13	023
Support	Power Supply (5V 3A)	MEAN WELL	GE24I05	--

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
external	Ethertronics	1001932	PCB	2.5	-	360	-	2400 - 2483.5
external	KYOCERA	W3P35x8W04-U100D3B0A	PCB	2.3	-	360	-	2400 - 2483.5
external	KYOCERA	X9001091-W3DRMB	Dipole	1.8	-	360	-	2400 - 2483.5
external	Linx Technologies	ANT-DB1-RAF-RPS	Dipole	2.5	-	360	-	2400 - 2483.5
external	TAOGLAS	FXP830.07.0100C	PCB	2.5	-	360	-	2400 - 2483.5
external	TAOGLAS	FXP831.07.0100C	PCB	3.0	-	360	-	2400 - 2483.5
external	TAOGLAS	GW.48.A151	Dipole	3.4	-	360	-	2400 - 2483.5
external	Yageo	ANTX100P001B24553	PCB	4.6	-	360	-	2400 - 2483.5

BF Gain - Beamforming Gain
Dir BW - Directional BeamWidth
X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

CCMP15:

Port Type	Max Cable Length	# of Ports	Screened	Conn Type	Data Type	Bit Rate	Environment
dc Jack	<3m	1	No			N/A	Indoors
Ethernet PoE IN	>30m	1	No	RJ45	Digital	10, 100, 1000 MBits/s	Indoors
Micro USB	<3m	1	Yes	Data	Digital	--	--
USB A	<3m	2	Yes	Data	Digital	--	--
HDMI	<3m	1	Yes	Data	Digital	--	--
SD Slot	--	1	Yes	Data	Digital	--	--
Sim Slot	--	1	Yes	Data	Digital	--	--
Console port (UART)	--	1	Yes	Data	Digital	--	--
General Purpose I/Os	--	1	Yes	Data	Digital	--	--

CCMP13:

Port Type	Max Cable Length	# of Ports	Screened	Conn Type	Data Type	Bit Rate	Environment
dc Jack	<3m	1	No			N/A	Indoors
Ethernet PoE IN	>30m	2	No	RJ45	Digital	10, 100, 1000 MBits/s	Indoors
Micro USB	<3m	1	Yes	Data	Digital	--	--
USB A	<3m	2	Yes	Data	Digital	--	--
SD Slot	--	1	Yes	Data	Digital	--	--
Sim Slot	--	1	Yes	Data	Digital	--	--
Console port (UART)	--	1	Yes	Data	Digital	--	--
General Purpose I/Os	--	1	Yes	Data	Digital	--	--

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s) (802.11b/g/n)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
2400 - 2483.5 MHz				
b	1	2,412.00	2,437.00	2,462.00
g	6	2,412.00	2,437.00	2,462.00
HT-20	6.5	2,412.00	2,437.00	2,462.00

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

6. TEST SUMMARY


List of Measurements

Test Header	Result	Data Link
Emissions	Complies	-
(1) Radiated Emissions	Complies	-
(i) TX Spurious & Restricted Band Emissions	Complies	View Data
(ii) Restricted Edge & Band-Edge Emissions	Complies	View Data

7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Radiated Emissions

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions above and below 1GHz.

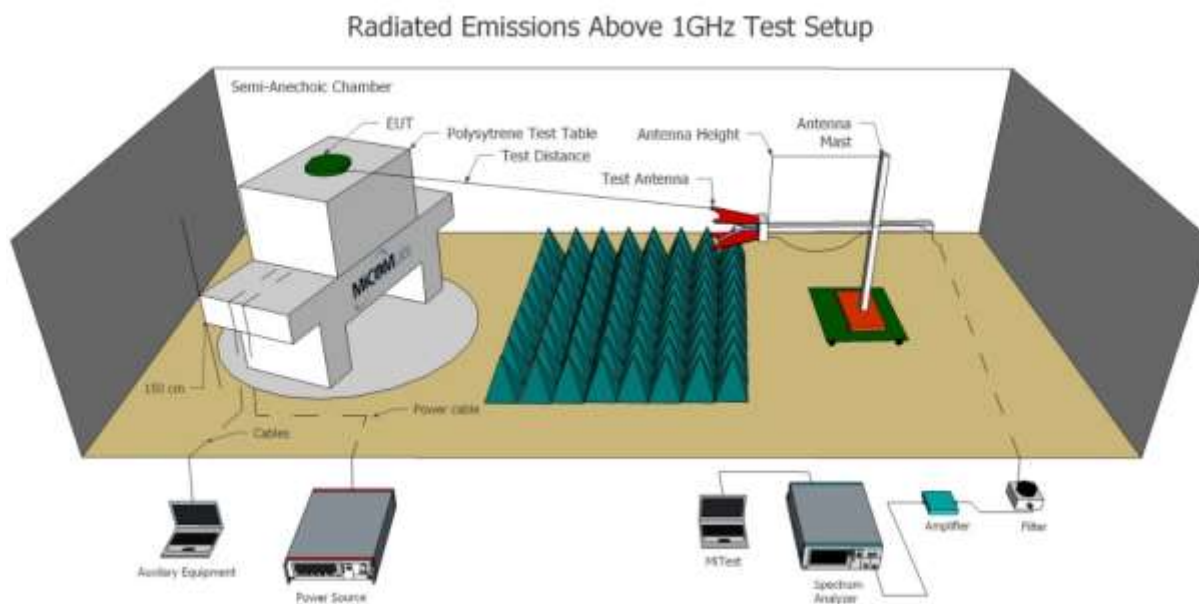

Test Equipment Utilized

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2023
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	24 Aug 2023
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	29 Sep 2023
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	6 Oct 2023
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	29 Sep 2023
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	30 Sep 2023
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	2 Nov 2023
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	27 Oct 2023
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	27 Oct 2023
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	27 Oct 2023
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	6 Oct 2023
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	6 Oct 2023
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	6 Oct 2023
510	Barometer/Thermometer	Control Company	68000-49	170871375	20 Dec 2024
554	Precision SMA Cable	Fairview Microwave	SCE18060101-400CM	554	6 Oct 2023
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	24 Dec 2023

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

9. TEST RESULTS

9.1. Radiated Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)			
Standard:	FCC CFR 47 Part 15 Subpart C 15.247 (DTS) ISED RSS-247	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.205, 15.209 RSS-247:5.5	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Orientation testing of the EUT was performed and the EUT standing upright was determined to be the worst case for Spurious and Band Edge emissions with the integral antennas attached.

Limits for Restricted Bands

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Average Measurements were performed following ANSI C63.10 section 11.12.2.5.2 Trace averaging across on and off times of the EUT transmissions followed by a duty cycle correction.

RMS detector used, DCCF of $10\log(1/D)$ where D is the Duty Cycle.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \log(\text{level (mV/m)})$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed

below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

9.1.1. TX Spurious & Restricted Band Emissions

9.1.1.1. GW.48.A151 Dipole

NOTE: For Tx spurious & Restricted Band-Edge measurements power setting utilized were extracted from the original reports identified in Section 5.2 'Scope of the Test Program'


Equipment Configuration for FCC Spurious 1 GHz -18 GHz

Antenna:	GW.48.A151	Variant:	802.11b
Antenna Gain (dBi):	3.42	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



Spurious Emissions 1 GHz -18 GHz

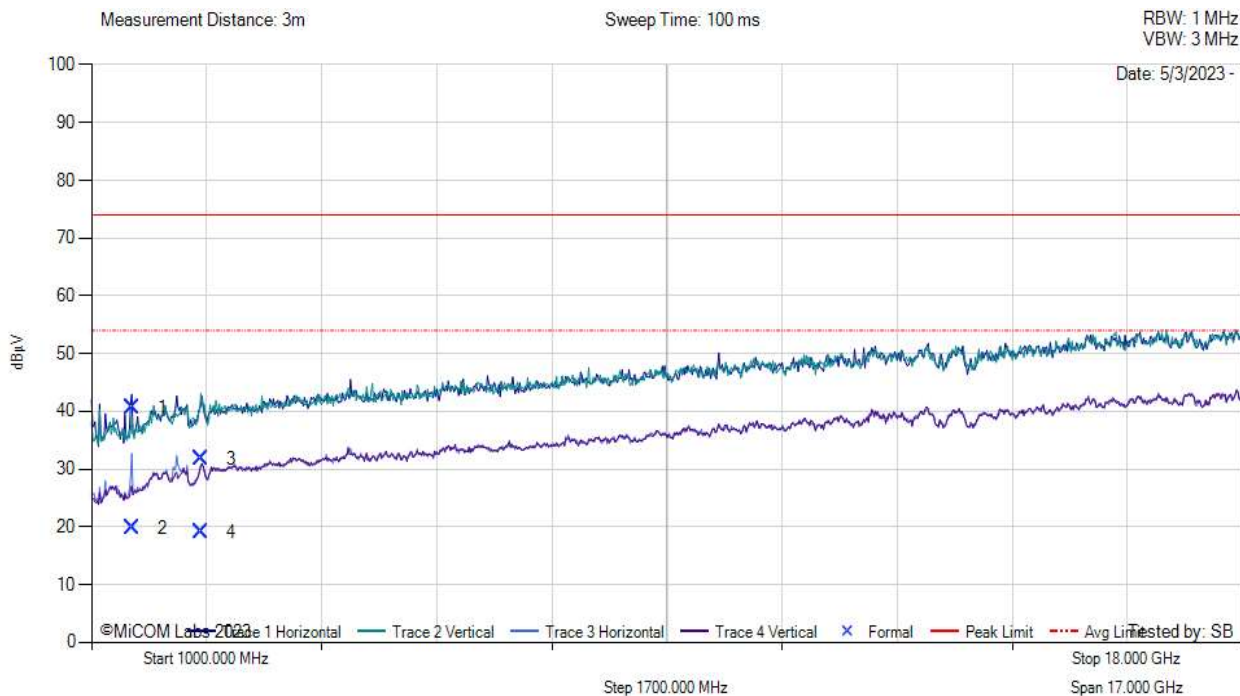

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1598.32	55.82	1.62	-16.85	40.59	MaxP	Horizontal	146	152	74.0	-33.4	Pass
2	1598.32	35.10	1.62	-16.85	19.87	AVG	Horizontal	146	152	54.0	-34.1	Pass
3	2621.63	41.41	2.07	-11.67	31.82	Fundamental	--	--	--	--	--	Pass
4	2621.63	28.75	2.07	-11.67	19.15	Fundamental	--	--	--	--	--	Pass

Test Notes: Max power, 5VDC 3A


Equipment Configuration for FCC Spurious 1 GHz -18 GHz

Antenna:	GW.48.A151	Variant:	802.11b
Antenna Gain (dBi):	3.42	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2437.0	Data Rate:	1
Power Setting:	17	Tested By:	SB

Test Measurement Results



Spurious Emissions 1 GHz -18 GHz

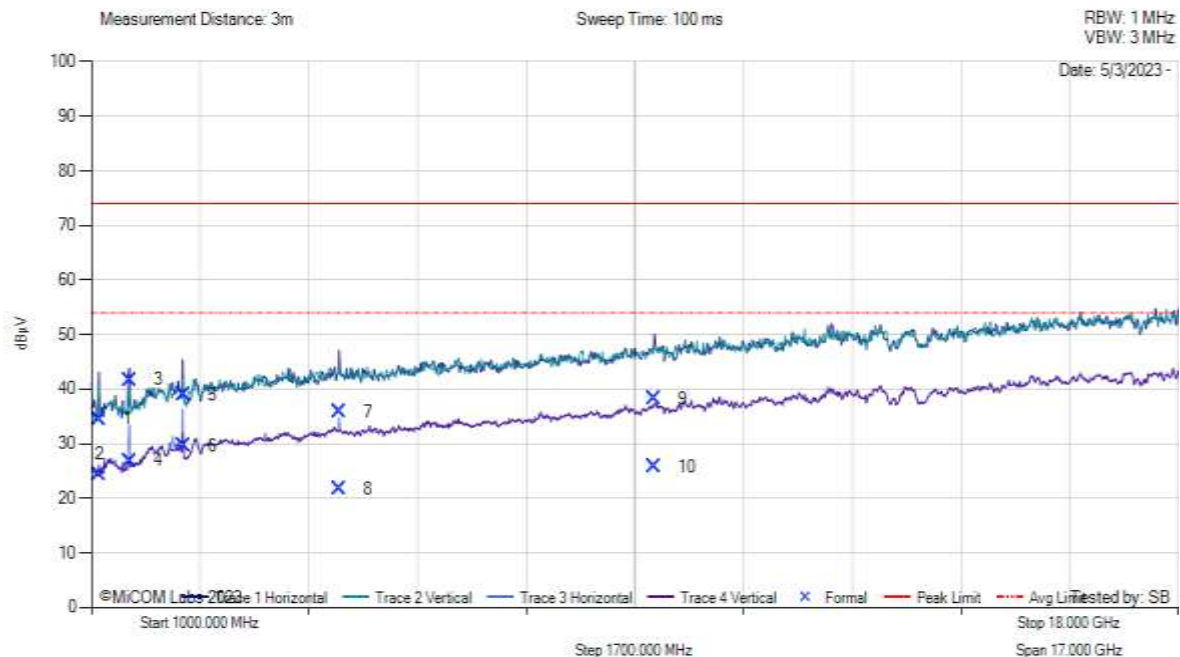

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1124.82	50.81	1.35	-17.64	34.51	MaxP	Horizontal	100	139	74.0	-39.5	Pass
2	1124.82	40.78	1.35	-17.64	24.48	AVG	Horizontal	100	139	54.0	-29.5	Pass
3	1599.00	56.94	1.62	-16.85	41.71	MaxP	Horizontal	145	146	74.0	-32.3	Pass
4	1599.00	42.06	1.62	-16.85	26.84	AVG	Horizontal	145	146	54.0	-27.2	Pass
5	2438.57	49.12	1.99	-12.11	39.00	Fundamental	--	--	--	--	--	Pass
6	2438.57	39.75	1.99	-12.11	29.63	Fundamental	--	--	--	--	--	Pass
7	4873.84	44.80	2.84	-11.84	35.80	MaxP	Horizontal	132	31	74.0	-38.2	Pass
8	4873.84	30.71	2.84	-11.84	21.71	AVG	Horizontal	132	31	54.0	-32.3	Pass
9	9804.34	39.94	4.31	-5.95	38.30	MaxP	Horizontal	148	50	74.0	-35.7	Pass
10	9804.34	27.43	4.31	-5.95	25.80	AVG	Horizontal	148	50	54.0	-28.2	Pass

Test Notes: Max power, 5VDC 3A


Equipment Configuration for FCC Spurious 1 GHz -18 GHz

Antenna:	GW.48.A151	Variant:	802.11b
Antenna Gain (dBi):	3.42	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2462.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



Spurious Emissions 1 GHz -18 GHz

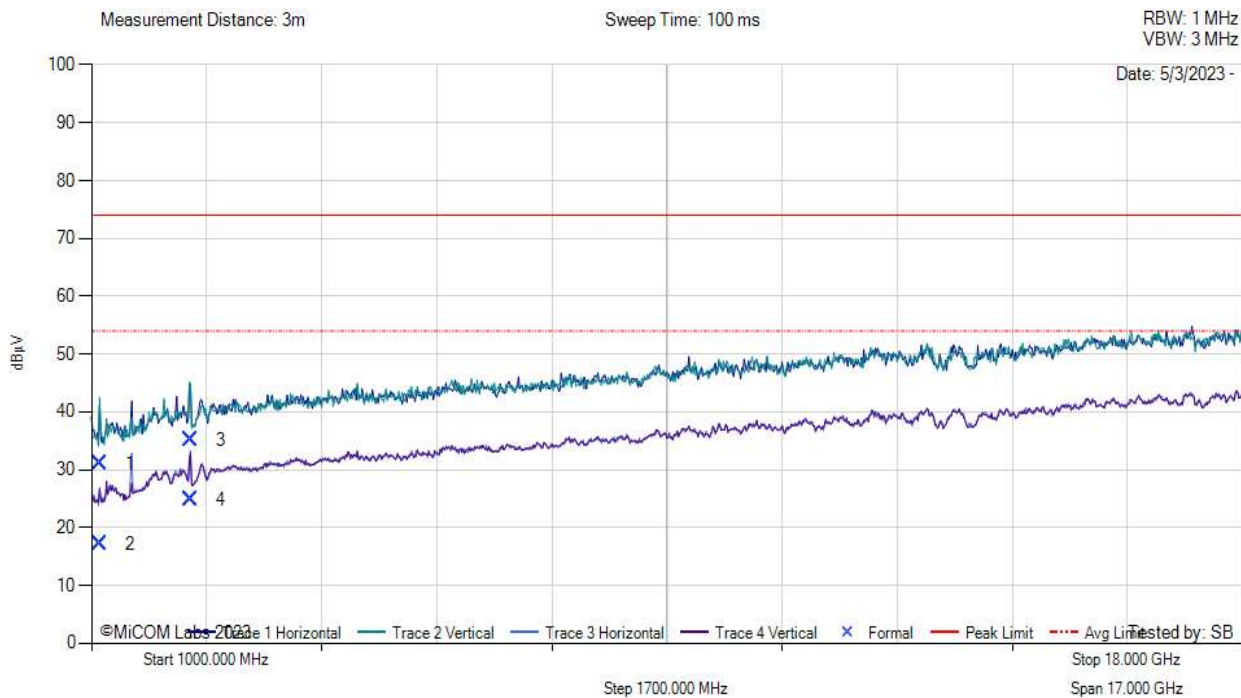

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1124.91	47.35	1.35	-17.64	31.05	MaxP	Vertical	98	75	74.0	-43.0	Pass
2	1124.91	33.50	1.35	-17.64	17.21	AVG	Vertical	98	75	54.0	-36.8	Pass
3	2460.76	45.07	2.00	-12.00	35.07	Fundamental	--	--	--	--	--	Pass
4	2460.76	34.87	2.00	-12.00	24.87	Fundamental	--	--	--	--	--	Pass

Test Notes: Max power, 5VDC 3A

9.1.1.2. ANT-X100P001B24553 PCB


Equipment Configuration for FCC Spurious 1 GHz -18 GHz

Antenna:	ANTX100P001B24553	Variant:	802.11b
Antenna Gain (dBi):	4.6	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



Spurious Emissions 1 GHz -18 GHz

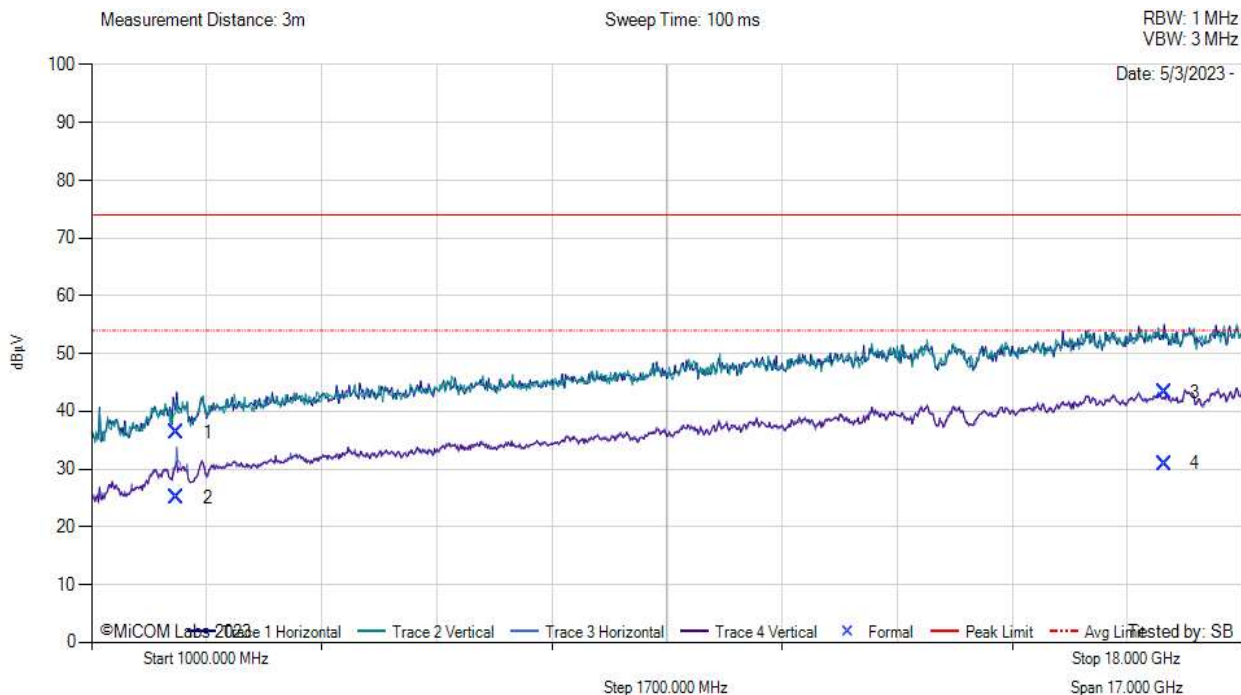

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2259.94	47.07	1.91	-12.69	36.30	Fundamental	--	--	--	--	--	Pass
2	2259.94	35.89	1.91	-12.69	25.11	Fundamental	--	--	--	--	--	Pass
3	16842.10	38.26	6.33	-1.33	43.26	MaxP	Horizontal	112	107	74.0	-30.7	Pass
4	16842.10	25.97	6.33	-1.33	30.97	AVG	Horizontal	112	107	54.0	-23.0	Pass

Test Notes: Max power, 5VDC 3A


Equipment Configuration for FCC Spurious 1 GHz -18 GHz

Antenna:	ANTX100P001B24553	Variant:	802.11b
Antenna Gain (dBi):	4.6	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2437.0	Data Rate:	1
Power Setting:	17	Tested By:	SB

Test Measurement Results



Spurious Emissions 1 GHz -18 GHz

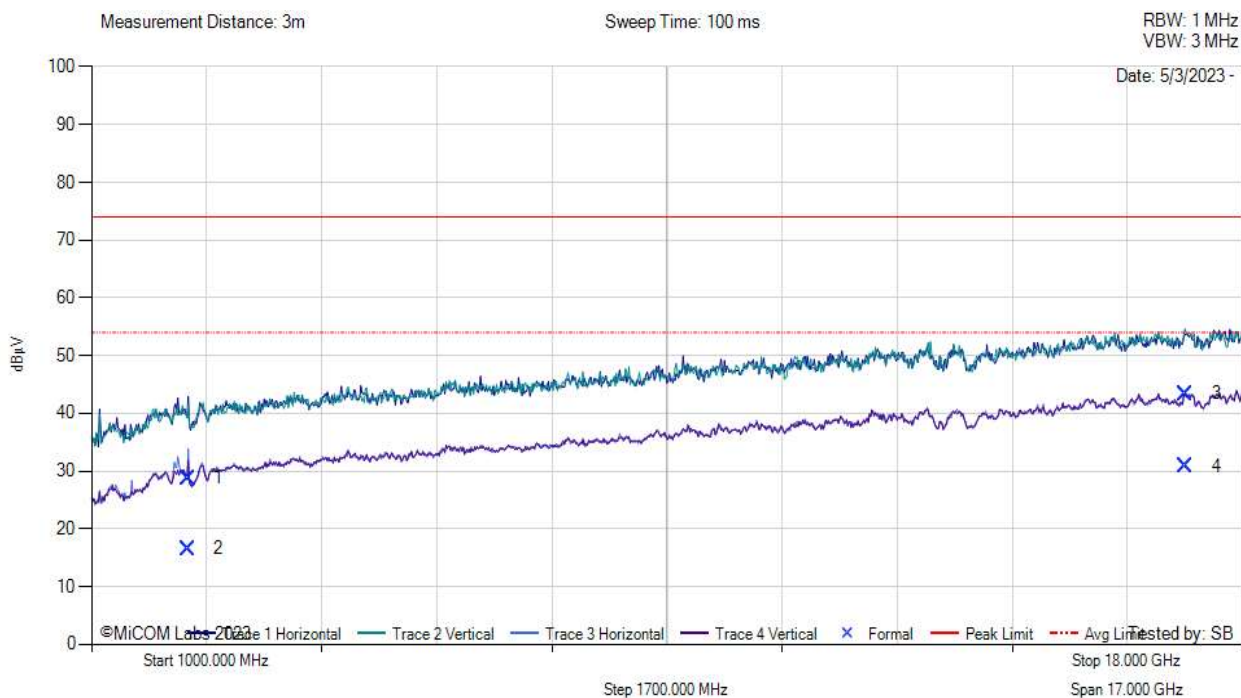

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2426.58	38.92	1.99	-12.11	28.80	Fundamental	--	--	--	--	--	Pass
2	2426.58	26.73	1.99	-12.11	16.61	Fundamental	--	--	--	--	--	Pass
3	17165.24	37.91	6.11	-0.59	43.43	MaxP	Vertical	150	0	74.0	-30.6	Pass
4	17165.24	25.34	6.11	-0.59	30.85	AVG	Vertical	150	0	54.0	-23.1	Pass

Test Notes: Max power, 5VDC 3A


Equipment Configuration for FCC Spurious 1 GHz -18 GHz

Antenna:	ANTX100P001B24553	Variant:	802.11b
Antenna Gain (dBi):	4.6	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2462.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



Spurious Emissions 1 GHz -18 GHz

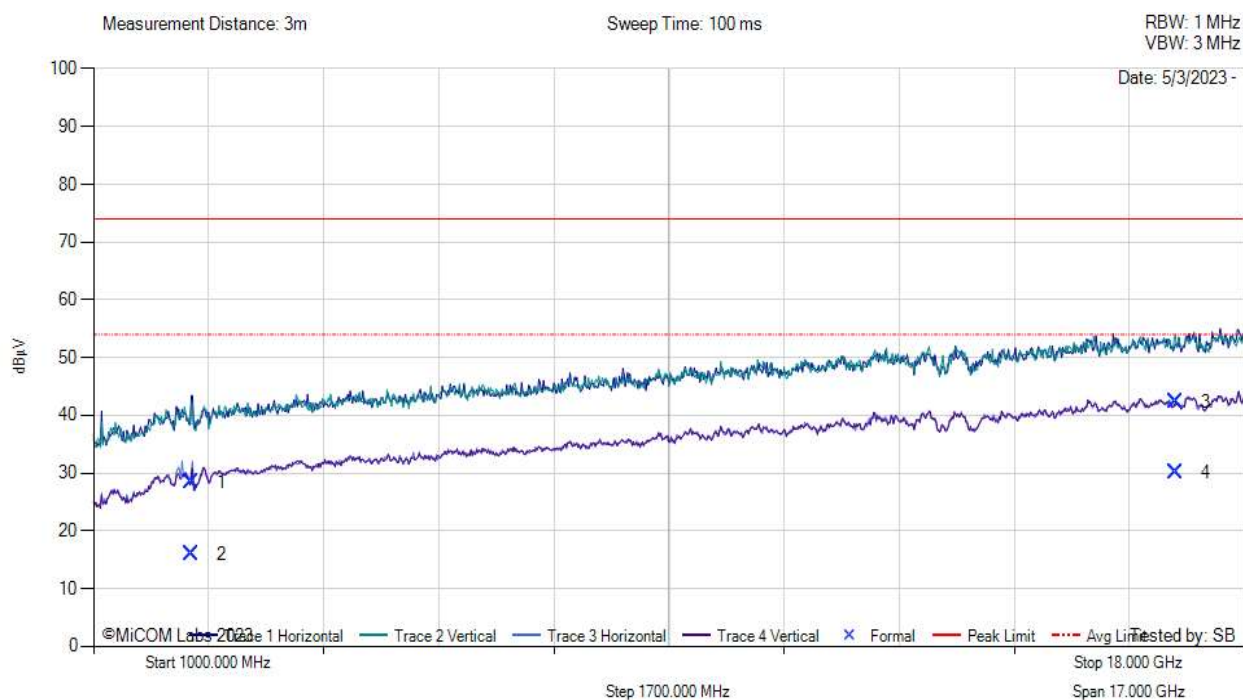

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2446.26	38.56	2.01	-12.08	28.49	Fundamental	--	--	--	--	--	Pass
2	2446.26	26.01	2.01	-12.08	15.93	Fundamental	--	--	--	--	--	Pass
3	16979.71	37.20	6.31	-1.16	42.35	MaxP	Vertical	113	53	74.0	-31.6	Pass
4	16979.71	24.90	6.31	-1.16	30.04	AVG	Vertical	113	53	54.0	-24.0	Pass

Test Notes: Max power, 5VDC 3A

9.1.2. Restricted Edge & Band-Edge Emissions

9.1.2.3. GW.48.A151 Dipole

NOTE: For Tx spurious & Restricted Band-Edge measurements power setting utilized were extracted from the original reports identified in Section 5.2 'Scope of the Test Program'

9.1.2.3.1. Lower Band-Edge

CCMP15/CCMP13		Band-Edge Freq	Limit 74.0dBμV/m	Limit 54.0dBμV/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBμV/m	dBμV/m	
802.11b	2412.00	2390.00	61.01	48.11	16
802.11g	2422.00	2390.00	58.79	47.55	9
802.11n HT-20	2412.00	2390.00	62.48	48.24	8

9.1.2.3.2. Upper Band-Edge

CCMP15/CCMP13		Band-Edge Freq	Limit 74.0dBμV/m	Limit 54.0dBμV/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBμV/m	dBμV/m	
802.11b	2462.00	2483.50	62.37	48.71	16
802.11g	2452.00	2483.50	63.26	48.22	9
802.11n HT-20	2462.00	2483.50	60.42	48.56	8


Equipment Configuration for BE 2400 MHz

Antenna:	GW.48.A151	Variant:	802.11b
Antenna Gain (dBi):	3.42	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2400 MHz

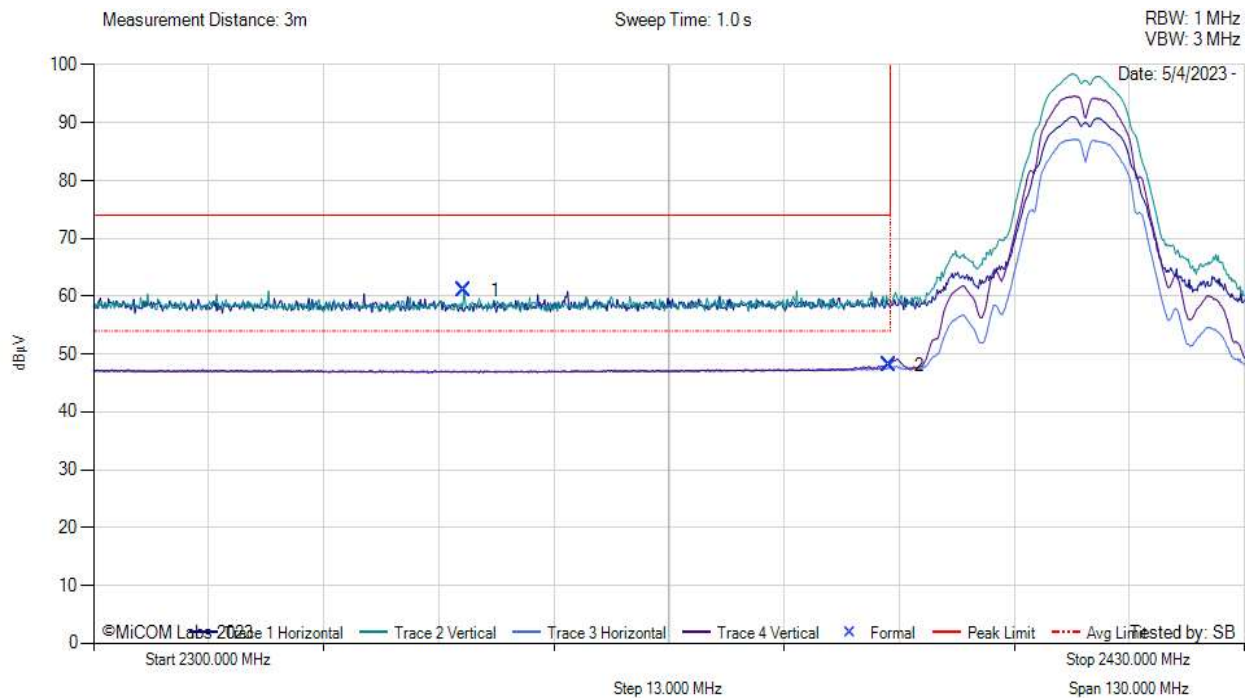

2300.00 - 2430.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2341.86	37.37	1.94	31.70	61.01	MaxP	Vertical	149	89	74.0	-13.0	Pass
2	2389.83	24.11	1.96	32.04	48.11	AVG	Vertical	149	179	54.0	-5.9	Pass

Test Notes: Max power, 5VDC 3A

[back to matrix](#)


Equipment Configuration for BE 2400 MHz

Antenna:	GW.48.A151	Variant:	802.11g
Antenna Gain (dBi):	3.42	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2400 MHz

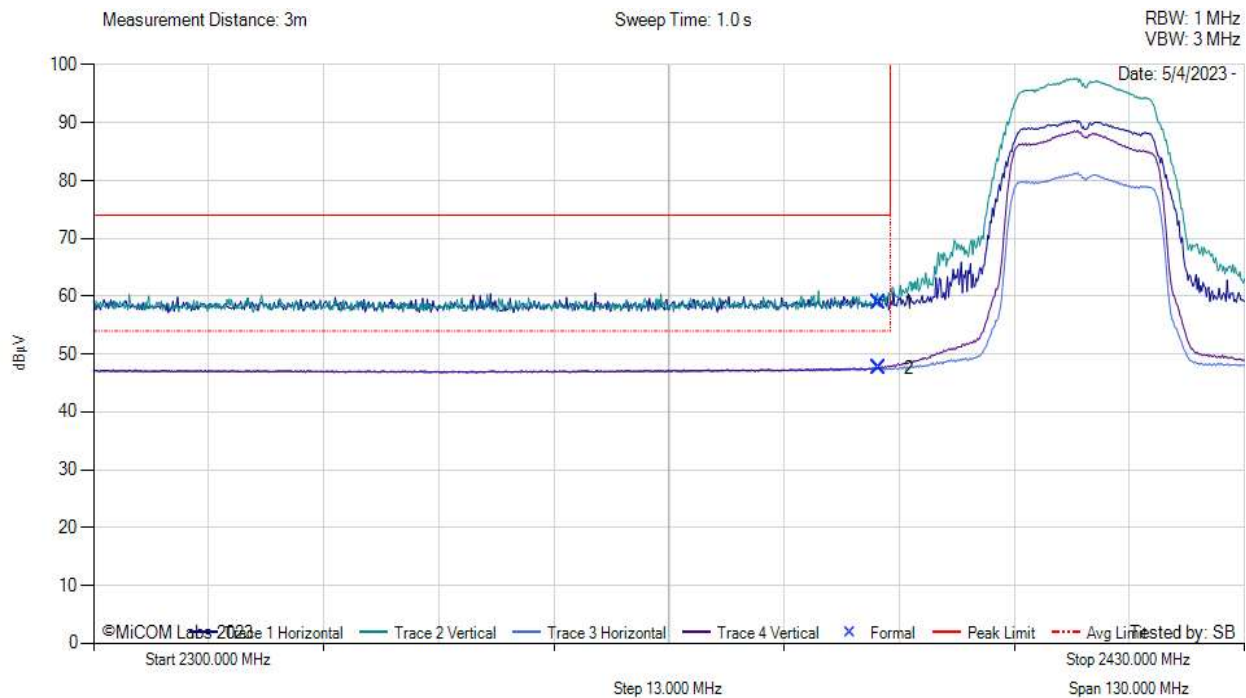

2300.00 - 2430.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2388.66	34.79	1.96	32.04	58.79	MaxP	Vertical	100	0	74.0	-15.2	Pass
2	2388.66	23.55	1.96	32.04	47.55	AVG	Vertical	149	179	54.0	-6.5	Pass

Test Notes: Max power, 5VDC 3A,

[back to matrix](#)


Equipment Configuration for BE 2400 MHz

Antenna:	GW.48.A151	Variant:	802.11n HT20
Antenna Gain (dBi):	3.42	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2400 MHz

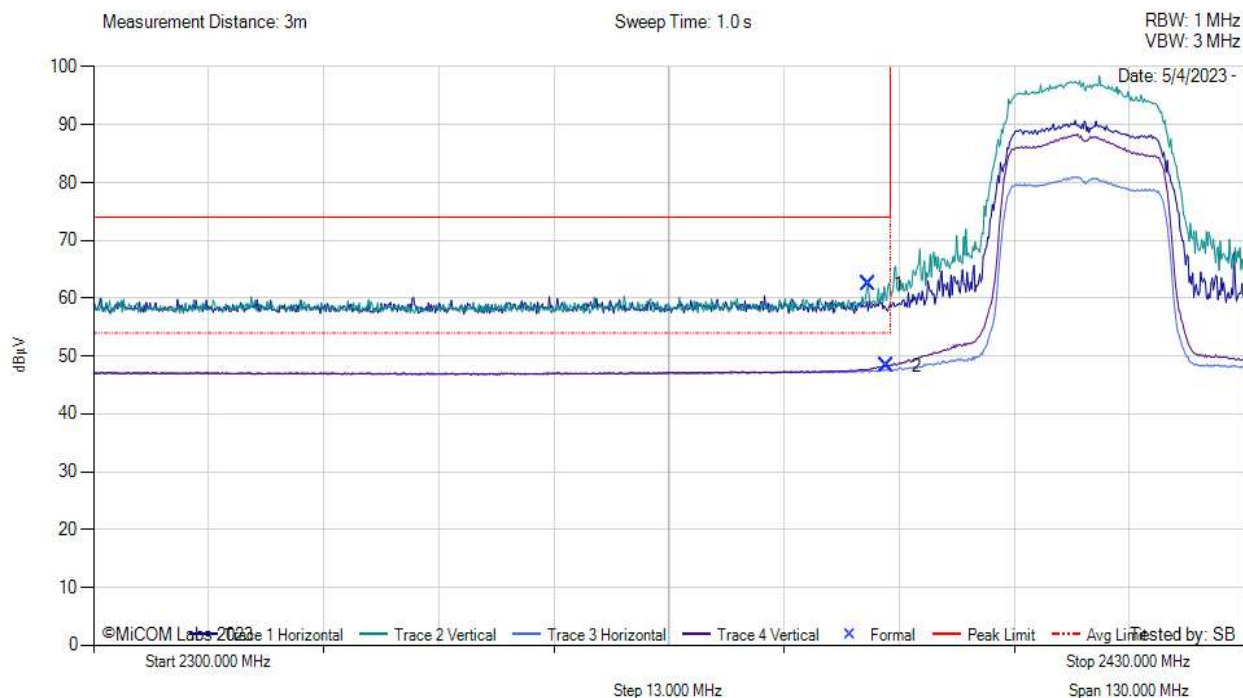

2300.00 - 2430.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2387.49	38.49	1.97	32.02	62.48	MaxP	Vertical	149	90	74.0	-11.5	Pass
2	2389.57	24.23	1.96	32.04	48.24	AVG	Vertical	149	90	54.0	-5.8	Pass

Test Notes: Max power, 5VDC 3A,

[back to matrix](#)


Equipment Configuration for BE 2483.5 MHZ

Antenna:	GW.48.A151	Variant:	802.11b
Antenna Gain (dBi):	3.42	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2483.5 MHz

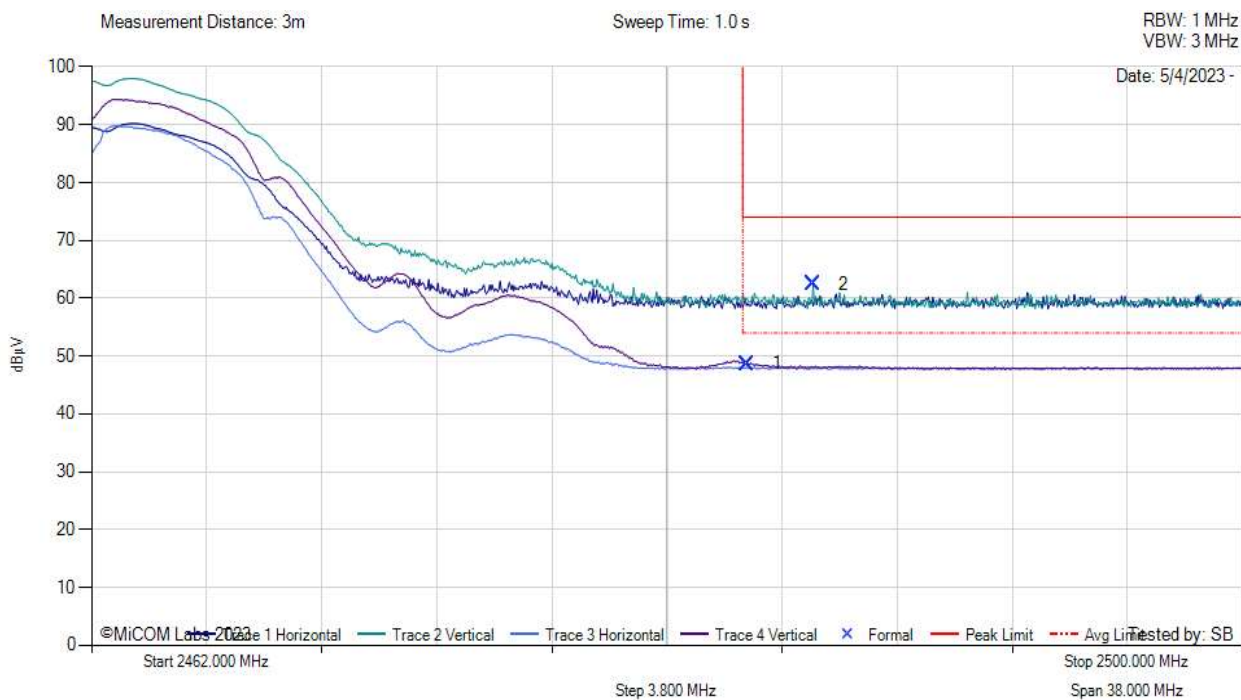

2462.00 - 2500.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.62	24.36	1.98	32.37	48.71	AVG	Vertical	149	90	54.0	-5.3	Pass
2	2485.83	38.02	1.98	32.37	62.37	MaxP	Vertical	149	90	74.0	-11.6	Pass

Test Notes: Max power, 5VDC 3A,

[back to matrix](#)


Equipment Configuration for BE 2483.5 MHZ

Antenna:	GW.48.A151	Variant:	802.11g
Antenna Gain (dBi):	3.42	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2483.5 MHz

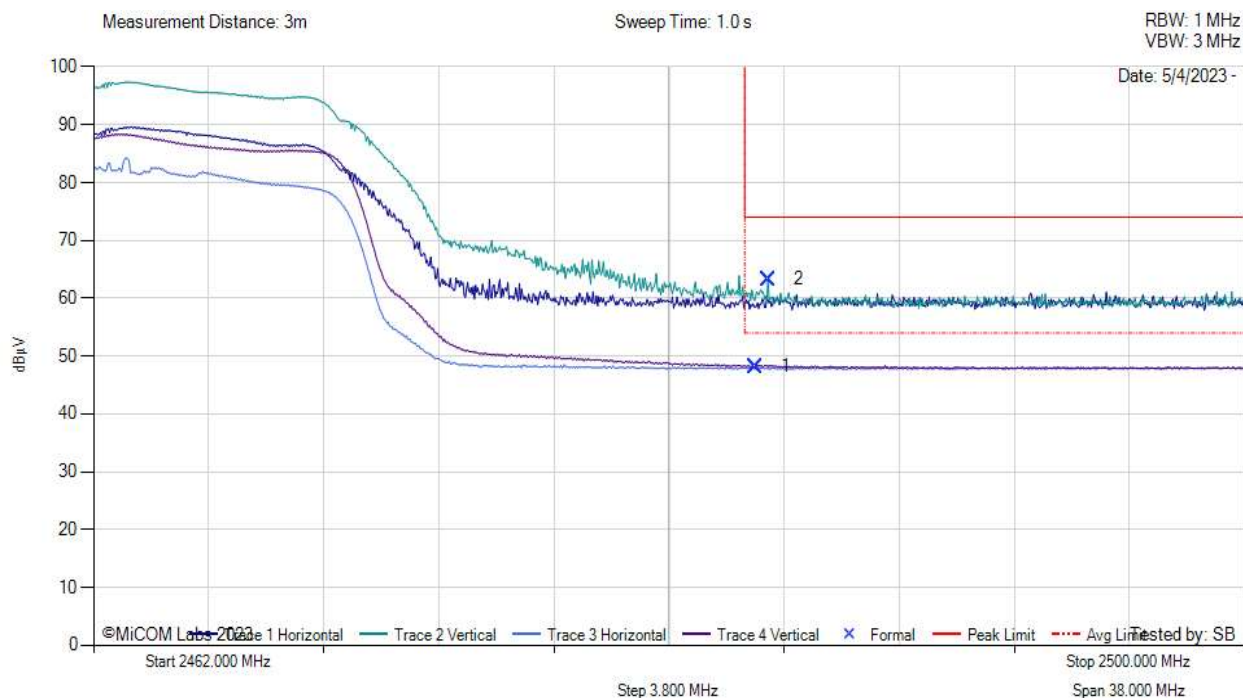

2462.00 - 2500.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.85	23.87	1.98	32.37	48.22	AVG	Vertical	99	89	54.0	-5.8	Pass
2	2484.27	38.91	1.98	32.37	63.26	MaxP	Vertical	149	179	74.0	-10.7	Pass

Test Notes: Max power, 5VDC 3A,

[back to matrix](#)


Equipment Configuration for BE 2483.5 MHZ

Antenna:	GW.48.A151	Variant:	802.11n HT20
Antenna Gain (dBi):	3.42	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2483.5 MHz

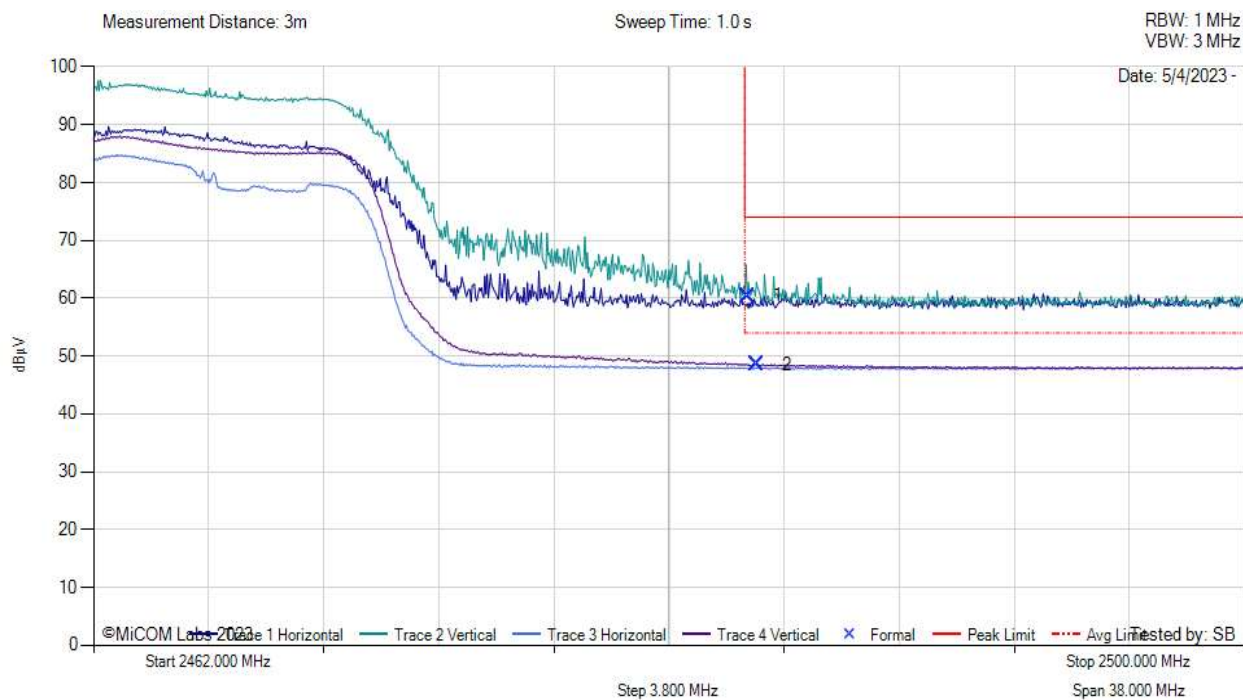

2462.00 - 2500.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.58	36.07	1.98	32.37	60.42	MaxP	Vertical	149	179	74.0	-13.6	Pass
2	2483.89	24.21	1.98	32.37	48.56	AVG	Vertical	149	0	54.0	-5.4	Pass

Test Notes: Max power, 5VDC 3A,

[back to matrix](#)

9.1.2.4. ANT-X100P001B24553 PCB

9.1.2.4.1. Lower Band-Edge

CCMP15/CCMP13		Band-Edge Freq	Limit 74.0dBμV/m	Limit 54.0dBμV/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBμV/m	dBμV/m	
802.11b	2412.00	2390.00	59.87	47.36	16
802.11g	2422.00	2390.00	67.42	48.97	9
802.11n HT-20	2412.00	2390.00	70.51	49.67	8

9.1.2.4.2. Upper Band-Edge

CCMP15/CCMP13		Band-Edge Freq	Limit 74.0dBμV/m	Limit 54.0dBμV/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dBμV/m	dBμV/m	
802.11b	2462.00	2483.50	61.02	48.40	16
802.11g	2452.00	2483.50	65.66	49.18	9
802.11n HT-20	2462.00	2483.50	69.46	49.81	8

NOTE: Power setting utilized above were extracted from the original reports identified in Section 5.2 'Scope of the Test Program'


Equipment Configuration for BE 2400 MHz

Antenna:	ANTX100P001B24553	Variant:	802.11b
Antenna Gain (dBi):	4.6	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2400 MHz

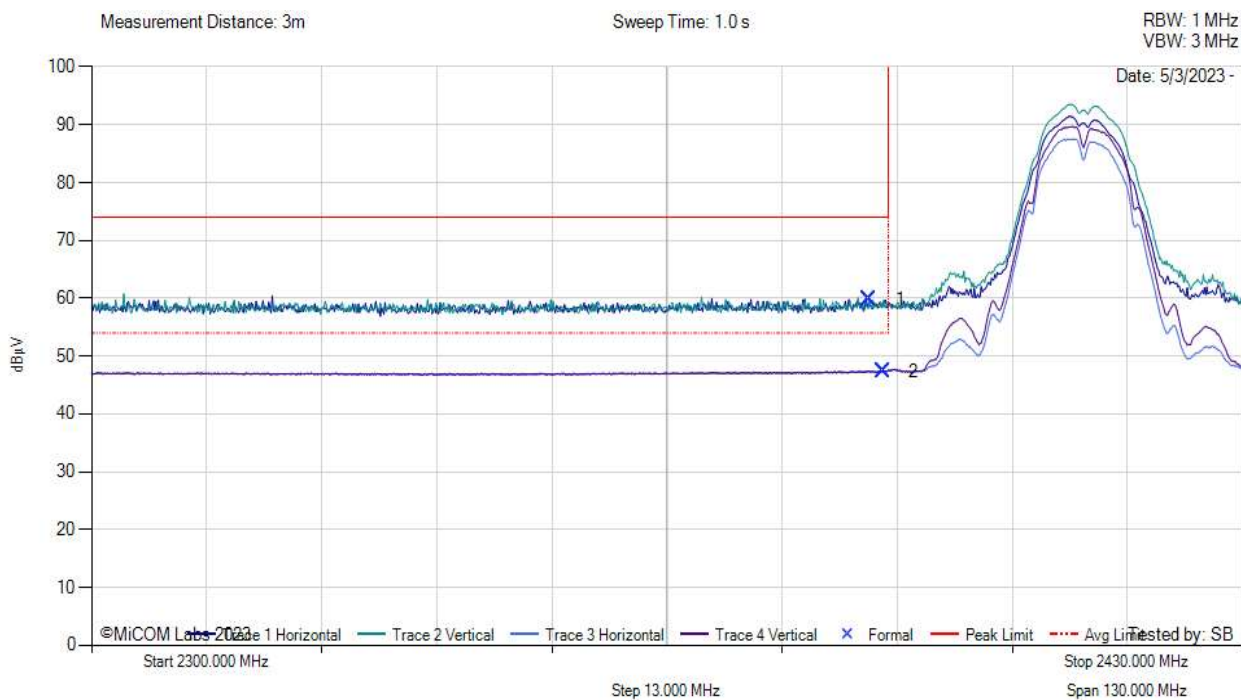

2300.00 - 2430.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2387.88	35.52	1.96	32.04	59.87	MaxP	Vertical	99	89	74.0	-14.1	Pass
2	2389.44	23.35	1.96	32.04	47.36	AVG	Vertical	99	89	54.0	-6.6	Pass

Test Notes: Max power, 5VDC 3A

[back to matrix](#)


Equipment Configuration for BE 2400 MHz

Antenna:	ANTX100P001B24553	Variant:	802.11g
Antenna Gain (dBi):	4.6	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2400 MHz

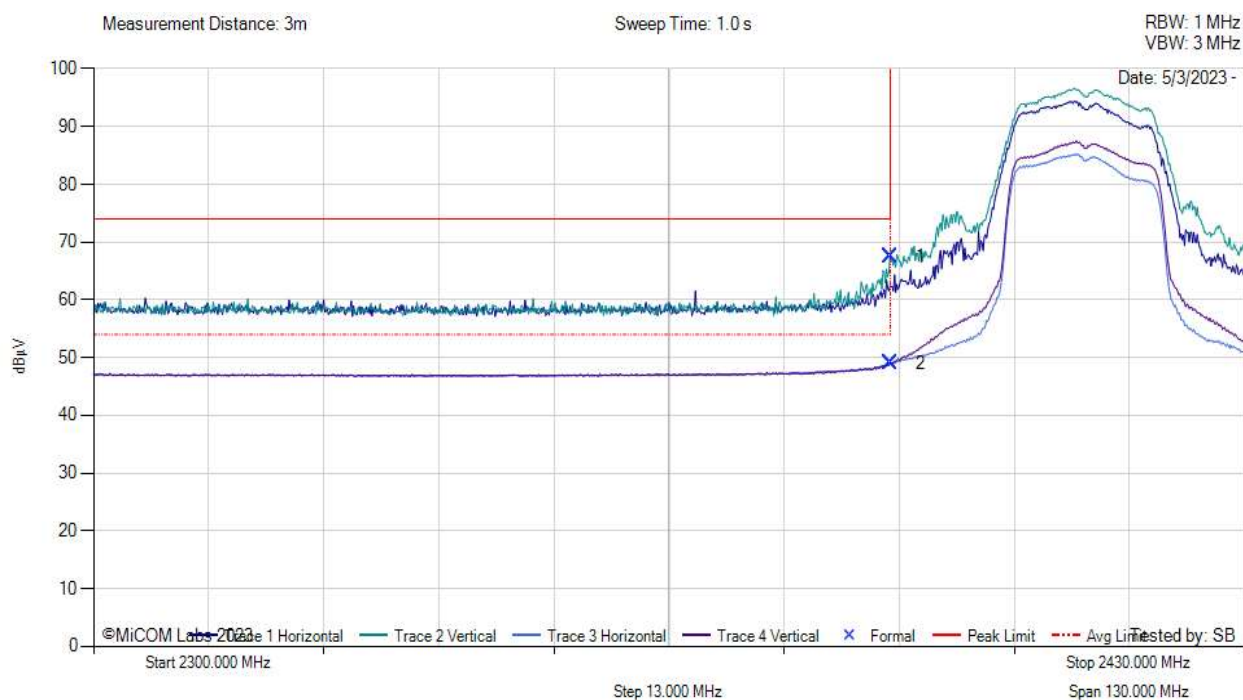

2300.00 - 2430.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2389.96	43.42	1.96	32.04	67.42	MaxP	Vertical	149	270	74.0	-6.6	Pass
2	2389.96	24.97	1.96	32.04	48.97	AVG	Vertical	99	89	54.0	-5.0	Pass

Test Notes: Max power, 5VDC 3A

[back to matrix](#)


Equipment Configuration for BE 2400 MHz

Antenna:	ANTX100P001B24553	Variant:	802.11n HT20
Antenna Gain (dBi):	4.6	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2400 MHz

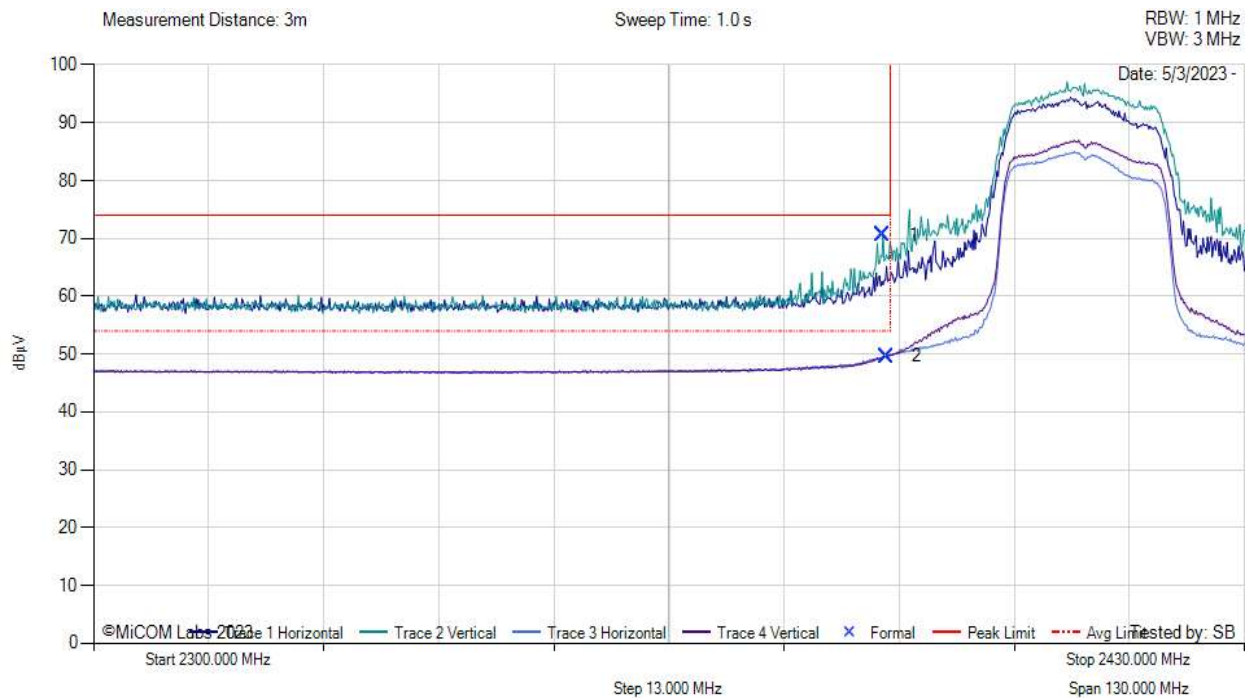

2300.00 - 2430.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2389.18	46.51	1.96	32.04	70.51	MaxP	Vertical	149	270	74.0	-3.5	Pass
2	2389.57	25.66	1.96	32.04	49.67	AVG	Vertical	99	89	54.0	-4.3	Pass

Test Notes: Max power, 5VDC 3A

[back to matrix](#)


Equipment Configuration for BE 2483.5 MHZ

Antenna:	ANTX100P001B24553	Variant:	802.11b
Antenna Gain (dBi):	4.6	Modulation:	CCK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2483.5 MHz

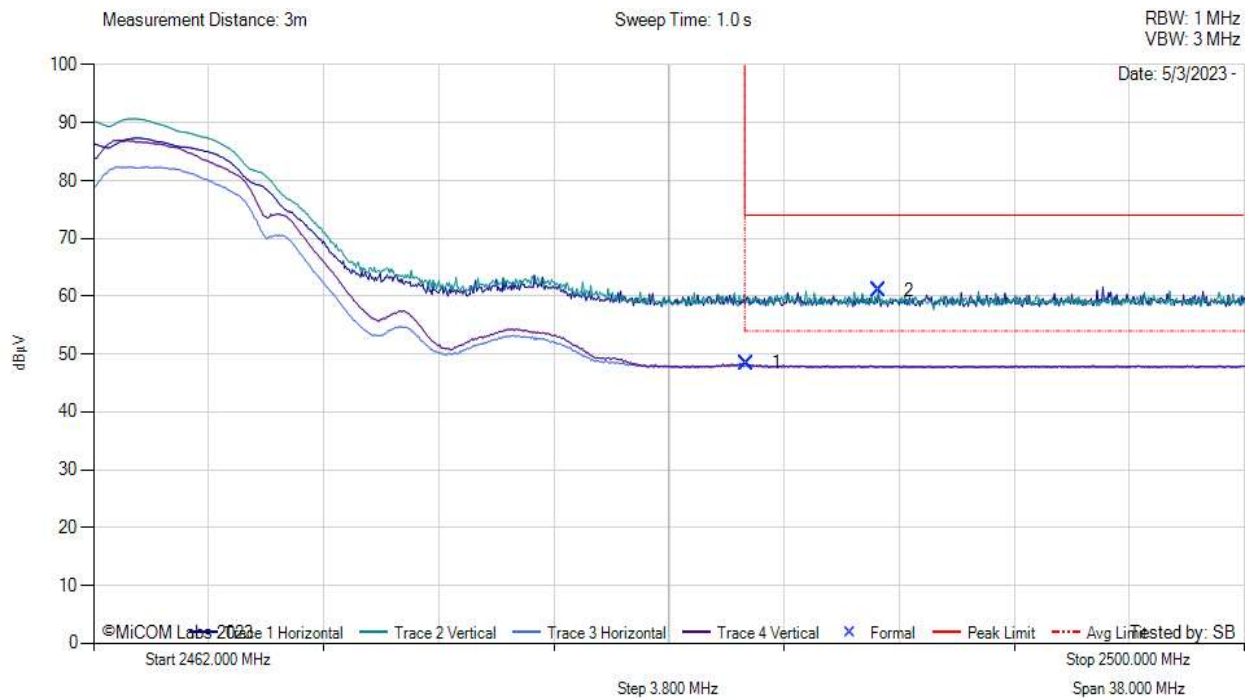

2462.00 - 2500.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.55	24.05	1.98	32.37	48.40	AVG	Vertical	99	89	54.0	-5.6	Pass
2	2487.92	36.66	1.98	32.38	61.02	MaxP	Vertical	150	179	74.0	-13.0	Pass

Test Notes: Max power, 5VDC 3A

[back to matrix](#)


Equipment Configuration for BE 2483.5 MHz

Antenna:	ANTX100P001B24553	Variant:	802.11g
Antenna Gain (dBi):	4.6	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2483.5 MHz

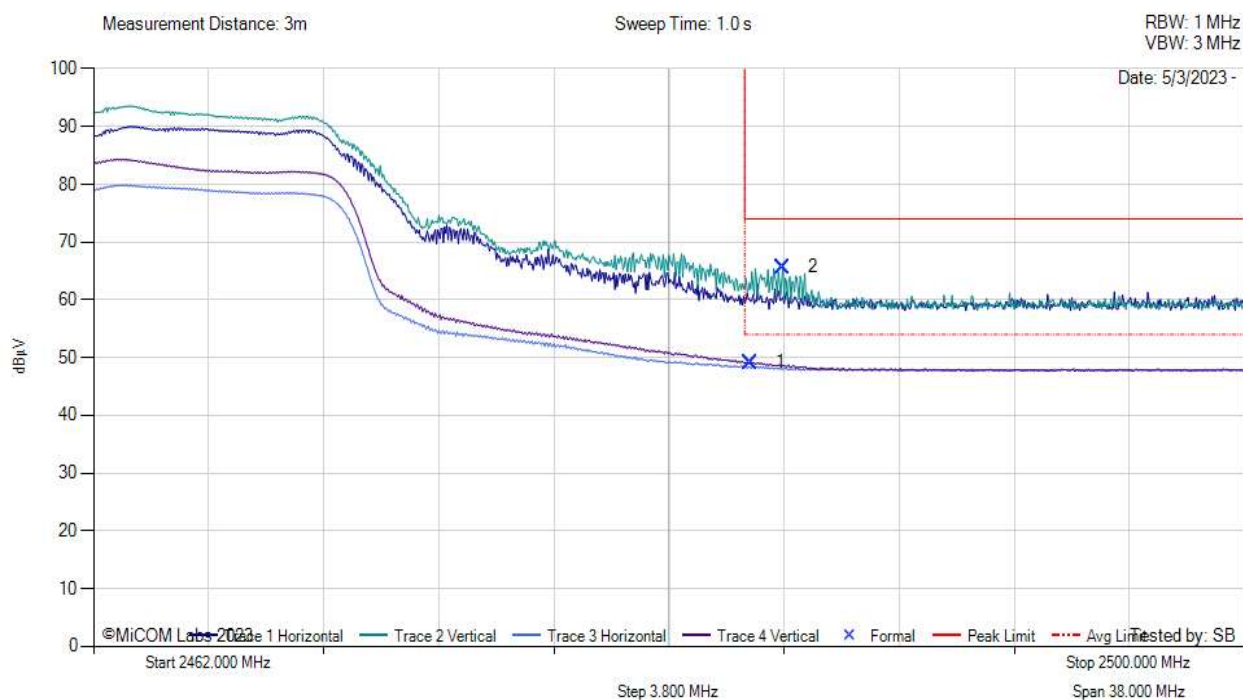

2462.00 - 2500.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.70	24.83	1.98	32.37	49.18	AVG	Vertical	99	89	54.0	-4.8	Pass
2	2484.76	41.31	1.98	32.37	65.66	MaxP	Vertical	149	270	74.0	-8.3	Pass

Test Notes: Max power, 5VDC 3A

[back to matrix](#)


Equipment Configuration for BE 2483.5 MHz

Antenna:	ANTX100P001B24553	Variant:	802.11n HT20
Antenna Gain (dBi):	4.6	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2412.0	Data Rate:	1
Power Setting:	16	Tested By:	SB

Test Measurement Results



BE 2483.5 MHz

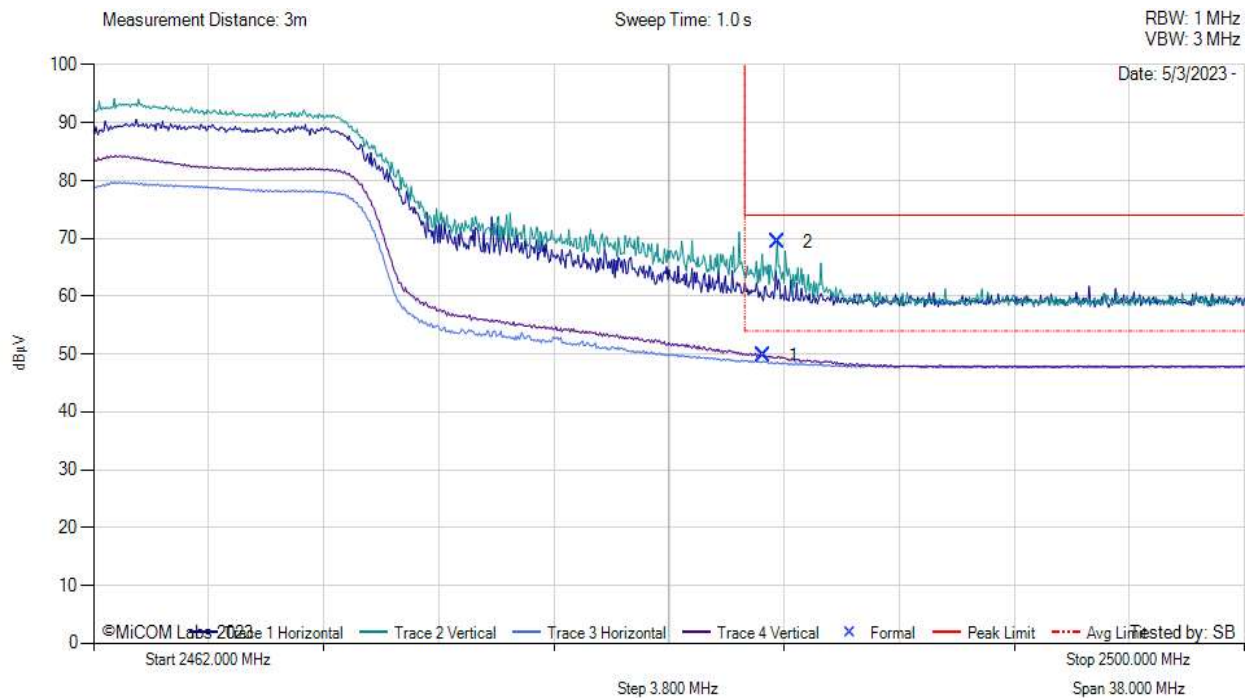

2462.00 - 2500.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2484.12	25.46	1.98	32.37	49.81	AVG	Vertical	99	89	54.0	-4.2	Pass
2	2484.57	45.11	1.98	32.37	69.46	MaxP	Vertical	149	270	74.0	-4.5	Pass

Test Notes: Max power, 5VDC 3A

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com