

# 1.6X0.8X0.8 (mm) WiFi/Bluetooth Ceramic Chip Antenna

## (YF1608-1) Engineering Specification

### 1. Product Number

YF 1608 F2 P 2G45 02  
1 2 3 4 5 6



### 2. Features

|                 |                   |
|-----------------|-------------------|
| (1)Product Type | Chip Antenna      |
| (2)Size Code    | 1.6x0.8x0.8mm     |
| (3)Type Code    | F2                |
| (4)Packing      | Plastic Packaging |
| (5)Frequency    | 2.45GHz           |

- \*Stable and reliable in performances
- \*Low temperature coefficient of frequency
- \*Low profile, compact size
- \*RoHS compliance
- \*SMT processes compatible



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 1.6x 0.8 x0.8(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (YF1608-1) Engineering Specification

DOCUMENT  
NO.

YF1608F2P2G4502

REV.  
B

### 3. Applications

- \*Bluetooth earphone systems
- \*Hand-held devices when WiFi /Bluetooth functions are needed, e.g., Smart phone.
- \*IEEE802.11 b/g/n
- \*ZigBee
- \*Wireless PCMCIA cards or USB dongle

### 4. Description

Yingfeng chip antenna series are specially designed for WiFi/Bluetooth applications. Based on yingfeng proprietary design and processes, this chip antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

### 5. Electrical Specifications (50 x 40 mm<sup>2</sup> ground plane)

5-1. Electrical Table

| Characteristics    |            | Specifications      | Unit |
|--------------------|------------|---------------------|------|
| Outline Dimensions |            | 1.6x0.8x0.8         | mm   |
| Working Frequency  |            | 2400~2500           | MHz  |
| VSWR               |            | 2 Max.              |      |
| Impedance          |            | 50                  | Ω    |
| Polarization       |            | Linear Polarization |      |
| Gain               | Peak       | 2.5 (typical)       | dBi  |
|                    | Efficiency | 75 (typical)        | %    |



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 1.6x 0.8 x0.8(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (YF1608-1) Engineering Specification


DOCUMENT  
NO.

YF1608F2P2G4502


REV.  
B

## 5-2. Return Loss & VSWR

### Return Loss (S<sub>11</sub>)

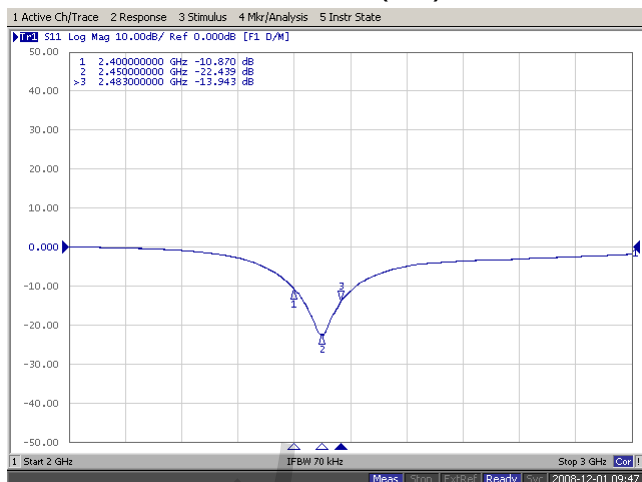

### VSWR(S<sub>11</sub>)

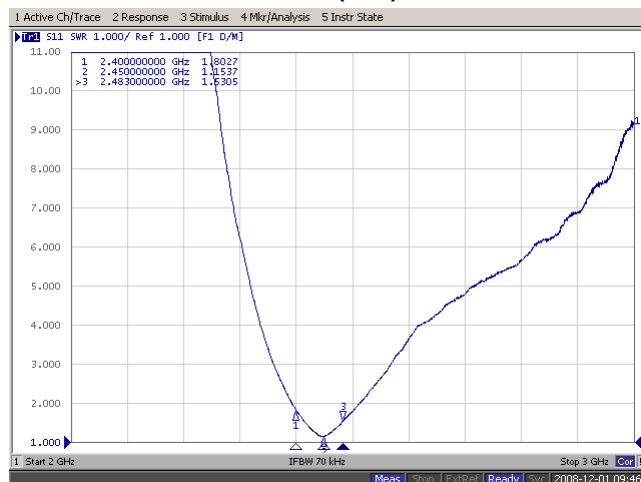


## 6. Antenna Dimensions & Test Board (unit: mm)

### a. Antenna Dimensions

#### Applications

1. Bluetooth
2. Wireless LAN
3. ISM band 2.4GHz wireless applications

#### Dimensions (Unit: mm)

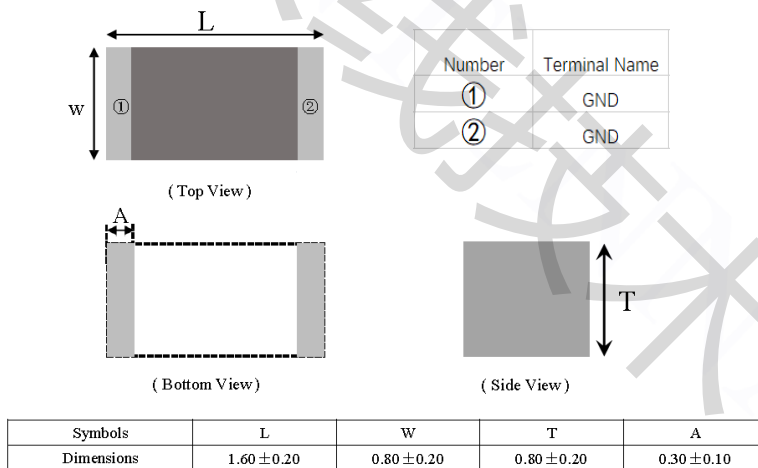

Unit: mm



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 1.6x 0.8 x0.8(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (YF1608-1) Engineering Specification





DOCUMENT  
NO.

YF1608F2P2G4502

REV.  
B

## 7. Radiation Pattern (50 x 40 mm<sup>2</sup> ground plane)

### 7-1. 3D Gain Pattern @ 2442 MHz

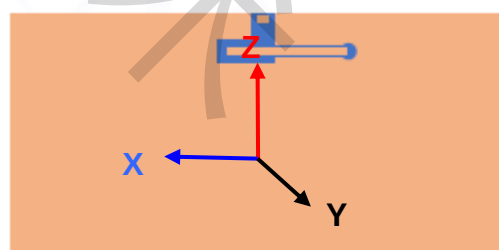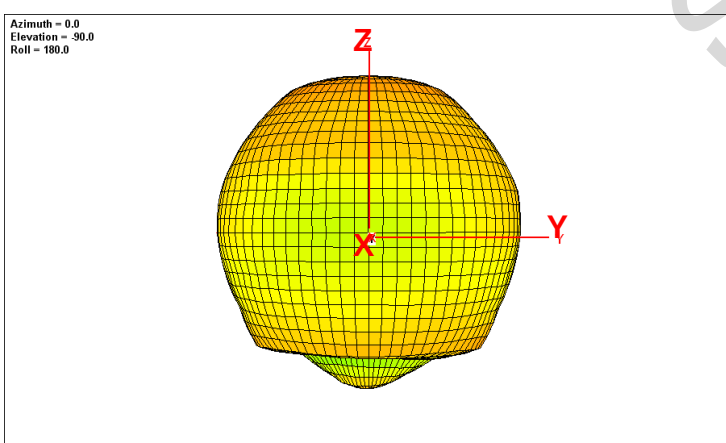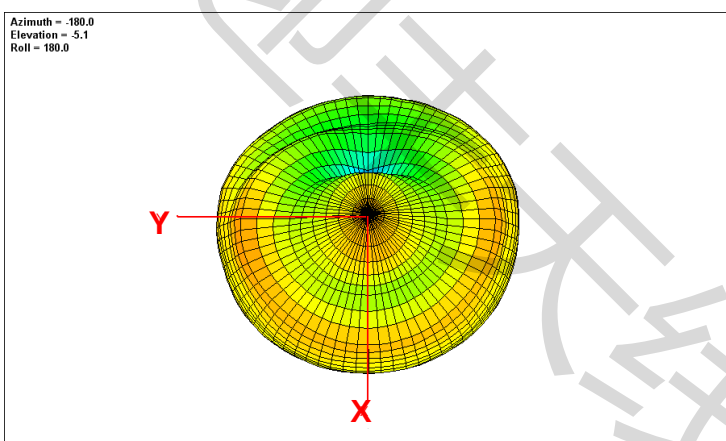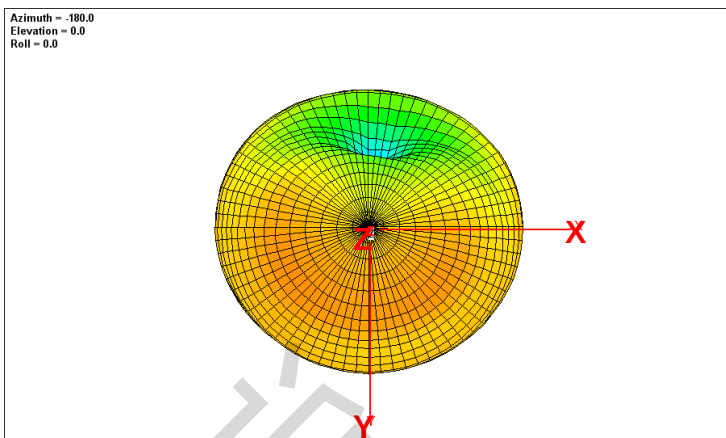

深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 1.6x 0.8 x0.8(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (YF1608-1) Engineering Specification

DOCUMENT  
NO.


YF1608F2P2G4502

REV.  
B

## 7-2. 3D Efficiency Table

| Frequency( MHz) | 2400 | 2410 | 2420 | 2430 | 2442 | 2450 | 2460 | 2470 | 2480 | 2490 | 2500 |
|-----------------|------|------|------|------|------|------|------|------|------|------|------|
| Efficiency (dB) | -1.4 | -1.0 | -0.9 | -0.7 | -0.7 | -0.8 | -0.9 | -1.1 | -1.2 | -1.3 | -1.4 |
| Efficiency (%)  | 72.8 | 73.7 | 74.3 | 74.4 | 75.5 | 75.0 | 74.0 | 73.6 | 73.1 | 72.6 | 71.5 |
| Gain (dBi)      | 2.1  | 2.2  | 2.3  | 2.4  | 2.5  | 2.5  | 2.4  | 1.8  | 1.7  | 1.6  | 1.4  |

## 7-3. 3D Efficiency vs. Frequency

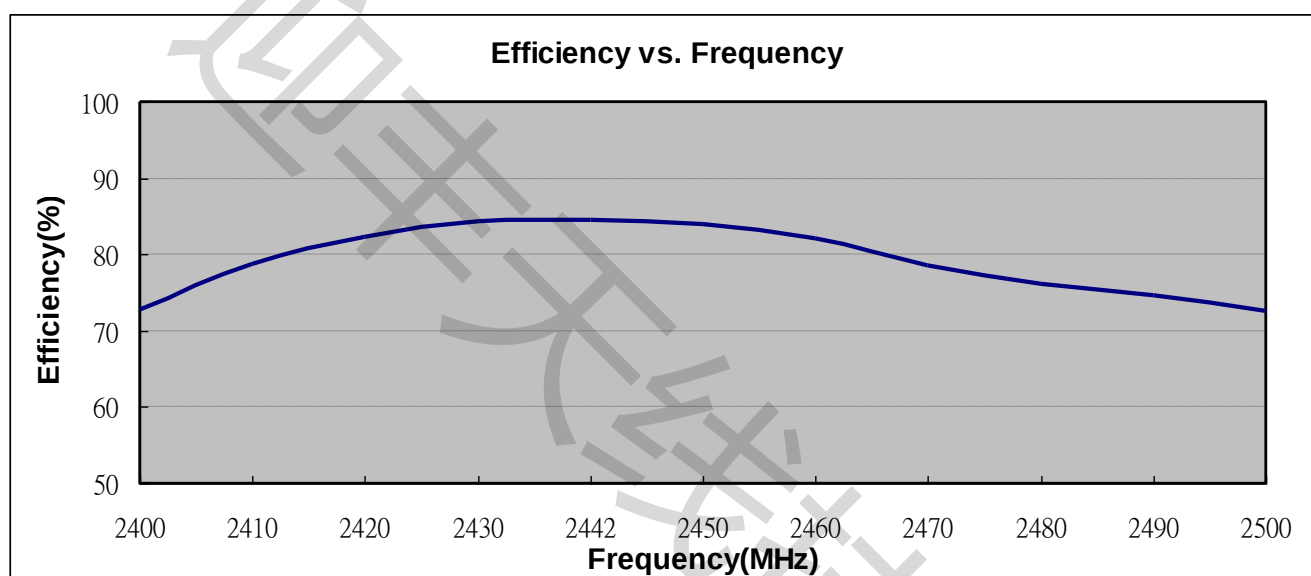

## 8. Layout Guide

### a. Solder Land Pattern:

Land pattern for soldering (gray marking areas) is as shown below. Depending on Customer's requirement, matching circuit as shown below is also recommended.



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG



**TITLE : 1.6x 0.8 x0.8(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (YF1608-1) Engineering Specification**

**DOCUMENT  
NO.**

**YF1608F2P2G4502**

**REV.  
B**

## Evaluation Board and Matching Circuits

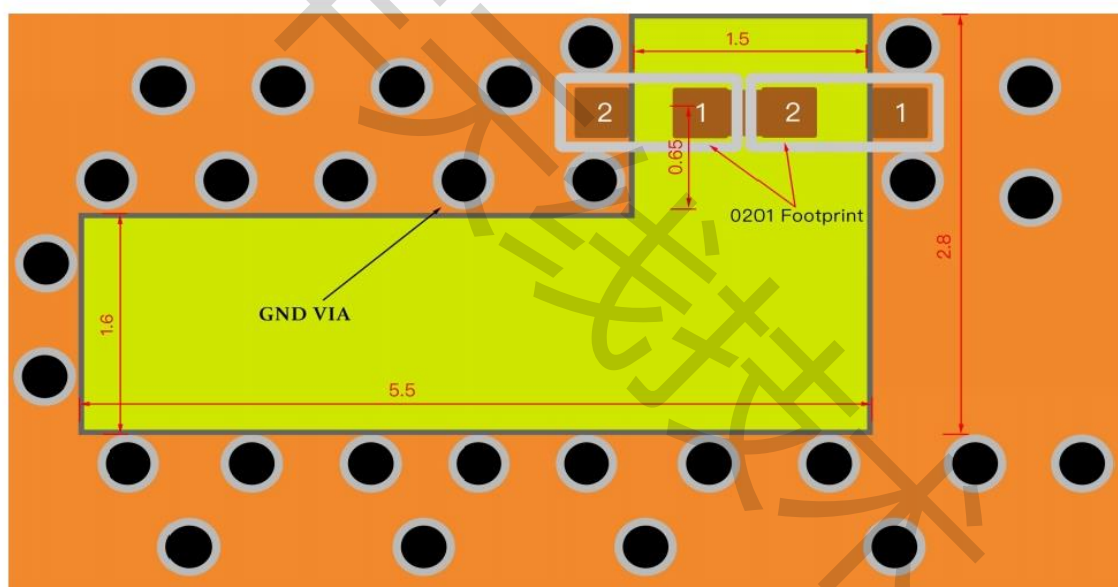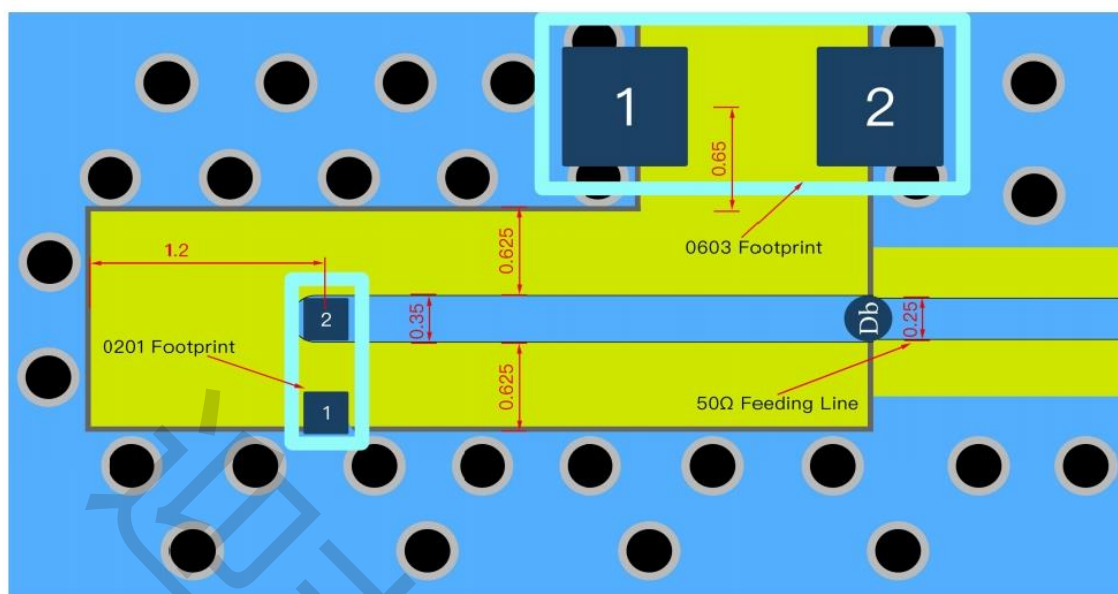

深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG


TITLE : 1.6x 0.8 x0.8(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (YF1608-1) Engineering Specification

DOCUMENT  
NO.

YF1608F2P2G4502

REV.  
B


PAGE 6 OF 9

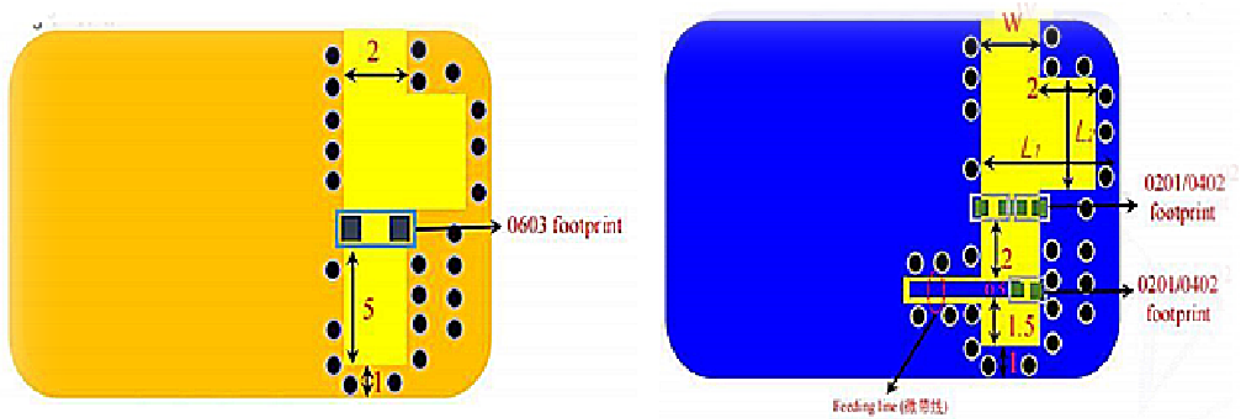

Bottom View

Unit : mm

### c. Fine tuning element vs. Center frequency

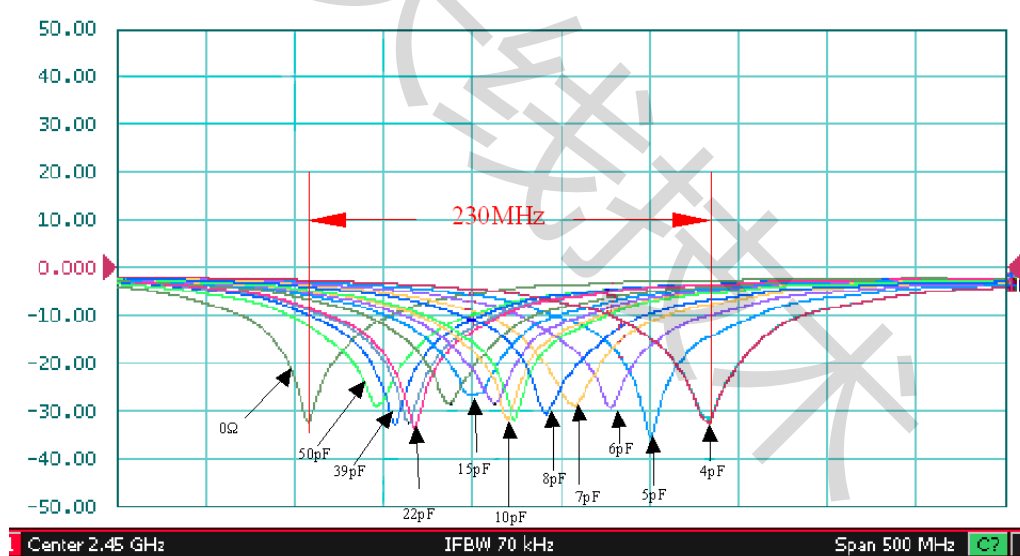

深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 1.6x 0.8 x0.8(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (YF1608-1) Engineering Specification


DOCUMENT  
NO.

YF1608F2P2G4502

REV.  
B

## 9. Soldering Conditions

### a. Typical Soldering Profile for Lead-free Process

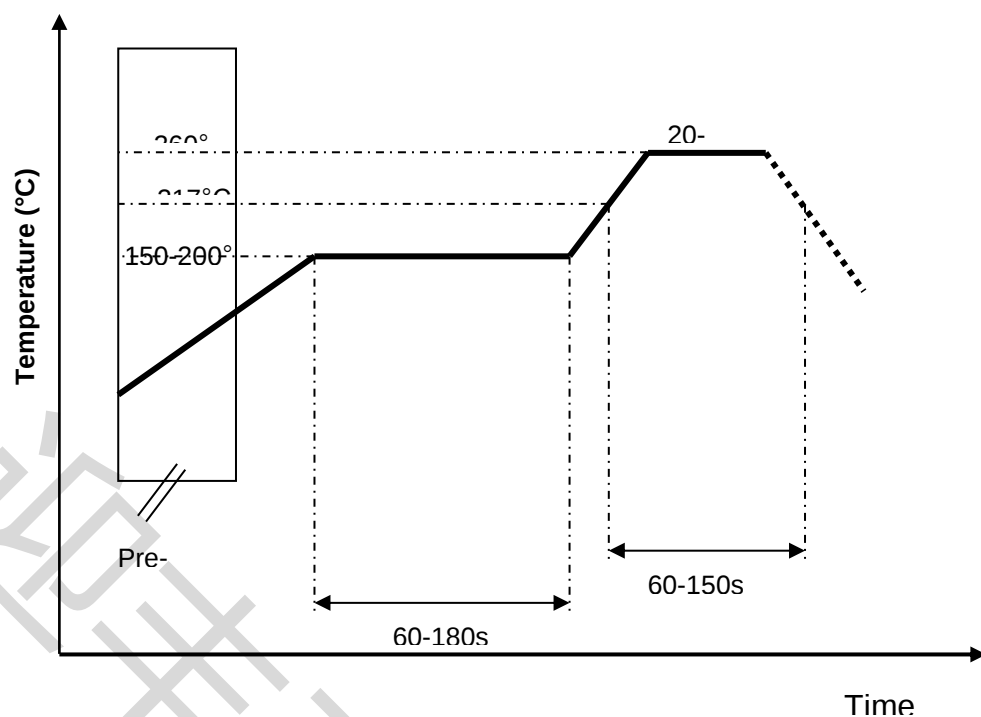

### Packing

- (1) Quantity/Reel: 4000 pcs/Reel
- (2) Plastic tape:



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG


TITLE : 1.6x 0.8 x0.8(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (YF1608-1) Engineering Specification

DOCUMENT  
NO.

YF1608F2P2G4502

REV.  
B

## Dimensions of paper taping

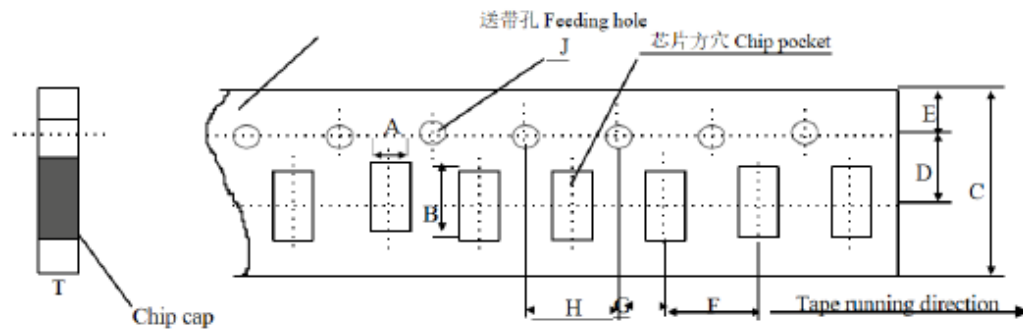


Unit: mm

| 代号 Code<br>纸带规格<br>papersize | A             | B             | C             | D*            | E             | F             | G*            | H             | J             | T           |
|------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|-------------|
| 尺寸                           | 1.10<br>±0.10 | 1.90<br>±0.10 | 8.00<br>±0.10 | 3.50<br>±0.05 | 1.75<br>±0.10 | 4.00<br>±0.10 | 2.00<br>±0.10 | 4.00<br>±0.10 | 1.50<br>±0.10 | 1.10<br>Max |

Reel (4000 pcs/Reel)

### EMBOSED TAPING

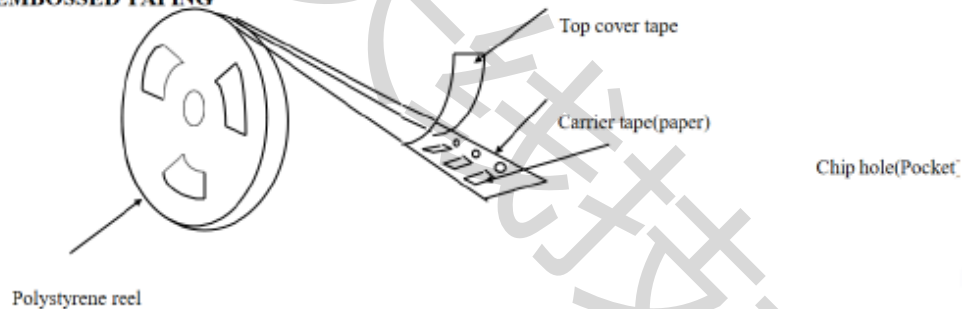

## Storage Period

The guaranteed period for solderability is 6 months (Under deliver package condition).  
Temperature: 5~40°C /Relative Humidity: 20~70%



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 1.6x 0.8 x0.8(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (YF1608-1) Engineering Specification

DOCUMENT  
NO.

YF1608F2P2G4502

REV.  
B