

TEST REPORT

Reference No...... : WTH24X04096557W002
FCC ID : 2A7HY-DGC3
Applicant : Dragonglass Technology (SHENZHEN) Co., Ltd.
Address : Floor 4, No. 128, Potou Du West Road, Longxi community, Longgang street,
Longgang District, Shenzhen, Guangdong, China
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Wireless Network Card
Model No...... : DGC3
Standards : FCC Part 15.247
Date of Receipt sample : 2024-04-26
Date of Test..... : 2024-04-26 to 2024-05-17
Date of Issue : 2024-05-17
Test Report Form No. : WTX_Part 15_247W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Mike Shi

Approved by:



Jason Su

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE	7
1.6 MEASUREMENT UNCERTAINTY	8
1.7 TEST EQUIPMENT LIST AND DETAILS	9
2. SUMMARY OF TEST RESULTS.....	12
3. ANTENNA REQUIREMENT.....	13
3.1 STANDARD APPLICABLE	13
3.2 EVALUATION INFORMATION	13
4. POWER SPECTRAL DENSITY.....	14
4.1 STANDARD APPLICABLE	14
4.2 TEST SETUP BLOCK DIAGRAM	14
4.3 TEST PROCEDURE.....	14
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	14
5. DTS BANDWIDTH	15
5.1 STANDARD APPLICABLE	15
5.2 TEST SETUP BLOCK DIAGRAM	15
5.3 TEST PROCEDURE	15
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	15
6. RF OUTPUT POWER.....	16
6.1 STANDARD APPLICABLE	16
6.2 TEST SETUP BLOCK DIAGRAM	16
6.3 TEST PROCEDURE	16
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	16
7. FIELD STRENGTH OF SPURIOUS EMISSIONS.....	17
7.1 STANDARD APPLICABLE	17
7.2 TEST PROCEDURE	17
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	19
8. OUT OF BAND EMISSIONS.....	24
8.1 STANDARD APPLICABLE	24
8.2 TEST PROCEDURE	24
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	25
9. CONDUCTED EMISSIONS	38
9.1 TEST PROCEDURE	38
9.2 BASIC TEST SETUP BLOCK DIAGRAM	38
9.3 TEST RECEIVER SETUP	38
9.4 SUMMARY OF TEST RESULTS/PLOTS.....	38
APPENDIX SUMMARY	39
APPENDIX A: DTS BANDWIDTH.....	40
APPENDIX B: MAXIMUM CONDUCTED OUTPUT POWER.....	53
APPENDIX C: MAXIMUM POWER SPECTRAL DENSITY	55
APPENDIX D: CONDUCTED OUT OF BAND EMISSIONS	69
D1.REFERENCE LEVEL MEASUREMENT	69
D2.BAND EDGE MEASUREMENTS.....	83
D3. OUT OF BAND EMISSIONS.....	92

APPENDIX PHOTOGRAPHS.....118

Report version

Version No.	Date of issue	Description
Rev.00	2024-05-17	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Wireless Network Card
Trade Name:	Dragonglass
Model No.:	DGC3
Adding Model(s):	DGC3P
Rated Voltage:	DC5V
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model DGC3, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n/ax(HT/HE20) 2422-2452MHz for 802.11n/ax(HT/HE40)
RF Output Power:	Antenna 1:17.91dBm (Conducted) Antenna 2:17.60dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Quantity of Channels:	11 for 802.11b/g/n/ax(HT/HE20); 7 for 802.11n/ax(HT/HE40)
Channel Separation:	5MHz
Type of Antenna:	External Antenna
Antenna Gain:	1.77dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11ax-HE20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM5	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz
TM6	802.11ax-HE40	Low:2422MHz, Middle:2437MHz,High:2452MHz
Note: The 2.4GHz WIFI has two antennas and support Multiple Outputs for 802.11n/ac mode for this report; Antenna 1 Gain is 1.77dBi; Antenna 2 Gain is 1.77dBi; For this function is belong to Correlated Categorization equipment According to KDB 662911, for same directional gain. Directional gain = GANT + 10 log(NANT) dBi =1.77+10log(2)dBi=4.78dBi		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Computer	Lenovo	L13 Yoga	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2024-03-19	2025-03-18
WTXE1088A 1001-2	Spectrum Analyzer	Agilent	N9010B	MY590704 94	2024-02-24	2025-02-23
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2024-02-24	2025-02-23
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2024-02-27	2025-02-26
WTXE1051A 1002	Power Sensor	Agilent	U2021XA	MY542500 21	2024-02-24	2025-02-23
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16

WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2024-02-24	2025-02-23
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
☒ Chamber C: Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
☒ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
☐ Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2023-12-12	2024-12-11
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
☐ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	N/A
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has two External antennas, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

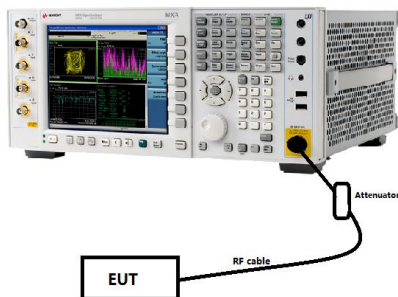

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span >1.5 times the DTS bandwidth.
- Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat

4.4 Summary of Test Results/Plots


Please refer to Appendix C

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

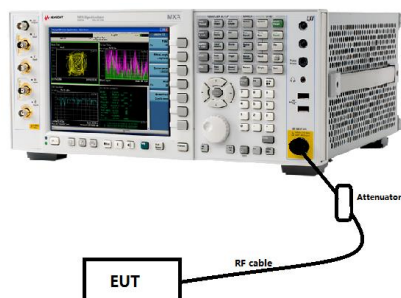

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix A

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

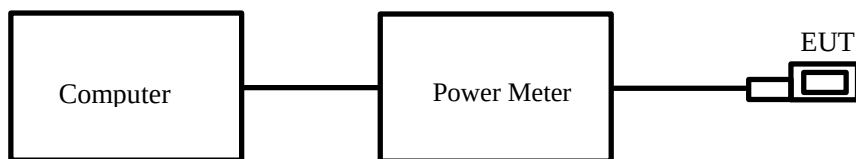

6.3 Test Procedure

The EUT was directly connected to the Power meter

6.4 Summary of Test Results/Plots

Please refer to Appendix B

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

7.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

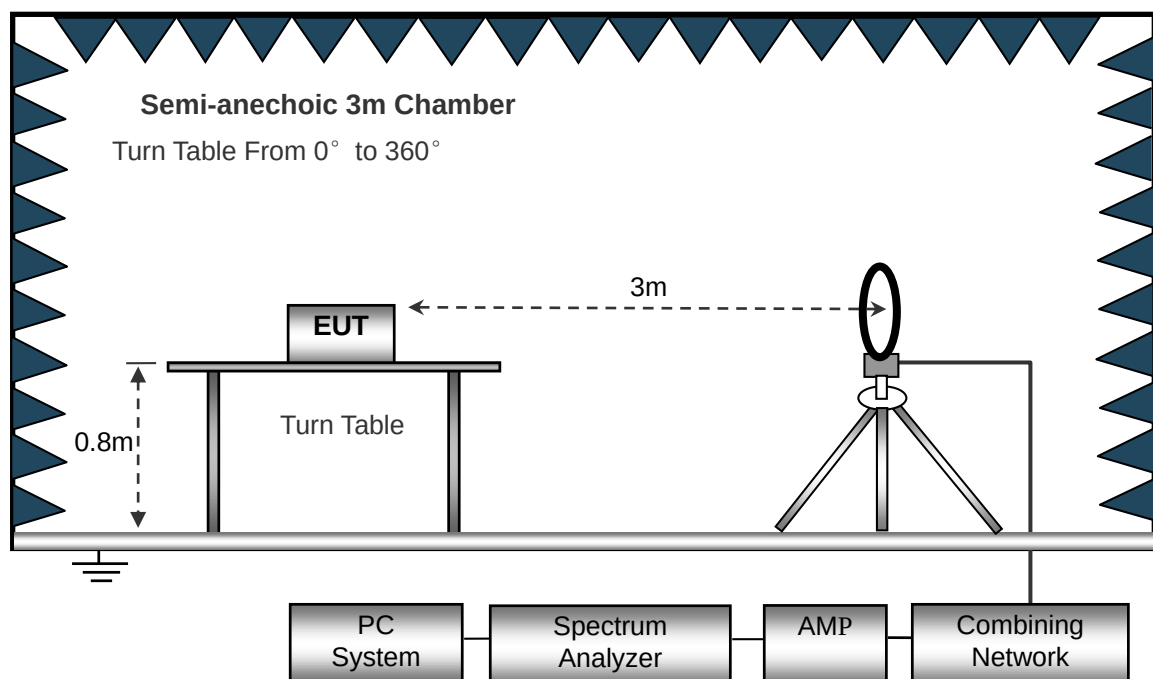

The test setup for emission measurement from 30MHz to 1GHz.

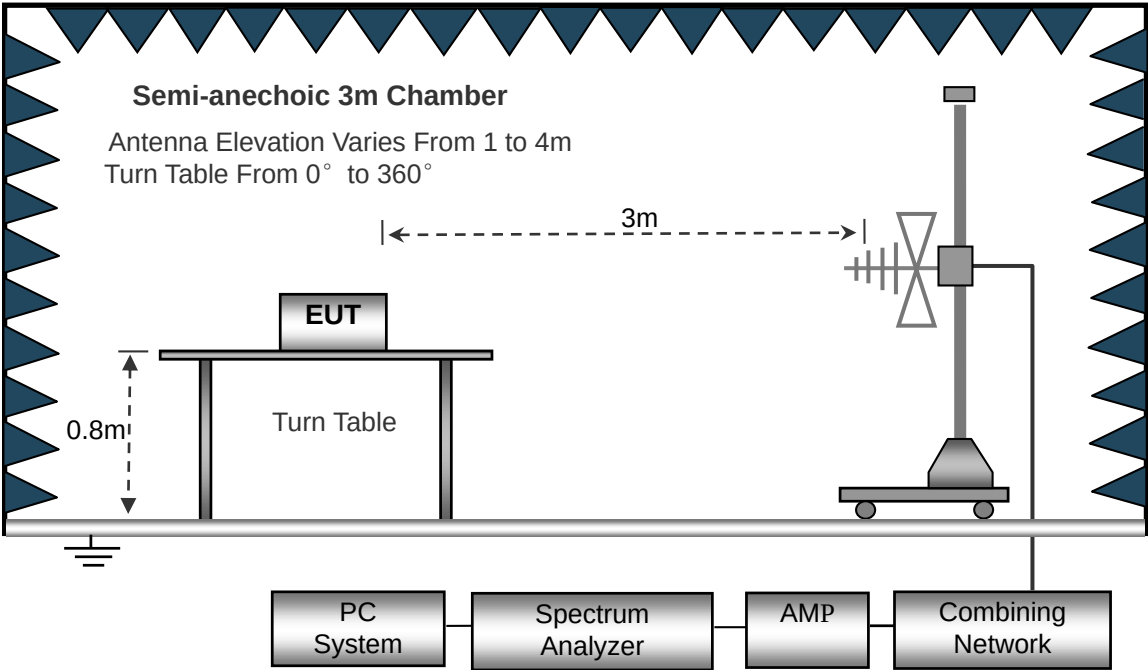

The test setup for emission measurement above 1GHz.

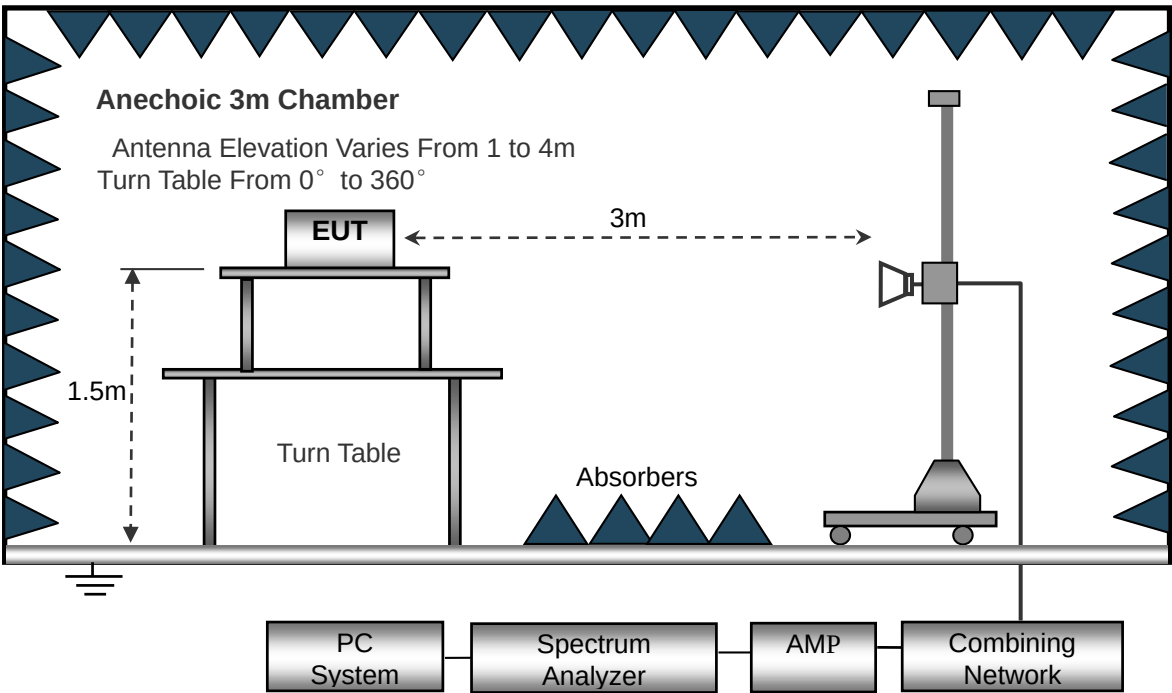

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

*Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported.
All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.*


- Spurious Emissions Below 1GHz
- Worst case Antenna 1

802.11b_11Mbps (Worst case)			
Test Channel	Low(Worst case)	Polarity:	Horizontal

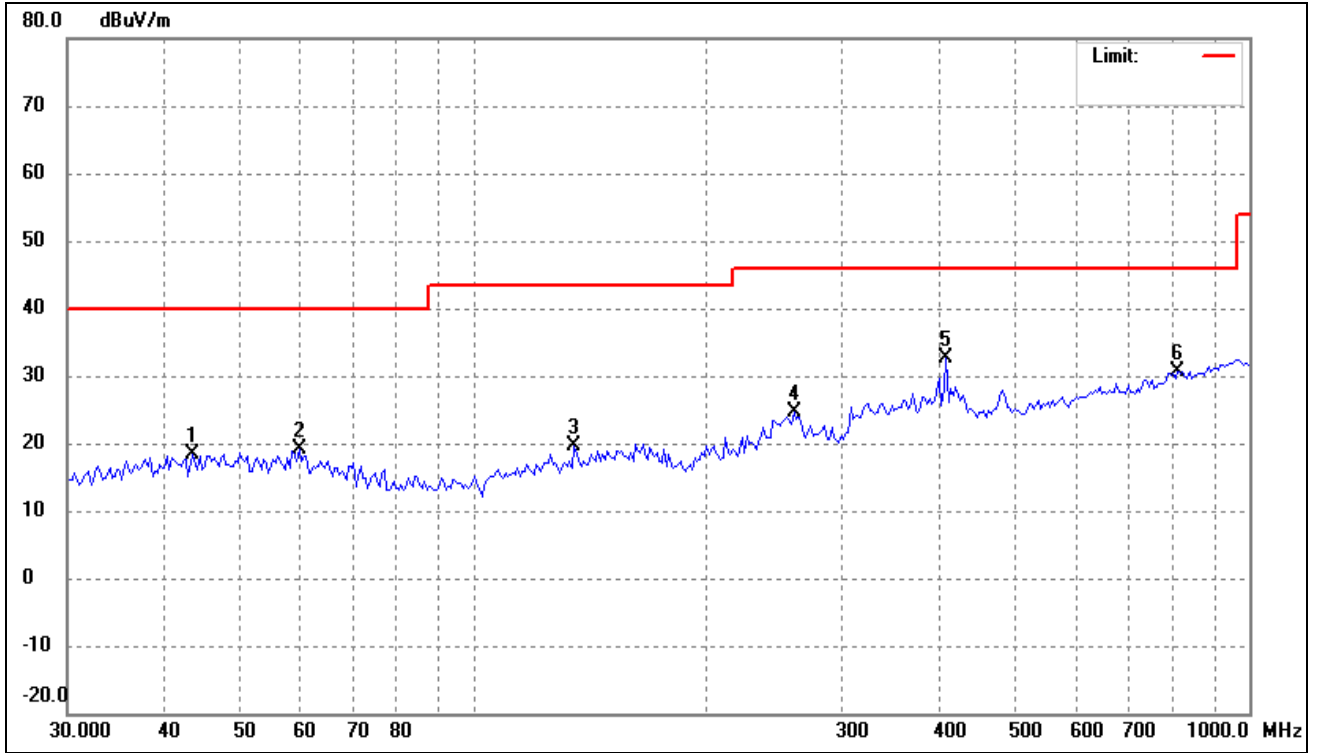

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	43.5381	26.80	-8.47	18.33	40.00	-21.67	-	-	peak
2	59.7315	27.96	-8.92	19.04	40.00	-20.96	-	-	peak
3	134.9645	29.34	-9.64	19.70	43.50	-23.80	-	-	peak
4	259.4434	34.37	-9.79	24.58	46.00	-21.42	-	-	peak
5	406.7820	38.41	-5.78	32.63	46.00	-13.37	-	-	peak
6	809.9238	30.19	0.39	30.58	46.00	-15.42	-	-	peak

802.11b_11Mbps(Worst case)			
Test Channel	Low(Worst case)	Polarity:	Vertical

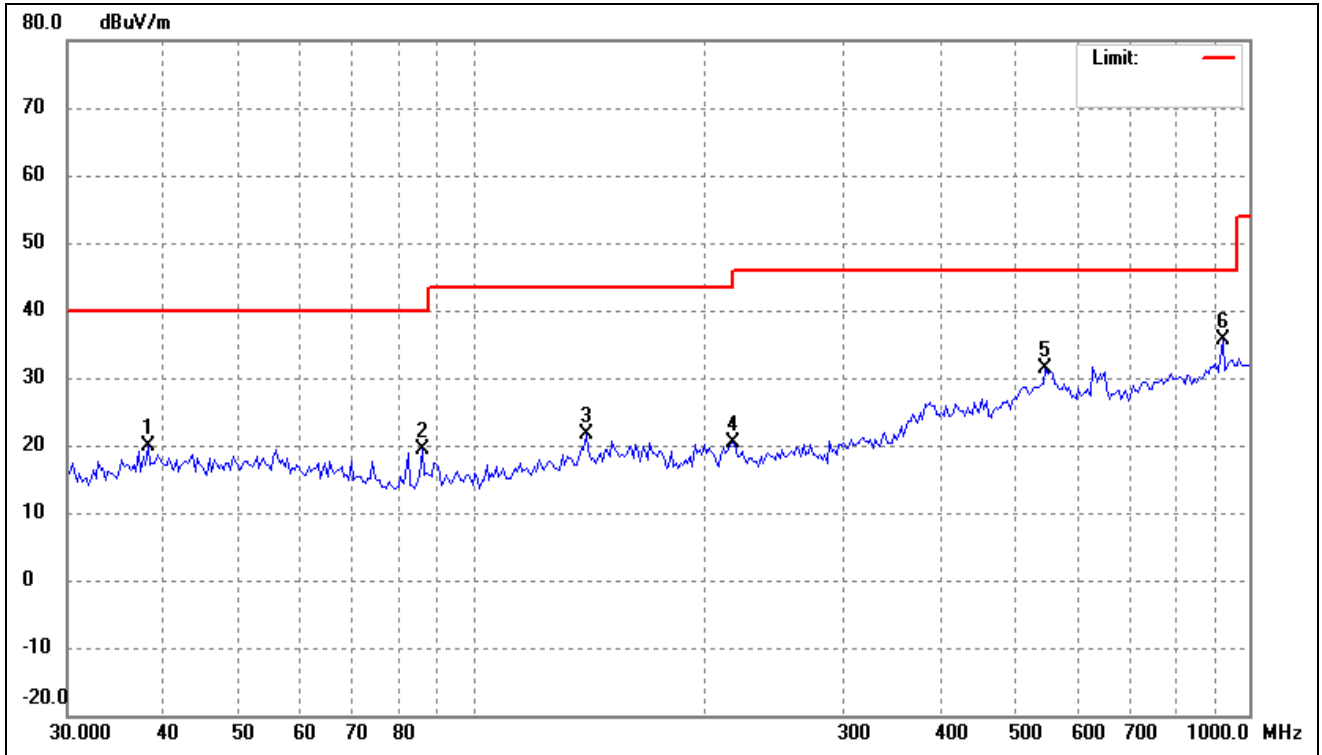

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.0965	28.86	-8.89	19.97	40.00	-20.03	-	-	peak
2	86.0796	32.31	-13.04	19.27	40.00	-20.73	-	-	peak
3	139.7909	31.08	-9.44	21.64	43.50	-21.86	-	-	peak
4	216.1197	32.57	-12.12	20.45	46.00	-25.55	-	-	peak
5	546.4368	34.35	-2.94	31.41	46.00	-14.59	-	-	peak
6	925.6132	34.01	1.74	35.75	46.00	-10.25	-	-	peak

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps(worst case)
- Antenna 1

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	49.38	-3.86	45.52	74	-28.48	H	PK
4824.000	48.83	-3.86	44.97	54	-9.03	H	AV
7236.000	48.27	1.10	49.37	74	-24.63	H	PK
7236.000	33.39	1.10	34.49	54	-19.51	H	AV
4824.000	47.84	-3.86	43.98	74	-30.02	V	PK
4824.000	46.08	-3.86	42.22	54	-11.78	V	AV
7236.000	49.66	1.10	50.76	74	-23.24	V	PK
7236.000	42.33	1.10	43.43	54	-10.57	V	AV
Middle Channel-2437MHz							
4874.000	48.22	-3.86	44.36	74	-29.64	H	PK
4874.000	48.51	-3.86	44.65	54	-9.35	H	AV
7311.000	47.81	1.10	48.91	74	-25.09	H	PK
7311.000	33.90	1.10	35.00	54	-19.00	H	AV
4874.000	46.95	-3.86	43.09	74	-30.91	V	PK
4874.000	42.95	-3.86	39.09	54	-14.91	V	AV
7311.000	52.11	1.10	53.21	74	-20.79	V	PK
7311.000	40.01	1.10	41.11	54	-12.89	V	AV
High Channel-2462MHz							
4924.000	48.63	-3.63	45.00	74	-29.00	H	PK
4924.000	47.66	-3.63	44.03	54	-9.97	H	AV
7386.000	45.86	1.62	47.48	74	-26.52	H	PK
7386.000	36.28	1.62	37.90	54	-16.10	H	AV
4924.000	47.23	-3.63	43.60	74	-30.40	V	PK
4924.000	45.73	-3.63	42.10	54	-11.90	V	AV
7386.000	53.30	1.62	54.92	74	-19.08	V	PK
7386.000	40.07	1.62	41.69	54	-12.31	V	AV

➤ Antenna 2

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	48.03	-3.86	44.17	74	-29.83	H	PK
4824.000	46.88	-3.86	43.02	54	-10.98	H	AV
7236.000	45.13	1.10	46.23	74	-27.77	H	PK
7236.000	32.26	1.10	33.36	54	-20.64	H	AV
4824.000	46.69	-3.86	42.83	74	-31.17	V	PK
4824.000	45.93	-3.86	42.07	54	-11.93	V	AV
7236.000	49.87	1.10	50.97	74	-23.03	V	PK
7236.000	41.06	1.10	42.16	54	-11.84	V	AV
Middle Channel-2437MHz							
4874.000	48.37	-3.86	44.51	74	-29.49	H	PK
4874.000	46.65	-3.86	42.79	54	-11.21	H	AV
7311.000	46.23	1.10	47.33	74	-26.67	H	PK
7311.000	32.82	1.10	33.92	54	-20.08	H	AV
4874.000	47.78	-3.86	43.92	74	-30.08	V	PK
4874.000	44.59	-3.86	40.73	54	-13.27	V	AV
7311.000	49.07	1.10	50.17	74	-23.83	V	PK
7311.000	41.60	1.10	42.70	54	-11.30	V	AV
High Channel-2462MHz							
4924.000	47.74	-3.63	44.11	74	-29.89	H	PK
4924.000	47.62	-3.63	43.99	54	-10.01	H	AV
7386.000	48.20	1.62	49.82	74	-24.18	H	PK
7386.000	32.15	1.62	33.77	54	-20.23	H	AV
4924.000	47.59	-3.63	43.96	74	-30.04	V	PK
4924.000	45.50	-3.63	41.87	54	-12.13	V	AV
7386.000	49.13	1.62	50.75	74	-23.25	V	PK
7386.000	41.90	1.62	43.52	54	-10.48	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission

must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots


- Radiated test
- Antenna 1(worst case)

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)

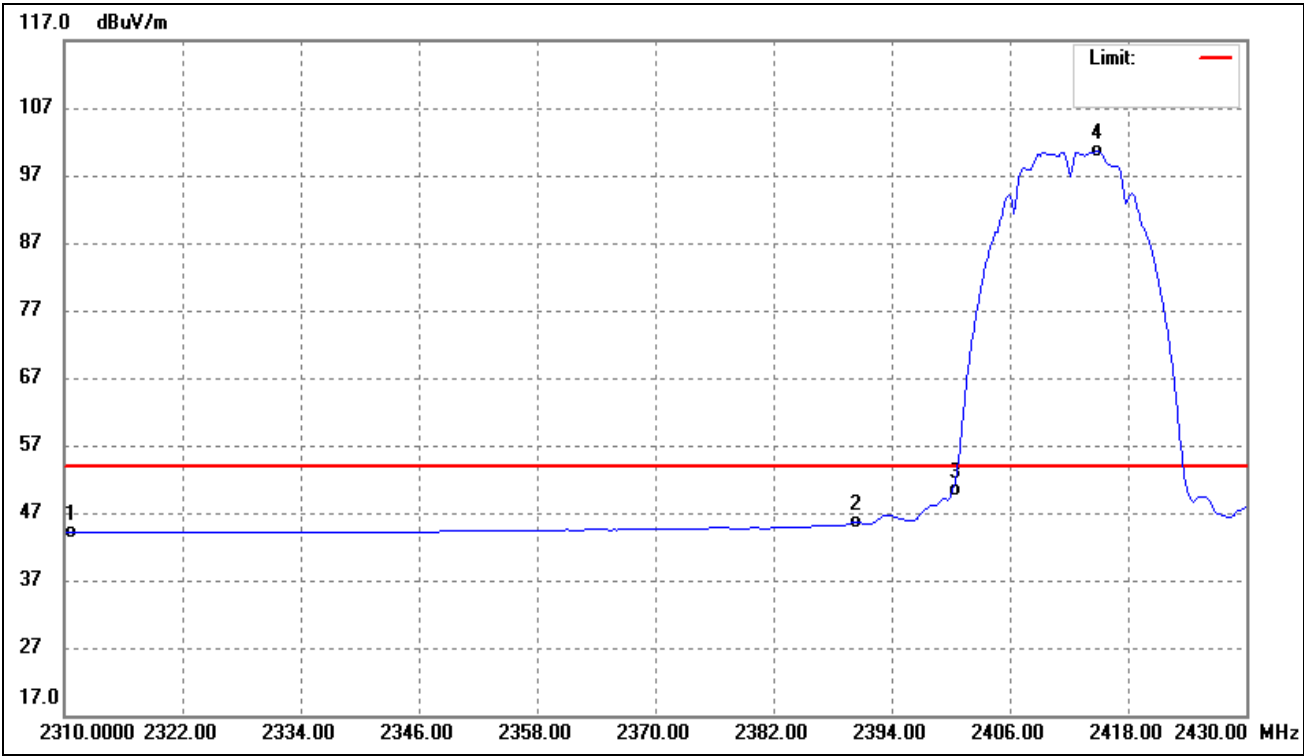


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.09	0.98	44.07	54.00	-9.93	Average Detector
	2310.000	56.30	0.98	57.28	74.00	-16.72	Peak Detector
2	2390.000	44.39	1.13	45.52	54.00	-8.48	Average Detector
	2390.000	57.76	1.13	58.89	74.00	-15.11	Peak Detector
3	2400.000	49.11	1.15	50.26	Delta=50.42dBc		Average Detector
4	2414.850	99.50	1.18	100.68			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)

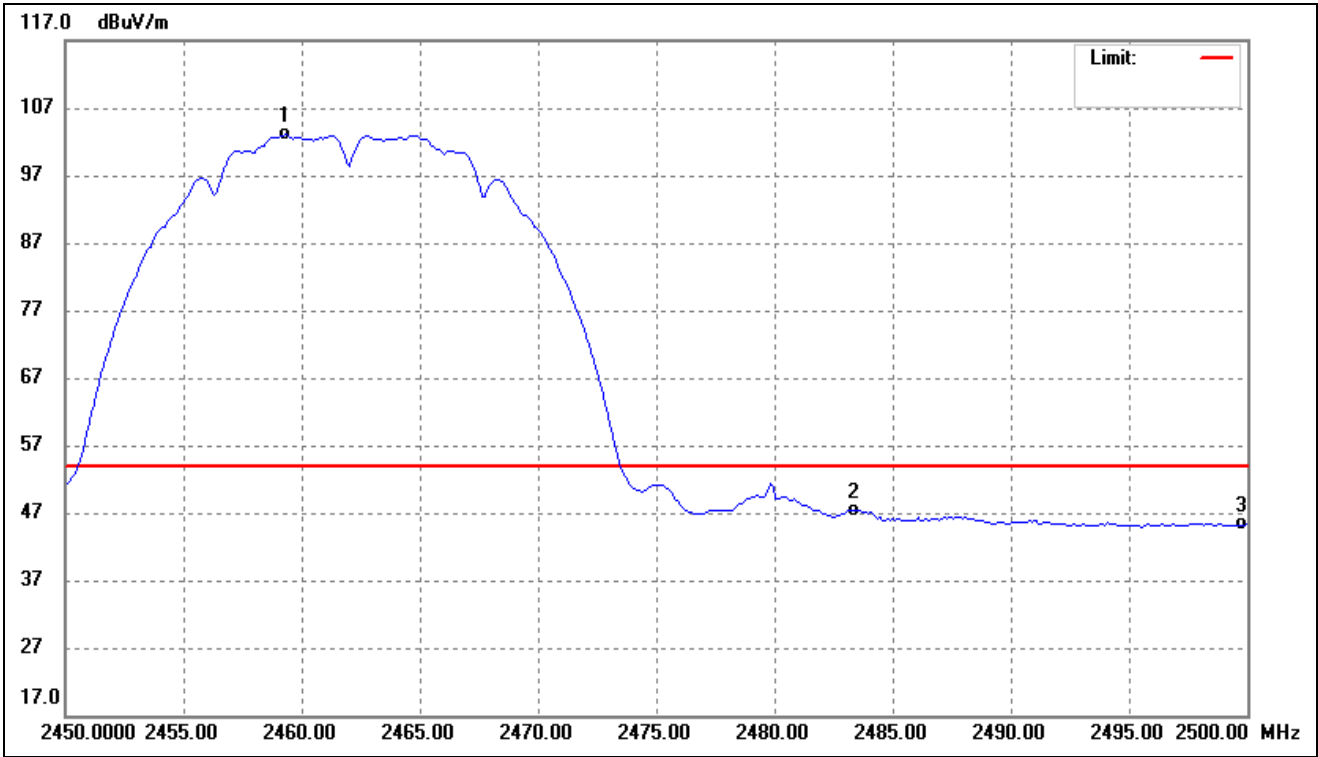


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2459.319	101.77	1.27	103.04	/	/	Average Detector
	2460.421	106.38	1.27	107.65	/	/	Peak Detector
2	2483.450	46.06	1.32	47.38	54.00	-6.62	Average Detector
	2483.500	57.62	1.32	58.94	74.00	-15.06	Peak Detector
3	2500.000	44.00	1.35	45.35	54.00	-8.65	Average Detector
	2500.000	56.49	1.35	57.84	74.00	-16.16	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)

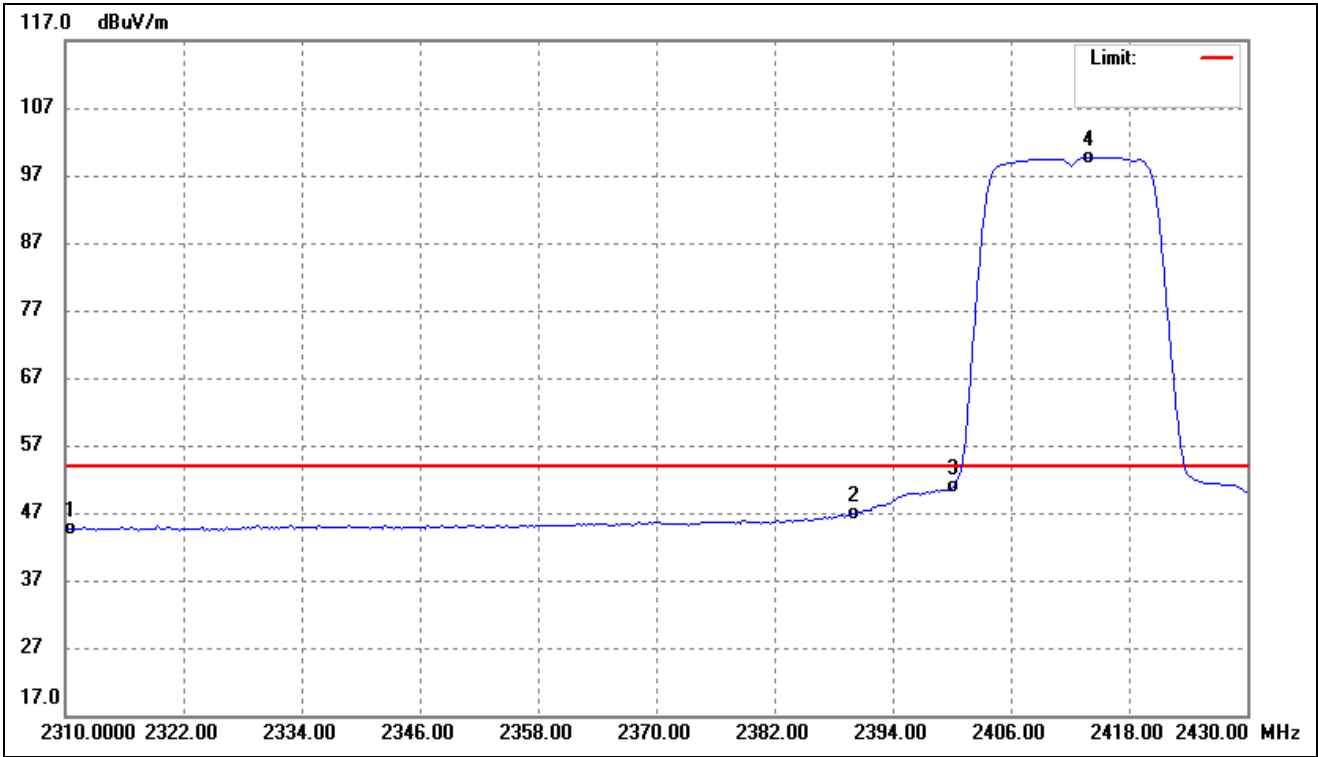


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.55	0.98	44.53	54.00	-9.47	Average Detector
	2310.000	55.24	0.98	56.22	74.00	-17.78	Peak Detector
2	2390.000	45.81	1.13	46.94	54.00	-7.06	Average Detector
	2390.000	57.86	1.13	58.99	74.00	-15.01	Peak Detector
3	2400.000	49.65	1.15	50.80	Delta=48.91dBc		Average Detector
4	2413.888	98.53	1.18	99.71			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)

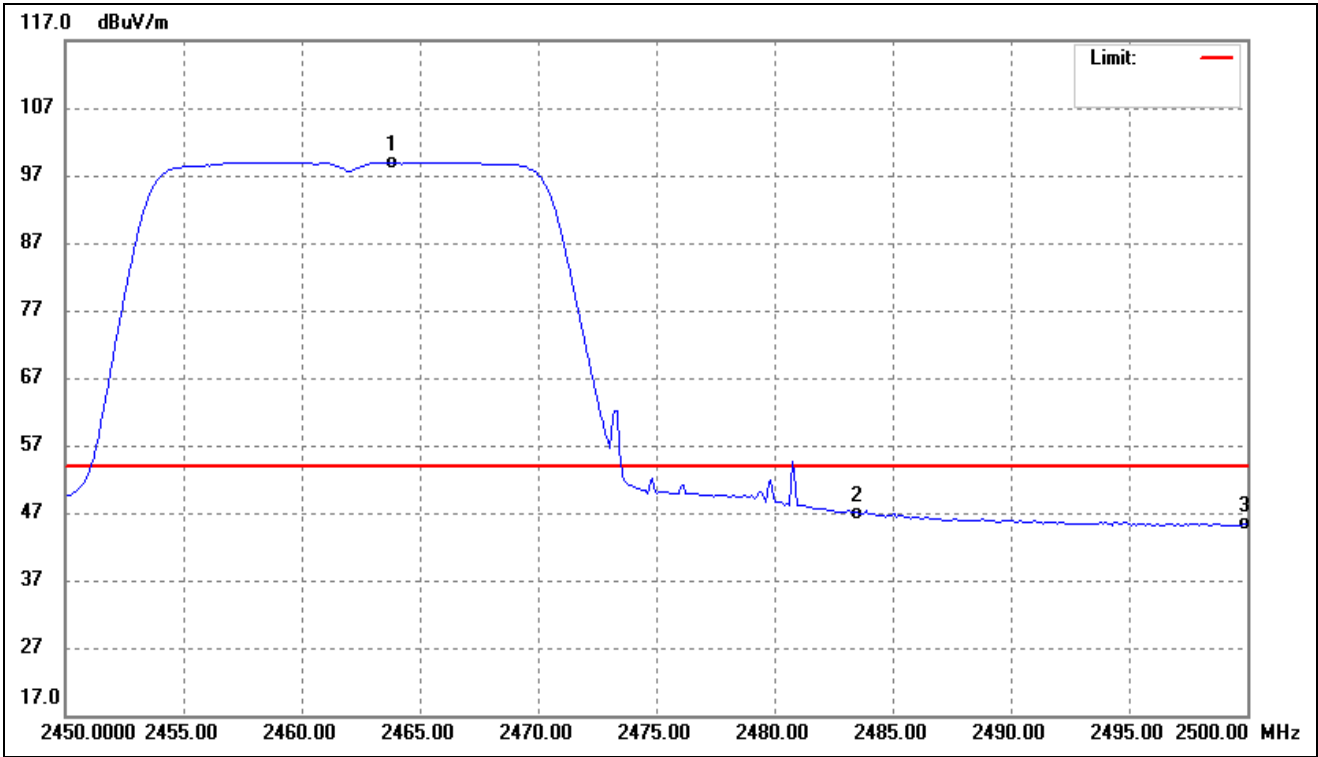


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.828	97.73	1.27	99.00	/	/	Average Detector
	2463.527	108.65	1.27	109.92	/	/	Peak Detector
2	2483.500	45.58	1.32	46.90	54.00	-7.10	Average Detector
	2483.500	58.78	1.32	60.10	74.00	-13.90	Peak Detector
3	2500.000	43.98	1.35	45.33	54.00	-8.67	Average Detector
	2500.000	56.00	1.35	57.35	74.00	-16.65	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

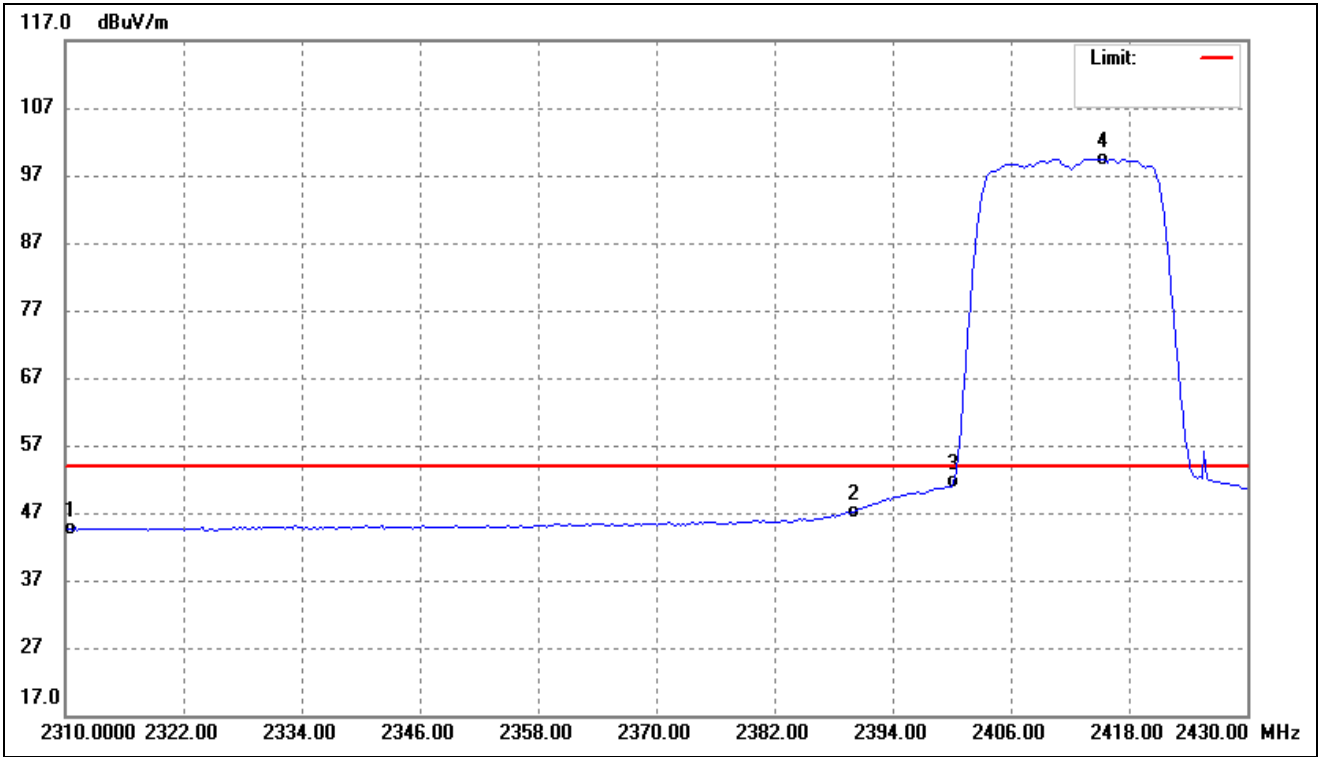


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.68	0.98	44.66	54.00	-9.34	Average Detector
	2310.000	56.80	0.98	57.78	74.00	-16.22	Peak Detector
2	2390.000	46.05	1.13	47.18	54.00	-6.82	Average Detector
	2390.000	62.43	1.13	63.56	74.00	-10.44	Peak Detector
3	2400.000	50.54	1.15	51.69	Delta=47.80dBc		Average Detector
4	2415.331	98.31	1.18	99.49			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

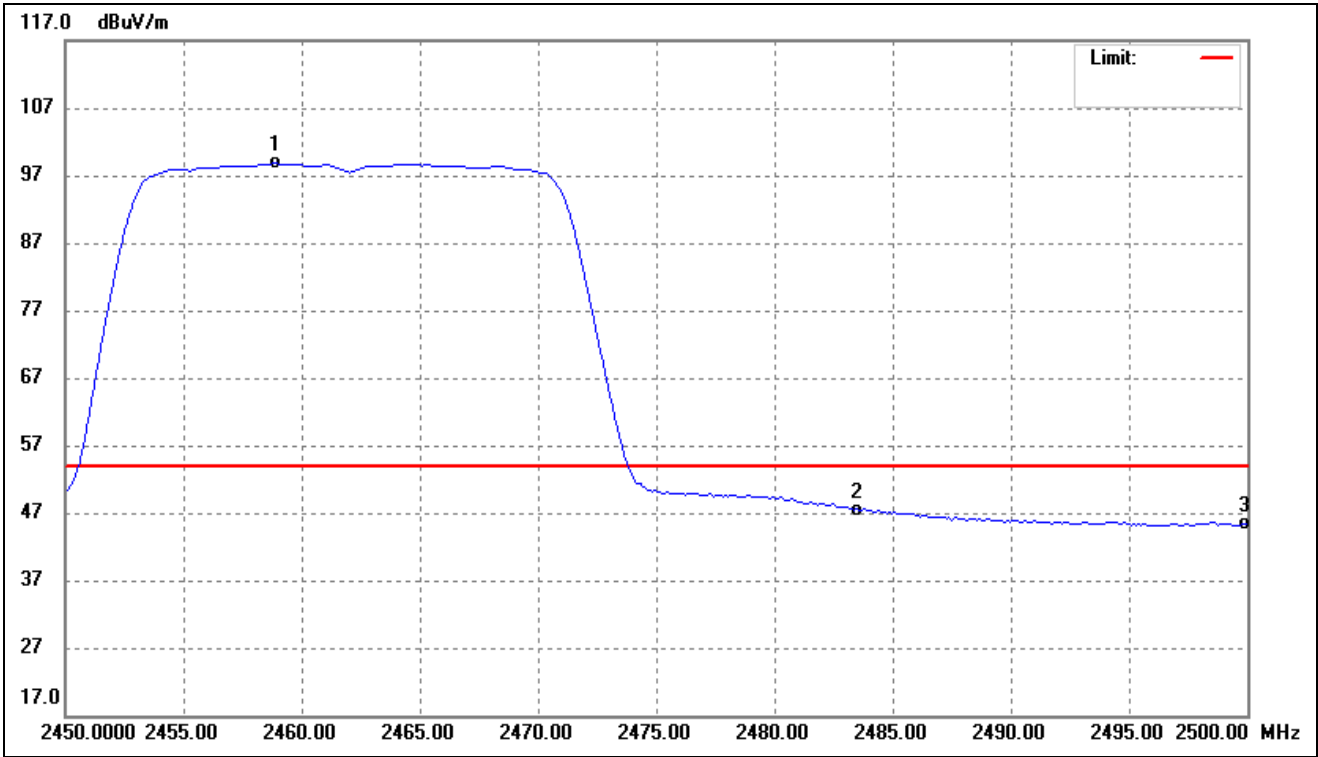


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2458.818	97.50	1.27	98.77	/	/	Average Detector
	2459.419	109.23	1.27	110.50	/	/	Peak Detector
2	2483.500	46.16	1.32	47.48	54.00	-6.52	Average Detector
	2483.500	60.41	1.32	61.73	74.00	-12.27	Peak Detector
3	2500.000	44.01	1.35	45.36	54.00	-8.64	Average Detector
	2500.000	55.87	1.35	57.22	74.00	-16.78	Peak Detector

802.11ax-HE20_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

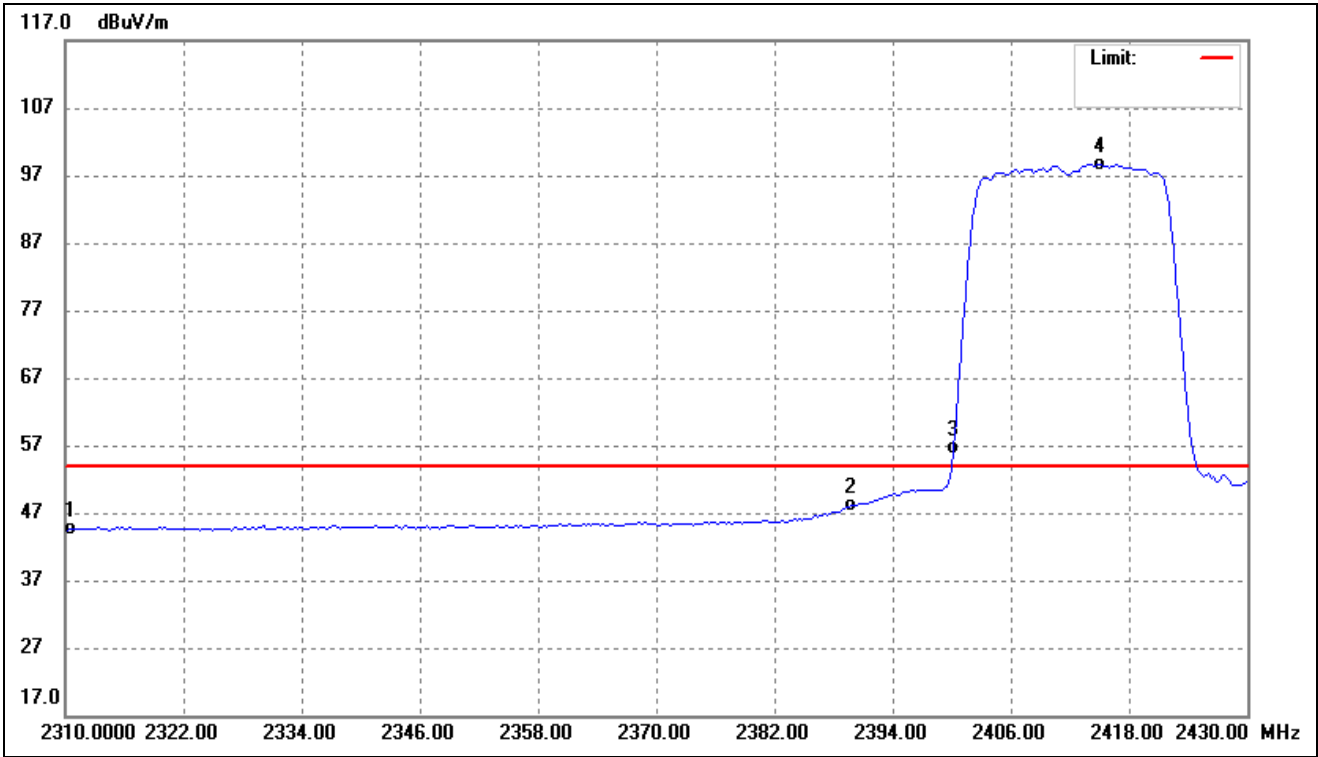


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.54	0.98	44.52	54.00	-9.48	Average Detector
	2310.000	56.75	0.98	57.73	74.00	-16.27	Peak Detector
2	2390.000	46.93	1.13	48.06	54.00	-5.94	Average Detector
	2390.000	61.94	1.13	63.07	74.00	-10.93	Peak Detector
3	2400.000	55.49	1.15	56.64	Delta=41.97dBc		Average Detector
4	2415.090	97.43	1.18	98.61			Average Detector

802.11ax-HE20_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

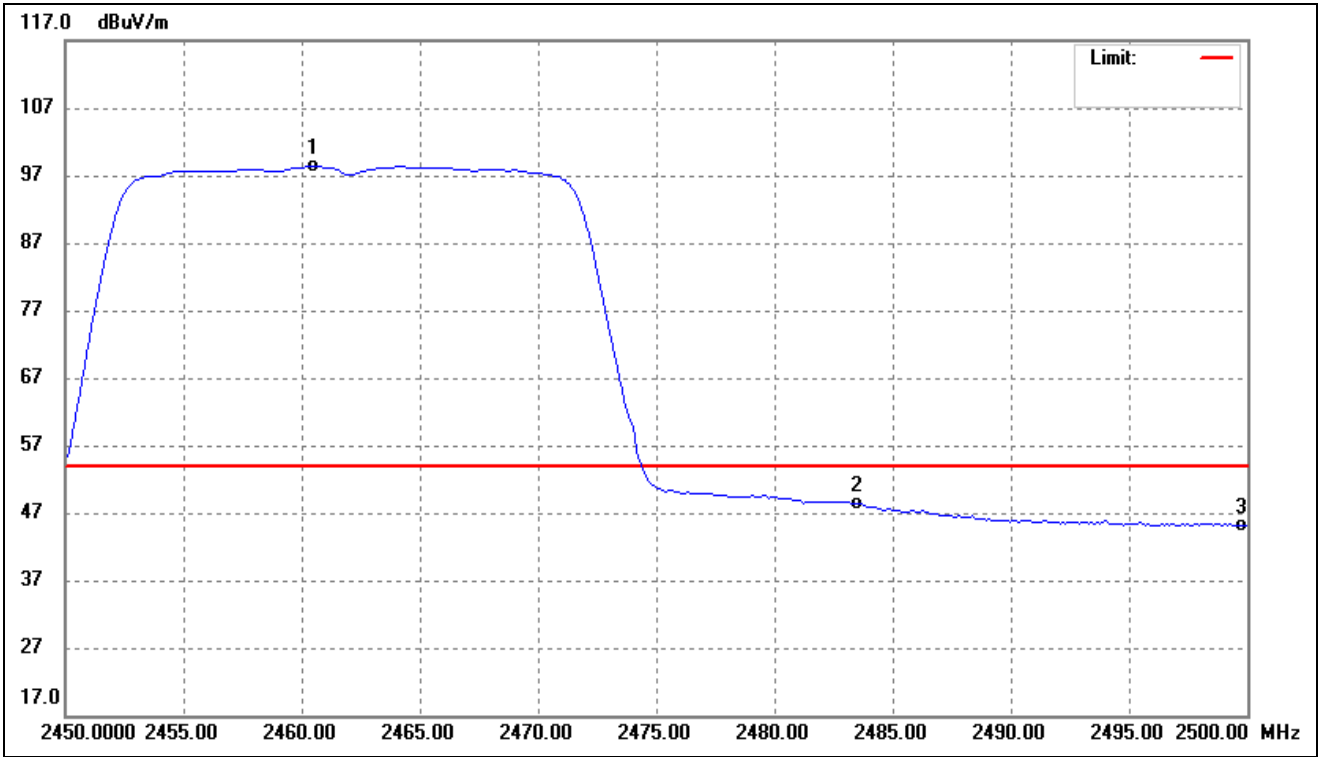


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.521	97.13	1.27	98.40	/	/	Average Detector
	2464.830	109.96	1.27	111.23	/	/	Peak Detector
2	2483.500	47.07	1.32	48.39	54.00	-5.61	Average Detector
	2483.500	63.10	1.32	64.42	74.00	-9.58	Peak Detector
3	2500.000	43.74	1.35	45.09	54.00	-8.91	Average Detector
	2500.000	55.66	1.35	57.01	74.00	-16.99	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

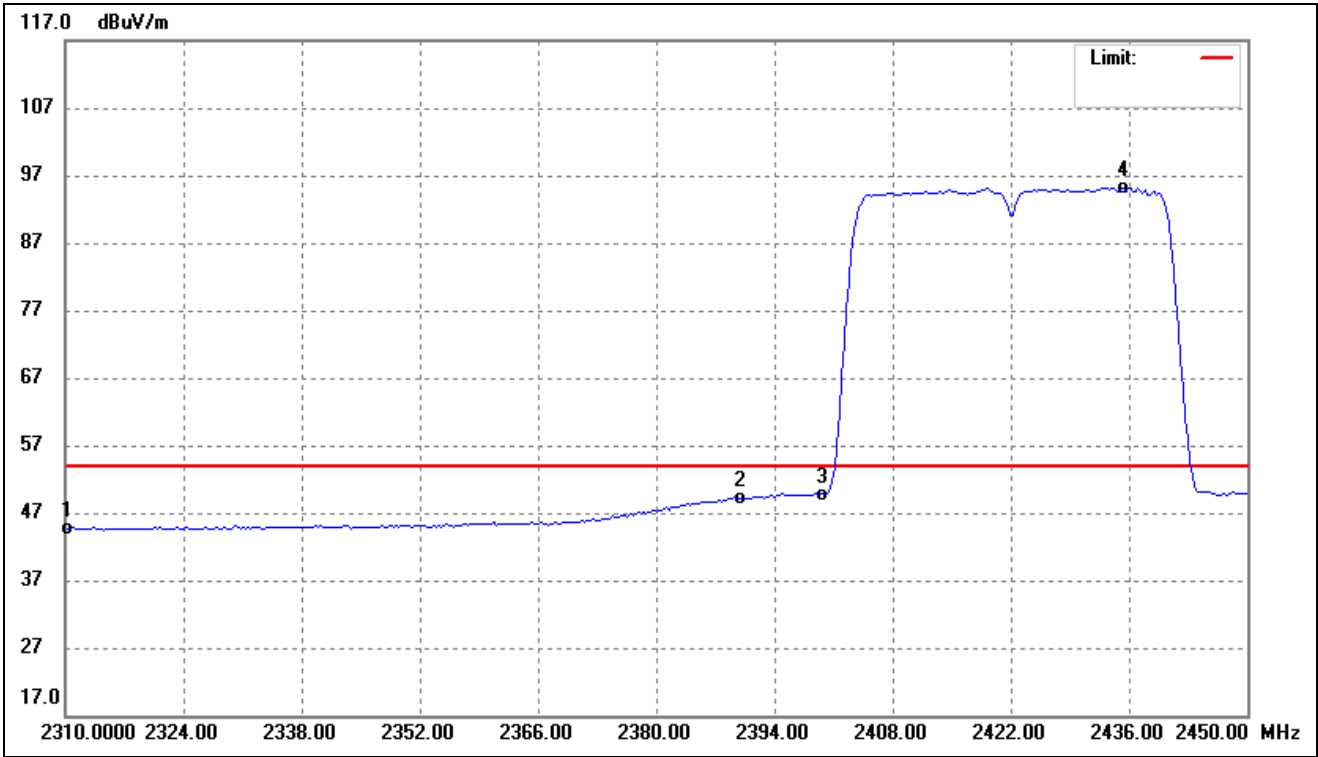


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.65	0.98	44.63	54.00	-9.37	Average Detector
	2310.000	56.50	0.98	57.48	74.00	-16.52	Peak Detector
2	2390.000	47.93	1.13	49.06	54.00	-4.94	Average Detector
	2390.000	63.33	1.13	64.46	74.00	-9.54	Peak Detector
3	2400.000	48.58	1.15	49.73	Delta=45.52dBc		Average Detector
4	2435.411	94.02	1.23	95.25			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

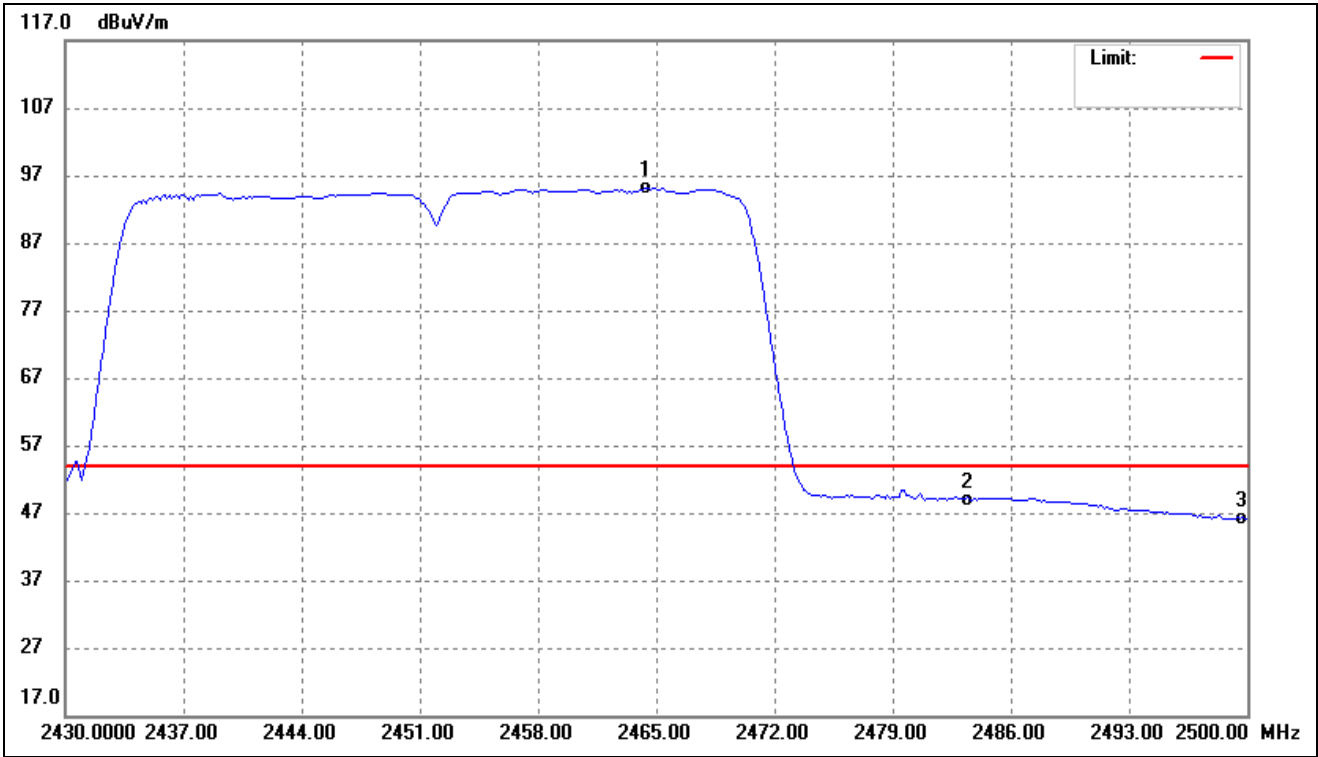


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.369	93.84	1.27	95.11	/	/	Average Detector
	2461.563	106.70	1.28	107.98	/	/	Peak Detector
2	2483.500	47.65	1.32	48.97	54.00	-5.03	Average Detector
	2483.500	61.22	1.32	62.54	74.00	-11.46	Peak Detector
3	2500.000	44.82	1.35	46.17	54.00	-7.83	Average Detector
	2500.000	58.18	1.35	59.53	74.00	-14.47	Peak Detector

802.11ax-HE40_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

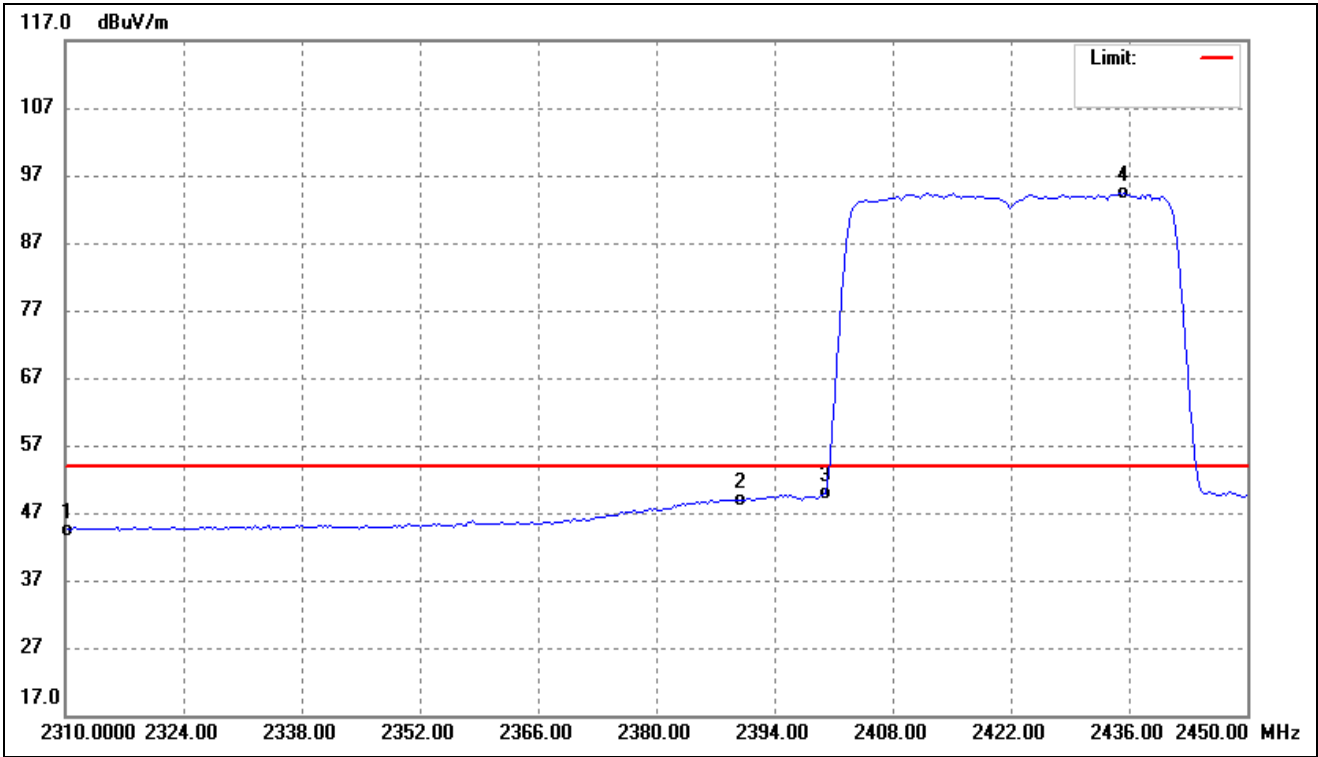

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.50	0.98	44.48	54.00	-9.52	Average Detector
	2310.000	55.54	0.98	56.52	74.00	-17.48	Peak Detector
2	2390.000	47.74	1.13	48.87	54.00	-5.13	Average Detector
	2390.000	61.75	1.13	62.88	74.00	-11.12	Peak Detector
3	2400.000	48.82	1.15	49.97	Delta=44.39dBc		Average Detector
4	2435.411	93.13	1.23	94.36			Average Detector

802.11ax-HE40_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

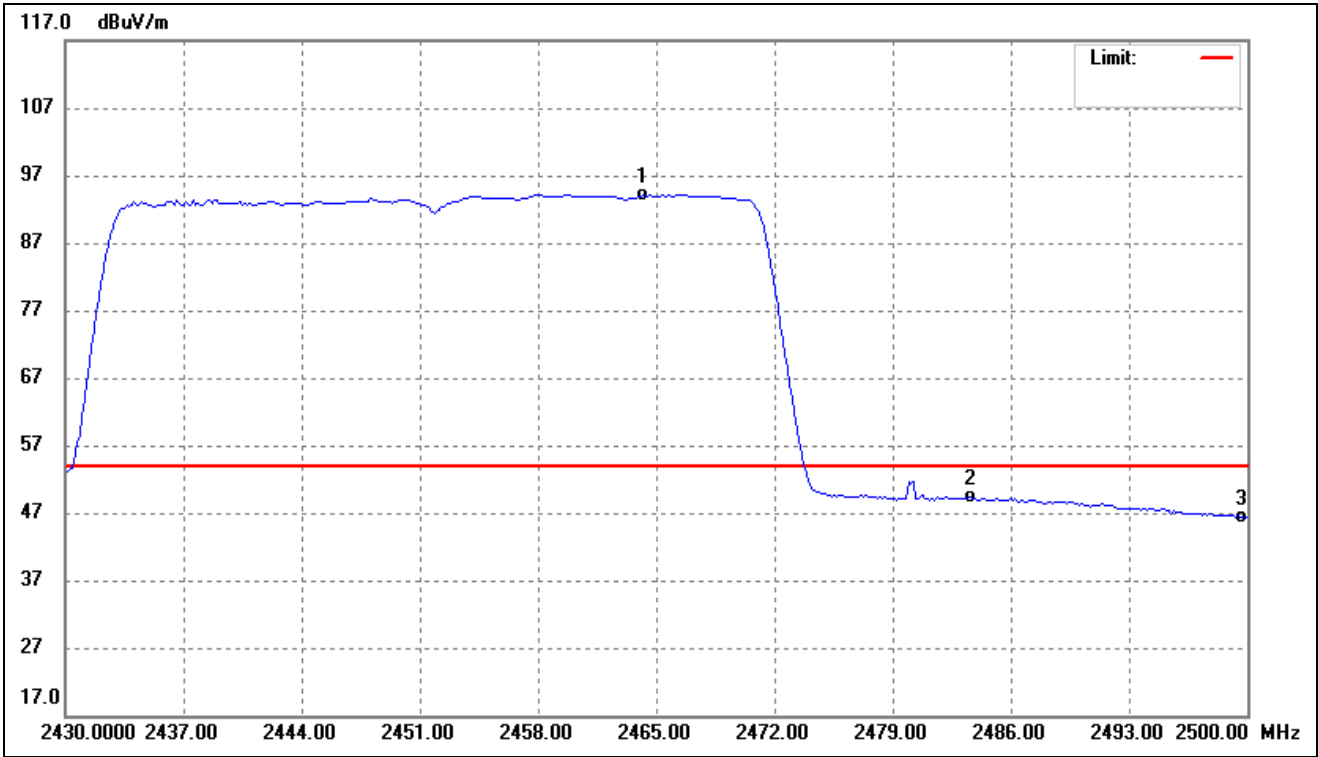

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.228	92.90	1.27	94.17	/	/	Average Detector
	2440.661	107.26	1.23	108.49	/	/	Peak Detector
2	2483.500	47.94	1.32	49.26	54.00	-4.74	Average Detector
	2483.500	61.72	1.32	63.04	74.00	-10.96	Peak Detector
3	2500.000	45.01	1.35	46.36	54.00	-7.64	Average Detector
	2500.000	59.98	1.35	61.33	74.00	-12.67	Peak Detector

➤ Conducted test
Please refer to Appendix D


9. Conducted Emissions

9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

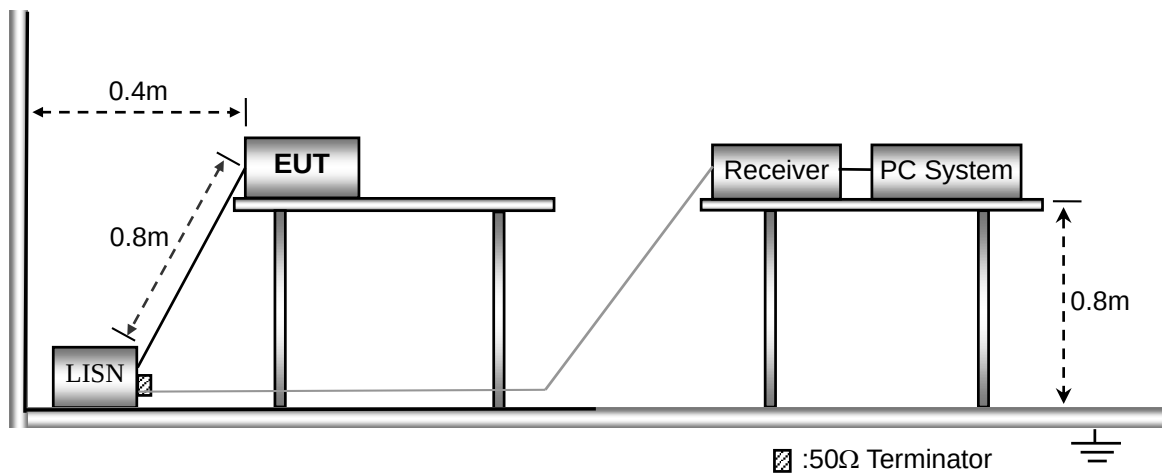

9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

9.4 Summary of Test Results/Plots

Not applicable

APPENDIX SUMMARY

Project No.	WTH24X04096557W	Test Engineer	Timi Huang
Start date	2024/5/10	Finish date	2024/5/15
Temperature	23℃	Humidity	56%
RF specifications	WIFI 2.4GHz		

APPENDIX	Description of Test Item	Result
A	DTS Bandwidth	Compliant
B	Maximum conducted output power	Compliant
C	Maximum power spectral density	Compliant
D	Conducted Out of Band Emissions	Compliant

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.120	0.5	PASS
11B	Ant2	2412	10.080	0.5	PASS
11B	Ant1	2437	10.120	0.5	PASS
11B	Ant2	2437	10.080	0.5	PASS
11B	Ant1	2462	10.080	0.5	PASS
11B	Ant2	2462	10.120	0.5	PASS
11G	Ant1	2412	15.920	0.5	PASS
11G	Ant2	2412	16.320	0.5	PASS
11G	Ant1	2437	16.320	0.5	PASS
11G	Ant2	2437	16.360	0.5	PASS
11G	Ant1	2462	16.280	0.5	PASS
11G	Ant2	2462	16.320	0.5	PASS
11N20MIMO	Ant1	2412	17.640	0.5	PASS
11N20MIMO	Ant2	2412	16.280	0.5	PASS
11N20MIMO	Ant1	2437	17.400	0.5	PASS
11N20MIMO	Ant2	2437	16.720	0.5	PASS
11N20MIMO	Ant1	2462	17.400	0.5	PASS
11N20MIMO	Ant2	2462	16.720	0.5	PASS
11N40MIMO	Ant1	2422	36.400	0.5	PASS
11N40MIMO	Ant2	2422	36.480	0.5	PASS
11N40MIMO	Ant1	2437	36.400	0.5	PASS
11N40MIMO	Ant2	2437	29.600	0.5	PASS
11N40MIMO	Ant1	2452	36.320	0.5	PASS
11N40MIMO	Ant2	2452	34.560	0.5	PASS
11AX20MIMO	Ant1	2412	18.000	0.5	PASS
11AX20MIMO	Ant2	2412	18.760	0.5	PASS
11AX20MIMO	Ant1	2437	18.840	0.5	PASS
11AX20MIMO	Ant2	2437	18.280	0.5	PASS
11AX20MIMO	Ant1	2462	18.400	0.5	PASS
11AX20MIMO	Ant2	2462	18.000	0.5	PASS
11AX40MIMO	Ant1	2422	37.120	0.5	PASS
11AX40MIMO	Ant2	2422	37.680	0.5	PASS
11AX40MIMO	Ant1	2437	37.760	0.5	PASS
11AX40MIMO	Ant2	2437	35.600	0.5	PASS
11AX40MIMO	Ant1	2452	37.520	0.5	PASS
11AX40MIMO	Ant2	2452	36.560	0.5	PASS

Test Graphs



11B-Ant1-2412-PASS



11B-Ant2-2412-PASS



11B-Ant1-2437-PASS



11B-Ant2-2437-PASS




11B-Ant1-2462-PASS




11B-Ant2-2462-PASS



11G-Ant1-2412-PASS

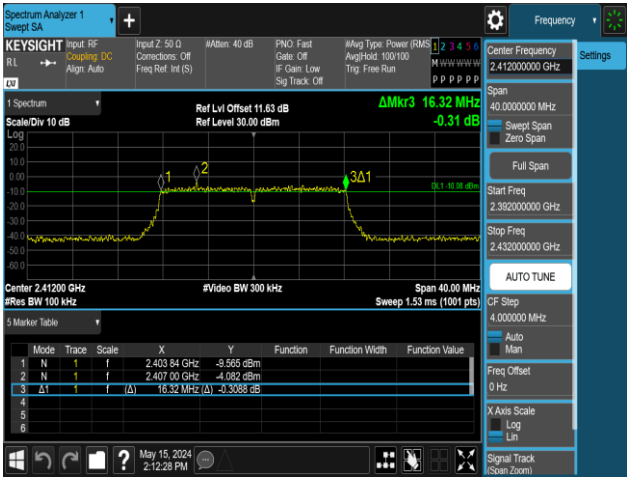


11G-Ant2-2412-PASS

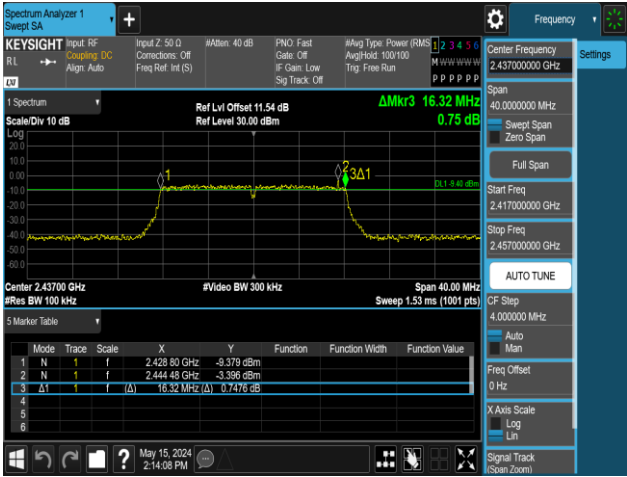

11G-Ant1-2437-PASS



11G-Ant2-2437-PASS

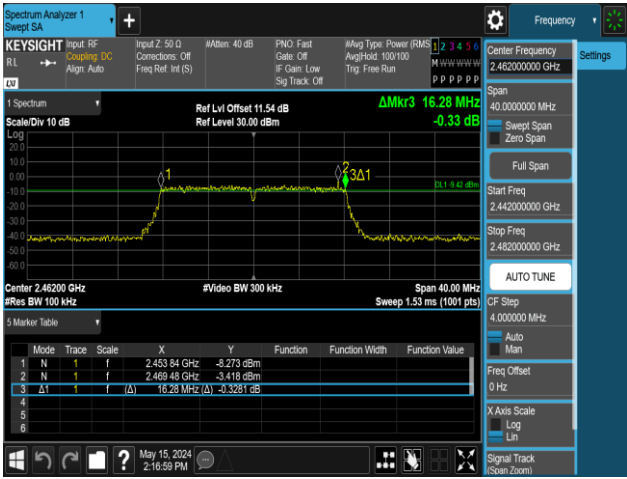


11G-Ant1-2462-PASS



11G-Ant2-2462-PASS




11N20MIMO-Ant1-2412-PASS

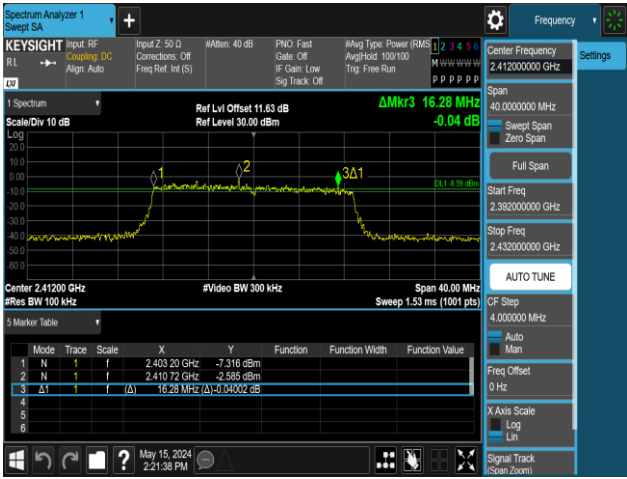


11N20MIMO-Ant2-2412-PASS



11N20MIMO-Ant1-2437-PASS

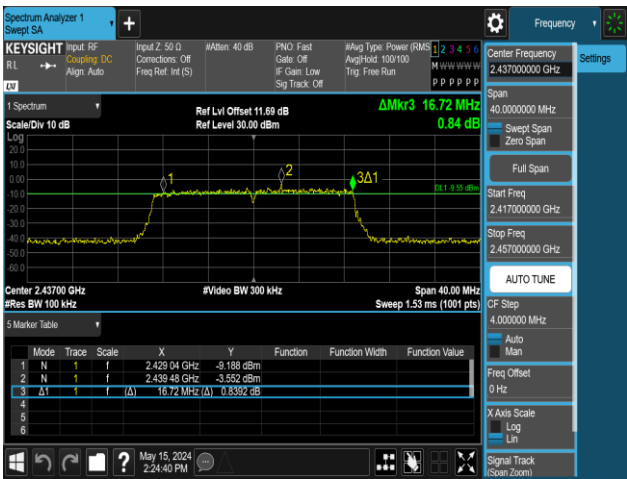


11N20MIMO-Ant2-2437-PASS

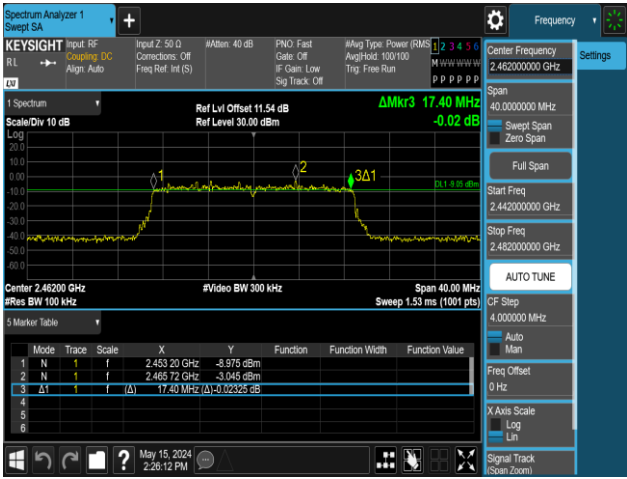

11N20MIMO-Ant1-2462-PASS




11N20MIMO-Ant2-2462-PASS

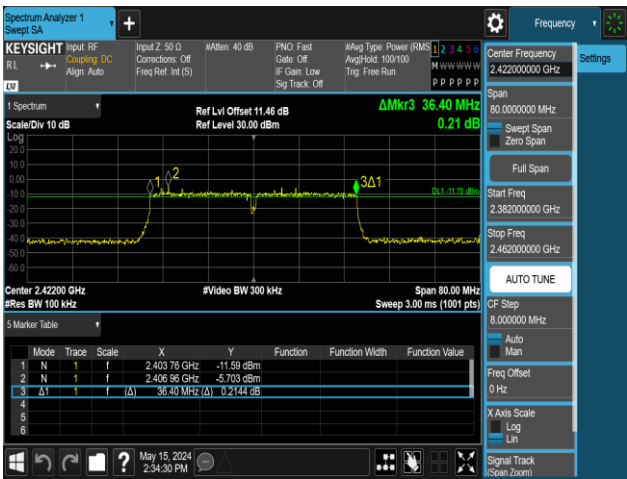


11N40MIMO-Ant1-2422-PASS




11N40MIMO-Ant2-2422-PASS

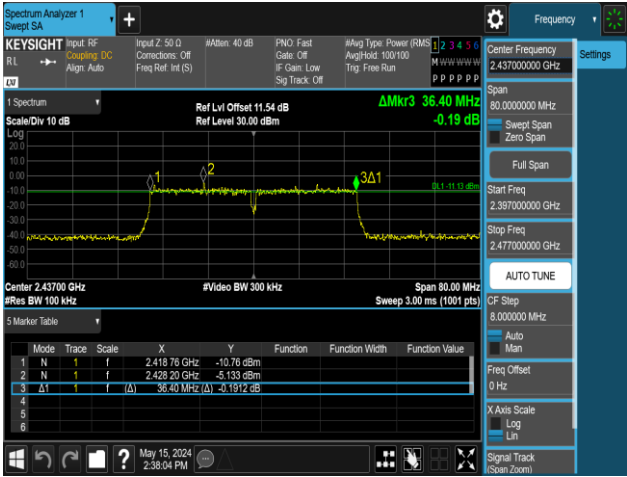


11N40MIMO-Ant1-2437-PASS

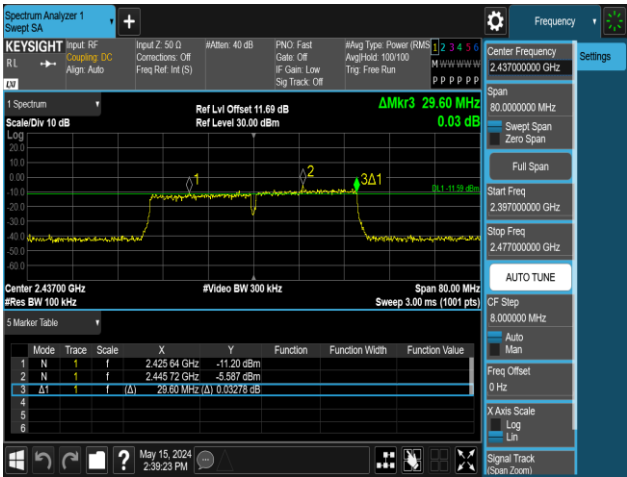

11N40MIMO-Ant2-2437-PASS

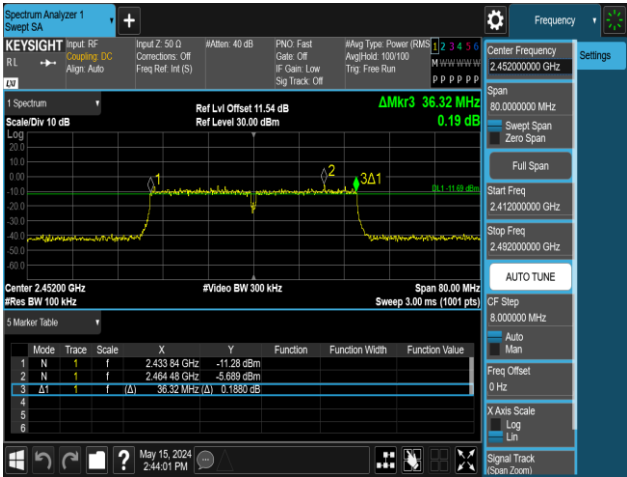


11N40MIMO-Ant1-2452-PASS

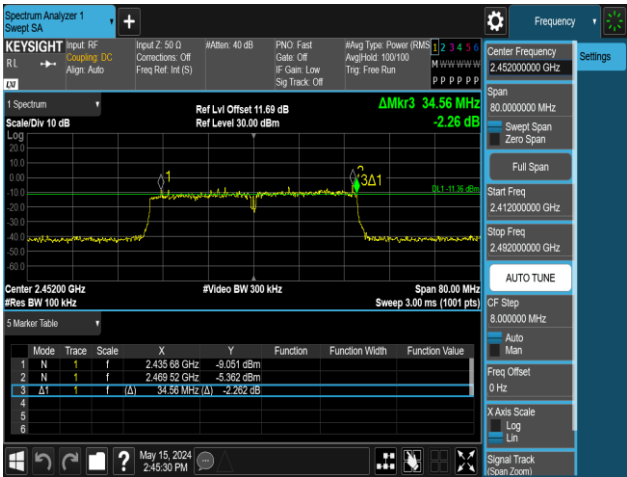


11N40MIMO-Ant2-2452-PASS




11AX20MIMO-Ant1-2412-106Tone-RU54-PASS

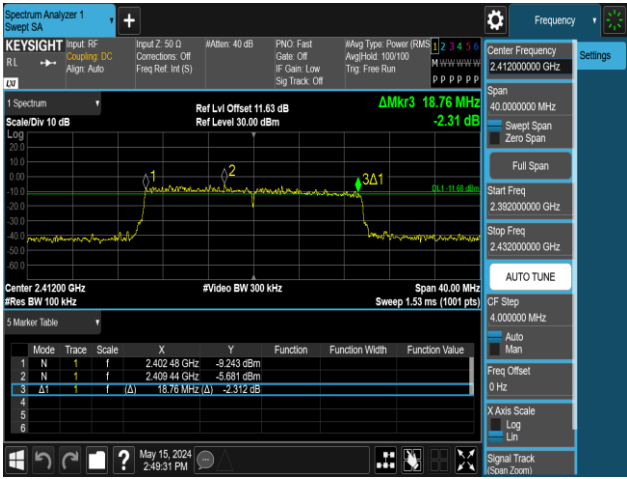


11AX20MIMO-Ant2-2412-106Tone-RU54-PASS

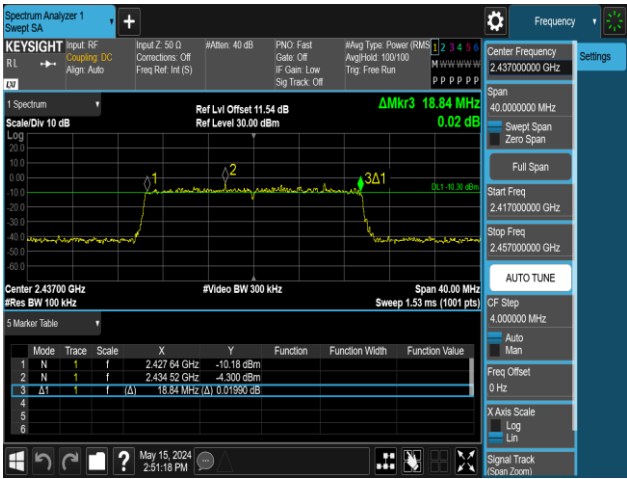


11AX20MIMO-Ant1-2437-106Tone-RU54-PASS

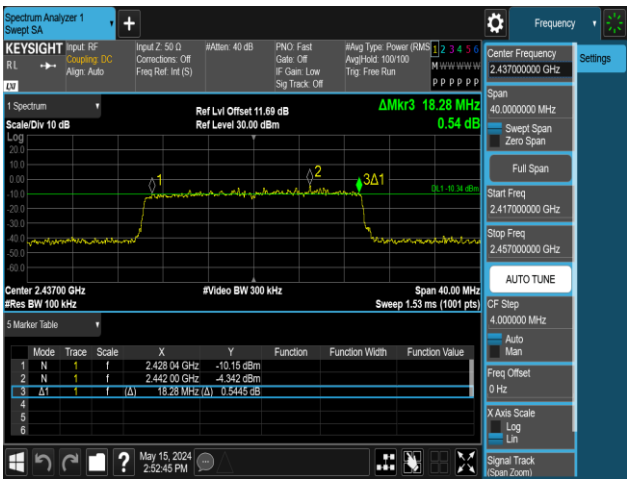


11AX20MIMO-Ant2-2437-106Tone-RU54-PASS

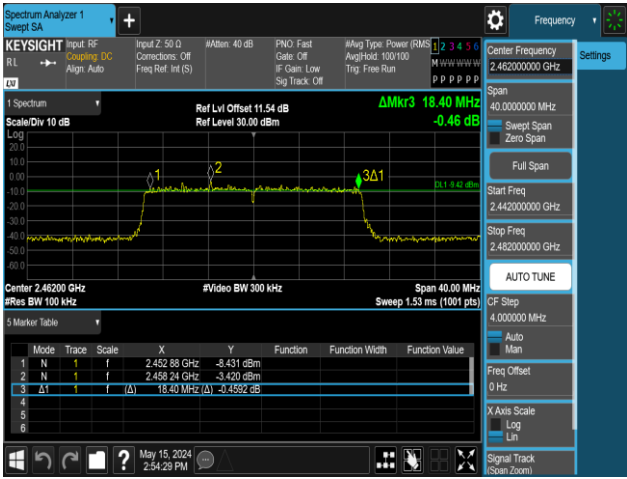


11AX20MIMO-Ant1-2462-106Tone-RU54-PASS

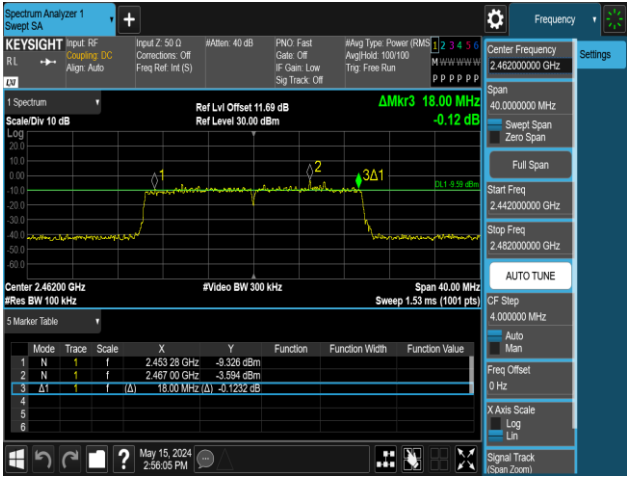


11AX20MIMO-Ant2-2462-106Tone-RU54-PASS

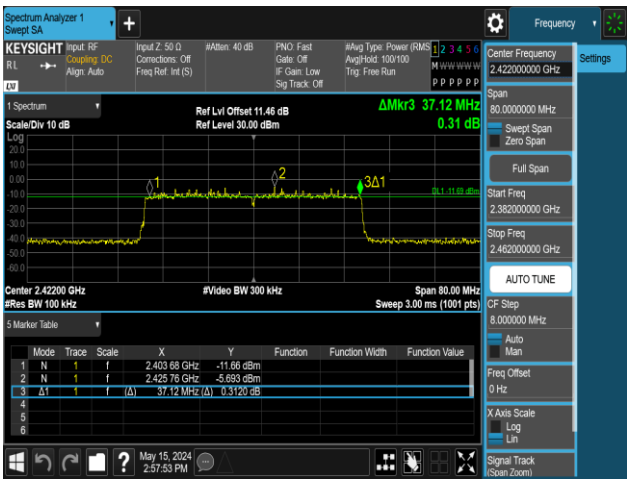


11AX40MIMO-Ant1-2422-242Tone-RU62-PASS

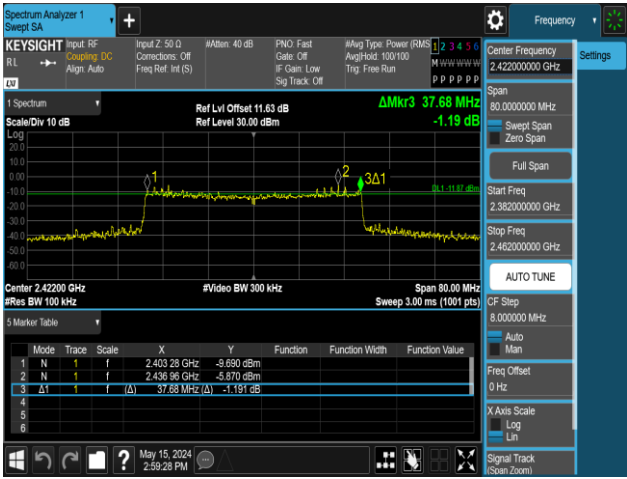


11AX40MIMO-Ant2-2422-242Tone-RU62-PASS

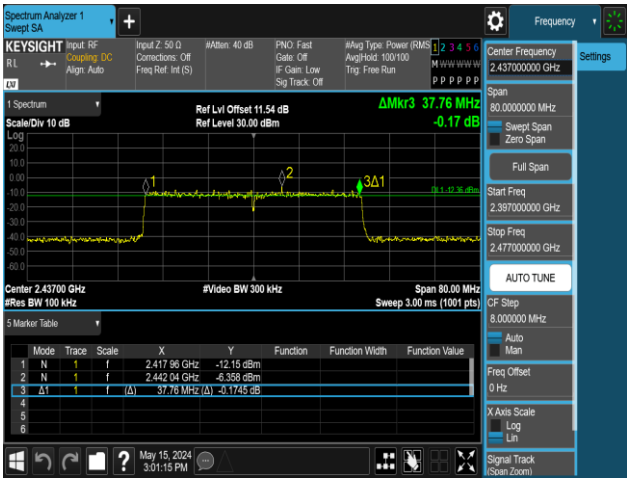


11AX40MIMO-Ant1-2437-242Tone-RU62-PASS

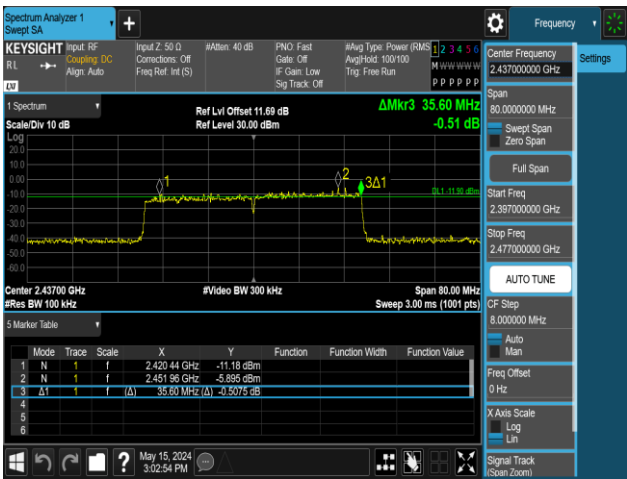

11AX40MIMO-Ant2-2437-242Tone-RU62-PASS

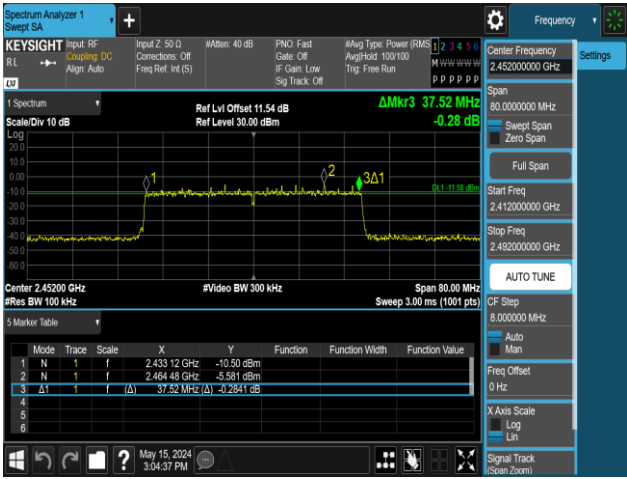

11AX40MIMO-Ant1-2452-242Tone-RU62-PASS

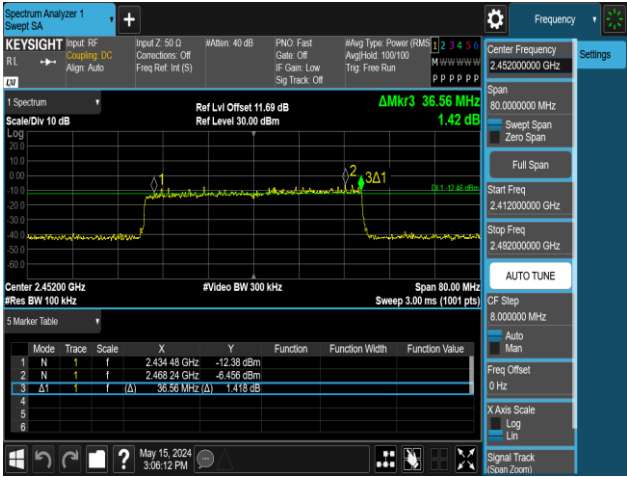

11AX40MIMO-Ant2-2452-242Tone-RU62-PASS

Appendix B: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	17.41	≤30.00	PASS
11B	Ant2	2412	17.05	≤30.00	PASS
11B	Ant1	2437	17.91	≤30.00	PASS
11B	Ant2	2437	17.60	≤30.00	PASS
11B	Ant1	2462	17.44	≤30.00	PASS
11B	Ant2	2462	16.55	≤30.00	PASS
11G	Ant1	2412	14.72	≤30.00	PASS
11G	Ant2	2412	14.35	≤30.00	PASS
11G	Ant1	2437	15.15	≤30.00	PASS
11G	Ant2	2437	14.49	≤30.00	PASS
11G	Ant1	2462	15.02	≤30.00	PASS
11G	Ant2	2462	14.28	≤30.00	PASS
11N20MIMO	Ant1	2412	15.54	≤30.00	PASS
11N20MIMO	Ant2	2412	15.31	≤30.00	PASS
11N20MIMO	total	2412	18.44	≤30.00	PASS
11N20MIMO	Ant1	2437	15.72	≤30.00	PASS
11N20MIMO	Ant2	2437	14.90	≤30.00	PASS
11N20MIMO	total	2437	18.34	≤30.00	PASS
11N20MIMO	Ant1	2462	15.51	≤30.00	PASS
11N20MIMO	Ant2	2462	14.74	≤30.00	PASS
11N20MIMO	total	2462	18.15	≤30.00	PASS
11N40MIMO	Ant1	2422	15.20	≤30.00	PASS
11N40MIMO	Ant2	2422	14.04	≤30.00	PASS
11N40MIMO	total	2422	17.67	≤30.00	PASS
11N40MIMO	Ant1	2437	15.87	≤30.00	PASS
11N40MIMO	Ant2	2437	14.05	≤30.00	PASS
11N40MIMO	total	2437	18.06	≤30.00	PASS
11N40MIMO	Ant1	2452	15.14	≤30.00	PASS
11N40MIMO	Ant2	2452	14.39	≤30.00	PASS
11N40MIMO	total	2452	17.79	≤30.00	PASS
11AX20MIMO	Ant1	2412	15.92	≤30.00	PASS
11AX20MIMO	Ant2	2412	15.22	≤30.00	PASS
11AX20MIMO	total	2412	18.59	≤30.00	PASS
11AX20MIMO	Ant1	2437	16.21	≤30.00	PASS
11AX20MIMO	Ant2	2437	15.76	≤30.00	PASS
11AX20MIMO	total	2437	19.00	≤30.00	PASS

11AX20MIMO	Ant1	2462	16.36	≤30.00	PASS
11AX20MIMO	Ant2	2462	15.60	≤30.00	PASS
11AX20MIMO	total	2462	19.01	≤30.00	PASS
11AX40MIMO	Ant1	2422	15.47	≤30.00	PASS
11AX40MIMO	Ant2	2422	14.49	≤30.00	PASS
11AX40MIMO	total	2422	18.02	≤30.00	PASS
11AX40MIMO	Ant1	2437	15.66	≤30.00	PASS
11AX40MIMO	Ant2	2437	15.12	≤30.00	PASS
11AX40MIMO	total	2437	18.41	≤30.00	PASS
11AX40MIMO	Ant1	2452	15.68	≤30.00	PASS
11AX40MIMO	Ant2	2452	14.62	≤30.00	PASS
11AX40MIMO	total	2452	18.19	≤30.00	PASS

Appendix C: Maximum power spectral density


Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	0.40	≤8.00	PASS
11B	Ant2	2412	-0.34	≤8.00	PASS
11B	Ant1	2437	0.41	≤8.00	PASS
11B	Ant2	2437	-0.19	≤8.00	PASS
11B	Ant1	2462	0.71	≤8.00	PASS
11B	Ant2	2462	-0.42	≤8.00	PASS
11G	Ant1	2412	-8.70	≤8.00	PASS
11G	Ant2	2412	-8.66	≤8.00	PASS
11G	Ant1	2437	-7.20	≤8.00	PASS
11G	Ant2	2437	-7.93	≤8.00	PASS
11G	Ant1	2462	-8.50	≤8.00	PASS
11G	Ant2	2462	-9.08	≤8.00	PASS
11N20MIMO	Ant1	2412	-7.25	≤8.00	PASS
11N20MIMO	Ant2	2412	-7.26	≤8.00	PASS
11N20MIMO	total	2412	-4.24	≤8.00	PASS
11N20MIMO	Ant1	2437	-7.83	≤8.00	PASS
11N20MIMO	Ant2	2437	-7.45	≤8.00	PASS
11N20MIMO	total	2437	-4.63	≤8.00	PASS
11N20MIMO	Ant1	2462	-8.75	≤8.00	PASS
11N20MIMO	Ant2	2462	-8.26	≤8.00	PASS
11N20MIMO	total	2462	-5.49	≤8.00	PASS
11N40MIMO	Ant1	2422	-10.56	≤8.00	PASS
11N40MIMO	Ant2	2422	-10.82	≤8.00	PASS
11N40MIMO	total	2422	-7.68	≤8.00	PASS
11N40MIMO	Ant1	2437	-9.53	≤8.00	PASS
11N40MIMO	Ant2	2437	-8.91	≤8.00	PASS
11N40MIMO	total	2437	-6.20	≤8.00	PASS
11N40MIMO	Ant1	2452	-9.36	≤8.00	PASS
11N40MIMO	Ant2	2452	-9.07	≤8.00	PASS
11N40MIMO	total	2452	-6.20	≤8.00	PASS
11AX20MIMO	Ant1	2412	-9.64	≤8.00	PASS
11AX20MIMO	Ant2	2412	-9.52	≤8.00	PASS
11AX20MIMO	total	2412	-6.57	≤8.00	PASS
11AX20MIMO	Ant1	2437	-9.06	≤8.00	PASS
11AX20MIMO	Ant2	2437	-8.42	≤8.00	PASS
11AX20MIMO	total	2437	-5.72	≤8.00	PASS


11AX20MIMO	Ant1	2462	-7.72	≤8.00	PASS
11AX20MIMO	Ant2	2462	-8.92	≤8.00	PASS
11AX20MIMO	total	2462	-5.27	≤8.00	PASS
11AX40MIMO	Ant1	2422	-11.12	≤8.00	PASS
11AX40MIMO	Ant2	2422	-12.62	≤8.00	PASS
11AX40MIMO	total	2422	-8.80	≤8.00	PASS
11AX40MIMO	Ant1	2437	-10.08	≤8.00	PASS
11AX40MIMO	Ant2	2437	-9.91	≤8.00	PASS
11AX40MIMO	total	2437	-6.98	≤8.00	PASS
11AX40MIMO	Ant1	2452	-10.71	≤8.00	PASS
11AX40MIMO	Ant2	2452	-9.89	≤8.00	PASS
11AX40MIMO	total	2452	-7.27	≤8.00	PASS

Test Graphs




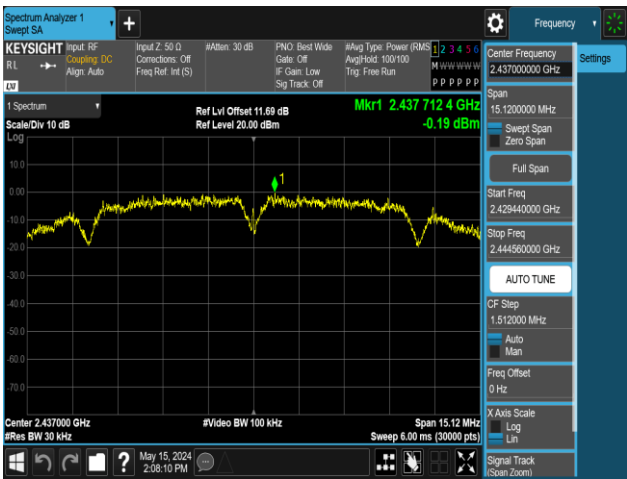


11B-Ant2-2437-PASS

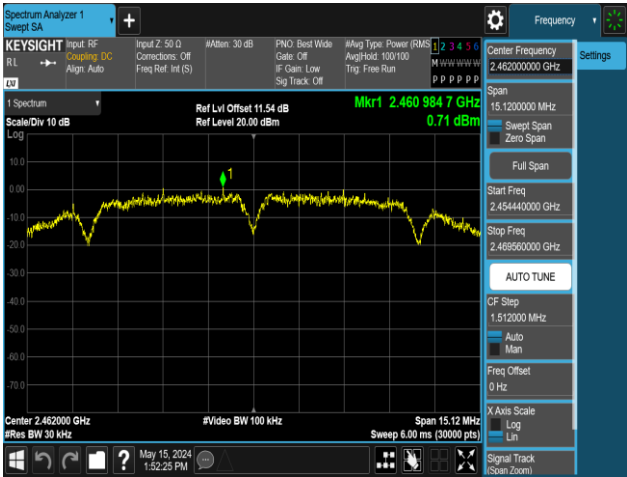


11B-Ant1-2462-PASS

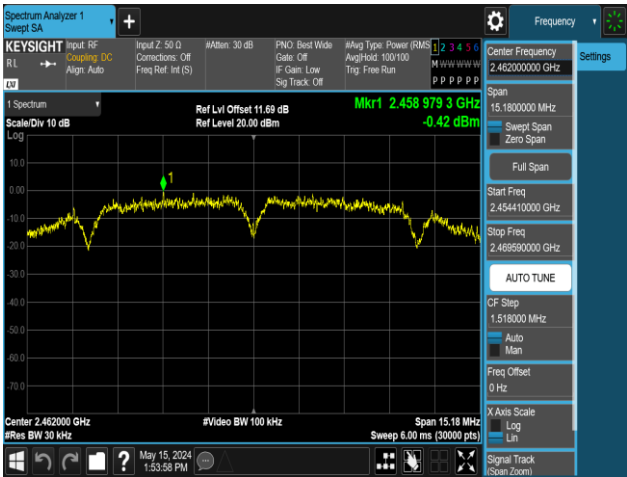


11B-Ant2-2462-PASS

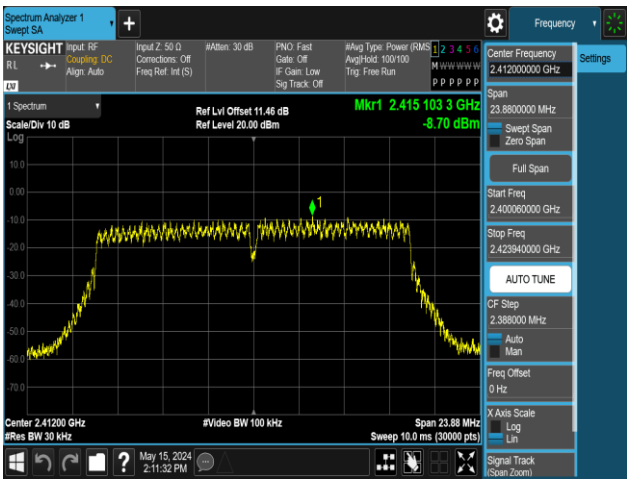


11G-Ant1-2412-PASS

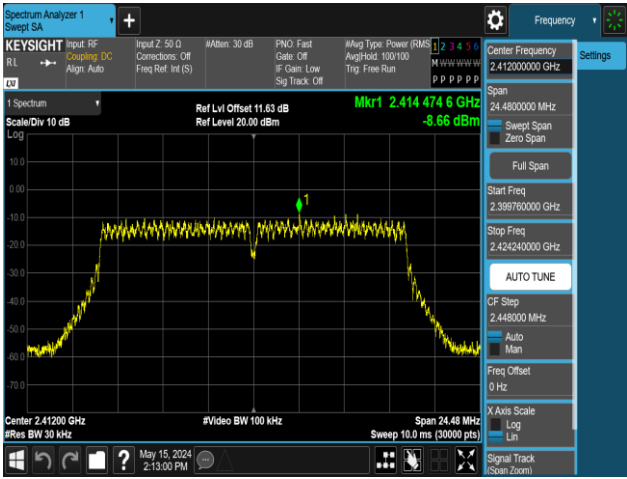


11G-Ant2-2412-PASS

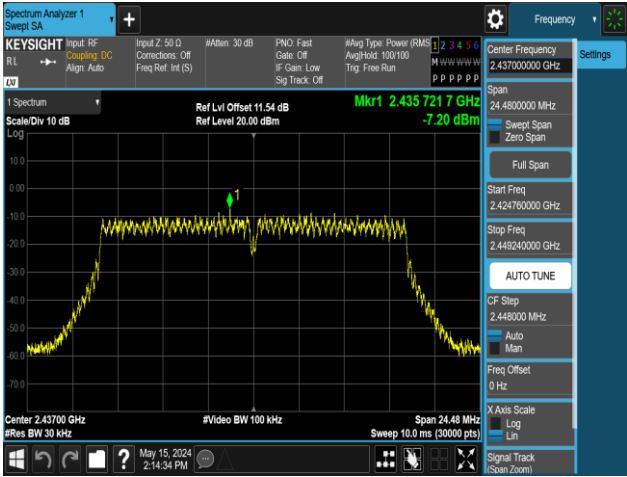


11G-Ant1-2437-PASS

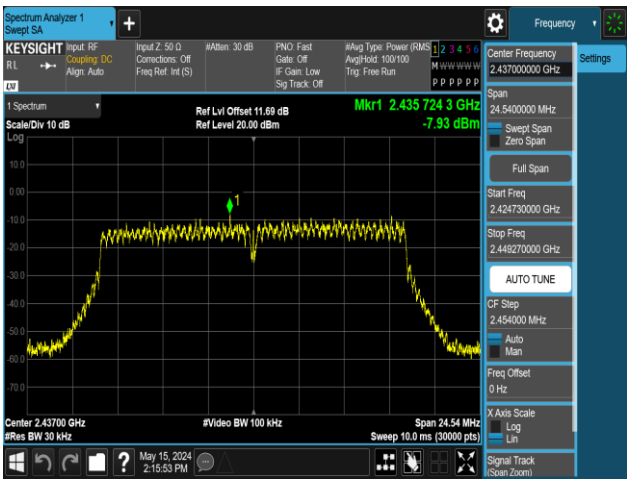


11G-Ant2-2437-PASS

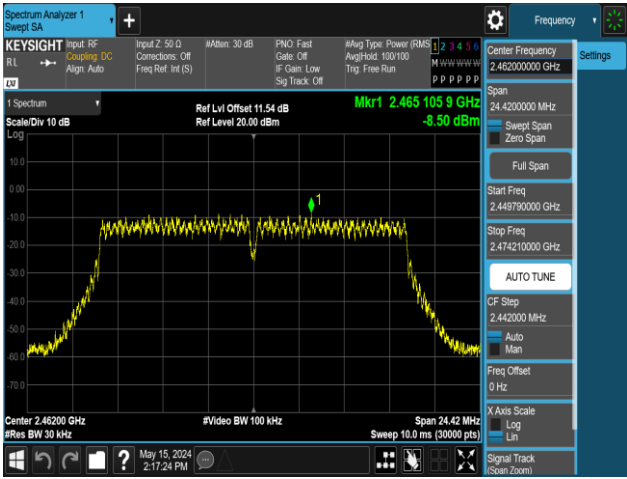


11G-Ant1-2462-PASS

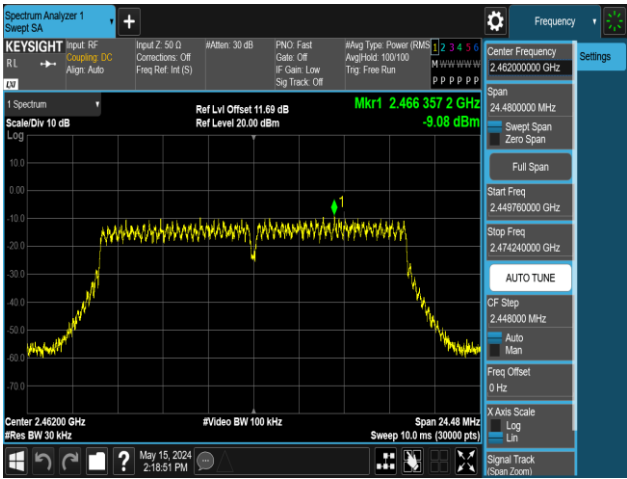


11G-Ant2-2462-PASS

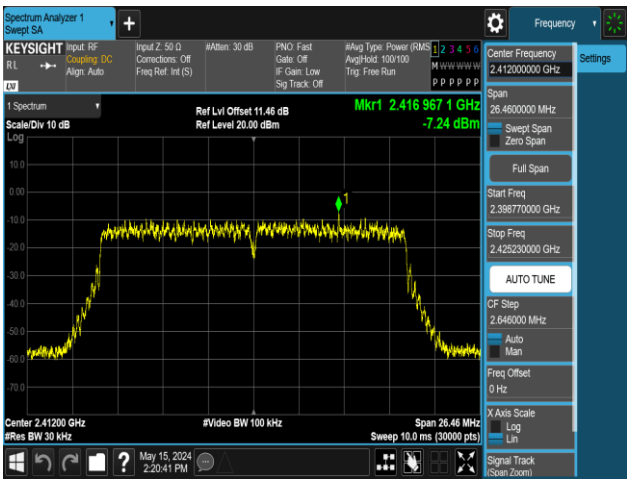

11N20MIMO-Ant1-2412-PASS

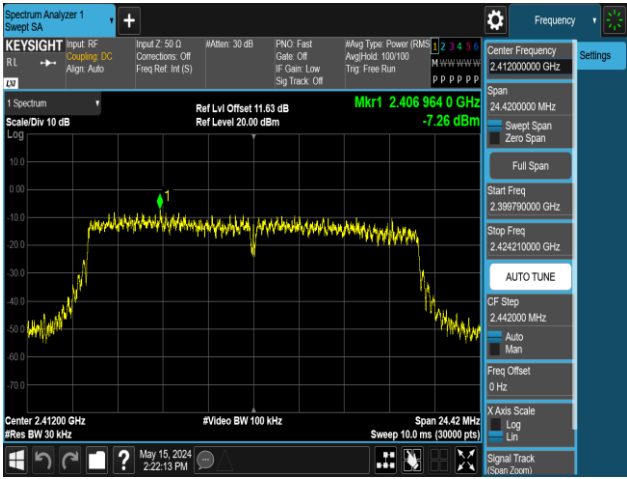

11N20MIMO-Ant2-2412-PASS

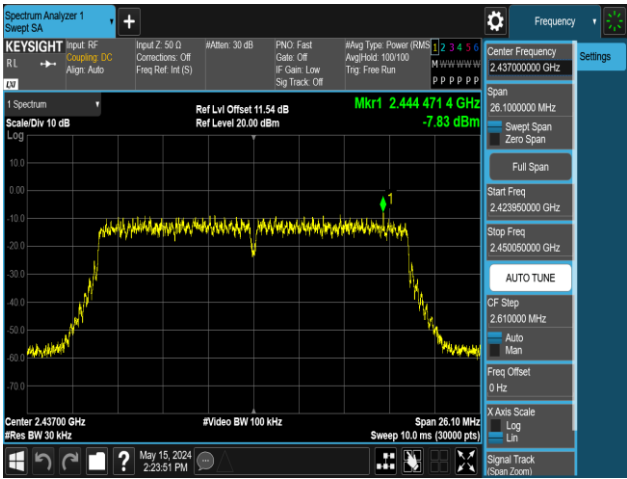

11N20MIMO-Ant1-2437-PASS