



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

Sengled Co., Ltd.

Room 103/02-B, Floor 1, Building 1, No. 498, Guoshoujing Road, Pilot Free Trade Zone,
Shanghai China

FCC ID: 2AGN8-ZM004

Report Type: Original Report	Product Type: Sengled Zigbee Module
Test Engineer:	Chao Gao
Report Number:	RSHD210402004-00A
Report Date:	2021-04-14
Reviewed By:	Oscar Ye EMC Manager
Prepared By:	Bay Area Compliant Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
CALCULATED FORMULARY:.....	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP.....	18
EMI TEST RECEIVER SETUP.....	19
TEST PROCEDURE	19
LEVEL & OVER LIMIT CALCULATION - BELOW 1 GHZ	19
CORRECTED AMPLITUDE & MARGIN CALCULATION - ABOVE 1 GHZ.....	19
TEST RESULTS SUMMARY	20
TEST DATA	20
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	34

FCC §15.247(d) – BAND EDGE.....37
APPLICABLE STANDARD37
TEST PROCEDURE37
TEST DATA37
FCC §15.247(e) - POWER SPECTRAL DENSITY39
APPLICABLE STANDARD39
TEST PROCEDURE39
TEST DATA40

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Sengled Co., Ltd.
Tested Model:	ZM004
Product Type:	Sengled Zigbee Module
Power Supply:	DC 3.3V
RF Function:	Zigbee
Max Conducted Peak Output Power:	9.98dBm
Operating Band/Frequency:	2405~2480MHz
Channel Number:	16
Channel Separation:	5 MHz
Modulation Type	OQPSK
Antenna Type:	PCB Antenna
*Maximum Antenna Gain:	1.0 dBi

Note: The maximum antenna gain is provided by the applicant.

**All measurement and test data in this report was gathered from production sample serial number: RSHD210402004-1. (Assigned by BACL, Kunshan). The EUT was received on 2021-04-02.*

Objective

This report is prepared on behalf of *Sengled Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliant Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The Test site used by Bay Area Compliant Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliant Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for Zigbee mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

EUT was tested with Channel 11, 18 and 26.


Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

RF test tool: UartAssist.exe

Power Level Setting: Default

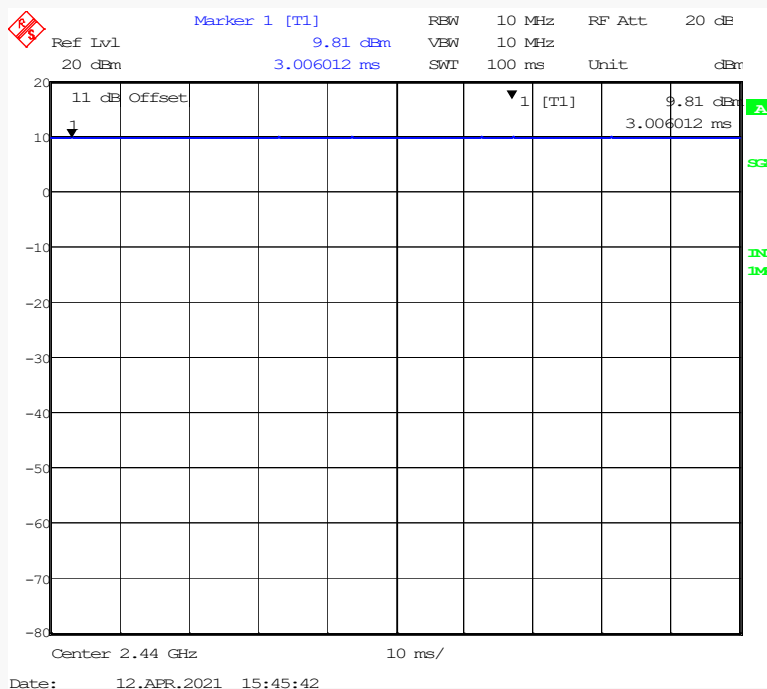Duty Cycle:**Middle Channel:2440MHz**

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
Zigbee	100	/	/	/

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263

External I/O Cable


Cable Description	Length (m)	From Port	To Port
USB Cable	1.0	Debug Board	Notebook
Power Cable 1	1.5	Notebook	Adapter
Power Cable 2	1.2	Adapter	LISN/AC Source

Block Diagram of Test Setup


For Conducted Emissions:

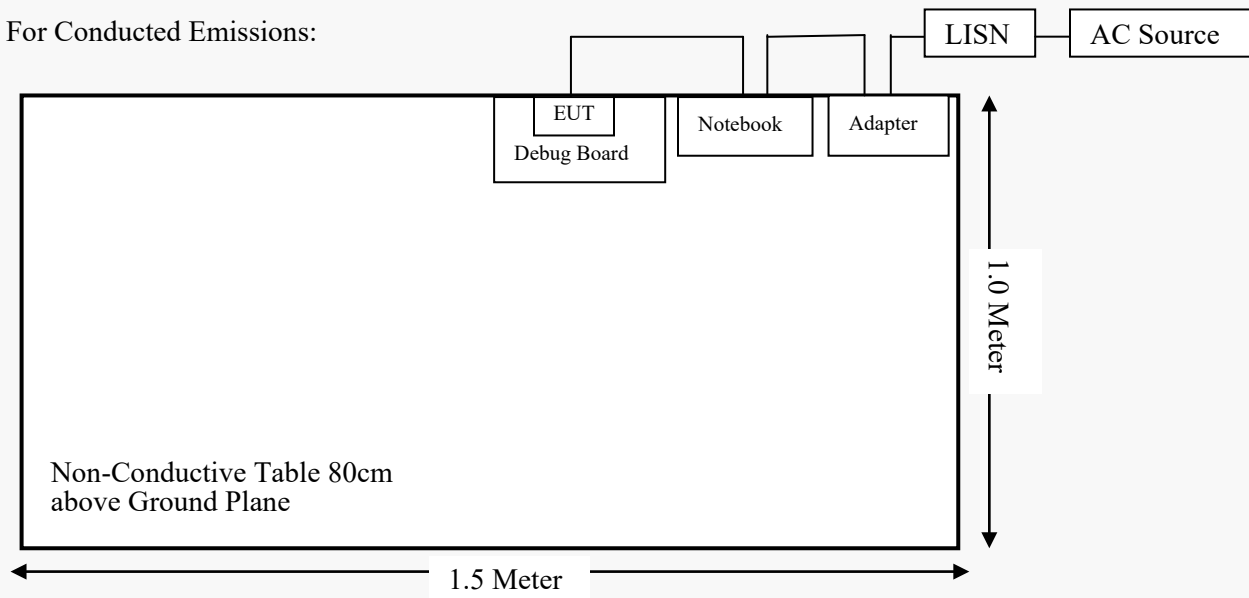

For Radiated Emissions (Below 1GHz):

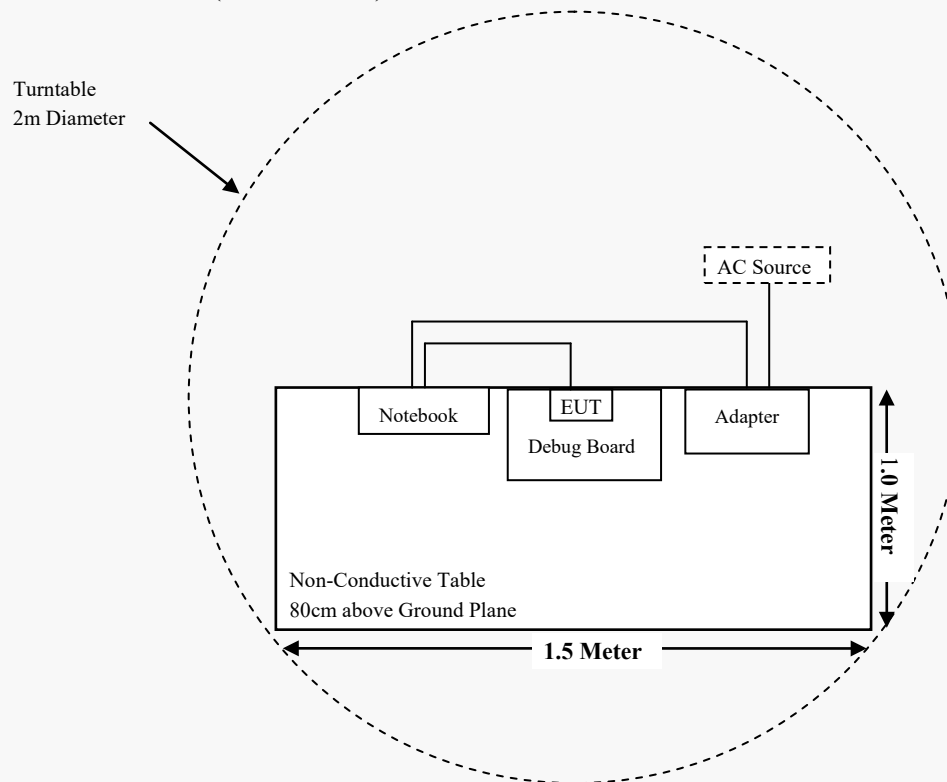

For Radiated Emissions(Above 1GHz):

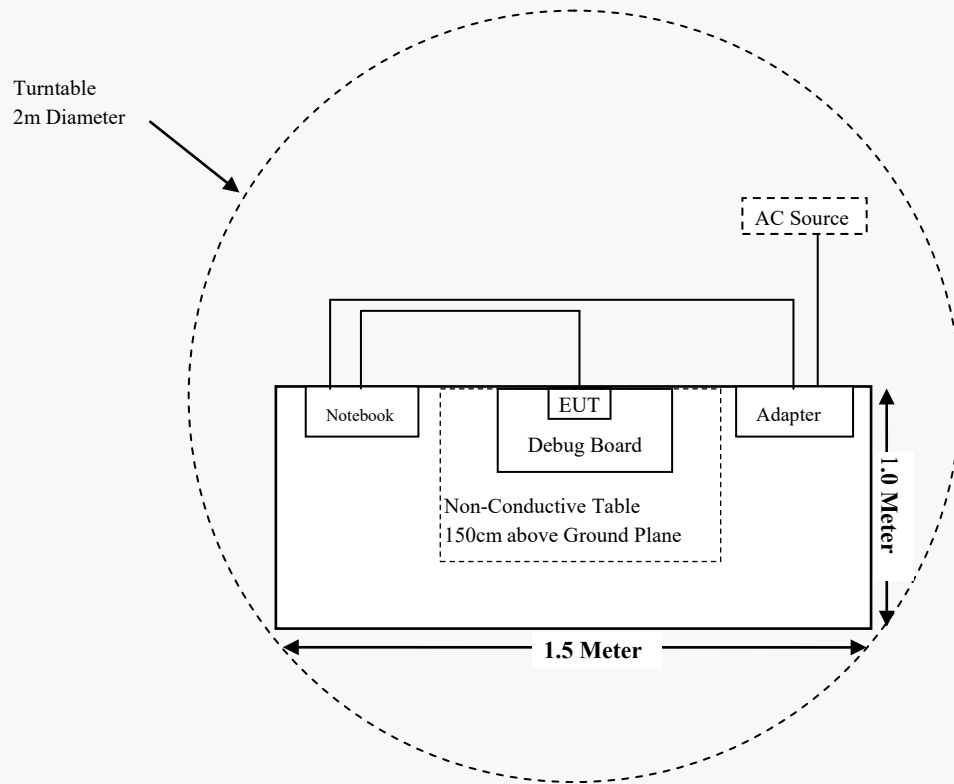

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2020-12-14	2021-12-13
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2020-08-05	2023-08-04
Sonoma Instrunent	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-08-27	2021-08-26
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2019-12-12	2022-12-11
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-08-14	2021-08-13
SELECTOR	Amplifier	EM18G40G	060726	2021-03-22	2022-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2020-08-05	2021-08-04
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2020-12-12	2021-12-11
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2020-11-27	2021-11-26
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Sengled Co., Ltd.	RF Cable	Sengled Co., Ltd. C01	N/A	Each Time	N/A
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2020-07-28	2021-07-27
Rohde & Schwarz	LISN	ENV216	101115	2020-11-27	2021-11-26
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2020-08-10	2021-08-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2020-08-15	2021-08-14

* **Statement of Traceability:** Bay Area Compliant Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Zigbee	2405~2480	1.0	1.26	10.00	10.00	20	0.0025	1.0

Note: The tune-up Conducted power was declared by the manufacturer.

Conclusion: The EUT meets exemption requirement- RF exposure evaluation greater than 20cm distance specified in § 2.1091. If the device built into a host as a portable usage, the additional RF exposure evaluation may be required as specified by § 2.1093.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna and the antenna gain is 1.0 dBi, which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

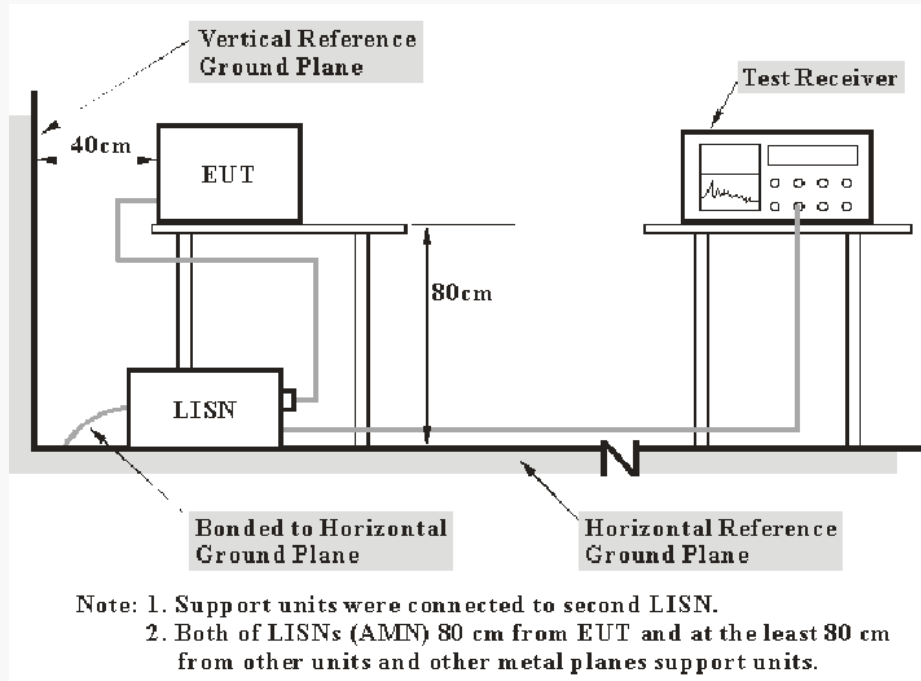

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

Corrected Factor & Over Limit Calculation

The Corrected Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of 7 dB means the emission is 7 dB above the limit. The equation for over limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	102.3 kPa


The testing was performed by Chao Gao on 2021-04-12.

EUT operation mode: Transmitting in middle channel (worst case)

AC 120V/60 Hz, Line

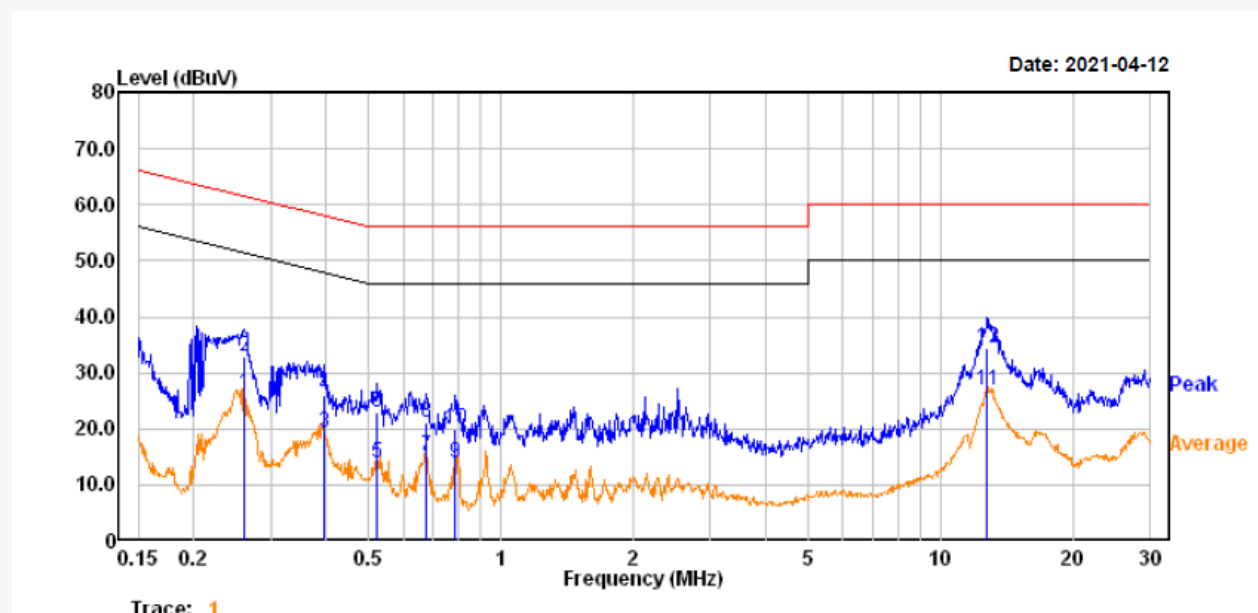

	Freq	Read		Limit	Over	
	MHz	Level	Factor	Line	Limit	Remark
		dBuV				
		dBuV				
1	0.261	6.50	19.82	26.32	51.40	-25.08 Average
2	0.261	13.20	19.82	33.02	61.40	-28.38 QP
3	0.396	-0.46	19.74	19.28	47.93	-28.65 Average
4	0.396	6.20	19.74	25.94	57.93	-31.99 QP
5	0.524	-5.81	19.75	13.94	46.00	-32.06 Average
6	0.524	3.21	19.75	22.96	56.00	-33.04 QP
7	0.676	-4.52	19.75	15.23	46.00	-30.77 Average
8	0.676	1.30	19.75	21.05	56.00	-34.95 QP
9	0.789	-5.72	19.71	13.99	46.00	-32.01 Average
10	0.789	0.13	19.71	19.84	56.00	-36.16 QP
11	12.793	7.40	19.60	27.00	50.00	-23.00 Average
12	12.793	14.90	19.60	34.50	60.00	-25.50 QP

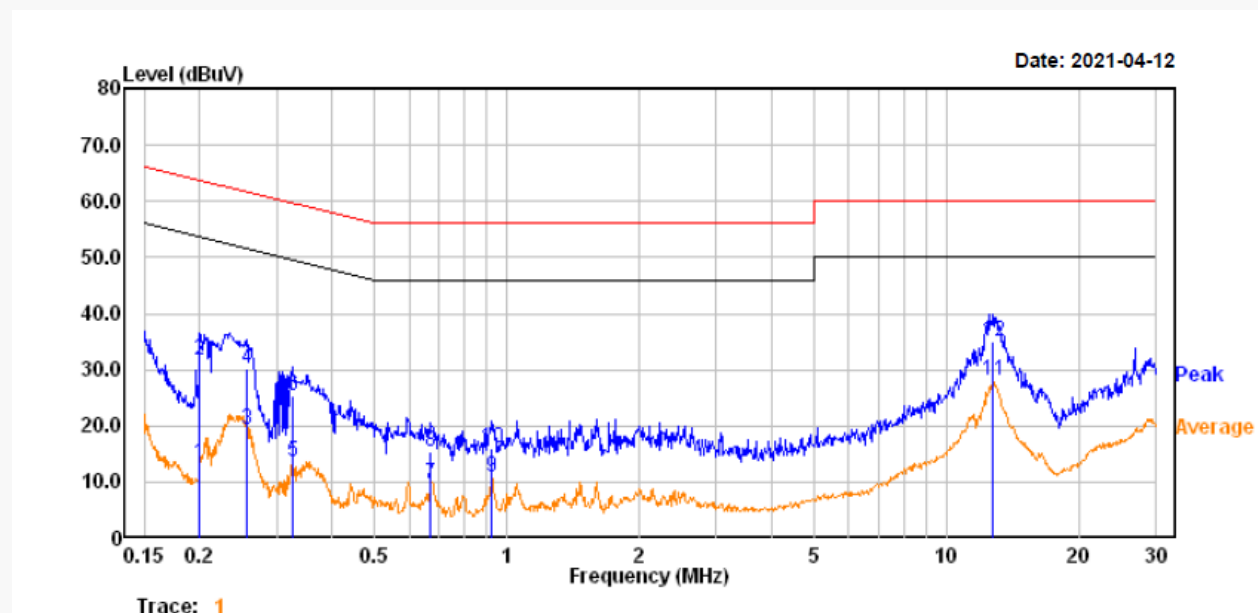AC 120V/60 Hz, Neutral

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.200	-6.60	19.82	13.22	53.60	-40.38	Average
2	0.200	11.80	19.82	31.62	63.60	-31.98	QP
3	0.257	-0.35	19.82	19.47	51.53	-32.06	Average
4	0.257	10.30	19.82	30.12	61.53	-31.41	QP
5	0.325	-6.24	19.82	13.58	49.58	-36.00	Average
6	0.325	5.50	19.82	25.32	59.58	-34.26	QP
7	0.672	-10.17	19.75	9.58	46.00	-36.42	Average
8	0.672	-4.30	19.75	15.45	56.00	-40.55	QP
9	0.925	-8.92	19.75	10.83	46.00	-35.17	Average
10	0.925	-3.70	19.75	16.05	56.00	-39.95	QP
11	12.793	8.40	19.60	28.00	50.00	-22.00	Average
12	12.793	15.30	19.60	34.90	60.00	-25.10	QP

Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

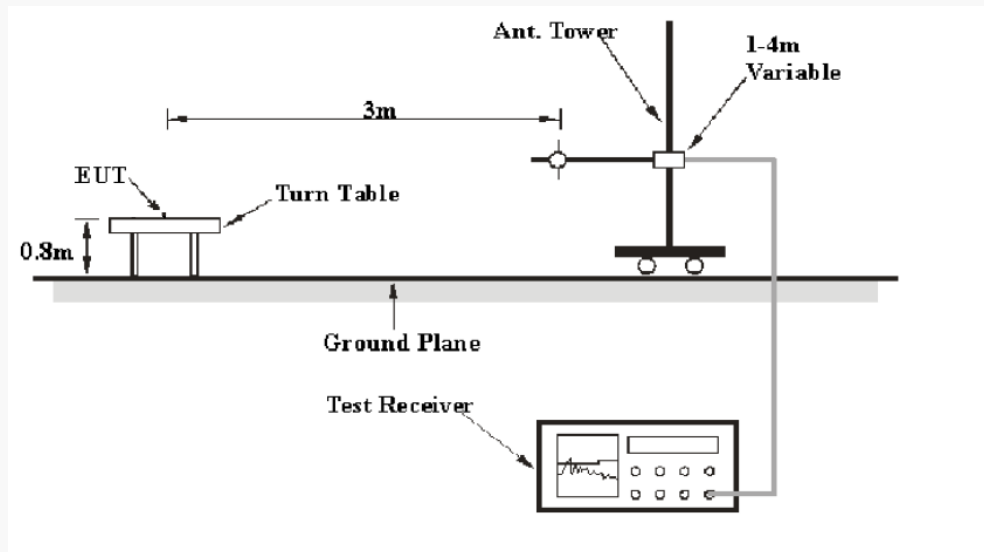

Above 1GHz:

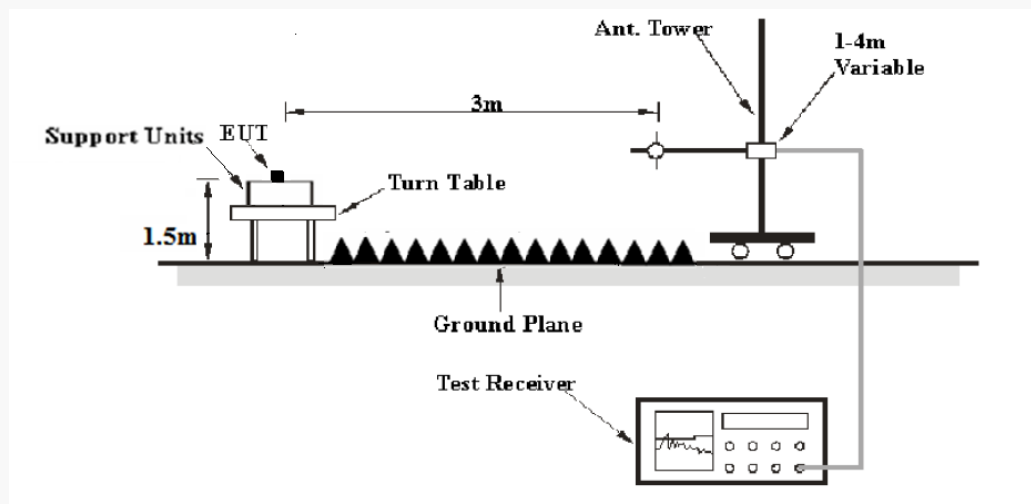

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	AVG

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30MHz -1GHz, peak and Average detection mode for frequencies above 1 GHz.

Level & Over Limit Calculation - Below 1 GHz

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor (dB/m)} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss(dB)} - \text{Amplifier Gain (dB)} \\ \text{Level(dB}\mu\text{V/m)} &= \text{Read level (dB}\mu\text{V)} + \text{Factor (dB/m)}\end{aligned}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Level (dB}\mu\text{V/m)} - \text{Limit (dB}\mu\text{V/m)}$$

Corrected Amplitude & Margin Calculation - Above 1 GHz

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliant with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Test Results Summary

According to the recorded data in following table, the EUT is compliant with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions


Temperature:	23.6~24.3℃
Relative Humidity:	50~52%
ATM Pressure:	101.1~101.3 kPa

The testing was performed by Chao Gao from 2021-04-08 to 2021-04-12.


EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz**

(Pre-scan with Low channel, Middle channel, High channel of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

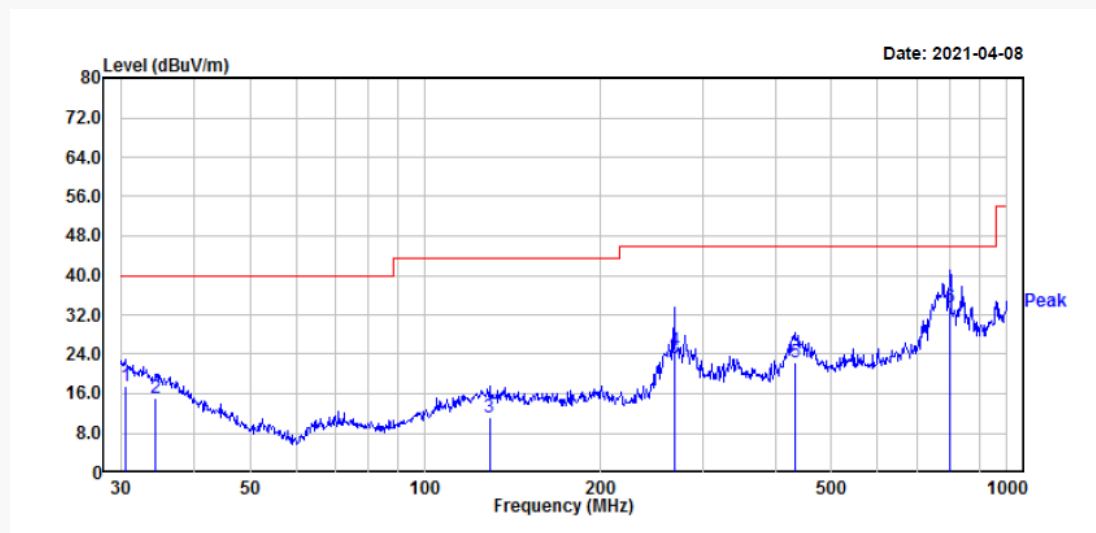Horizontal:

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	30.53	22.10	-4.61	17.49	40.00	-22.51	100	358	QP
2	34.40	22.40	-7.32	15.08	40.00	-24.92	100	357	QP
3	129.01	22.00	-10.97	11.03	43.50	-32.47	200	219	QP
4	268.49	35.50	-10.71	24.79	46.00	-21.21	100	283	QP
5	432.55	29.30	-7.11	22.19	46.00	-23.81	100	104	QP
6	798.98	34.50	-1.13	33.37	46.00	-12.63	100	289	QP

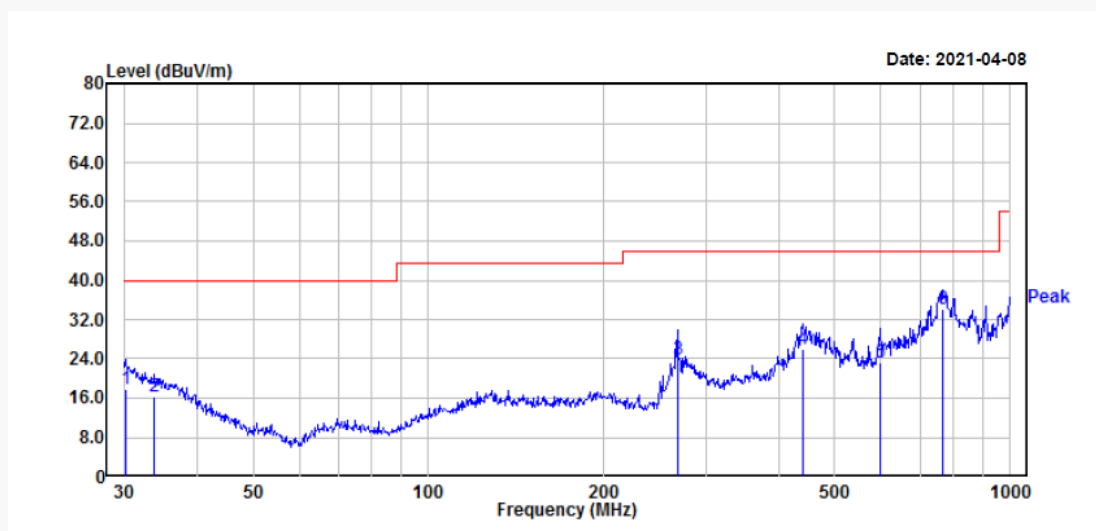Vertical:


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	30.21	22.10	-4.39	17.71	40.00	-22.29	100	133	QP
2	33.80	23.30	-6.90	16.40	40.00	-23.60	200	80	QP
3	268.49	34.50	-10.71	23.79	46.00	-22.21	200	289	QP
4	441.74	32.80	-6.81	25.99	46.00	-20.01	100	169	QP
5	597.22	28.30	-4.92	23.38	46.00	-22.62	200	24	QP
6	766.06	35.50	-1.53	33.97	46.00	-12.03	100	-4	QP

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:


1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV/m)

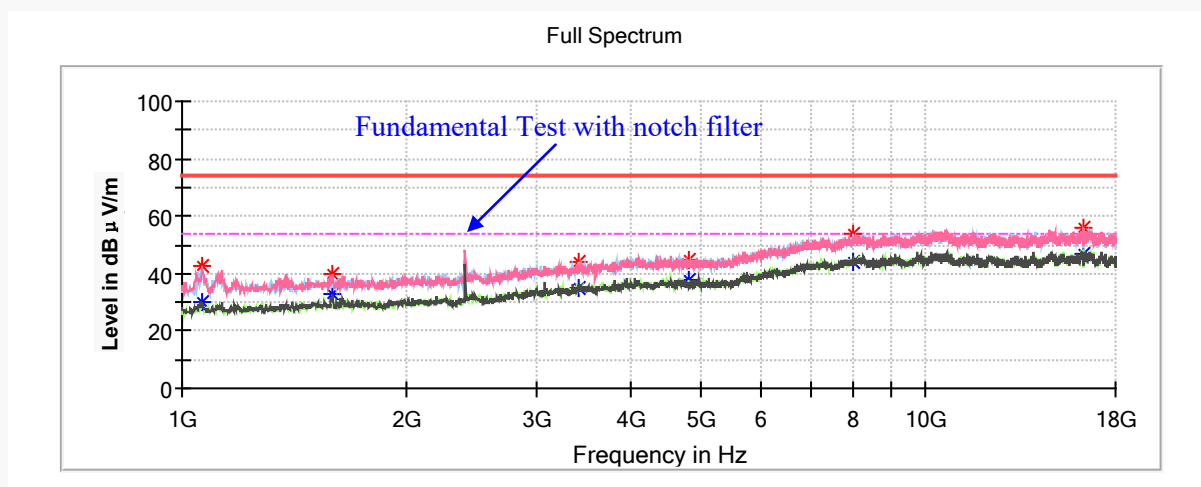Low Channel: 2405MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1064.600000	---	29.76	200.0	V	179.0	-12.1	54.00	24.24
1064.600000	42.80	---	200.0	V	179.0	-12.1	74.00	31.20
1596.000000	---	32.96	200.0	V	281.0	-9.1	54.00	21.04
1596.000000	40.17	---	200.0	V	281.0	-9.1	74.00	33.83
3420.800000	---	34.71	150.0	H	2.0	-2.0	54.00	19.29
3420.800000	44.39	---	150.0	H	2.0	-2.0	74.00	29.61
4810.000000	---	37.68	150.0	H	290.0	1.0	54.00	16.32
4810.000000	44.50	---	150.0	H	290.0	1.0	74.00	29.50
8007.400000	---	43.90	200.0	H	270.0	10.8	54.00	10.10
8007.400000	53.75	---	200.0	H	270.0	10.8	74.00	20.25
16277.900000	---	47.02	200.0	V	39.0	12.2	54.00	6.98
16277.900000	55.85	---	200.0	V	39.0	12.2	74.00	18.15

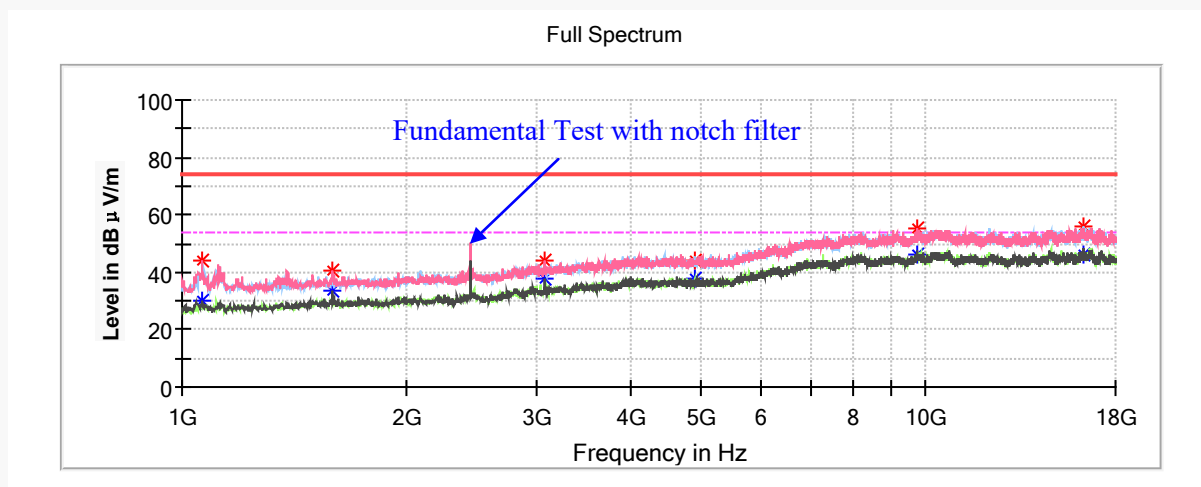Middle Channel: 2440MHz


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1062.900000	---	30.05	200.0	V	236.0	-12.1	54.00	23.95
1062.900000	43.92	---	200.0	V	236.0	-12.1	74.00	30.08
1591.600000	---	33.64	150.0	V	260.0	-9.1	54.00	20.36
1591.600000	40.73	---	150.0	V	260.0	-9.1	74.00	33.27
3070.600000	---	37.54	200.0	V	185.0	-3.0	54.00	16.46
3070.600000	43.80	---	200.0	V	185.0	-3.0	74.00	30.20
4880.000000	---	37.81	150.0	H	351.0	1.1	54.00	16.19
4880.000000	44.16	---	150.0	H	351.0	1.1	74.00	29.84
9724.400000	---	45.92	150.0	V	0.0	11.9	54.00	8.08
9724.400000	55.24	---	200.0	V	0.0	11.9	74.00	18.76
16252.400000	---	46.10	200.0	H	198.0	12.2	54.00	7.90
16252.400000	56.19	---	200.0	H	198.0	12.2	74.00	17.81

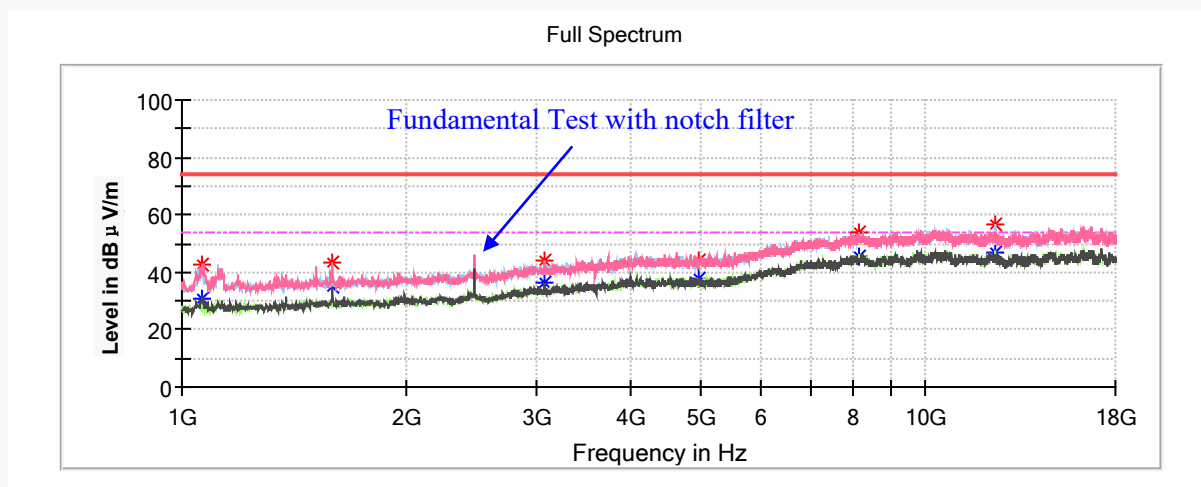High Channel: 2480MHz


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1066.300000	42.96	---	200.0	V	167.0	-12.1	74.00	31.04
1066.300000	---	30.91	200.0	V	167.0	-12.1	54.00	23.09
1595.000000	---	35.29	200.0	V	279.0	-9.1	54.00	18.71
1595.000000	43.33	---	200.0	V	279.0	-9.1	74.00	30.67
3070.600000	44.39	---	200.0	V	188.0	-3.0	74.00	29.61
3070.600000	---	36.06	200.0	V	188.0	-3.0	54.00	17.94
4960.000000	44.33	---	200.0	H	19.0	1.1	74.00	29.67
4960.000000	---	37.79	200.0	H	19.0	1.1	54.00	16.21
8150.200000	---	45.33	200.0	H	292.0	10.8	54.00	8.67
8150.200000	53.72	---	200.0	H	292.0	10.8	74.00	20.28
12396.800000	---	46.86	150.0	H	116.0	11.7	54.00	7.14
12396.800000	56.63	---	150.0	H	116.0	11.7	74.00	17.37

18GHz - 25GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case middle channel of operation in Y-axis of orientation was recorded)

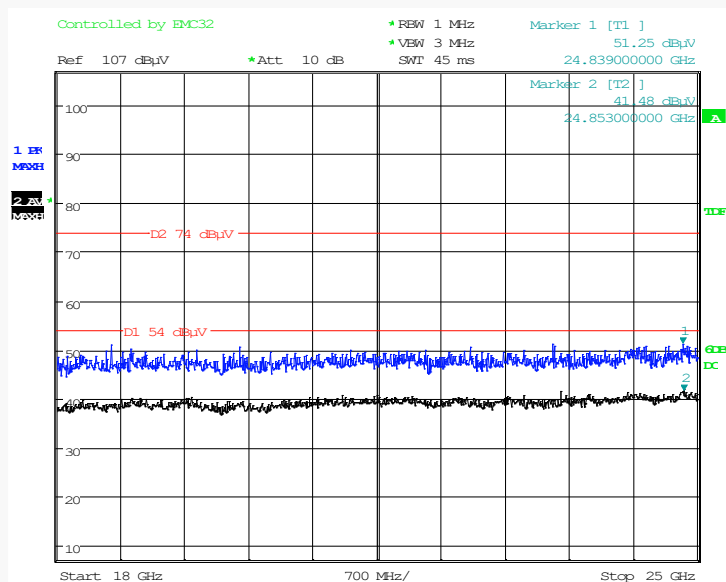Horizontal

Date: 9.APR.2021 13:49:11

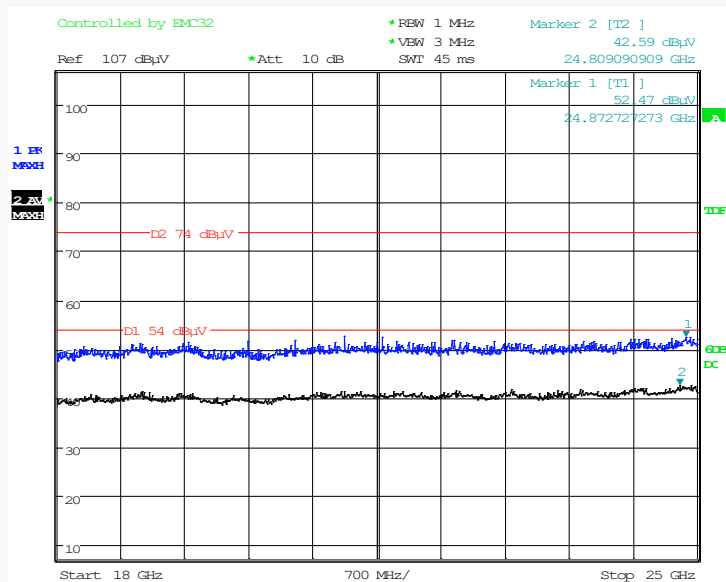Vertical

Date: 9.APR.2021 14:00:20

Restricted Bands Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)



Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)


Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV/m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2405MHz								
2390.00	51.03	---	150.0	V	65.0	3.8	74.00	22.97
2390.00	---	46.00	150.0	V	65.0	3.8	54.00	8.00
High Channel: 2480MHz								
2483.50	53.11	---	150.0	V	157.0	4.1	74.00	20.89
2483.50	---	48.84	150.0	V	157.0	4.1	54.00	5.16

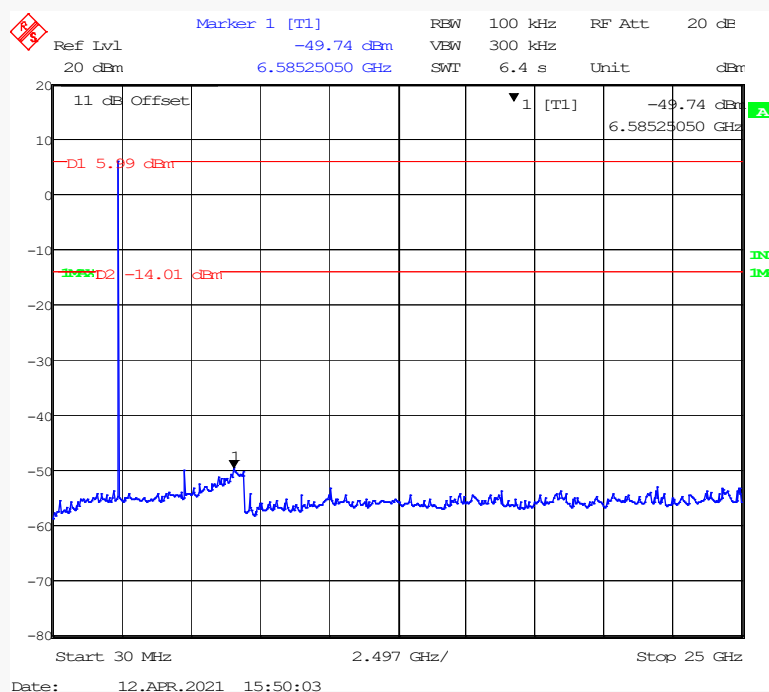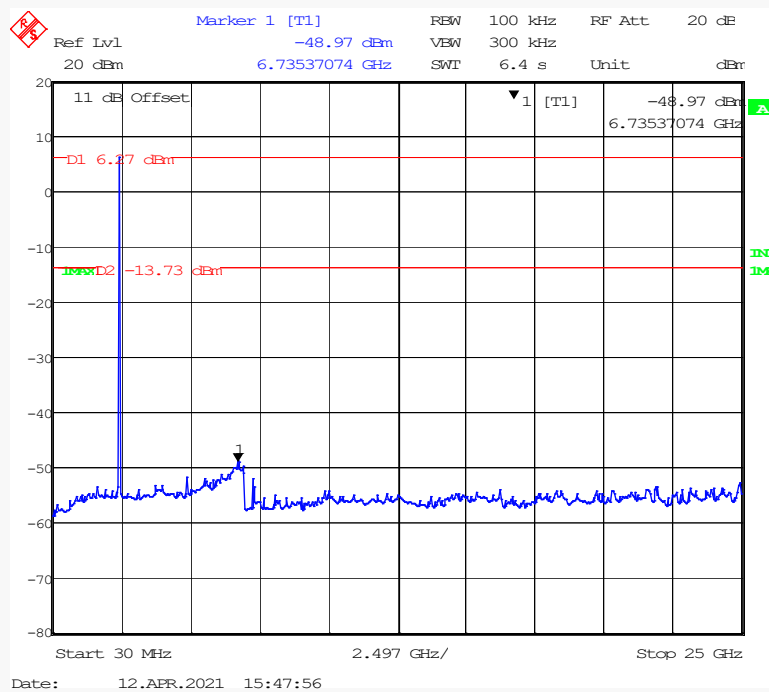Conducted Spurious Emissions at Antenna Port**Low Channel : 2405MHz****Middle Channel : 2440MHz**

High Channel : 2480MHz

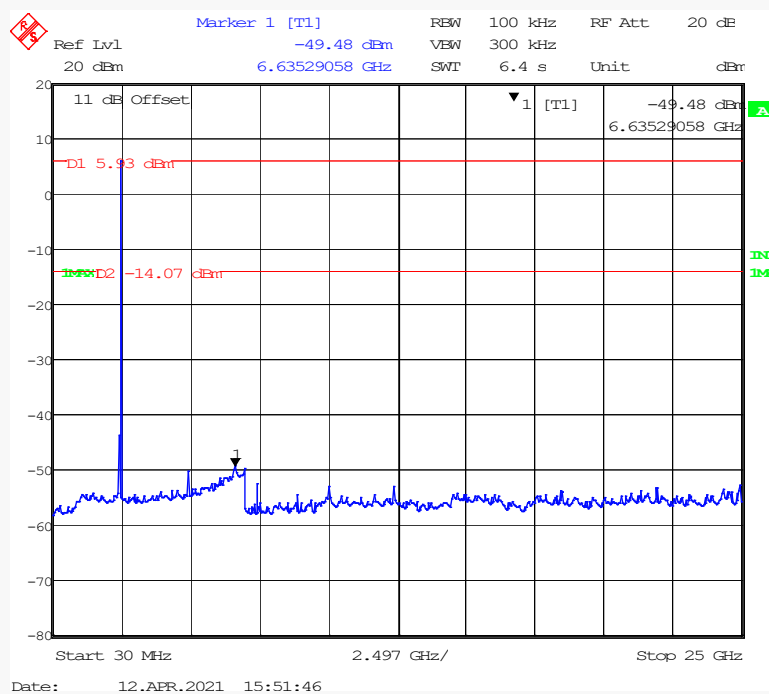

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	102.3 kPa


The testing was performed by Chao Gao on 2021-04-12.

Test Result: Compliant.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	2405	1.683	≥ 0.5
Middle	2440	1.663	≥ 0.5
High	2480	1.683	≥ 0.5


Low Channel : 2405MHz

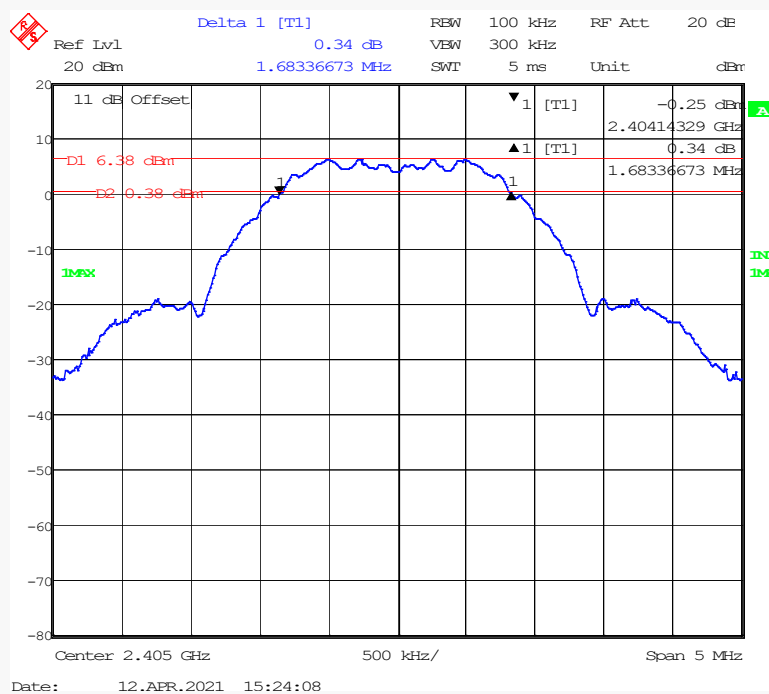

Middle Channel : 2440MHz

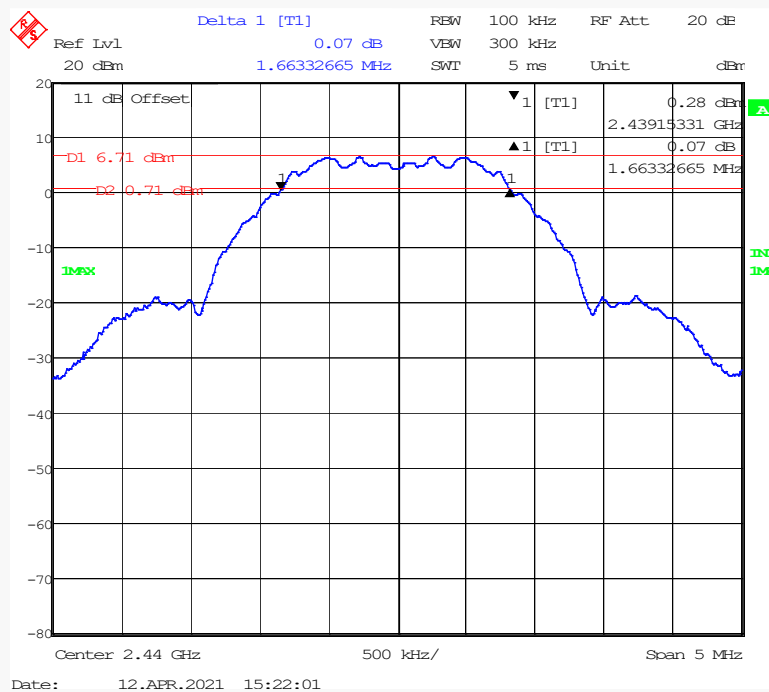

High Channel : 2480MHz

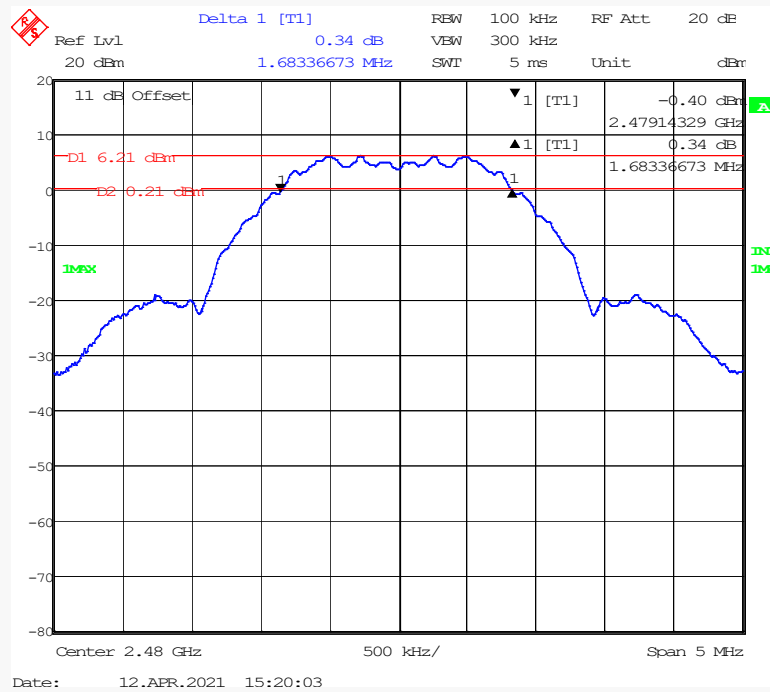

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliant with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

1. Set the RBW $\geq$ DTS bandwidth.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 3 \times$ RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.





Test Data**Environmental Conditions**

Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	102.3 kPa


The testing was performed by Chao Gao on 2021-04-12.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	2405	9.81	30	Pass
Middle	2440	9.98	30	Pass
High	2480	9.48	30	Pass

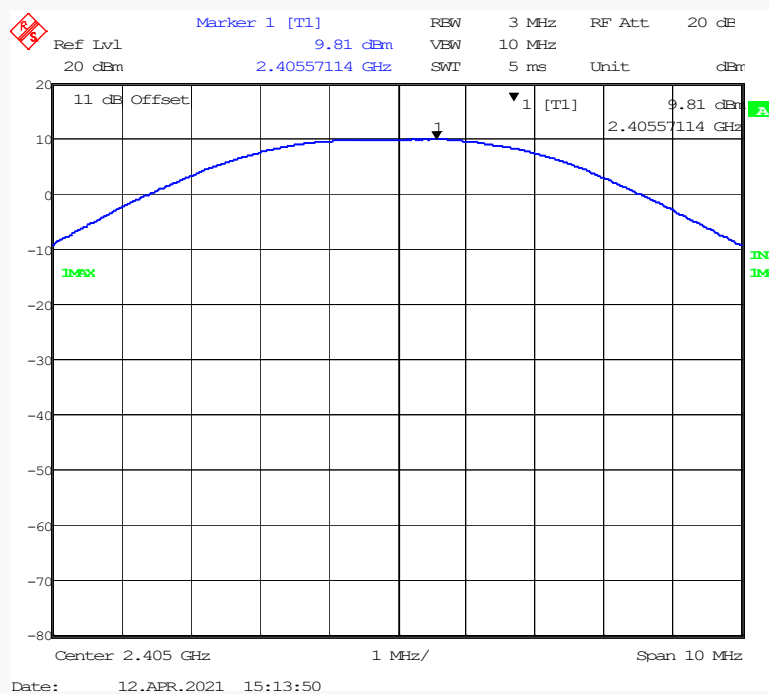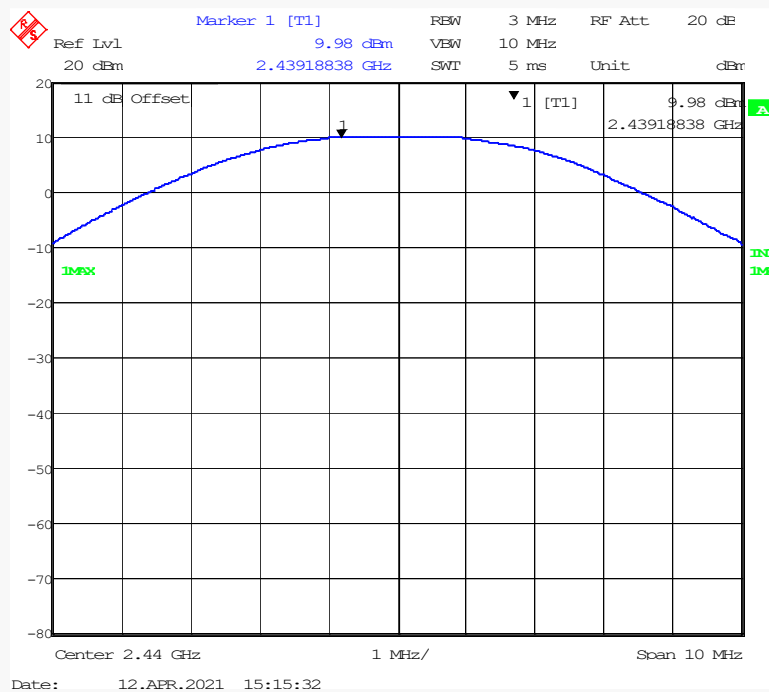Low Channel : 2405MHz**Middle Channel : 2440MHz**

High Channel : 2480MHz

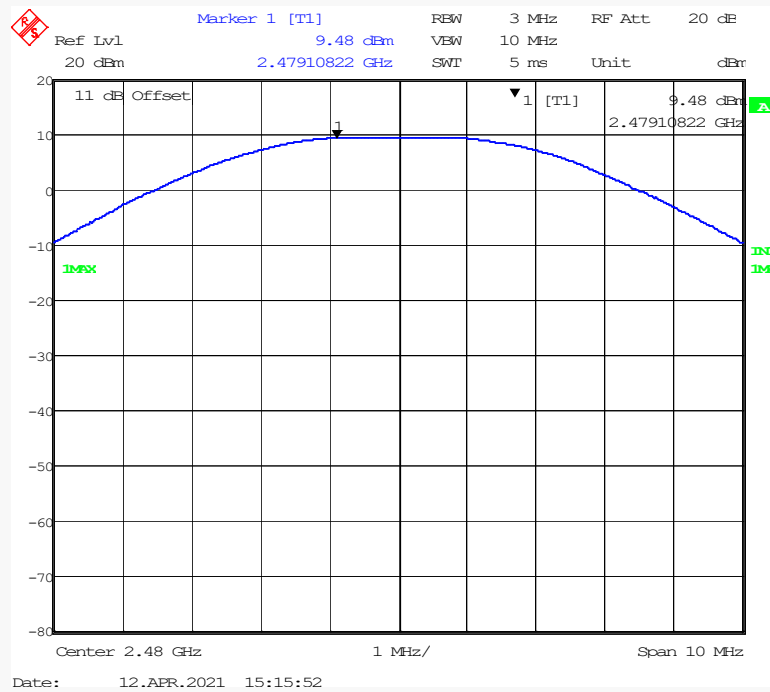

FCC §15.247(d) – BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	102.3 kPa

The testing was performed by Chao Gao on 2021-04-12.


EUT operation mode: Transmitting

Test Result: Compliant.

Left Side

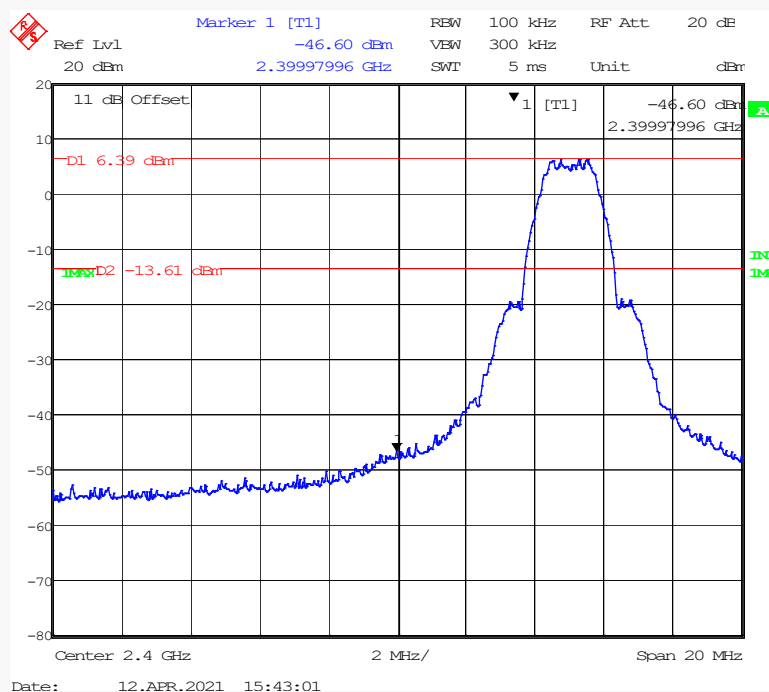

Right Side

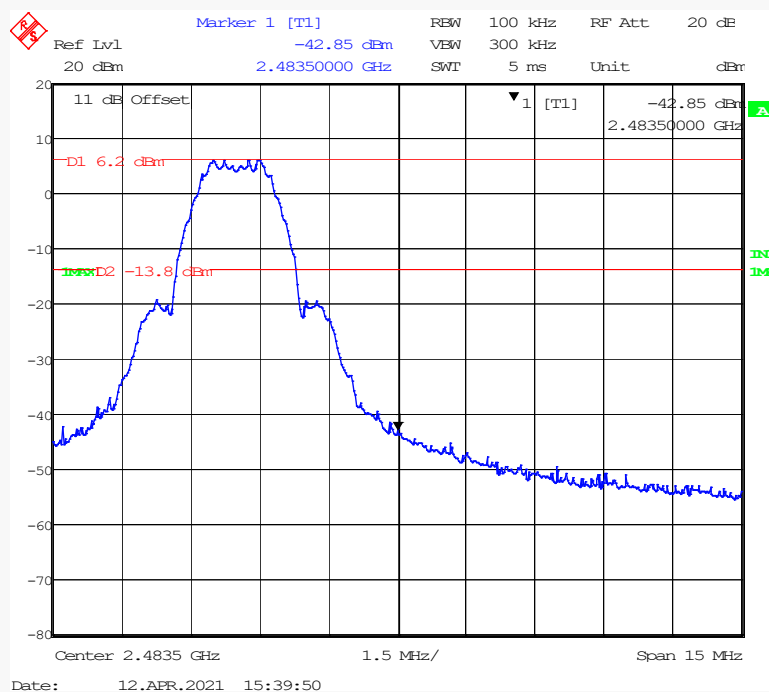

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate Compliant.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 * \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data**Environmental Conditions**

Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	102.3 kPa

The testing was performed by Chao Gao on 2021-04-12.

EUT operation mode: Transmitting

Test Result: Compliant.

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2405	-5.47	≤8
Middle Channel	2440	-5.43	≤8
High Channel	2480	-5.88	≤8

REF Lvl 20 dBm
 Marker 1 [T1] 2.40542336 GHz
 REW 3 kHz
 VEW 10 kHz
 SWT 720 ms
 RF Att 20 dB
 Unit dBm

11 dB Offset
 1 [T1]
 -5.47 dBm
 2.40542336 GHz

IMX
 IM

Center 2.405 GHz
 253 kHz/
 Span 2.53 MHz

Date: 12.APR.2021 15:26:19

REF Lvl: 20 dBm
 Marker 1 [T1]: -5.43 dBm
 BW: 3 kHz
 RF Att: 20 dB
 Unit: dBm
 Span: 2.5 MHz
 Center: 2.44 GHz
 Resolution: 250 kHz
 Date: 12.APR.2021 15:28:15

High Channel : 2480MHz



Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******