



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: HONG KONG IPRO TECHNOLOGY CO.,LIMITED

Address: 12/F,3 LOCKHART ROAD,WANCHAI ,HK

FCC ID: PQ4IPROSAMBA65S

Product Name: Smart Phone

Model Number: SAMBA65S

**Standard(s): 47 CFR Part 2
47 CFR Part 22, Subpart H
47 CFR Part 24, Subpart E
ANSI C63.26-2015
KDB 971168 D01 Power Meas License Digital Systems
v03r01**

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR21090076-00C

Date Of Issue: 2021-11-11

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 DESCRIPTION OF TEST CONFIGURATION.....	5
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Configuration of Test Setup.....	8
1.2.5 Block Diagram of Test Setup.....	8
1.3 MEASUREMENT UNCERTAINTY	9
2. SUMMARY OF TEST RESULTS	10
3. REQUIREMENTS AND TEST PROCEDURES	11
3.1 Applicable Standard For Part 22 Subpart H:.....	11
3.1.1 RF Output Power	11
3.1.2 Spurious Emissions	11
3.1.3 Frequency stability.....	11
3.2 Applicable Standard For Part 24 Subpart E:	12
3.2.1 RF Output Power	12
3.2.2 Spurious Emissions.....	12
3.2.3 Frequency stability.....	12
3.4 Test Method:	13
3.4.1 RF Output Power	13
3.4.2 Occupied Bandwidth.....	13
3.4.3 Spurious emissions at antenna terminals.....	14
3.4.4 Out of band emission	14
3.4.5 Frequency stability.....	14
3.4.6 Field strength of spurious radiation.....	15
4. Test DATA AND RESULTS	17
4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND:.....	17
4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND:.....	23
4.3 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 2:	29
4.4 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 5:	36
4.5 SPURIOUS EMISSIONS	43

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Smart Phone
EUT Model:	SAMBA65S
Operation modes:	GSM Voice, GPRS/EDGE Data, WCDMA(R99 (Data), HSDPA,HSUPA)
Operation Bands and modes:	GSM/GPRS/EDGE: 850/1900 WCDMA: Band 2/5
Modulation Type:	GMSK,8PSK, QPSK, 16QAM
Rated Input Voltage:	DC 3.85 V from battery or DC 5V from adapter
Serial Number:	CR21090076-RF-S1
EUT Received Date:	2021.9.28
EUT Received Status:	Good

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	IPRO	NTR-S05	Input: AC100V-240V 50/60Hz 300mA Output: DC5.0V DC 2A

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No
The maximum power was configured per 3GPP Standard for each operation modes as below setting:	
GSM/GPRS/EGPRS	
Function: Menu select > GSM Mobile Station > GSM 850/1900 Press Connection control to choose the different menus Press RESET > choose all the reset all settings Connection Press Signal Off to turn off the signal and change settings Network Support > GSM + GPRS or GSM + EGSM Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting <ul style="list-style-type: none"> > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850 > 30 dBm for GPRS 1900 > 27 dBm for EGPRS 850 > 26 dBm for EGPRS 1900 BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0 > 4 dB Slot Config > Unchanged (if already set under MS signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)	
Bit Stream > 2E9-1 PSR Bit Stream AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input Connection Press Signal on to turn on the signal and change settings	

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	1 /15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.



	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2		4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30 15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI's	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	110 825
Un-Known	ANTENNA	Unknown	Unknown

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

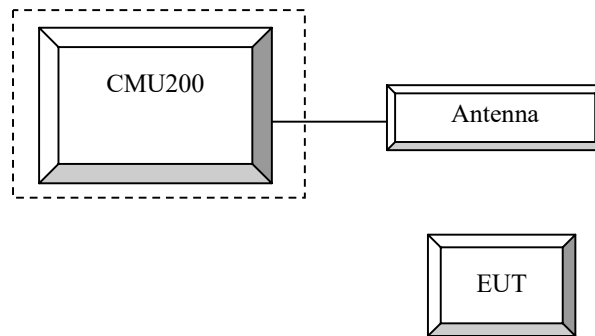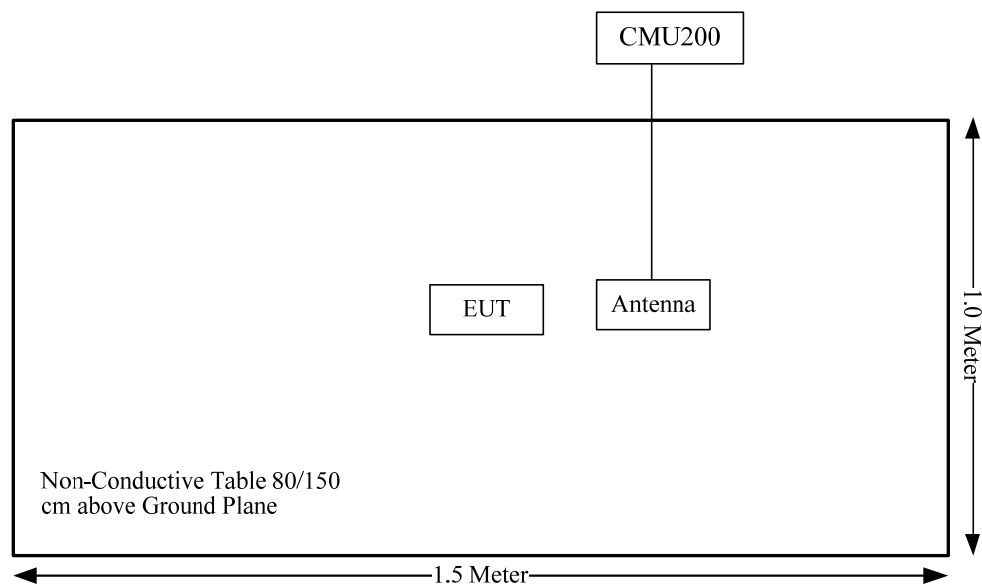1.2.4 Configuration of Test Setup**1.2.5 Block Diagram of Test Setup**

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	Compliance
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
FCC§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
FCC§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
FCC§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance
FCC§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Applicable Standard For Part 22 Subpart H:

3.1.1 RF Output Power

FCC §22.913(a)

(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

(1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

3.2 Applicable Standard For Part 24 Subpart E:

3.2.1 RF Output Power

FCC §24.232(c)

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

3.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

3.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.4 Test Method:

3.4.1 RF Output Power

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5 and KDB 971168 D01 Power Meas License Digital Systems v03r01:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

3.4.2 Occupied Bandwidth

According to CFR Part 2.1049, ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).

b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.

c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3. NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

d) Set the detection mode to peak, and the trace mode to max-hold.

e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

3.4.3 Spurious emissions at antenna terminals

According to CFR Part 2.1051, 22.917(a), 24.238(a), ANSI C63.26-2015 Section 5.7.4, KDB 971168 D01 Power Meas License Digital Systems v03r01:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),⁸ effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

3.4.4 Out of band emission

According to CFR Part 2.1051, 22.917(a), 24.238(a), ANSI C63.26-2015 Section 5.7.3, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

3.4.5 Frequency stability

According to CFR Part 2.1055, ANSI C63.26-2015 Section 5.6, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.

The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

3.4.6 Field strength of spurious radiation

According to CFR Part 2.1053, 22.917(a), 24.238(a), ANSI C63.26-2015 Section 5.5.3:

Test setup:

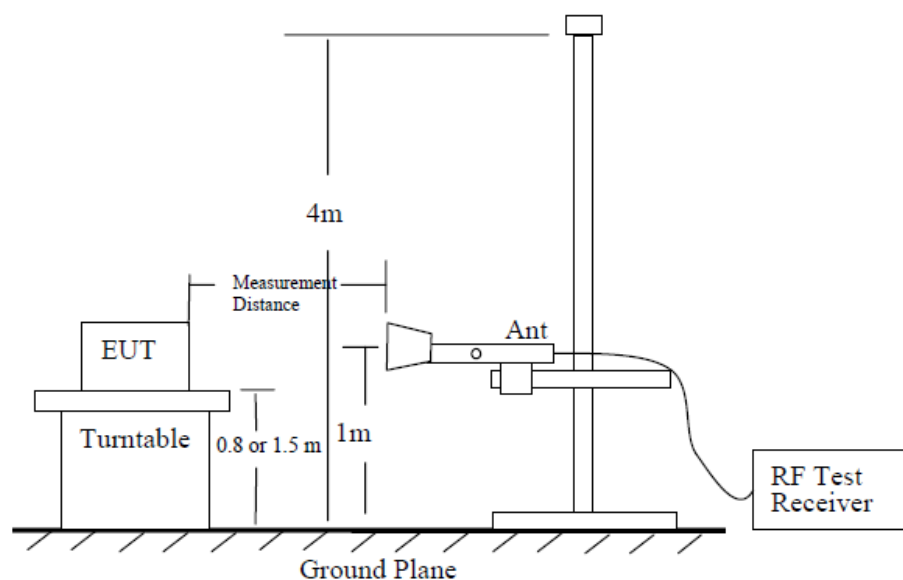


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

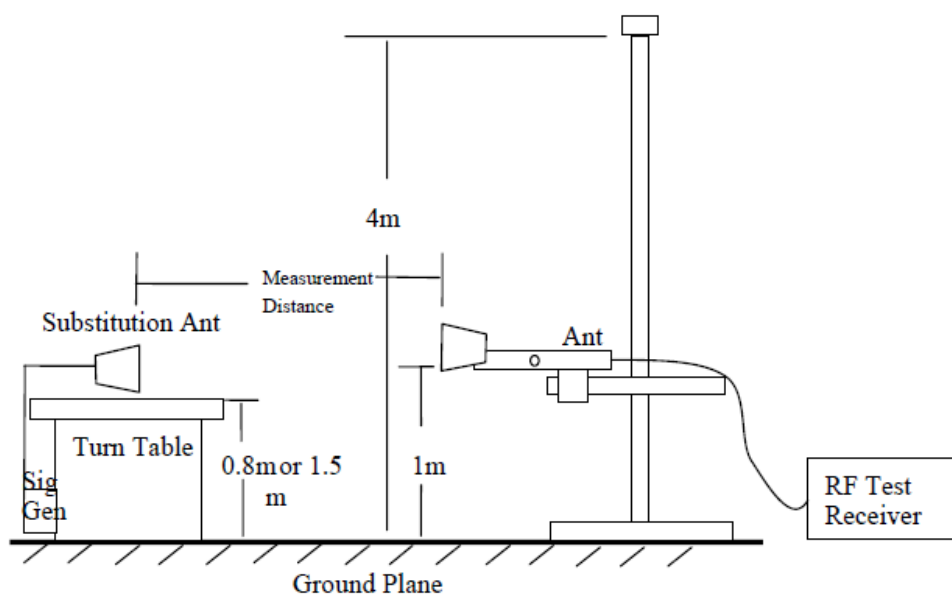


Figure 7—Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where

P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4. Test DATA AND RESULTS

4.1 Antenna Port Test Data and Results for GSM 850 band:

Serial Number:	CR21090076-RF-S1	Test Date:	2021/11/4~2021/11/5
Test Site:	RF	Test Mode:	Transmitting
Tester:	Thor Lei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9~26.8	Relative Humidity: (%)	61~66	ATM Pressure: (kPa)	100.9~101.1
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	6155/10/22	Each time	N/A
R&S	Universal Radio Communication Tester	CMU200	110 825	2021/7/22	2022/7/21
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150	1982/3/16	2021/7/22	2022/7/22
UNI-T	Multimeter	UT39A+	C210582554	2021/9/30	2022/9/30
E-Microwave	Two-way Splitter	ODP-1-6	OE0120176	Each Time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

EUT Information@ GSM 850 Band▲:

Antenna Gain (dBi):	-1.2	Antenna Gain (dBd):	-3.35	Cable Loss (dB):	0.2
Operation Voltage(V _{DC}):					
Lowest:	3.6	Normal:	3.85	Highest:	4.35

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	824.2	836.6	848.8
GPRS	824.2	836.6	848.8
EDGE	824.2	836.6	848.8

Test Data:**FCC§2.1046;§ 22.913 (a):RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	32.87	32.95	32.68	29.4	38.45
GPRS 1 Slot	32.81	32.84	32.91	29.36	38.45
GPRS 2 Slots	30.72	30.93	30.88	27.38	38.45
GPRS 3 Slots	29.28	29.57	29.46	26.02	38.45
GPRS 4 Slots	27.27	27.38	27.17	23.83	38.45
EDGE 1 Slot	26.83	26.94	26.85	23.39	38.45
EDGE 2 Slots	25.14	25.26	25.21	21.71	38.45
EDGE 3 Slots	23.69	23.82	23.79	20.27	38.45
EDGE 4 Slots	21.27	21.39	21.14	17.84	38.45
Note: ERP=Conducted Power(dBm) - Cable loss(dB) + Antenna Gain(dBd)					
				Result:	Pass

FCC §2.1049, §22.917, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.243	0.243	0.246	0.318	0.315	0.318
EDGE	0.246	0.243	0.245	0.324	0.32	0.324
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	---


FCC §2.1051, §22.917(a):Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	--


FCC §2.1055, §22.355: Frequency Stability					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	13	0.02	2.5
	-20	3.85	10	0.01	2.5
	-10	3.85	8	0.01	2.5
	0	3.85	12	0.01	2.5
	10	3.85	14	0.02	2.5
	20	3.85	16	0.02	2.5
	30	3.85	12	0.01	2.5
	40	3.85	15	0.02	2.5
	50	3.85	-12	-0.01	2.5
Frequency Stability vs. Voltage	20	3.6	10	0.01	2.5
	20	4.35	14	0.02	2.5
				Result:	Pass

Test Modulation:	8PSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	-14	-0.02	2.5
	-20	3.85	15	0.02	2.5
	-10	3.85	13	0.02	2.5
	0	3.85	12	0.01	2.5
	10	3.85	13	0.02	2.5
	20	3.85	14	0.02	2.5
	30	3.85	12	0.01	2.5
	40	3.85	13	0.02	2.5
	50	3.85	-12	-0.01	2.5
Frequency Stability vs. Voltage	20	3.6	-8	-0.01	2.5
	20	4.35	14	0.02	2.5
				Result:	Pass


Test Plots:

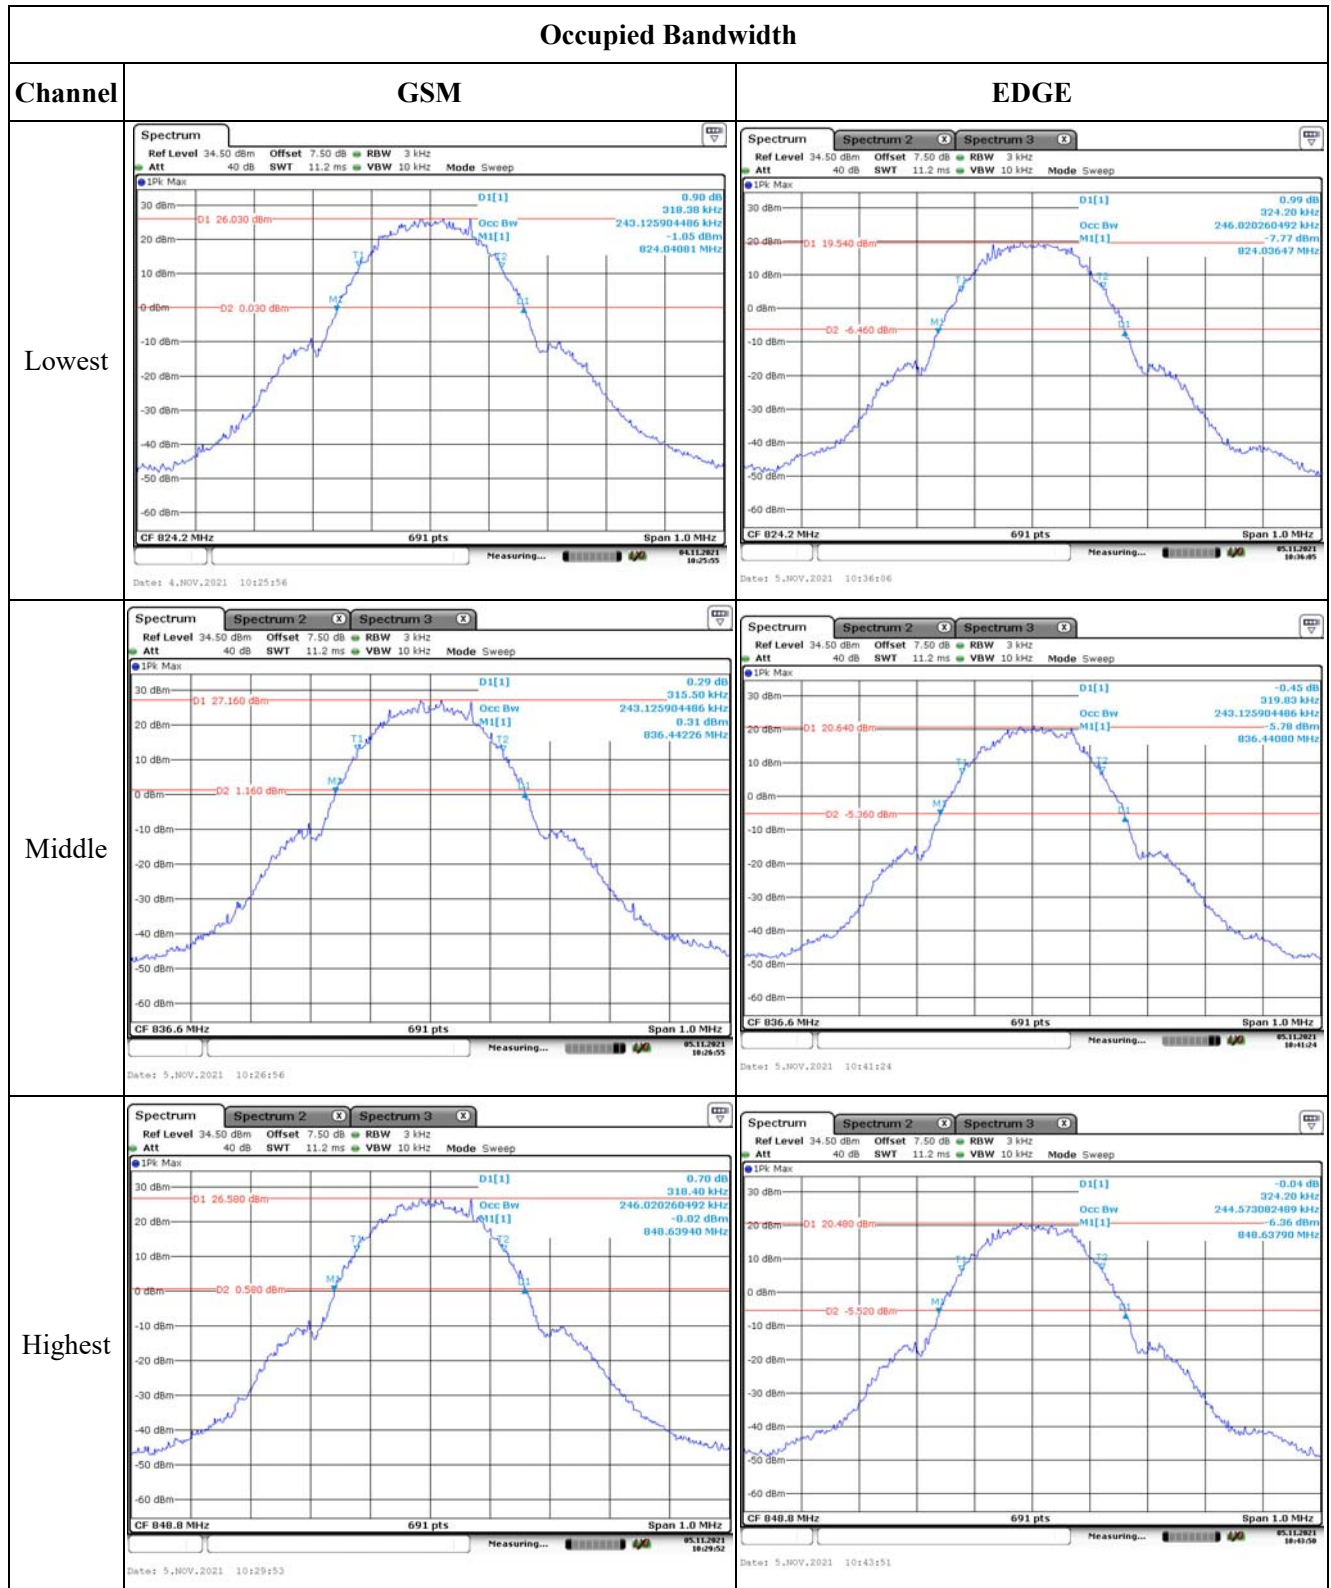

Spurious Emissions at Antenna Terminal

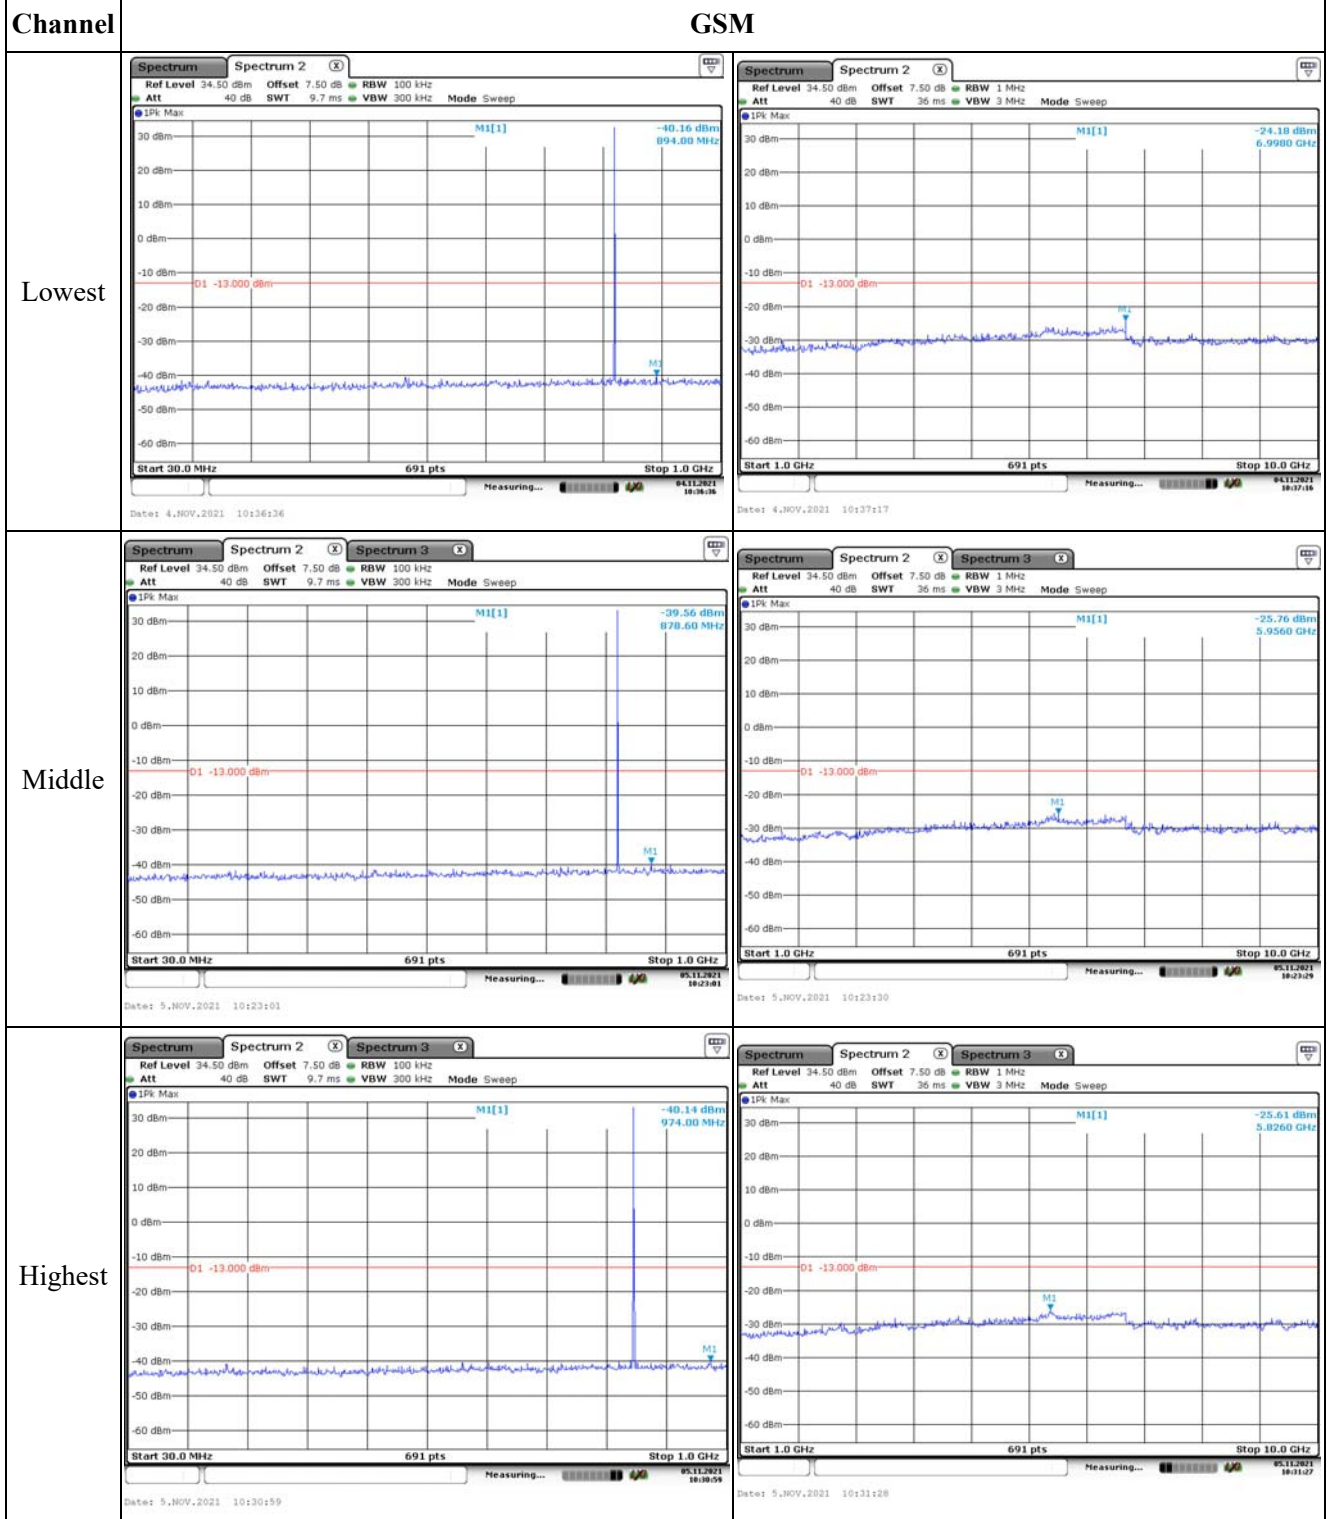

Out of band emission, Band Edge

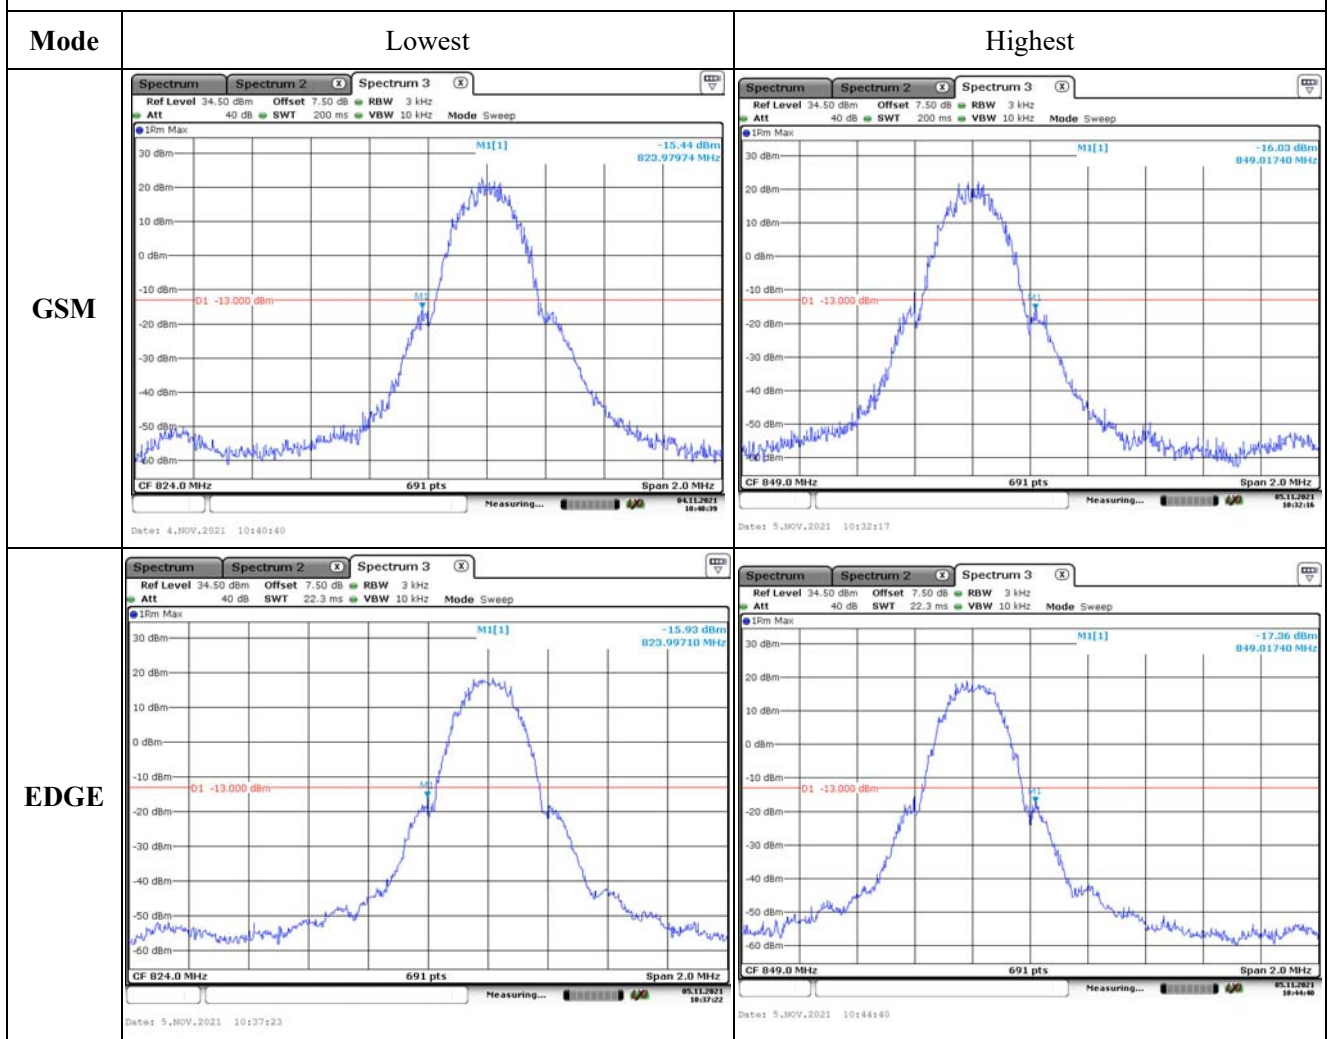

4.2 Antenna Port Test Data and Results for GSM 1900 band:

Serial Number:	CR21090076-RF-S1	Test Date:	2021/11/4~2021/11/5
Test Site:	RF	Test Mode:	Transmitting
Tester:	Thor Lei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9~26.8	Relative Humidity: (%)	61~66	ATM Pressure: (kPa)	100.9~101.1
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
R&S	Universal Radio Communication Tester	CMU200	110 825	2021/7/22	2022/7/21
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021/7/22	2022/7/22
UNI-T	Multimeter	UT39A+	C210582554	2021/9/30	2022/9/30
E-Microwave	Two-way Splitter	ODP-1-6	OE0120176	Each Time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

EUT Information@PCS1900 Band▲:

Antenna Gain (dBi):	-1.62	Cable Loss (dB):	0.3
Operation Voltage(V _{DC}):			
Lowest:	3.6	Normal:	3.85
		Highest:	4.35

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	1850.2	1880	1909.8
GPRS	1850.2	1880	1909.8
EDGE	1850.2	1880	1909.8

Test Data:**FCC§2.1046;§ 24.232 (c):RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP(dBm)	EIRP Limit(dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	29.58	29.67	29.51	27.75	33
GPRS 1 Slot	29.37	29.45	29.31	27.53	33
GPRS 2 Slots	27.84	27.69	27.74	25.92	33
GPRS 3 Slots	26.11	26.23	26.38	24.46	33
GPRS 4 Slots	24.25	24.18	24.07	22.33	33
EDGE 1 Slot	25.81	25.77	25.67	23.89	33
EDGE 2 Slots	24.12	24.23	24.14	22.31	33
EDGE 3 Slots	22.54	22.63	22.51	20.71	33
EDGE 4 Slots	20.27	20.36	20.28	18.44	33

Note: EIRP=Conducted Power(dBm) - Cable loss(dB) + Antenna Gain(dBi)

Result:**Pass****FCC §2.1049, §24.238:Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.245	0.247	0.247	0.316	0.314	0.317
EDGE	0.239	0.239	0.24	0.318	0.32	0.32

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--


FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---


FCC §2.1055, §24.235: Frequency Stability					
Test Modulation:	GMSK		Test Channel:	1880	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Result
			(Hz)	(ppm)	
Frequency Stability vs. Temperature	-30	3.85	15	0.01	Pass
	-20	3.85	-14	-0.01	Pass
	-10	3.85	16	0.01	Pass
	0	3.85	12	0.01	Pass
	10	3.85	13	0.01	Pass
	20	3.85	14	0.01	Pass
	30	3.85	10	0.01	Pass
	40	3.85	12	0.01	Pass
	50	3.85	14	0.01	Pass
Frequency Stability vs. Voltage	20	3.6	-12	-0.01	Pass
	20	4.35	-10	-0.01	Pass
				Result:	Pass

Test Modulation:	8PSK		Test Channel:	1880	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Result
			(Hz)	(ppm)	
Frequency Stability vs. Temperature	-30	3.85	16	0.01	Pass
	-20	3.85	14	0.01	Pass
	-10	3.85	12	0.01	Pass
	0	3.85	13	0.01	Pass
	10	3.85	15	0.01	Pass
	20	3.85	14	0.01	Pass
	30	3.85	12	0.01	Pass
	40	3.85	-13	-0.01	Pass
	50	3.85	-15	-0.01	Pass
Frequency Stability vs. Voltage	20	3.6	10	0.01	Pass
	20	4.35	12	0.01	Pass
				Result:	Pass


Test Plots:

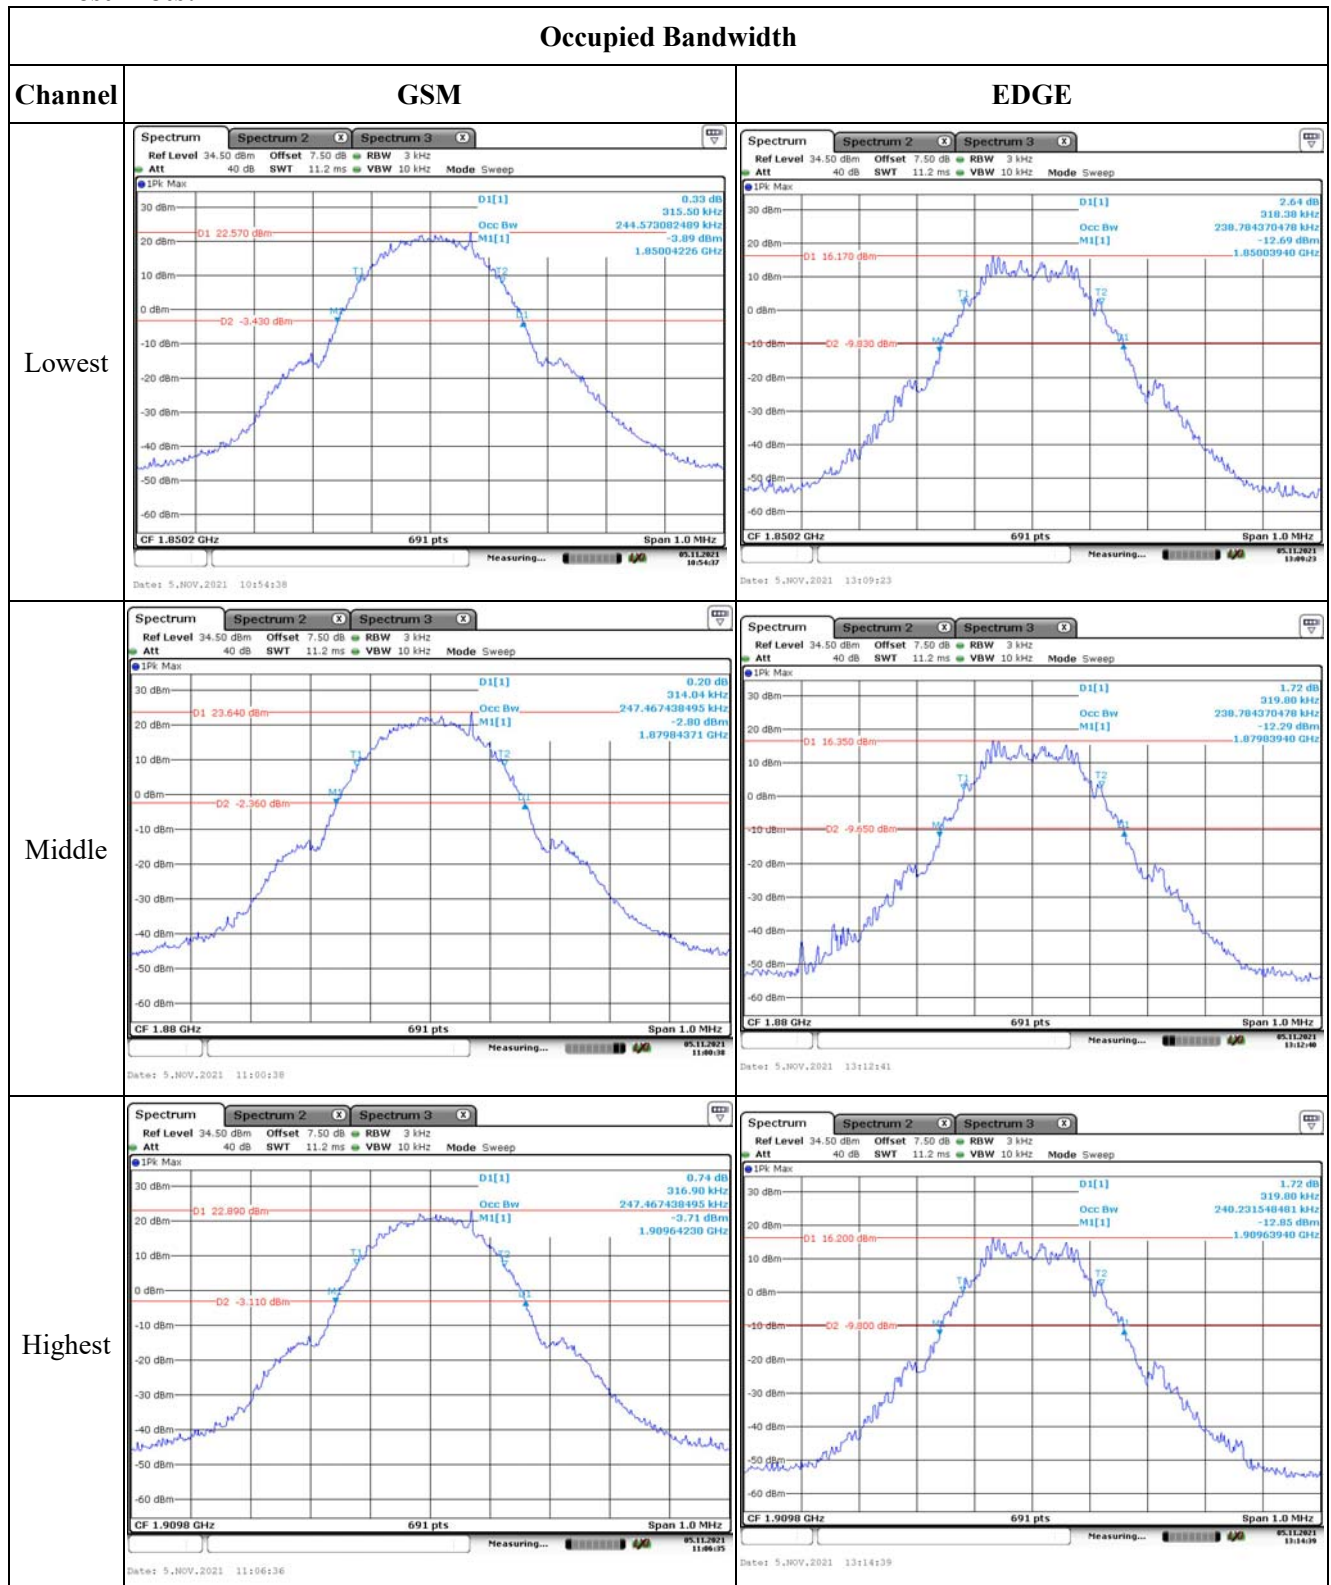

Spurious Emissions at Antenna Terminal

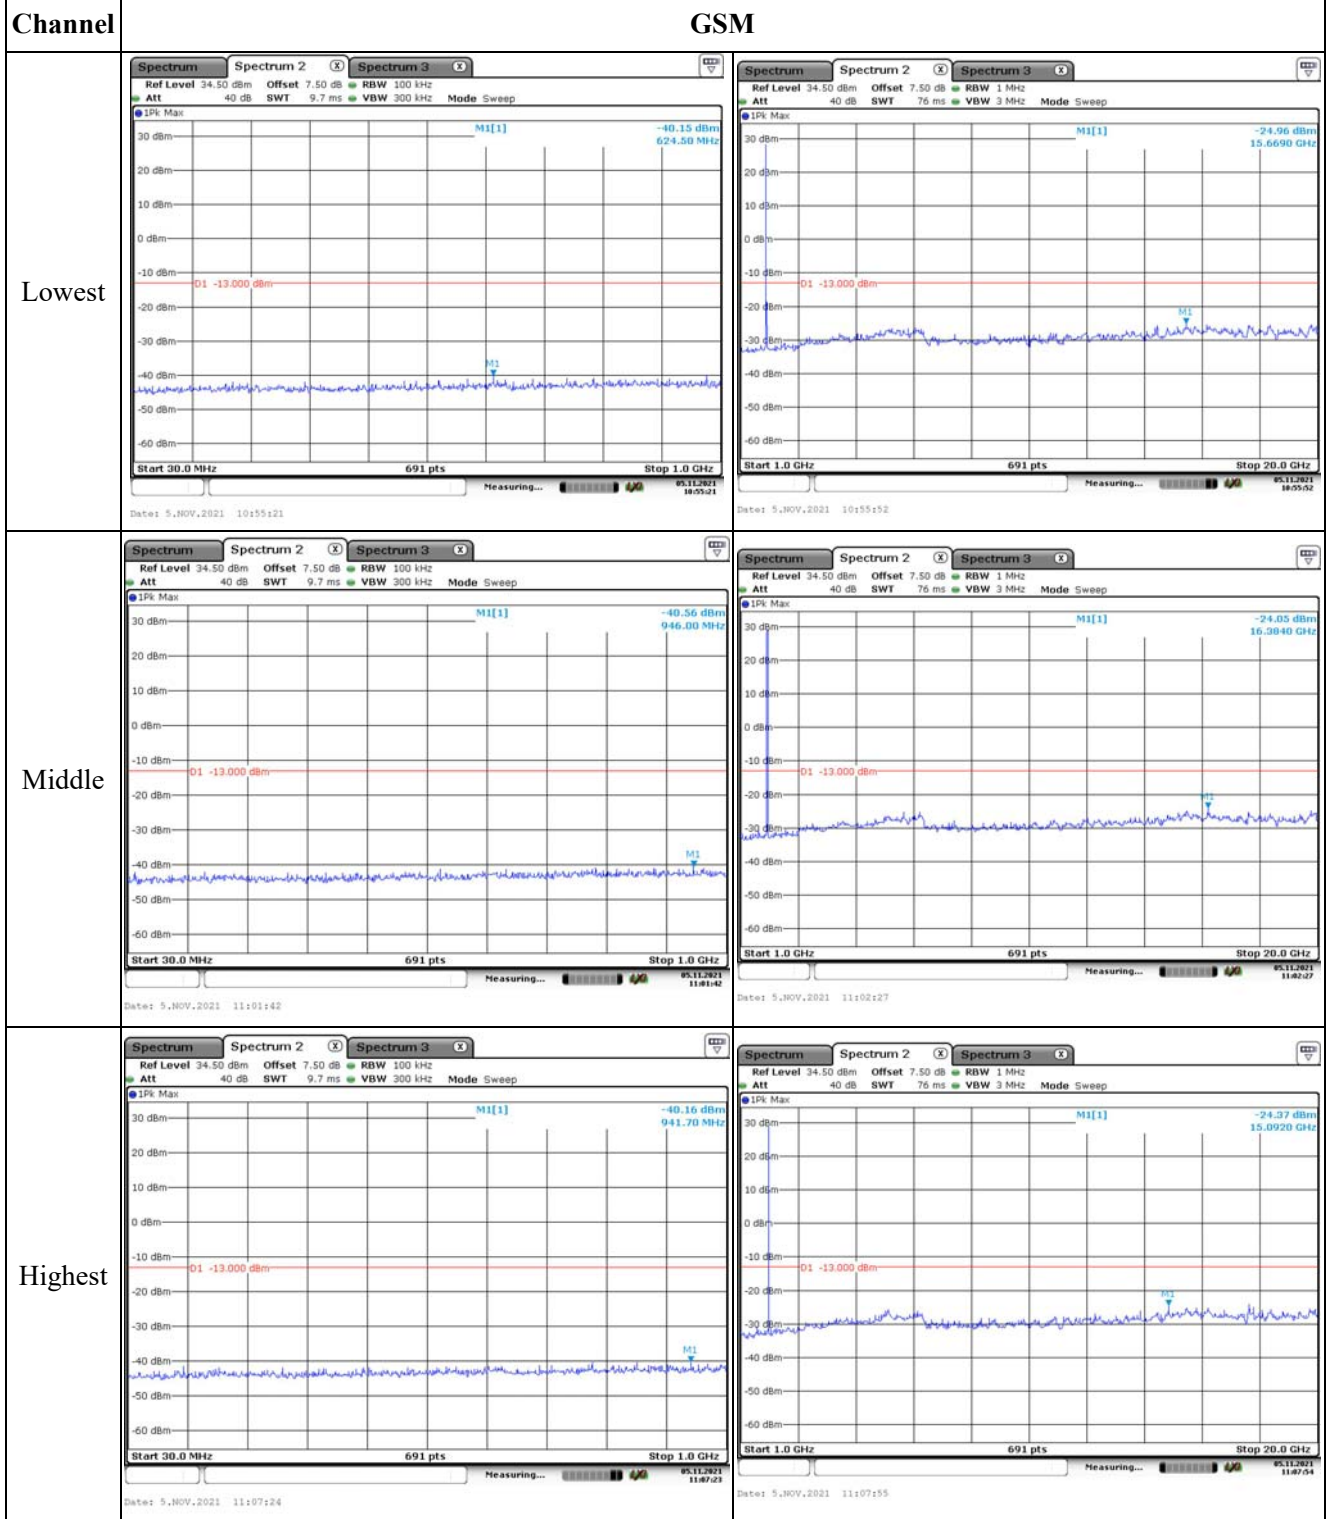

Out of band emission, Band Edge

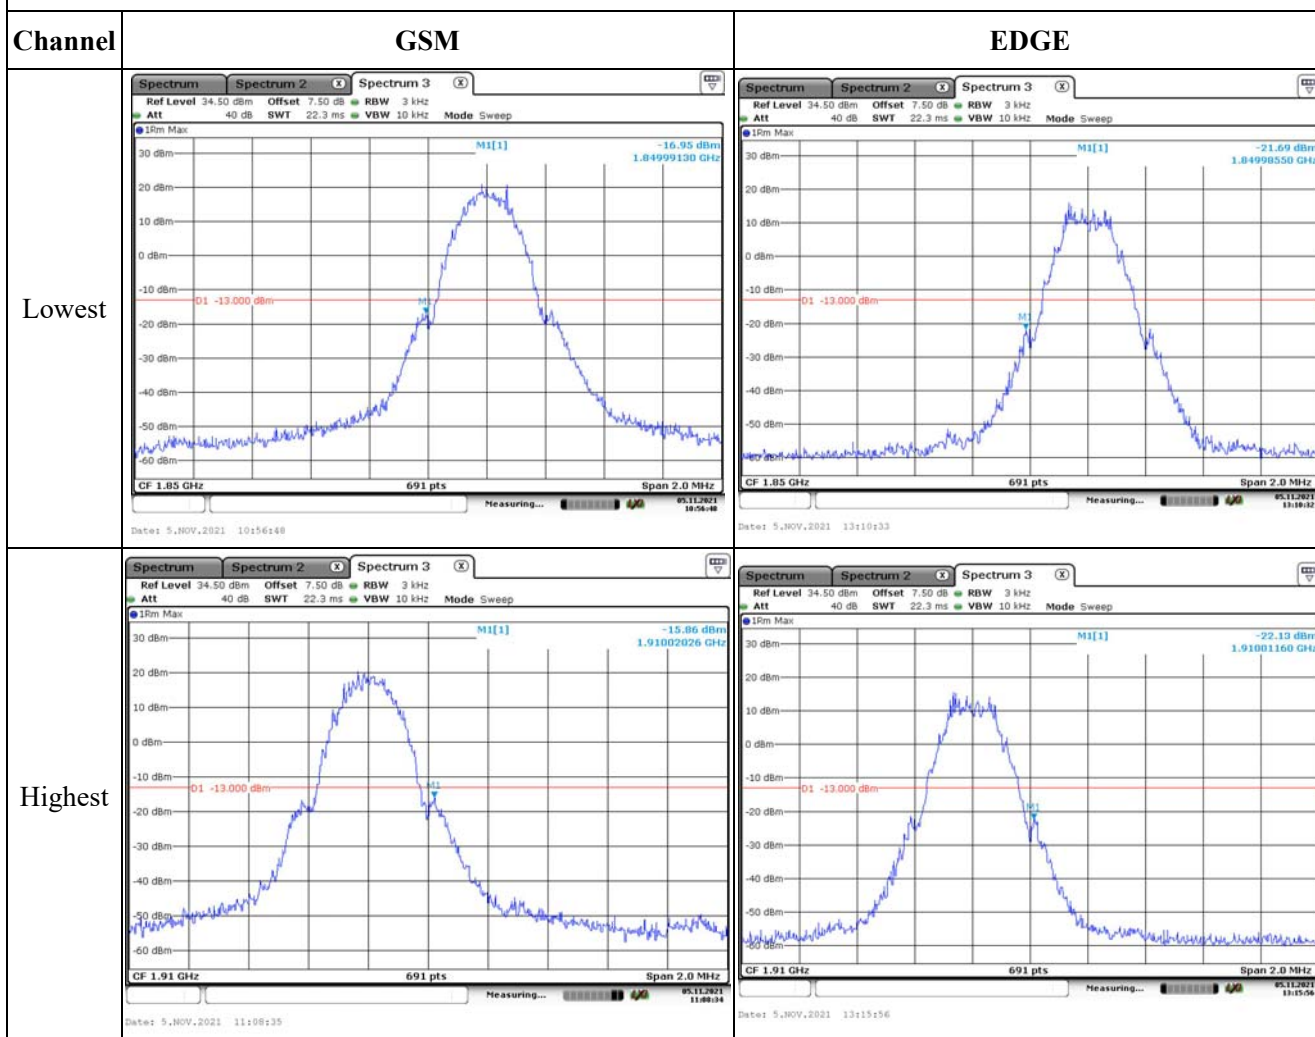

4.3 Antenna Port Test Data and Results for WCDMA Band 2:

Serial Number:	CR21090076-RF-S1	Test Date:	2021/11/4~2021/11/5
Test Site:	RF	Test Mode:	Transmitting
Tester:	Thor Lei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9~26.8	Relative Humidity: (%)	61~66	ATM Pressure: (kPa)	100.9~101.1
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
R&S	Universal Radio Communication Tester	CMU200	110 825	2021/7/22	2022/7/21
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021/7/22	2022/7/22
UNI-T	Multimeter	UT39A+	C210582554	2021/9/30	2022/9/30
E-Microwave	Two-way Splitter	ODP-1-6	OE0120176	Each Time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

EUT Information@ WCDMA Band II▲:

Antenna Gain (dBi):	-1.62	Cable Loss (dB):	0.3
Operation Voltage(V _{DC}):			
Lowest:	3.6	Normal:	3.85
		Highest:	4.35

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	1852.4	1880	1907.6

Test Data:**FCC§2.1046;§ 24.232 (c)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP(dBm)	EIRP Limit(dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99 Subtest 1	23.54	23.15	23.37	21.62	33
HSDPA Subtest 1	22.87	23.08	22.96	21.16	33
HSDPA Subtest 2	22.68	22.84	22.79	20.92	33
HSDPA Subtest 3	22.81	22.85	22.76	20.93	33
HSDPA Subtest 4	22.63	22.74	22.59	20.82	33
HSUPA Subtest 1	22.88	22.39	22.72	20.96	33
HSUPA Subtest 2	22.64	22.62	22.37	20.72	33
HSUPA Subtest 3	22.78	22.87	22.74	20.95	33
HSUPA Subtest 4	22.86	22.41	22.68	20.94	33
HSUPA Subtest 5	22.77	22.86	22.72	20.94	33
Note: EIRP=Conducted Power(dBm) - Cable loss(dB) + Antenna Gain(dBi)					
				Result:	Pass

Peak-to-average Ratio(PAR)

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.1	3.07	3.22	13
HSDPA	3.62	3.59	3.33	13
HSUPA	3.39	3.54	3.36	13
			Result:	Pass

FCC §2.1049, §24.238: Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.153	4.153	4.153	4.689	4.689	4.689
HSDPA	4.153	4.182	4.168	4.689	4.805	4.703
HSUPA	4.153	4.153	4.153	4.689	4.703	4.674

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a): Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 24.238 (a): Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §24.235: Frequency Stability

Test Modulation:	WCDMA R99		Test Channel:	1880	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Result
			(Hz)	(ppm)	
Frequency Stability vs. Temperature	-30	3.85	18	0.01	Pass
	-20	3.85	-16	-0.01	Pass
	-10	3.85	20	0.01	Pass
	0	3.85	22	0.01	Pass
	10	3.85	20	0.01	Pass
	20	3.85	24	0.01	Pass
	30	3.85	22	0.01	Pass
	40	3.85	26	0.01	Pass
	50	3.85	24	0.01	Pass
Frequency Stability vs. Voltage	20	3.6	-20	-0.01	Pass
	20	4.35	16	0.01	Pass
Result:				Pass	

Test Plots:

Occupied Bandwidth

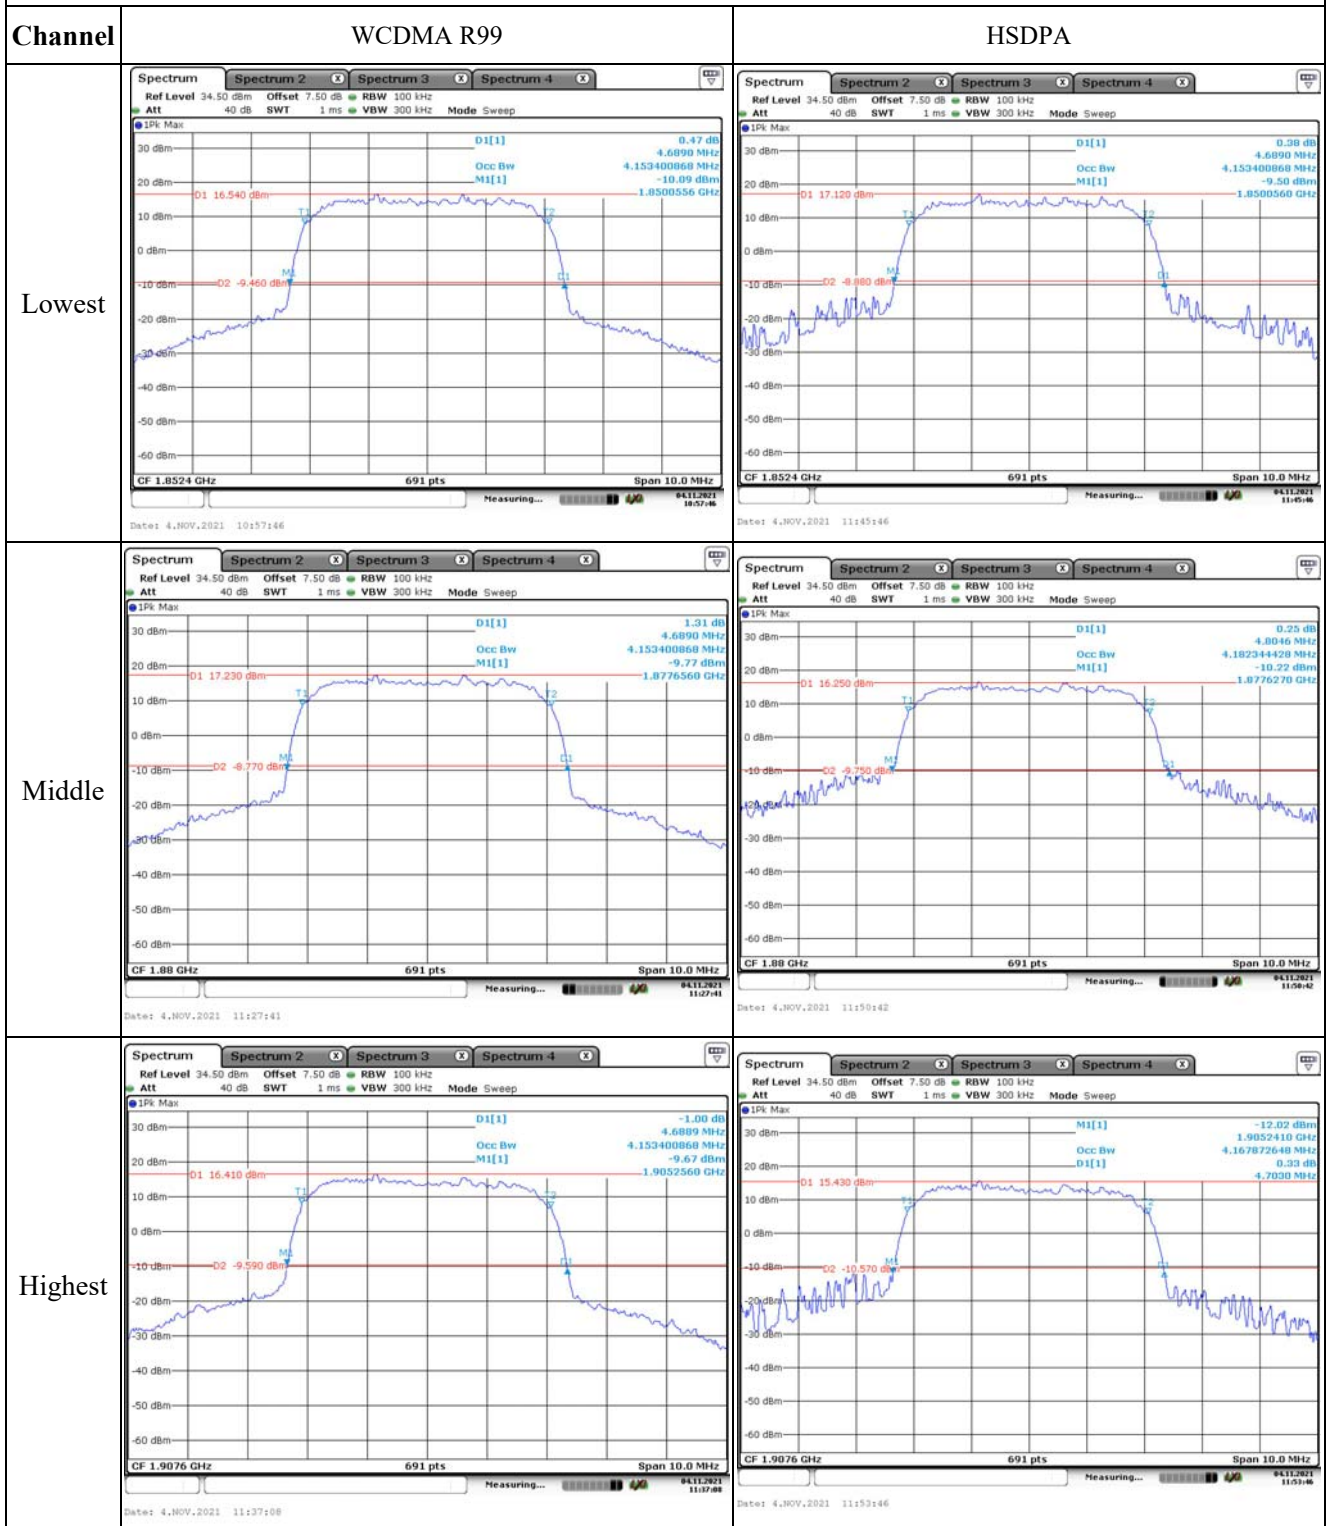


Occupied Bandwidth

Channel

HSUPA


Lowest

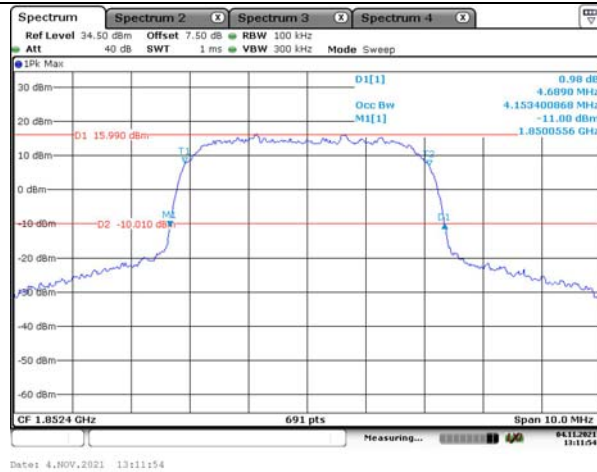

Middle



Highest


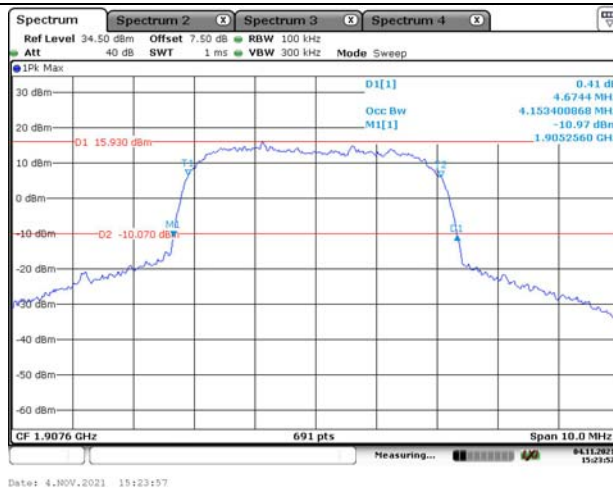


Spurious Emissions at Antenna Terminal



Channel

WCDMA R99



Lowest

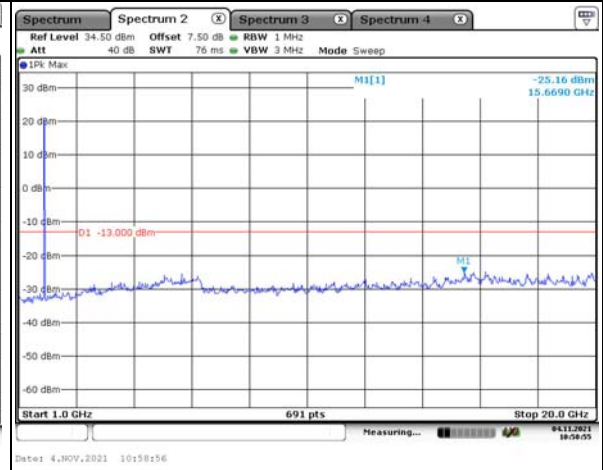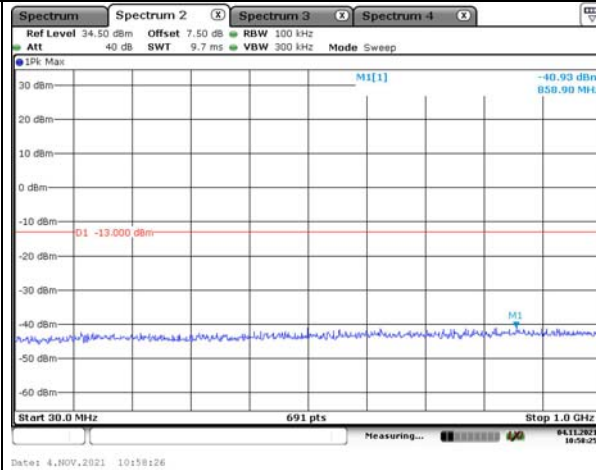


Middle

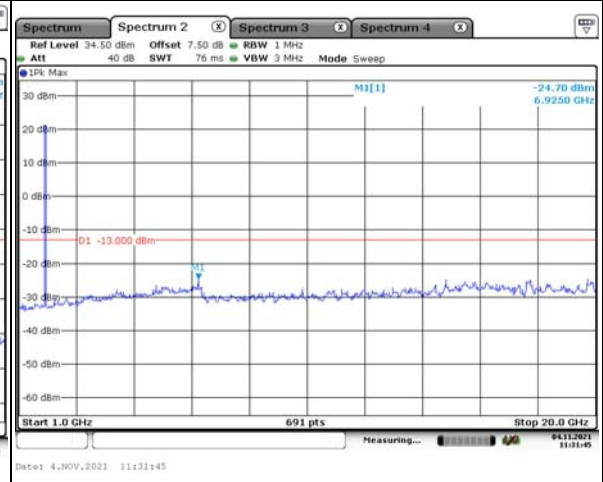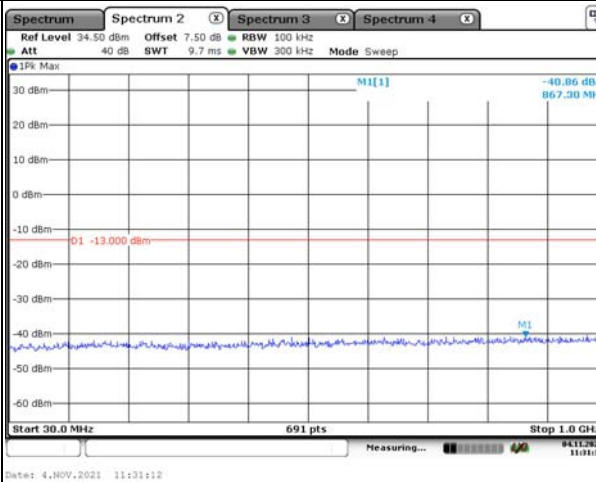

Highest

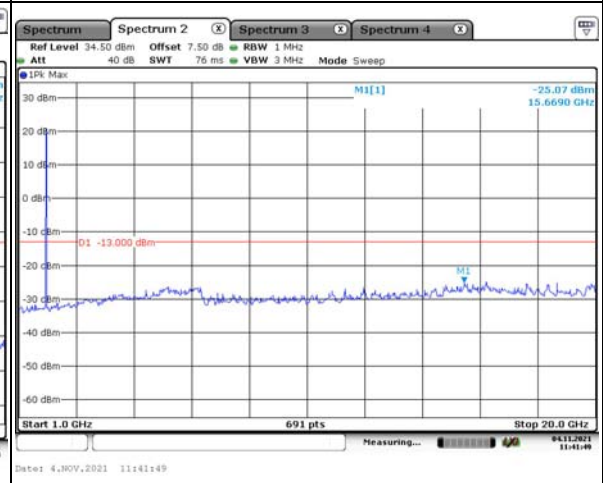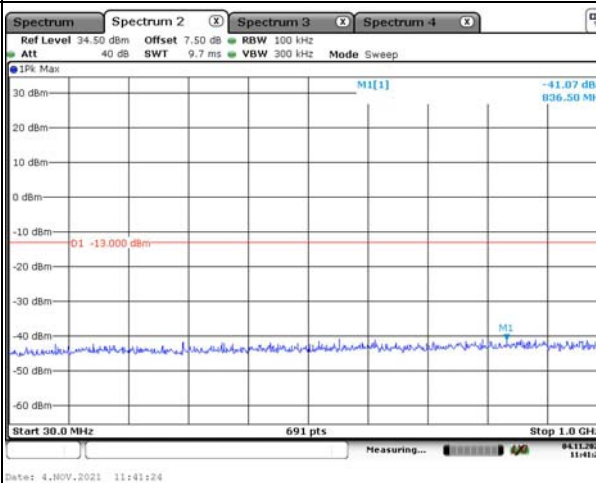

Out of band emission, Band Edge

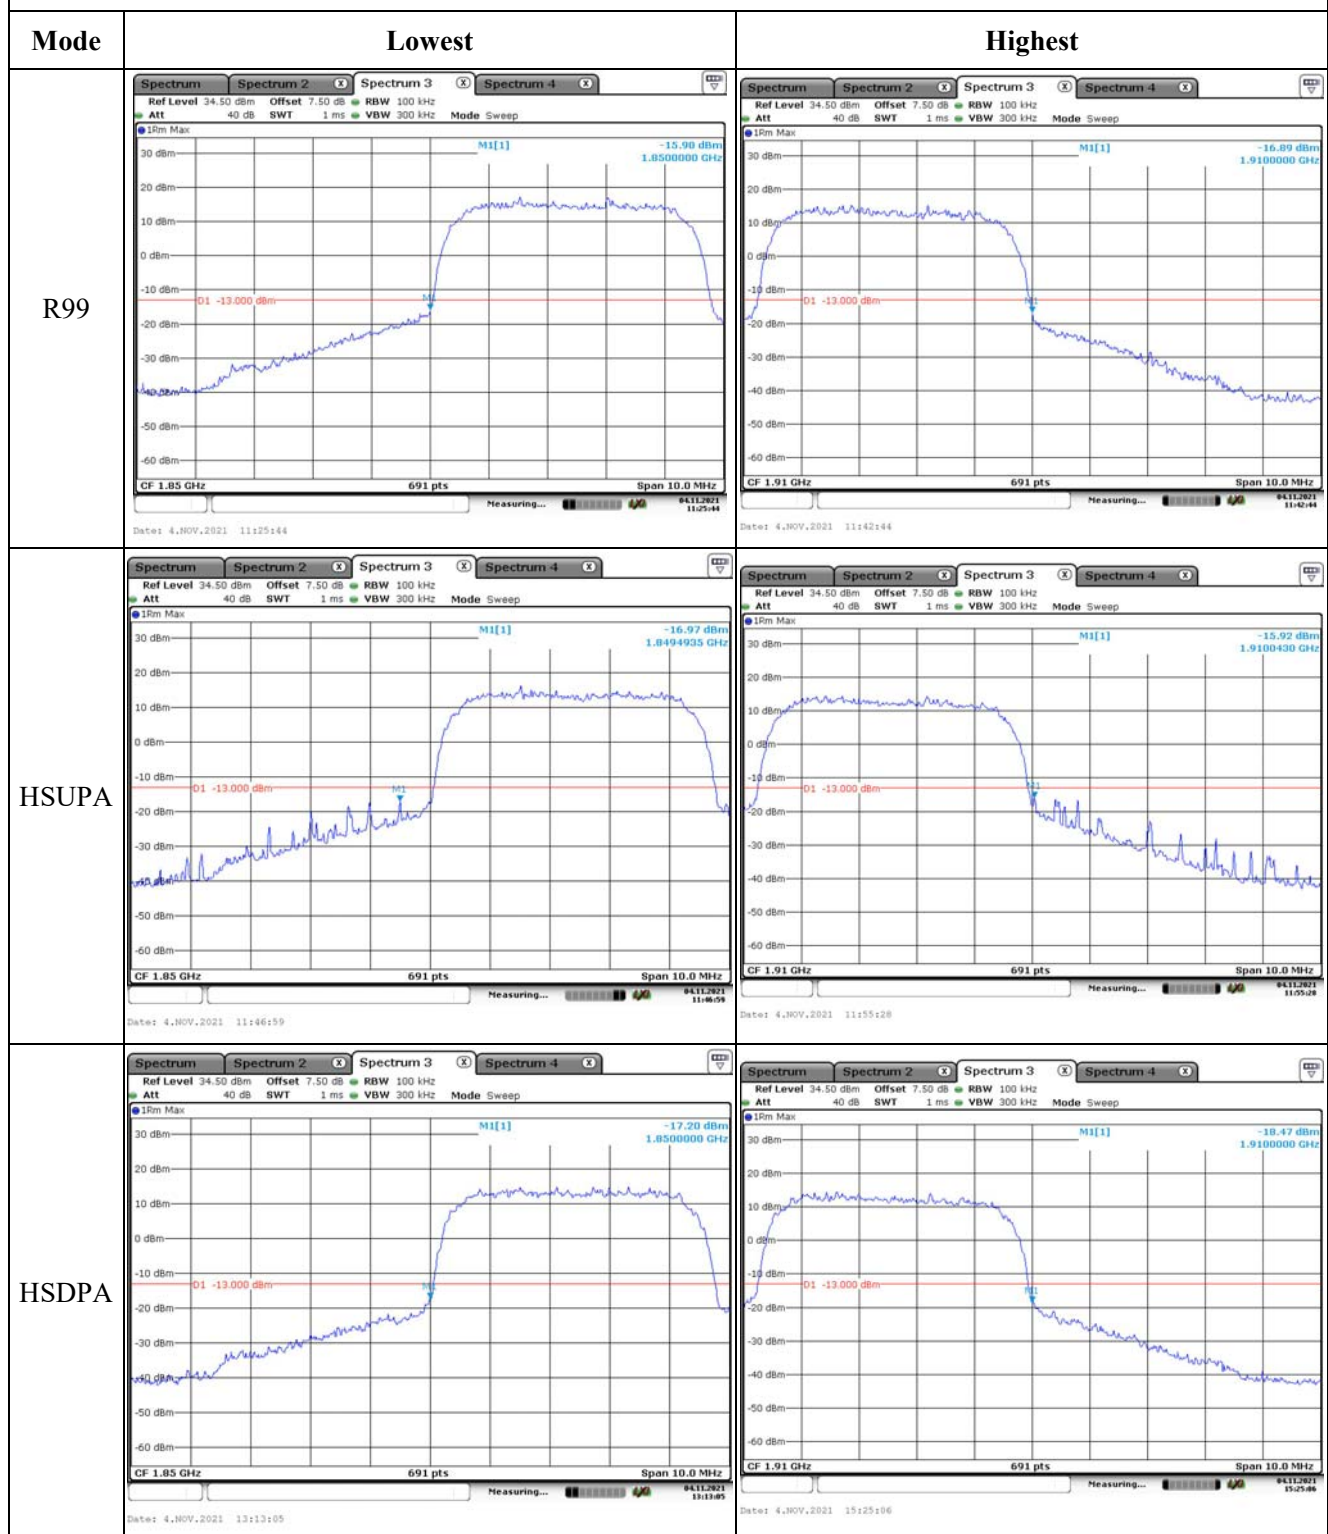

4.4 Antenna Port Test Data and Results for WCDMA Band 5:

Serial Number:	CR21090076-RF-S1	Test Date:	2021/11/4~2021/11/5
Test Site:	RF	Test Mode:	Transmitting
Tester:	Thor Lei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9~26.8	Relative Humidity: (%)	61~66	ATM Pressure: (kPa)	100.9~101.1
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
R&S	Universal Radio Communication Tester	CMU200	110 825	2021/7/22	2022/7/21
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021/7/22	2022/7/22
UNI-T	Multimeter	UT39A+	C210582554	2021/9/30	2022/9/30
E-Microwave	Two-way Splitter	ODP-1-6	OE0120176	Each Time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

EUT Information@ WCDMA Band V▲:

Antenna Gain (dBi):	-1.2	Antenna Gain (dBd):	-3.35	Cable Loss (dB):	0.2
Operation Voltage(V _{DC}):					
Lowest:	3.6	Normal:	3.85	Highest:	4.35

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	826.4	836.6	846.6

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99 Subtest 1	22.81	22.64	22.78	19.26	38.45
HSDPA Subtest 1	22.95	22.87	22.62	19.4	38.45
HSDPA Subtest 2	22.86	22.74	22.83	19.31	38.45
HSDPA Subtest 3	22.72	22.76	22.81	19.26	38.45
HSDPA Subtest 4	22.92	22.75	22.97	19.42	38.45
HSUPA Subtest 1	22.54	22.89	22.72	19.34	38.45
HSUPA Subtest 2	22.69	22.68	22.67	19.14	38.45
HSUPA Subtest 3	22.45	22.58	22.72	19.17	38.45
HSUPA Subtest 4	22.92	22.76	22.84	19.37	38.45
HSUPA Subtest 5	22.83	22.71	22.63	19.28	38.45
Note: ERP=Conducted Power(dBm) - Cable loss(dB) + Antenna Gain(dBd)					
				Result:	Pass

Peak-to-average Ratio(PAR)

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.01	3.1	3.13	13
HSDPA	3.01	3.1	3.1	13
HSUPA	3.54	3.28	3.28	13
			Result:	Pass

FCC §2.1049, §22.917, §22.905: Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.139	4.153	4.139	4.689	4.689	4.689
HSDPA	4.139	4.153	4.153	4.689	4.689	4.689
HSUPA	4.139	4.153	4.153	4.689	4.689	4.703

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a): Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--


FCC §2.1051, §22.917(a): Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §22.355: Frequency Stability

Test Modulation:	WCDMA R99		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	22	0.03	2.5
	-20	3.85	24	0.03	2.5
	-10	3.85	20	0.02	2.5
	0	3.85	22	0.03	2.5
	10	3.85	24	0.03	2.5
	20	3.85	26	0.03	2.5
	30	3.85	20	0.02	2.5
	40	3.85	-18	-0.02	2.5
	50	3.85	16	0.02	2.5
Frequency Stability vs. Voltage	20	3.6	-20	-0.02	2.5
	20	4.35	22	0.03	2.5
Result:				Pass	

Test Plots:

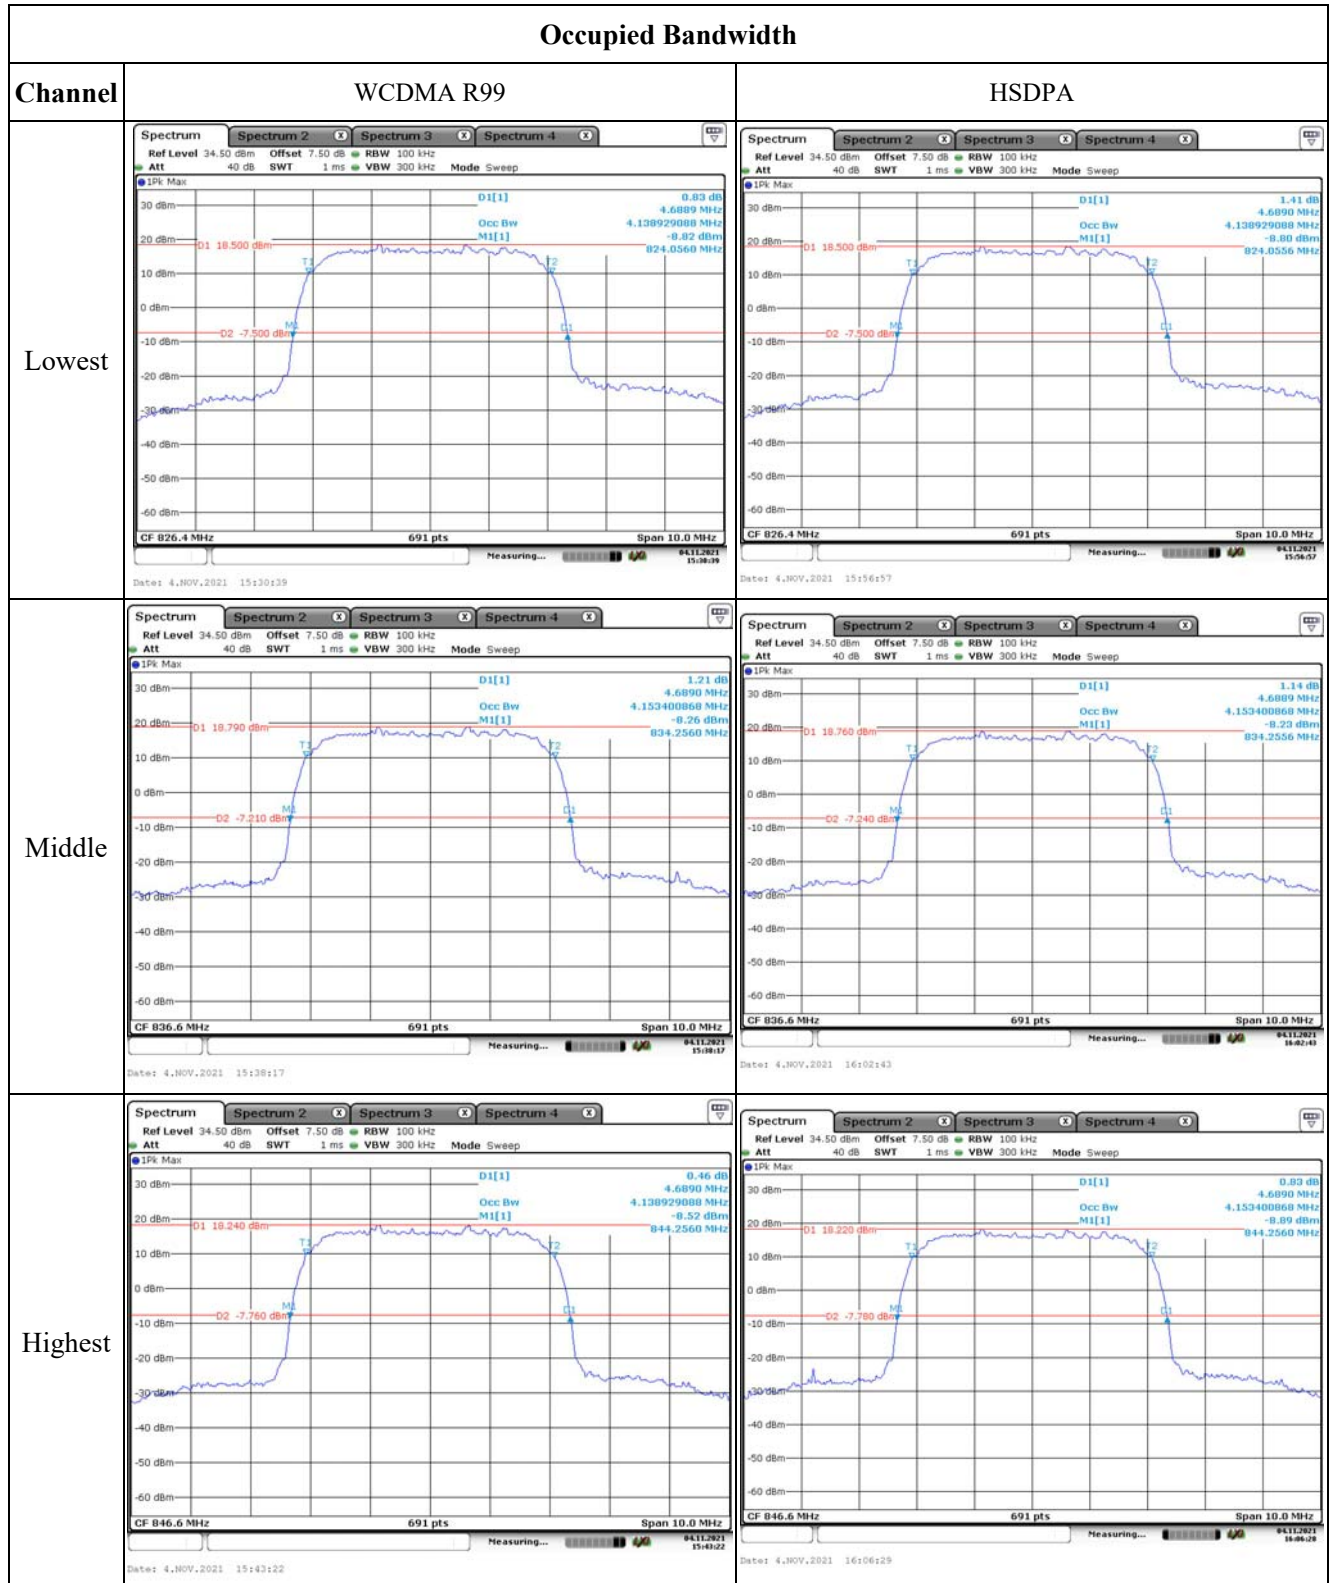


Occupied Bandwidth


Channel

HSUPA


Lowest

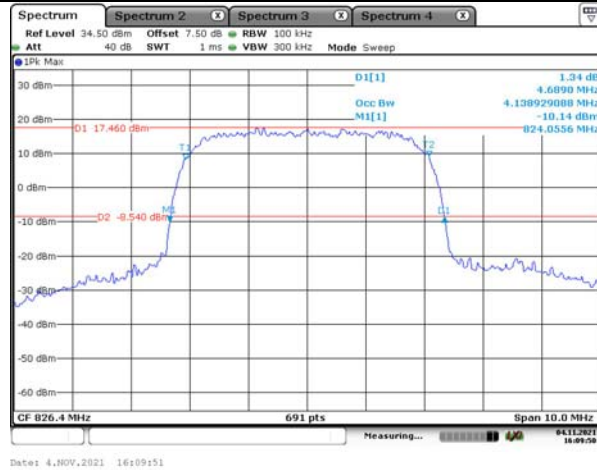


Middle

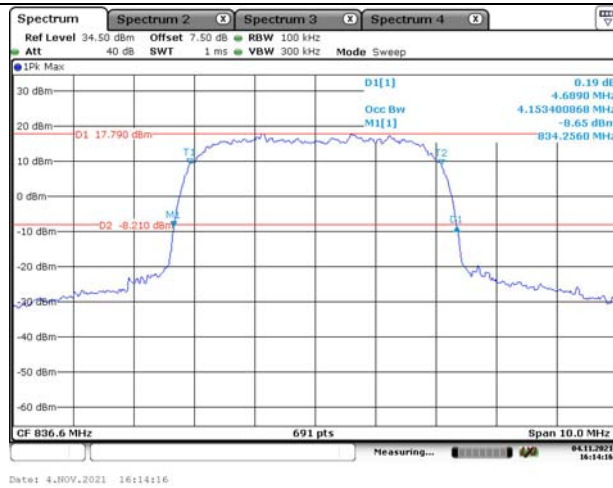


Highest

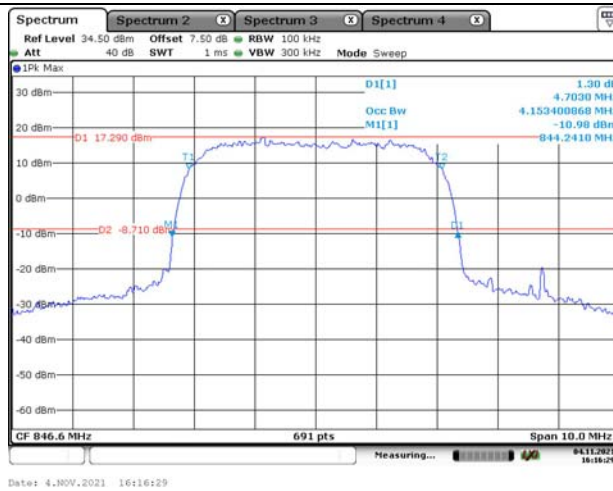

Spurious Emissions at Antenna Terminal

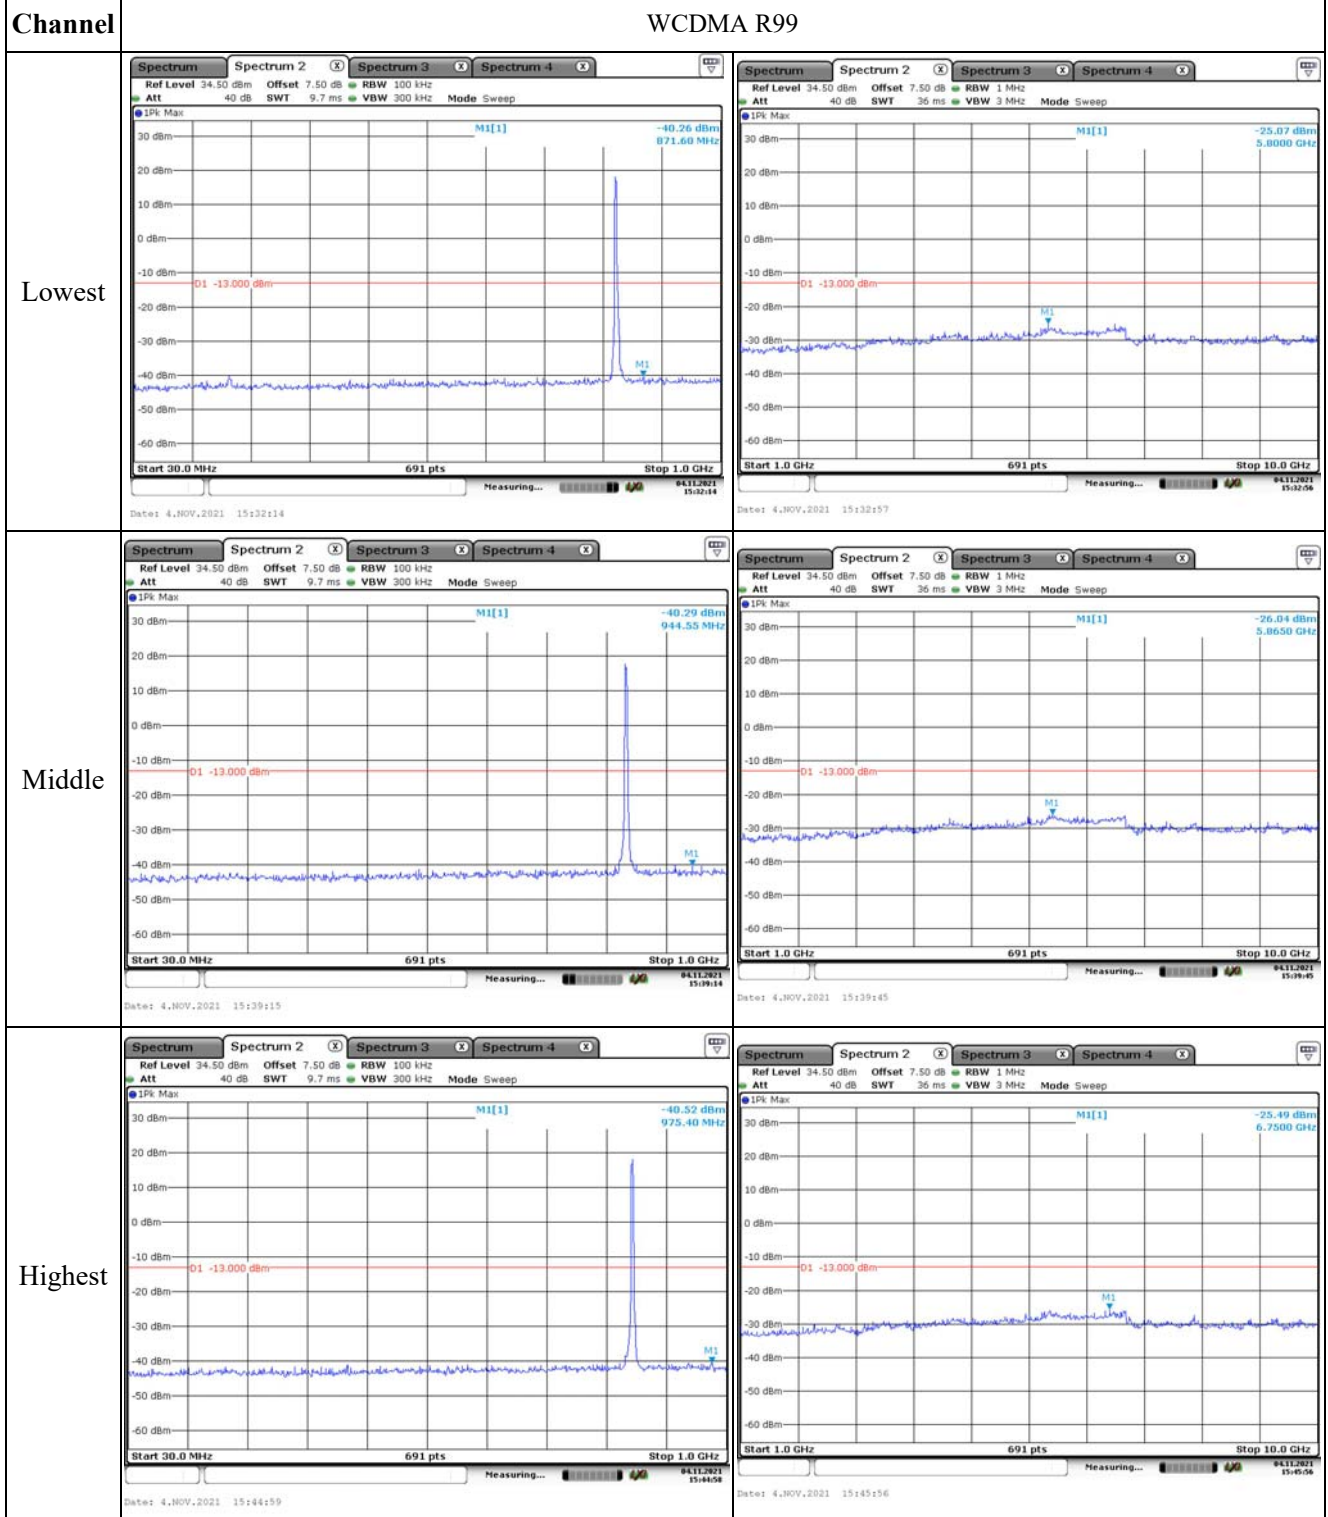

Out of band emission, Band Edge

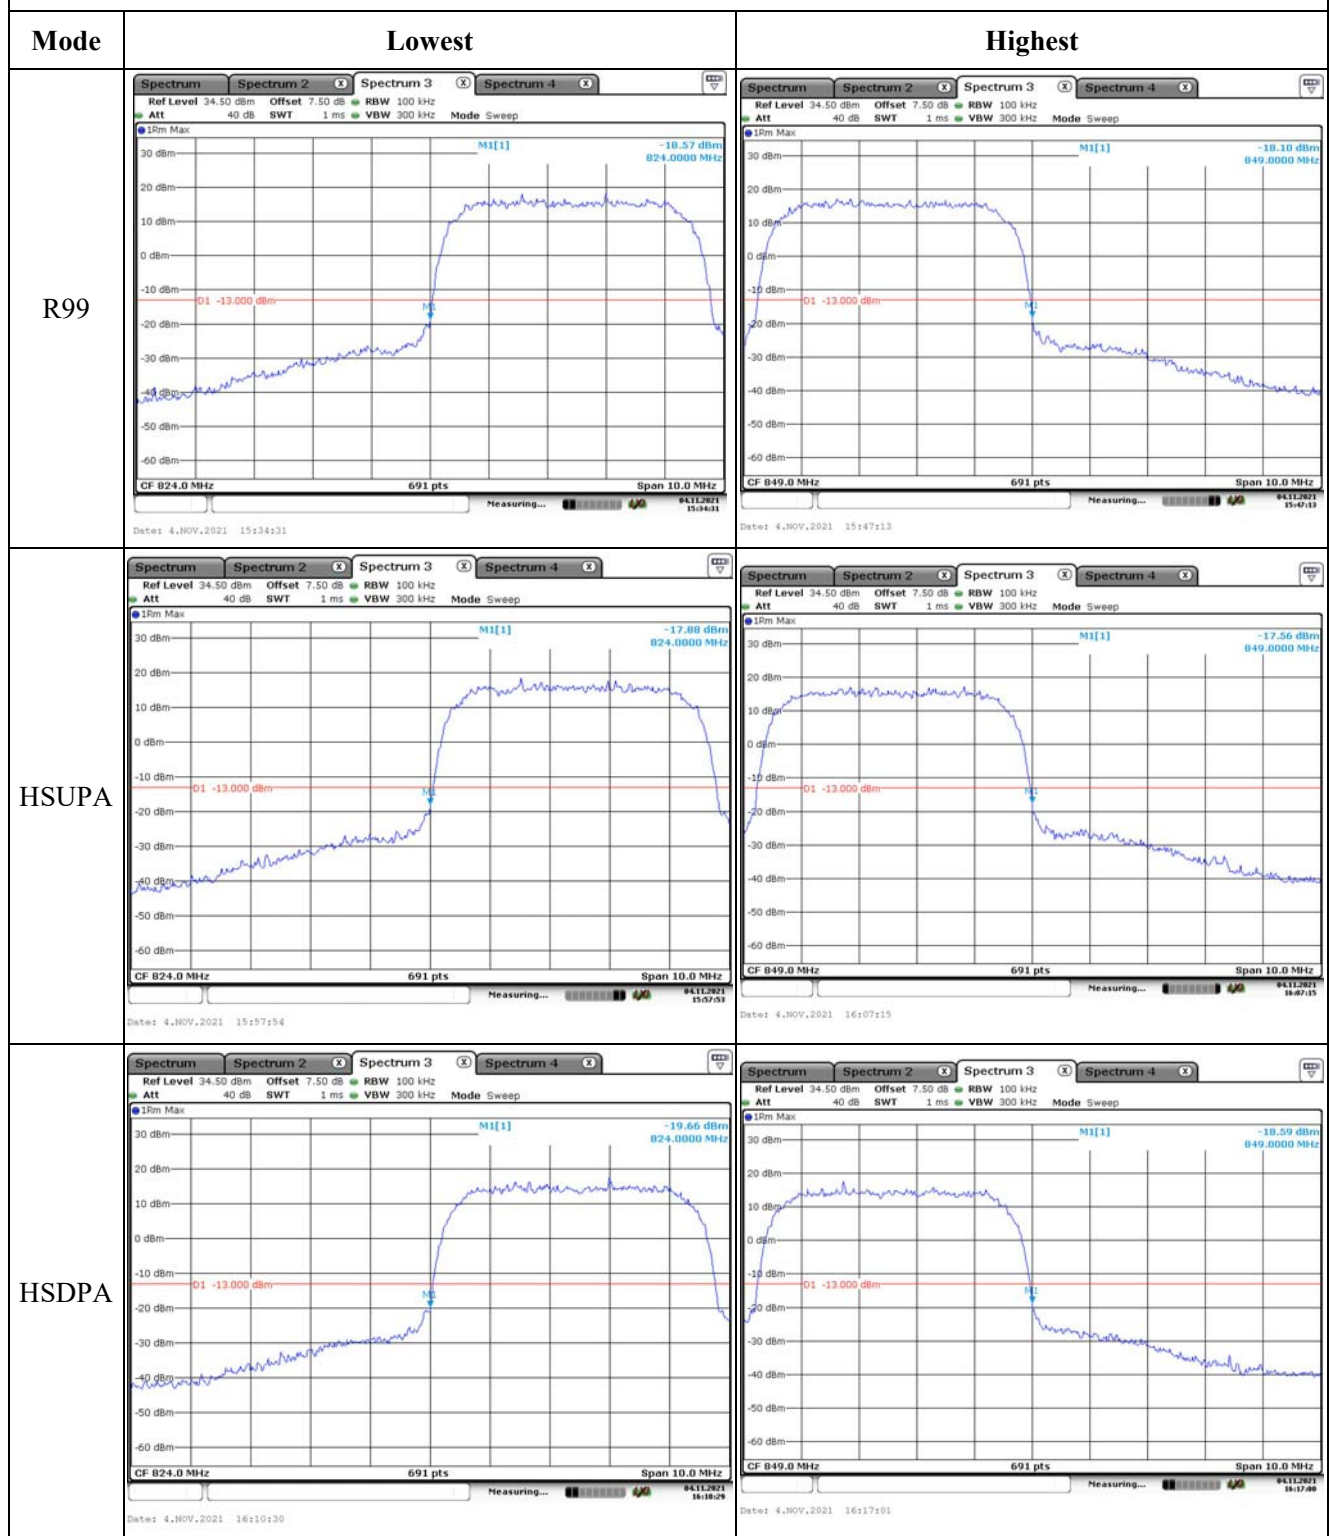

4.5 Spurious Emissions

Serial Number:	CR21090076-RF-S1	Test Date:	2021-10-06~2021-10-10
Test Site:	966-2, 966-1	Test Mode:	Transmitting
Tester:	Caps Hu, Carl Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.6~30.1	Relative Humidity: (%)	60~62	ATM Pressure: (kPa)	100.3~100.4
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2021-07-25	2022-07-24
Agilent	Signal Generator	E8247C	MY43321350	2021-04-25	2022-04-24
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021-02-05	2023-02-04
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-08-08	2022-08-07
AH	Preamplifier	PAM-1840VH	190	2020-11-20	2021-11-19

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**Cellular Band (PART 22H)****30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850 Frequency:824.2MHz								
1648.40	H	47.03	-57.25	8.68	0.80	-49.37	-13.00	36.37
1648.40	V	47.15	-57.21	8.68	0.80	-49.33	-13.00	36.33
2472.60	H	50.62	-50.10	9.38	1.00	-41.72	-13.00	28.72
2472.60	V	52.26	-48.41	9.38	1.00	-40.03	-13.00	27.03
3296.80	H	35.45	-60.65	10.32	1.15	-51.48	-13.00	38.48
3296.80	V	34.26	-61.60	10.32	1.15	-52.43	-13.00	39.43
683.50	H	32.93	-71.71	0.00	0.53	-72.24	-13.00	59.24
812.60	V	40.43	-58.02	0.00	0.55	-58.57	-13.00	45.57
GSM 850 Frequency:836.6MHz								
1673.20	H	44.36	-59.92	8.71	0.85	-52.06	-13.00	39.06
1673.20	V	47.65	-56.74	8.71	0.85	-48.88	-13.00	35.88
2509.80	H	50.79	-49.79	9.42	1.01	-41.38	-13.00	28.38
2509.80	V	52.08	-48.51	9.42	1.01	-40.10	-13.00	27.10
3346.40	H	33.84	-62.58	10.34	1.16	-53.40	-13.00	40.40
3346.40	V	33.86	-62.43	10.34	1.16	-53.25	-13.00	40.25
766.30	H	33.29	-69.81	0.00	0.54	-70.35	-13.00	57.35
837.90	V	43.49	-54.37	0.00	0.62	-54.99	-13.00	41.99
GSM 850 Frequency:848.8MHz								
1697.60	H	45.89	-58.40	8.74	0.90	-50.56	-13.00	37.56
1697.60	V	47.86	-56.56	8.74	0.90	-48.72	-13.00	35.72
2546.40	H	53.08	-47.19	9.47	1.01	-38.73	-13.00	25.73
2546.40	V	53.68	-46.55	9.47	1.01	-38.09	-13.00	25.09
3395.20	H	34.58	-62.20	10.36	1.19	-53.03	-13.00	40.03
3395.20	V	34.95	-61.80	10.36	1.19	-52.63	-13.00	39.63
151.40	H	33.86	-78.04	0.00	0.22	-78.26	-13.00	65.26
37.70	V	40.43	-47.15	-25.30	0.11	-72.56	-13.00	59.56

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 5 Frequency:826.4 MHz								
1652.80	H	35.62	-68.66	8.68	0.81	-60.79	-13.00	47.79
1652.80	V	34.27	-70.09	8.68	0.81	-62.22	-13.00	49.22
2479.20	H	34.59	-66.12	9.39	1.01	-57.74	-13.00	44.74
2479.20	V	35.64	-65.03	9.39	1.01	-56.65	-13.00	43.65
3305.60	H	33.97	-62.15	10.32	1.15	-52.98	-13.00	39.98
3305.60	V	34.88	-61.01	10.32	1.15	-51.84	-13.00	38.84
815.40	H	33.99	-67.87	0.00	0.55	-68.42	-13.00	55.42
37.70	V	40.41	-47.17	-25.30	0.11	-72.58	-13.00	59.58
WCDMA Band 5 Frequency:836.6MHz								
1673.20	H	34.59	-69.69	8.71	0.85	-61.83	-13.00	48.83
1673.20	V	33.85	-70.54	8.71	0.85	-62.68	-13.00	49.68
2509.80	H	34.95	-65.63	9.42	1.01	-57.22	-13.00	44.22
2509.80	V	34.15	-66.44	9.42	1.01	-58.03	-13.00	45.03
3346.40	H	36.95	-59.47	10.34	1.16	-50.29	-13.00	37.29
3346.40	V	34.27	-62.02	10.34	1.16	-52.84	-13.00	39.84
623.10	H	34.50	-70.26	0.00	0.48	-70.74	-13.00	57.74
37.70	V	40.22	-47.36	-25.30	0.11	-72.77	-13.00	59.77
WCDMA Band 5 Frequency:846.6MHz								
1693.20	H	35.67	-68.62	8.73	0.89	-60.78	-13.00	47.78
1693.20	V	34.62	-69.79	8.73	0.89	-61.95	-13.00	48.95
2539.80	H	34.02	-66.31	9.46	1.01	-57.86	-13.00	44.86
2539.80	V	33.98	-66.31	9.46	1.01	-57.86	-13.00	44.86
3386.40	H	34.58	-62.14	10.35	1.18	-52.97	-13.00	39.97
3386.40	V	34.26	-62.41	10.35	1.18	-53.24	-13.00	40.24
832.30	H	33.68	-67.67	0.00	0.63	-68.30	-13.00	55.30
37.70	V	40.35	-47.23	-25.30	0.11	-72.64	-13.00	59.64

PCS Band (PART 24E)**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 1900 Frequency:1850.2MHz								
3700.40	H	35.06	-61.43	10.60	1.25	-52.08	-13.00	39.08
3700.40	V	34.96	-61.51	10.60	1.25	-52.16	-13.00	39.16
5550.60	H	34.29	-58.75	11.44	1.49	-48.80	-13.00	35.80
5550.60	V	33.96	-58.91	11.44	1.49	-48.96	-13.00	35.96
37.70	H	36.02	-45.14	-25.30	0.11	-70.55	-13.00	57.55
530.40	V	34.67	-68.33	0.00	0.45	-68.78	-13.00	55.78
GSM 1900 Frequency:1880MHz								
3760.00	H	34.88	-60.78	10.66	1.24	-51.36	-13.00	38.36
3760.00	V	35.35	-60.19	10.66	1.24	-50.77	-13.00	37.77
5640.00	H	33.64	-59.63	11.33	1.54	-49.84	-13.00	36.84
5640.00	V	33.87	-59.28	11.33	1.54	-49.49	-13.00	36.49
37.70	H	35.86	-45.30	-25.30	0.11	-70.71	-13.00	57.71
37.70	V	40.15	-47.43	-25.30	0.11	-72.84	-13.00	59.84
GSM 1900 Frequency:1909.8MHz								
3819.60	H	35.62	-59.58	10.72	1.29	-50.15	-13.00	37.15
3819.60	V	34.69	-60.36	10.72	1.29	-50.93	-13.00	37.93
5729.40	H	33.36	-60.14	11.22	1.59	-50.51	-13.00	37.51
5729.40	V	33.84	-59.53	11.22	1.59	-49.90	-13.00	36.90
37.00	H	36.57	-43.60	-24.96	0.12	-68.68	-13.00	55.68
37.70	V	40.08	-47.50	-25.30	0.11	-72.91	-13.00	59.91

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band II, Frequency:1852.4 MHz								
3704.80	H	38.75	-57.68	10.60	1.25	-48.33	-13.00	35.33
3704.80	V	37.26	-59.15	10.60	1.25	-49.80	-13.00	36.80
5557.20	H	33.58	-59.47	11.43	1.49	-49.53	-13.00	36.53
5557.20	V	33.75	-59.14	11.43	1.49	-49.20	-13.00	36.20
877.20	H	33.51	-66.48	0.00	0.60	-67.08	-13.00	54.08
37.70	V	39.90	-47.68	-25.30	0.11	-73.09	-13.00	60.09
WCDMA Band II, Frequency:1880 MHz								
3760.00	H	40.95	-54.71	10.66	1.24	-45.29	-13.00	32.29
3760.00	V	38.54	-57.00	10.66	1.24	-47.58	-13.00	34.58
5640.00	H	33.95	-59.32	11.33	1.54	-49.53	-13.00	36.53
5640.00	V	34.47	-58.68	11.33	1.54	-48.89	-13.00	35.89
604.80	H	33.80	-71.00	0.00	0.50	-71.50	-13.00	58.50
37.70	V	40.36	-47.22	-25.30	0.11	-72.63	-13.00	59.63
WCDMA Band II, Frequency:1907.6MHz								
3815.20	H	37.16	-58.01	10.72	1.29	-48.58	-13.00	35.58
3815.20	V	34.51	-60.51	10.72	1.29	-51.08	-13.00	38.08
5722.80	H	34.26	-59.23	11.23	1.58	-49.58	-13.00	36.58
5722.80	V	34.13	-59.23	11.23	1.58	-49.58	-13.00	36.58
843.50	H	33.93	-67.08	0.00	0.58	-67.66	-13.00	54.66
37.70	V	40.68	-46.90	-25.30	0.11	-72.31	-13.00	59.31

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

***** END OF REPORT *****