

Test Report

Report No.: MTi240311009-11E2

Date of issue: 2024-06-14

Applicant: Urban Armor Gear, LLC

Product: Travel / Desktop Wireless Charger

Model(s): UAG-WTP-01, 9B4412114030, 9B4412A14030,
9B4416114030

FCC ID: 2A4MY-WTP01

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.cn>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.



Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Contents

| | | |
|----------|--|-----------|
| 1 | General Description | 5 |
| 1.1 | Description of the EUT | 5 |
| 1.2 | Description of test modes | 6 |
| 1.3 | Description of support units | 7 |
| 2 | Measurement uncertainty | 7 |
| 3 | Test facilities and accreditations..... | 8 |
| 3.1 | Test laboratory | 8 |
| 4 | List of test equipment | 9 |
| 5 | Test result | 10 |
| 5.1 | Requirement | 10 |
| 5.2 | Test setup | 11 |
| 5.3 | Test Procedures..... | 11 |
| 5.4 | Test results | 12 |
| | Photographs of the Test Setup..... | 13 |
| | Photographs of the EUT..... | 13 |

| Test Result Certification | |
|----------------------------|--|
| Applicant: | Urban Armor Gear, LLC |
| Address: | 1601 Alton Pkwy, Suite C, Irvine, California 92606 |
| Manufacturer: | Urban Armor Gear, LLC |
| Address: | 1601 Alton Pkwy, Suite C, Irvine, California 92606 |
| Product description | |
| Product name: | Travel / Desktop Wireless Charger |
| Trademark: | UAG |
| Model name: | UAG-WTP-01 |
| Series Model: | 9B4412114030, 9B4412A14030, 9B4416114030 |
| Standards: | FCC CFR 47 PART 1, § 1.1310 |
| Test method: | KDB 680106 D01 Wireless Power Transfer v04 |
| Date of Test | |
| Date of test: | 2024-03-14 to 2024-05-30 |
| Test result: | Pass |

| | | |
|---------------|---|-------------------|
| Test Engineer | : | <i>Yanice Xie</i> |
| | | (Yanice.Xie) |
| Reviewed By | : | <i>David. Lee</i> |
| | | (David Lee) |
| Approved By | : | <i>Leon Chen</i> |
| | | (Leon Chen) |

1 General Description

1.1 Description of the EUT

| | |
|--------------------------|--|
| Product name: | Travel / Desktop Wireless Charger |
| Model name: | UAG-WTP-01 |
| Series Model: | 9B4412114030, 9B4412A14030, 9B4416114030 |
| Model difference: | All the models are the same circuit and module, except the model name. |
| Electrical rating: | Input: DC5V/3A, 9V/3A, 12V/ 3A Output: Phone: 5W/7.5W/10W/15W Max; Earphone: 5W; Watch: 3.5W Max |
| Accessories: | 1.Adapter: Model: PD25W-C Input: 100-240V~ 50/ 60Hz 0.8A Max Type-C Output: 5V=3A, 9V=2.77A, 12V=2.08A Manufacturer: Shenzhen Reflying Electronic Co., Ltd. 2.Cable: Type-C to Type-C Cable 120cm |
| Hardware version: | V1.0 |
| Software version: | V1.0 |
| Test sample(s) number: | MTi240311009-11S1001 |
| RF specification: | |
| Operation frequency: | Coil1 (Phone): 115-205kHz Coil2 (Earphone): 115-205kHz Coil3(Watch): 326.5kHz |
| Modulation type: | ASK |
| Antenna type: | Coil |

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

| No. | Emission test modes |
|--------|--|
| Mode1 | Wireless output(5W)+Earphone(5W)+Watch(3.5W) |
| Mode2 | Wireless output(7.5W)+Earphone(5W)+Watch(3.5W) |
| Mode3 | Wireless Output(10W)+Earphone(5W)+Watch(3.5W) |
| Mode4 | Wireless Output(14W)+Earphone(5W)+Watch(3.5W) |
| Mode5 | Wireless output(5W)+Earphone(5W) |
| Mode6 | Wireless output(7.5W)+Earphone(5W) |
| Mode7 | Wireless output(10W)+Earphone(5W) |
| Mode8 | Wireless output(15W)+Earphone(5W) |
| Mode9 | Wireless output(5W)+Watch(3.5W) |
| Mode10 | Wireless output(7.5W)+Watch(3.5W) |
| Mode11 | Wireless output(10W)+Watch(3.5W) |
| Mode12 | Wireless output(15W)+Watch(3.5W) |
| Mode13 | Earphone Output(5W)+Watch Output(3.5W) |
| Mode14 | Wireless output(5W) |
| Mode15 | Wireless output(7.5W) |
| Mode16 | Wireless output(10W) |
| Mode17 | Wireless output(15W) |
| Mode18 | Earphone(5W) |
| Mode19 | Watch (3.5W) |
| Mode20 | Stand by |

Note: The maximum output power of the EUT is phone14W max+earphone 5W max+watch 3.5W max.

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Support equipment list | | | |
|------------------------|------------|------------|--------------|
| Description | Model | Serial No. | Manufacturer |
| Moible Phone | Find X3 | / | OPPO |
| iwatch | iwatch S7 | M0JVGQG1VP | Apple |
| Earphones | / | / | XIAOMI |
| Support cable list | | | |
| Description | Length (m) | From | To |
| / | / | / | / |

2 Measurement uncertainty

| Parameter | Expanded Uncertainty |
|--|----------------------|
| Magnetic field measurement (9kHz~30MHz) | $\pm 18.6\%$ |
| Electric field measurements (9kHz~30MHz) | $\pm 18.6\%$ |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3 Test facilities and accreditations

3.1 Test laboratory

| | |
|------------------------|---|
| Test laboratory: | Shenzhen Microtest Co., Ltd. |
| Test site location: | 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| Telephone: | (86-755)88850135 |
| Fax: | (86-755)88850136 |
| CNAS Registration No.: | CNAS L5868 |
| FCC Registration No.: | 448573 |

4 List of test equipment

| No. | Equipment | Manufacturer | Model | Serial No. | Cal. date | Cal. Due |
|----------|--|--------------|----------|------------|------------|------------|
| MTi-E115 | Electric and Magnetic Field Probe – Analyzer | Narda | EHP-200A | 101166 | 2023/08/14 | 2026/08/13 |

5 Test result

5.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|---|----------------------------------|----------------------------------|--|-----------------------------|
| (i) Limits for Occupational/Controlled Exposure | | | | |
| 0.3-3.0 | 614 | 1.63 | *(100) | ≤6 |
| 3.0-30 | 1842/f | 4.89/f | *(900/f ²) | <6 |
| 30-300 | 61.4 | 0.163 | 1.0 | <6 |
| 300-1500 | | | f/300 | <6 |
| 1500-100000 | | | 5 | <6 |
| (ii) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *(100) | <30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | <30 |
| 30-300 | 27.5 | 0.073 | 0.2 | <30 |
| 300-1500 | | | f/1500 | <30 |
| 1500-100000 | | | 1.0 | <30 |


f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

5.2 Test setup

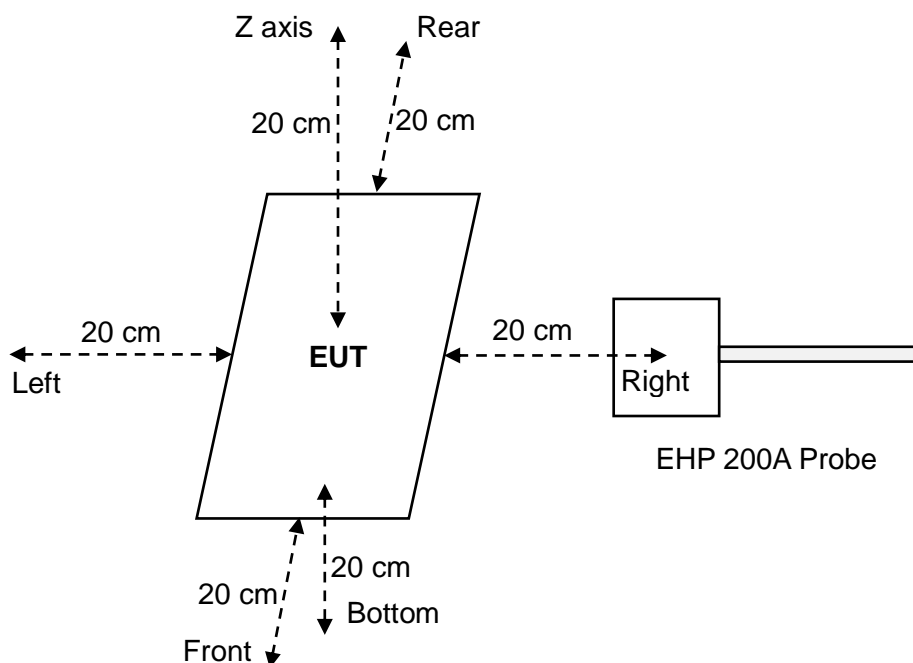

5.3 Test Procedures

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with these devices considered to meet the § 2.1091-Mobile conditions ("generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source's radiating structure(s) and [the nearest person]").
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

5.4 Test results

Test condition 1: Mode 4 operating mode with client device (1 % battery status of client device)

| Probe Position | E -field (V/m) | | | H-field (A/m) | | |
|----------------|----------------|-------|----------------|---------------|-------|----------------|
| | Measurement | Limit | Percentage (%) | Measurement | Limit | Percentage (%) |
| Z axis | 1.742 | 614 | 0.29% | 0.5984 | 1.63 | 43.88% |
| Left | 1.761 | | | 0.6072 | | |
| Right | 1.748 | | | 0.6848 | | |
| Front | 1.698 | | | 0.6968 | | |
| Rear | 1.728 | | | 0.66 | | |
| Bottom | 1.685 | | | 0.7152 | | |

Test condition 2: Mode 4 operating mode with client device (50 % battery status of client device)

| Probe Position | E -field (V/m) | | | H-field (A/m) | | |
|----------------|----------------|-------|---------------------|---------------|-------|---------------------|
| | Measurement | Limit | Max. Percentage (%) | Measurement | Limit | Max. Percentage (%) |
| Z axis | 1.7401 | 614 | 0.29% | 0.5979 | 1.63 | 43.74% |
| Left | 1.748 | | | 0.6009 | | |
| Right | 1.7336 | | | 0.6926 | | |
| Front | 1.6902 | | | 0.687 | | |
| Rear | 1.7448 | | | 0.6657 | | |
| Bottom | 1.6842 | | | 0.7129 | | |

Test condition 3: Mode 4 operating mode with client device (99 % battery status of client device)

| Probe Position | E -field (V/m) | | | H-field (A/m) | | |
|----------------|----------------|-------|----------------|---------------|-------|----------------|
| | Measurement | Limit | Percentage (%) | Measurement | Limit | Percentage (%) |
| Z axis | 1.7279 | 614 | 0.29% | 0.5922 | 1.63 | 43.68% |
| Left | 1.7458 | | | 0.6017 | | |
| Right | 1.7412 | | | 0.6798 | | |
| Front | 1.6956 | | | 0.6886 | | |
| Rear | 1.7135 | | | 0.6593 | | |
| bottom | 1.6809 | | | 0.712 | | |

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----