



**中认信通**

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



# TEST REPORT

**Applicant: D-ROBOTICS HOLDING LIMITED**

Address: SUITE 603, 6/F LAWS COMM PLAZA 788 CHEUNG SHA WAN RD  
KLN HONG KONG, CHINA

**FCC ID: 2BGUG-RDKX3M**

**Product Name: RDK X3 Module**

**Standard(s): 47 CFR Part 15, Subpart C(15.247)**  
**ANSI C63.10-2013**  
**KDB 558074 D01 15.247 Meas Guidance v05r02**

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number: 2403T78343E-RF-00A**

**Date Of Issue: 2024/6/14**

**Reviewed By: Calvin Chen**

Title: RF Engineer

**Approved By: Sun Zhong**

Title: Manager

**Test Laboratory: China Certification ICT Co., Ltd (Dongguan)**

No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China

Tel: +86-769-82016888

**Test Facility**

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

**Declarations**

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>5</b>
<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>6</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION .....</b>	<b>7</b>
1.2.1 EUT Operation Condition: .....	7
1.2.2 Support Equipment List and Details .....	7
1.2.3 Support Cable List and Details .....	7
1.2.4 Block Diagram of Test Setup .....	8
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>11</b>
<b>3.1 AC LINE CONDUCTED EMISSIONS .....</b>	<b>11</b>
3.1.1 Applicable Standard .....	11
3.1.2 EUT Setup .....	12
3.1.3 EMI Test Receiver Setup .....	12
3.1.4 Test Procedure .....	13
3.1.5 Corrected Amplitude & Margin Calculation .....	13
<b>3.2 RADIATION SPURIOUS EMISSIONS .....</b>	<b>14</b>
3.2.1 Applicable Standard .....	14
3.2.2 EUT Setup .....	14
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....	15
3.2.4 Test Procedure .....	16
3.2.5 Corrected Amplitude & Margin Calculation .....	16
<b>3.3 MINIMUM 6 DB BANDWIDTH .....</b>	<b>17</b>
3.3.1 Applicable Standard .....	17
3.3.2 EUT Setup .....	17
3.3.3 Test Procedure .....	17
<b>3.4 MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>18</b>
3.4.1 Applicable Standard .....	18
3.4.2 EUT Setup .....	18
3.4.3 Test Procedure .....	18
<b>3.5 MAXIMUM POWER SPECTRAL DENSITY .....</b>	<b>19</b>
3.5.1 Applicable Standard .....	19
3.5.2 EUT Setup .....	19
3.5.3 Test Procedure .....	19
<b>3.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b>	<b>20</b>
3.6.1 Applicable Standard .....	20
3.6.2 EUT Setup .....	20
3.6.3 Test Procedure .....	20
<b>3.7 DUTY CYCLE .....</b>	<b>21</b>
3.7.1 EUT Setup .....	21
3.7.2 Test Procedure .....	21
<b>3.8 ANTENNA REQUIREMENT .....</b>	<b>22</b>
3.8.1 Applicable Standard .....	22
3.8.2 Judgment .....	22

<b>4. TEST DATA AND RESULTS .....</b>	<b>23</b>
<b>4.1 AC LINE CONDUCTED EMISSIONS .....</b>	<b>23</b>
<b>4.2 RADIATION SPURIOUS EMISSIONS .....</b>	<b>26</b>
4.2.1 9 kHz – 1 GHz .....	26
4.2.2 1GHz – 25 GHz: .....	29
<b>4.3 6dB EMISSION BANDWIDTH .....</b>	<b>39</b>
<b>4.4 99% OCCUPIED BANDWIDTH.....</b>	<b>42</b>
<b>4.5 MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>45</b>
<b>4.6 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>48</b>
<b>4.7 POWER SPECTRAL DENSITY .....</b>	<b>51</b>
<b>4.8 DUTY CYCLE .....</b>	<b>54</b>
<b>5. EUT PHOTOGRAPHS .....</b>	<b>57</b>
<b>6. TEST SETUP PHOTOGRAPHS .....</b>	<b>58</b>

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2403T78343E-RF-00A	Original Report	2024/6/14

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	RDK X3 Module
EUT Model:	RDK X3 MD 104064
Multiple Model:	RDK X3 MD 102032, RDK X3 MD 104032, RDK X3 MD 102016, RDK X3 MD 102000
Operation Frequency:	2402-2480 MHz
Maximum Peak Output Power (Conducted):	5.88 dBm
Modulation Type:	GFSK
Rated Input Voltage:	DC 5V
Serial Number:	2M3N-1
EUT Received Date:	2024/5/27
EUT Received Status:	Good
Note: The multiple models are electrically identical with the test model except internal storage. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
...	...	38	2478
19	2440	39	2480

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2402
Middle	2440
Highest	2480

Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range (MHz)	Antenna Gain (dBi)
Dipole	50	2400-2500	2.76
The Method of §15.203 Compliance: <div><input type="checkbox"/> Antenna was permanently attached to the unit. <input checked="" type="checkbox"/> Antenna use a unique type of connector to attach to the EUT. <input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.</div>			

Accessory Information:

Accessory Description	Manufacturer	Model
/	/	/

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
<b>Equipment Modifications:</b>	No		
<b>EUT Exercise Software:</b>	MobaXterm		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲：			
Test Modes	Power Level Setting		
	Lowest Channel	Middle Channel	Highest Channel
1Mbps	Default	Default	Default

### 1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Fangxin	Adapter	FX2U-050200U	AD220930001
Unknown	Expansion board	X375M44W	M000001

### 1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	NO	NO	1.2	Adapter	EUT

### 1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

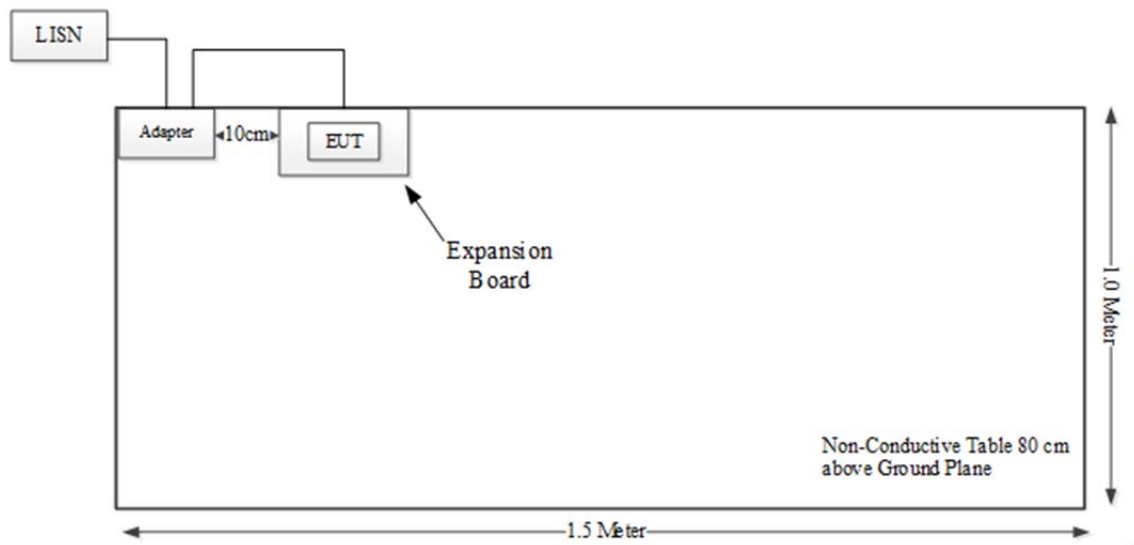

Spurious Emissions:

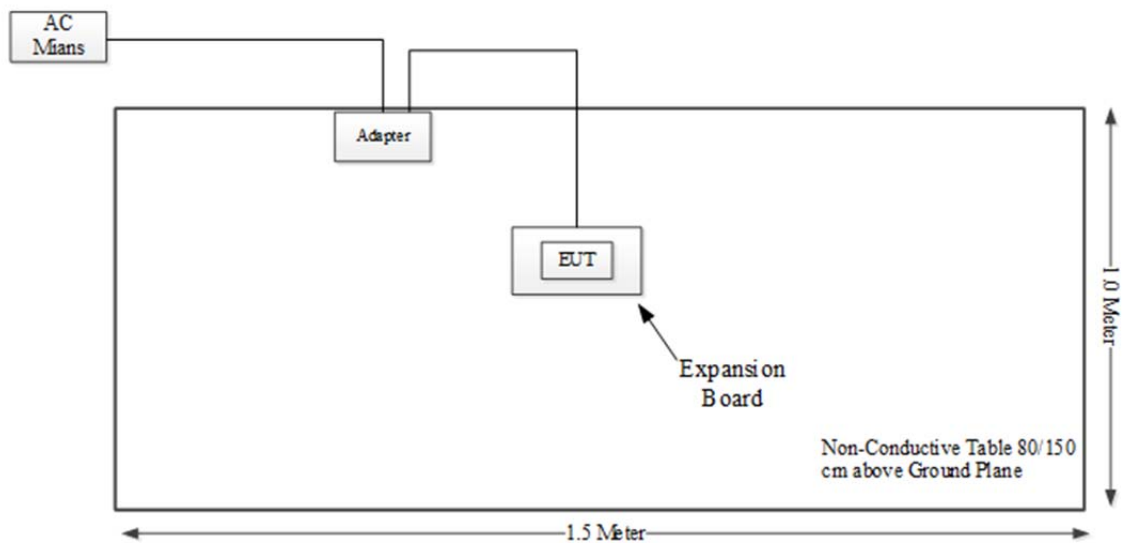



### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9k~30MHz: 4.12dB, 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G:5.47 dB, 26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	PASS
FCC §15.207(a)	AC Line Conducted Emissions	PASS
FCC §15.205,§15.209,§15.247(d)	Radiated Spurious Emission	PASS
FCC §15.207(a)(2)	6dB Emission Bandwidth	PASS
FCC §15.247(b)(1)	Maximum Conducted Output Power	PASS
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	PASS
FCC §15.247(e)	Power Spectral Density	PASS
C63.10 §11.6	Duty Cycle	PASS

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 Applicable Standard

FCC §15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### 3.1.2 EUT Setup

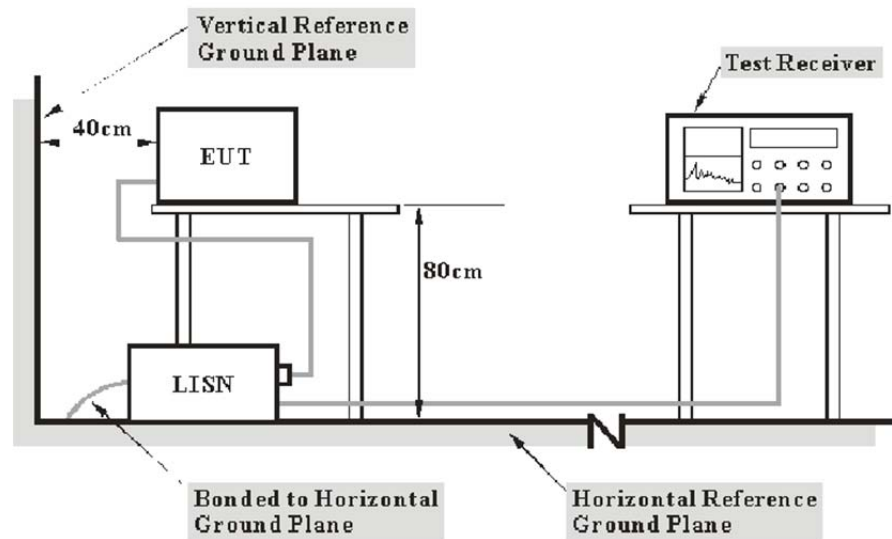

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## 3.2 Radiation Spurious Emissions


### 3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### 3.2.2 EUT Setup

9kHz - 30MHz:

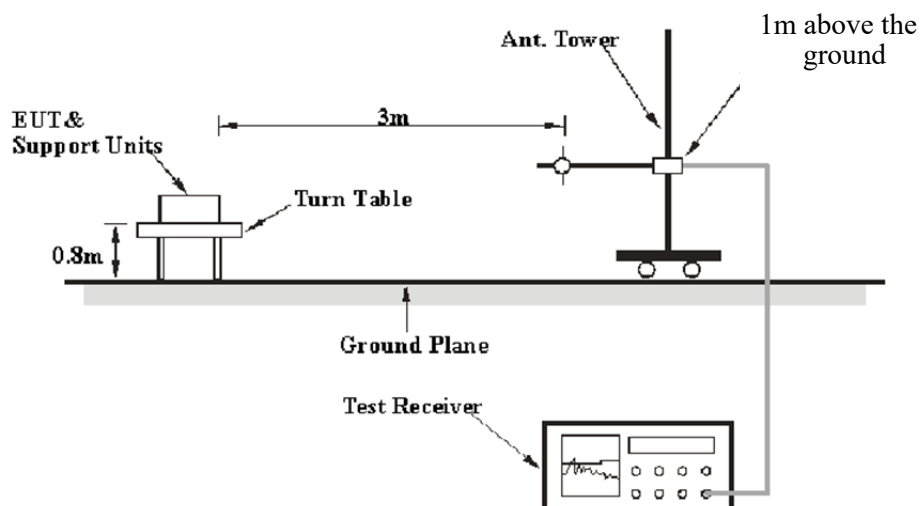

30MHz - 1GHz:

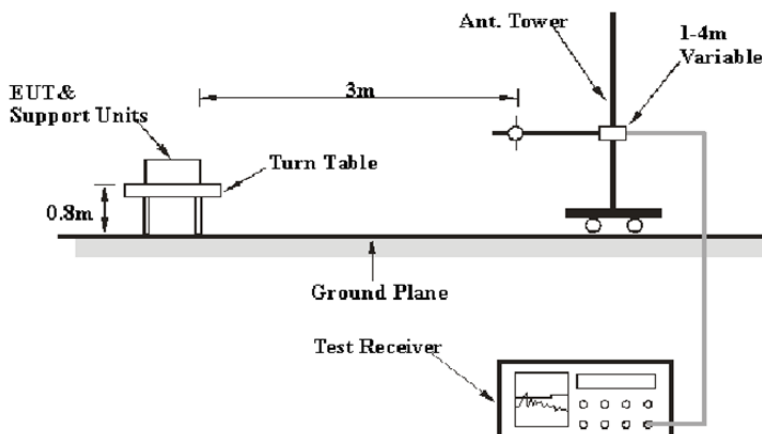

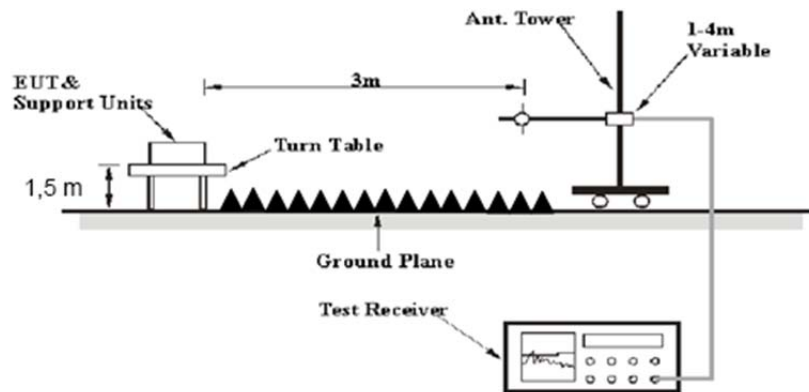**Above 1GHz:**

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

**3.2.3 EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	/	PK
	/	/	200 Hz	QP/AV
150 kHz – 30 MHz	10 kHz	30 kHz	/	PK
	/	/	9 kHz	QP/AV
30 MHz – 1000 MHz	100 kHz	300 kHz	/	PK
	/	/	120 kHz	QP

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/T

Note: T is minimum transmission duration

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

The spurious emissions which below the limit more than 20dB was not be recorded.

### 3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9–90 kHz, 110–490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result




### 3.3 Minimum 6 dB Bandwidth

#### 3.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 3.3.2 EUT Setup

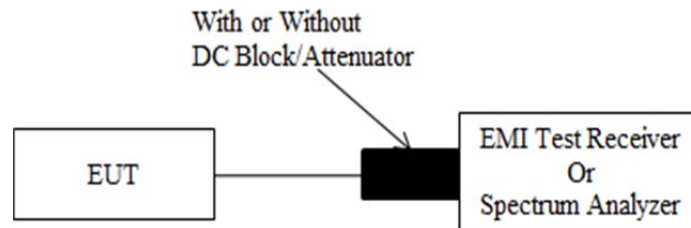

#### 3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


### 3.4 Maximum Conducted Output Power

#### 3.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

#### 3.4.2 EUT Setup

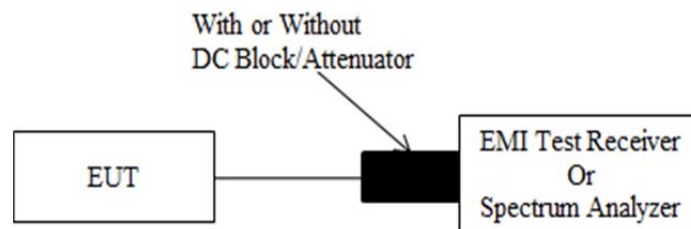

#### 3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq [3 \times \text{RBW}]$ .
- c) Set span  $\geq [3 \times \text{RBW}]$ .
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.


### 3.5 Maximum power spectral density

#### 3.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 3.5.2 EUT Setup

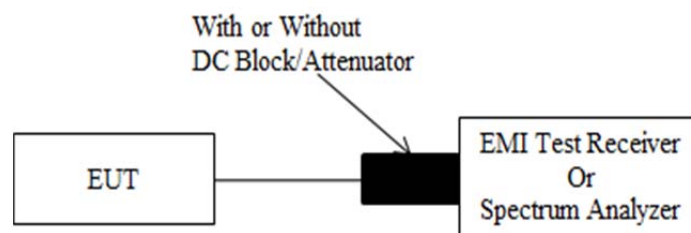

#### 3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


### 3.6 100 kHz Bandwidth of Frequency Band Edge

#### 3.6.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 3.6.2 EUT Setup

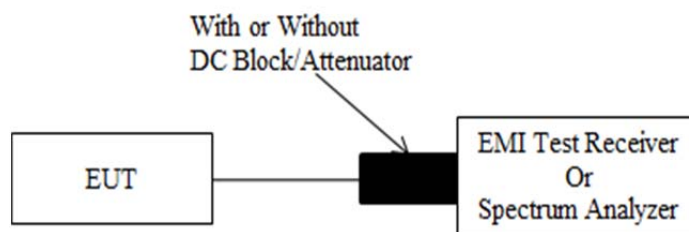


#### 3.6.3 Test Procedure

According to ANSI C63.10-2013 Section 11.11

- Set the center frequency and span to encompass frequency range to be measured.
  - Set the RBW = 100 kHz.
  - Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - Detector = peak.
  - Sweep time = auto couple.
  - Trace mode = max hold.
  - Allow trace to fully stabilize.
  - Use the peak marker function to determine the maximum amplitude level.
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

### 3.7 Duty Cycle

#### 3.7.1 EUT Setup

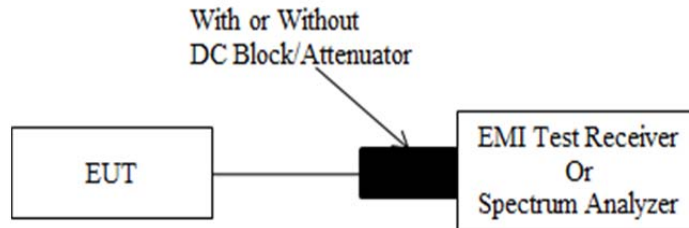

#### 3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

### **3.8 Antenna Requirement**

#### **3.8.1 Applicable Standard**

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

#### **3.8.2 Judgment**

**Compliant.** Please refer to the Antenna Information detail in Section 1.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2M3N-1	Test Date:	2024/6/4
Test Site:	CE	Test Mode:	Transmitting (maximum output power mode, high channel)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26	Relative Humidity: (%)	61	ATM Pressure: (kPa)	100.3
----------------------	----	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101132	2024/4/1	2025/3/31
R&S	EMI Test Receiver	ESR3	102726	2024/4/1	2025/3/31
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2024/1/15	2025/1/14
Audix	Test Software	E3	191218 (V9)	N/A	N/A


*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Project No.: 2403T78343E-RF

Tester: David Huang

Port: Line


Note: Transmitting(BLE)

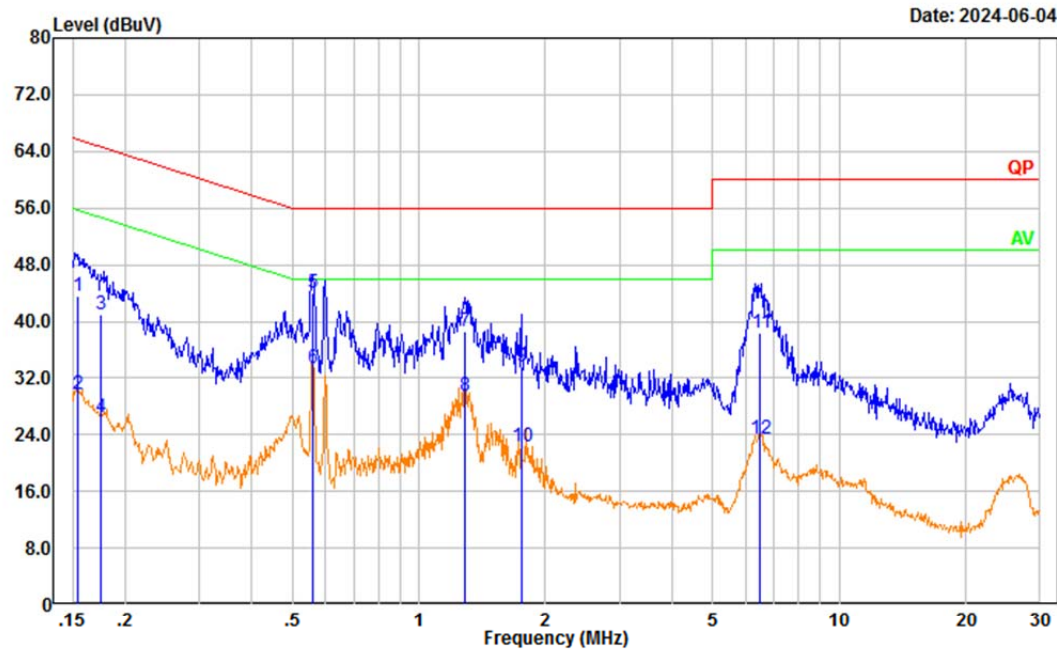

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.154	33.22	10.38	43.60	65.79	22.19	QP
2	0.154	19.24	10.38	29.62	55.79	26.17	Average
3	0.175	30.68	10.21	40.89	64.74	23.85	QP
4	0.175	16.16	10.21	26.37	54.74	28.37	Average
5	0.557	33.45	10.57	44.02	56.00	11.98	QP
6	0.557	22.85	10.57	33.42	46.00	12.58	Average
7	1.285	28.04	10.48	38.52	56.00	17.48	QP
8	1.285	19.10	10.48	29.58	46.00	16.42	Average
9	1.753	23.29	10.25	33.54	56.00	22.46	QP
10	1.753	12.13	10.25	22.38	46.00	23.62	Average
11	6.480	27.94	10.54	38.48	60.00	21.52	QP
12	6.480	12.83	10.54	23.37	50.00	26.63	Average



Project No.: 2403T78343E-RF  
Tester: David Huang  
Port: neutral  
Note: Transmitting(BLE)

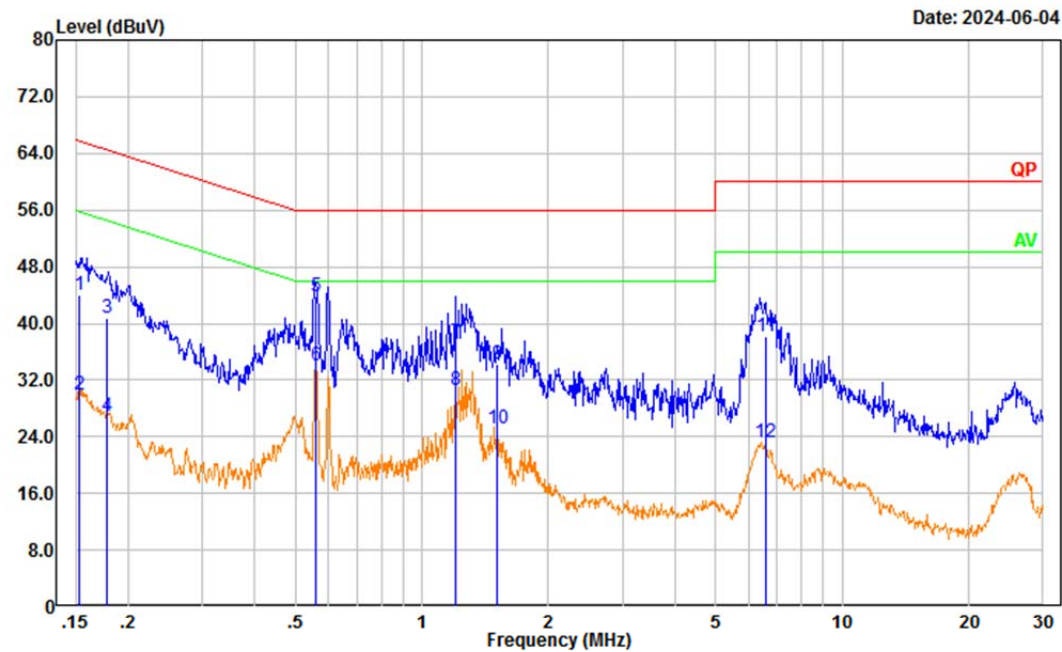

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.154	33.57	10.50	44.07	65.80	21.73	QP
2	0.154	19.35	10.50	29.85	55.80	25.95	Average
3	0.178	30.41	10.40	40.81	64.59	23.78	QP
4	0.178	16.39	10.40	26.79	54.59	27.80	Average
5	0.559	33.30	10.42	43.72	56.00	12.28	QP
6	0.559	23.51	10.42	33.93	46.00	12.07	Average
7	1.199	26.87	10.48	37.35	56.00	18.65	QP
8	1.199	20.19	10.48	30.67	46.00	15.33	Average
9	1.513	23.92	10.43	34.35	56.00	21.65	QP
10	1.513	14.69	10.43	25.12	46.00	20.88	Average
11	6.553	28.24	10.00	38.24	60.00	21.76	QP
12	6.553	13.13	10.00	23.13	50.00	26.87	Average

## 4.2 Radiation Spurious Emissions

### 4.2.1 9 kHz – 1 GHz

Serial Number:	2M3N-1	Test Date:	2024/6/12
Test Site:	966-2	Test Mode:	Transmitting (maximum output power mode, high channel)
Tester:	Carl Xue	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	25.2	Relative Humidity: (%)	59	ATM Pressure: (kPa)	100.1
-------------------	------	------------------------	----	---------------------	-------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2023/12/1	2026/11/30
BACL	Loop Antenna	1313-1A	3110611	2023/12/4	2026/12/3
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0300-01	2024/1/11	2025/1/10
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0500-01	2024/1/11	2025/1/10
R&S	EMI Test Receiver	ESR3	102724	2024/2/29	2025/2/28
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0100-03	2023/12/4	2024/12/3
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0370-01	2023/12/4	2024/12/3
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/12/4	2024/12/3
Sonoma	Amplifier	310N	186165	2023/12/4	2024/12/3
Audix	Test Software	E3	191218 (V9)	N/A	N/A


\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:


After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to plots.

For 9kHz-30MHz, The amplitude of spurious emissions attenuated more than 20 dB below the limit was not be reported.

Project No.: 2403T78343E-RF  
Tester: Carl Xue  
Polarization: horizontal  
Note: Transmitting BLE

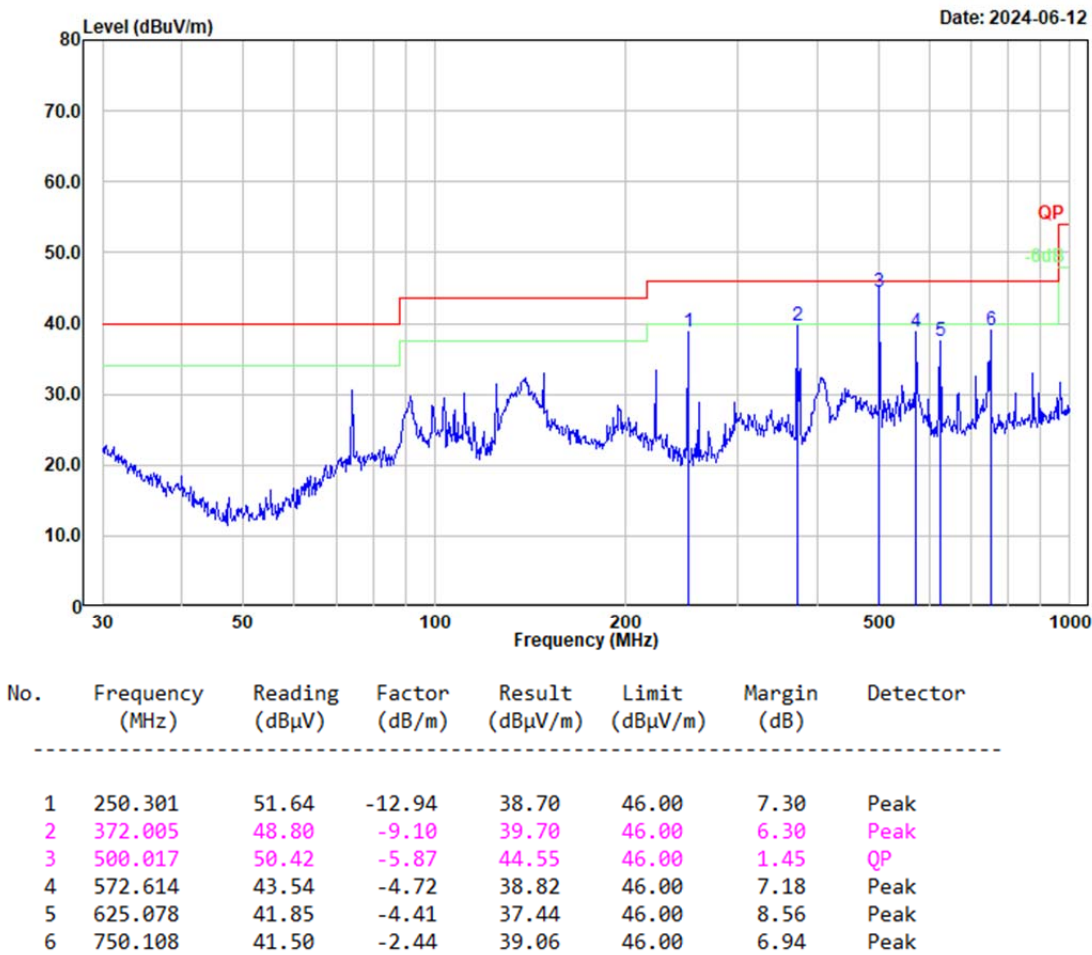

Project No.: 2403T78343E-RF  
Tester: Carl Xue  
Polarization: vertical  
Note: Transmitting BLE

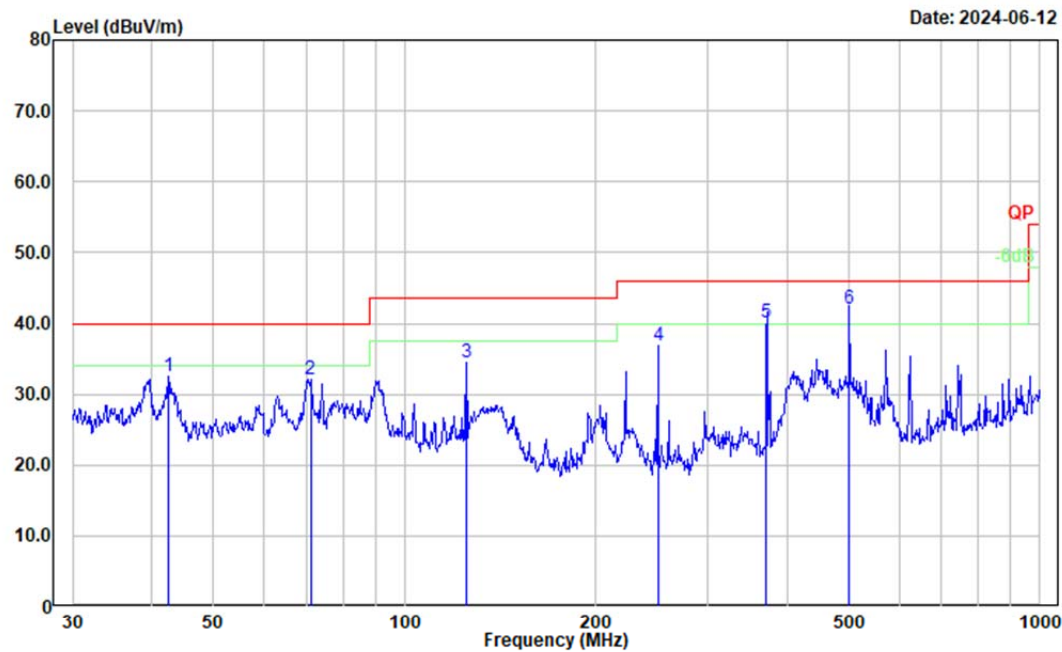

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	42.451	45.54	-13.07	32.47	40.00	7.53	Peak
2	71.080	49.29	-17.19	32.10	40.00	7.90	Peak
3	125.007	45.38	-10.99	34.39	43.50	9.11	Peak
4	250.301	49.77	-12.94	36.83	46.00	9.17	Peak
5	371.261	49.22	-9.11	40.11	46.00	5.89	QP
6	499.997	47.85	-5.87	41.98	46.00	4.02	QP

**4.2.2 1GHz – 25 GHz:**

Serial Number:	2M3N-1	Test Date:	2024/6/3
Test Site:	966-1	Test Mode:	Transmitting
Tester:	Mack Huang	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	24.6	Relative Humidity: (%)	55	ATM Pressure: (kPa)	100.1
----------------------	------	---------------------------	----	---------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	9912-5985	2023/12/6	2026/12/5
R&S	Spectrum Analyzer	FSV40	101591	2024/4/1	2025/3/31
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2024/1/15	2025/1/14
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2024/1/15	2025/1/14
BACL	Preamplifier	1313-A20M18G	4032311	2024/4/1	2025/3/31
Audix	Test Software	E3	191218 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2024/2/4	2027/2/3
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2024/1/15	2025/1/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2024/1/15	2025/1/14
JD	Multiplex Switch Test Control Set	DT7220SCU	DQ77925	2023/8/6	2024/8/5
JD	Filter Switch Unit	DT7220FSU	DQ77928	2023/8/6	2024/8/5

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**


After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

**BLE 1Mbps:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				2402	MHz		
2390.000	26.92	PK	H	31.46	58.38	74.00	15.62
2390.000	13.78	AV	H	31.46	45.24	54.00	8.76
2390.000	26.68	PK	V	31.46	58.14	74.00	15.86
2390.000	13.90	AV	V	31.46	45.36	54.00	8.64
4804.000	36.20	PK	H	8.50	44.70	74.00	29.30
4804.000	28.37	AV	H	8.50	36.87	54.00	17.13
4804.000	37.84	PK	V	8.50	46.34	74.00	27.66
4804.000	29.22	AV	V	8.50	37.72	54.00	16.28
7206.000	35.96	PK	H	11.39	47.35	74.00	26.65
7206.000	23.48	AV	H	11.39	34.87	54.00	19.13
7206.000	36.65	PK	V	11.39	48.04	74.00	25.96
7206.000	24.99	AV	V	11.39	36.38	54.00	17.62
Middle Channel:				2440	MHz		
4880.000	35.11	PK	H	8.96	44.07	74.00	29.93
4880.000	27.08	AV	H	8.96	36.04	54.00	17.96
4880.000	37.43	PK	V	8.96	46.39	74.00	27.61
4880.000	29.89	AV	V	8.96	38.85	54.00	15.15
7320.000	35.63	PK	H	11.56	47.19	74.00	26.81
7320.000	23.55	AV	H	11.56	35.11	54.00	18.89
7320.000	35.23	PK	V	11.56	46.79	74.00	27.21
7320.000	23.57	AV	V	11.56	35.13	54.00	18.87
High Channel:				2480	MHz		
2483.500	26.10	PK	H	31.50	57.60	74.00	16.40
2483.500	13.22	AV	H	31.50	44.72	54.00	9.28
2483.500	26.59	PK	V	31.50	58.09	74.00	15.91
2483.500	13.40	AV	V	31.50	44.90	54.00	9.10
4960.000	35.01	PK	H	8.80	43.81	74.00	30.19
4960.000	27.25	AV	H	8.80	36.05	54.00	17.95
4960.000	37.76	PK	V	8.80	46.56	74.00	27.44
4960.000	29.52	AV	V	8.80	38.32	54.00	15.68
7440.000	34.65	PK	H	11.47	46.12	74.00	27.88
7440.000	22.77	AV	H	11.47	34.24	54.00	19.76
7440.000	35.10	PK	V	11.47	46.57	74.00	27.43
7440.000	23.96	AV	V	11.47	35.43	54.00	18.57


Worst band edge test plots

Project No.: 2403T78343E-RF  
Tester: Mack Huang  
Polarization: Horizontal  
Note: BLE 1Mbps Low Channel 2402MHz

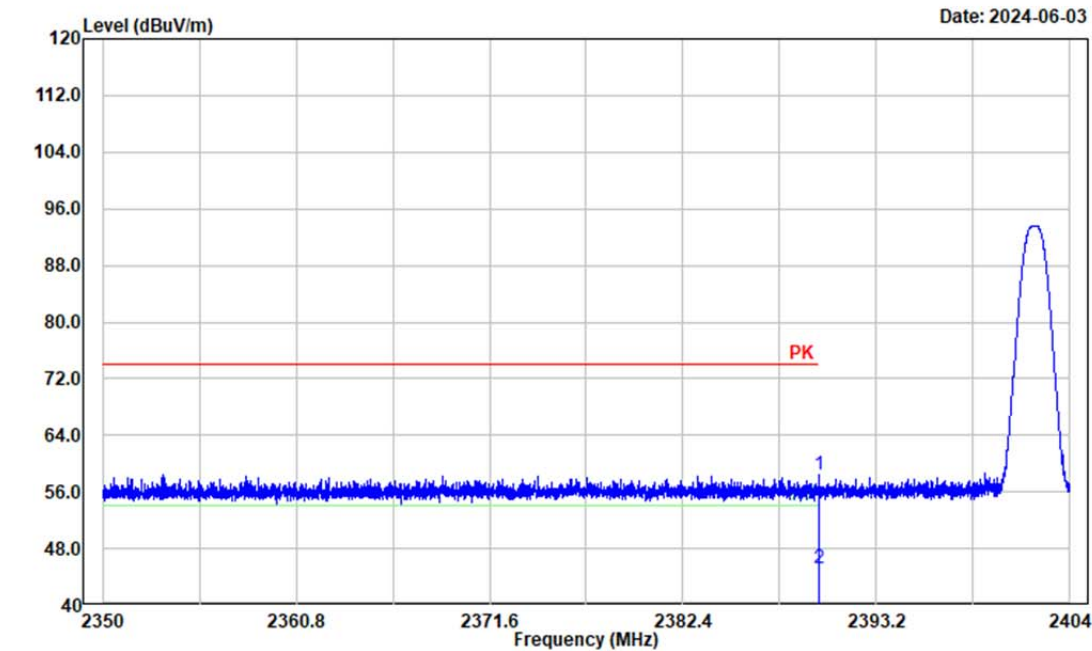

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2390.000	26.92	31.46	58.38	74.00	15.62	Peak
2	2390.000	13.78	31.46	45.24	54.00	8.76	Average

Project No.: 2403T78343E-RF  
Tester: Mack Huang  
Polarization: Vertical  
Note: BLE 1Mbps Low Channel 2402MHz

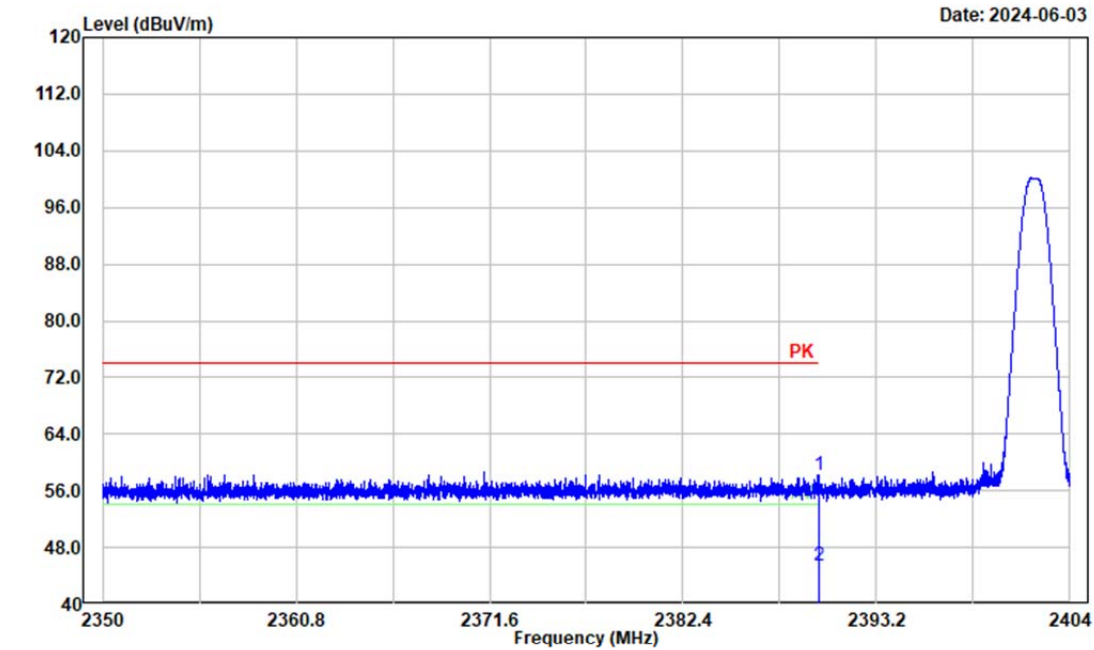


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
<hr/>							
1	2390.000	26.68	31.46	58.14	74.00	15.86	Peak
2	2390.000	13.90	31.46	45.36	54.00	8.64	Average




Worst radiation spurious emissions margin test plots


Project No.: 2403T78343E-RF  
Tester: Mack Huang  
Polarization: horizontal  
Note: BLE 1Mbps Middle Channel 2440MHz

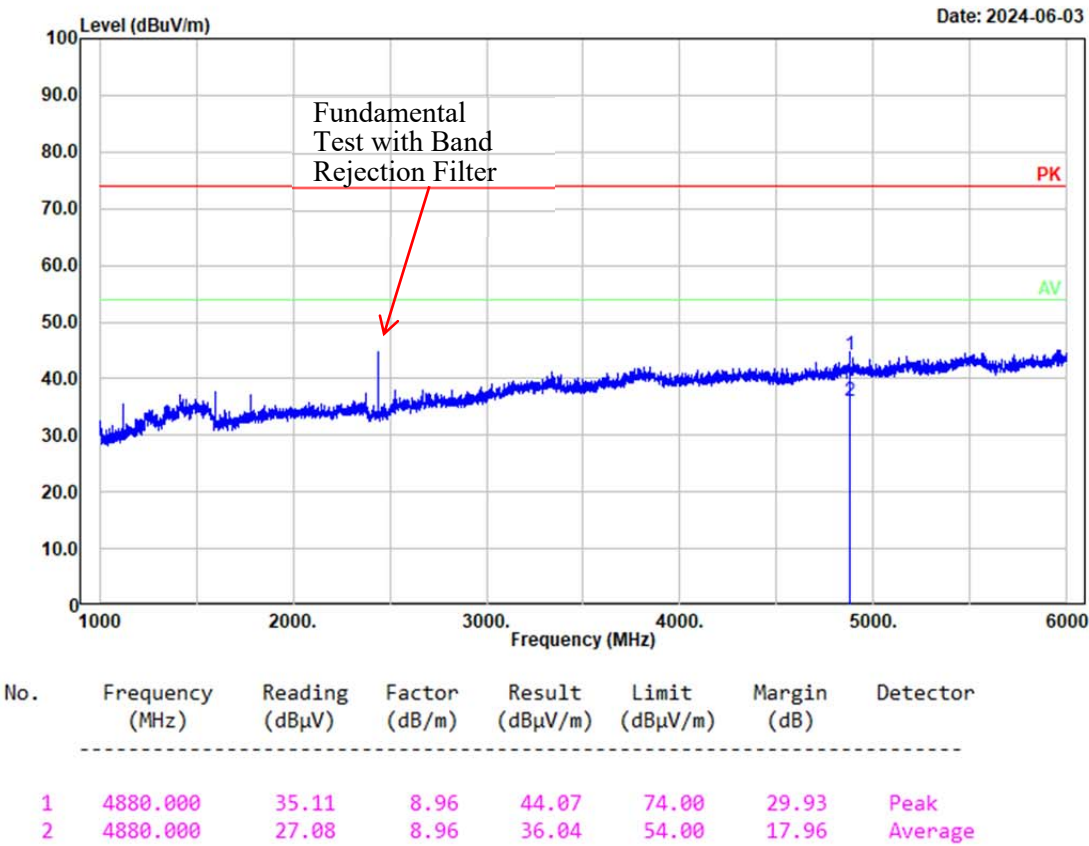


Project No.: 2403T78343E-RF  
Tester: Mack Huang  
Polarization: vertical  
Note: BLE 1Mbps Middle Channel 2440MHz

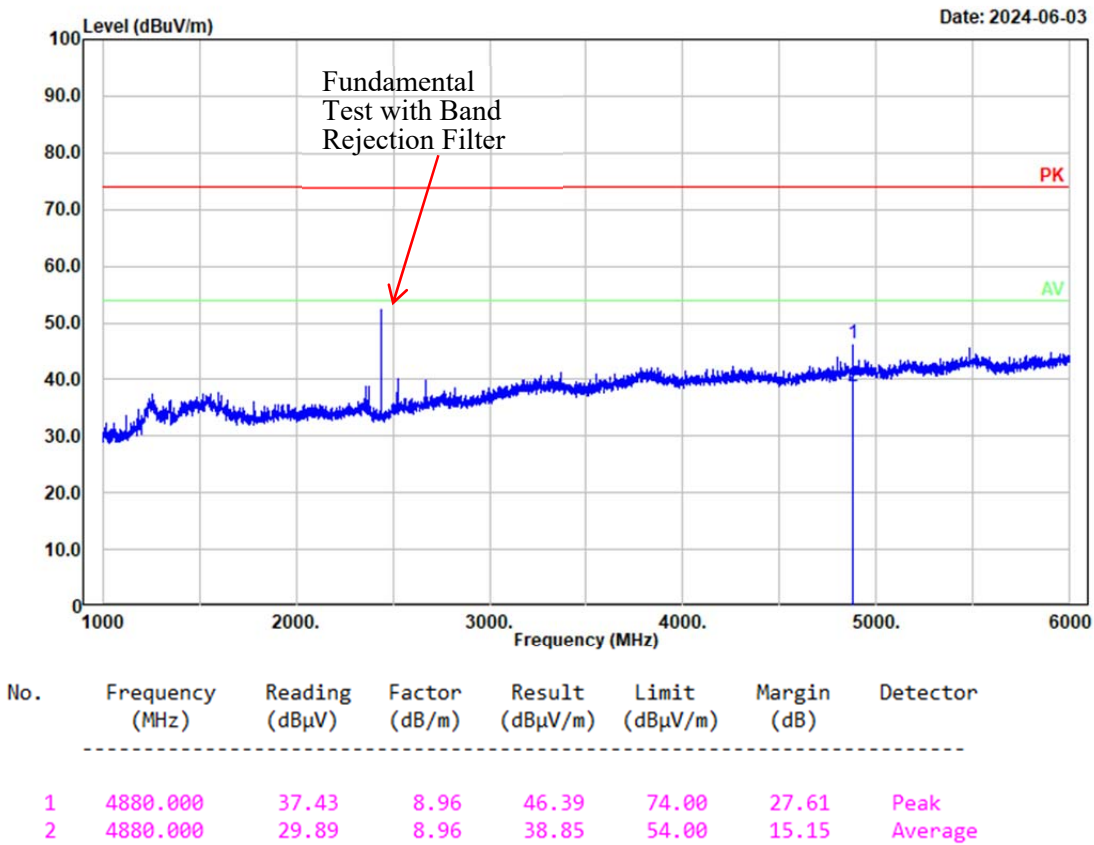


Project No.: 2403T78343E-RF  
Tester: Mack Huang  
Polarization: horizontal  
Note: BLE 1Mbps Middle Channel 2440MHz

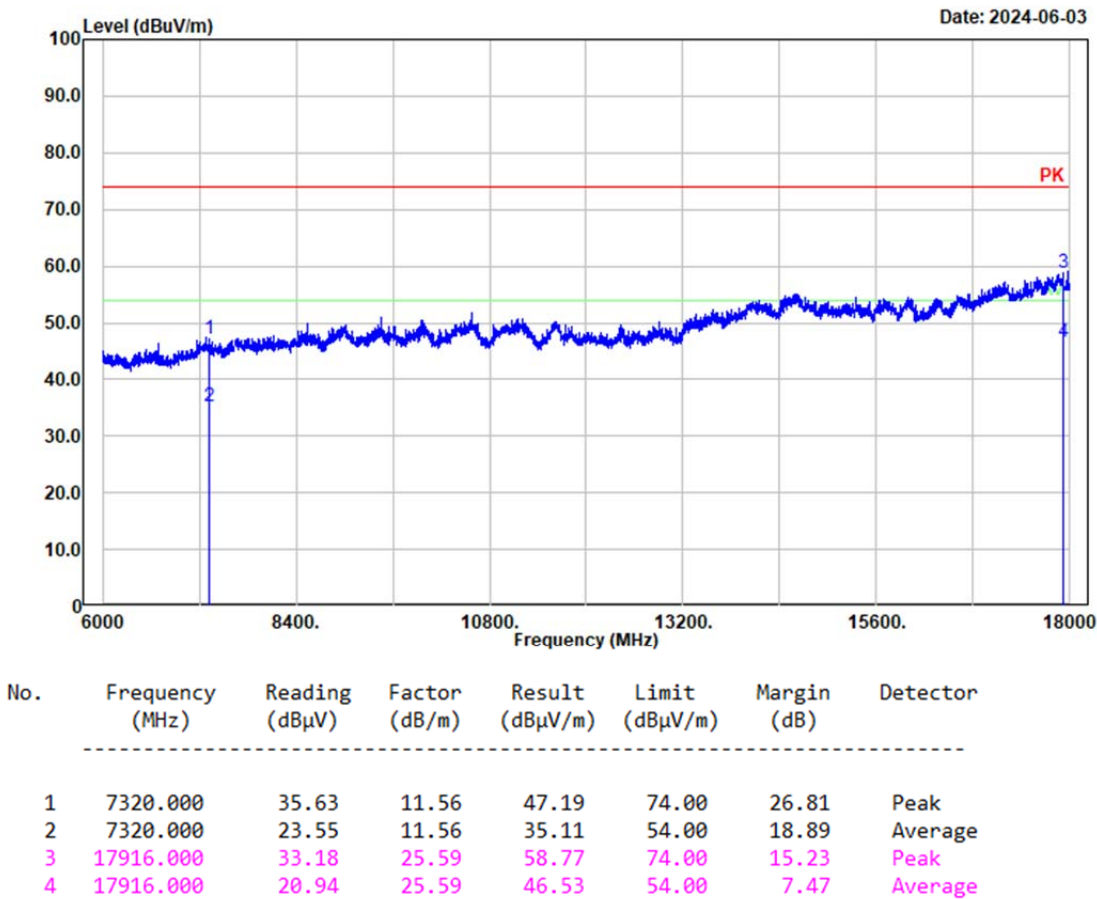


Project No.: 2403T78343E-RF  
Tester: Mack Huang  
Polarization: vertical  
Note: BLE 1Mbps Middle Channel 2440MHz

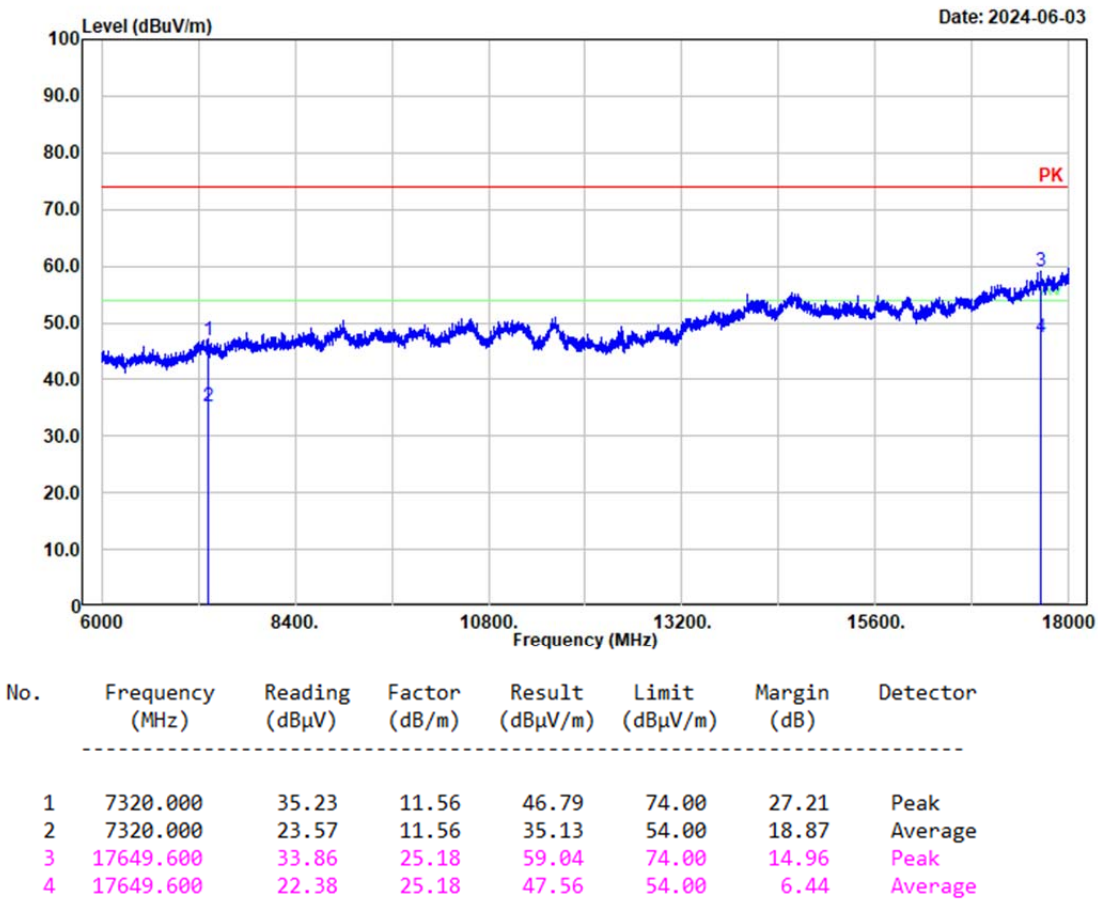

Project No.: 2403T78343E-RF  
Tester: Mack Huang  
Polarization: Horizontal  
Note: BLE 1Mbps Middle Channel 2440MHz

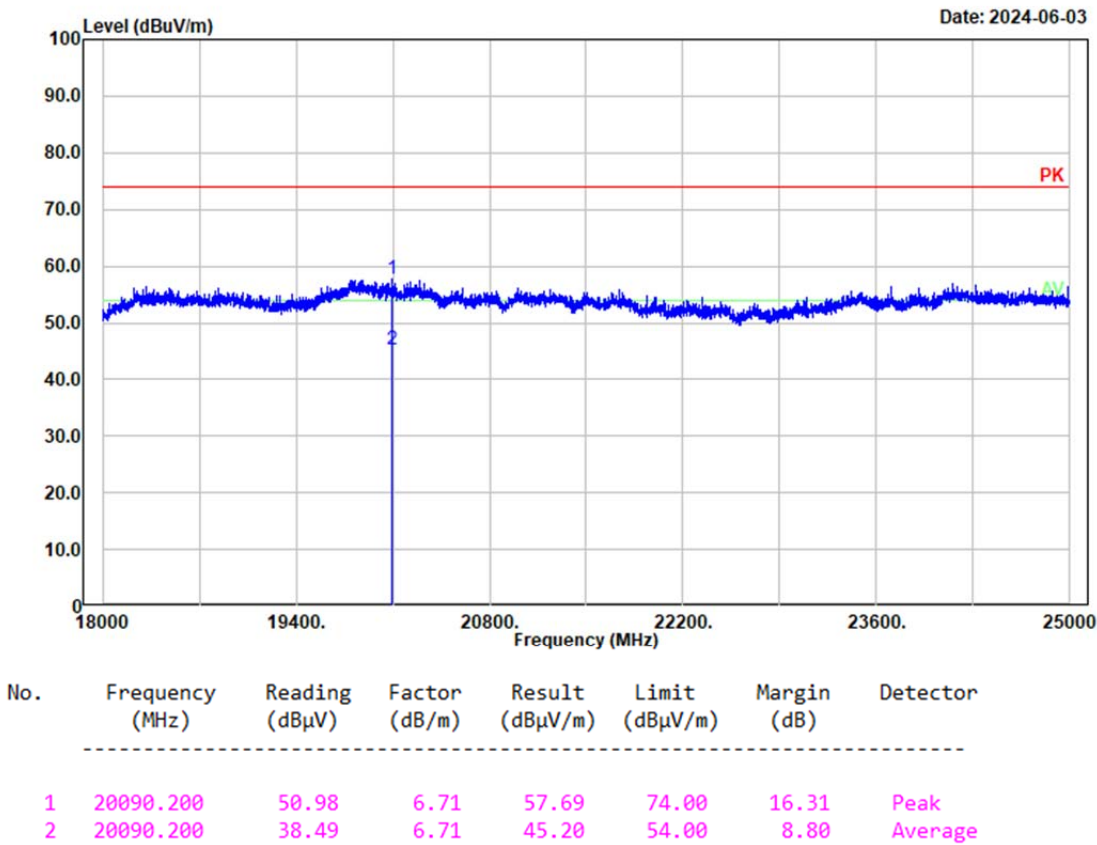

Project No.: 2403T78343E-RF  
Tester: Mack Huang  
Polarization: Vertical  
Note: BLE 1Mbps Middle Channel 2440MHz

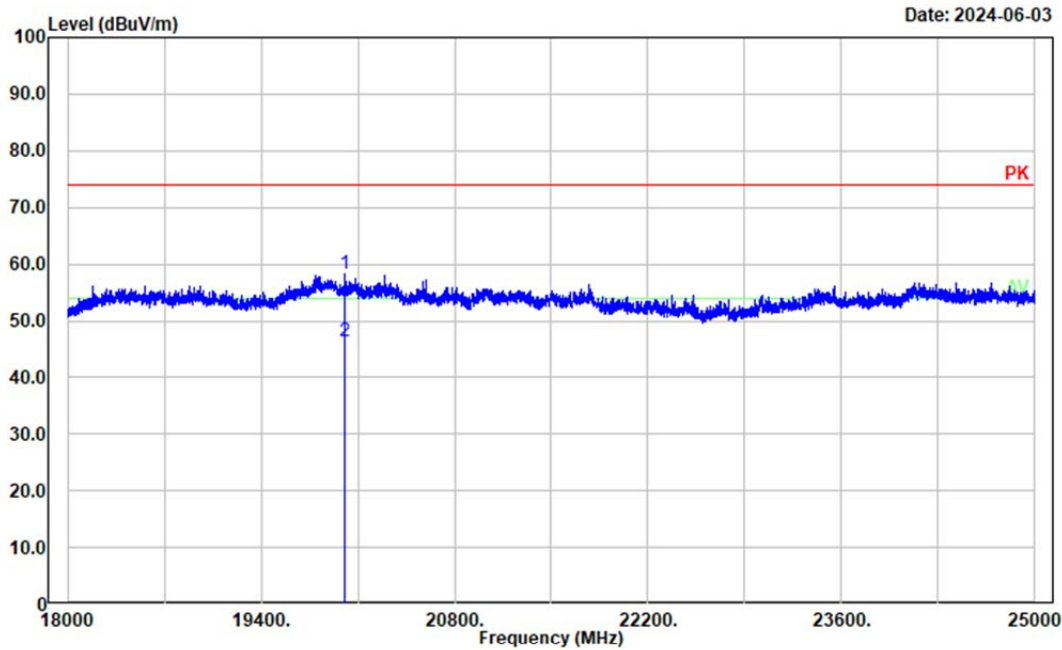

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
<hr/>							
1	20010.400	50.97	7.35	58.32	74.00	15.68	Peak
2	20010.400	39.04	7.35	46.39	54.00	7.61	Average

4.3 6dB Emission Bandwidth

Test Information:

Serial No.:	2M3N-1	Test Date:	2024/5/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Chin Qin	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	53	ATM Pressure: (kPa)	100.1
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2024/04/01	2025/03/31
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

BLE 1M

Mode	Value (MHz)	Limit (MHz)	Result
Low	0.505	0.5	Pass
Middle	0.513	0.5	Pass
High	0.515	0.5	Pass



Low 0.505MHz



ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:03:57

ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:15:52

4.4 99% Occupied Bandwidth

Test Information:

Serial No.:	2M3N-1	Test Date:	2024/5/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Chin Qin	Test Result:	N/A

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	53	ATM Pressure: (kPa)	100.1
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2024/04/01	2025/03/31
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A


*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**BLE 1M**

Mode	99% OBW (MHz)
Low	0.891
Middle	0.897
High	0.903


BLE 1M

Low 0.891MHz

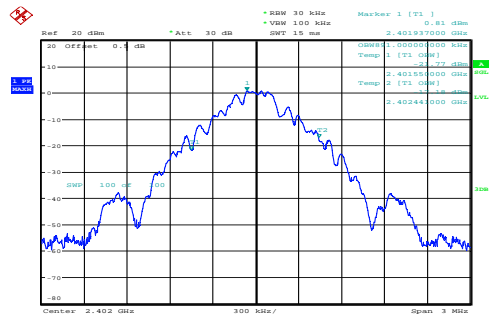


ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 21:52:27

Middle 0.897MHz

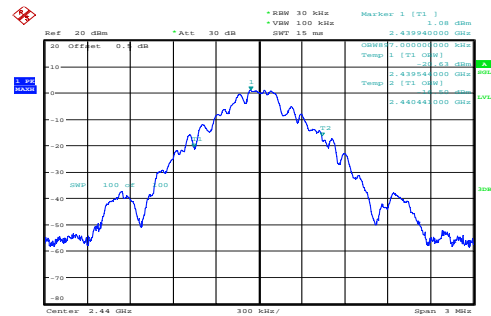

ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:04:18

High 0.903MHz

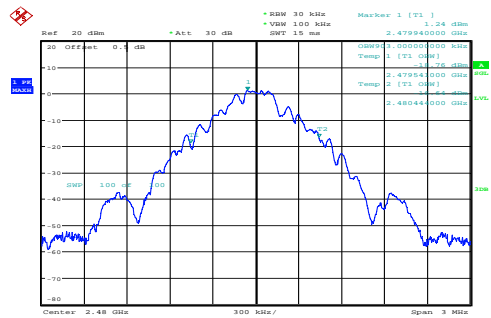

ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:16:13

4.5 Maximum Conducted Output Power

Test Information:

Serial No.:	2M3N-1	Test Date:	2024/5/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Chin Qin	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	53	ATM Pressure: (kPa)	100.1
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2024/04/01	2025/03/31
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A


*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**BLE 1M**

Mode	Value (dBm)	Limit (dBm)	Result
Low	5.67	30.00	Pass
Middle	5.72	30.00	Pass
High	5.88	30.00	Pass


BLE 1M

Low 5.67dBm

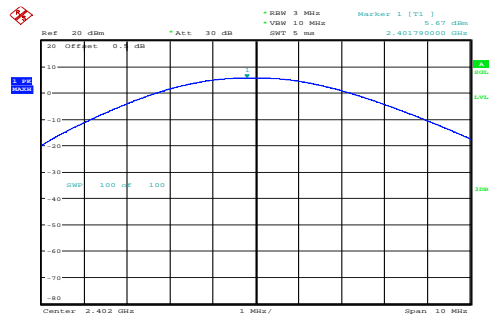


ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:22:38

Middle 5.72dBm

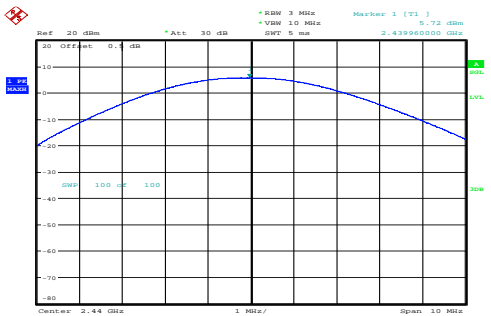

ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:07:18

High 5.88dBm

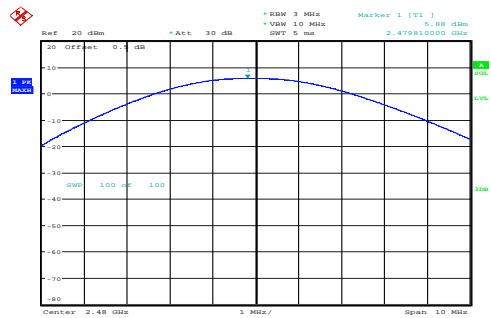

ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:17:01

4.6 100 kHz Bandwidth of Frequency Band Edge

Test Information:

Serial No.:	2M3N-1	Test Date:	2024/5/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Chin Qin	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	53	ATM Pressure: (kPa)	100.1
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2024/04/01	2025/03/31
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*



BLE 1M

Mode	Value (dB)	Limit (dB)	Result
Low	46.96	20.00	Pass
High	57.28	20.00	Pass

Low 46.96dB



ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:14:53

4.7 Power Spectral Density

Test Information:

Serial No.:	2M3N-1	Test Date:	2024/5/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Chin Qin	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	53	ATM Pressure: (kPa)	100.1
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2024/04/01	2025/03/31
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A


*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

BLE 1M

Mode	Value (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	-4.82	8.00	Pass
Middle	-4.66	8.00	Pass
High	-4.52	8.00	Pass


BLE 1M

Low -4.82dBm/3kHz

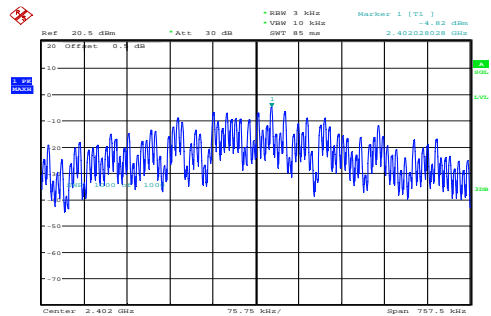


ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:00:52

Middle -4.66dBm/3kHz

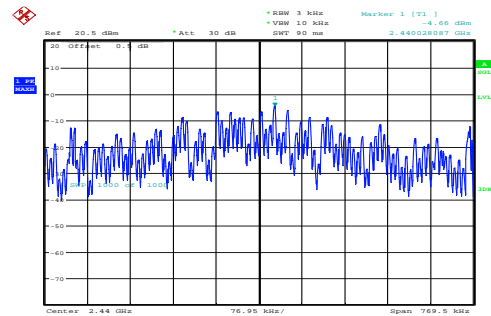

ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:09:24

High -4.52dBm/3kHz

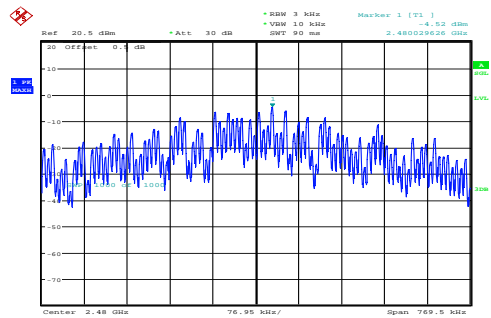

ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:19:13

4.8 Duty Cycle

Test Information:

Serial No.:	2M3N-1	Test Date:	2024/5/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Chin Qin	Test Result:	/

Environmental Conditions:

Temperature: (°C):	25.9	Relative Humidity: (%)	53	ATM Pressure: (kPa)	100.1
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2024/04/01	2025/03/31
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


**BLE 1M**

Mode	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T (Hz)	VBW Setting (kHz)
Low	100.000	100.000	100.00	0.00	NA	0.010
Middle	100.000	100.000	100.00	0.00	NA	0.010
High	100.000	100.000	100.00	0.00	NA	0.010

**Duty Cycle = Ton/(Ton+Toff)\*100%**


BLE 1M

Low  
100.000ms,100.000ms

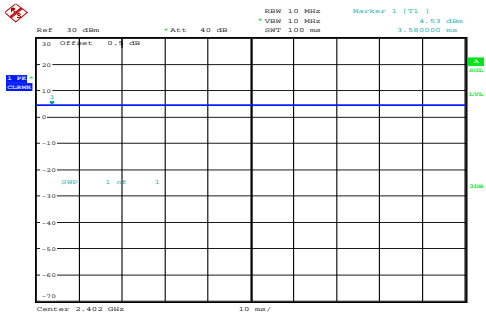


ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 21:55:43

Middle  
100.000ms,100.000ms

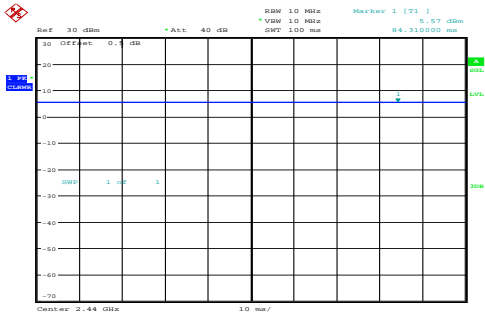

ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:04:37

High  
100.000ms,100.000ms

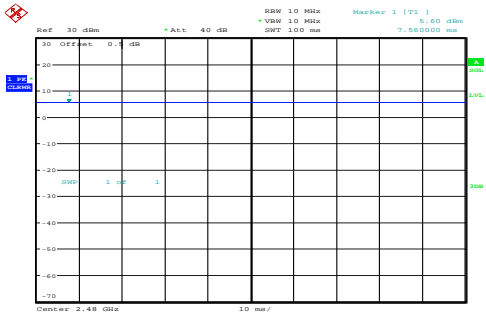

ProjectNo.:2403T78343E-RF Tester:Chin Qin  
Date: 31.MAY.2024 22:16:39



## **5. EUT PHOTOGRAPHS**

---

Please refer to the attachment 2403T78343E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2403T78343E-RF-INP EUT INTERNAL PHOTOGRAPHS

## **6. TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment 2403T78343E-RF-00A-TSP TEST SETUP PHOTOGRAPHS.

**===== END OF REPORT =====**