

FCC TEST REPORT

REPORT NO.: RF930426L08

MODEL NO.: 9128CRF

RECEIVED: July 09, 2004

TESTED: July 13 ~ July 15, 2004

APPLICANT: BEHAVIOR TECH COMPUTER CORP.

ADDRESS: 2F, 51, Tung Hsing Rd., Taipei, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 19, Hwa Ya 2nd rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 14 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA

Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	6
3.4	DESCRIPTION OF SUPPORT UNITS	6
3.5	CONFIGURATION OF SYSTEM UNDER TEST	6
4	TEST PROCEDURE AND RESULT.....	7
4.1	CONDUCTED EMISSION MEASUREMENT.....	7
4.2	RADIATED EMISSION MEASUREMENT.....	7
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	7
4.2.2	TEST INSTRUMENT	8
4.2.3	TEST PROCEDURE.....	9
4.2.4	TEST SETUP.....	10
4.2.5	EUT OPERATING CONDITION.....	10
4.2.6	TEST RESULT.....	11
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	13
5	INFORMATION ON THE TESTING LABORATORIES.....	14

1 CERTIFICATION

PRODUCT : Wireless Keyboard
BRAND NAME : BTC, EMPREX
MODEL NO : 9128CRF
TEST ITEM : PROTOTYPE
TESTED: July 13 ~ July 15, 2004
APPLICANT : BEHAVIOR TECH COMPUTER CORP.
STANDARDS : FCC Part 15, Subpart C (Section 15.227),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY: Wendy Liao, **DATE:** July 16, 2004
Wendy Liao

APPROVED BY: Cody Chang, **DATE:** July 16, 2004
Cody Chang / Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	PASS	Power supply is 3Vdc from batteries
15.227 15.209	Radiated Emission Test	PASS	Minimum passing margin is -9.34dB at 70.82MHz

Note: The information of measurement uncertainty is available upon the customer's request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Keyboard
MODEL NO.	9128CRF
POWER SUPPLY	3Vdc from batteries
MODULATION TYPE	FSK
CARRIER FREQUENCY OF EACH CHANNEL	27.145 & 27.195MHz
NUMBER OF CHANNEL	2
ANTENNA TYPE	Loop Antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is the transmitter part of a Wireless Keyboard.
2. The brands as below are identical to each other except for their brands due to marketing requirement.

Brand	Model	Remark
BTC	9128CRF	Only brand different
EMPRES	9128CRF	Only brand different

3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Two channels was provided to this EUT.

Channel	Frequency
1	27.145MHz
2	27.195MHz

Note: Channel 27.145MHz, the worst case, was chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is the transmitter part of a Wireless Keyboard. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.227)


ANSI C63.4-2001

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

NA

3.5 CONFIGURATION OF SYSTEM UNDER TEST

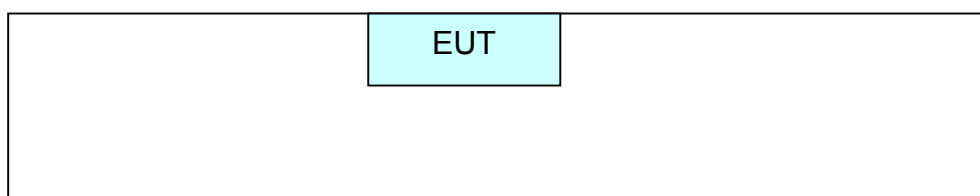

4 TEST PROCEDURE AND RESULT

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of Emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Field strength limits are at the distance of 3 meters, Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any Emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Jan. 13, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2005
Preamplifier Agilent	8449B	3008A01961	Jan. 22, 2005
Preamplifier Agilent	8447D	2944A10629	Jan. 14, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Mar. 04, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 1.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-2.


4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.

4.2.4 TEST SETUP

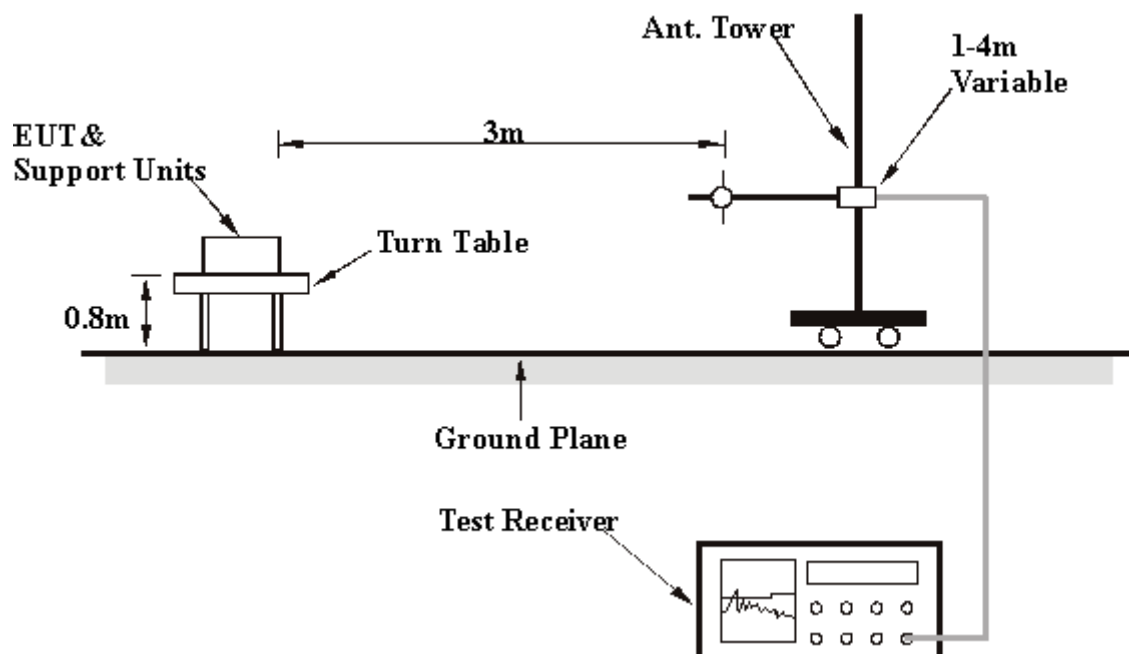

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITION

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.

4.2.6 TEST RESULT

EUT	Wireless Keyboard	MODEL	9128CRF
INPUT POWER	3Vdc	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 60 % RH, 991 hPa	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.15	56.40 PK	100.00	-43.60	1.89 H	280	42.63	13.77
2	*27.14	53.42 AV	80.00	-26.58	1.89 H	280	39.65	13.77
3	35.83	21.27 QP	40.00	-18.73	1.00 H	31	6.70	14.57
4	68.88	17.25 QP	40.00	-22.75	2.00 H	55	4.55	12.71
5	99.98	20.40 QP	43.50	-23.10	2.00 H	247	9.42	10.98
6	129.14	23.93 QP	43.50	-19.57	2.50 H	205	10.27	13.67
7	150.52	22.54 QP	43.50	-20.96	2.00 H	121	7.87	14.67
8	220.50	22.13 QP	46.00	-23.87	1.00 H	334	10.27	11.87
9	245.77	19.16 QP	46.00	-26.84	1.00 H	334	6.00	13.16
10	263.27	19.60 QP	46.00	-26.40	1.50 H	151	6.10	13.50
11	284.65	19.91 QP	46.00	-26.09	1.25 H	133	5.64	14.26
12	296.31	18.01 QP	46.00	-27.99	1.50 H	175	3.57	14.44
13	341.02	18.83 QP	46.00	-27.17	1.00 H	211	3.38	15.44
14	770.62	24.69 QP	46.00	-21.31	1.25 H	280	1.04	23.65
15	887.25	25.04 QP	46.00	-20.96	2.50 H	166	0.17	24.88
16	920.30	26.16 QP	46.00	-19.84	1.50 H	148	0.83	25.33
17	959.18	25.84 QP	46.00	-20.16	1.50 H	259	0.17	25.67

REMARKS: 1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" = Fundamental frequency.

EUT	Wireless Keyboard	MODEL	9128CRF
INPUT POWER	3Vdc	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 60 % RH, 991 hPa	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
TESTED BY	Match Tsui		


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.15	44.96 PK	100.00	-55.04	1.89 V	280	31.19	13.77
2	*27.14	41.30 AV	80.00	-38.70	1.89 V	280	27.53	13.77
3	37.78	27.27 QP	40.00	-12.73	1.25 V	106	12.39	14.87
4	47.49	27.25 QP	40.00	-12.75	1.25 V	97	12.25	15.00
5	70.82	30.66 QP	40.00	-9.34	1.00 V	208	18.29	12.37
6	86.37	28.51 QP	40.00	-11.49	1.25 V	250	18.39	10.12
7	99.98	30.81 QP	43.50	-12.69	1.25 V	64	19.83	10.98
8	115.53	29.65 QP	43.50	-13.85	1.00 V	193	17.08	12.57
9	129.14	29.37 QP	43.50	-14.13	1.00 V	28	15.70	13.67
10	148.58	19.15 QP	43.50	-24.35	1.50 V	250	4.53	14.62
11	158.30	22.45 QP	43.50	-21.05	1.00 V	295	7.60	14.85
12	187.45	21.38 QP	43.50	-22.12	1.25 V	16	9.01	12.37
13	842.55	25.29 QP	46.00	-20.71	1.50 V	136	1.16	24.13
14	914.47	25.60 QP	46.00	-20.40	1.25 V	349	0.33	25.26
15	955.29	25.05 QP	46.00	-20.95	1.00 V	103	-0.61	25.66

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*" = Fundamental frequency.

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST

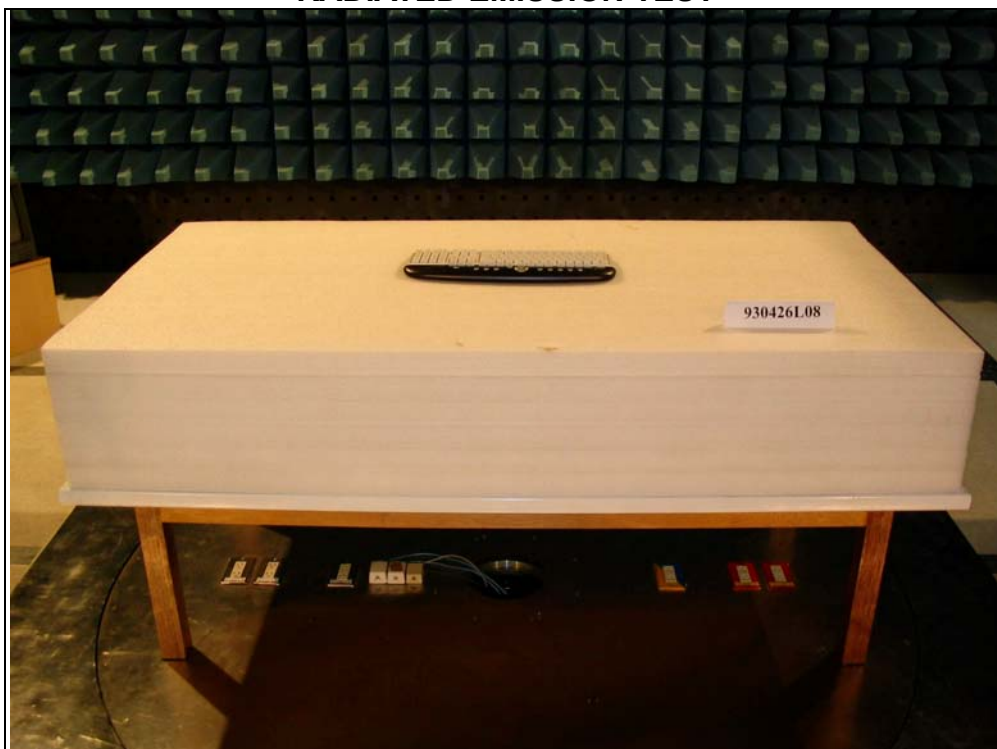



5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.0