



REPORT No. : SZ21010168W07

# TEST REPORT

**APPLICANT** : Bullitt Group

**PRODUCT NAME** : 4G Mobile Phone

**MODEL NAME** : S22 Flip

**BRAND NAME** : CAT

**FCC ID** : ZL5S22F

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**RECEIPT DATE** : 2021-02-08

**TEST DATE** : 2021-03-23 to 2021-04-07

**ISSUE DATE** : 2021-05-27

Edited by: Peng Mi  
Peng Mi (Rapporteur)

Approved by: Peng Huarui  
Peng Huarui (Supervisor)

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555  
Http://www.morlab.cn

Fax: 86-755-36698525  
E-mail: service@morlab.cn





# DIRECTORY

<b>1. Technical Information</b>	<b>3</b>
<b>1.1. Applicant and Manufacturer Information</b>	<b>3</b>
<b>1.2. Equipment Under Test (EUT) Description</b>	<b>3</b>
<b>1.3. Modulation Type and Data Rate of EUT</b>	<b>4</b>
<b>1.4. The Channel Number and Frequency</b>	<b>5</b>
<b>1.5. Test Standards and Results</b>	<b>6</b>
<b>1.6. Environmental Conditions</b>	<b>7</b>
<b>2. 47 CFR Part 15C Requirements</b>	<b>8</b>
<b>2.1. Antenna Requirement</b>	<b>8</b>
<b>2.2. Duty Cycle of Test Signal</b>	<b>9</b>
<b>2.3. Maximum Peak and Average Conducted Output Power</b>	<b>13</b>
<b>2.4. Bandwidth</b>	<b>16</b>
<b>2.5. Conducted Spurious Emissions and Band Edge</b>	<b>25</b>
<b>2.6. Power Spectral Density</b>	<b>38</b>
<b>2.7. Conducted Emission</b>	<b>47</b>
<b>2.8. Restricted Frequency Bands</b>	<b>51</b>
<b>2.9. Radiated Emission</b>	<b>64</b>
<b>Annex A Test Uncertainty</b>	<b>80</b>
<b>Annex B Testing Laboratory Information</b>	<b>81</b>

Change History		
Version	Date	Reason for change
1.0	2021-05-27	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Bullitt Group
<b>Applicant Address:</b>	One Valpy, Valpy Street, Reading RG1 1AR, United Kingdom
<b>Manufacturer:</b>	Bullitt Group
<b>Manufacturer Address:</b>	One Valpy, Valpy Street, Reading RG1 1AR, United Kingdom

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	4G Mobile Phone	
<b>Serial No:</b>	(N/A, marked #1 by test site)	
<b>Hardware Version:</b>	Q2805_V2.0	
<b>Software Version:</b>	LTE_S02113.11_N_S22Flip	
<b>Modulation Technology:</b>	DSSS, OFDM	
<b>Modulation Type:</b>	Refer to section1.3	
<b>Operating Frequency Range:</b>	802.11b/g/ n (HT20): 2412MHz–2462MHz 802.11n (HT40): 2422MHz–2452MHz	
<b>Antenna Type:</b>	PIFA Antenna	
<b>Antenna Gain:</b>	0.18dBi	
<b>Accessory Information:</b>	Battery	
	Brand Name:	N/A
	Model No.:	BTE-2000
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	2000mAh
	Rated Voltage:	3.80V
	Charge Limit:	4.35V
	Manufacturer:	Phenix New Energy(Hui Zhou)Co.,Ltd.

<b>Accessory Information:</b>	AC Adapter	
	Brand Name:	N/A
	Model No.:	TPA-46050200UU
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5.0V $\pm$ 2000mA
	Rated Input:	100-240V $\sim$ 50/60Hz, 0.3A
	Manufacturer:	Shenzhen Tianyin Electronics Co.,Ltd.

**Note 1:** We use the dedicated software to control the EUT continuous transmission.

**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

### 1.3. Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) <sup>Note1</sup>
DSSS (802.11b)	DBPSK	<b>1</b>
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	<b>6 / 9</b>
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n (HT20))	BPSK	<b>6.5</b>
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11n (HT40))	BPSK	<b>13.5</b>
	QPSK	27/40.5
	16QAM	54/81/108
	64QAM	121.5/135

**Note1:** The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

## 1.4. The Channel Number and Frequency

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/ n (HT20)	<b>1</b>	<b>2412</b>	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	<b>11</b>	<b>2462</b>
	5	2432		
	<b>6</b>	<b>2437</b>		
	7	2442		
Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11n (HT40)	<b>3</b>	<b>2422</b>	8	2447
	4	2427	<b>9</b>	<b>2452</b>
	5	2432		
	<b>6</b>	<b>2437</b>		
	7	2442		

**Note 1:** The black bold channels were selected for test.



## 1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Mar 24, 2021	Liu Bo	PASS	No deviation
3	15.247(b)	Maximum Peak and Average Conducted Output Power	Mar 24, 2021	Liu Bo	PASS	No deviation
4	15.247(a)	Bandwidth	Mar 24, 2021	Liu Bo	PASS	No deviation
5	15.247(d)	Conducted Spurious Emission and Band Edge	Mar 24, 2021	Liu Bo	PASS	No deviation
6	15.247(e)	Power Spectral Density	Mar 24, 2021	Liu Bo	PASS	No deviation
7	15.207	Conducted Emission	Apr 03, 2021	Huang Zhiye	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	Apr 07, 2021	Gao Jianrou	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	Apr 06&07, 2021	Gao Jianrou	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02.

**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting

in the test equipments. The ref offset 11.5dB contains two parts that cable loss 1.5dB and Attenuator 10dB.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

## 1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



## **2. 47 CFR Part 15C Requirements**

### **2.1. Antenna Requirement**

#### **2.1.1. Applicable Standard**

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **2.1.2. Test Result: Compliant**

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



## 2.2. Duty Cycle of Test Signal


### 2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be nonconstant.

### 2.2.2. Test Description

#### Test Setup:

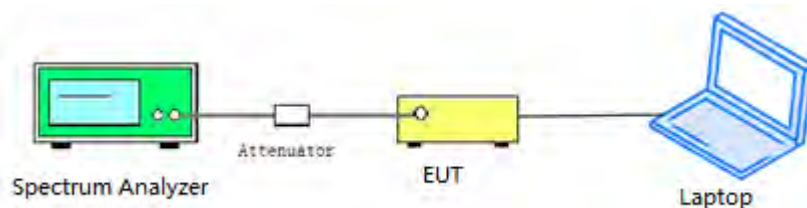

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.




### 2.2.3. Test Result


#### A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor ( $10 \cdot \lg[1/D]$ )
802.11b	97.75	0.10
802.11g	87.22	0.59
802.11n (HT20)	86.44	0.63
802.11n (HT40)	75.99	1.19


#### B. Test Plot:

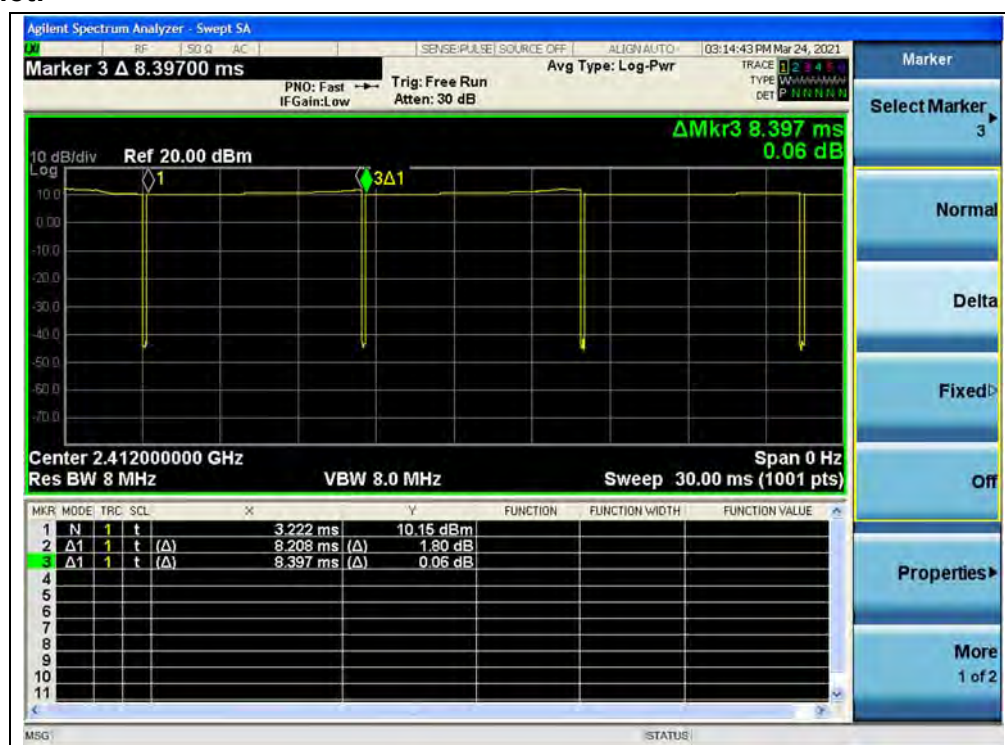


(Channel 1, 802.11b)

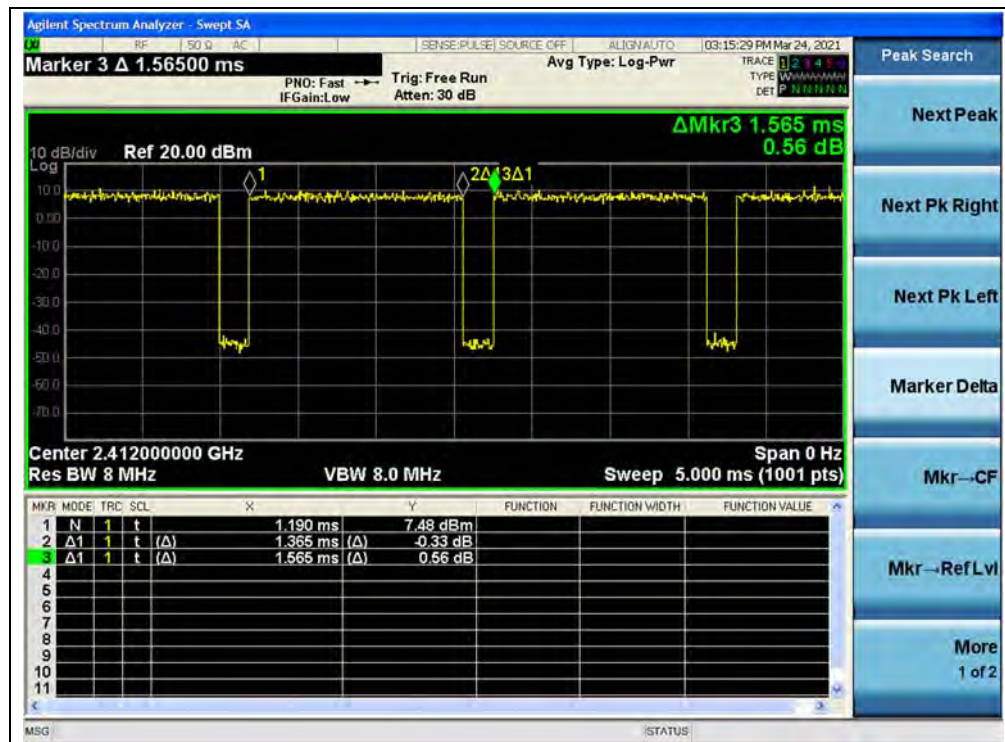

(Channel 1, 802.11g)

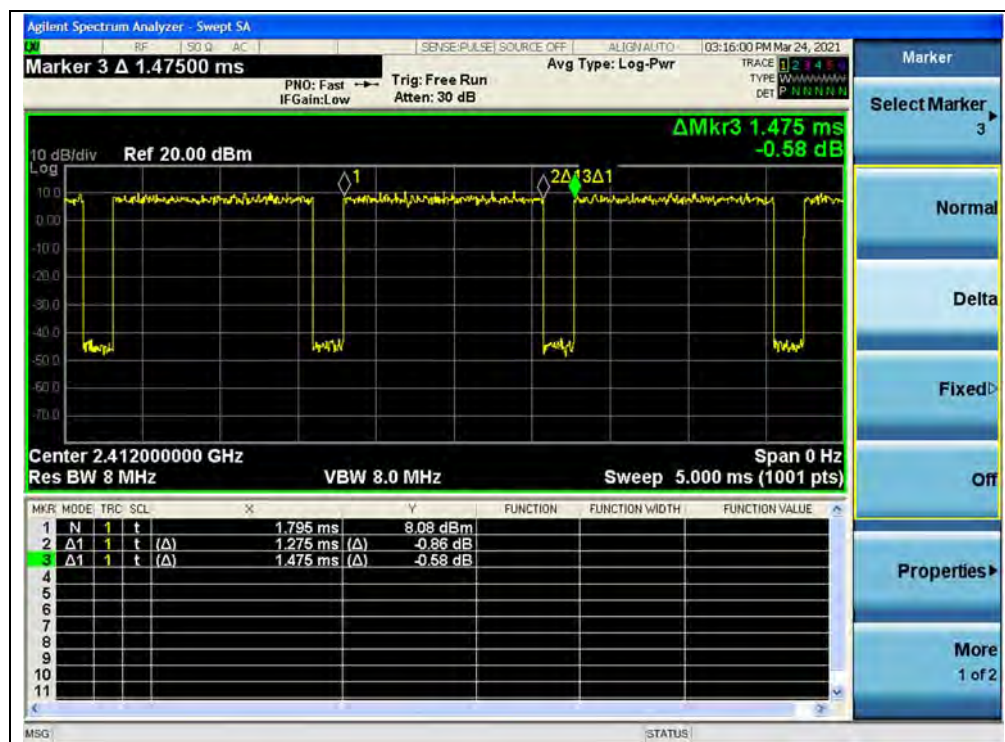

(Channel 1, 802.11n (HT20))

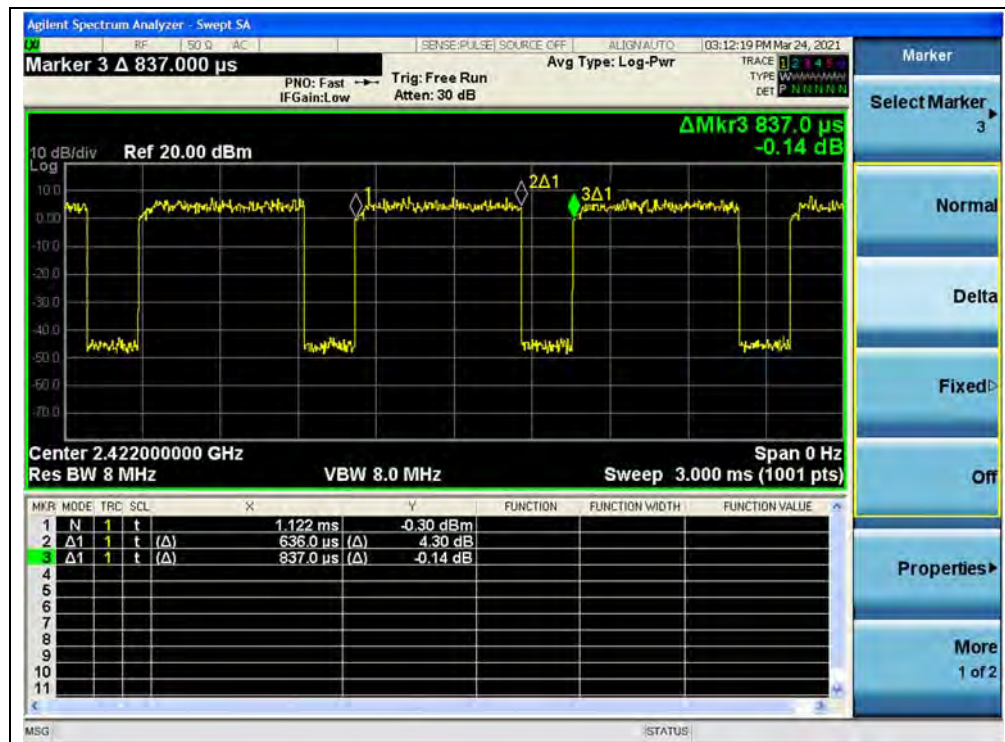

(Channel 3, 802.11n (HT40))

## 2.3. Maximum Peak and Average Conducted Output Power


### 2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

### 2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

#### Test Setup:

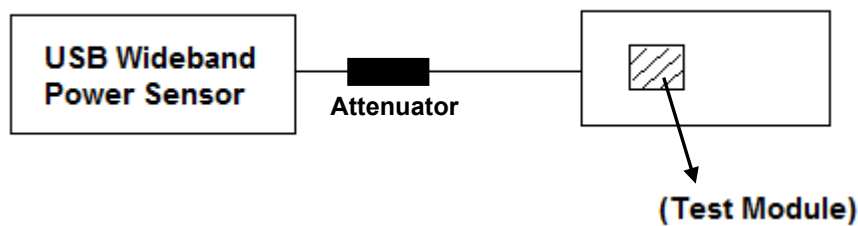

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.





### 2.3.3. Test Result

#### Maximum Peak Conducted Output Power

##### 802.11b Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	20.77	0.119	30	1	PASS
6	2437	20.24	0.106			PASS
11	2462	21.35	0.136			PASS

##### 802.11g Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	22.91	0.195	30	1	PASS
6	2437	23.48	0.223			PASS
11	2462	<b>23.78</b>	<b>0.239</b>			PASS

##### 802.11n (HT20) Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	23.07	0.203	30	1	PASS
6	2437	23.56	0.227			PASS
11	2462	23.64	0.231			PASS

##### 802.11n (HT40) Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	23.21	0.209	30	1	PASS
6	2437	23.46	0.222			PASS
9	2452	23.61	0.230			PASS

**Maximum Average Conducted Output Power****802.11b Mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty Factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	18.34	0.10	18.44	0.070	30	1	PASS
6	2437	17.38		17.48	0.056			PASS
11	2462	18.83		18.93	0.078			PASS

**802.11g Mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty Factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	17.06	0.59	17.65	0.058	30	1	PASS
6	2437	17.45		18.04	0.064			PASS
11	2462	17.55		18.14	0.065			PASS

**802.11n (HT20) Mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty Factor Calculated				
		dBm		dBm	W	dBm	W	
1	2412	17.10	0.63	17.73	0.059	30	1	PASS
6	2437	17.41		18.04	0.064			PASS
11	2462	17.55		18.18	0.066			PASS

**802.11n (HT40) Mode**

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty Factor Calculated				
		dBm		dBm	W	dBm	W	
3	2422	18.10	1.19	<b>19.29</b>	<b>0.085</b>	30	1	PASS
6	2437	17.60		18.79	0.076			PASS
9	2452	17.74		18.93	0.078			PASS


## 2.4. Bandwidth

### 2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.4.2. Test Description

#### Test Setup:

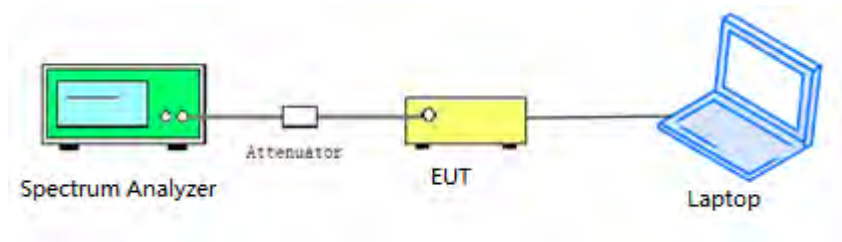

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.4.3. Test Procedure

KDB 558074 Section 8.2 was used in order to prove compliance.





## 2.4.4. Test Result

### 802.11b Mode

#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	9.048	≥500	PASS
6	2437	8.086	≥500	PASS
11	2462	8.541	≥500	PASS

#### B. Test Plot:



(Channel 1, 802.11b)



(Channel 6, 802.11b)



(Channel 11, 802.11b)




## 802.11g Mode


### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	16.32	≥500	PASS
6	2437	16.35	≥500	PASS
11	2462	16.33	≥500	PASS

### B. Test Plot:

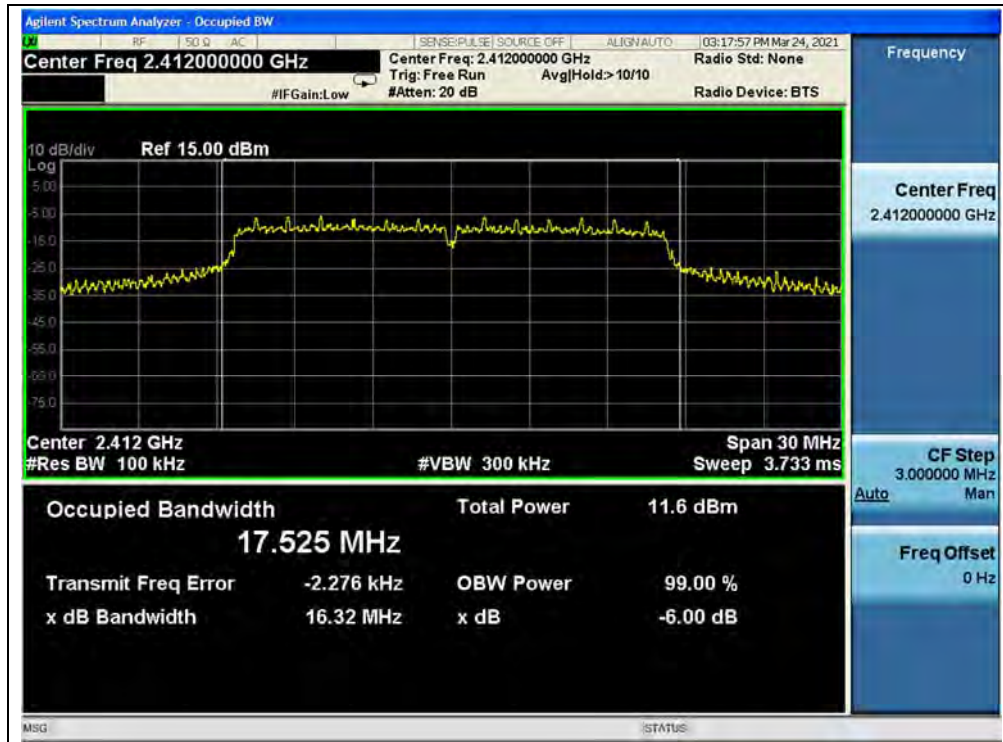

(Channel 1, 802.11g)

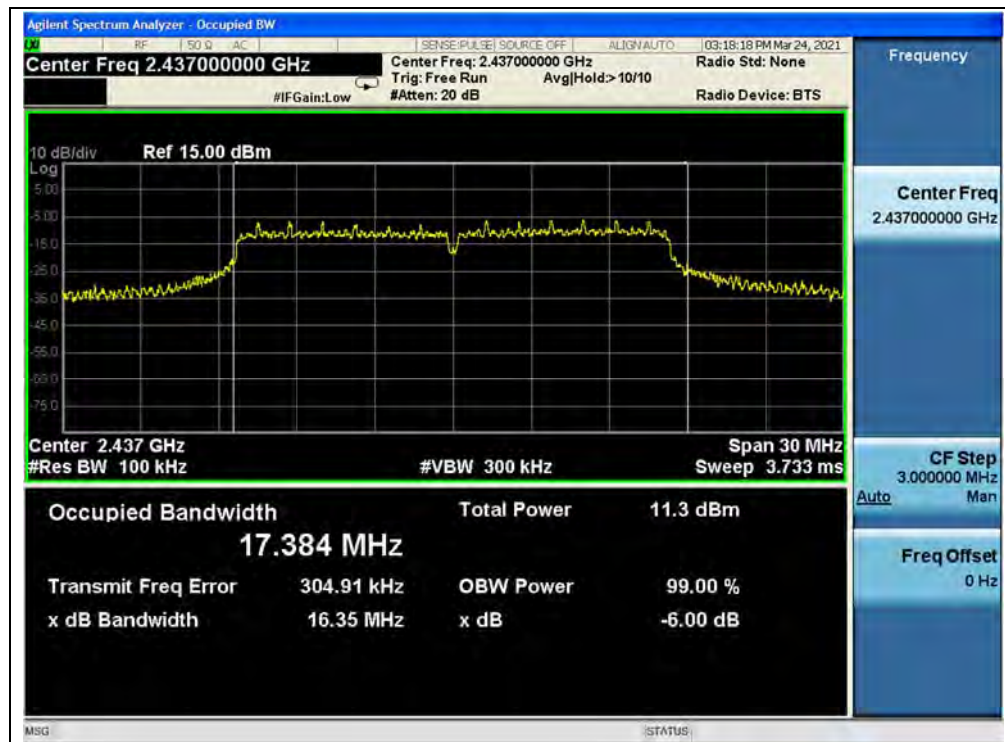

(Channel 6, 802.11g)



(Channel 11, 802.11g)





## 802.11n (HT20) Mode

### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	16.55	≥500	PASS
6	2437	17.56	≥500	PASS
11	2462	17.58	≥500	PASS

### B. Test Plot:



(Channel 1, 802.11n (HT20))



(Channel 6, 802.11n (HT20))



(Channel 11, 802.11n (HT20))




## 802.11n (HT40) Mode

### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
3	2422	35.43	≥500	PASS
6	2437	35.70	≥500	PASS
9	2452	35.05	≥500	PASS

### B. Test Plot:

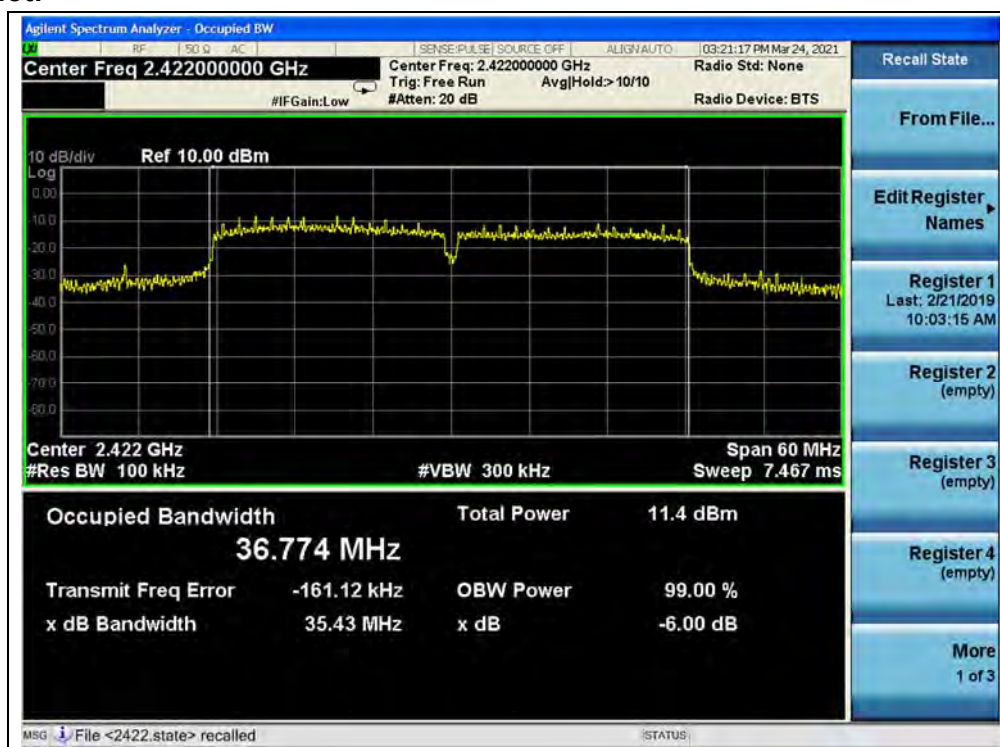


(Channel 3, 802.11n (HT40))





(Channel 6, 802.11n (HT40))

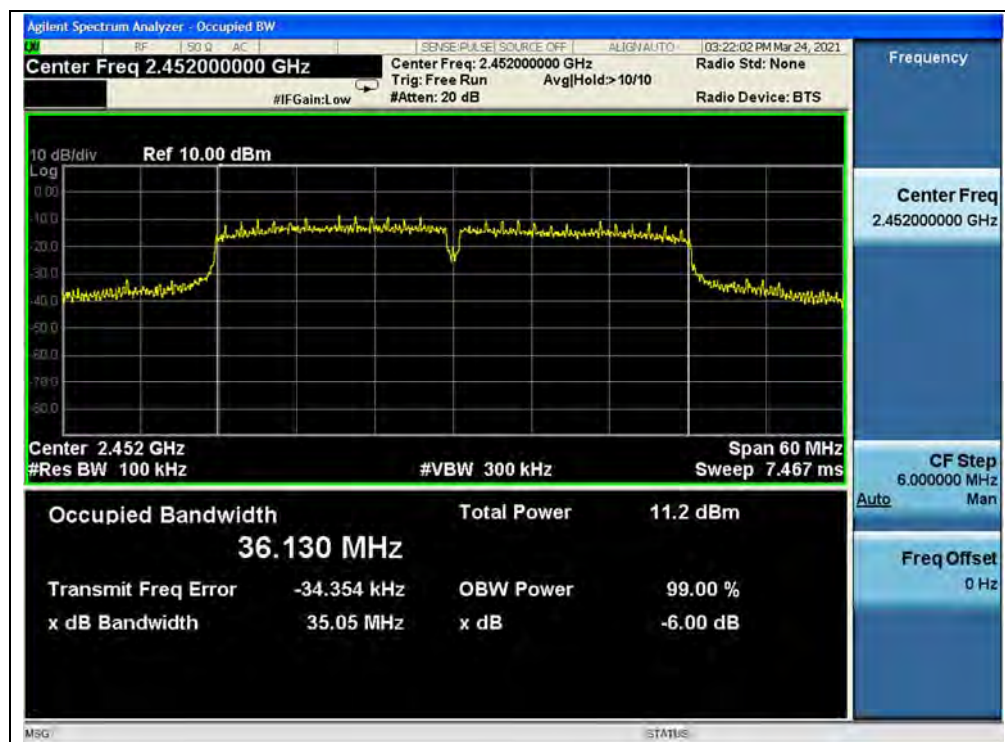

(Channel 9, 802.11n (HT40))




## 2.5. Conducted Spurious Emissions and Band Edge

### 2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.5.2. Test Description

#### Test Setup:

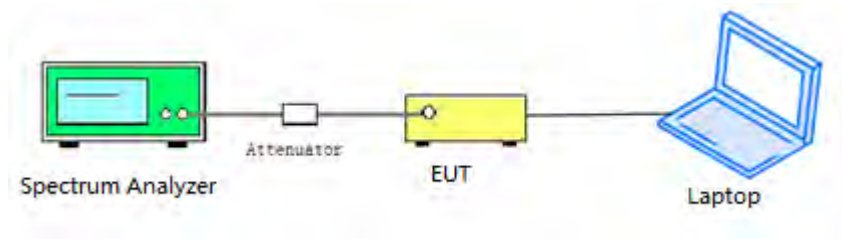

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.5.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.




## 2.5.4. Test Result

### 802.11b Mode


#### A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-37.47	6.43	-13.57	PASS
6	2437	-38.25	7.77	-12.23	PASS
11	2462	-36.15	7.92	-12.08	PASS


#### B. Test Plot:

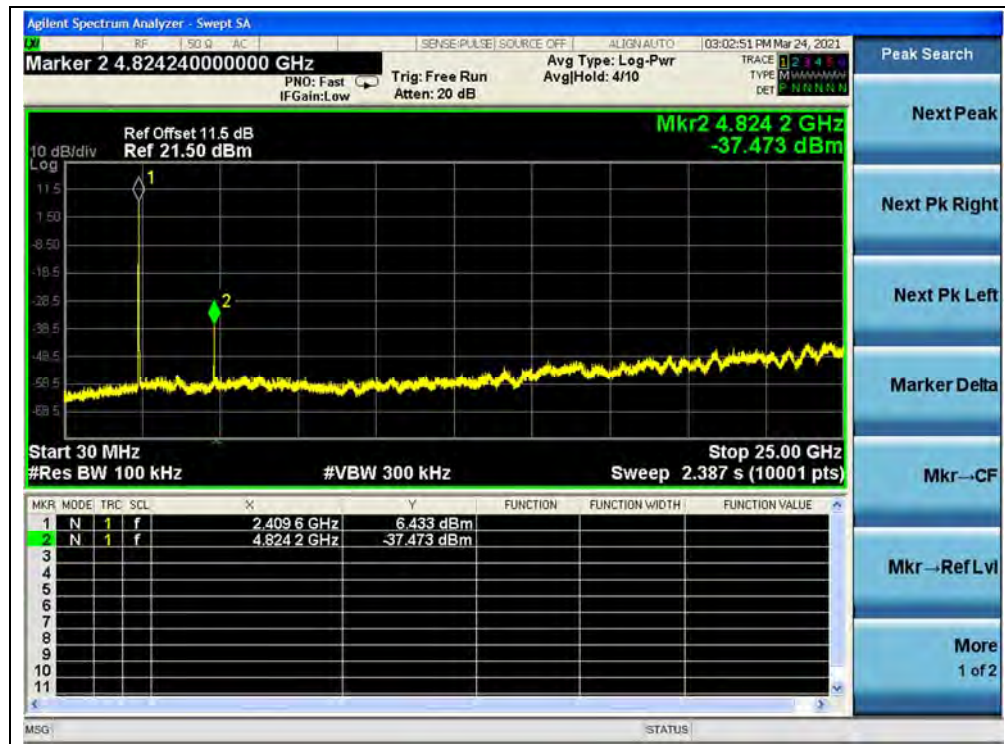

(30MHz to 25GHz, Channel 1, 802.11b)

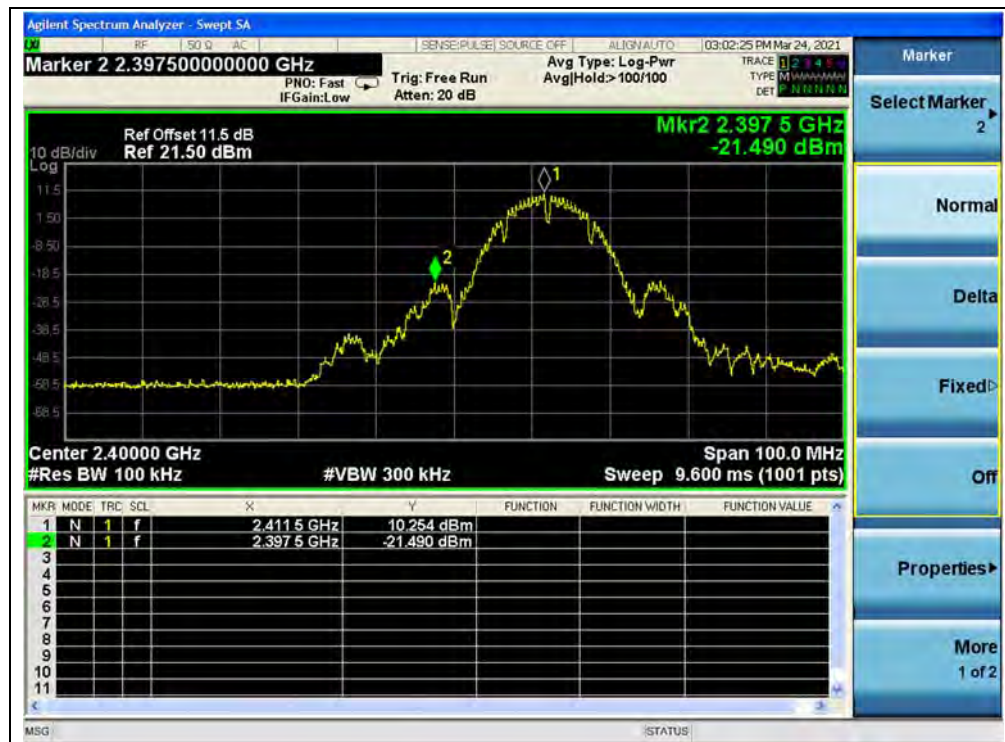


(Band Edge, Channel 1, 802.11b)

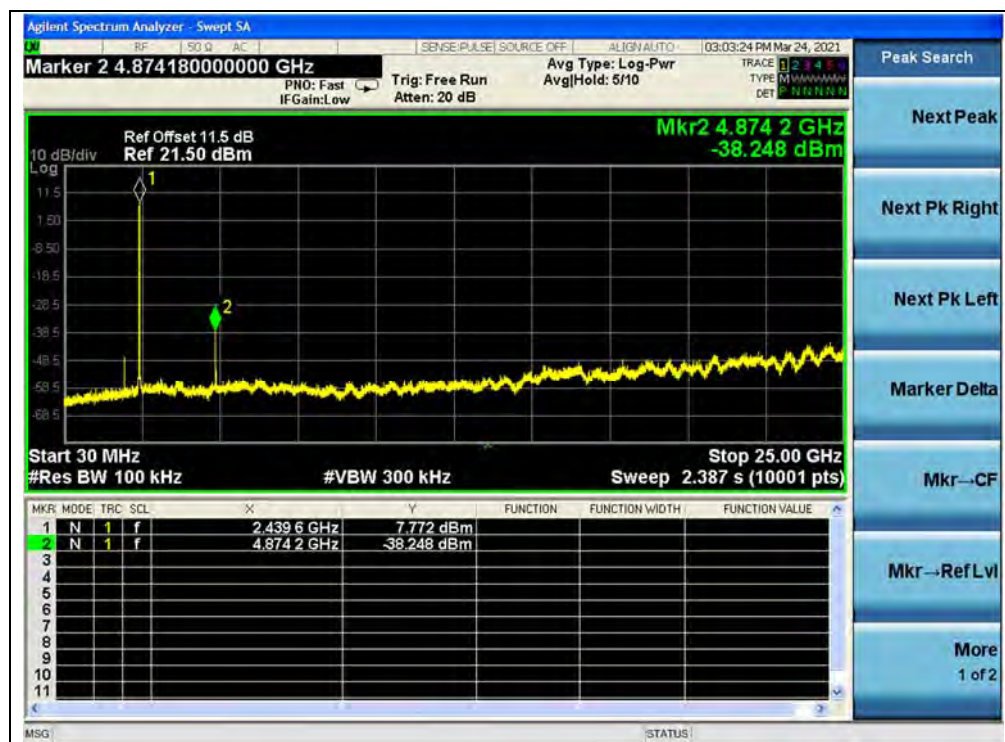

(30MHz to 25GHz, Channel 6, 802.11b)



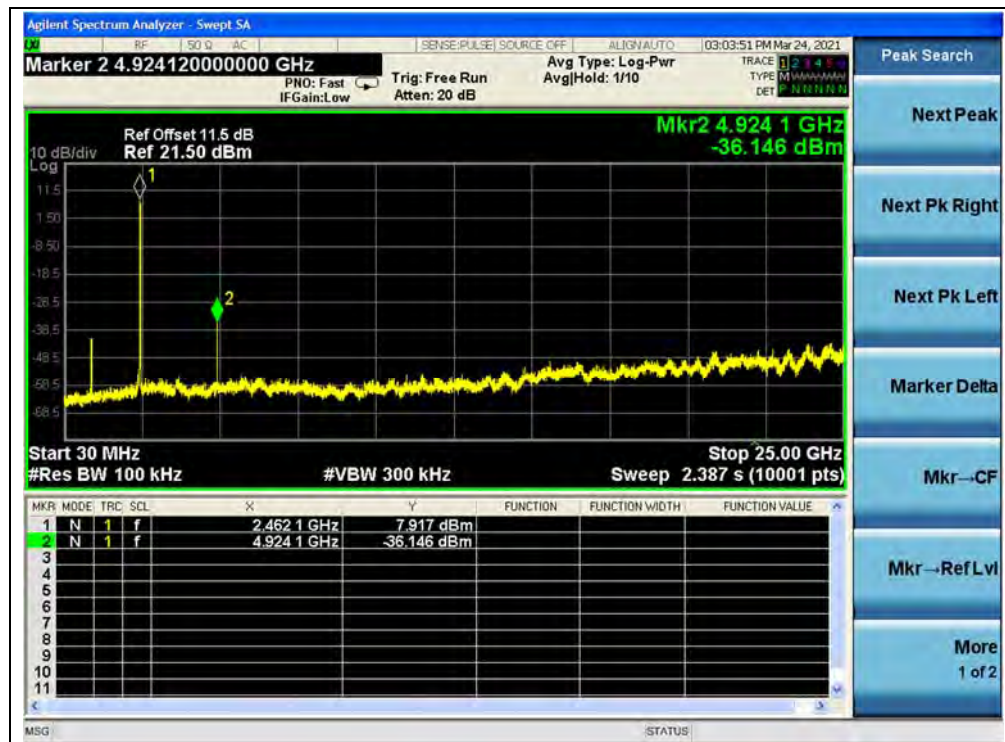


(30MHz to 25GHz, Channel 11, 802.11b)



(Band Edge, Channel 11, 802.11b)

**802.11g Mode****A. Test Verdict:**


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-43.65	2.42	-17.58	PASS
6	2437	-42.59	1.58	-18.42	PASS
11	2462	-42.54	3.06	-16.94	PASS

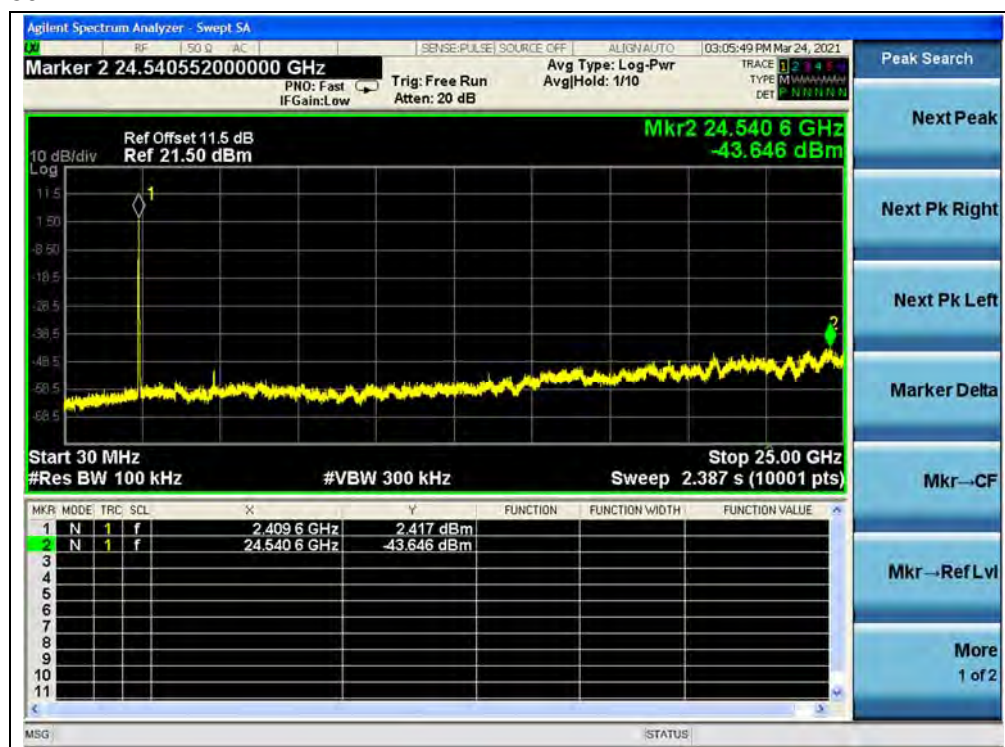**B. Test Plot:**

(30MHz to 25GHz, Channel 1, 802.11g)




(Band Edge, Channel 1, 802.11g)

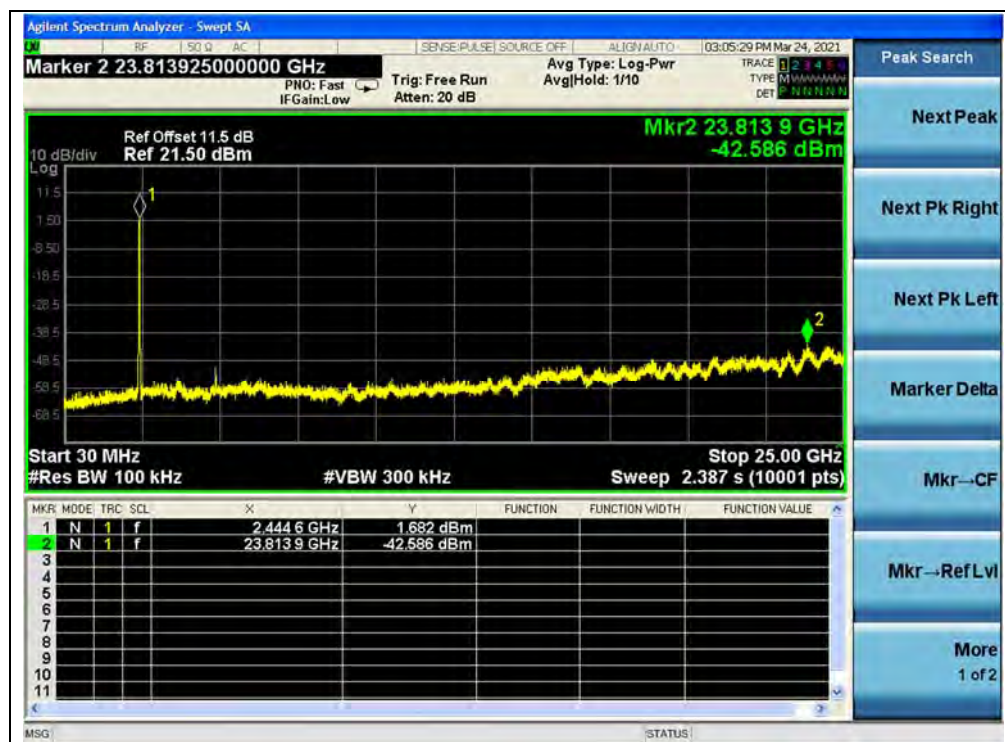

(30MHz to 25GHz, Channel 6, 802.11g)



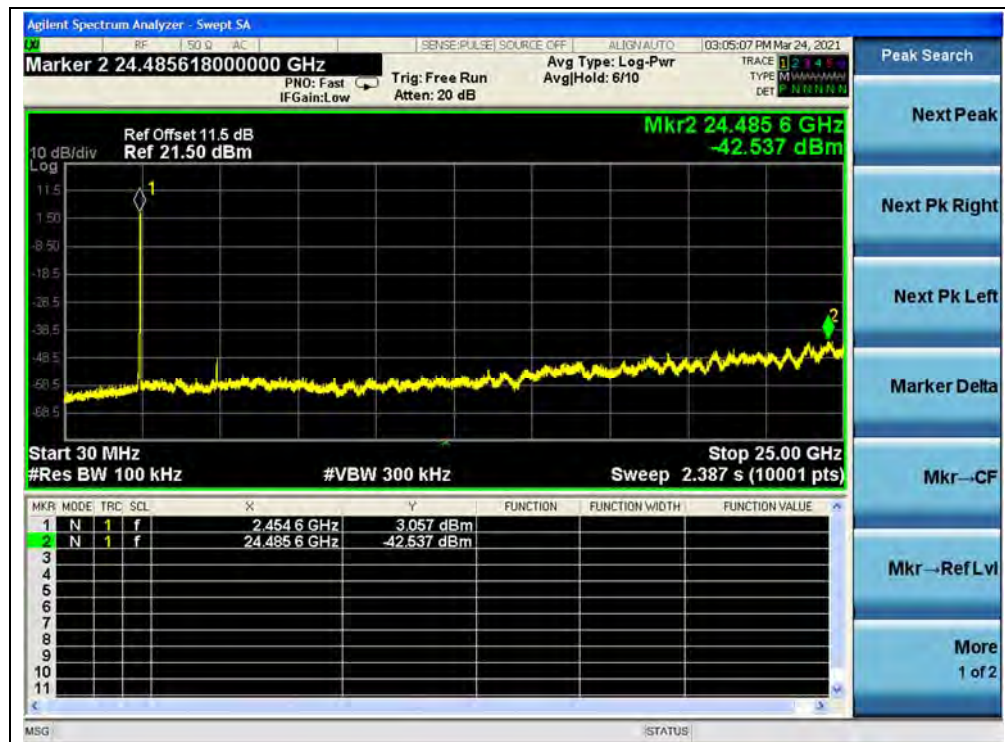

(30MHz to 25GHz, Channel 11, 802.11g)



(Band Edge, Channel 11, 802.11g)




## 802.11n (HT20) Mode

### A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-41.54	1.40	-18.60	PASS
6	2437	-43.03	1.80	-18.20	PASS
11	2462	-43.19	6.83	-13.17	PASS

### B. Test Plot:

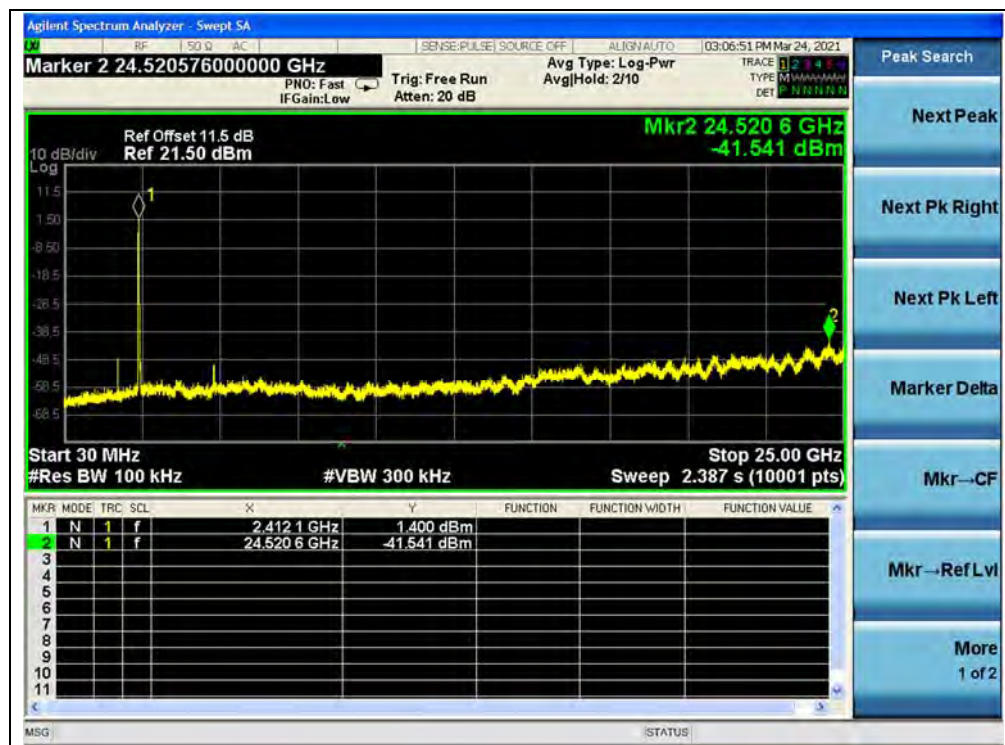


(30MHz to 25GHz, Channel 1, 802.11n (HT20))






(Band Edge, Channel 1, 802.11n (HT20))

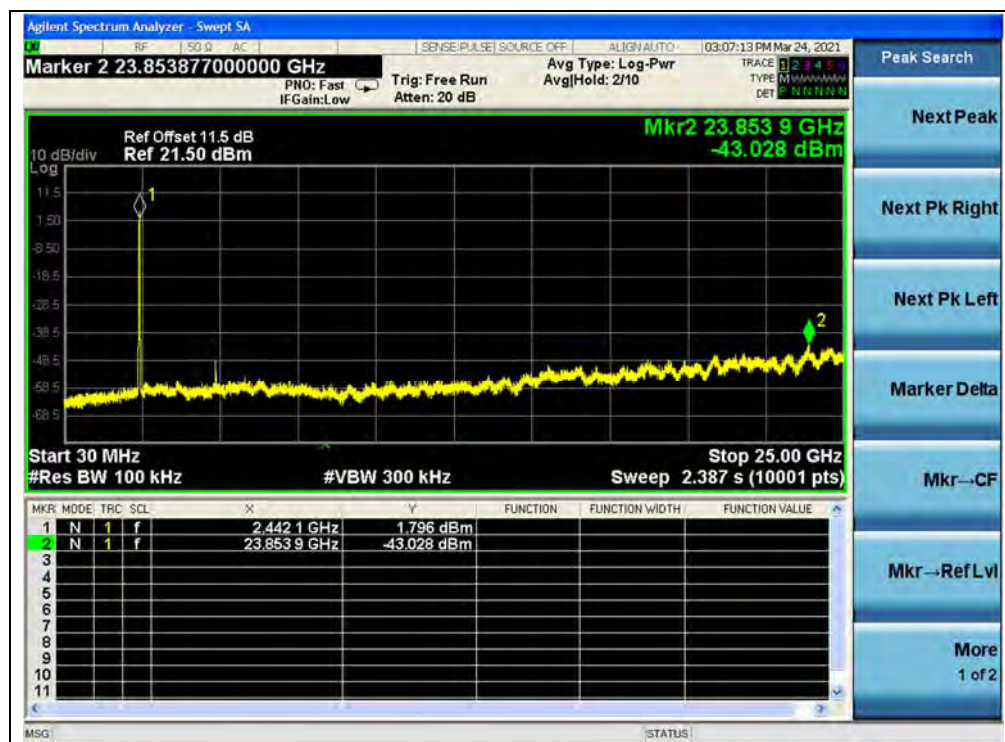

(30MHz to 25GHz, Channel 6, 802.11n (HT20))

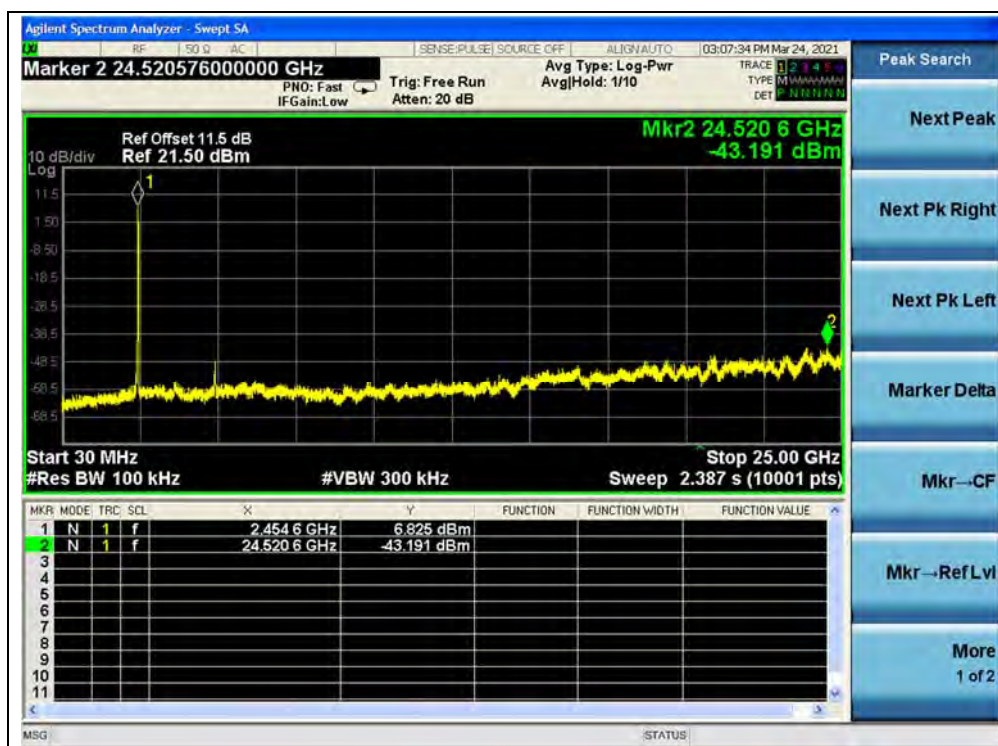

(30MHz to 25GHz, Channel 11, 802.11n (HT20))



(Band Edge, Channel 11, 802.11n (HT20))




## 802.11n (HT40) Mode

### A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-42.22	0.82	-19.18	PASS
6	2437	-42.94	-0.02	-20.02	PASS
9	2452	-43.47	1.10	-18.90	PASS

### B. Test Plot:

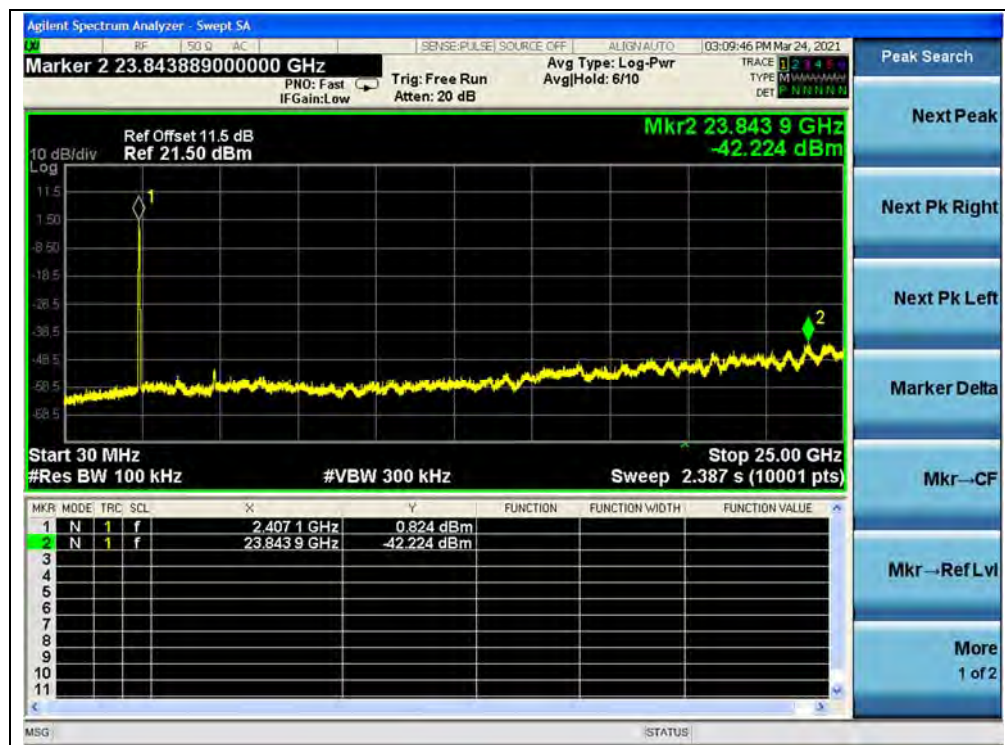

(30MHz to 25GHz, Channel 3, 802.11n (HT40))






(Band Edge, Channel 3, 802.11n (HT40))



(30MHz to 25GHz, Channel 6, 802.11n (HT40))

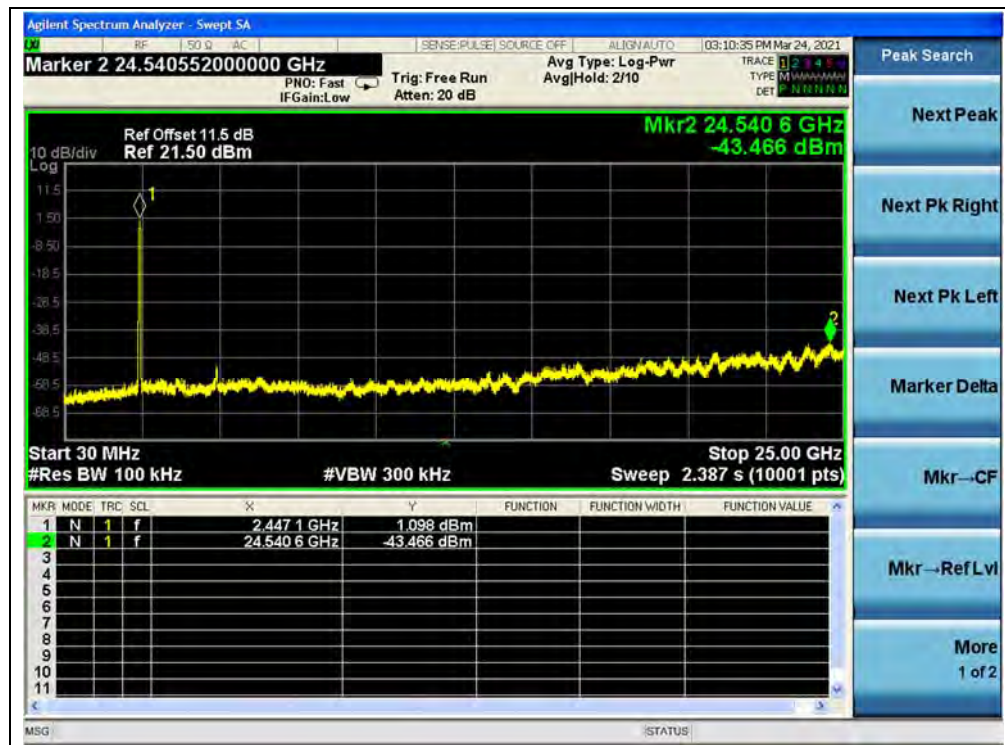

(30MHz to 25GHz, Channel 9, 802.11n (HT40))



(Band Edge, Channel 11, 802.11n (HT40))


## 2.6. Power Spectral Density

### 2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 2.6.2. Test Description

#### Test Setup:

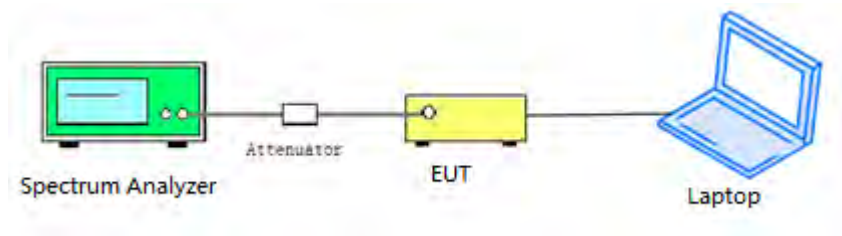

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.6.3. Test Procedure

KDB 558074 Section 8.4 was used in order to prove compliance.



## 2.6.4. Test Result

### 802.11b Mode

#### A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-5.22	8	PASS
6	2437	-5.18	8	PASS
11	2462	-3.87	8	PASS

#### B. Test Plot:



(Channel 1, 802.11b)





(Channel 6, 802.11b)



(Channel 11, 802.11b)





## 802.11g Mode

### A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-9.15	8	PASS
6	2437	-9.15	8	PASS
11	2462	-7.44	8	PASS


### B. Test Plot:



(Channel 1, 802.11g)



(Channel 6, 802.11g)

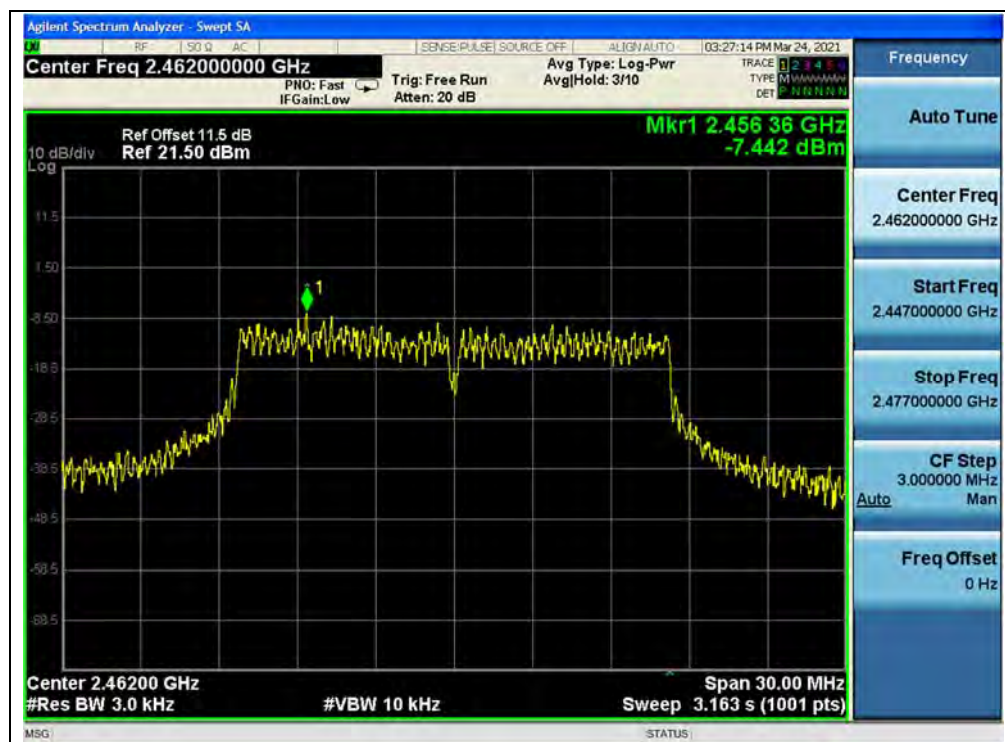

(Channel 11, 802.11g)



### A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-9.39	8	PASS
6	2437	-8.74	8	PASS
11	2462	-8.96	8	PASS

Agilent Spectrum Analyzer - Swept SA

RF | SO D | AC | SENSE:PULSE SOURCE OFF | ALIGN: AUTO | 03:24:53 PM Mar 24, 2021

Center Freq 2.41200000 GHz

PNO: Fast IF Gain: Low Trig: Free Run Atten: 20 dB

Avg Type: Log-Pwr Avg/Hold: 10/10

TRACE 1 2 3 4 5 TYPE N 6 7 8 9 10 DET N 0 1 2 3 4 5 6 7 8 9

Recall State

From File...

Edit Register Names

Register 1  
Last: 2/21/2019  
10:03:15 AM

Register 2  
(empty)

Register 3  
(empty)

Register 4  
(empty)

More  
1 of 3

Ref Offset 11.5 dB  
Ref 21.50 dBm

10 dB/div  
Log

Mkr1 2.406 93 GHz  
-9.390 dBm

Center 2.41200 GHz Span 30.00 MHz


#Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)

MSG File <2412.state> recalled


STATUS

(Channel 1, 802.11n (HT20))



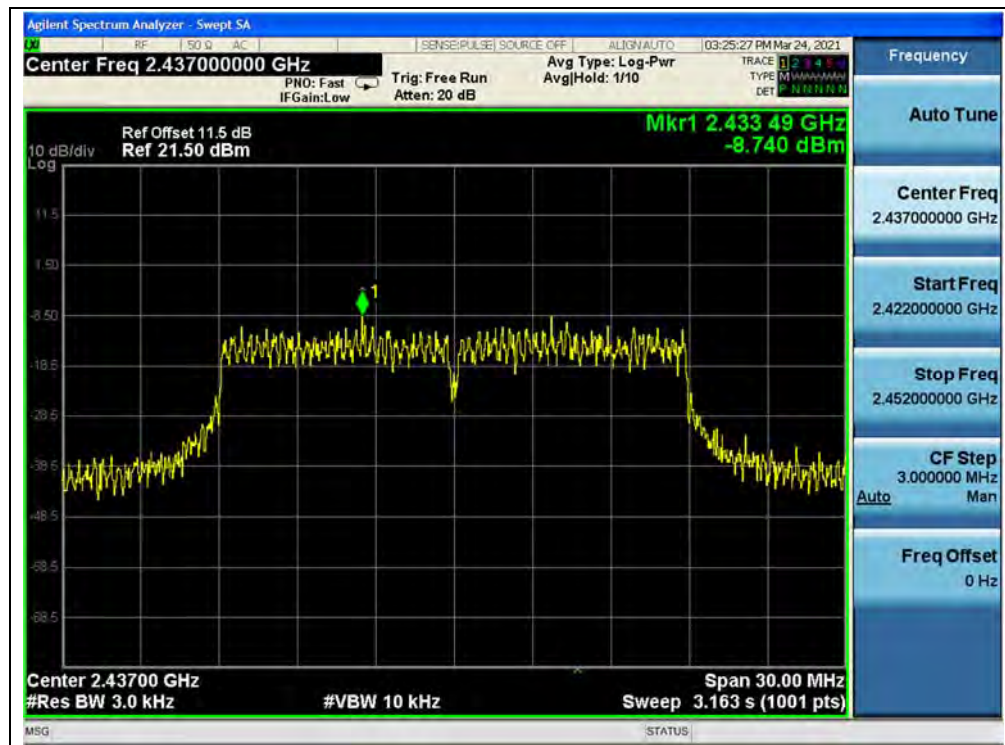


(Channel 6, 802.11n (HT20))

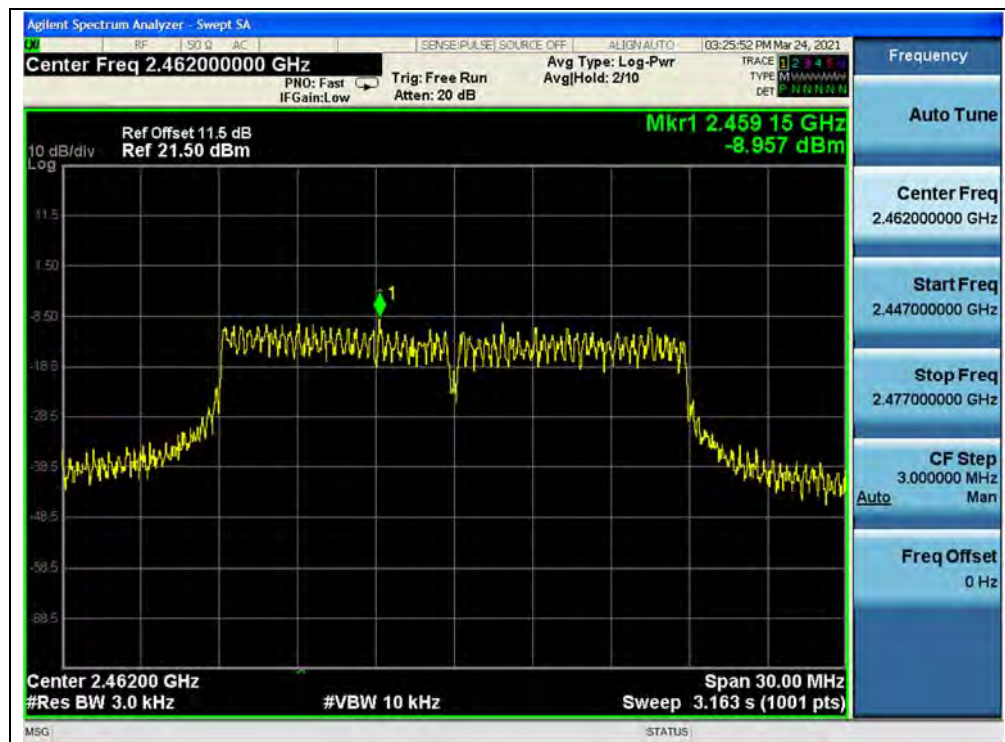

(Channel 11, 802.11n (HT20))


**802.11n (HT40) Mode****A. Test Verdict:**

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-10.81	8	PASS
6	2437	-11.79	8	PASS
9	2452	-12.28	8	PASS

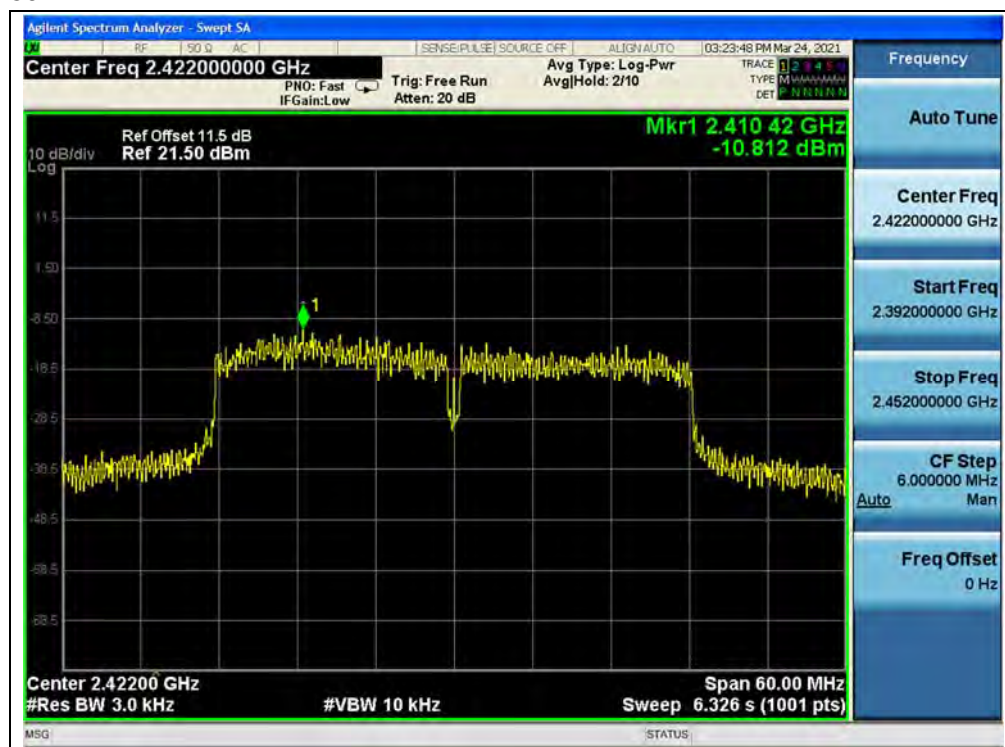**B. Test Plot:**

(Channel 3, 802.11n (HT40))



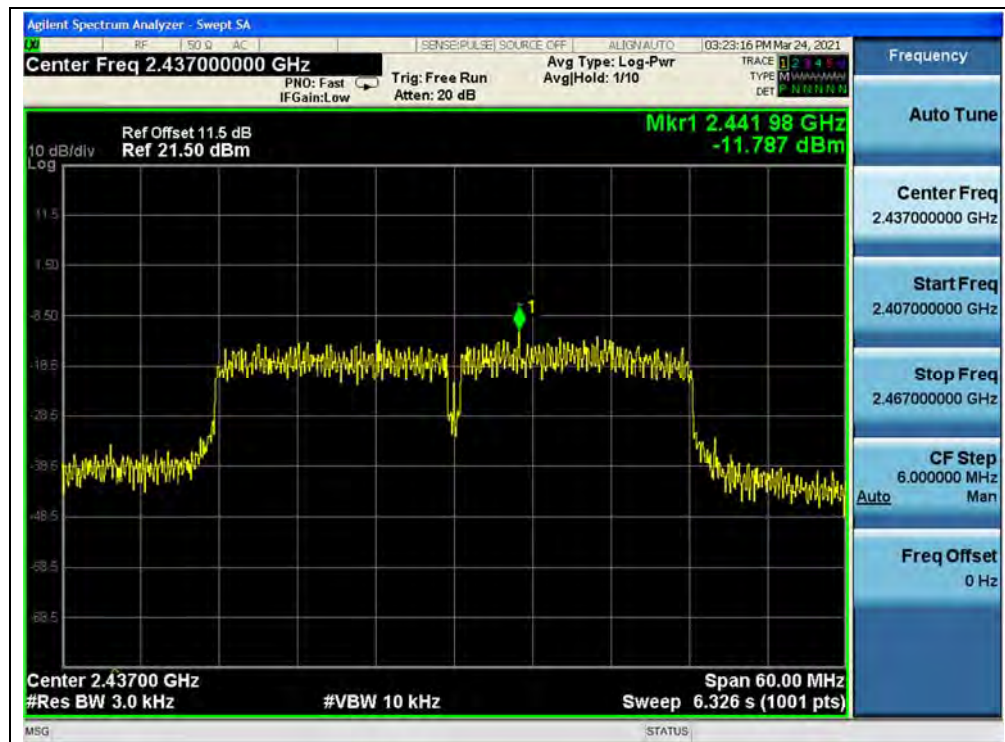

(Channel 6, 802.11n (HT40))



(Channel 9, 802.11n (HT40))

## 2.7. Conducted Emission

### 2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

#### NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.7.2. Test Description

#### Test Setup:

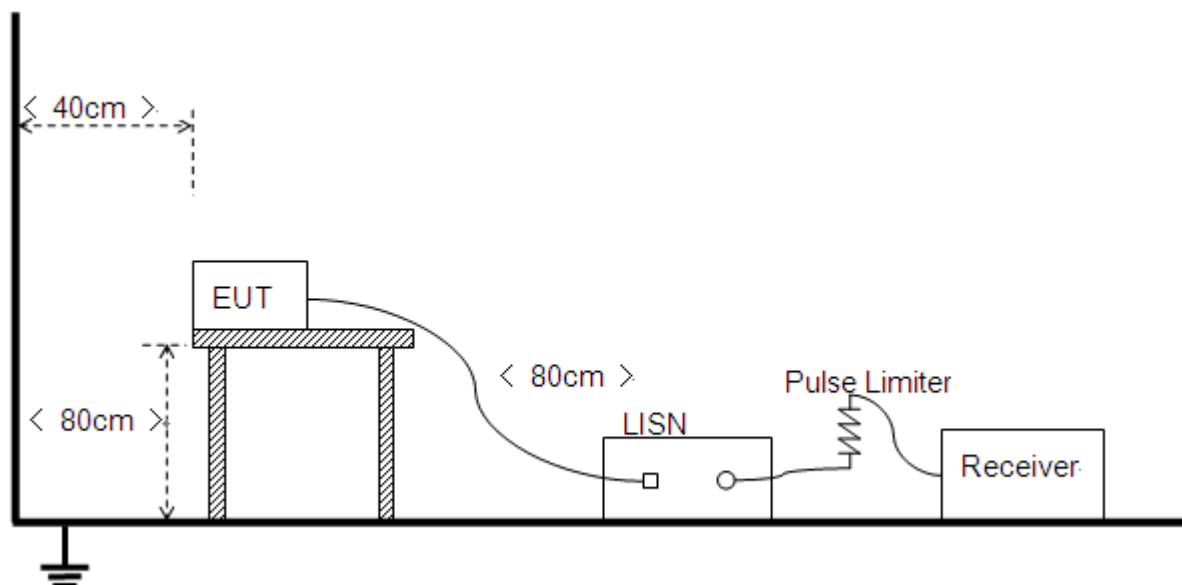

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.



### 2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test Setup:

Test Mode: EUT+ ADAPTER+ WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}] = U_R + L_{\text{Cable loss}} [\text{dB}] + A_{\text{Factor}}$$

$U_R$ : Receiver Reading

$A_{\text{Factor}}$ : Voltage division factor of LISN


## B. Test Plot:

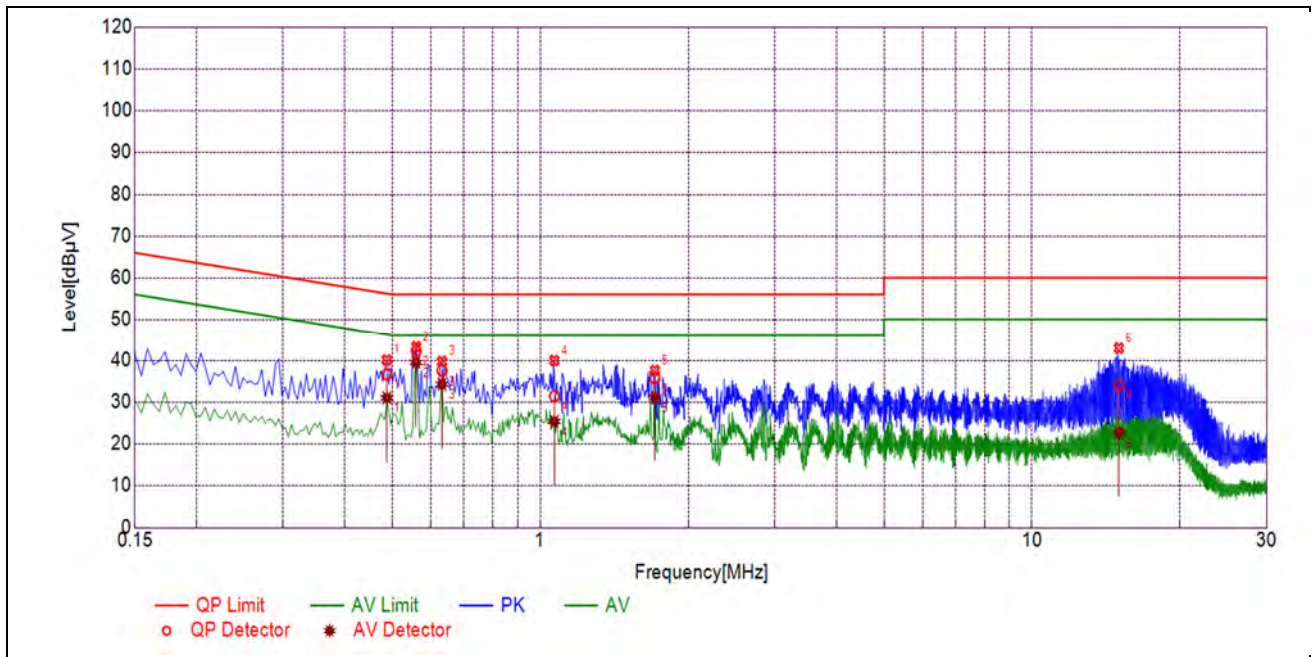

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.4878	36.62	56.21	56.21	46.21	Line	PASS
2	0.5594	42.27	56.00	56.00	46.00		PASS
3	0.6314	37.53	56.00	56.00	46.00		PASS
4	1.0684	31.39	56.00	56.00	46.00		PASS
5	1.7108	35.71	56.00	56.00	46.00		PASS
6	15.0297	34.04	60.00	60.00	50.00		PASS



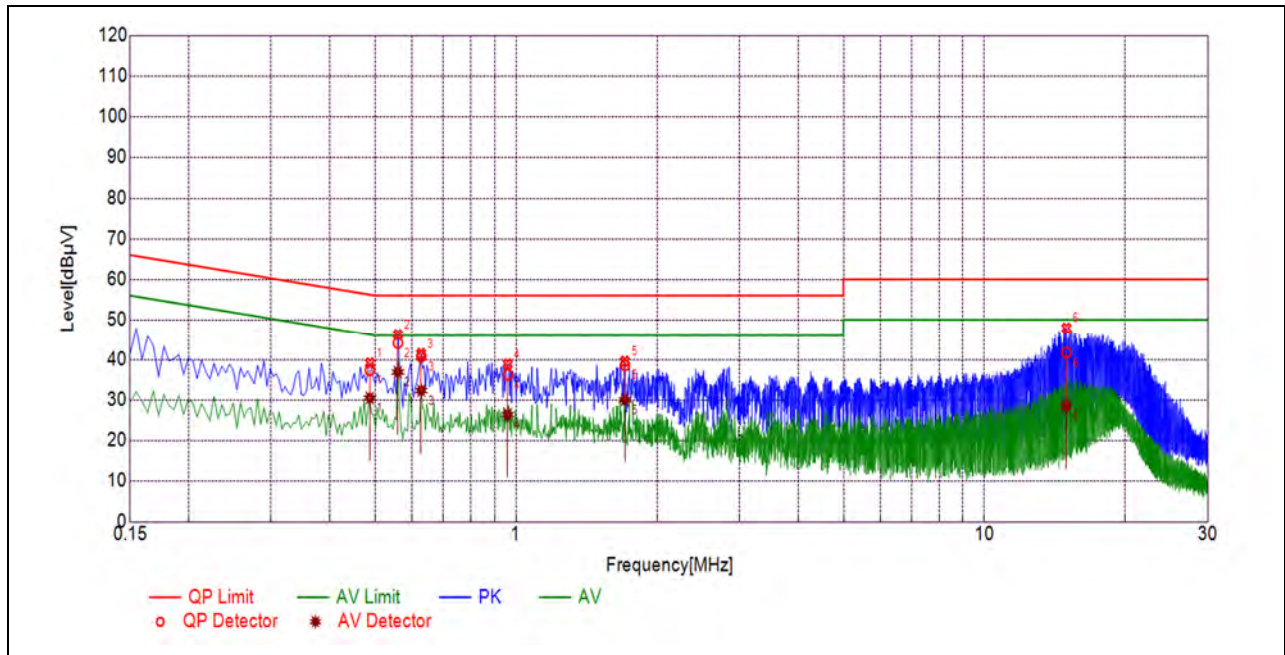

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.4872	37.35	30.45	56.22	46.22	Neutral	PASS
2	0.5592	44.14	36.90	56.00	46.00		PASS
3	0.6274	40.75	32.30	56.00	46.00		PASS
4	0.9601	36.22	26.39	56.00	46.00		PASS
5	1.7085	38.61	30.03	56.00	46.00		PASS
6	14.9524	41.78	28.44	60.00	50.00		PASS


## 2.8. Restricted Frequency Bands

### 2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.8.2. Test Description

#### Test Setup

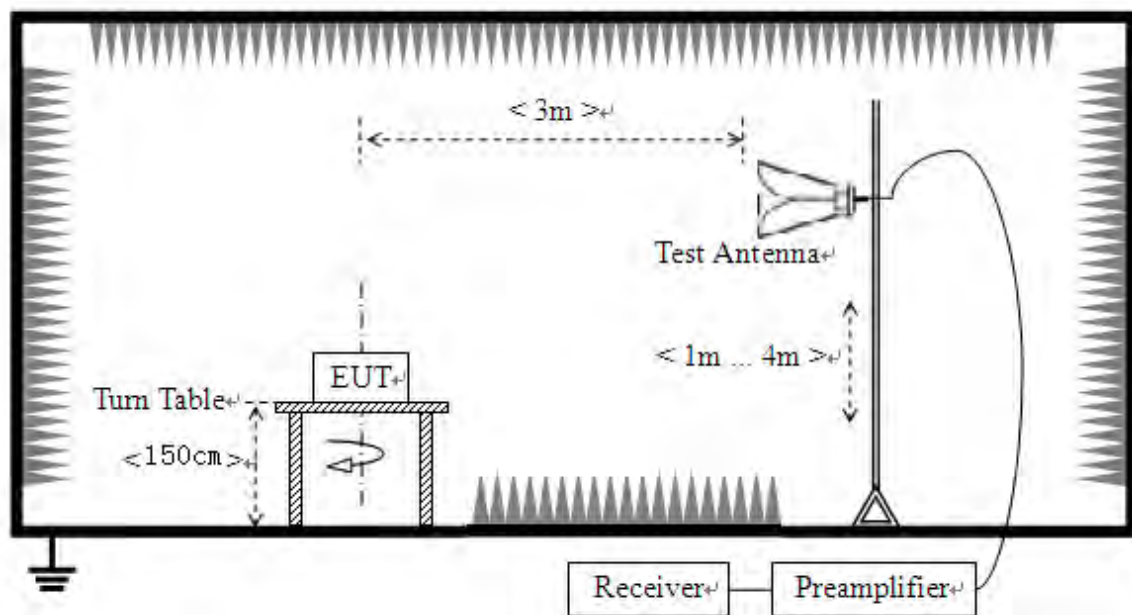

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



### 2.8.3. Test Procedure

KDB 558074 Section 8.6 and 8.7 was used in order to prove compliance.

### 2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m


**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

### 802.11b Mode


#### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dB $\mu$ V)	$A_T$ (dB)	$A_{\text{Factor}}$ (dB@3m)	Max. Emission E (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV						
1	2387.93	PK	27.24	6.74	27.20	61.18	74	PASS
1	2387.70	AV	15.00	6.74	27.20	48.94	54	PASS
11	2489.47	PK	26.96	6.74	27.20	60.90	74	PASS
11	2487.54	AV	15.68	6.74	27.20	49.62	54	PASS

## B. Test Plot:

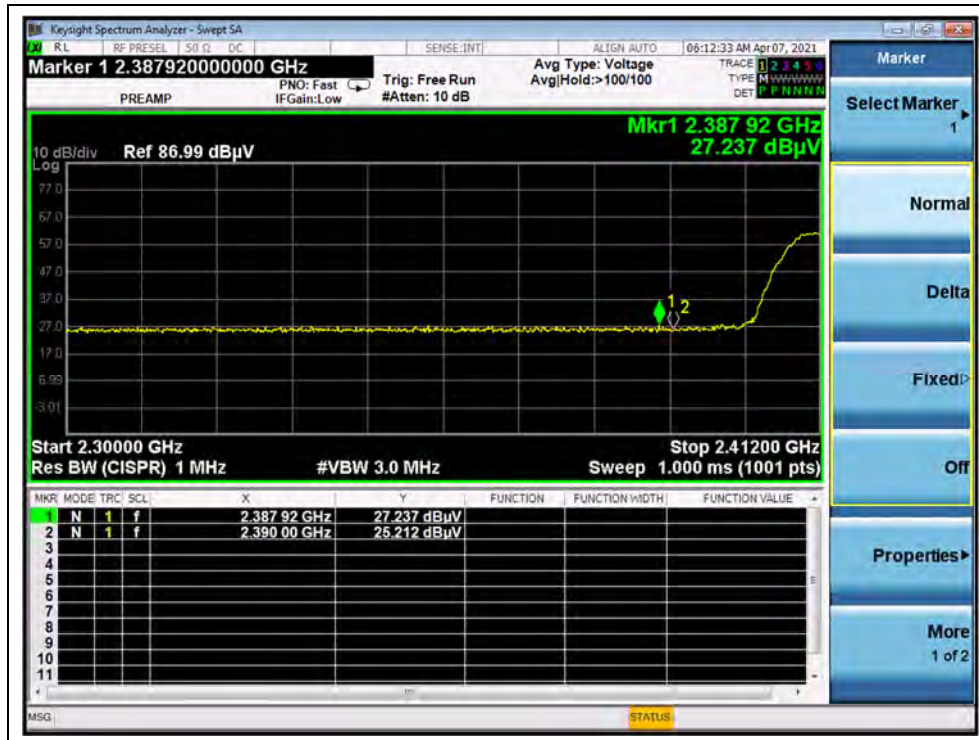

(PEAK, Channel 1, 802.11b)

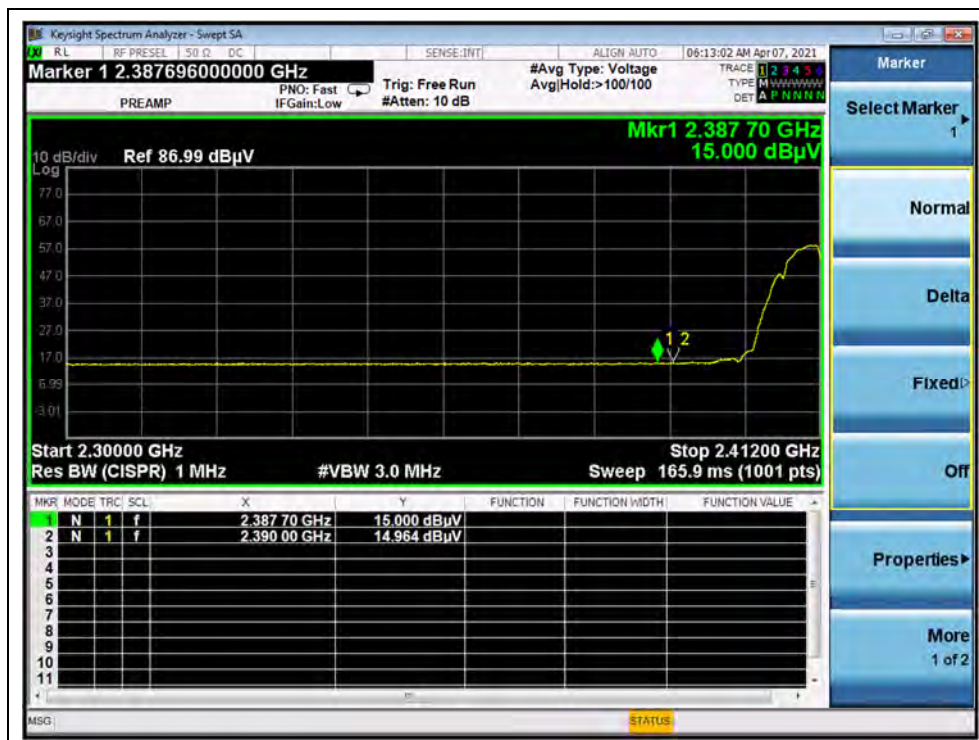

(AVERAGE, Channel 1, 802.11b)





(PEAK, Channel 11, 802.11b)



(AVERAGE, Channel 11, 802.11b)



## 802.11g Mode


### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dB $\mu$ V)	$A_T$ (dB)	$A_{Factor}$ (dB@3m)	Max. Emission $E$ (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV						
1	2368.32	PK	27.75	6.74	27.20	61.69	74	PASS
1	2390.00	AV	15.07	6.74	27.20	49.01	54	PASS
11	2487.00	PK	26.75	6.74	27.20	60.69	74	PASS
11	2485.71	AV	15.37	6.74	27.20	49.31	54	PASS

### B. Test Plot:



(PEAK, Channel 1, 802.11g)

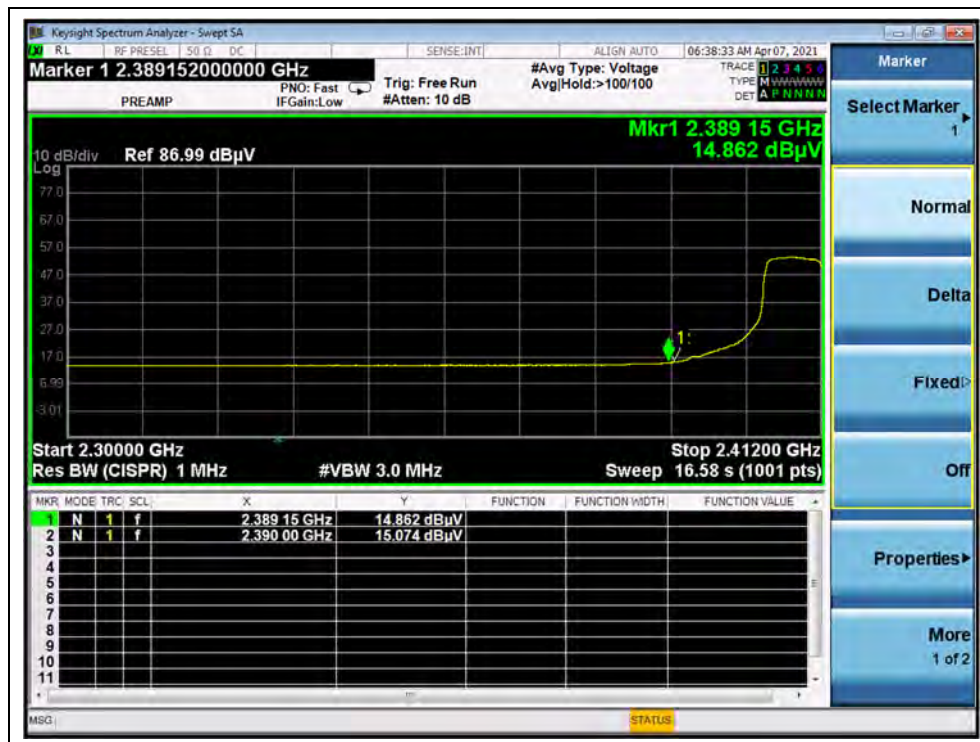


(AVERAGE, Channel 1, 802.11g)



(PEAK, Channel 11, 802.11g)



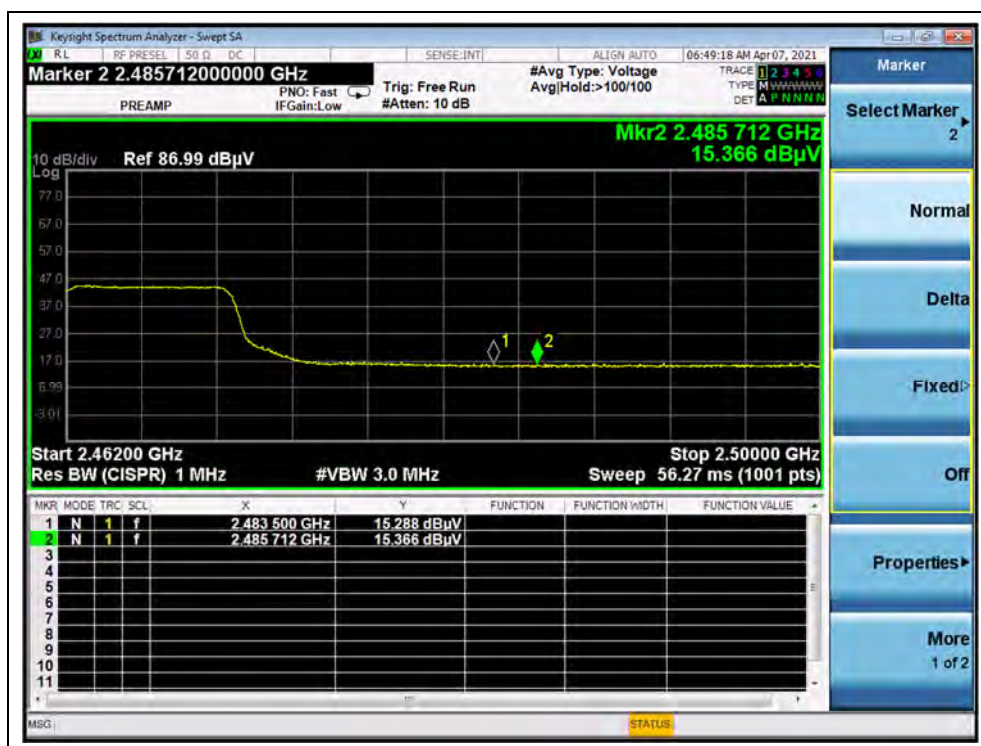

(AVERAGE, Channel 11, 802.11g)






## 802.11 n (HT20) Mode


### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dB $\mu$ V)	$A_T$ (dB)	$A_{Factor}$ (dB@3m)	Max. Emission E (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV						
1	2390.00	PK	31.38	6.74	27.20	65.32	74	PASS
1	2390.00	AV	15.43	6.74	27.20	49.37	54	PASS
11	2485.26	PK	26.09	6.74	27.20	60.03	74	PASS
11	2483.50	AV	15.22	6.74	27.20	49.16	54	PASS


### B. Test Plot:

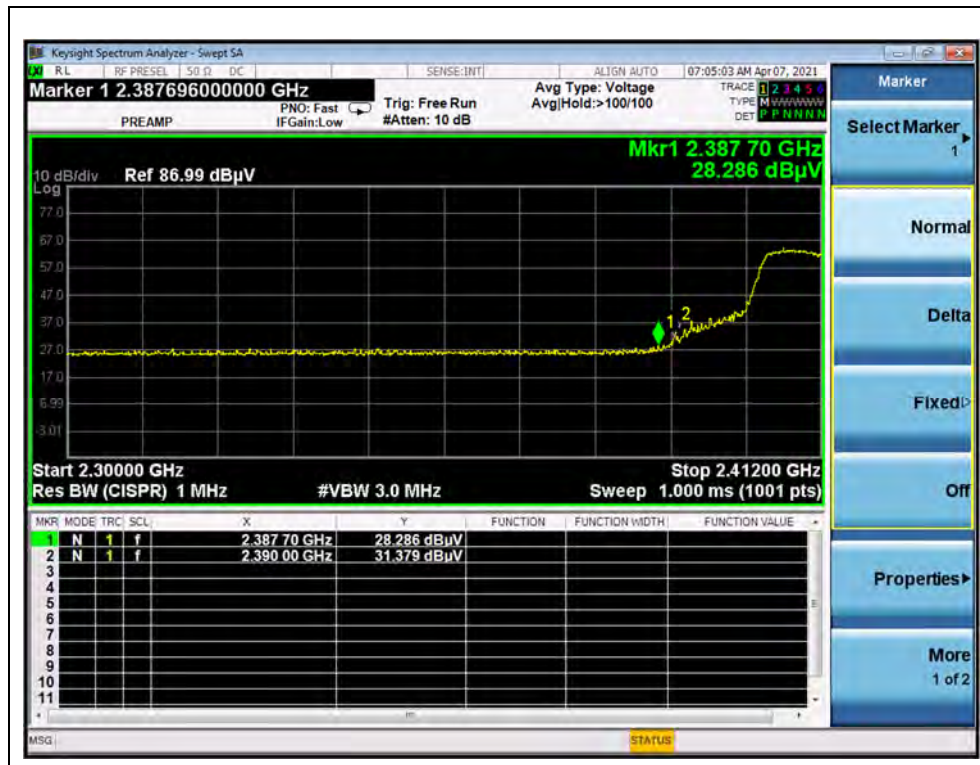


(PEAK, Channel 1, 802.11n (HT20))

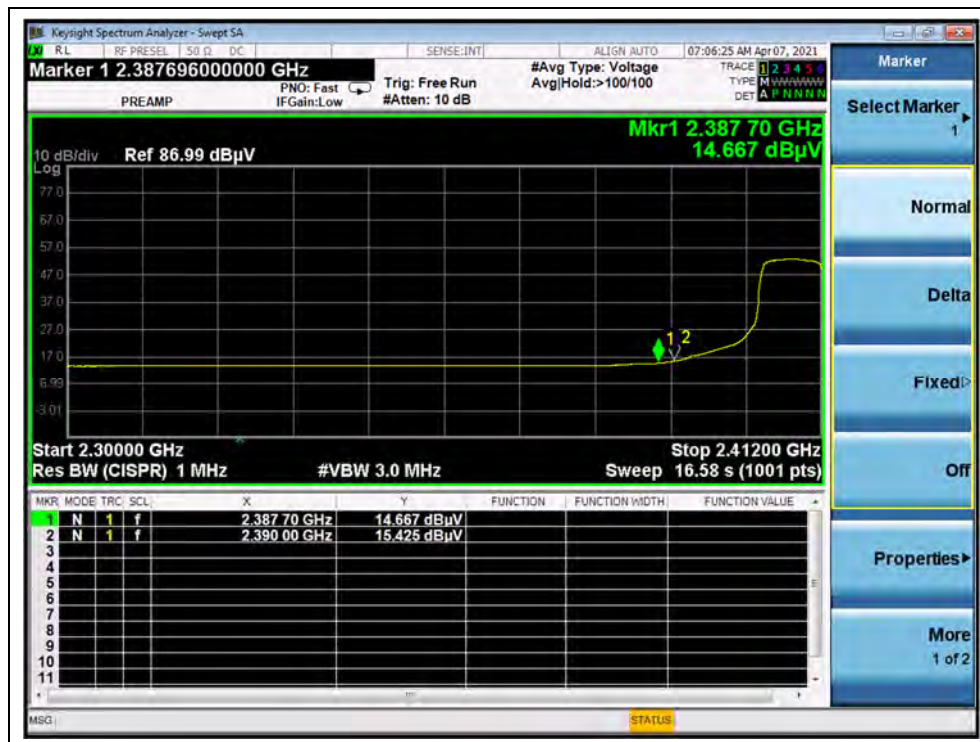

(AVERAGE, Channel 1, 802.11n (HT20))

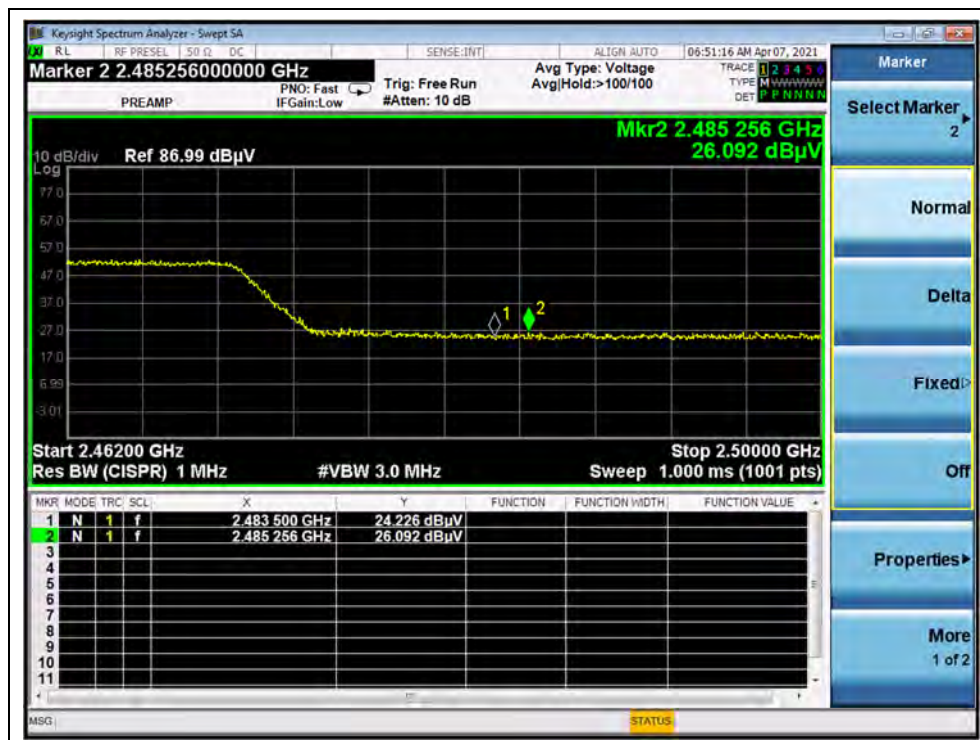

(PEAK, Channel 11, 802.11n (HT20))

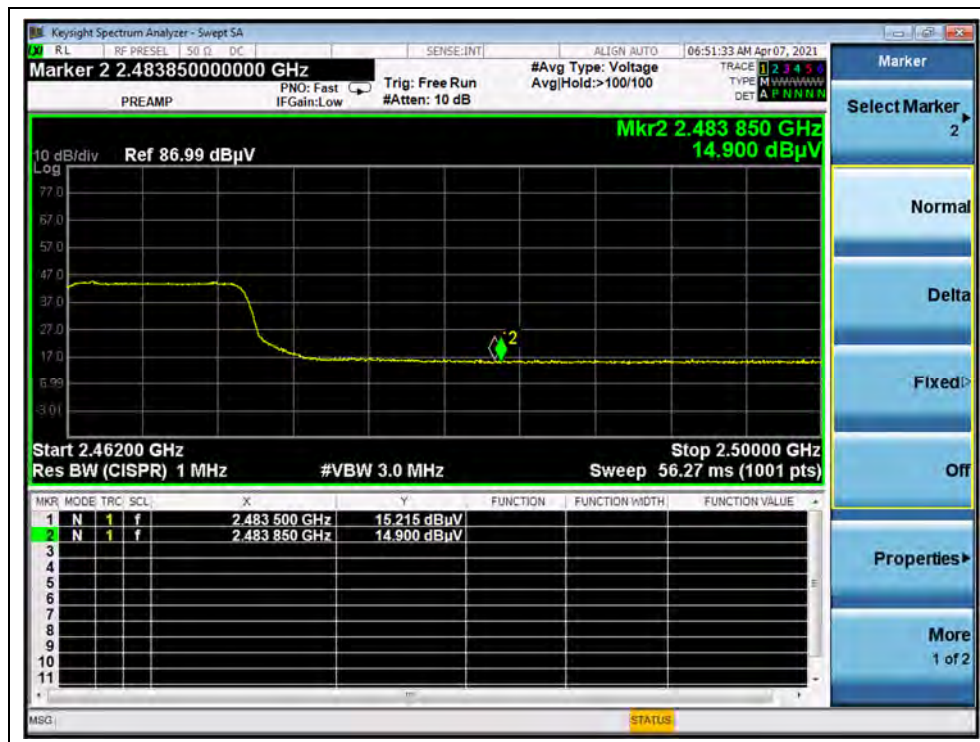

(AVERAGE, Channel 11, 802.11n (HT20))




## 802.11n (HT40) Mode

### A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dBμV)	$A_T$ (dB)	$A_{Factor}$ (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
3	2389.26	PK	26.94	6.74	27.20	60.88	74	PASS
3	2389.49	AV	15.28	6.74	27.20	49.22	54	PASS
9	2483.50	PK	14.70	6.74	27.20	48.64	74	PASS
9	2389.26	AV	26.94	6.74	27.20	60.88	54	PASS

### B. Test Plot:

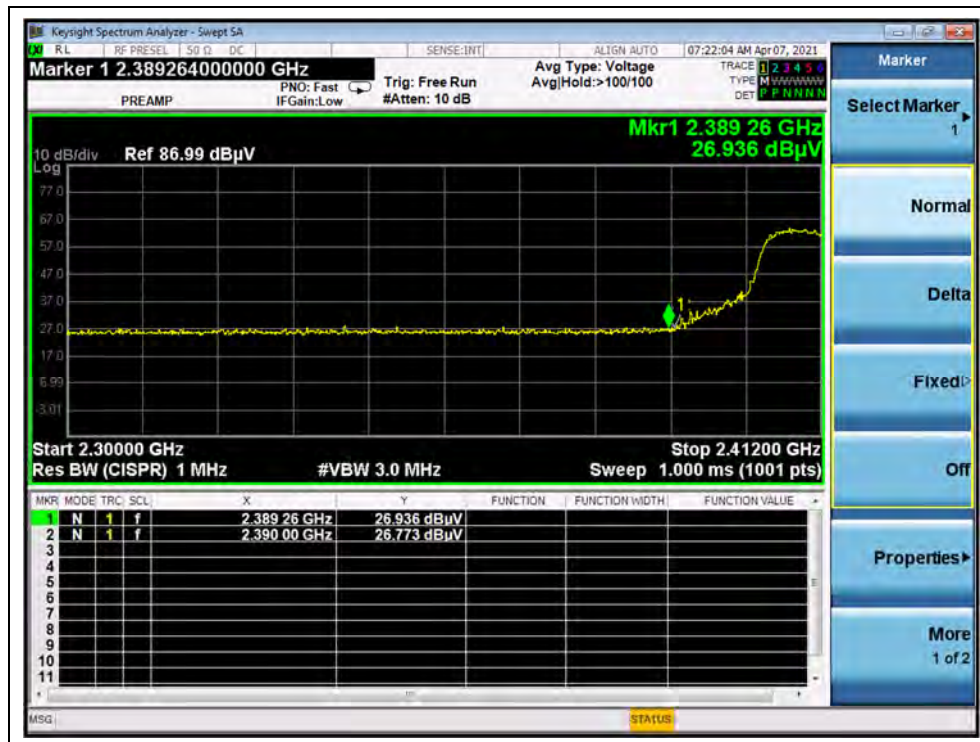

(PEAK, Channel 3, 802.11n (HT40))




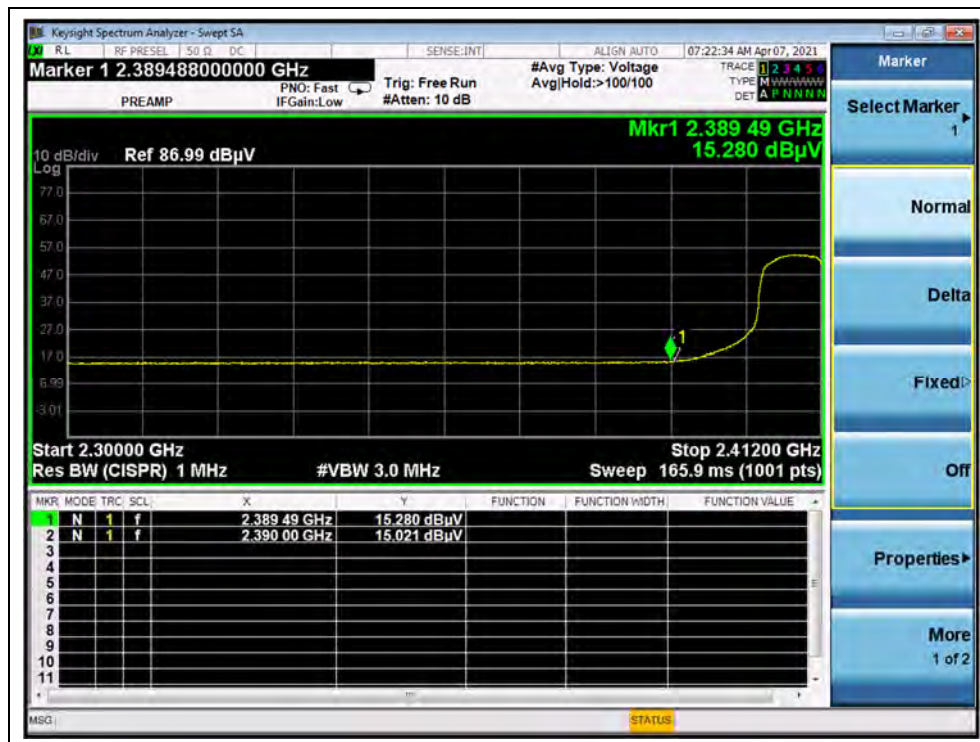

(AVERAGE, Channel 3, 802.11n (HT40))



(PEAK, Channel 9, 802.11n (HT40))

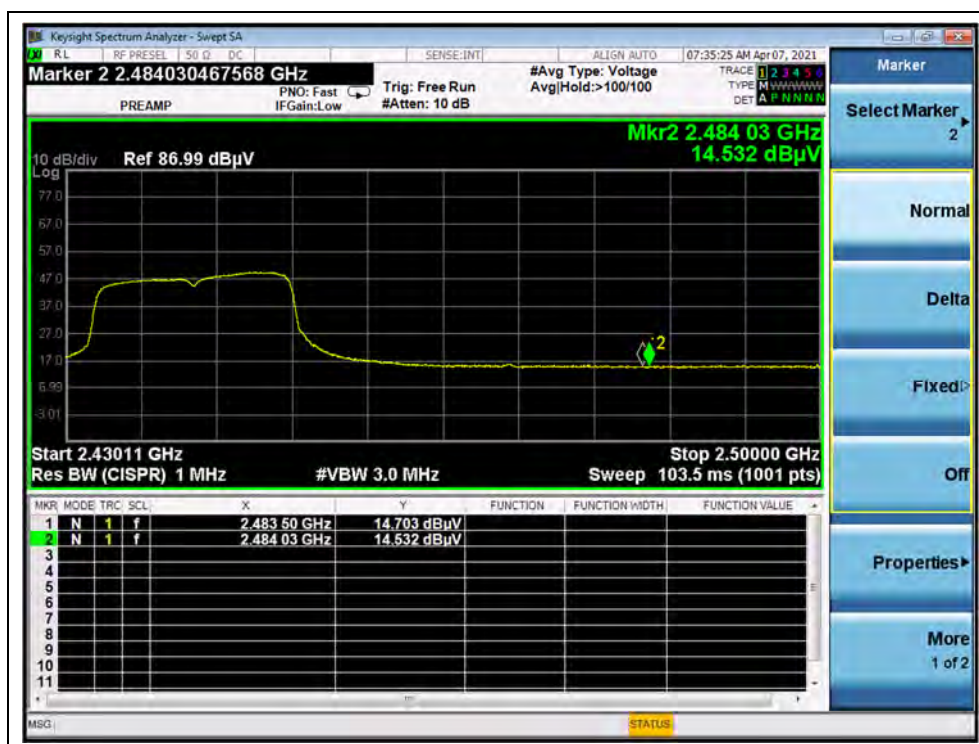

(AVERAGE, Channel 9, 802.11n (HT40))

## 2.9. Radiated Emission

### 2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

**Note2:** For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


## 2.9.2. Test Description

### Test Setup:

- 1) For radiated emissions from 9kHz to 30MHz

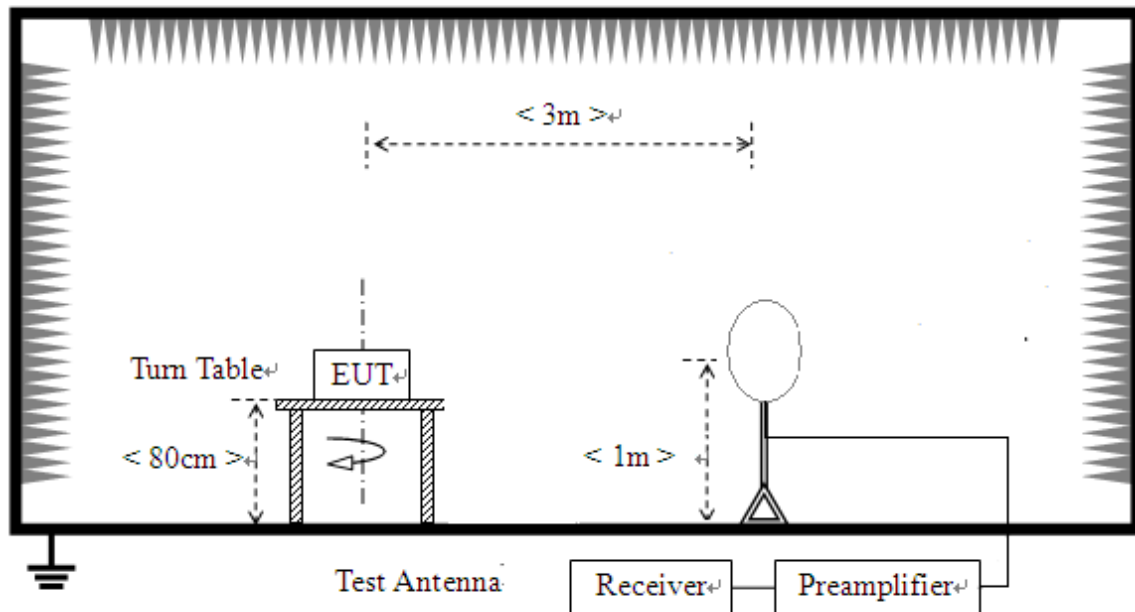


- 2) For radiated emissions from 30MHz to 1GHz

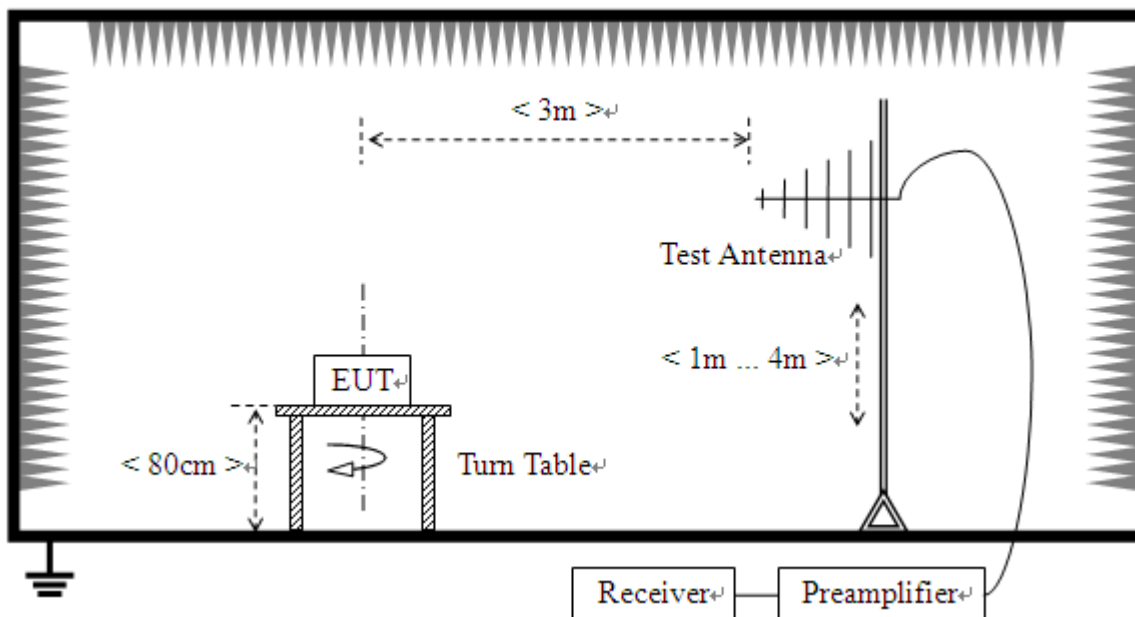



### 3) For radiated emissions above 1GHz

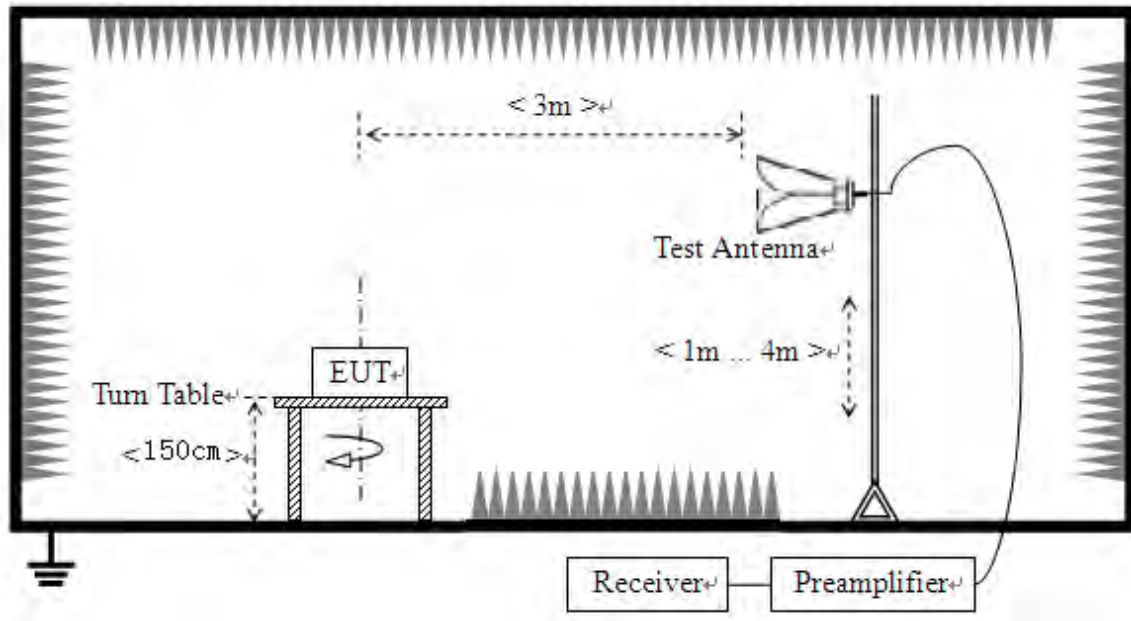

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



### 2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.


**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Note3:** For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**802.11b Mode**

## Plot for Channel 1

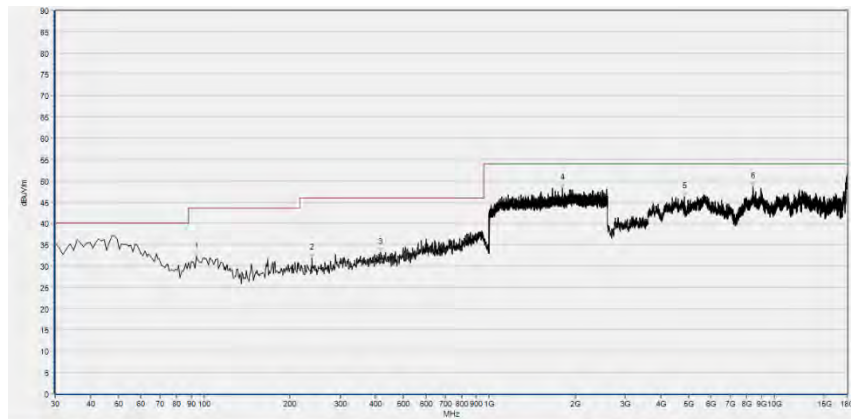

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
94.020	32.12	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
239.520	31.88	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
416.060	33.24	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS
1804.800	48.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4823.760	46.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8433.520	48.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

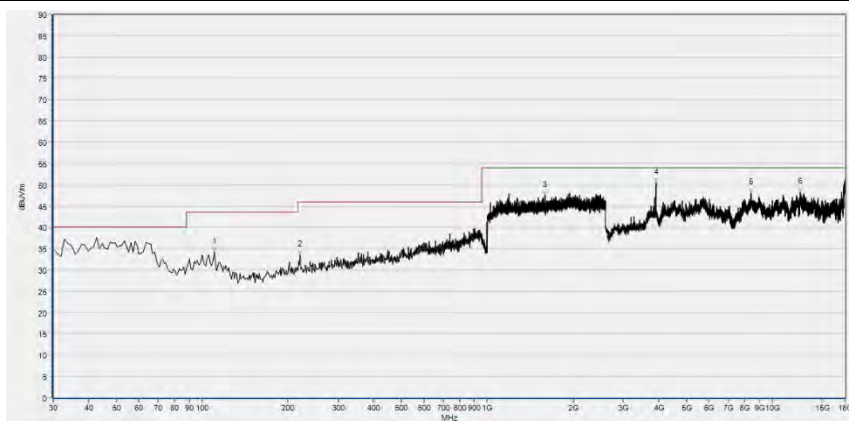


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	34.21	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
220.120	33.45	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1595.200	47.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3899.760	50.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8427.360	48.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12486.800	48.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

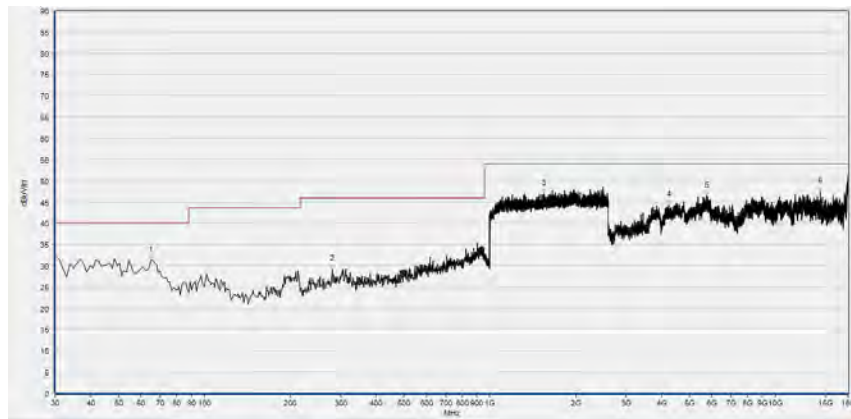

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
64.920	31.14	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
280.260	29.20	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1548.267	47.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4241.640	44.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5760.080	46.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14387.160	47.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

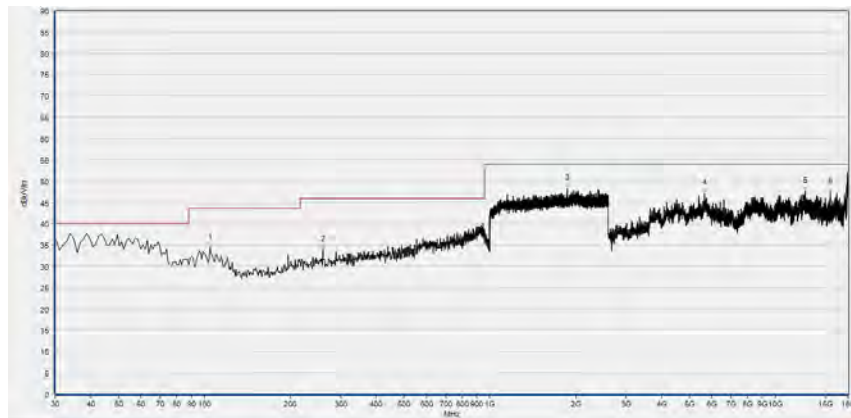


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.690	34.44	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
259.890	33.87	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1865.600	48.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5661.520	47.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12727.040	47.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15603.760	47.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

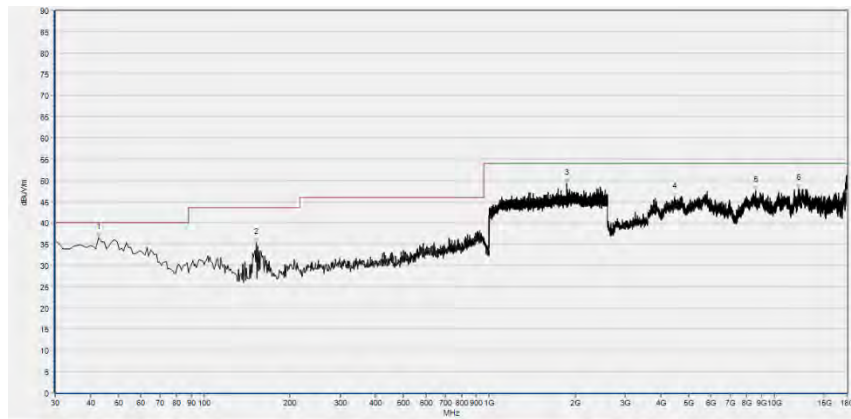

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.610	36.60	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
152.220	35.31	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1867.733	49.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4463.400	46.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8584.440	47.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12154.160	48.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

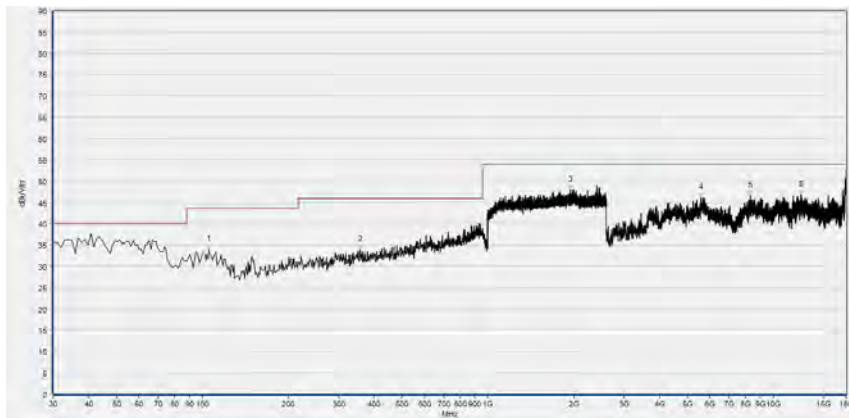


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.660	33.91	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
356.890	33.83	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1946.667	47.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5581.440	46.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8298.000	46.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12502.200	46.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11g Mode**

## Plot for Channel 1

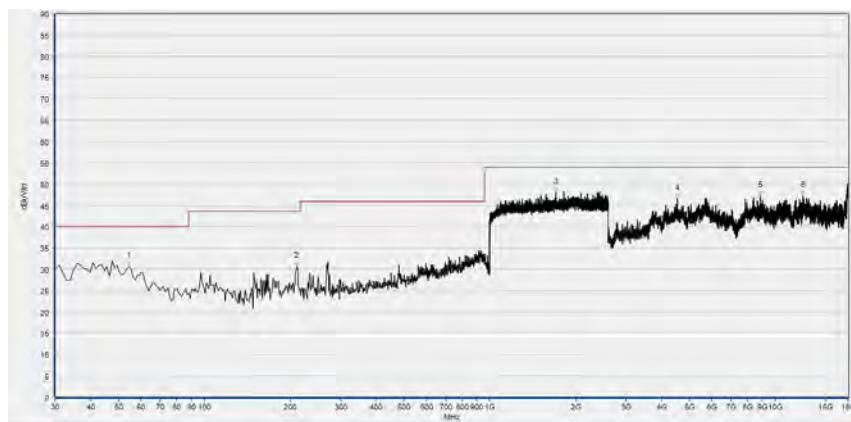

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
54.250	30.69	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
210.420	30.64	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1700.267	48.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4534.240	46.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8843.160	47.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12502.200	47.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

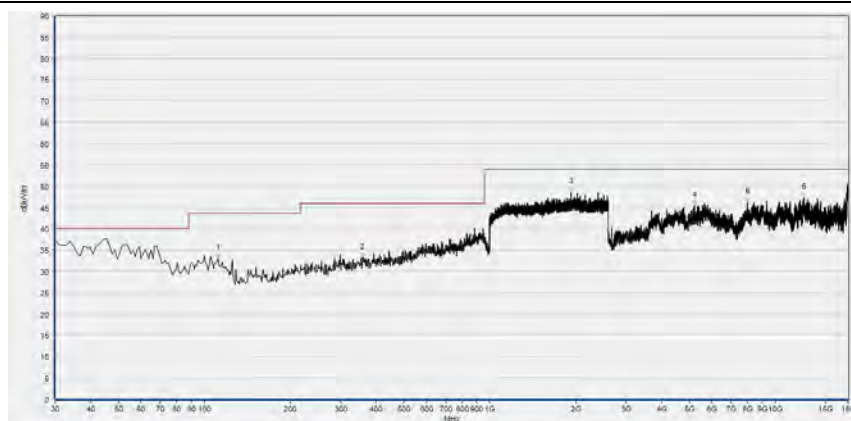

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
111.480	33.00	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
357.860	33.21	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1919.467	48.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5227.240	45.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7993.080	46.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12585.360	47.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 6

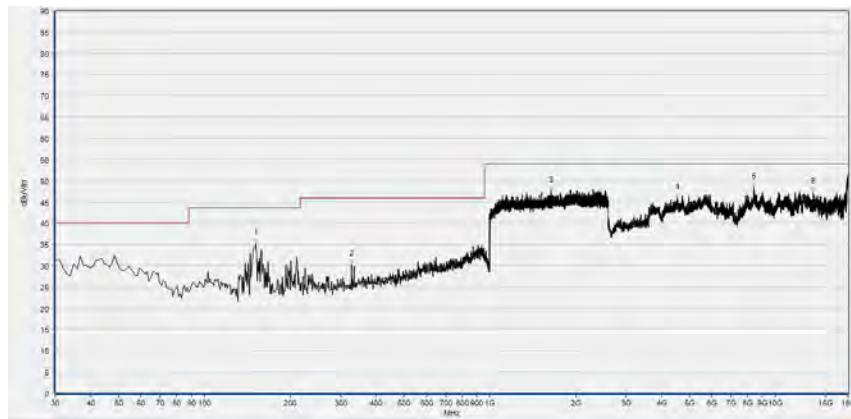

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
151.250	35.20	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
327.790	30.25	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1641.600	47.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4537.320	45.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8415.040	48.47	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13592.520	47.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

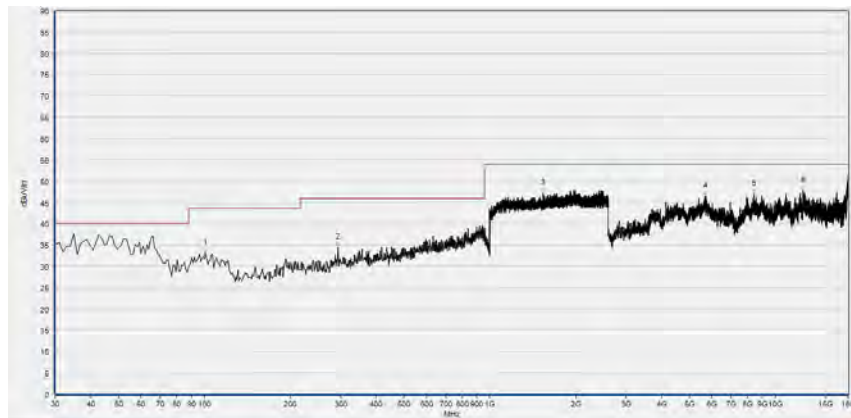


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.810	33.11	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
293.840	34.40	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1538.667	47.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5683.080	46.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8421.200	46.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12520.680	47.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

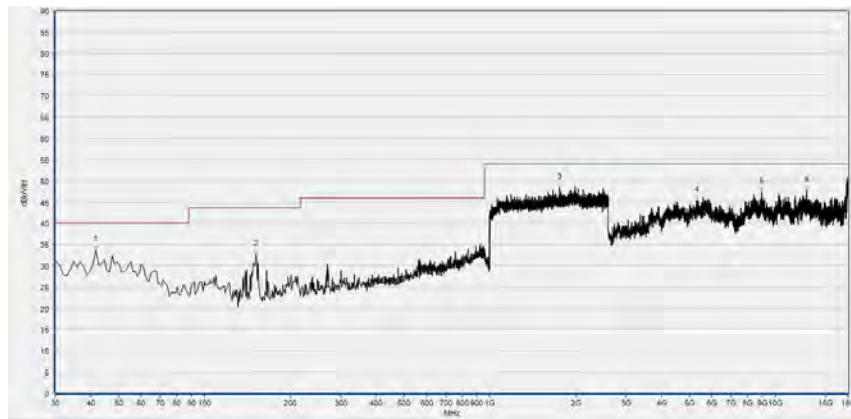

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
41.640	33.71	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
151.250	32.60	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1758.933	48.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5291.920	45.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8969.440	47.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12887.200	47.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

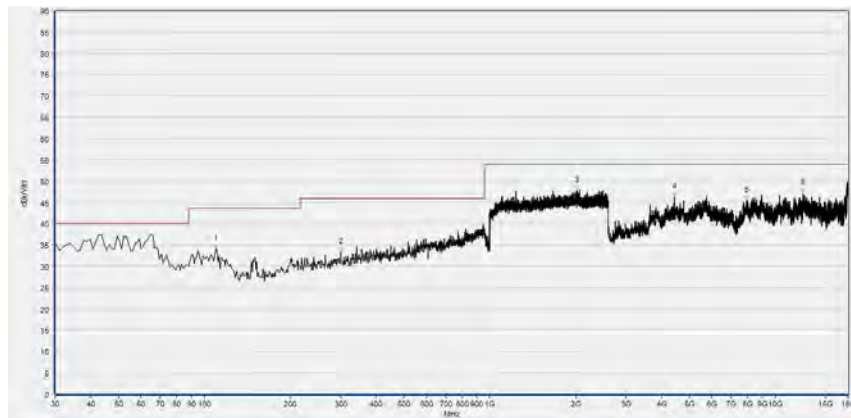


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.98	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
300.630	33.35	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2011.200	47.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4429.520	46.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7956.120	45.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12496.040	47.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




**802.11n (HT20) Mode**

## Plot for Channel 1

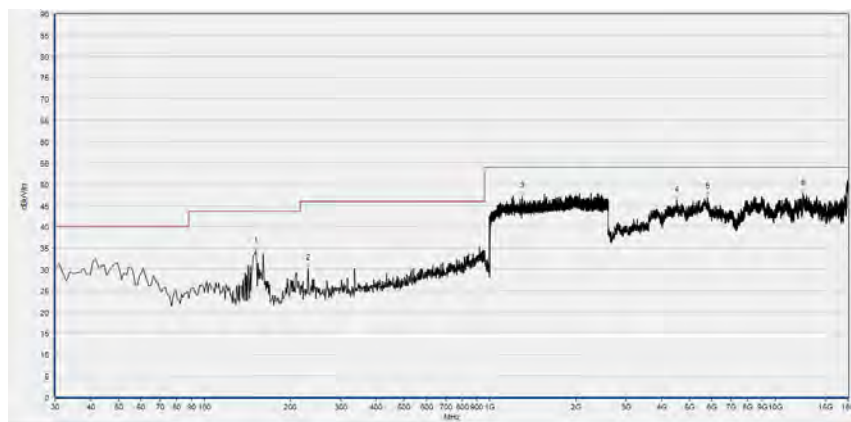

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
151.250	34.18	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
230.790	30.09	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1296.533	47.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4518.840	46.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5800.120	46.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12529.920	47.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

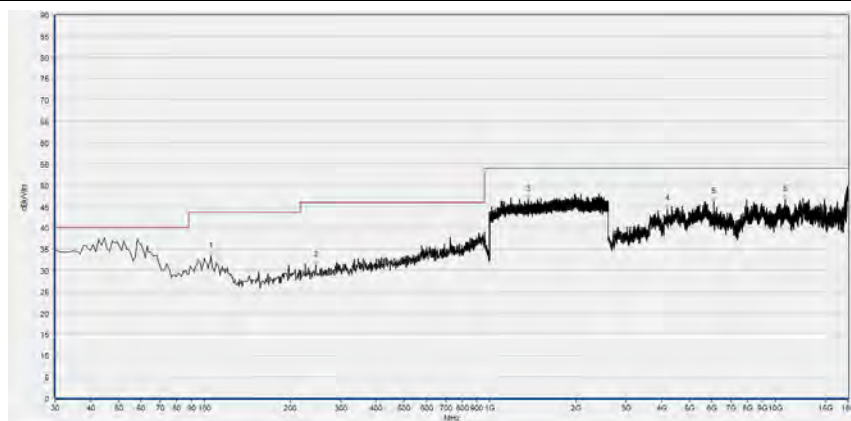

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.660	33.42	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
245.340	31.24	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1358.933	46.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4189.280	44.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6089.640	46.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10863.640	46.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 6

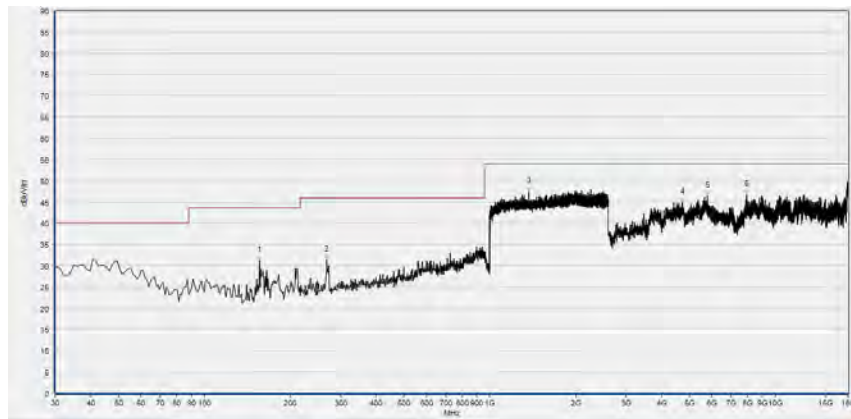

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
156.100	31.09	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
268.620	31.39	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1367.467	47.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4728.280	44.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5790.880	46.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7925.320	46.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

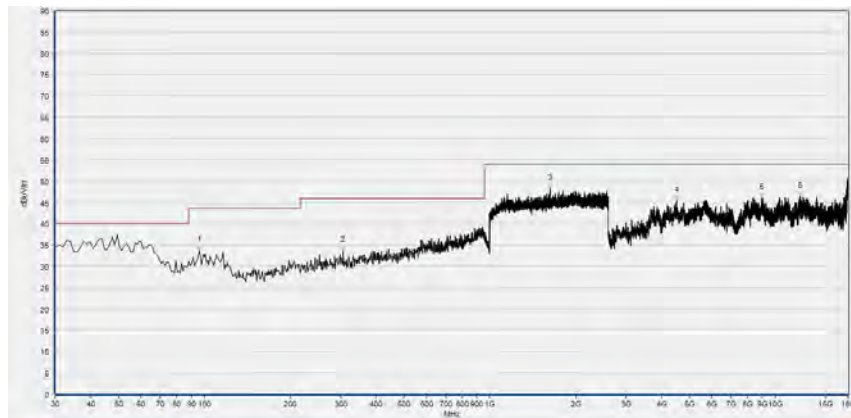

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
95.960	33.68	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
306.450	33.66	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1628.800	48.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4518.840	45.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8941.720	46.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12203.440	46.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 11

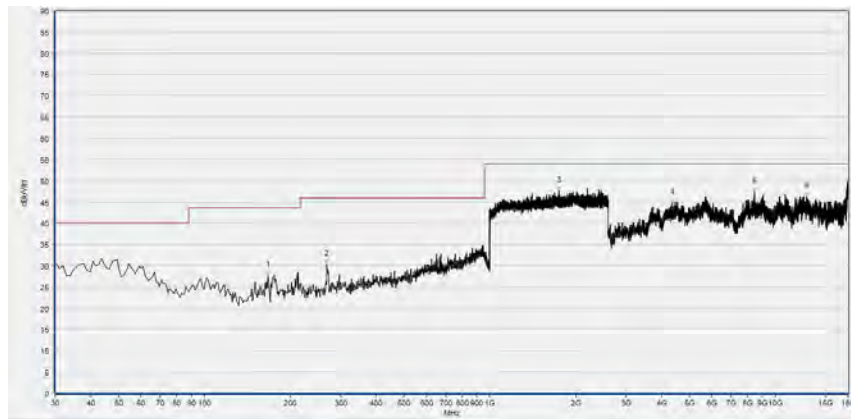

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
166.770	27.70	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
268.620	30.32	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1748.800	47.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4352.520	44.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8448.920	47.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12881.040	46.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

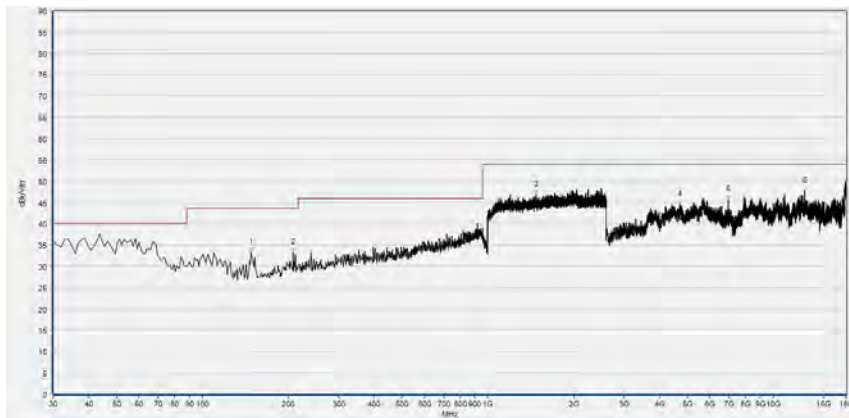


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
148.340	33.37	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
207.510	33.20	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1477.333	46.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4712.880	44.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6945.880	45.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12896.440	47.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT40) Mode**

## Plot for Channel 3

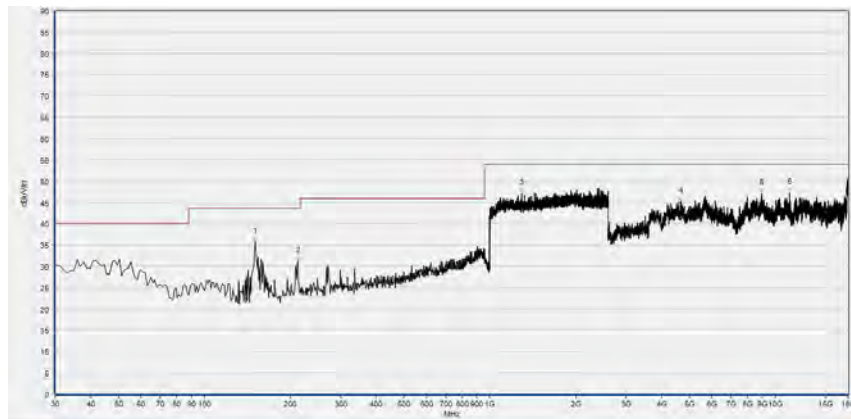

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
150.280	35.70	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
212.360	31.13	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1291.733	47.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4669.760	45.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8950.960	47.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11196.280	47.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

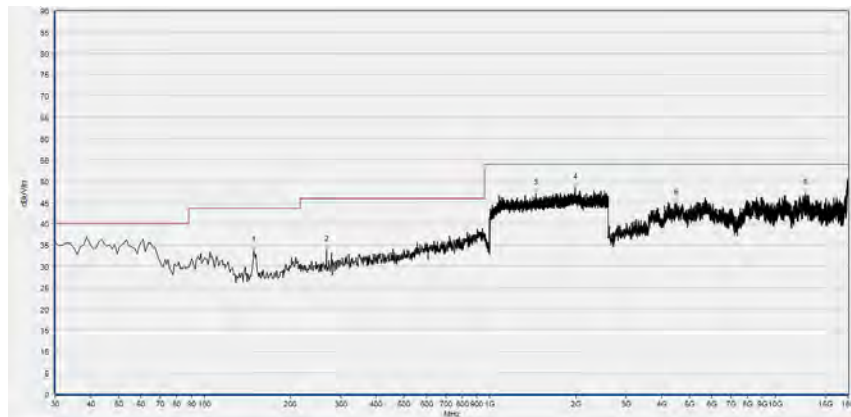


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
149.310	33.70	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
267.650	33.80	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1448.000	47.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1990.933	48.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4500.360	44.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12754.760	47.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

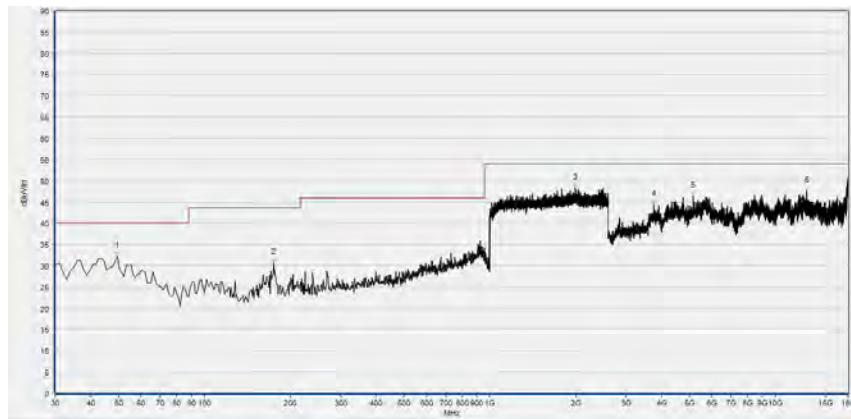

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.400	32.14	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
174.530	30.72	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1990.933	48.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3755.000	44.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5168.720	46.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12896.440	47.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

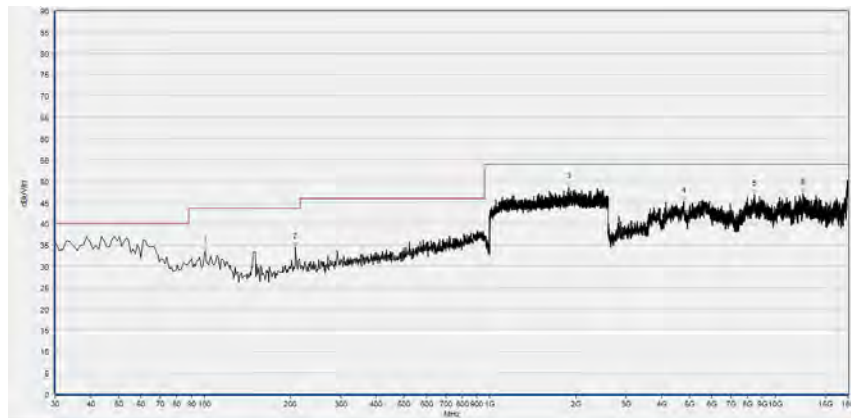

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.810	33.52	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
208.480	34.45	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1894.400	48.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4777.560	45.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8464.320	46.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12536.080	47.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 9

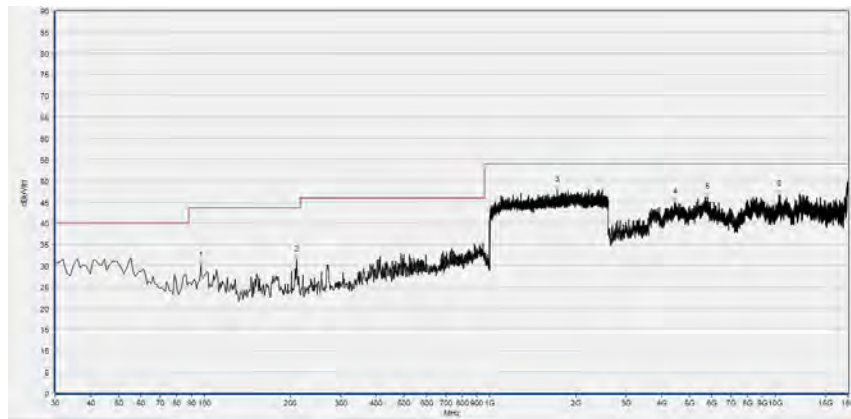

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
96.930	29.94	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
210.420	31.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1726.933	47.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4460.320	44.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5790.880	46.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10303.080	46.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

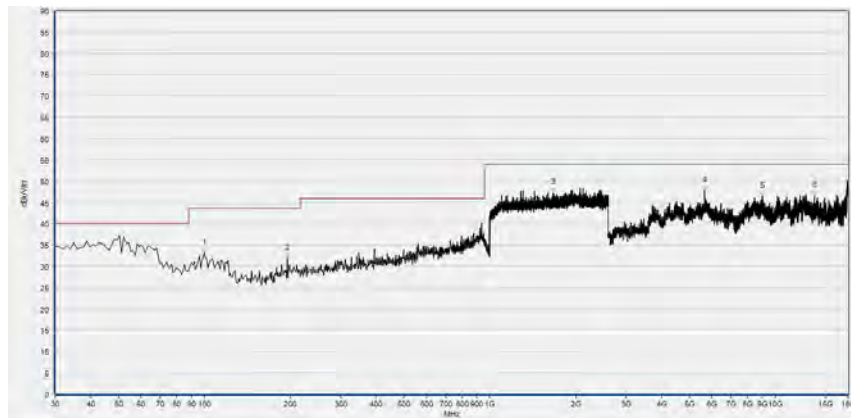

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.840	33.23	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
194.900	31.79	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1664.533	47.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5667.680	47.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9000.240	46.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13691.080	46.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power Spectral Density	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Morlab Laboratory of Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Morlab Laboratory of Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





#### 4. Test Equipments Utilized

##### 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Attenuator 1	(N/A.)	10dB	Resent	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2021.03.25	2022.03.24
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2021.03.25	2022.03.24
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

##### 4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2021.03.09	2022.03.08
LISN	812744	NSLK 8127	Schwarzbeck	2021.03.09	2022.03.08
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial Cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

##### 4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Townsend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial Cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

————— END OF REPORT —————