



Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X

Test Report #: 03-EM-0205.001

October 6, 2003

Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

CFR 47 Part 2, 22, and 24 Test Report

Test Report Number: 03-EM-0205.001

Terminal device:

FCC ID: GMLNPM-10X, Model 3595, HW: 1211f, 1251f SW: 8.06
(Detailed information is listed in section 4).

Originator: Mark Severson
Function: TCC - Dallas - EMC
Version/Status: 1.0, Approved
Location: TCC Directories
Date: October 6, 2003

Change History:

Version	Date	Status	Handled By	Comments
0.1	Sept 16, 2003	Draft	Mark Severson	
0.2	Sept 17, 2003	Reviewed	M.Mobley/N. Walton	
1.0	Oct 06, 2003	Approved	A. Ewing	

Testing laboratory:

Test & Certification Center (TCC) Dallas
Nokia Mobile Phones
6021 Connection Drive
Irving, Texas 75039
U.S.A.
Tel. 972-894-5000
Fax. 972-894-4988

Client:

Nokia Mobile Phones
FCC ID:GMLNPM-10X, Model 3595
6021 Connection Drive
Irving, Texas 75039
U.S.A.
Tel. 972-894-5000
Fax. 972-894-4988

Date and signatures:

October 06, 2003

For the contents:

A handwritten signature in black ink, appearing to read 'Nerina Walton'.

Nerina Walton, EMC Engineer
Technical Review

A handwritten signature in black ink, appearing to read 'Alan C. Ewing'.

Alan C. Ewing, General Manager
Manager Review

TABLE OF CONTENTS

1. GENERAL.....	4
1.1 QUALITY SYSTEM	4
1.2 LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION	4
1.3 OBJECTIVE.....	7
1.4 TEST SUMMARY	7
2. STANDARDS BASIS	7
3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS.....	8
3.1 ABBREVIATIONS	8
3.2 ACRONYMS	8
3.3 TERMS.....	8
4. EQUIPMENT-UNDER-TEST (EUT)	9
4.1 DESCRIPTION OF TESTED DEVICE(S):	9
4.2 PHOTOGRAPH OF TESTED DEVICE(S):	9
5. TEST EQUIPMENT LIST.....	10
6. RF POWER OUTPUT (RADIATED).....	11
6.1 SETUP	11
6.2 PASS/FAIL CRITERIA.....	11
6.3 DETAILED TEST RESULTS	11
6.4 MEASUREMENT UNCERTAINTY	12
7. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)	13
7.1 SETUP	13
7.2 PASS/FAIL CRITERIA.....	13
7.3 DETAILED TEST RESULTS	13
7.4 MEASUREMENT UNCERTAINTY	17
8. SPURIOUS EMISSIONS AT ANTENNA TERMINALS	18
8.1 SETUP	18
8.2 PASS/FAIL CRITERIA.....	18
8.3 DETAILED TEST RESULTS	18
8.4 MEASUREMENT UNCERTAINTY	20
9. FIELD STRENGTH OF SPURIOUS RADIATION.....	21
9.1 SETUP	21
9.2 PASS/FAIL CRITERIA.....	21
9.3 DETAILED TEST RESULTS	22
9.4 MEASUREMENT UNCERTAINTY	23
10. FREQUENCY STABILITY (TEMPERATURE VARIATION / VOLTAGE VARIATION)	24
10.1 SETUP	24
10.2 PASS/FAIL CRITERIA.....	24
10.3 DETAILED TEST RESULTS	24
APPENDIX.....	25



Company Confidential

3 (26)

Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X
Test Report #: 03-EM-0205.001

October 6, 2003

Ver 1.0

© No part of this report shall be reproduced out of the context of the report without the written approval of Nokia Mobile Phones, Inc., Dallas Product Creation, TCC – Dallas.

Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X

Test Report #: 03-EM-0205.001

October 6, 2003

Ver 1.0

1. GENERAL

1.1 Quality System

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). The appendix of this report contains the scope of accreditation for A2LA. TCC – Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661.

1.2 List of General Information Required for Certification

This list is in accordance with FCC Rules and Regulations, CFR 47, Part 2, and to 22H, 24E, Confidentiality.

1.2.1 Sub-part 2.1033(c)(1)

Name and Address of Applicant: Nokia Mobile Phones
6021 Connection Drive
Irving, Texas, 75039, USA

Manufacturer: Nokia Brazil Manaus AM
Rod. Torquato Tapajós, 7200 KM 12 - Tarumã
Postal code: 69048-660
Manaus, Amazonas, Brazil

Nokia Mexico, S.A. DE C.V.
Ave. Ind. Rio Bravo s/n, Parque Ind. del Nte.
Cd. Reynosa, Tam. CP, 88730

Nokia TMC Ltd
973-6 Yangduck-Dong
Hwe won-ku, Masan
Korea

Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X

Test Report #: 03-EM-0205.001

October 6, 2003

Ver 1.0

1.2.2 Sub-part 2.1033(c)(2)

FCC ID: FCC ID: **GMLNPM-10X**

Model No: Model 3595

1.2.3 Sub-part 2.1033(c)(3)

Instruction Manual(s):

Refer to attached EXHIBITS

1.2.4 Sub-part 2.1033(c)(4)

Type of Emission: 256KGXW

1.2.5 Sub-part 2.1033(c)(5)

Frequency Range, MHz: 824.2 to 848.8
1850.2 to 1909.8

1.2.6 Sub-part 2.1033(c)(6)

Power Rating, Watts:

1.148 ERDP Cellular Band

1.318 EIRP PCS Band

☐ Switchable☒ Variable☐ N/A

FCC Grant Note: BC- The output power is continuously variable from the value listed in this entry to 5%-10% of the value listed.

Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X

Test Report #: 03-EM-0205.001

October 6, 2003

Ver 1.0

1.2.7 Sub-part 2.1033(c)(7)

Maximum Power Rating, Watts: 1.318W

1.2.8 Sub-part 2.1033(c)(8)

Voltages & Currents in all elements in final R.F. Stage, including final transistor or solid-state device:

Collector Current, A = 356mA

Collector Voltage, Vdc = 3.7

Supply Voltage, Vdc = 3.7

1.2.9 Sub-part 2.1033(c)(9)

Tune-up Procedure:

Refer to attached EXHIBITS

1.2.10 Sub-part 2.1033(c)(10)

Circuit Diagram/Circuit Description:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Refer to attached EXHIBITS

1.2.11 Sub-part 2.1033(c)(11)

Label Information:

Refer to attached EXHIBITS

1.2.12 Sub-part 2.1033(c)(12)

Photographs:

Refer to attached EXHIBITS

1.2.13 Sub-part 2.1033(c)(13)

Digital Modulation Description:

N/A

1.2.14 Sub-part 2.1033(c)(14)

**Test and Measurement Data:
FOLLOWS**

1.3 Objective

All tests and measurement data shown was performed to determine whether the selected handset was in compliance as specified in FCC: CFR47 Parts 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, Part 22, and Part 24.

1.4 Test Summary

Test Results: *The test result relates only to those tested devices mentioned in Section 4 of this test report.*

Test Performed	Reference	Section of Report	Complies / Does not comply
RF Power Output (Radiated)	FCC Part 22.913(a) / 24.232(b)	6	Complies
Occupied Bandwidth: Transmitter Conducted Measurements	FCC Part 2.1049(c)(1), 24.238(a)(b)	7	Complies
Spurious Emissions at Antenna Terminals	FCC Part 2.1051	8	Complies
Field Strength of Spurious Radiation	FCC Part 2.1053	9	Complies
Frequency Stability (Temperature Variation)	FCC Part 2.1055(a)(1)(b), 24.235	10	Complies
Frequency Stability (Voltage Variation)	FCC Part 2.1055(d)(1)(2), 24.235	10	Complies

2. STANDARDS BASIS

Testing has been carried out in accordance with:

REF.	Code of the standard	Name of the standard
1	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.
2	FCC: CFR 47 Part 2	Code of Federal Regulations (CFR) Title 47, Part 2 – Frequency Allocations and Radio Treaty Matters; General Rules and Regulations: Subpart J – Equipment Authorization Procedures
3	FCC: CFR 47 Part 22	Code of Federal Regulations (CFR) Title 47, Part 22 – Public Mobile Services: Subpart H – Cellular Radiotelephone Service
4	FCC: CFR 47 Part 24	Code of Federal Regulations (CFR) Title 47, Part 24 – Personal Communications Services: Subpart E – Broadband PCS
5	ANSI/TIA/EIA 603-A	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
6	RSS-132	800 MHz Cellular Telephones Employing New Technologies
7	RSS-133	2 GHz Personal Communications Services, Industry Canada
8	RSS-212	Test Facilities and Test Methods for Radio Equipment, Industry Canada (Provisional)
9	RSP-100	Radio Equipment Certification Procedure

Note: Unless otherwise stated, (by reference to a version number and a publication date), the latest version of the above documents applies.

Deviations:

Not Applicable.

3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS

3.1 Abbreviations

dB - decibel

dBm - decibels per milliwatt (absolute measurement)

GHz - gigahertz or 1000000000 hertz

kHz - kilohertz or 1000 hertz

MHz - megahertz or 1000000 hertz

3.2 Acronyms

AMPS - Advanced Mobile Phone System

BSS - Base Station Simulator

CDMA - Code Division Multiple Access

EDRP - Effective Dipole Radiated Power

EIRP - Effective Isotropic Radiated Power

EMC - Electromagnetic Compatibility

EMI - Electromagnetic Interference

EUT - Equipment under Test

GSM - Global System for Mobile communications

PCS - Personal Communications Services

RF - Radio Frequency

TDMA - Time Division Multiple Access

3.3 Terms

Base Station Simulator (BSS) - simulates all the necessary signals that a phone would experience while on a live network. There are many types of base station simulators catering for all current protocols, i.e., GSM, AMPS, TDMA, and CDMA.

Cellular - refers to a frequency in the 800MHz band.

PCS - refers to a frequency in the 1900MHz band.

Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X
Test Report #: 03-EM-0205.001

October 6, 2003

Ver 1.0

4. EQUIPMENT-UNDER-TEST (EUT)

The results in this report relate only to the items listed below:

4.1 Description of Tested Device(s):

Test Performed	Mode of Operation	Date of Receipt	Condition of Sample	Item	Identifying Information
2.1046(a), 22.913(a), 24.232(b)(c) 2.1053	GSM 850/1900	Sept 10, 2003	Good	Phone	Type: NPM-10X Hw Id: 1251f IMEI 010185/00/724596/9 Code: 510099HK29
22.913(a), 24.232(b)(c)	GSM 850/1900	Aug 18, 2003	Good	Phone	Type: NPM-10X Hw Id: 1211f IMEI 010166/00/342893/2 Code: 0510099
2.1051, 2.1049(c)(1), 24.238(a)(b), 2.1055(d)(1)(2), 2.1055(a)(1)(b), 24.235	GSM 850/1900	Aug 18, 2003	Good	Phone	Type: NPM-10X Hw Id: 1211f IMEI0: 010166/00/342892/4 Code: 0510099
2.1053	GSM 850/1900	Aug 18, 2003	Good	Accessory Cover	Type: SKH654 SN: 27378405494226200
2.1053	GSM 850/1900	Aug 18, 2003	Good	Accessory Cover	Type: SKH656 SN: 949097705494245000
2.1053	GSM 850/1900	Aug 18, 2003	Good	Accessory Cover	Type: Spider
2.1051, 2.1049(c)(1), 24.238(a)(b), 2.1055(d)(1)(2), 2.1055(a)(1)(b), 24.235 22.913(a), 24.232(b)(c), 2.1053	GSM 850/1900	Aug 18, 2003	Good	Battery	Type: BLC-2 Other: 3.7v Li-ion

4.2 Photograph of Tested Device(s):

Refer to attached EXHIBITS

5. TEST EQUIPMENT LIST


The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items listed can be obtained from the Engineering Services Group within NMP, Product Creation - Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC - Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.

Test/ Section of Report	NMP#	Test Equipment	Mfr. #	Model #
7,8	N/A	3GHz High Pass Filter	Trilithic Inc.	4HC2900/18000-1.1-KK
7,8	N/A	2GHz High Pass Filter	Trilithic Inc.	3HC1900/18000-1-KK
7,8	N/A	1GHz High Pass Filter	Wainwright.	WHK949-9SS
7,8	NMP03155	Power Splitter (must have 6 dB insertion loss)	Hewlett Packard	33120A
7,8	NMP02661/ NMP02663	EMI Receiver	Agilent	8546A / 85460A
7,8	N/A	6dB Attenuator	Weinshcel	Model 2
7,8	NMP02680	Spectrum Analyzer	Agilent	E7405A
6,9	NMP02886	Biconilog Antenna	ETS	3142B
6,9	NMP00368 NMP00367	EMI Receiver	Agilent	8546A / 85460A
6,9	NMP00064	Horn Antenna	EMCO	3115
6,9	NMP02857	Horn Antenna	EMCO	3115
6,9	NMP02846	Turntable and Tower Controller	Sunol	FM2022
6,9	NMP02679	Spectrum Analyzer	Agilent	E7405A
6,9	NMP02671	Signal Generator	Agilent	83630B
10	NMP00837	Temperature Chamber	Tenney Environmental	N/A
9	NMP00001	RF preamplifier	Agilent	HP8449B
6,9	NMP00147	Power Meter	Boonton	4232A
6,9	NMP00163	Power Sensor	Boonton	51015
9	NMP02283	Spectrum Analyzer	Agilent	8593EM
7, 8, 10	NMP0151	Base Station Emulator	Wavetek	4300D
10	NMP00627	DC Power Supply	Hewlett Packard	E3631A
10	NMP00490	Multi-Meter	Fluke	87III
6,9	NMP02281	Base Station Emulator	Wavetek	4300D
6	NMP02854	Tunable Dipole	Schwarzbeck	D69250

6. RF POWER OUTPUT (RADIATED)

Specification: FCC Part 22.913(a), 24.232(b)(c)

6.1 Setup

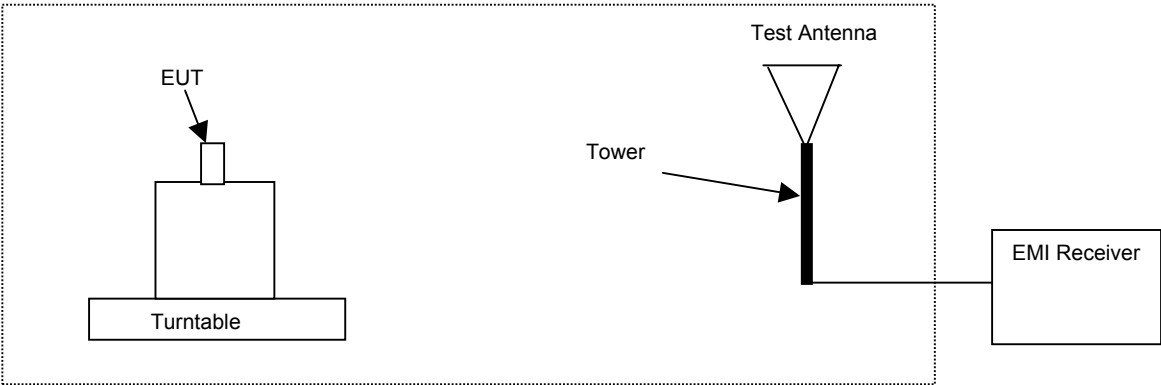

6.2 Pass/Fail Criteria

Band	FCC Limit (dBm)
Cellular	38.5 (EDRP)
PCS	33.0 (EIRP)

6.3 Detailed Test Results

Test Technician / Engineer	J. Love		
Date of Measurement	18,19-Aug-03		
Temperature / Humidity	21 to 25 °C	35 to 62 %RH	
Test Result	Complies		

Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X

Test Report #: 03-EM-0205.001

October 6, 2003

Ver 1.0

Cellular GSM850 EDRP

Channel	Freq (Max) MHz	EDRP (dBm)	FCC Limit (dBm)
128	824.20	29.8	38.5
190	836.60	30.0	38.5
251	848.80	30.6	38.5

PCS GSM1900 EIRP

Channel	Freq (Max) MHz	EIRP (dBm)	FCC Limit (dBm)
512	1850.20	31.2	33.0
661	1880.00	30.2	33.0
810	1909.80	30.1	33.0

6.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 2.4dB for 800 to 2000 MHz.

7. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)

Specification: FCC Part 2.1049(c)(1), 24.238(a)(b)

7.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call.

7.2 Pass/Fail Criteria


Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular 800, Low Channel	< 824	-13
Cellular 800, High Channel	> 849	-13
PCS 1900, Low Channel	< 1850	-13
PCS 1900, High Channel	> 1910	-13

7.3 Detailed Test Results

Test Technician / Engineer	Chi Nguyen	
Date of Measurement	4-Aug-03	
Temperature / Humidity	22 °C	50 to 51 %RH
Test Result	Complies with FCC 2.1049	


Cellular Band, GSM 850, Channel 128

3 KHz RBW/VBW, 100ms Sweep Time

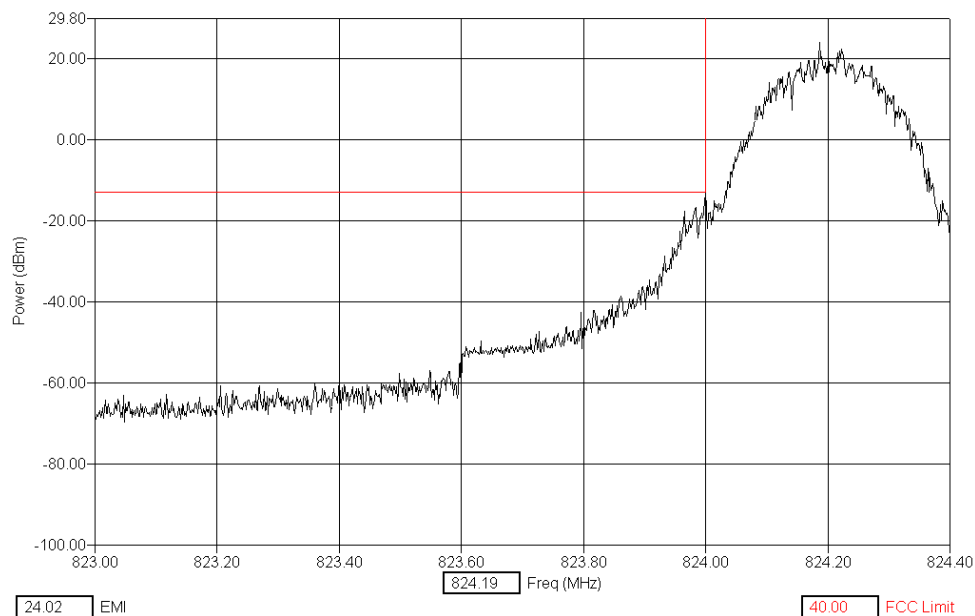


Cellular Band, GSM 850, Channel 251

3 KHz RBW/VBW, 100ms Sweep Time

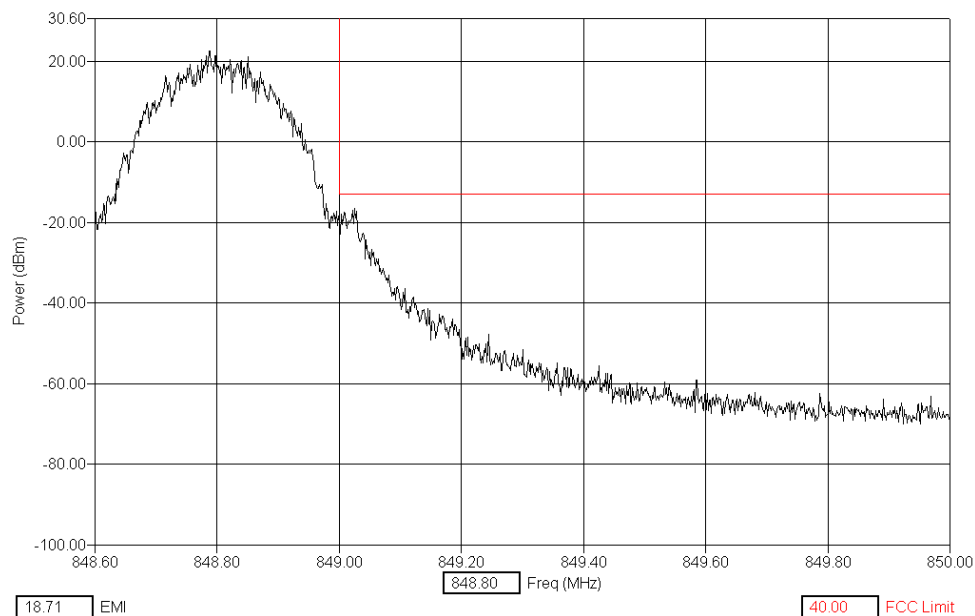


PCS Band, GSM 1900, Channel 512

3 KHz RBW/VBW, 100ms Sweep Time

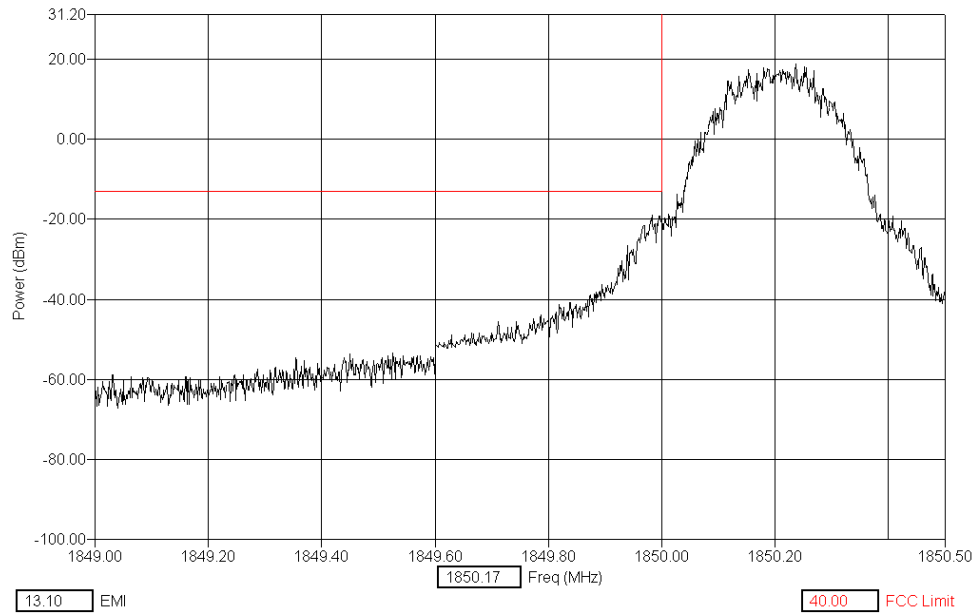


PCS Band, GSM 1900, Channel 810

3 KHz RBW/VBW, 100ms Sweep Time

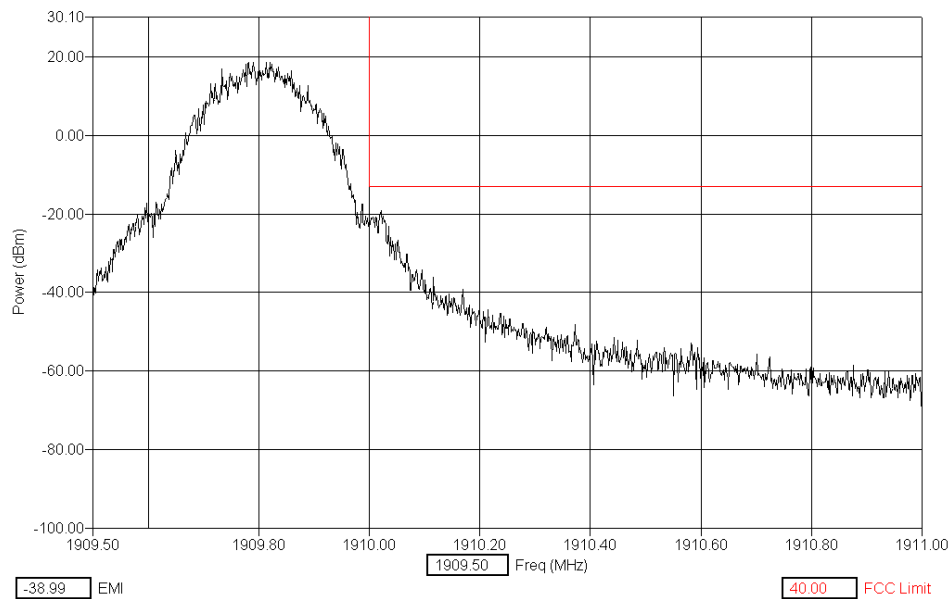


Occupied Bandwidth, In Band; Cellular, GSM 850, Channel 190

3 KHz RBW/VBW, 100ms Sweep Time

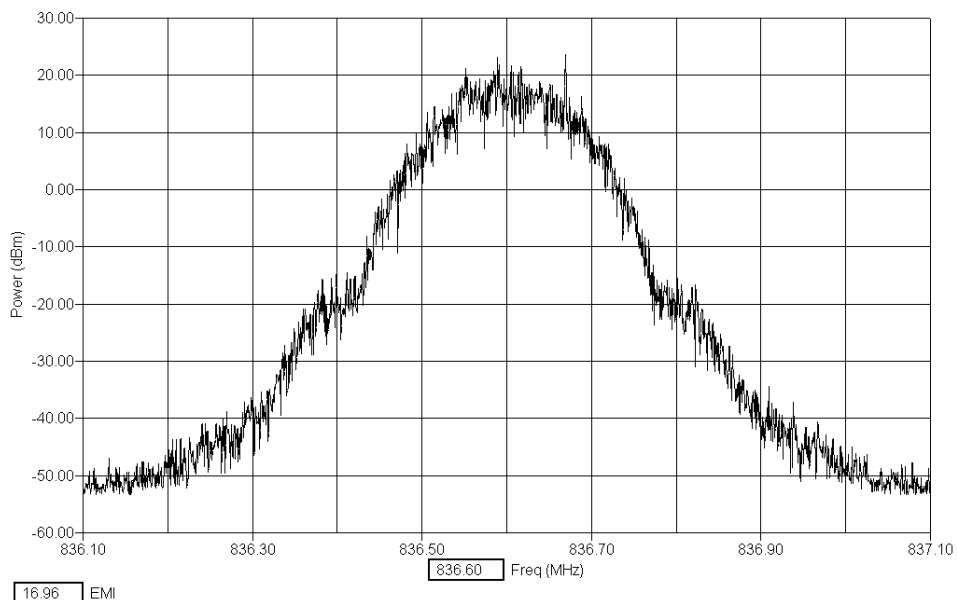

Occupied Bandwidth, In Band; PCS, GSM 1900, Channel 661

3 KHz RBW/VBW, 100ms Sweep Time

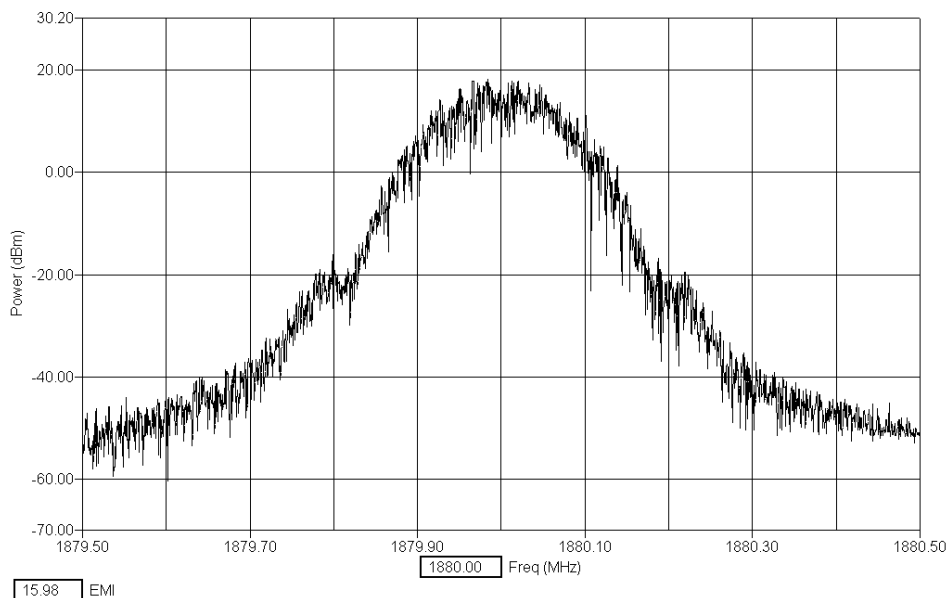



Company Confidential

17 (26)

Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X

Test Report #: 03-EM-0205.001

October 6, 2003

Ver 1.0

7.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 3.7dB for 100kHz - 1000MHz and +/- 5.3dB for 1 - 20GHz.

8. SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Specification: FCC Part 2.1051

8.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call. Filters were introduced to reduce or eliminate spurious emission, which could be generated internally in the EMI receiver.

8.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular / PCS	30 – 20000 *	-13

* Frequency to be investigated up to the 10th harmonic of the highest clock or frequency used.

8.3 Detailed Test Results

Test Technician / Engineer	Chi Nguyen	
Date of Measurement	4-Aug-03	
Temperature / Humidity	22 °C	47 to 52 %RH
Test Result	Complies with FCC 2.1051	

EMI (dBm) = trace (dBuV) + cable loss (dB) + filter loss (dB).

Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X

Test Report #: 03-EM-0205.001

October 6, 2003

Ver 1.0

GSM850 Channel 128

Freq (Max) (MHz)	(PK) EMI (dBm)	FCC Limit (dBm)
1649.14	-40.67	-13.00
2473.13	-34.95	-13.00
3296.96	-40.43	-13.00
4118.31	-43.15	-13.00
4945.67	-43.28	-13.00
5769.05	-37.31	-13.00
6592.55	-41.55	-13.00
7414.90	-38.70	-13.00
8242.10	-38.10	-13.00

GSM850 Channel 190

Freq (Max) (MHz)	(PK) EMI (dBm)	FCC Limit (dBm)
1674.18	-39.44	-13.00
2509.67	-38.50	-13.00
3347.13	-40.50	-13.00
4181.60	-43.05	-13.00
5022.30	-42.86	-13.00
5857.07	-37.12	-13.00
6695.36	-41.86	-13.00
7528.95	-38.05	-13.00
8364.45	-38.18	-13.00

GSM850 Channel 251

Freq (Max) (MHz)	(PK) EMI (dBm)	FCC Limit (dBm)
1697.73	-40.17	-13.00
2545.76	-37.25	-13.00
3395.13	-41.47	-13.00
4242.53	-42.37	-13.00
5095.35	-42.34	-13.00
5941.38	-39.72	-13.00
6791.24	-39.15	-13.00
7639.96	-37.73	-13.00
8486.29	-37.94	-13.00

GSM1900 Channel 512

Freq (Max) (MHz)	(PK) EMI (dBm)	FCC Limit (dBm)
3701.22	-40.95	-13.00
5553.30	-41.59	-13.00
7403.65	-37.17	-13.00
9250.79	-38.12	-13.00
11103.54	-35.70	-13.00
12948.61	-35.80	-13.00
14801.36	-32.16	-13.00
16650.54	-32.21	-13.00
18501.33	-30.74	-13.00

GSM1900 Channel 661\

Freq (Max) (MHz)	(PK) EMI (dBm)	FCC Limit (dBm)
3759.73	-40.56	-13.00
5639.28	-41.07	-13.00
7517.40	-38.88	-13.00
9399.10	-36.46	-13.00
11280.57	-37.48	-13.00
13159.14	-35.69	-13.00
15042.56	-30.92	-13.00
16918.90	-32.05	-13.00
18798.44	-31.66	-13.00

GSM1900 Channel 810

Freq (Max) (MHz)	(PK) EMI (dBm)	FCC Limit (dBm)
3820.02	-41.32	-13.00
5730.51	-40.75	-13.00
7639.77	-37.76	-13.00
9549.76	-37.53	-13.00
11459.81	-36.34	-13.00
13366.37	-31.11	-13.00
15276.60	-32.19	-13.00
17189.42	-33.06	-13.00
19095.34	-30.85	-13.00

8.4 Measurement Uncertainty


The measurement uncertainty for this test is +/- 3.7dB for 100kHz - 1000MHz and +/- 5.3dB for 1 - 20GHz.

9. FIELD STRENGTH OF SPURIOUS RADIATION

Specification: FCC Part 2.1053

9.1 Setup

Test equipment set-up.

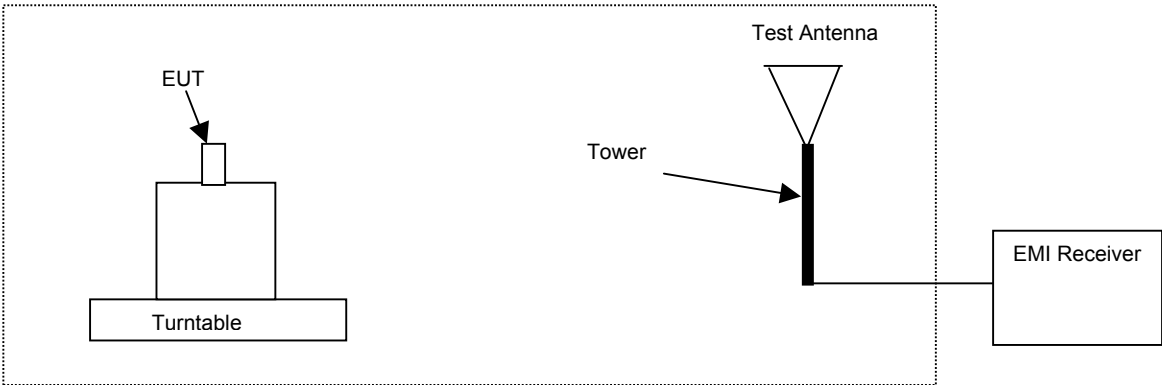

9.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limit (dBm)
Cellular / PCS	30 – 20000*	-13

- Frequency to be investigated up to the 10th harmonic of the highest clock or frequency used.

Substitution method according to ANSI/TIA/EIA 603-1 was used for final measurements.

Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X

Test Report #: 03-EM-0205.001

October 6, 2003

Ver 1.0

9.3 Detailed Test Results

Test Technician / Engineer	Michael Sundstrom / James Love	
Date of Measurement	10 –12 xx September 2003	
Temperature / Humidity	°23 – 25C	38 – 47 % RH
Test Result (original)	Complies	
Test Result (spider)	Complies	
Test Result(skh-656)	Complies	
Test Result(skh-664)	Complies	

GSM 850, Channel 190

Freq Max (MHz)	(PK) EMI (dBm)	dBc	FCC Limit (dBm)	Pol.
1673.20	-33.3	-63.3	-13	H
1673.20	-37.6	-67.6	-13	V
2509.80	-34.7	-64.7	-13	H
2509.80	-34.1	-64.1	-13	V
3346.40	-31.4	-61.4	-13	H
3346.40	-30.9	-60.9	-13	V
4183.00	-27.2	-57.2	-13	H
4183.00	-27.7	-57.7	-13	V
5019.60	-24.6	-54.6	-13	H
5019.60	-25.2	-55.2	-13	V
5856.20	-22.8	-52.8	-13	H
5856.20	-22.5	-52.5	-13	V
6692.80	-43.6	-73.6	-13	H
6692.80	-43.3	-73.3	-13	V
7529.40	-40.5	-70.5	-13	H
7529.40	-40.5	-70.5	-13	V
8366.00	-39.4	-69.4	-13	H
8366.00	-39.0	-69.0	-13	V

Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X

Test Report #: 03-EM-0205.001

October 6, 2003

Ver 1.0

GSM 1900, Channel 661

Freq Max (MHz)	(PK) EMI (dBm)	dBc	FCC Limit (dBm)	Pol.
3760.00	-15.4	-45.6	-13	H
3760.00	-23.1	-53.3	-13	V
5640.00	-21.5	-51.7	-13	H
5640.00	-24.2	-54.4	-13	V
7520.00	-36.8	-67.0	-13	H
7520.00	-40.6	-70.8	-13	V
9400.00	-37.7	-67.9	-13	H
9400.00	-37.7	-67.9	-13	V
11280.00	-36.2	-66.4	-13	H
11280.00	-36.0	-66.2	-13	V
13160.00	-32.8	-63.0	-13	H
13160.00	-31.9	-62.1	-13	V
15040.00	-31.1	-61.3	-13	H
15040.00	-29.9	-60.1	-13	V
16920.00	-28.7	-58.9	-13	H
16920.00	-28.3	-58.5	-13	V
18800.00	-24.0	-54.2	-13	H
18800.00	-24.1	-54.3	-13	V

9.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 5.2dB for 30-300MHz; +/- 5.2dB for 300-1000MHz, +/- 5.6dB for 1-6GHz and +/-6.8 for 6-18GHz.

10. FREQUENCY STABILITY (TEMPERATURE VARIATION / VOLTAGE VARIATION)

Specification: FCC Part 2.1055(a)(1)(b), 24.235

Specification: FCC Part 2.1055(d)(1)(2), 24.235

10.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

10.2 Pass/Fail Criteria

Not Applicable

10.3 Detailed Test Results

Test Technician / Engineer	Jesse Torres		
Date of Measurement	6-Aug-03 to 7-Aug-03		
Temperature / Humidity	23 °C	45 to 47 %RH	
Test Result	Complies with FCC 2.1055		

Temperature (C)	Frequency Error (Hz)		
	GSM 850	GSM 1900	
-30	-29.17	-24.01	
-20	-16.92	-24.01	
-10	-12.18	-29.09	
0	-16.83	31.14	
10	-14.63	36.17	
20	20.77	38.21	
30	12.88	28.3	
40	17.53	36.45	
50	26.88	37.29	

Voltage	Frequency Error (Hz)		
	GSM 850	GSM 1900	
3.55 (-end point)	26.4	10.6	
3.90 (Nominal)	31.2	11.5	
4.485 (115%)	26.3	15.0	

Test & Certification Center (TCC) - Dallas

FCC ID: GMLNPM-10X

Test Report #: 03-EM-0205.001


October 6, 2003

Ver 1.0

APPENDIX

TCC-Dallas is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below:




American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999


NOKIA MOBILE PHONES
 TEST & CERTIFICATION CENTER - DALLAS
 6021 Connection Drive
 Irving, TX 75039
 Alan Ewing Phone: 972 894 4744

ELECTRICAL


Valid to: November 30, 2003 Certificate Number: 1819-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following Electromagnetic Compatibility (EMC), Specific Absorption Rate (SAR), and tests on wireless communications devices:


Tests	Test Method
Emissions	
Conducted and Radiated	CFR 47 Part 2, 15, 22, 24 CISPR 22; EN 55022 ICES-003; RSS-128, 132 and 133 3GPP TS 51.010-1 Section 12.2 ETSI EN 301 489-1; EN 301 489-7 (using ANSI C63.4 and RSS-212)
Specific Absorption Rate	IEEE 1528 EN 50360; EN 50361 CFR 47 Parts 2 and 24 OET Bulletin 65 and Supplement C RSS-102
Immunity	
Vehicular Immunity Electrostatic Discharge (ESD) RF Radiated Electrical Fast Transient/Burst Surge Conducted Voltage Dips, Short Interruptions and Voltage Variations	ISO 7637-1; ETSI EN 301 489-1; EN 301 489-7 EN 61000-4-2; ETSI EN 301 489-1; EN 301 489-7 EN 61000-4-3; ETSI EN 301 489-1; EN 301 489-7 EN 61000-4-4; ETSI EN 301 489-1; EN 301 489-7 EN 61000-4-5; ETSI EN 301 489-1; EN 301 489-7 EN 61000-4-6; ETSI EN 301 489-1; EN 301 489-7 EN 61000-4-11; ETSI EN 301 489-1; EN 301 489-7



(A2LA Cert. No. 1819.01) Revised 09/18/02
 5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974



Page 1 of 2



(A2LA Cert. No. 1819.01) Revised 09/18/02

Page 2 of 2

“This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined to be in accordance with the laboratory’s terms of accreditation unless stated otherwise in the report.”

Should this report contain any data for tests for which we are not accredited, such data would not be covered by this laboratory’s A2LA accreditation.