

FCC Test Report

Report No.: RWAZ202300129A

Applicant: Shenzhen Youmi Intelligent Technology Co., Ltd.

Address: 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China

Product Name: Smart phone

Product Model: PG2311GBA

Multiple Models: N/A

Trade Mark: UMIDIGI

FCC ID: 2ATZ4-G6

Standards: FCC CFR Title 47 Part 15C (§15.247)

Test Date: 2023/12/22~2024/01/26

Test Result: Complied

Report Date: 2024/02/27

Reviewed by:

Abel Chen

Approved by:

Jacob Kong

Abel Chen

Project Engineer

Jacob Kong

Manager

Prepared by:

World Alliance Testing and Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

Announcement

1. This test report shall not be reproduced in full or partial, without the written approval of World Alliance Testing and Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

Revision History

Version No.	Issued Date	Description
00	27, Feb, 2024	Original

Contents

1	General Information	4
1.1	Client Information	4
1.2	Product Description of EUT	4
1.3	Antenna information	4
1.4	Related Submittal(s)/Grant(s).....	5
1.5	Measurement Uncertainty	5
1.6	Laboratory Location.....	5
1.7	Test Methodology	5
2	Description of Measurement.....	6
2.1	Test Configuration.....	6
2.2	Test Auxiliary Equipment	6
2.3	Test Setup.....	7
2.4	Test Procedure	9
2.5	Measurement Method.....	10
2.6	Measurement Equipment	11
3	Test Results	12
3.1	Test Summary.....	12
3.2	Limit	13
3.3	AC Line Conducted Emissions Test Data.....	14
3.4	Radiated emission Test Data.....	18
3.5	RF Conducted Test Data	29
3.5.1	20 dB Emission Bandwidth and 99% Occupied Bandwidth.....	29
3.5.2	Maximum Conducted Peak Output Power.....	29
3.5.3	Channel separation	30
3.5.4	Number of hopping Frequency	30
3.5.5	Time of occupancy (dwell time).....	30
3.5.6	100 kHz Bandwidth of Frequency Band Edge	31
4	Test Setup Photo.....	43
5	E.U.T Photo	44

1 General Information

1.1 Client Information

Applicant:	Shenzhen Youmi Intelligent Technology Co., Ltd.
Address:	406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China
Manufacturer:	Shenzhen Youmi Intelligent Technology Co., Ltd.
Address:	406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China

1.2 Product Description of EUT

The EUT is Smart phone that contains classic Bluetooth (BDR/EDR), BLE, 2.4G/5G WLAN, NFC and GSM/GPRS/EGPRS/WCDMA/LTE radios, this report covers the full testing of the classic Bluetooth (BDR/EDR) radio.

Sample Serial Number	2X-5 for CE&RE test, 2X-1 for RF test conducted test (assigned by WATC)
Sample Received Date	2023-12-05
Sample Status	Good Condition
Frequency Range	2402MHz - 2480MHz
Maximum Conducted Peak Output Power	6.36dBm
Modulation Technology	GFSK, $\pi/4$ DQPSK, 8DPSK
Spatial Streams	1TX, 1RX
Antenna Gain [#]	1.1dBi
Power Supply	DC 3.87V from battery or DC 5V from USB Port
Adapter Information	Adapter 1 Model: HF-0502000U Input: AC100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2A Adapter 2 Model: HJ-0502000W2-US Input: AC100-240V, 50/60Hz, 0.3A Output: DC 5V, 2A
Modification	Sample No Modification by the test lab

1.3 Antenna information

<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
Device Antenna information:	
<p>The BT antenna is an internal antenna which cannot replace by end-user, please see product internal photos for details.</p>	

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment Class: DTS, FCC ID: 2ATZ4-G6
 FCC Part 15, Subpart C, Equipment Class: DXX, FCC ID: 2ATZ4-G6
 FCC Part 15, Subpart E, Equipment Class: NII, FCC ID: 2ATZ4-G6
 FCC Part 22, Subpart H/Part 24, Subpart E/Part 27, Equipment Class: PCE, FCC ID: 2ATZ4-G6

1.5 Measurement Uncertainty

Parameter		Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
AC Power Lines Conducted Emissions		±3.14dB
Emissions, Radiated	Below 30MHz	±2.78dB
	Below 1GHz	±4.84dB
	Above 1GHz	±5.44dB
Conducted Power		0.74dB
Frequency Error		150Hz
Bandwidth		0.34%
Power Spectral Density		0.74dB
Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.		

1.6 Laboratory Location

World Alliance Testing and Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: ga@watc.com.cn

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2020

2 Description of Measurement

2.1 Test Configuration

Operating channels:					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	39	2441	76	2478
1	2403	40	2442	77	2479
...	78	2480
38	2440	/	/
According to ANSI C63.10-2020 chapter 5.6.1 Table 11 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	39	2441	78	2480

Test Mode:				
Transmitting mode:		Keep the EUT in continuous transmitting with modulation		
Exercise software [#] :		Engineering model		
Mode	Data rate	Powel Level Setting [#]		
		Low Channel	Middle Channel	High Channel
GFSK	1Mbps	7	7	7
$\pi/4$ DQPSK	2Mbps	7	7	7
8DPSK	3Mbps	7	7	7
The exercise software and the maximum power setting that provided by manufacturer.				


Worst-Case Configuration:
For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report
For AC power line conducted emission and radiated emission 9kHz-1GHz and above 18GHz were performed with the EUT transmits at the channel with highest output power as worst-case scenario.

2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

2.3 Test Setup


1) Conducted emission measurement:

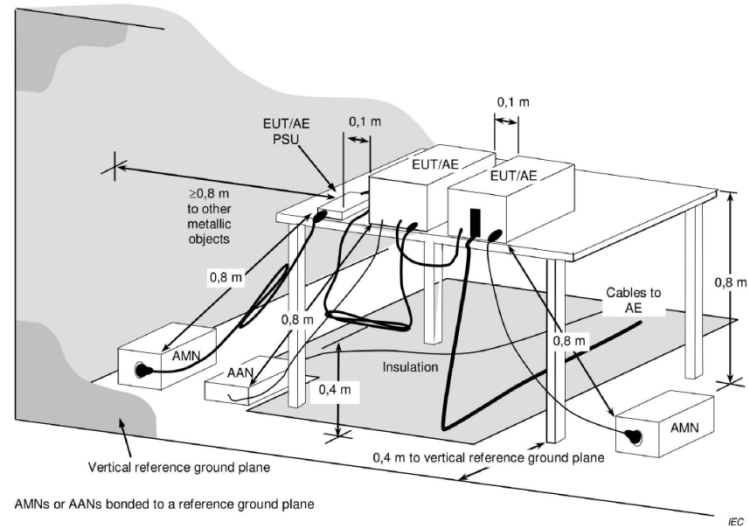


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:


Below 30MHz (3m SAC)

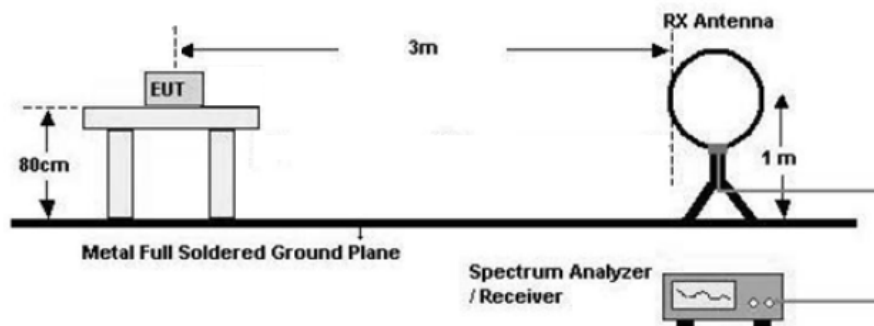


30MHz-1GHz (3m SAC)

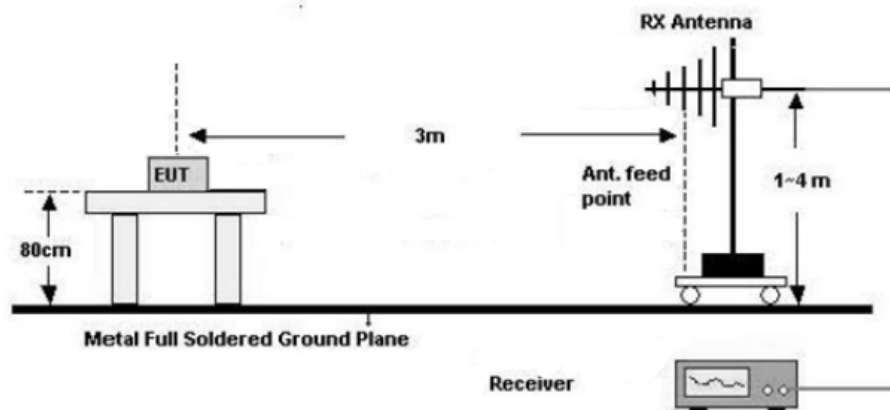


1GHz-18GHz(3m FAC)

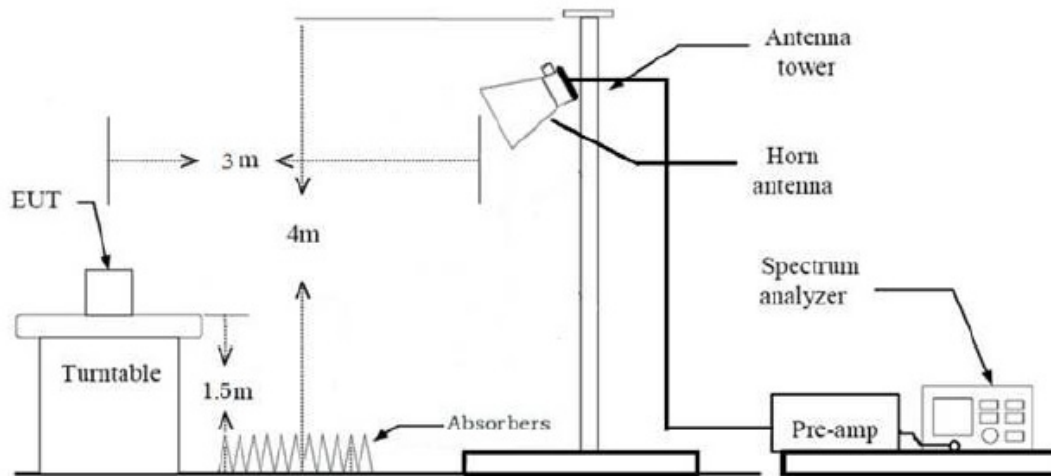

Above 18GHz (3m FAC)

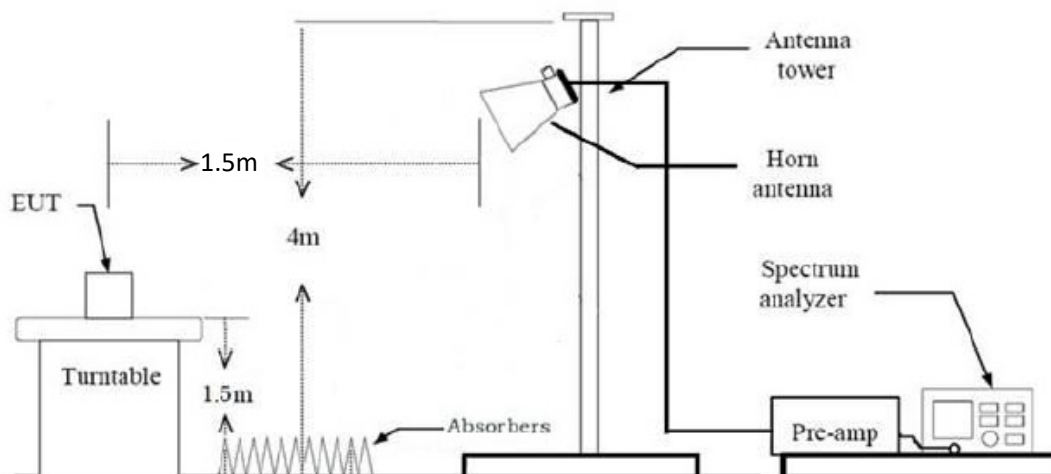

3) RF Conducted Test

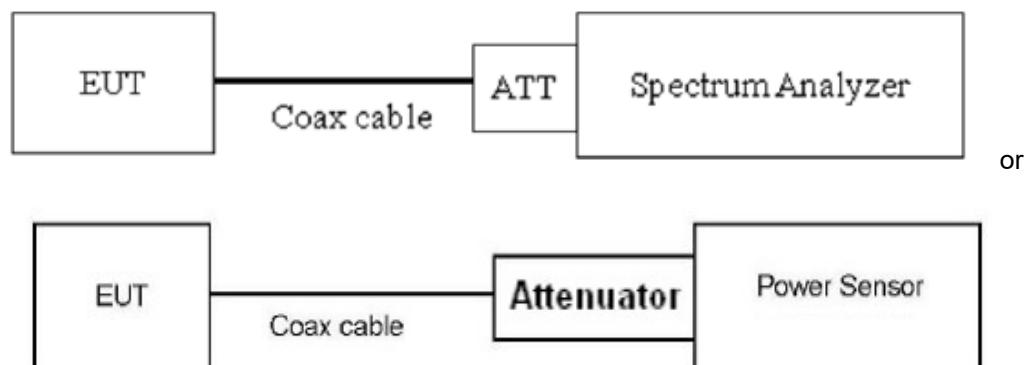

2.4 Test Procedure

Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral

Radiated Emission Procedure:

a) For below 30MHz

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \cdot \log(\text{test distance} / \text{specification distance})$.
2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

b) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

c) For above 1GHz:

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5m (above 18GHz).
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

RF Conducted Test:

1. The antenna port of EUT was connected to the RF port of the test equipment (Power Meter or

Spectrum analyzer) through Attenuator and RF cable.

2. The cable assembly insertion loss of 11dB (including 10 dB Attenuator and 1.0 dB cable) was entered as an offset in the power meter. Note: Actual cable loss was unavailable at the time of testing, therefore a loss of 1.0dB was assumed as worst case. This was later verified to be true by laboratory. (if the RF cable provided by client, the cable loss declared by client)
3. The EUT is keeping in continuous transmission mode and tested in all modulation modes.

2.5 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2020 Section 6.2
Maximum Conducted Output Power	ANSI C63.10-2020 Section 7.8.5
20 dB Emission Bandwidth	ANSI C63.10-2020 Section 6.9.2
99% Occupied Bandwidth	ANSI C63.10-2020 Section 6.9.3
Channel separation	ANSI C63.10-2020 Section 7.8.2
Number of hopping Frequency	ANSI C63.10-2020 Section 7.8.3
Time of occupancy (dwell time)	ANSI C63.10-2020 Section 7.8.4
100kHz Bandwidth of Frequency Band Edge	ANSI C63.10-2020 Section 7.8.7.2&6.10
Radiated emission	ANSI C63.10-2020 Section 7.8&6.3&6.4&6.5&6.6

2.6 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
ROHDE& SCHWARZ	EMI TEST RECEIVER	ESR	101817	2023/7/3	2024/7/2
R&S	LISN	ENV216	101748	2023/8/1	2024/7/30
N/A	Coaxial Cable	NO.12	N/A	2023/7/3	2024/7/2
Farad	Test Software	EZ-EMC	Ver. EMEC-3A1	/	/
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2023/7/3	2024/7/2
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2023/7/3	2024/7/2
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2023/7/12	2024/7/11
COM-POWER	preamplifier	PAM-118A	18040152	2023/8/21	2024/8/20
COM-POWER	Amplifier	PAM-840A	461306	2023/8/8	2024/8/7
ETS	Passive Loop Antenna	6512	29604	2023/7/7	2024/7/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2024/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2024/7/5
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2023/7/10	2024/7/9
Ducommun technologies	Horn Antenna	ARH-2823-02	1007726-03	2023/7/10	2024/7/9
Oulitong	Band Reject Filter	OBSF-2400-248 3.5-50N	OE02103119	2023/9/15	2024/9/14
N/A	Coaxial Cable	N/A	NO.9	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.10	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.11	2023/8/8	2024/8/7
Audix	Test Software	E3	191218 V9	/	/
RF Conducted Test					
R&S	Spectrum Analyzer	FSV40	101590	2023/11/16	2024/11/15
MARCONI	10dB Attenuator	1692595	2942	2023/10/25	2024/10/24
ANRITSU	USB Power Sensor	MA24418A	12620	2023/7/12	2024/7/11

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

3 Test Results

3.1 Test Summary

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247 (a)(1)	20dB Emission Bandwidth	Compliance
-	99% Occupied Bandwidth	Compliance
§15.247 (a)(1)	Channel separation	Compliance
§15.247 (a)(1)(iii)	Number of hopping Frequency	Compliance
§15.247 (a)(1)(iii)	Time of occupancy (dwell time)	Compliance
§15.247(b)(1)	Maximum Conducted Output Power	Compliance
§15.247(d)	100kHz Bandwidth of Frequency Band Edge	Compliance
§15.205, §15.209, §15.247(d)	Radiated emission	Compliance


3.2 Limit


Test items	Limit
AC Line Conducted Emissions	See details §15.207 (a)
Conducted Output Power	For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.
Channel separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Number of hopping Frequency	Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.
Time of occupancy (dwell time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Spurious Emissions, 100kHz Bandwidth of Frequency Band Edge	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.3 AC Line Conducted Emissions Test Data

Test Date:	2024-01-26	Test By:	Lirou Li
Environment condition:	Temperature: 21.8°C; Relative Humidity:31%; ATM Pressure: 101.4kPa		

Adapter 1

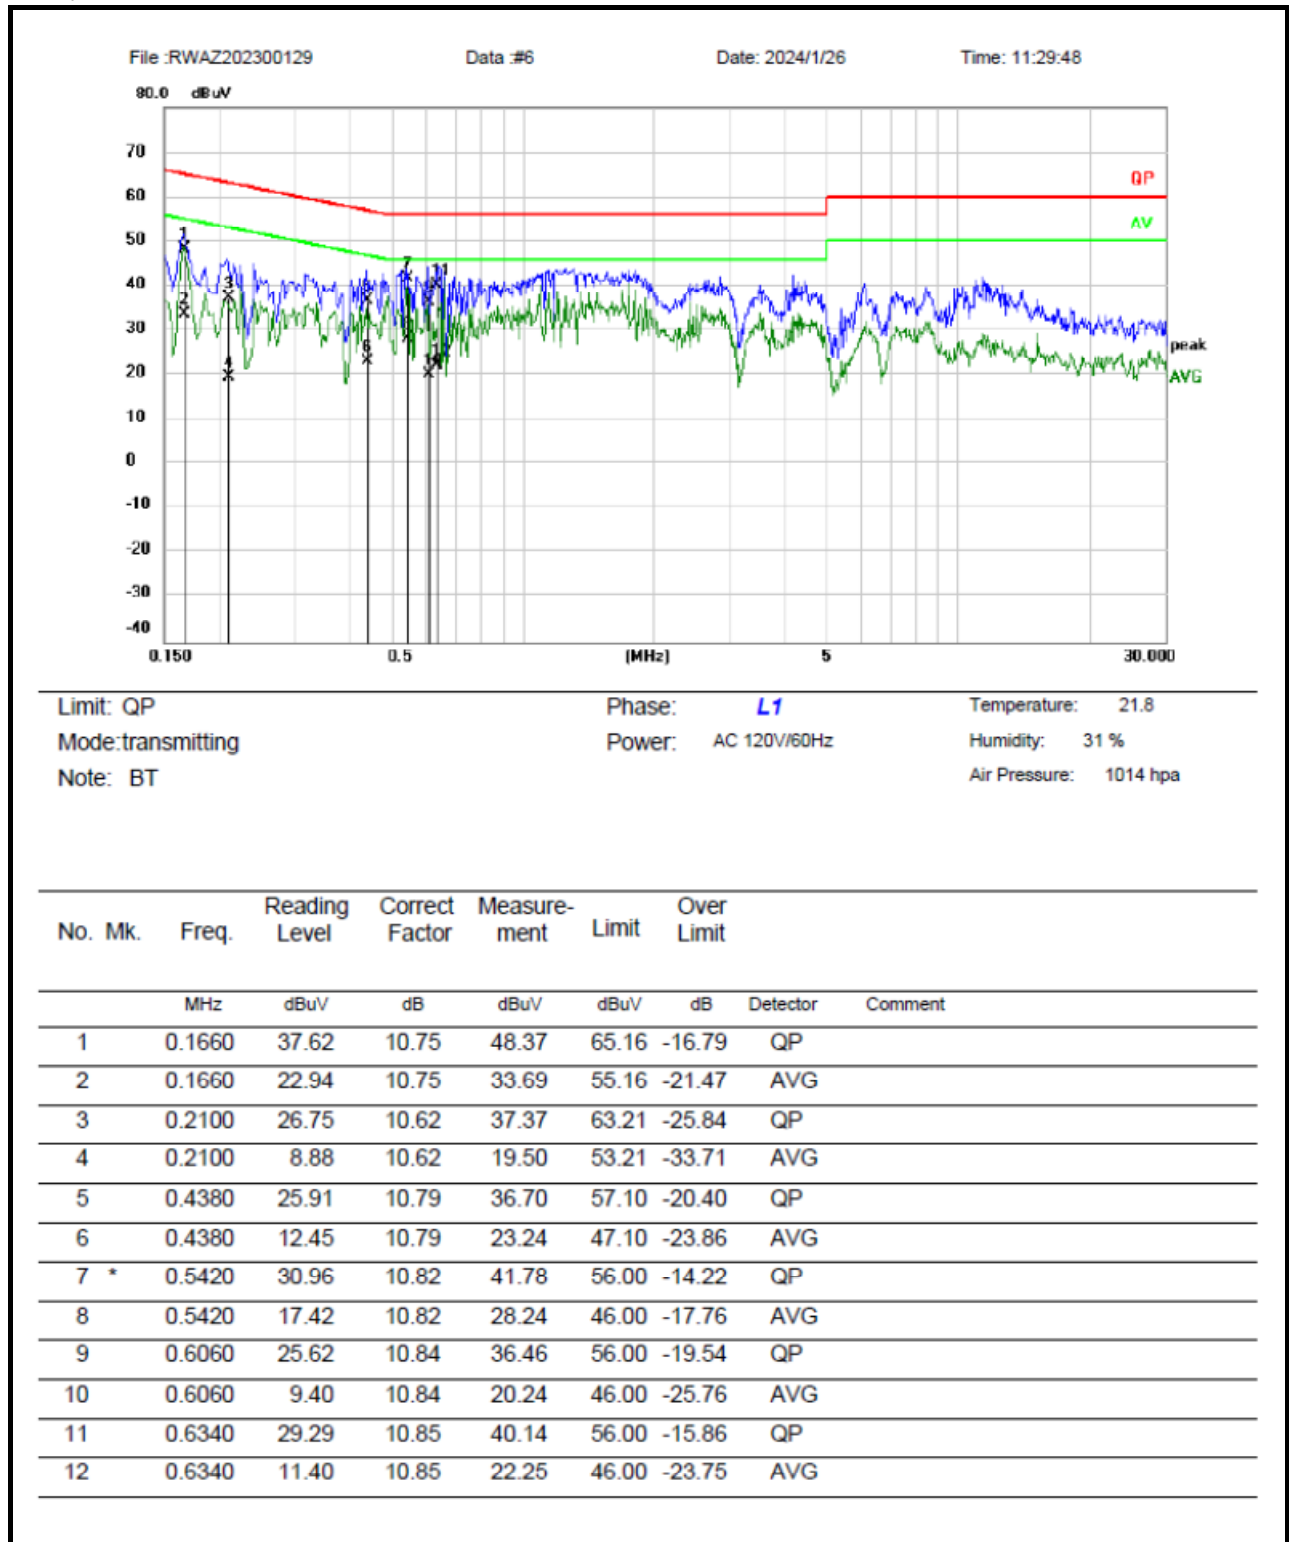

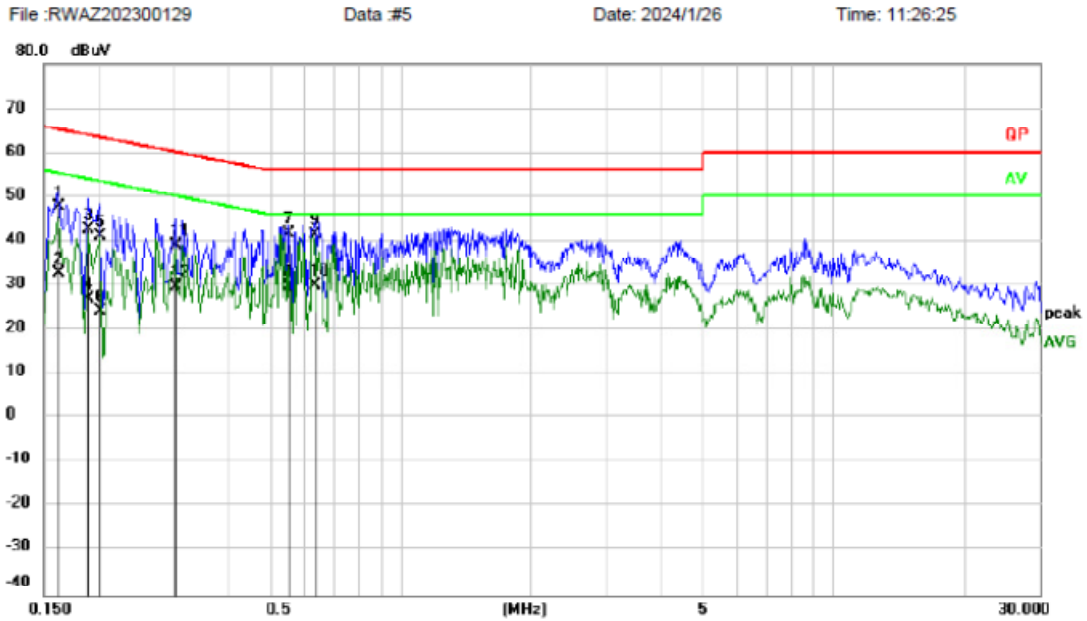


Limit: QP
Mode:transmitting
Note: BT


Phase: **N**
Power: AC 120V/60Hz

Temperature: 21.8
Humidity: 31 %
Air Pressure: 1014 hpa

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over Limit	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector Comment
1		0.1620	37.05	10.56	47.61	65.36	-17.75	QP
2		0.1620	22.33	10.56	32.89	55.36	-22.47	AVG
3		0.1900	32.26	10.45	42.71	64.04	-21.33	QP
4		0.1900	16.75	10.45	27.20	54.04	-26.84	AVG
5		0.2020	30.83	10.41	41.24	63.53	-22.29	QP
6		0.2020	13.91	10.41	24.32	53.53	-29.21	AVG
7	*	0.5500	30.93	10.68	41.61	56.00	-14.39	QP
8		0.5500	19.19	10.68	29.87	46.00	-16.13	AVG
9		0.6340	30.80	10.62	41.42	56.00	-14.58	QP
10		0.6340	19.57	10.62	30.19	46.00	-15.81	AVG
11		0.3020	28.40	10.54	38.94	60.19	-21.25	QP
12		0.3020	19.23	10.54	29.77	50.19	-20.42	AVG

Adapter 2

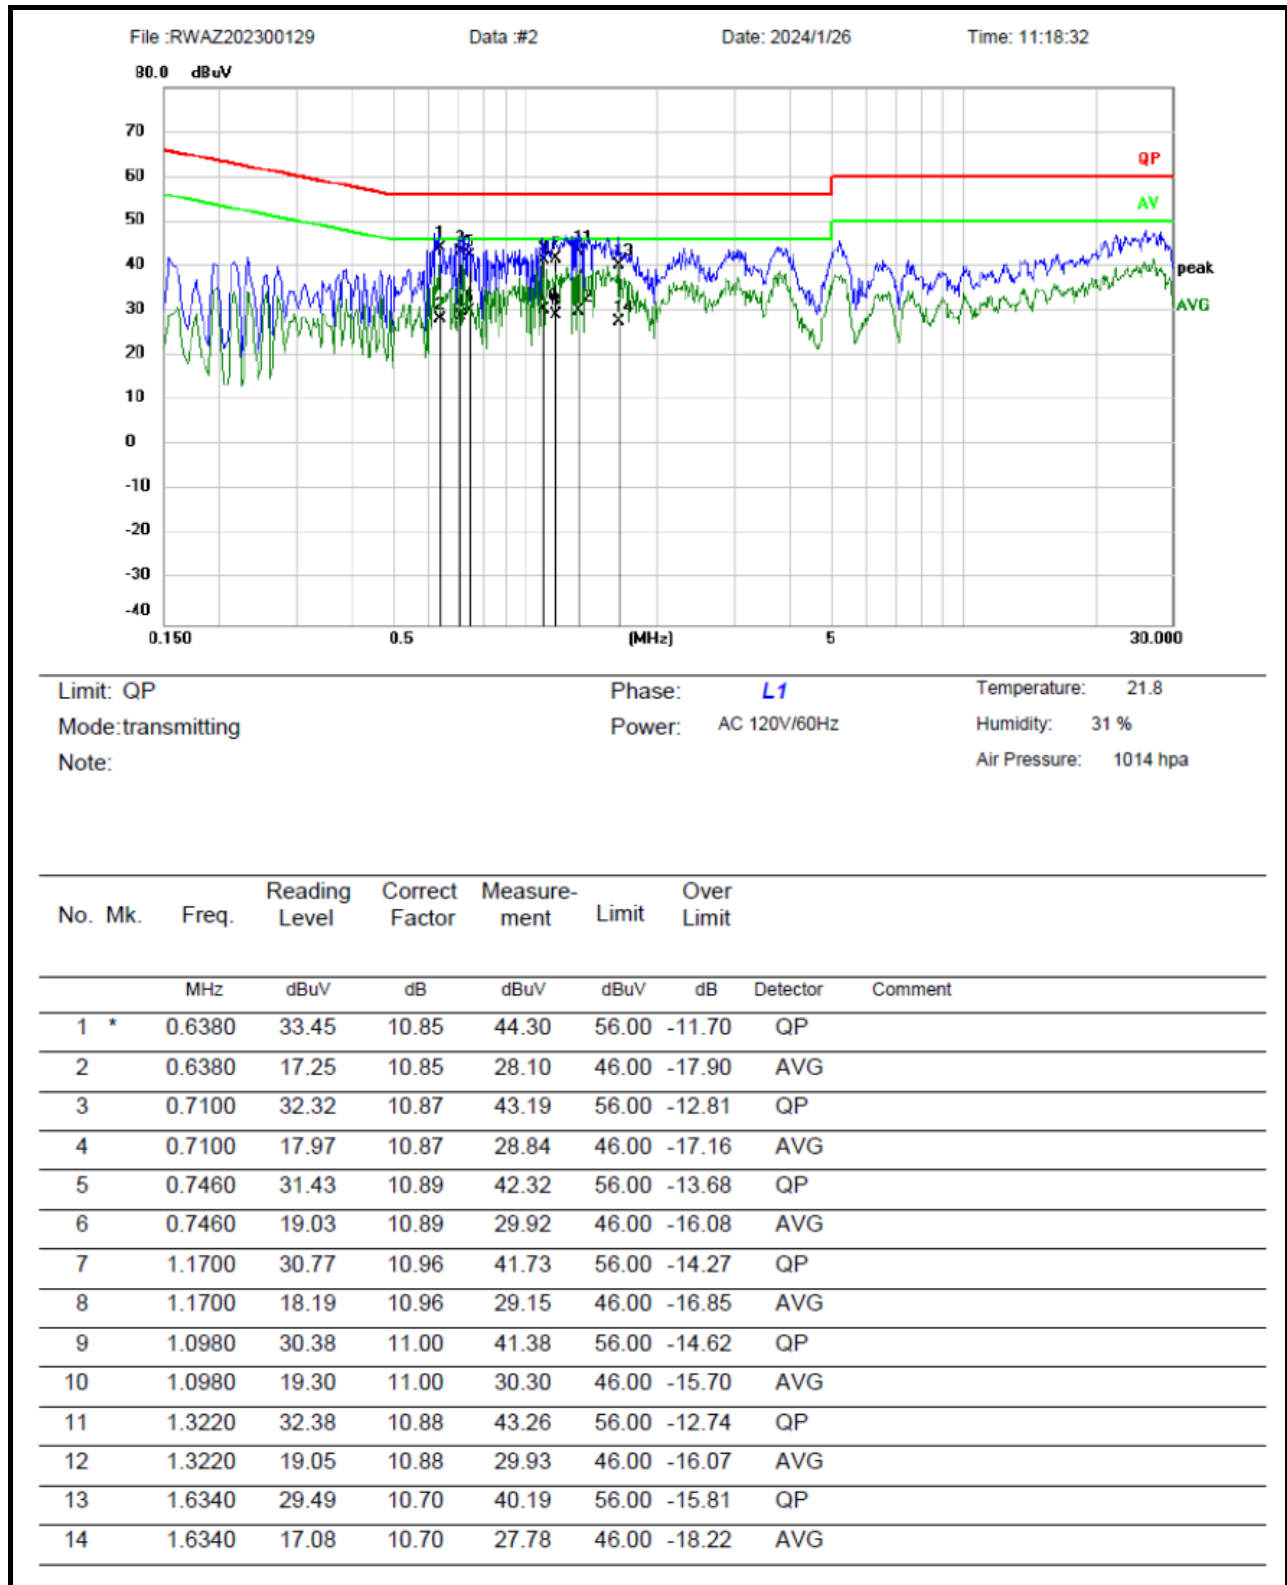

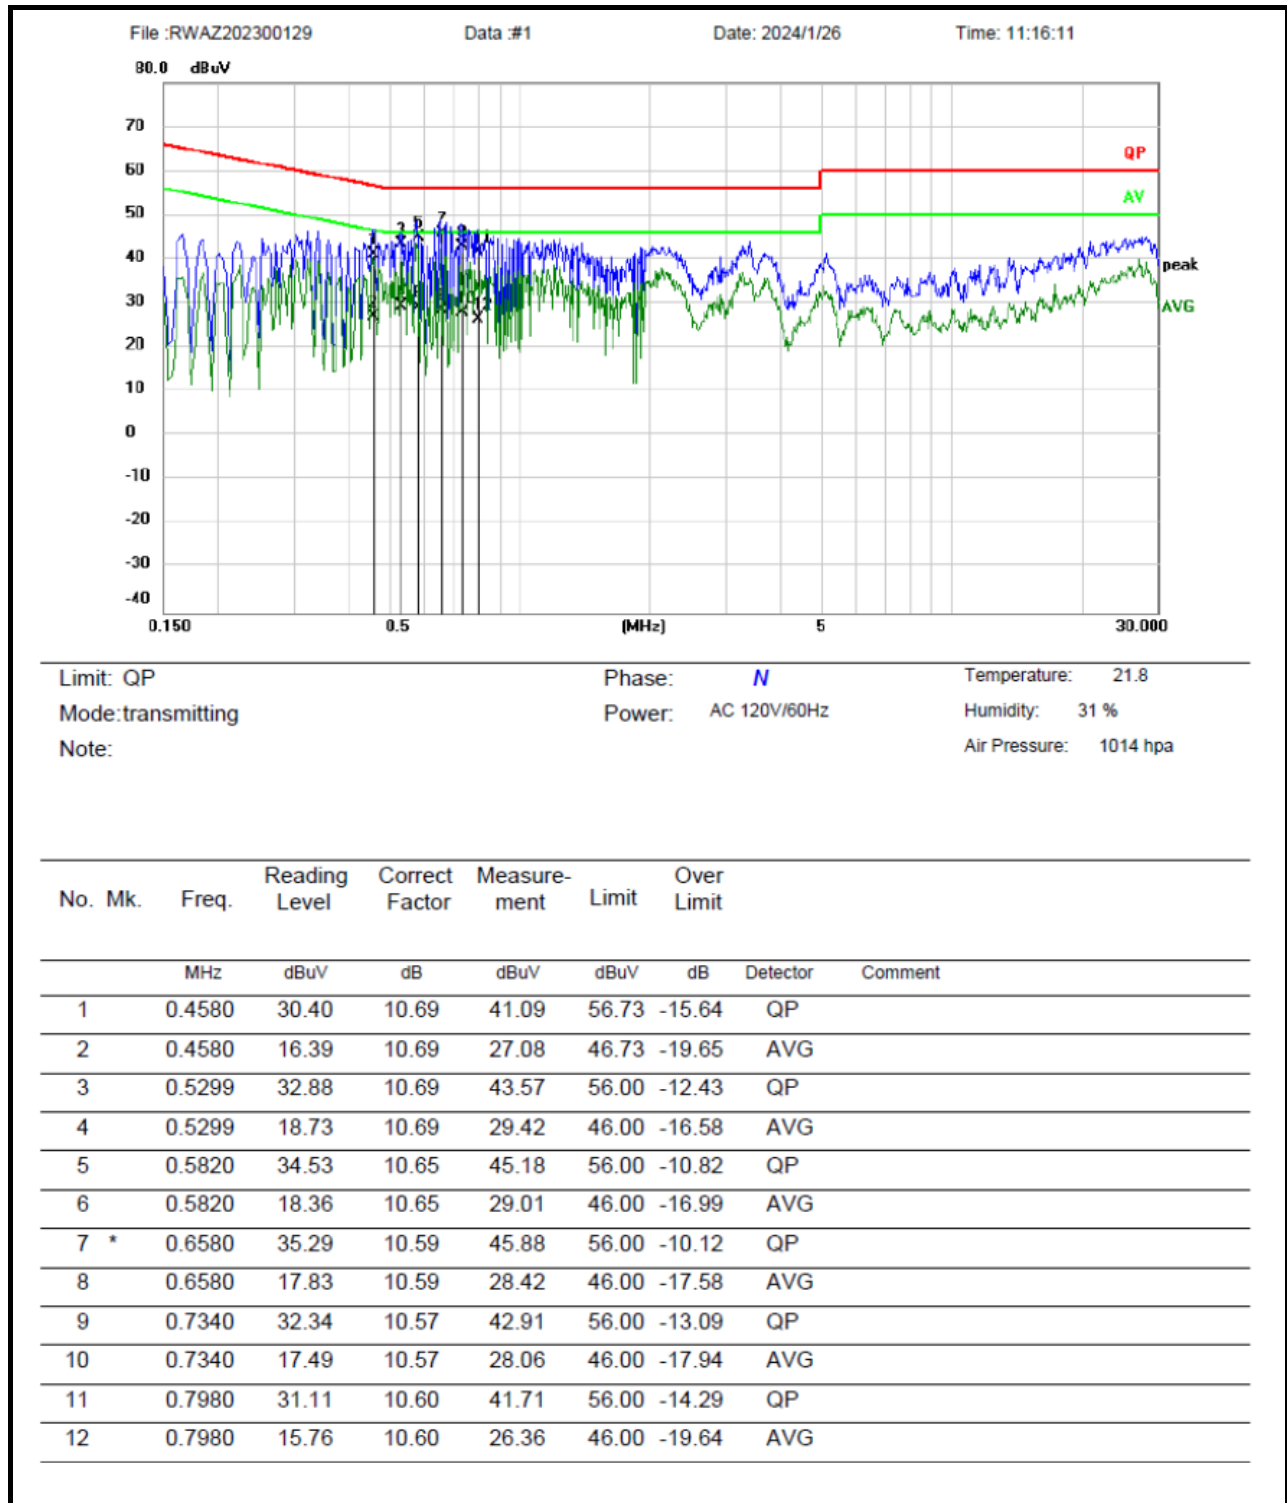

Remark:

Measurement (dBuV)= Reading Level (dBuV) + Correct Factor(dB)

Correct Factor(dB)= LISN Voltage Division Factor (dB)+ Cable loss(dB)

Over = Measurement – Limit

3.4 Radiated emission Test Data

9 kHz-30MHz:


Test Date:	2024-01-25	Test By:	Bard Huang
Environment condition:	Temperature: 22.1℃; Relative Humidity:27%; ATM Pressure: 102.3kPa		

For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

30MHz-1GHz:

Test Date:	2024-01-25	Test By:	Bard Huang
Environment condition:	Temperature: 22.1℃; Relative Humidity:27%; ATM Pressure: 102.3kPa		


Adapter 1

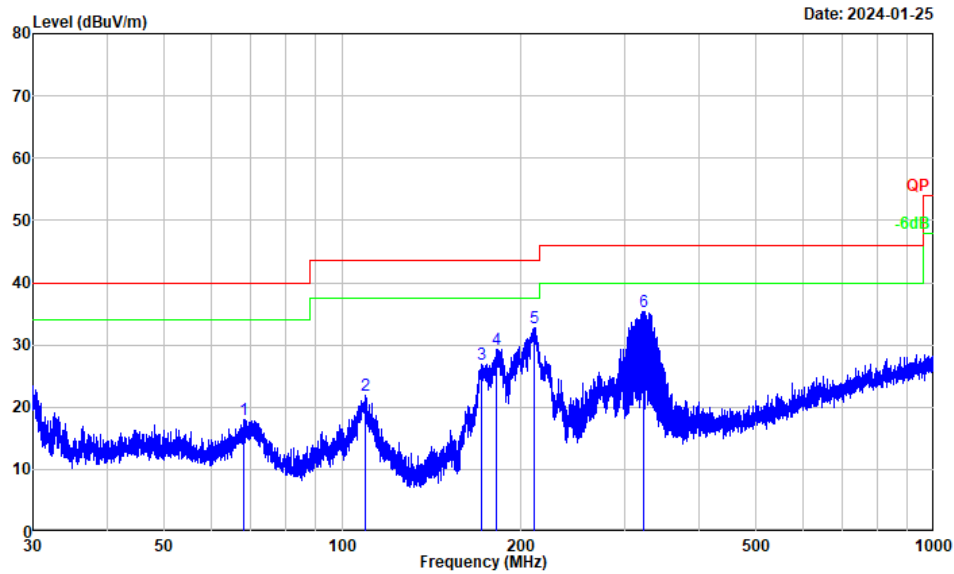

Project No. : RWAZ202300129
Test Mode : Transmitting
Test Voltage : AC 120V/60Hz
Environment : 22.1℃/27%R.H./102.3kPa
Tested by : Bard Huang
Polarization : horizontal
Remark : BT

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	68.271	33.65	-15.56	18.09	40.00	-21.91	Peak
2	109.604	36.08	-14.19	21.89	43.50	-21.61	Peak
3	171.844	43.23	-16.27	26.96	43.50	-16.54	Peak
4	182.160	44.82	-15.47	29.35	43.50	-14.15	Peak
5	211.063	46.69	-13.90	32.79	43.50	-10.71	Peak
6	323.462	46.03	-10.69	35.34	46.00	-10.66	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

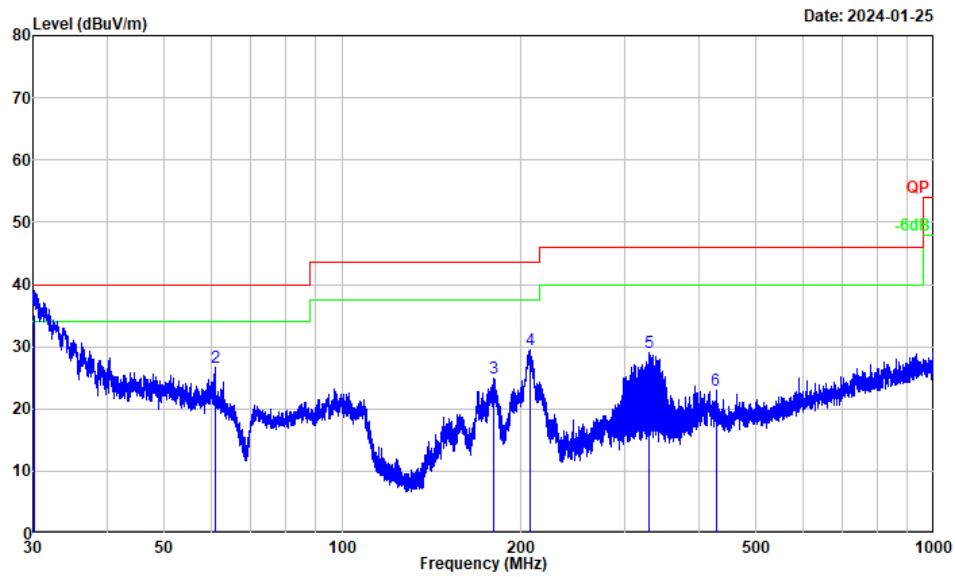


Project No. : RWAZ202300129
Test Mode : Transmitting
Test Voltage : AC 120V/60Hz
Environment : 22.1°C / 27%R.H. / 102.3kPa
Tested by : Bard Huang
Polarization : vertical
Remark : BT

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector

1	30.119	50.10	-15.04	35.06	40.00	-4.94	QP
2	61.105	40.57	-13.85	26.72	40.00	-13.28	Peak
3	180.174	40.66	-15.69	24.97	43.50	-18.53	Peak
4	208.124	43.34	-13.88	29.46	43.50	-14.04	Peak
5	329.472	39.45	-10.46	28.99	46.00	-17.01	Peak
6	427.832	31.34	-8.29	23.05	46.00	-22.95	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain


Adapter 2

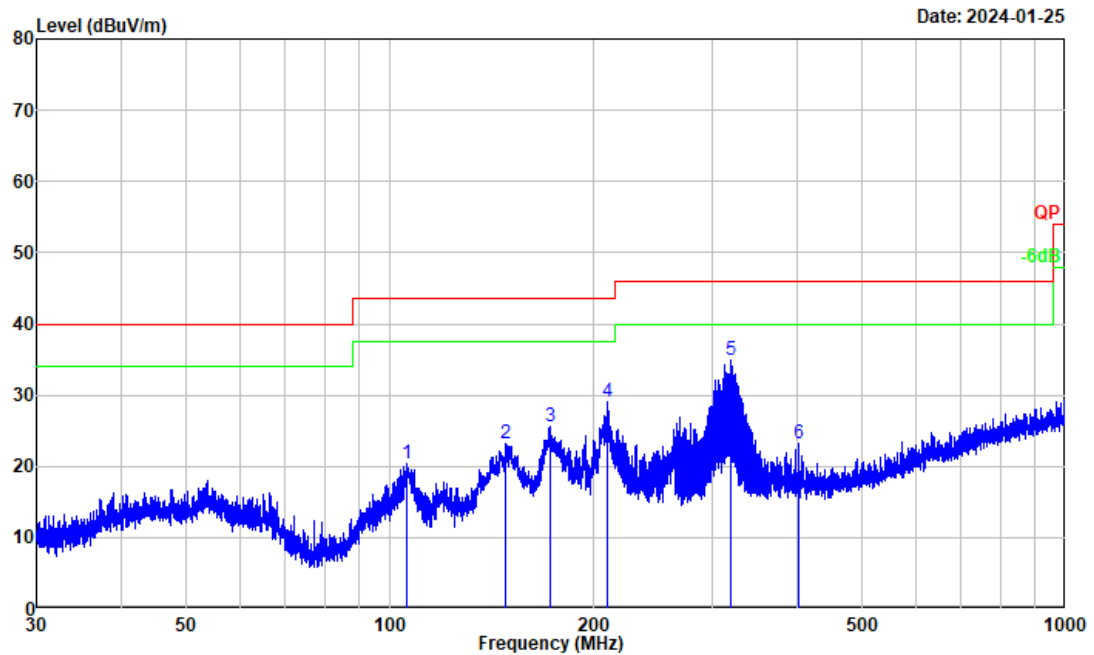

Project No. : RWAZ202300129
 Test Mode : Transmitting
 Test Voltage : AC 120V/60Hz
 Environment : 22.1°C/27%R.H./102.3kPa
 Tested by : Bard Huang
 Polarization : horizontal
 Remark : BT

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	105.873	34.30	-13.95	20.35	43.50	-23.15	Peak
2	148.116	40.66	-17.57	23.09	43.50	-20.41	Peak
3	173.053	41.90	-16.22	25.68	43.50	-17.82	Peak
4	209.497	42.94	-13.91	29.03	43.50	-14.47	Peak
5	320.358	45.65	-10.82	34.83	46.00	-11.17	Peak
6	402.367	31.64	-8.52	23.12	46.00	-22.88	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

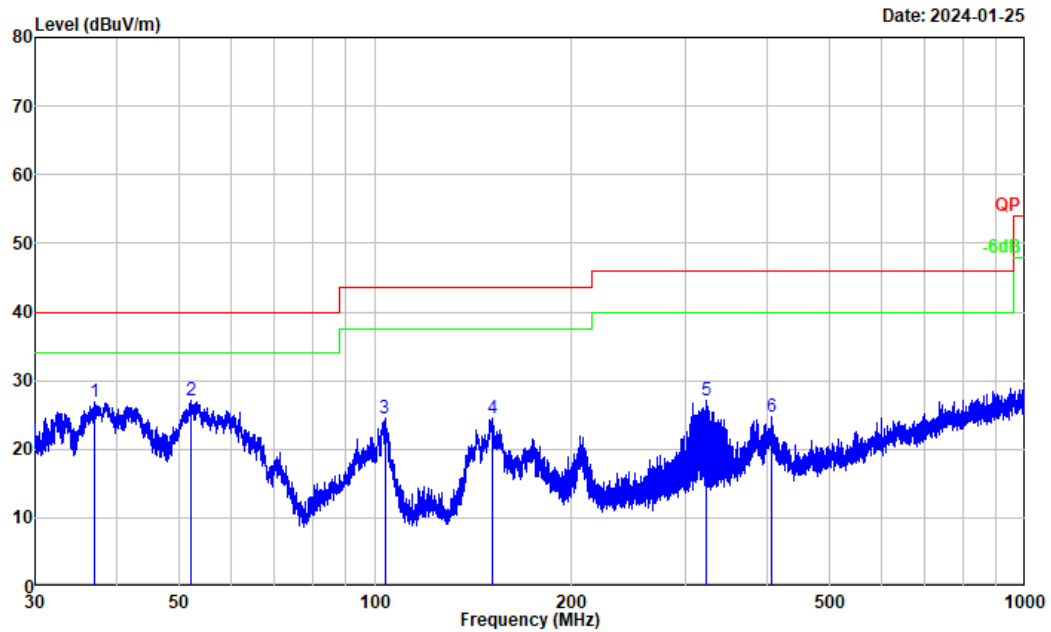

Project No. : RWAZ202300129
Test Mode : Transmitting
Test Voltage : AC 120V/60Hz
Environment : 22.1°C/27%R.H./102.3kPa
Tested by : Bard Huang
Polarization : vertical
Remark : BT

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	37.009	40.84	-14.05	26.79	40.00	-13.21	Peak
2	52.048	39.35	-12.28	27.07	40.00	-12.93	Peak
3	103.488	38.52	-14.02	24.50	43.50	-19.00	Peak
4	151.199	41.91	-17.36	24.55	43.50	-18.95	Peak
5	323.462	37.70	-10.69	27.01	46.00	-18.99	Peak
6	406.801	33.11	-8.48	24.63	46.00	-21.37	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

Remark:

Result = Reading + Factor

Factor = Antenna factor + Cable loss – Amplifier gain

Over Limit = Result– Limit

Above 1GHz:

Test Date:	2024-01-24	Test By:	Luke Li
Environment condition:	Temperature: 22.4℃; Relative Humidity:28%; ATM Pressure: 102.0kPa		

Frequency (MHz)	Reading level (dBμV)	Polar	Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
GFSK							
Low Channel							
2390	55.57	Horizontal	8.25	63.82	74	-10.18	Peak
2390	42.06	Horizontal	8.25	50.31	54	-3.69	Average
2390	55.37	Vertical	8.25	63.62	74	-10.38	Peak
2390	42.31	Vertical	8.25	50.56	54	-3.44	Average
4804	50.64	Horizontal	0.21	50.85	74	-23.15	Peak
4804	44.32	Horizontal	0.21	44.53	54	-9.47	Average
4804	55.62	Vertical	0.21	55.83	74	-18.17	Peak
4804	50.28	Vertical	0.21	50.49	54	-3.51	Average
7206	51.46	Horizontal	3.4	54.86	74	-19.14	Peak
7206	37.72	Horizontal	3.4	41.12	54	-12.88	Average
7206	50.85	Vertical	3.4	54.25	74	-19.75	Peak
7206	37.37	Vertical	3.4	40.77	54	-13.23	Average
Middle Channel							
4882	51.64	Horizontal	0.45	52.09	74	-21.91	Peak
4882	45.38	Horizontal	0.45	45.83	54	-8.17	Average
4882	55.62	Vertical	0.45	56.07	74	-17.93	Peak
4882	49.73	Vertical	0.45	50.18	54	-3.82	Average
7323	52.07	Horizontal	3.05	55.12	74	-18.88	Peak
7323	38.17	Horizontal	3.05	41.22	54	-12.78	Average
7323	52.88	Vertical	3.05	55.93	74	-18.07	Peak
7323	38.77	Vertical	3.05	41.82	54	-12.18	Average
High Channel							
2483.5	55.53	Horizontal	8.25	63.78	74	-10.22	Peak
2483.5	42.72	Horizontal	8.25	50.97	54	-3.03	Average
2483.5	55.78	Vertical	8.25	64.03	74	-9.97	Peak
2483.5	43.07	Vertical	8.25	51.32	54	-2.68	Average
4960	50.98	Horizontal	0.93	51.91	74	-22.09	Peak
4960	43.33	Horizontal	0.93	44.26	54	-9.74	Average
4960	53.73	Vertical	0.93	54.66	74	-19.34	Peak

4960	47.39	Vertical	0.93	48.32	54	-5.68	Average
7440	52.53	Horizontal	3.11	55.64	74	-18.36	Peak
7440	40.83	Horizontal	3.11	43.94	54	-10.06	Average
7440	51.56	Vertical	3.11	54.67	74	-19.33	Peak
7440	40.97	Vertical	3.11	44.08	54	-9.92	Average
$\pi/4$ DQPSK							
Low Channel							
2390	54.76	Horizontal	8.25	63.01	74	-10.99	Peak
2390	42.25	Horizontal	8.25	50.5	54	-3.5	Average
2390	50.77	Vertical	8.25	59.02	74	-14.98	Peak
2390	42.39	Vertical	8.25	50.64	54	-3.36	Average
4804	49.73	Horizontal	0.21	49.94	74	-24.06	Peak
4804	42.69	Horizontal	0.21	42.9	54	-11.1	Average
4804	53.98	Vertical	0.21	54.19	74	-19.81	Peak
4804	46.35	Vertical	0.21	46.56	54	-7.44	Average
7206	50.04	Horizontal	3.4	53.44	74	-20.56	Peak
7206	37.63	Horizontal	3.4	41.03	54	-12.97	Average
7206	50.02	Vertical	3.4	53.42	74	-20.58	Peak
7206	36.77	Vertical	3.4	40.17	54	-13.83	Average
Middle Channel							
4882	50.64	Horizontal	0.45	51.09	74	-22.91	Peak
4882	43.85	Horizontal	0.45	44.3	54	-9.7	Average
4882	55.63	Vertical	0.45	56.08	74	-17.92	Peak
4882	49.68	Vertical	0.45	50.13	54	-3.87	Average
7323	52.55	Horizontal	3.05	55.6	74	-18.4	Peak
7323	38.72	Horizontal	3.05	41.77	54	-12.23	Average
7323	52.69	Vertical	3.05	55.74	74	-18.26	Peak
7323	38.12	Vertical	3.02	41.14	54	-12.86	Average
High Channel							
2483.5	55.42	Horizontal	8.25	63.67	74	-10.33	Peak
2483.5	42.39	Horizontal	8.25	50.64	54	-3.36	Average
2483.5	56.3	Vertical	8.25	64.55	74	-9.45	Peak
2483.5	42.7	Vertical	8.25	50.95	54	-3.05	Average
4960	50.05	Horizontal	0.93	50.98	74	-23.02	Peak
4960	39.28	Horizontal	0.93	40.21	54	-13.79	Average
4960	52.01	Vertical	0.93	52.94	74	-21.06	Peak
4960	43.97	Vertical	0.93	44.9	54	-9.1	Average
7440	50.74	Horizontal	3.11	53.85	74	-20.15	Peak

7440	38.14	Horizontal	3.11	41.25	54	-12.75	Average
7440	52.37	Vertical	3.11	55.48	74	-18.52	Peak
7440	38.57	Vertical	3.11	41.68	54	-12.32	Average
8DPSK							
Low Channel							
2390	54.96	Horizontal	8.25	63.21	74	-10.79	Peak
2390	41.92	Horizontal	8.25	50.17	54	-3.83	Average
2390	55.11	Vertical	8.25	63.36	74	-10.64	Peak
2390	42.28	Vertical	8.25	50.53	54	-3.47	Average
4804	50.26	Horizontal	0.21	50.47	74	-23.53	Peak
4804	43.21	Horizontal	0.21	43.42	54	-10.58	Average
4804	54.68	Vertical	0.21	54.89	74	-19.11	Peak
4804	48.18	Vertical	0.21	48.39	54	-5.61	Average
7206	50.68	Horizontal	3.4	54.08	74	-19.92	Peak
7206	40.86	Horizontal	3.4	44.26	54	-9.74	Average
7206	51.25	Vertical	3.4	54.65	74	-19.35	Peak
7206	40.28	Vertical	3.4	43.68	54	-10.32	Average
Middle Channel							
4882	50.21	Horizontal	0.45	50.66	74	-23.34	Peak
4882	39.65	Horizontal	0.45	40.1	54	-13.9	Average
4882	54.81	Vertical	0.45	55.26	74	-18.74	Peak
4882	49.00	Vertical	0.45	49.45	54	-4.55	Average
7323	52.18	Horizontal	3.05	55.23	74	-18.77	Peak
7323	40.88	Horizontal	3.05	43.93	54	-10.07	Average
7323	51.85	Vertical	3.05	54.9	74	-19.1	Peak
7323	41.58	Vertical	3.02	44.6	54	-9.4	Average
High Channel							
2483.5	56.18	Horizontal	8.25	64.43	74	-9.57	Peak
2483.5	42.32	Horizontal	8.25	50.57	54	-3.43	Average
2483.5	56.11	Vertical	8.25	64.36	74	-9.64	Peak
2483.5	42.68	Vertical	8.25	50.93	54	-3.07	Average
4960	49.98	Horizontal	0.93	50.91	74	-23.09	Peak
4960	40.19	Horizontal	0.93	41.12	54	-12.88	Average
4960	49.92	Vertical	0.93	50.85	74	-23.15	Peak
4960	40.75	Vertical	0.93	41.68	54	-12.32	Average
7440	52.7	Horizontal	3.11	55.81	74	-18.19	Peak
7440	40.96	Horizontal	3.11	44.07	54	-9.93	Average
7440	52.64	Vertical	3.11	55.75	74	-18.25	Peak

7440	41.88	Vertical	3.11	44.99	54	-9.01	Average
------	-------	----------	------	-------	----	-------	---------

Remark:

Corrected Amplitude= Reading level + corrected Factor


Corrected Factor = Antenna factor + Cable loss – Amplifier gain


Margin = Corrected Amplitude – Limit

The emission levels of other frequencies that were lower than the limit 20dB, not show in test report.

For emissions in 18GHz-25GHz range, all emissions were investigated and in the noise floor level.

Test plot for example as below:

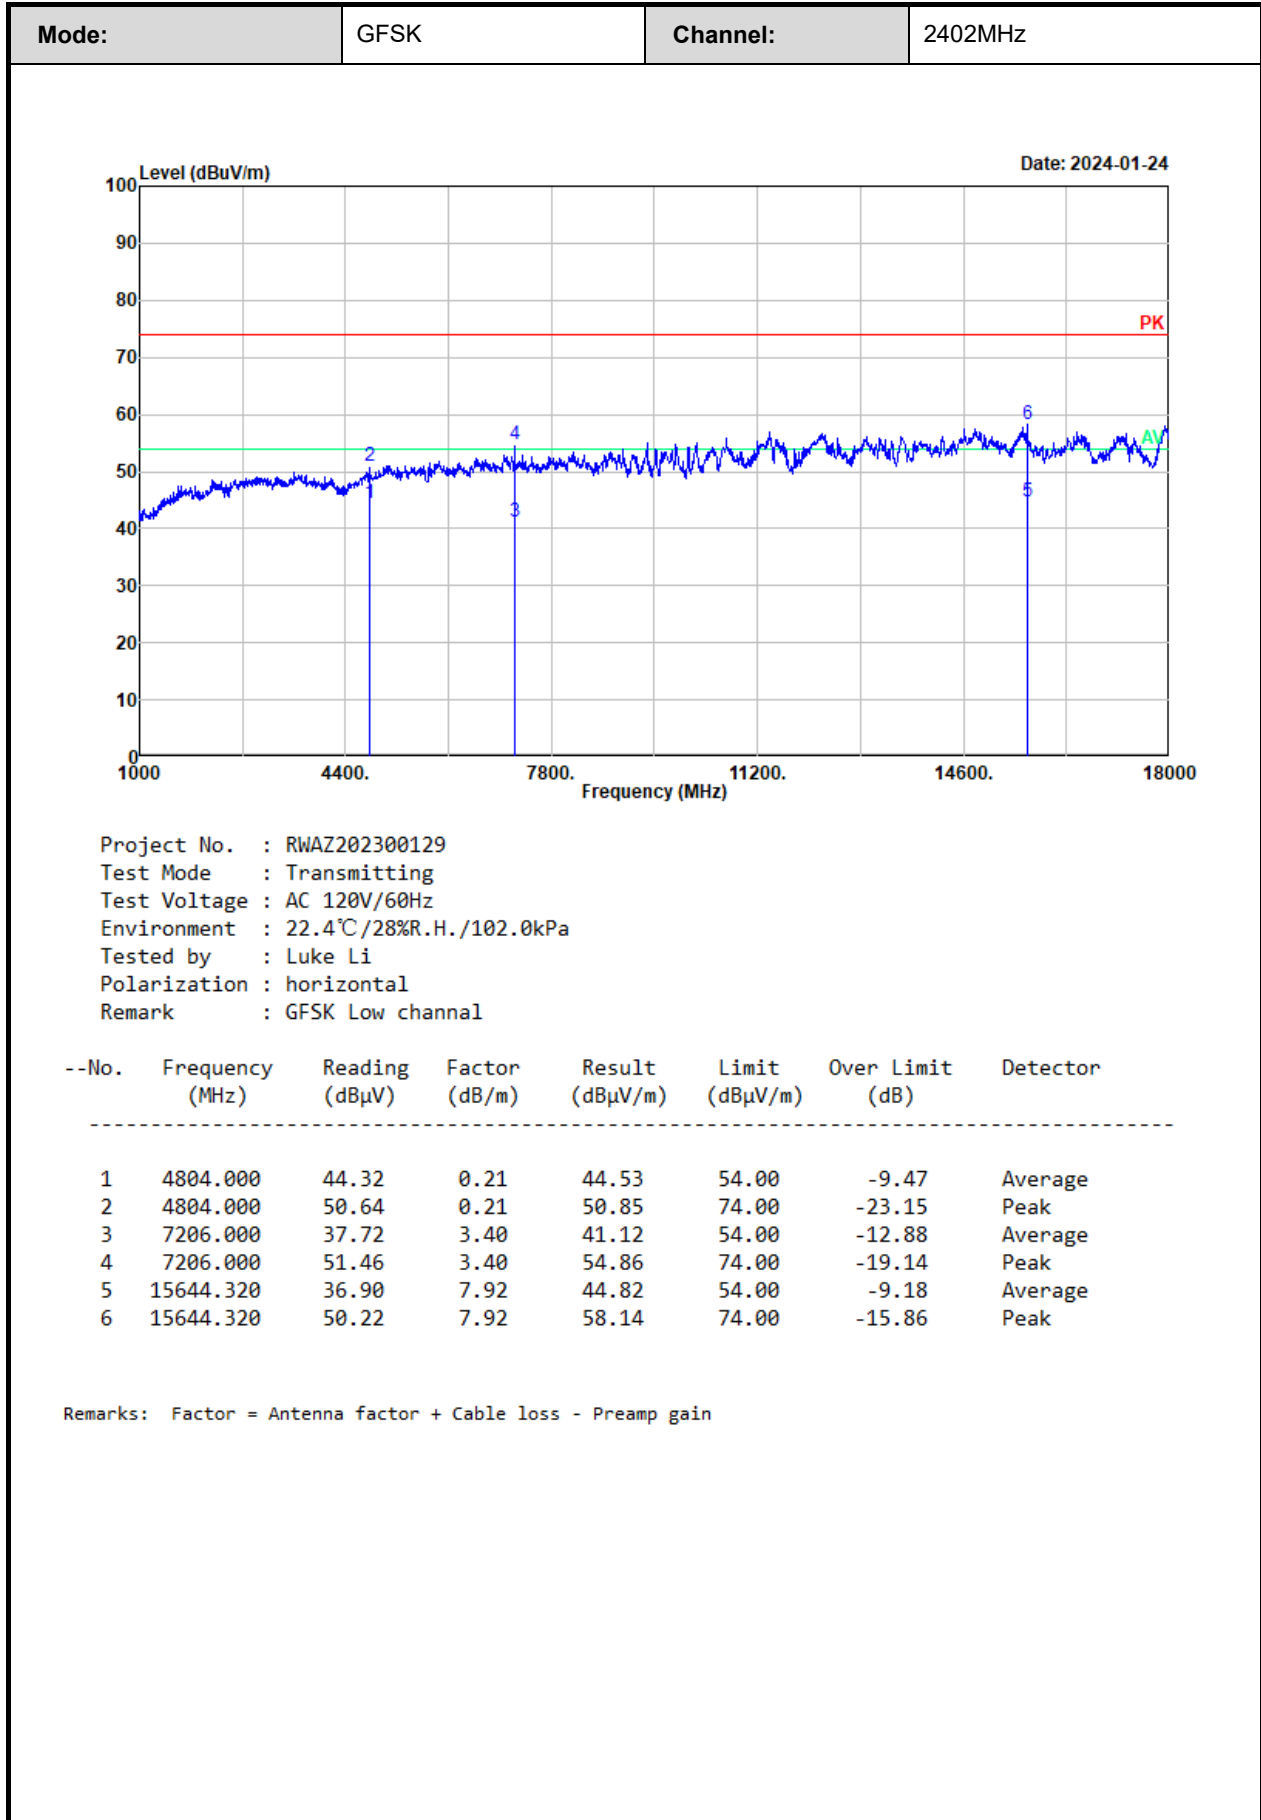

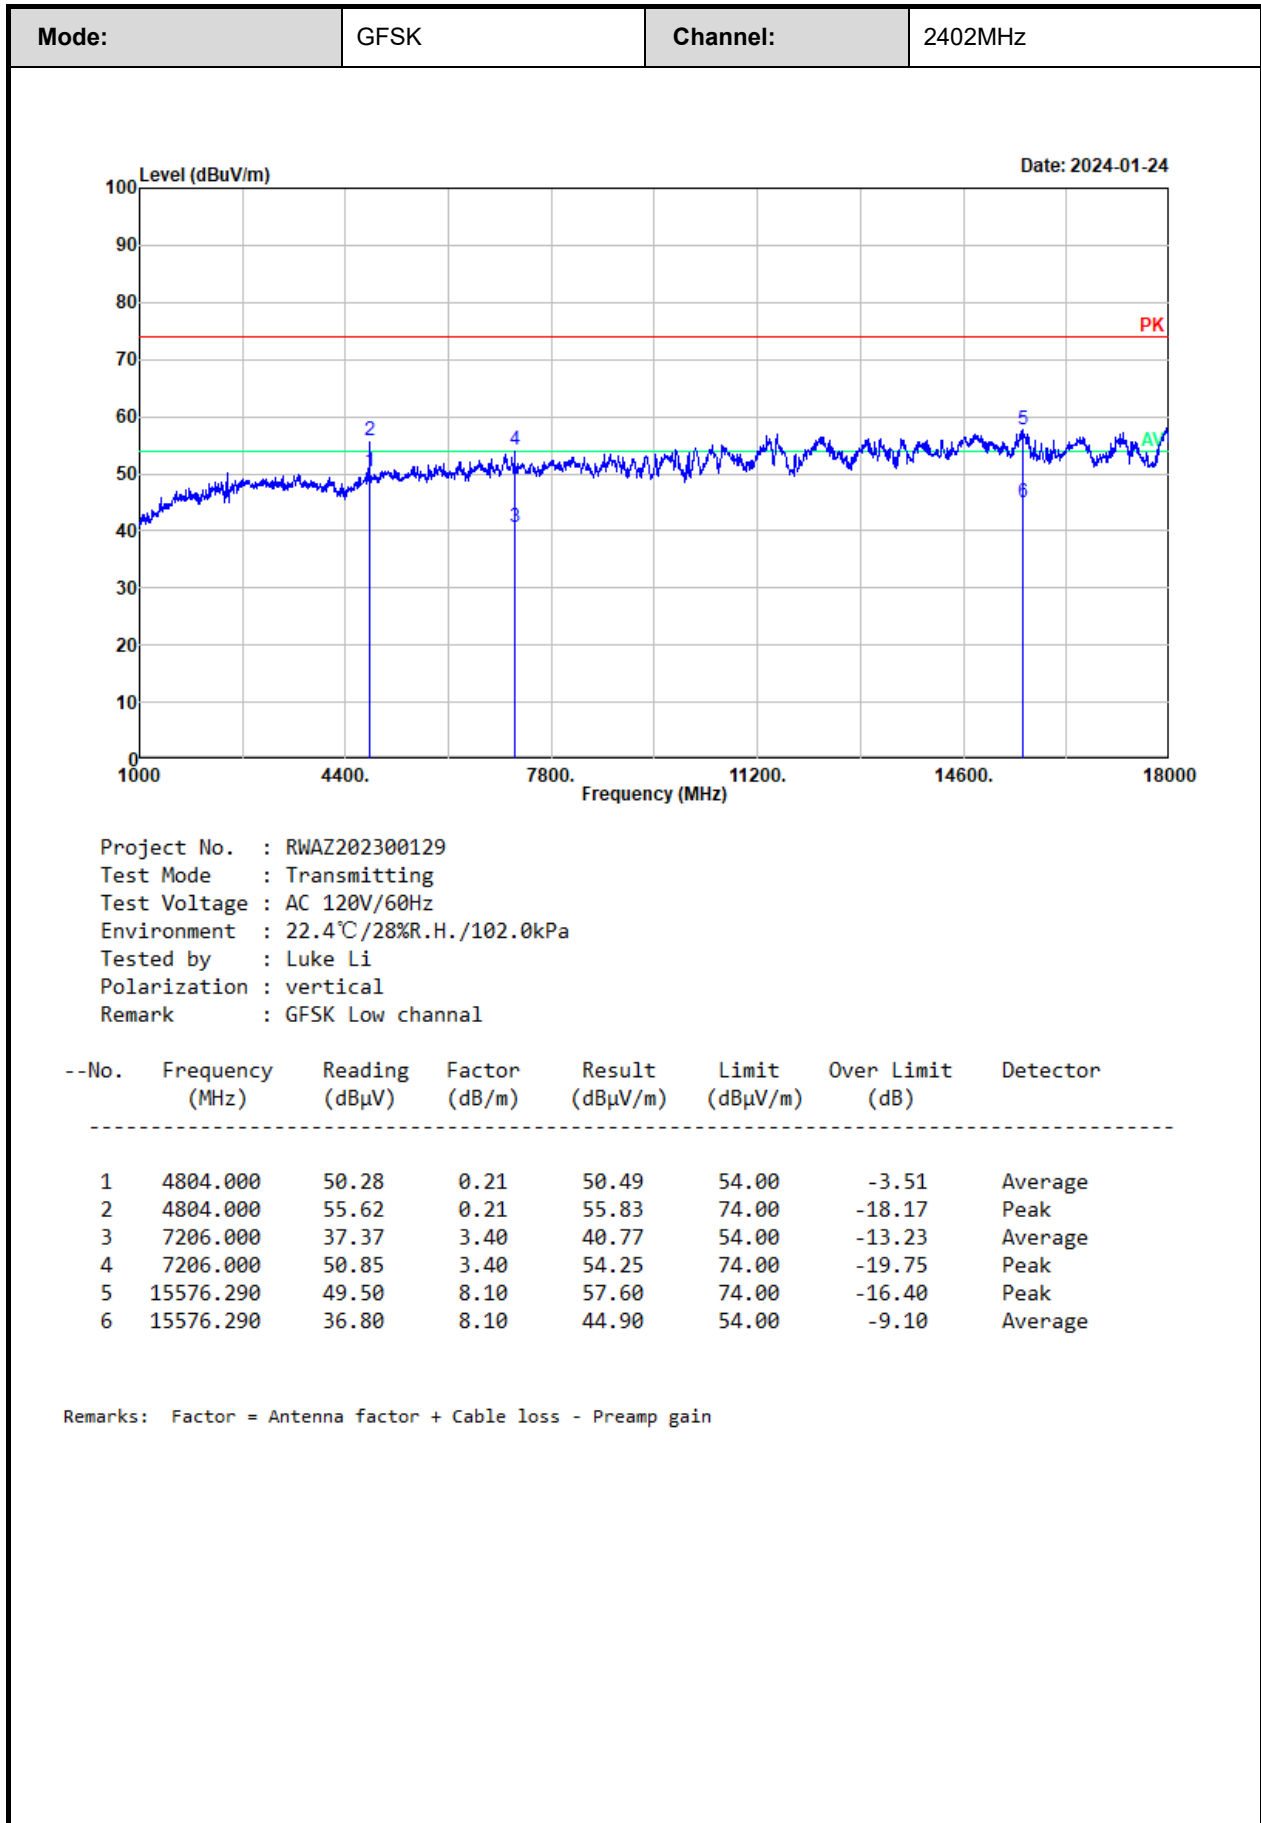

3.5 RF Conducted Test Data

Test Date:	2023-12-22	Test By:	Ryan Zhang
Environment condition:	Temperature: 24°C; Relative Humidity:34%; ATM Pressure:101.54kPa		

3.5.1 20 dB Emission Bandwidth and 99% Occupied Bandwidth

Test Mode	Channel	20dB BW [MHz]	99% OBW[MHz]
GFSK	2402	0.867	0.755
	2441	0.861	0.755
	2480	0.864	0.755
$\pi/4$ DQPSK	2402	1.263	1.145
	2441	1.257	1.145
	2480	1.257	1.139
8DPSK	2402	1.257	1.142
	2441	1.257	1.148
	2480	1.257	1.142

3.5.2 Maximum Conducted Peak Output Power

Test Mode	Channel[MHz]	Result[dBm]	Limit[dBm]	Verdict
GFSK	2402	5.28	21	Pass
	2441	5.99	21	Pass
	2480	6.36	21	Pass
$\pi/4$ DQPSK	2402	4.49	21	Pass
	2441	5.70	21	Pass
	2480	5.60	21	Pass
8DPSK	2402	4.41	21	Pass
	2441	5.74	21	Pass
	2480	5.53	21	Pass

3.5.3 Channel separation

Test Mode	Channel[MHz]	Result[MHz]	Limit[MHz]	Verdict
GFSK	2402	1.002	0.578	Pass
	2441	1.002	0.574	Pass
	2480	1.002	0.576	Pass
$\pi/4$ DQPSK	2402	1.000	0.842	Pass
	2441	1.002	0.838	Pass
	2480	1.000	0.838	Pass
8DPSK	2402	1.000	0.838	Pass
	2441	1.002	0.838	Pass
	2480	1.002	0.838	Pass

Note: Limit $\leq 2/3 \times 20$ dB BW

3.5.4 Number of hopping Frequency

Test Mode	Frequency Range [MHz]	Number of hopping Frequency	Limit	Verdict
GFSK	2400-2483.5	79	≥ 15	Pass
$\pi/4$ DQPSK	2400-2483.5	79	≥ 15	Pass
8DPSK	2400-2483.5	79	≥ 15	Pass

3.5.5 Time of occupancy (dwell time)

Test Mode	Packet Type	Channel[MHz]	Pulse Time [ms]	Result[s]	Limit[s]	Verdict
GFSK	DH1	2441	0.378	0.121	0.400	Pass
	DH3	2441	1.638	0.262	0.400	Pass
	DH5	2441	2.885	0.308	0.400	Pass
$\pi/4$ DQPSK	2DH1	2441	0.386	0.124	0.400	Pass
	2DH3	2441	1.641	0.263	0.400	Pass
	2DH5	2441	2.890	0.308	0.400	Pass
8DPSK	3DH1	2441	0.387	0.124	0.400	Pass
	3DH3	2441	1.641	0.263	0.400	Pass
	3DH5	2441	2.895	0.309	0.400	Pass

Note:

DH1: Dwell time=Pulse time (ms) $\times (1600/2/79) \times 31.6$ s

DH3: Dwell time=Pulse time (ms) $\times (1600/4/79) \times 31.6$ s


DH5: Dwell time=Pulse time (ms) $\times (1600/6/79) \times 31.6$ s

3.5.6 100 kHz Bandwidth of Frequency Band Edge

Test Mode	Channel	Result	Limit	Verdict
GFSK	2402	Refer test plot	Refer test plot	Pass
	2480	Refer test plot	Refer test plot	Pass
$\pi/4$ DQPSK	2402	Refer test plot	Refer test plot	Pass
	2480	Refer test plot	Refer test plot	Pass
8DPSK	2402	Refer test plot	Refer test plot	Pass
	2480	Refer test plot	Refer test plot	Pass


Test Plots:

20 dB Emission Bandwidth:

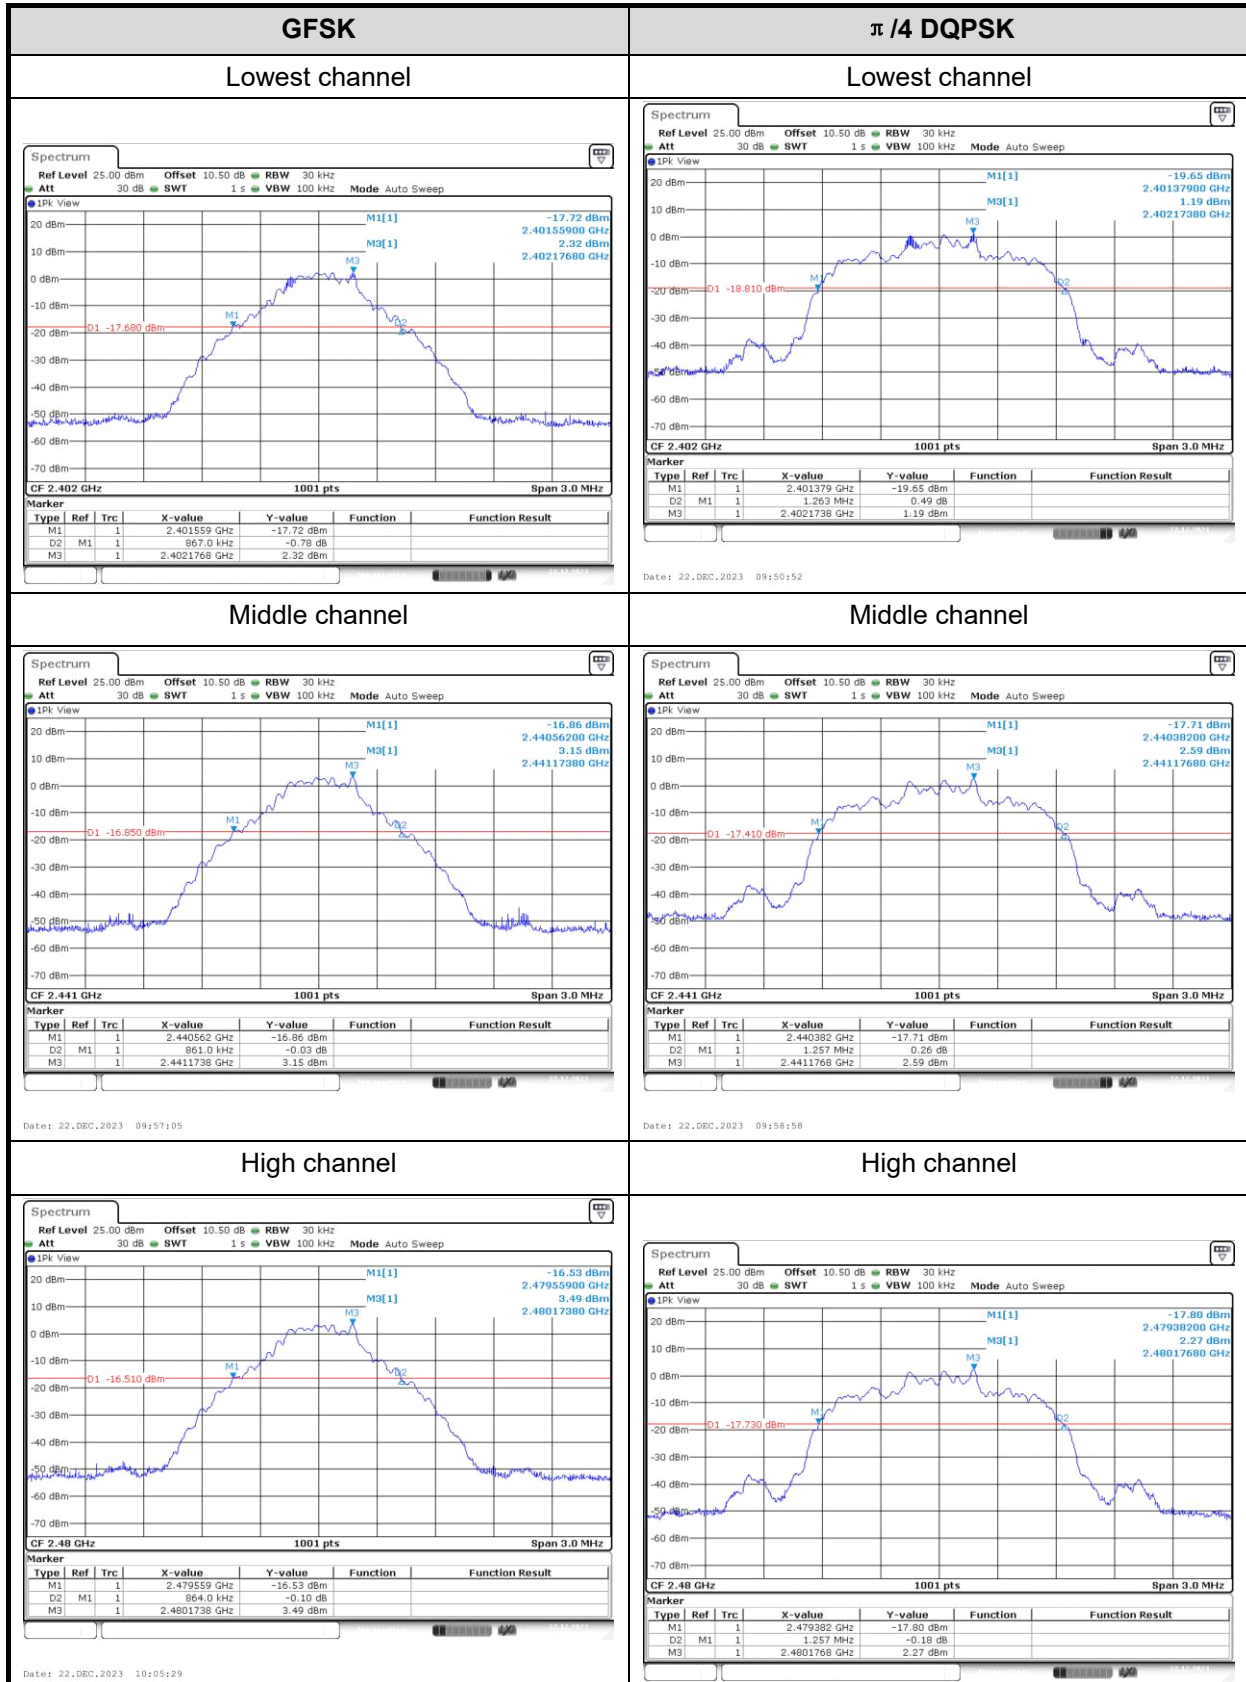


8DPSK		/																													
Lowest channel		/																													
<div><div><div>Spectrum</div><div><div>Ref Level 25.00 dBm</div><div>Offset 10.50 dB</div><div>RBW 30 kHz</div><div>Att 30 dB</div><div>SWT 1 s</div><div>VBW 100 kHz</div><div>Mode Auto Sweep</div></div><div><div>1Pk View</div><div><div><div><div>20 dBm</div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div><div>M1[1]</div><div>M3[1]</div><div>M3</div><div>M1</div><div>D2</div></div><div><div>-18.29 dBm</div><div>2.40137300 GHz</div><div>1.79 dBm</div><div>2.40217680 GHz</div><div>-18.29 dBm</div></div></div><div><div>D1 -18.210 dBm</div></div></div></div><div><div>CF 2.402 GHz</div><div>1001 pts</div><div>Span 3.0 MHz</div></div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.401373 GHz</td><td>-18.29 dBm</td><td></td><td></td></tr><tr><td>D2</td><td>M1</td><td>1</td><td>1.257 MHz</td><td>-0.05 dB</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.4021768 GHz</td><td>1.79 dBm</td><td></td><td></td></tr></table></div></div></div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.401373 GHz	-18.29 dBm			D2	M1	1	1.257 MHz	-0.05 dB			M3	1		2.4021768 GHz	1.79 dBm			/
Type	Ref	Trc	X-value	Y-value	Function	Function Result																									
M1	1		2.401373 GHz	-18.29 dBm																											
D2	M1	1	1.257 MHz	-0.05 dB																											
M3	1		2.4021768 GHz	1.79 dBm																											
Middle channel		/																													
<div><div><div>Spectrum</div><div><div>Ref Level 25.00 dBm</div><div>Offset 10.50 dB</div><div>RBW 30 kHz</div><div>Att 30 dB</div><div>SWT 1 s</div><div>VBW 100 kHz</div><div>Mode Auto Sweep</div></div><div><div>1Pk View</div><div><div><div><div>20 dBm</div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div><div>M1[1]</div><div>M3[1]</div><div>M3</div><div>M1</div><div>D2</div></div><div><div>-17.20 dBm</div><div>2.44037300 GHz</div><div>3.22 dBm</div><div>2.44117380 GHz</div><div>-17.20 dBm</div></div></div><div><div>D1 -16.780 dBm</div></div></div></div><div><div>CF 2.441 GHz</div><div>1001 pts</div><div>Span 3.0 MHz</div></div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.440373 GHz</td><td>-17.20 dBm</td><td></td><td></td></tr><tr><td>D2</td><td>M1</td><td>1</td><td>1.257 MHz</td><td>0.24 dB</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.4411738 GHz</td><td>3.22 dBm</td><td></td><td></td></tr></table></div></div></div><div>Date: 22 DEC 2023 10:00:37</div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.440373 GHz	-17.20 dBm			D2	M1	1	1.257 MHz	0.24 dB			M3	1		2.4411738 GHz	3.22 dBm			/
Type	Ref	Trc	X-value	Y-value	Function	Function Result																									
M1	1		2.440373 GHz	-17.20 dBm																											
D2	M1	1	1.257 MHz	0.24 dB																											
M3	1		2.4411738 GHz	3.22 dBm																											
High channel		/																													
<div><div><div>Spectrum</div><div><div>Ref Level 25.00 dBm</div><div>Offset 10.50 dB</div><div>RBW 30 kHz</div><div>Att 30 dB</div><div>SWT 1 s</div><div>VBW 100 kHz</div><div>Mode Auto Sweep</div></div><div><div>1Pk View</div><div><div><div><div>20 dBm</div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div><div>M1[1]</div><div>M3[1]</div><div>M3</div><div>M1</div><div>D2</div></div><div><div>-17.27 dBm</div><div>2.47937300 GHz</div><div>2.89 dBm</div><div>2.48017380 GHz</div><div>-17.27 dBm</div></div></div><div><div>D1 -17.110 dBm</div></div></div></div><div><div>CF 2.48 GHz</div><div>1001 pts</div><div>Span 3.0 MHz</div></div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.479373 GHz</td><td>-17.27 dBm</td><td></td><td></td></tr><tr><td>D2</td><td>M1</td><td>1</td><td>1.257 MHz</td><td>-0.11 dB</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.4801738 GHz</td><td>2.89 dBm</td><td></td><td></td></tr></table></div></div></div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.479373 GHz	-17.27 dBm			D2	M1	1	1.257 MHz	-0.11 dB			M3	1		2.4801738 GHz	2.89 dBm			/
Type	Ref	Trc	X-value	Y-value	Function	Function Result																									
M1	1		2.479373 GHz	-17.27 dBm																											
D2	M1	1	1.257 MHz	-0.11 dB																											
M3	1		2.4801738 GHz	2.89 dBm																											

99% Occupied Bandwidth:

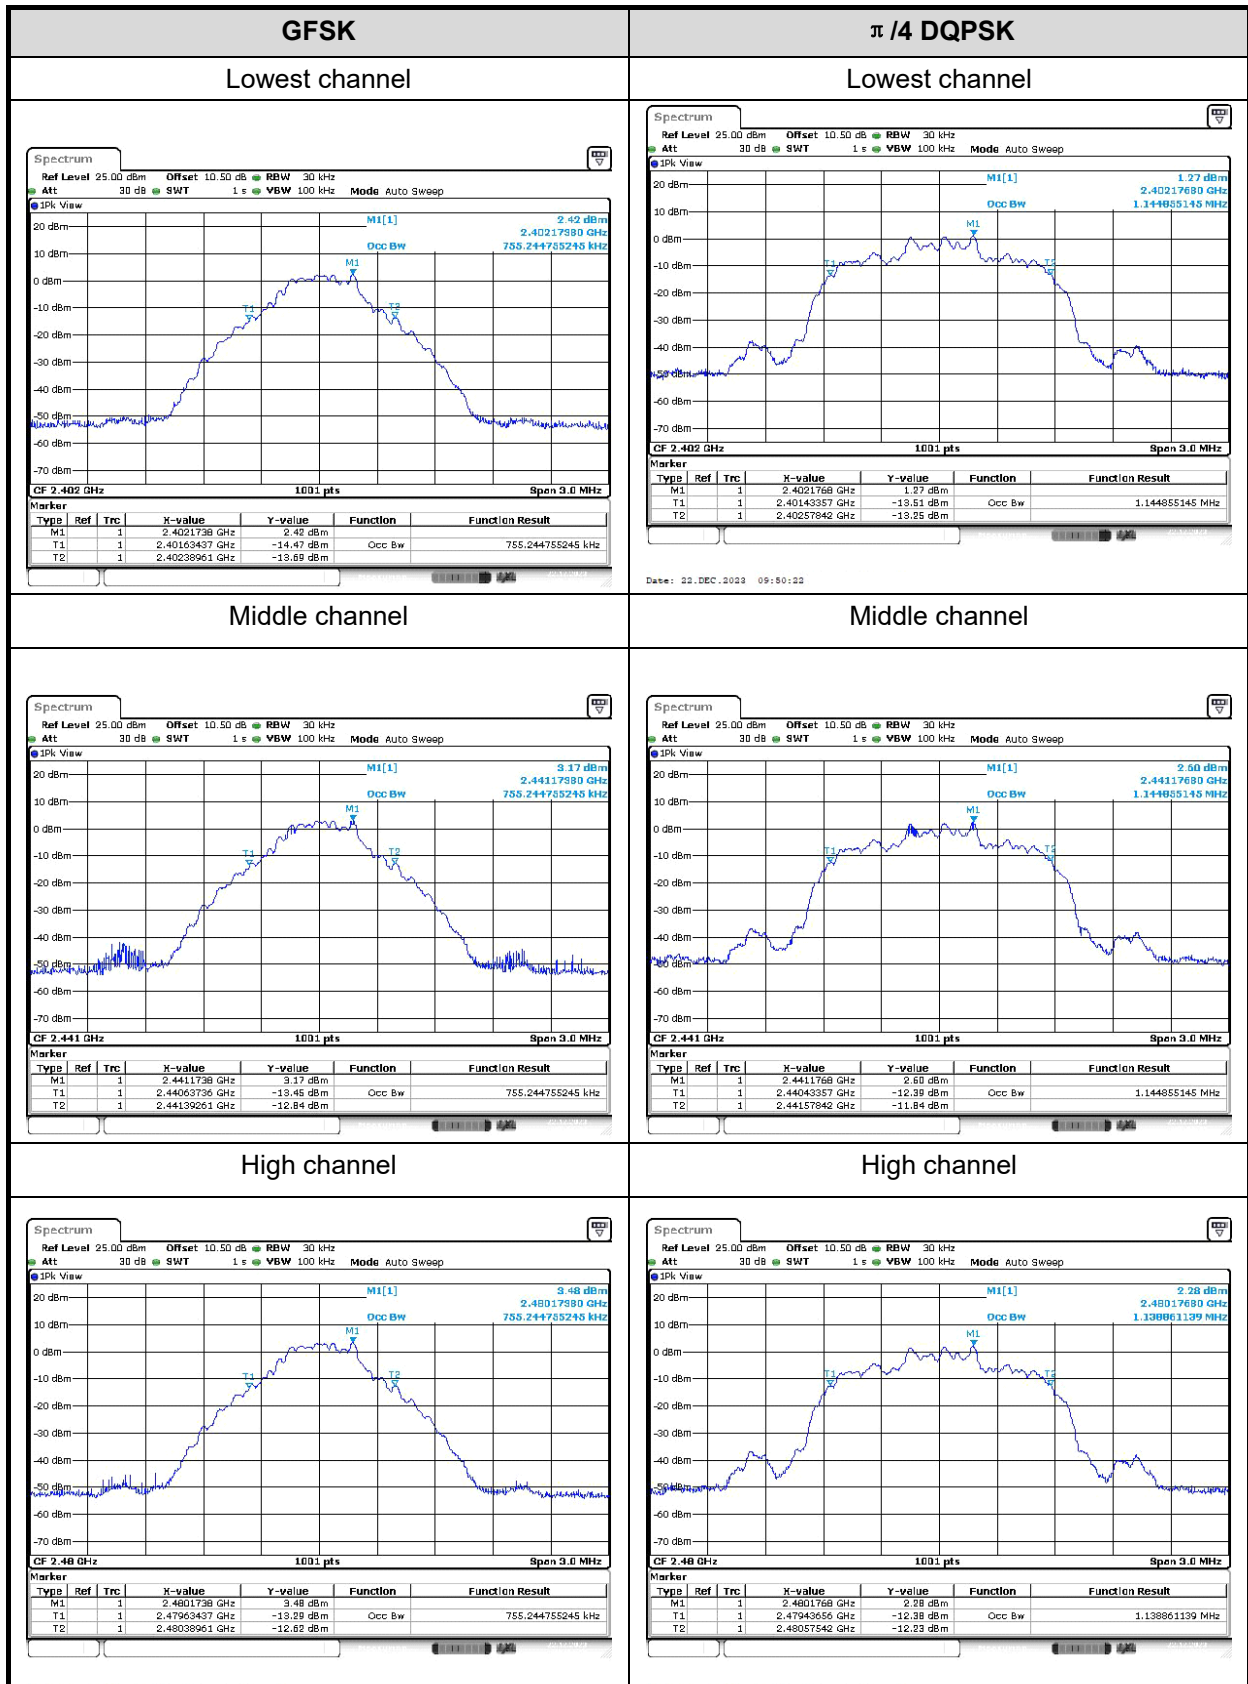




8DPSK	/																												
Lowest channel	/																												
<div><div><div><div><div><div>Spectrum</div><div><div>Ref Level 25.00 dBm</div><div>Offset 10.50 dB</div><div>RBW 30 kHz</div><div>Att 30 dB</div><div>SWT 1 s</div><div>VBW 100 kHz</div><div>Mode Auto Sweep</div></div></div><div><div>IPK View</div><div><div><div><div><div>MI(1)</div><div>1.85 dBm</div><div>2.40217980 GHz</div><div>1.141858142 MHz</div></div><div>Occ BW</div></div></div></div></div><div><div>CF 2.402 GHz</div><div>1001 pts</div><div>Span 3.0 MHz</div></div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.40217980 GHz</td><td>1.85 dBm</td><td></td><td></td></tr><tr><td>T1</td><td>1</td><td></td><td>2.40143956 GHz</td><td>-13.66 dBm</td><td>Occ BW</td><td>1.141858142 MHz</td></tr><tr><td>T2</td><td>1</td><td></td><td>2.40258142 GHz</td><td>-13.80 dBm</td><td></td><td></td></tr></table></div></div></div></div></div> <div>Date: 22.DEC.2023 09:52:52</div>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40217980 GHz	1.85 dBm			T1	1		2.40143956 GHz	-13.66 dBm	Occ BW	1.141858142 MHz	T2	1		2.40258142 GHz	-13.80 dBm			/
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.40217980 GHz	1.85 dBm																									
T1	1		2.40143956 GHz	-13.66 dBm	Occ BW	1.141858142 MHz																							
T2	1		2.40258142 GHz	-13.80 dBm																									
Middle channel	/																												
<div><div><div><div><div><div>Spectrum</div><div><div>Ref Level 25.00 dBm</div><div>Offset 10.50 dB</div><div>RBW 30 kHz</div><div>Att 30 dB</div><div>SWT 1 s</div><div>VBW 100 kHz</div><div>Mode Auto Sweep</div></div></div><div><div>IPK View</div><div><div><div><div><div>MI(1)</div><div>3.22 dBm</div><div>2.44117980 GHz</div><div>1.141858142 MHz</div></div><div>Occ BW</div></div></div></div></div><div><div>CF 2.441 GHz</div><div>1001 pts</div><div>Span 3.0 MHz</div></div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.44117980 GHz</td><td>3.22 dBm</td><td></td><td></td></tr><tr><td>T1</td><td>1</td><td></td><td>2.44043956 GHz</td><td>-12.55 dBm</td><td>Occ BW</td><td>1.141858142 MHz</td></tr><tr><td>T2</td><td>1</td><td></td><td>2.44158741 GHz</td><td>-12.75 dBm</td><td></td><td></td></tr></table></div></div></div></div></div> <div>Date: 22.DEC.2023 10:00:06</div>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.44117980 GHz	3.22 dBm			T1	1		2.44043956 GHz	-12.55 dBm	Occ BW	1.141858142 MHz	T2	1		2.44158741 GHz	-12.75 dBm			/
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.44117980 GHz	3.22 dBm																									
T1	1		2.44043956 GHz	-12.55 dBm	Occ BW	1.141858142 MHz																							
T2	1		2.44158741 GHz	-12.75 dBm																									
High channel	/																												
<div><div><div><div><div><div>Spectrum</div><div><div>Ref Level 25.00 dBm</div><div>Offset 10.50 dB</div><div>RBW 30 kHz</div><div>Att 30 dB</div><div>SWT 1 s</div><div>VBW 100 kHz</div><div>Mode Auto Sweep</div></div></div><div><div>IPK View</div><div><div><div><div><div>MI(1)</div><div>2.92 dBm</div><div>2.48017980 GHz</div><div>1.141858142 MHz</div></div><div>Occ BW</div></div></div></div></div><div><div>CF 2.480 GHz</div><div>1001 pts</div><div>Span 3.0 MHz</div></div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.48017980 GHz</td><td>2.92 dBm</td><td></td><td></td></tr><tr><td>T1</td><td>1</td><td></td><td>2.47943956 GHz</td><td>-12.63 dBm</td><td>Occ BW</td><td>1.141858142 MHz</td></tr><tr><td>T2</td><td>1</td><td></td><td>2.48058142 GHz</td><td>-12.83 dBm</td><td></td><td></td></tr></table></div></div></div></div></div> <div>Date: 22.DEC.2023 10:09:23</div>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.48017980 GHz	2.92 dBm			T1	1		2.47943956 GHz	-12.63 dBm	Occ BW	1.141858142 MHz	T2	1		2.48058142 GHz	-12.83 dBm			/
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.48017980 GHz	2.92 dBm																									
T1	1		2.47943956 GHz	-12.63 dBm	Occ BW	1.141858142 MHz																							
T2	1		2.48058142 GHz	-12.83 dBm																									

Channel separation:

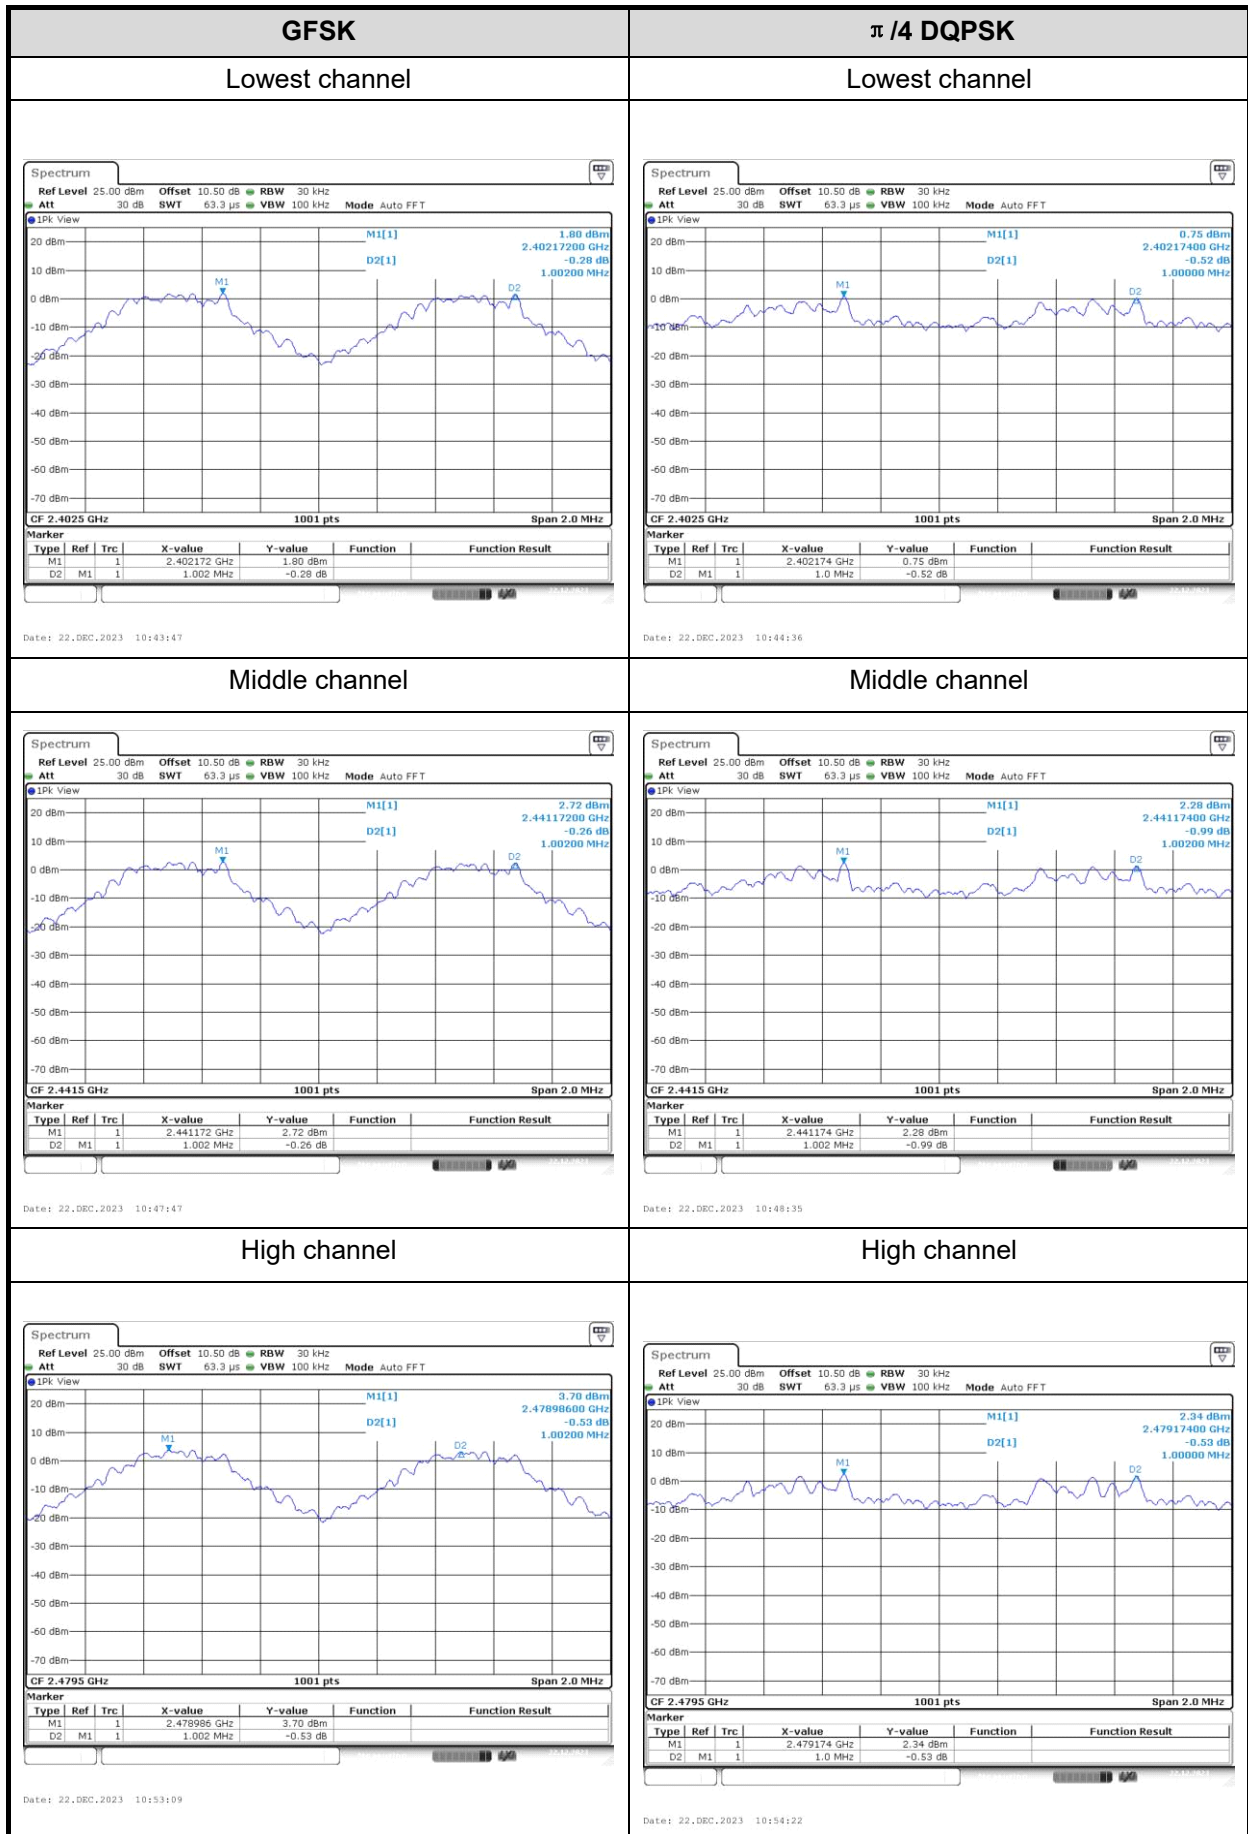





8DPSK		/																						
Lowest channel		/																						
<div><div><div><div>Spectrum</div><div><div>Ref Level 25.00 dBm</div><div>Offset 10.50 dB</div><div>RBW 30 kHz</div><div>Att 30 dB</div><div>SWT 63.3 μs</div><div>VBW 100 kHz</div><div>Mode Auto FFT</div></div><div>1Pk View</div><div><div><div><div>20 dBm</div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div><div>M1[1]</div><div>D2[1]</div></div><div><div>-0.25 dBm</div><div>2.40217400 GHz</div><div>-0.31 dB</div><div>1.00000 MHz</div></div></div></div><div><div>CF 2.4025 GHz</div><div>1001 pts</div><div>Span 2.0 MHz</div></div><div><div>Marker</div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.402174 GHz</td><td>-0.25 dBm</td><td></td><td></td></tr><tr><td>D2</td><td>M1</td><td>1</td><td>1.0 MHz</td><td>-0.31 dB</td><td></td><td></td></tr></table></div></div></div></div><div>Date: 22, DEC, 2023 10:45:14</div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.402174 GHz	-0.25 dBm			D2	M1	1	1.0 MHz	-0.31 dB			/
Type	Ref	Trc	X-value	Y-value	Function	Function Result																		
M1	1		2.402174 GHz	-0.25 dBm																				
D2	M1	1	1.0 MHz	-0.31 dB																				
Middle channel		/																						
<div><div><div><div>Spectrum</div><div><div>Ref Level 25.00 dBm</div><div>Offset 10.50 dB</div><div>RBW 30 kHz</div><div>Att 30 dB</div><div>SWT 63.3 μs</div><div>VBW 100 kHz</div><div>Mode Auto FFT</div></div><div>1Pk View</div><div><div><div><div>20 dBm</div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div><div>M1[1]</div><div>D2[1]</div></div><div><div>2.83 dBm</div><div>2.44117800 GHz</div><div>-1.87 dB</div><div>1.00200 MHz</div></div></div></div><div><div>CF 2.4415 GHz</div><div>1001 pts</div><div>Span 2.0 MHz</div></div><div><div>Marker</div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.441178 GHz</td><td>2.83 dBm</td><td></td><td></td></tr><tr><td>D2</td><td>M1</td><td>1</td><td>1.002 MHz</td><td>-1.87 dB</td><td></td><td></td></tr></table></div></div></div></div><div>Date: 26, DEC, 2023 10:46:24</div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.441178 GHz	2.83 dBm			D2	M1	1	1.002 MHz	-1.87 dB			/
Type	Ref	Trc	X-value	Y-value	Function	Function Result																		
M1	1		2.441178 GHz	2.83 dBm																				
D2	M1	1	1.002 MHz	-1.87 dB																				
High channel		/																						
<div><div><div><div>Spectrum</div><div><div>Ref Level 25.00 dBm</div><div>Offset 10.50 dB</div><div>RBW 30 kHz</div><div>Att 30 dB</div><div>SWT 63.3 μs</div><div>VBW 100 kHz</div><div>Mode Auto FFT</div></div><div>1Pk View</div><div><div><div><div>20 dBm</div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div><div>M1[1]</div><div>D2[1]</div></div><div><div>2.57 dBm</div><div>2.47917200 GHz</div><div>-1.62 dB</div><div>1.00200 MHz</div></div></div></div><div><div>CF 2.4795 GHz</div><div>1001 pts</div><div>Span 2.0 MHz</div></div><div><div>Marker</div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.479172 GHz</td><td>2.57 dBm</td><td></td><td></td></tr><tr><td>D2</td><td>M1</td><td>1</td><td>1.002 MHz</td><td>-1.62 dB</td><td></td><td></td></tr></table></div></div></div></div><div>Date: 22, DEC, 2023 10:55:36</div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.479172 GHz	2.57 dBm			D2	M1	1	1.002 MHz	-1.62 dB			/
Type	Ref	Trc	X-value	Y-value	Function	Function Result																		
M1	1		2.479172 GHz	2.57 dBm																				
D2	M1	1	1.002 MHz	-1.62 dB																				

Number of hopping Frequency

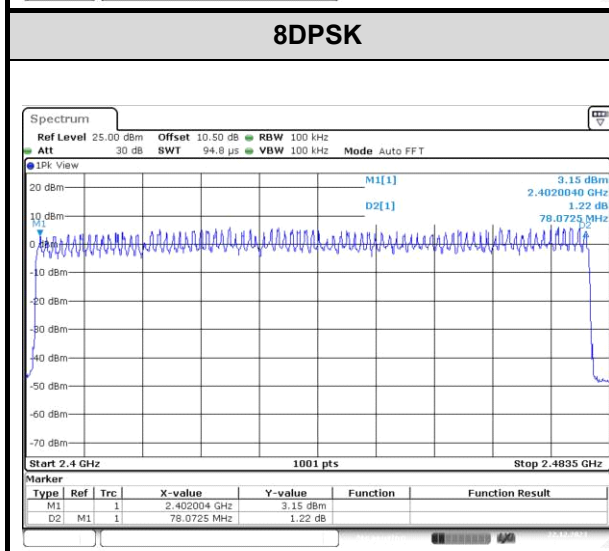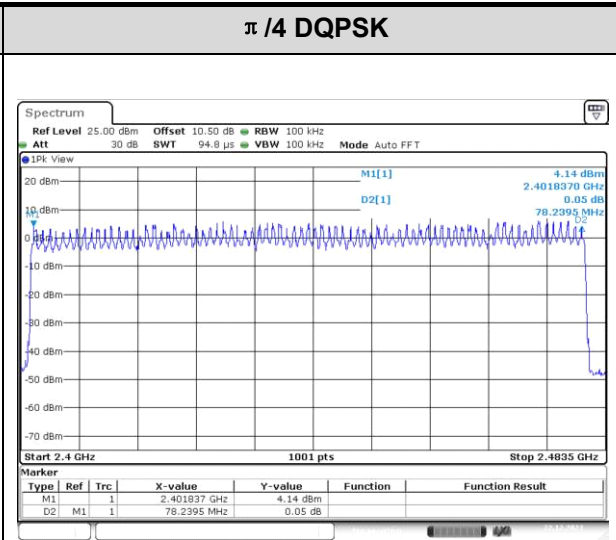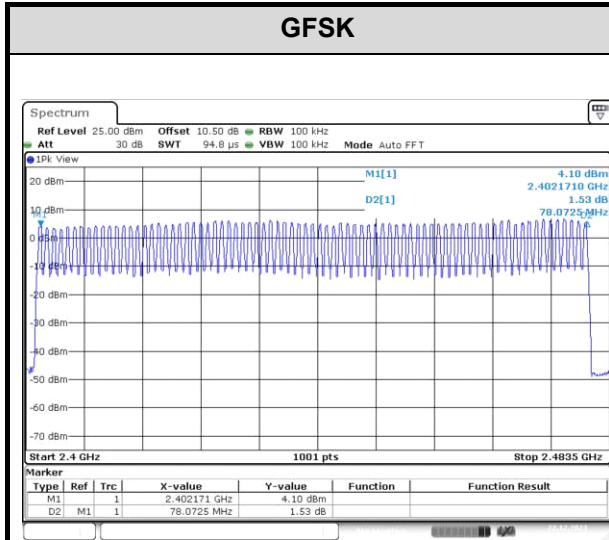


Time of occupancy (dwell time)

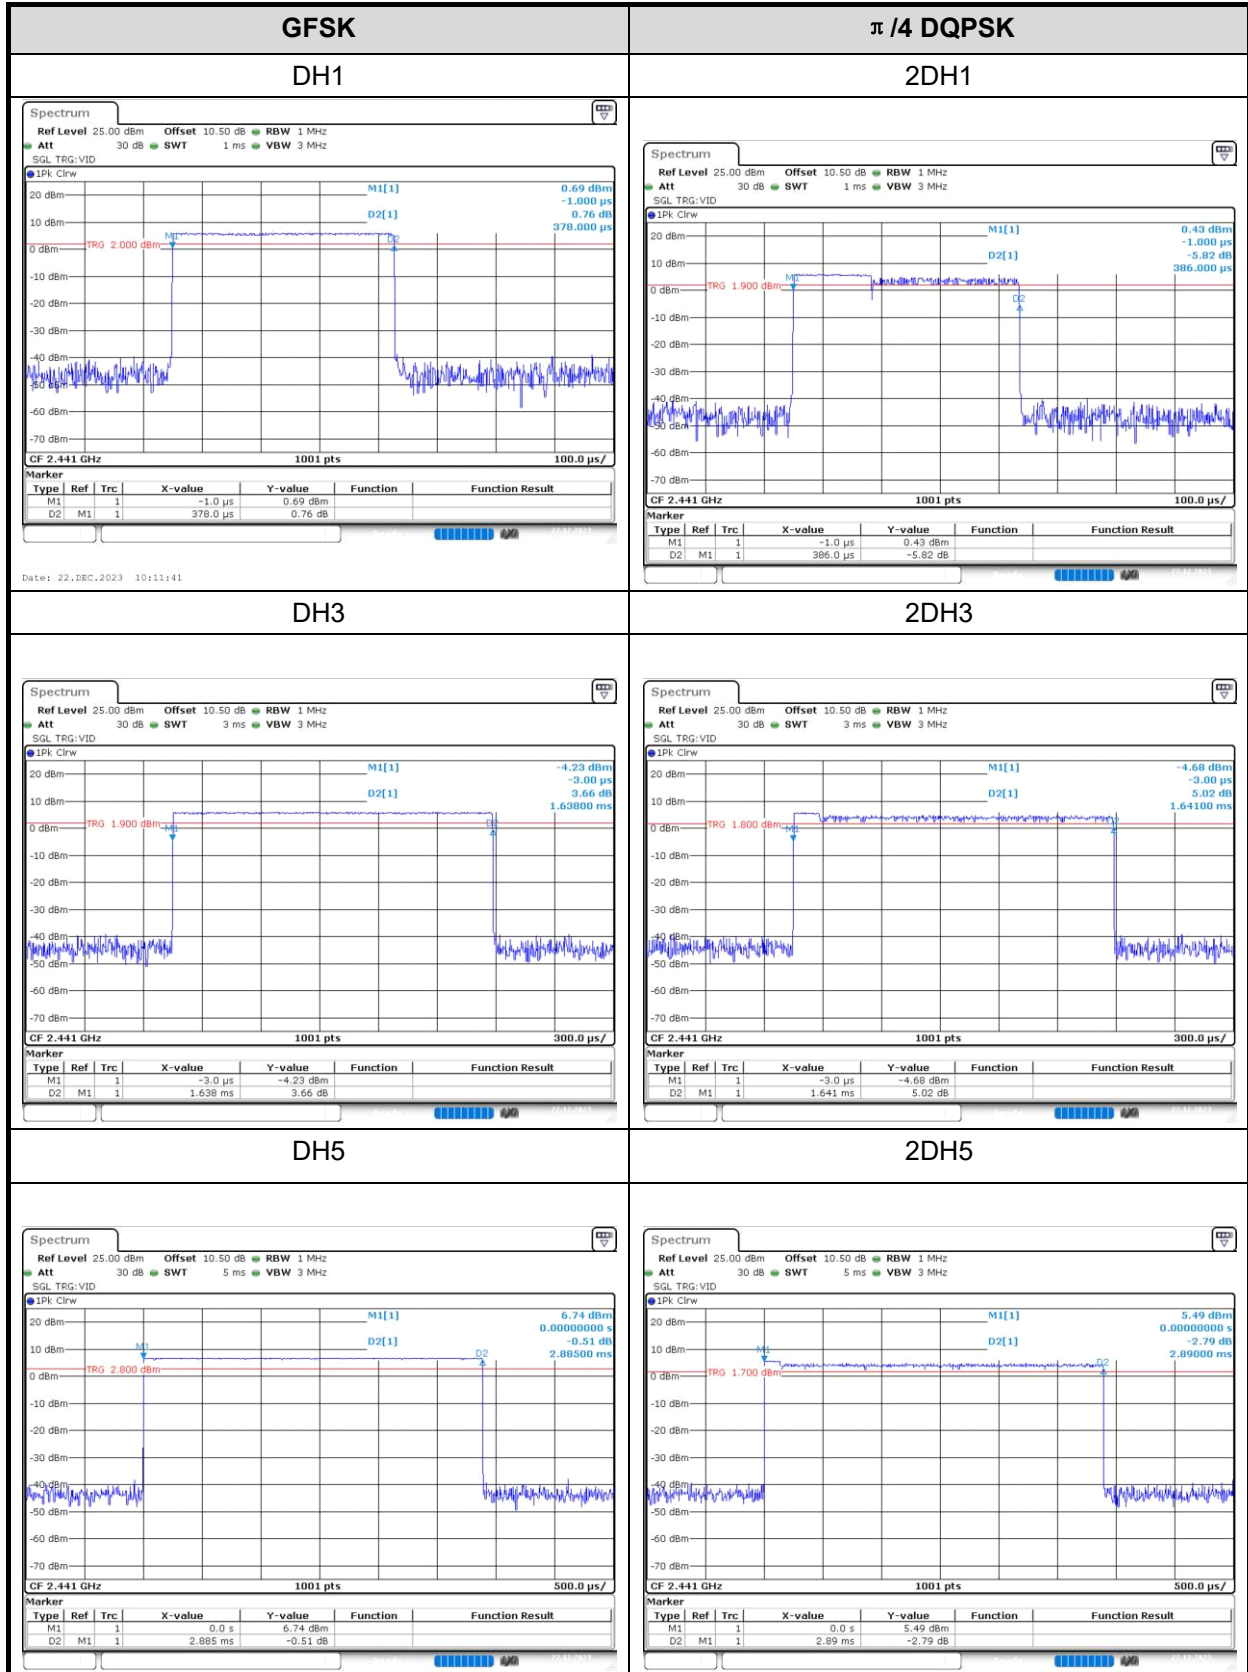

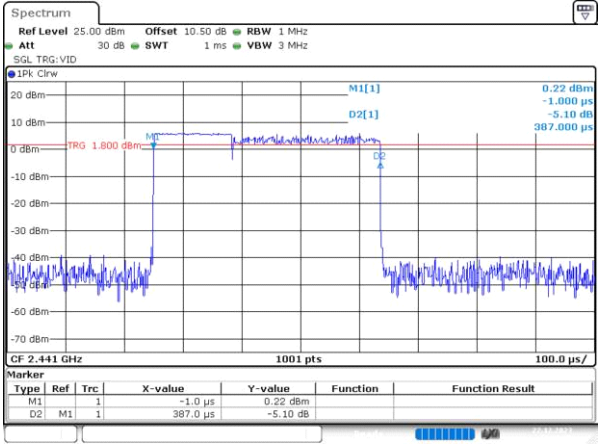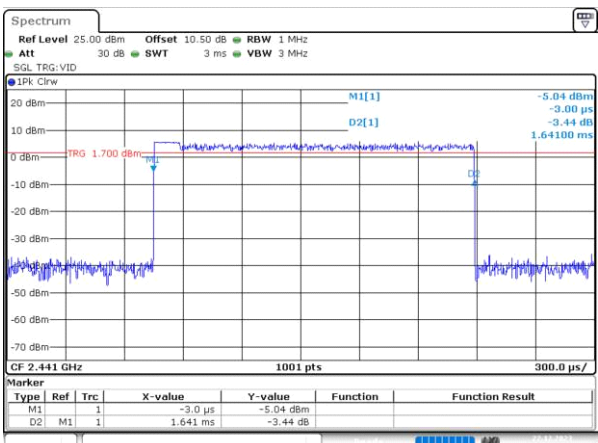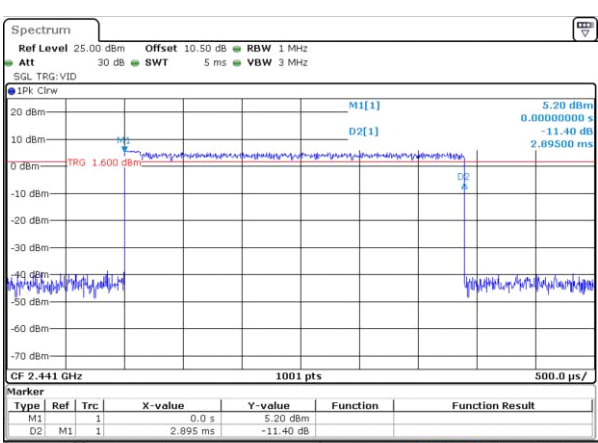8DPSK	/
3DH1	/
	/
3DH3	/
	/
3DH5	/
	/


100kHz Bandwidth of Frequency Band Edge:

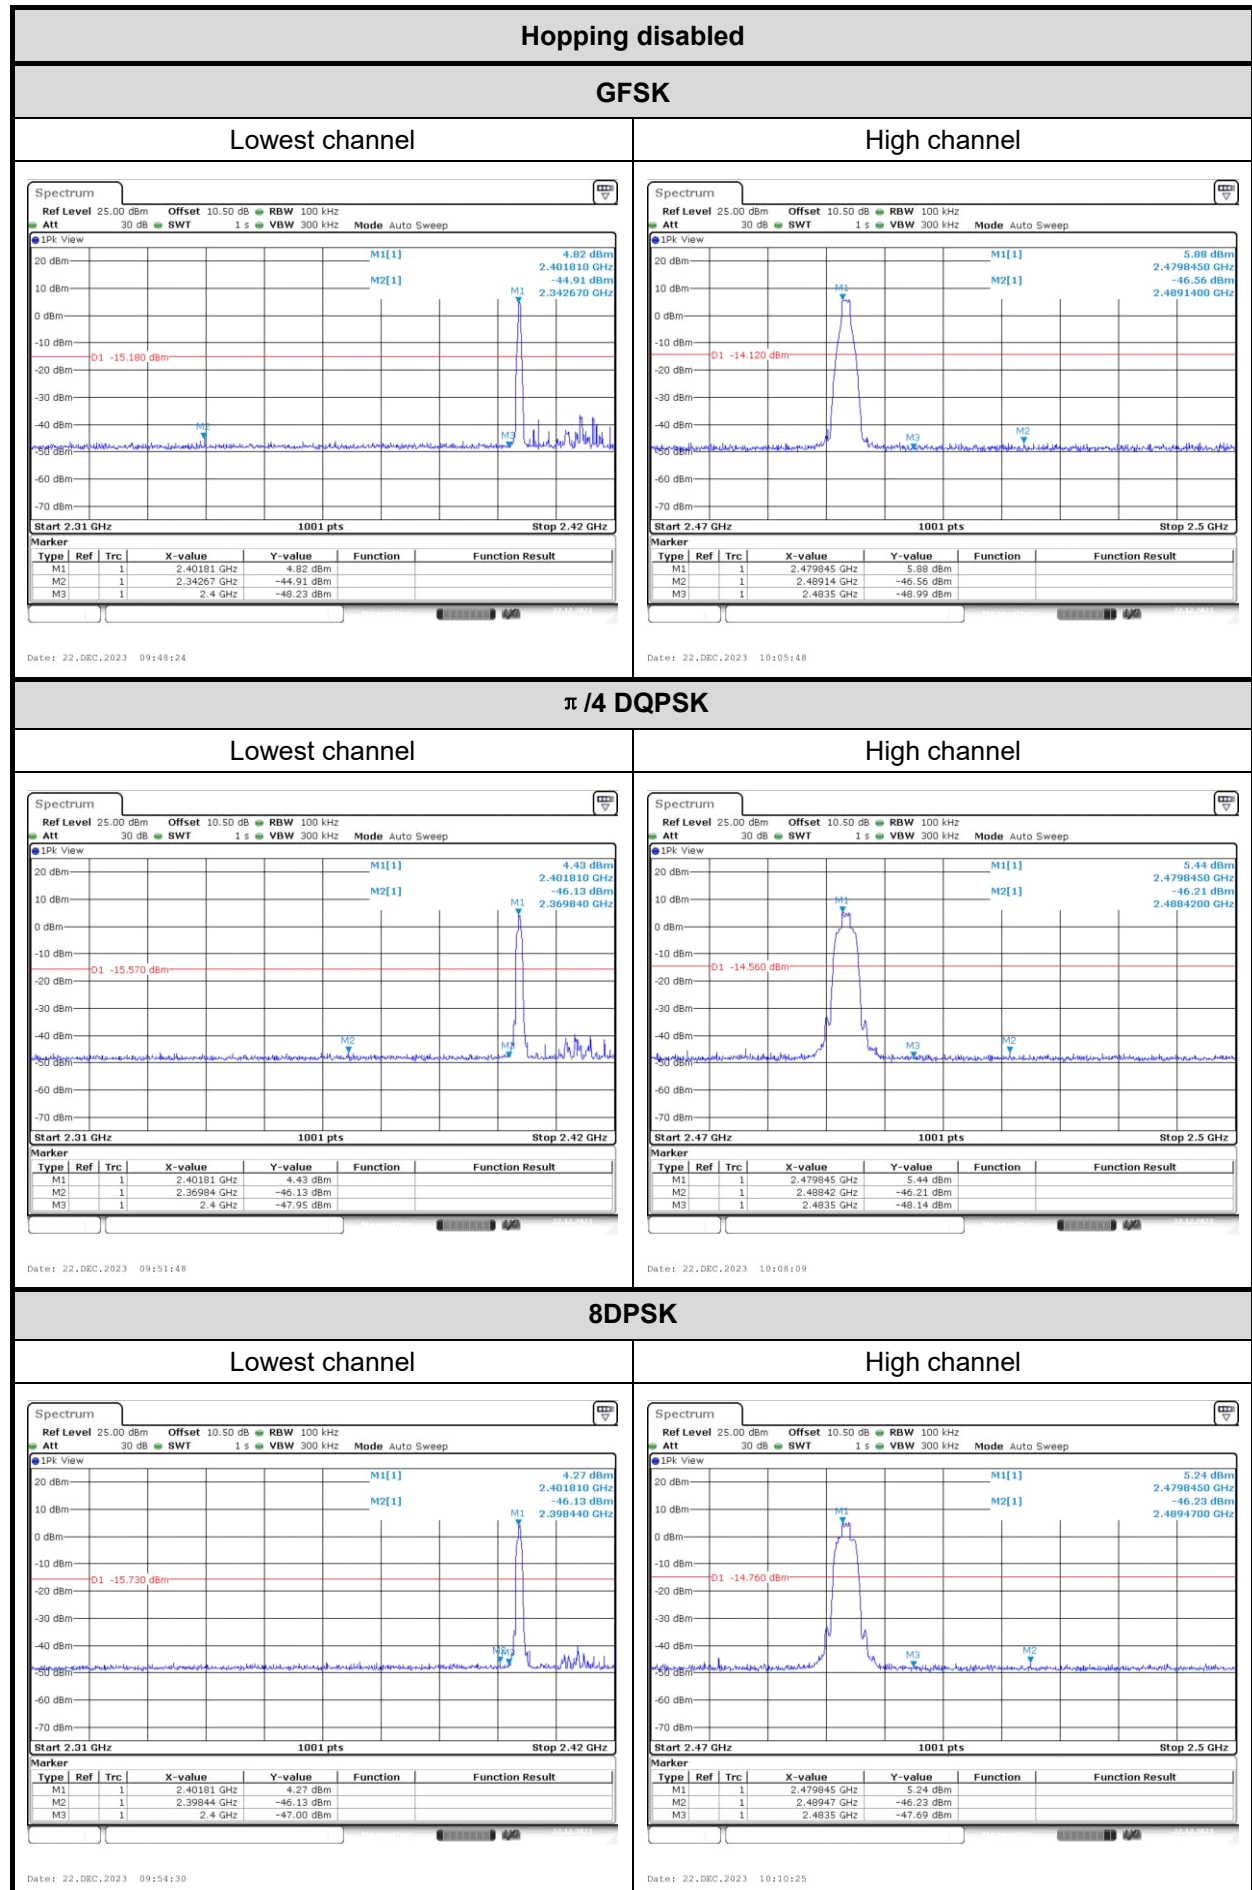


Hopping enabled

GFSK

Lowest channel

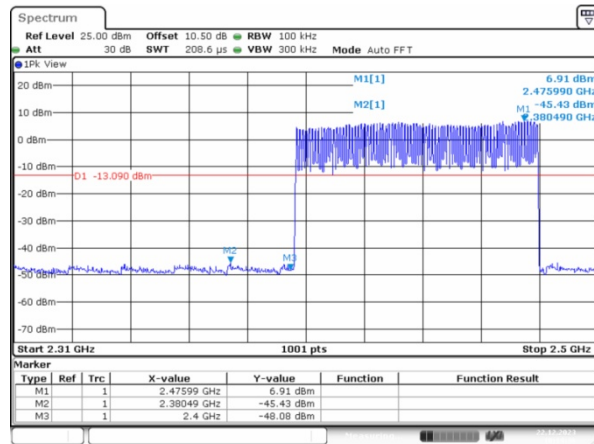


High channel

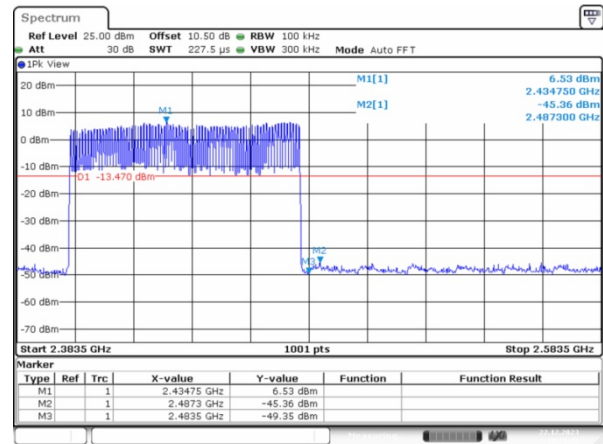


$\pi/4$ DQPSK

Lowest channel

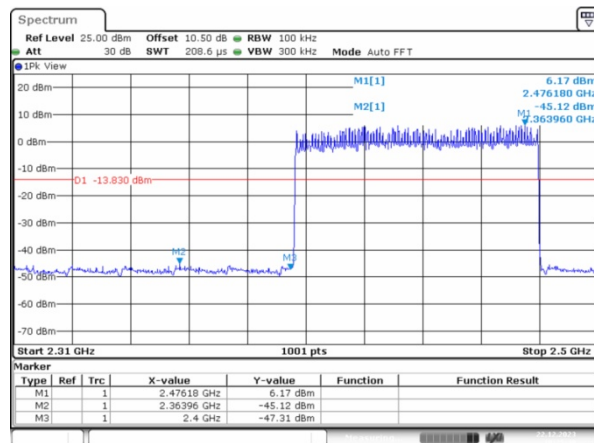


High channel

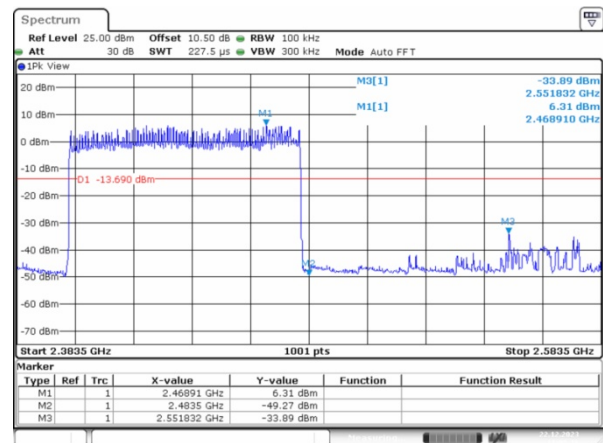


8DPSK

Lowest channel

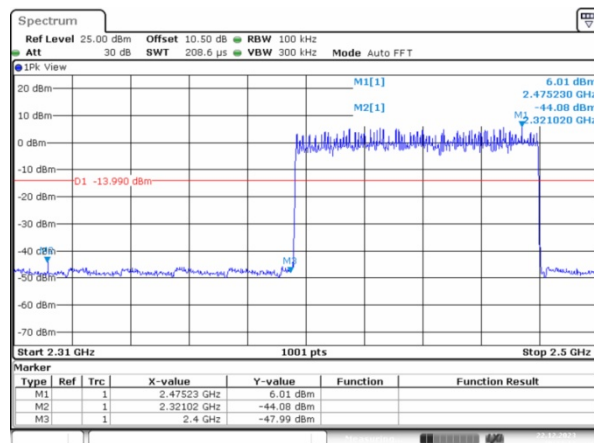

High channel

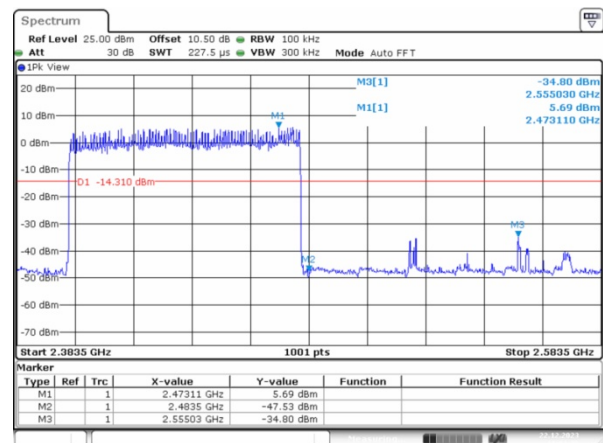

4 Test Setup Photo

Please refer to the attachment RWAZ202300129 Test Setup photo.

5 E.U.T Photo

Please refer to the attachment RWAZ202300129 External photo and RWAZ202300129 Internal photo.

---End of Report---