

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBEIH-WTW-P24090570-5

FCC ID: P27XB10

Product: Comcast Xfinity DOCSIS 4.0 gateway with Wi-Fi 7

Brand: Comcast Xfinity

Model No.: XB10

Series Model: SG417DBCT

Received Date: 2024/10/9

Test Date: 2024/11/8 ~ 2025/2/5

Issued Date: 2025/2/18

Applicant: Sercomm Corporation

Address: 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location(1): No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location(2): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

Test Location(3): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan

FCC Registration / Test Location:

Designation Number: 198487 / TW2021 for Test Location(1)
788550 / TW0003 for Test Location(2)
281270 / TW0032 for Test Location(3)

Approved by:

Jeremy Lin

Jeremy Lin / Project Engineer

, Date:

2025/2/18

This test report consists of 240 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Annie Chang / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	8
3.3 Channel List.....	10
3.4 Test Mode Applicability and Tested Channel Detail.....	12
3.5 Duty Cycle of Test Signal.....	15
3.6 Test Program Used and Operation Descriptions	18
3.7 Connection Diagram of EUT and Peripheral Devices	18
3.8 Configuration of Peripheral Devices and Cable Connections	19
4 Test Instruments	20
4.1 Maximum RF Output Power	20
4.2 Maximum Power Spectral Density	20
4.3 Emission Bandwidth	21
4.4 In-Band Emission Mask.....	21
4.5 Occupied Bandwidth.....	21
4.6 Contention-based Protocol.....	21
4.7 AC Power Conducted Emissions	22
4.8 Unwanted Emissions below 1 GHz	23
4.9 Unwanted Emissions above 1 GHz.....	24
5 Limits of Test Items.....	25
5.1 Maximum RF Output Power	25
5.2 Maximum Power Spectral Density	25
5.3 Emission Bandwidth	25
5.4 In-Band Emission Mask.....	25
5.5 Occupied Bandwidth.....	25
5.6 Contention-based Protocol.....	25
5.7 AC Power Conducted Emissions	26
5.8 Unwanted Emissions below 1 GHz	26
5.9 Unwanted Emissions above 1 GHz.....	26
6 Test Arrangements.....	27
6.1 Maximum RF Output Power	27
6.1.1 Test Setup	27
6.1.2 Test Procedure	27
6.2 Maximum Power Spectral Density	28
6.2.1 Test Setup	28
6.2.2 Test Procedure	28
6.3 Emission Bandwidth	29
6.3.1 Test Setup	29
6.3.2 Test Procedure	29
6.4 In-Band Emission Mask.....	29
6.4.1 Test Setup	29
6.4.2 Test Procedure	29
6.5 Occupied Bandwidth.....	30
6.5.1 Test Setup	30
6.5.2 Test Procedure	30
6.6 Contention-based Protocol.....	31
6.6.1 Test Setup	31
6.6.2 Test Procedure	31
6.7 AC Power Conducted Emissions	32

6.7.1	Test Setup	32
6.7.2	Test Procedure	32
6.8	Unwanted Emissions below 1 GHz	33
6.8.1	Test Setup	33
6.8.2	Test Procedure	34
6.9	Unwanted Emissions above 1 GHz	35
6.9.1	Test Setup	35
6.9.2	Test Procedure	35
7	Test Results of Test Item	36
7.1	Maximum RF Output Power	36
7.2	Maximum Power Spectral Density	46
7.3	Emission Bandwidth	50
7.4	In-Band Emission Mask	54
7.5	Occupied Bandwidth	93
7.6	Contention-based Protocol	97
7.7	AC Power Conducted Emissions	110
7.8	Unwanted Emissions below 1 GHz	112
7.9	Unwanted Emissions above 1 GHz	114
8	Pictures of Test Arrangements	239
9	Information of the Testing Laboratories	240

Release Control Record

Issue No.	Description	Date Issued
RFBEIH-WTW-P24090570-5	Original release.	2025/2/18

1 Certificate

Product: Comcast Xfinity DOCSIS 4.0 gateway with Wi-Fi 7

Brand: Comcast Xfinity

Test Model: XB10

Series Model: SG417DBCT

Sample Status: Engineering sample

Applicant: Sercomm Corporation

Test Date: 2024/11/8 ~ 2025/2/5

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: ANSI C63.10-2013
KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(5)	Maximum RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(5)	Maximum Power Spectral Density	Pass	Meet the requirement of limit.
15.407(a)(11)	Emission Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth	-	Reference only.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -5.70 dB at 0.15391 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -6.8 dB at 435.75 MHz
15.407(b)(6) 15.407(b)(10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -2.8 dB at 5925.00 MHz
15.407(b)(7)	In-Band Emission Mask	Pass	Meet the requirement of limit.
15.407(d)(6)	Contention-based Protocol	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Notes: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
Maximum RF Output Power	-	1.1 dB
Maximum Power Spectral Density	-	1.3 dB
Occupied Bandwidth	-	960 Hz
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.90 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.85 dB
	30 MHz ~ 1 GHz	5.7 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	1.76 dB
	18 GHz ~ 40 GHz	1.77 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Comcast Xfinity DOCSIS 4.0 gateway with Wi-Fi 7
Brand	Comcast Xfinity
Test Model	XB10
Series Model	SG417DBCT
Model Difference	Marketing Differentiation
Status of EUT	Engineering sample
Power Supply Rating	15Vdc from Adapter
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	Up to 4803.9 Mbps Up to 11528 Mbps (802.11be)
Operating Frequency	5.955 GHz ~ 6.415 GHz, 6.425 GHz ~ 6.525 GHz, 6.535 GHz ~ 6.865 GHz, 6.875 GHz ~ 7.095 GHz
Number of Channel	802.11a, 802.11ax (HE20), 802.11be (EHT20):58 802.11ax (HE40), 802.11be (EHT40):29 802.11ax (HE80), 802.11be (EHT80):14 802.11ax (HE160), 802.11be (EHT160):7 802.11be (EHT320):6
Output Power	CDD Mode: 5.955 GHz ~ 6.415 GHz : EIRP: 354.813 mW (25.50 dBm) 6.425 GHz ~ 6.525 GHz : EIRP: 353.997 mW (25.49 dBm) 6.535 GHz ~ 6.865 GHz : EIRP: 357.273 mW (25.53 dBm) 6.875 GHz ~ 7.095 GHz : EIRP: 264.241 mW (24.22 dBm) Beamforming Mode: 5.955 GHz ~ 6.415 GHz : EIRP: 714.496 mW (28.54 dBm) 6.425 GHz ~ 6.525 GHz : EIRP: 645.654 mW (28.1 dBm) 6.535 GHz ~ 6.865 GHz : EIRP: 690.24 mW (28.39 dBm) 6.875 GHz ~ 7.095 GHz : EIRP: 394.457 mW (25.96 dBm)
Equipment Class	6ID: 15E 6 GHz Low-power indoor access point

Note:

1. The EUT uses following accessories.

Item	Brand	Model	Specification
AC Adapter 1	NETBIT ELECTRONICS LTD	NBC80B150533VU	AC I/P: 120V, 60Hz, 1.8A DC O/P: 15.0V, 5.33A AC 2-Pin, Non-shielded DC cable (1.8m)
AC Adapter 2	LEADER ELECTRONICS INC	ML80-1150533-A1	AC I/P: 120V, 60Hz, 2.0A DC O/P: 15.0V, 5.33A AC 2-Pin, Non-shielded DC cable (1.8m)
AC Adapter 3	Delta	ADH-80AW BA	AC I/P: 120V, 60Hz, 1.6A DC O/P: 15.0V, 5.33A AC 2-Pin, Non-shielded DC cable (1.8m)

2. There are Bluetooth, Zigbee and WLAN (2.4 GHz & 5 GHz & 6 GHz) technology used for the EUT.

3. Simultaneously transmission combination.

Combination	Technology		
1	WLAN (2.4 GHz)	WLAN (5 GHz)	WLAN (6 GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The directional antenna gain information is declared by manufacturer and more detailed features description please refer to operation description of antenna specifications exhibit.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

No.	Technology	Ant. Type	Connector	Model
1	WLAN	Dipole	U.FL	N06CTANG-PK1-LB1X80BU Rev F
2				N06CTANH-PK1-LP1X135BU Rev G
3				N06CTANE-PK1-LG1X180BU Rev G
4				N06CTANF-PK1-LW1X125BU Rev F
5				N03CTAND-PK1-Y1X205BU Rev E
6				N03CTANR-PK1-B1X150BU Rev A
7				N03CTANS-PK1-A1X240BU Rev B
8				N03CTANA-PK1-R1X215BU Rev E
9	Zigbee	Dipole	U.FL	N01CTANJ-PK1-B1X230BU Rev F
10				N01CTANK-PK1-Q1X245BU Rev G
11	Bluetooth	Dipole	ipex	-

Frequency Range (GHz)	Max. Antenna gain (dBi)										
	Ant 1	Ant 2	Ant 3	Ant 4	Ant 5	Ant 6	Ant 7	Ant 8	Ant 9	Ant 10	Ant 11
2.4~2.4835					4.8	4.8	5.1	4.6	4.7	4.7	3.44
5.15~5.85					5	5	4.9	5			
5.925~7.125	5.2	5	5.3	4.9							

Frequency Range (GHz)	Min. Antenna Gain (dBi)
5.925~7.125	4.3

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

6 GHz Band			
Modulation Mode	Beamforming Mode	Tx & Rx Configuration	
802.11a	Not Support	4TX	4RX
802.11ax (HE20)	Support	4TX	4RX
802.11ax (HE40)	Support	4TX	4RX
802.11ax (HE80)	Support	4TX	4RX
802.11ax (HE160)	Support	4TX	4RX
802.11be (EHT20)	Support	4TX	4RX
802.11be (EHT40)	Support	4TX	4RX
802.11be (EHT80)	Support	4TX	4RX
802.11be (EHT160)	Support	4TX	4RX
802.11be (EHT320)	Support	4TX	4RX

- Note:
1. All of modulation mode support beamforming function except 802.11a modulation mode.
 2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
 3. The modulation and bandwidth are similar for 802.11ax mode for 20 MHz (40 MHz, 80 MHz, 160MHz), and 802.11be mode for 20 MHz (40 MHz, 80 MHz, 160MHz, 320MHz), therefore the manufacturer will control the power for 802.11ax mode is the same as the 802.11be or lower than it and investigated worst case to representative mode in test report.
 4. The EUT device modulation technique OFDMA does not support partial RUs (resource units) and channel puncturing/bandwidth reduction mechanisms.

3.3 Channel List

U-NII-5:

24 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955 MHz	5	5975 MHz	9	5995 MHz	13	6015 MHz
17	6035 MHz	21	6055 MHz	25	6075 MHz	29	6095 MHz
33	6115 MHz	37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz	61	6255 MHz
65	6275 MHz	69	6295 MHz	73	6315 MHz	77	6335 MHz
81	6355 MHz	85	6375 MHz	89	6395 MHz	93	6415 MHz

12 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz	27	6085 MHz
35	6125 MHz	43	6165 MHz	51	6205 MHz	59	6245 MHz
67	6285 MHz	75	6325 MHz	83	6365 MHz	91	6405 MHz

6 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz	55	6225 MHz
71	6305 MHz	87	6385 MHz				

3 channels are provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz

2 channels are provided for 802.11be (EHT320):

Channel	Frequency	Channel	Frequency
31	6105 MHz	63	6265 MHz

U-NII-6:

5 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
97	6435 MHz	101	6455 MHz	105	6475 MHz	109	6495 MHz
113	6515 MHz						

3 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
99	6445 MHz	107	6485 MHz	*115	6525 MHz

1 channel is provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
103	6465 MHz

1 channel is provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
*111	6505 MHz

1 channel is provided for 802.11be (EHT320):

Channel	Frequency
*95	6425 MHz

U-NII-7:

17 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
117	6535 MHz	121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz	145	6675 MHz
149	6695 MHz	153	6715 MHz	157	6735 MHz	161	6755 MHz
165	6775 MHz	169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz						

8 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
123	6565 MHz	131	6605 MHz	139	6645 MHz	147	6685 MHz
155	6725 MHz	163	6765 MHz	171	6805 MHz	179	6845 MHz

5 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
*119	6545 MHz	135	6625 MHz	151	6705 MHz	167	6785 MHz
*183	6865 MHz						

2 channels are provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency	Channel	Frequency
143	6665 MHz	*175	6825 MHz

2 channels are provided for 802.11be (EHT320):

Channel	Frequency	Channel	Frequency
*127	6585 MHz	*159	6745 MHz

U-NII-8:

12 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
185	6875 MHz	189	6895 MHz	193	6915 MHz	197	6935 MHz
201	6955 MHz	205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz	229	7095 MHz

6 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
187	6885 MHz	195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz				

2 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
199	6945 MHz	215	7025 MHz

1 channel is provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
207	6985 MHz

1 channel is provided for 802.11be (EHT320):

Channel	Frequency
*191	6905 MHz

Note: * mean these are straddle channels.

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT has AC Adapter 1(NETBIT ELECTRONICS LTD)/ AC Adapter 2(LEADER ELECTRONICS INC)/ AC Adapter 3(Delta) modes of power supply. Pre-scan these modes and find the worst case as a representative test condition.
Worst Case:	1. AC Adapter 3(Delta) is the worst case as a representative test condition.

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
Maximum RF Output Power	802.11a	CDD	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	6Mb/s
	802.11ax (HE20)	CDD & Beamforming	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	MCS0
	802.11ax (HE40)	CDD & Beamforming	3, 43, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0
	802.11ax (HE80)	CDD & Beamforming	7, 39, 87, 103, 119, 151, 183, 199, 215	BPSK	MCS0
	802.11ax (HE160)	CDD & Beamforming	15, 47, 79, 111, 143, 175, 207	BPSK	MCS0
	802.11be (EHT20)	CDD & Beamforming	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	MCS0
	802.11be (EHT40)	CDD & Beamforming	3, 43, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0
	802.11be (EHT80)	CDD & Beamforming	7, 39, 87, 103, 119, 151, 183, 199, 215	BPSK	MCS0
	802.11be (EHT160)	CDD & Beamforming	15, 47, 79, 111, 143, 175, 207	BPSK	MCS0
	802.11be (EHT320)	CDD & Beamforming	31, 63, 95, 127, 159, 191	BPSK	MCS0
Maximum Power Spectral Density	802.11a	CDD	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	6Mb/s
	802.11be (EHT20)	Beamforming	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	MCS0
	802.11be (EHT40)	Beamforming	3, 43, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0
	802.11be (EHT80)	Beamforming	7, 39, 87, 103, 119, 151, 183, 199, 215	BPSK	MCS0
	802.11be (EHT160)	Beamforming	15, 47, 79, 111, 143, 175, 207	BPSK	MCS0
	802.11be (EHT320)	Beamforming	31, 63, 95, 127, 159, 191	BPSK	MCS0
Emission Bandwidth	802.11a	CDD	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	6Mb/s
	802.11be (EHT20)	Beamforming	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	MCS0

Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
	802.11be (EHT40)	Beamforming	3, 43, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0
	802.11be (EHT80)	Beamforming	7, 39, 87, 103, 119, 151, 183, 199, 215	BPSK	MCS0
	802.11be (EHT160)	Beamforming	15, 47, 79, 111, 143, 175, 207	BPSK	MCS0
	802.11be (EHT320)	Beamforming	31, 63, 95, 127, 159, 191	BPSK	MCS0
In-Band Emission Mask	802.11a	CDD	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	6Mb/s
	802.11be (EHT20)	Beamforming	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	MCS0
	802.11be (EHT40)	Beamforming	3, 43, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0
	802.11be (EHT80)	Beamforming	7, 39, 87, 103, 119, 151, 183, 199, 215	BPSK	MCS0
	802.11be (EHT160)	Beamforming	15, 47, 79, 111, 143, 175, 207	BPSK	MCS0
	802.11be (EHT320)	Beamforming	31, 63, 95, 127, 159, 191	BPSK	MCS0
Occupied Bandwidth	802.11a	CDD	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	6Mb/s
	802.11be (EHT20)	Beamforming	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	MCS0
	802.11be (EHT40)	Beamforming	3, 43, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0
	802.11be (EHT80)	Beamforming	7, 39, 87, 103, 119, 151, 183, 199, 215	BPSK	MCS0
	802.11be (EHT160)	Beamforming	15, 47, 79, 111, 143, 175, 207	BPSK	MCS0
	802.11be (EHT320)	Beamforming	31, 63, 95, 127, 159, 191	BPSK	MCS0
Contention-based Protocol	802.11be (EHT20)	-	45, 105, 149, 209	BPSK	MCS0
	802.11be (EHT320)	-	31, 95, 159, 191	BPSK	MCS0
AC Power Conducted Emissions	802.11be (EHT320)	Beamforming	63	BPSK	MCS0
Unwanted Emissions below 1 GHz	802.11be (EHT320)	Beamforming	63	BPSK	MCS0
Unwanted Emissions above 1 GHz	802.11a	CDD	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	6Mb/s
	802.11be (EHT20)	CDD & Beamforming	1, 45, 93, 97, 105, 113, 117, 149, 181, 185, 209, 229	BPSK	MCS0
	802.11be (EHT40)	CDD & Beamforming	3, 43, 91, 99, 107, 115, 123, 155, 179, 187, 211, 227	BPSK	MCS0

Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
	802.11be (EHT80)	CDD & Beamforming	7, 39, 87, 103, 119, 151, 183, 199, 215	BPSK	MCS0
	802.11be (EHT160)	CDD & Beamforming	15, 47, 79, 111, 143, 175, 207	BPSK	MCS0
	802.11be (EHT320)	CDD & Beamforming	31, 63, 95, 127, 159, 191	BPSK	MCS0
Note: not support channel puncturing.					

3.5 Duty Cycle of Test Signal

802.11a: Duty cycle = 3.01 ms / 3.039 ms x 100% = 99.0%


802.11be (EHT20): Duty cycle = 2.866 ms / 2.897 ms x 100% = 98.9%

802.11be (EHT40): Duty cycle = 2.849 ms / 2.879 ms x 100% = 99.0%


802.11be (EHT80): Duty cycle = 2.843 ms / 2.872 ms x 100% = 99.0%

802.11be (EHT160): Duty cycle = 2.843 ms / 2.872 ms x 100% = 99.0%

802.11be (EHT320): Duty cycle = 2.847 ms / 2.876 ms x 100% = 99.0%

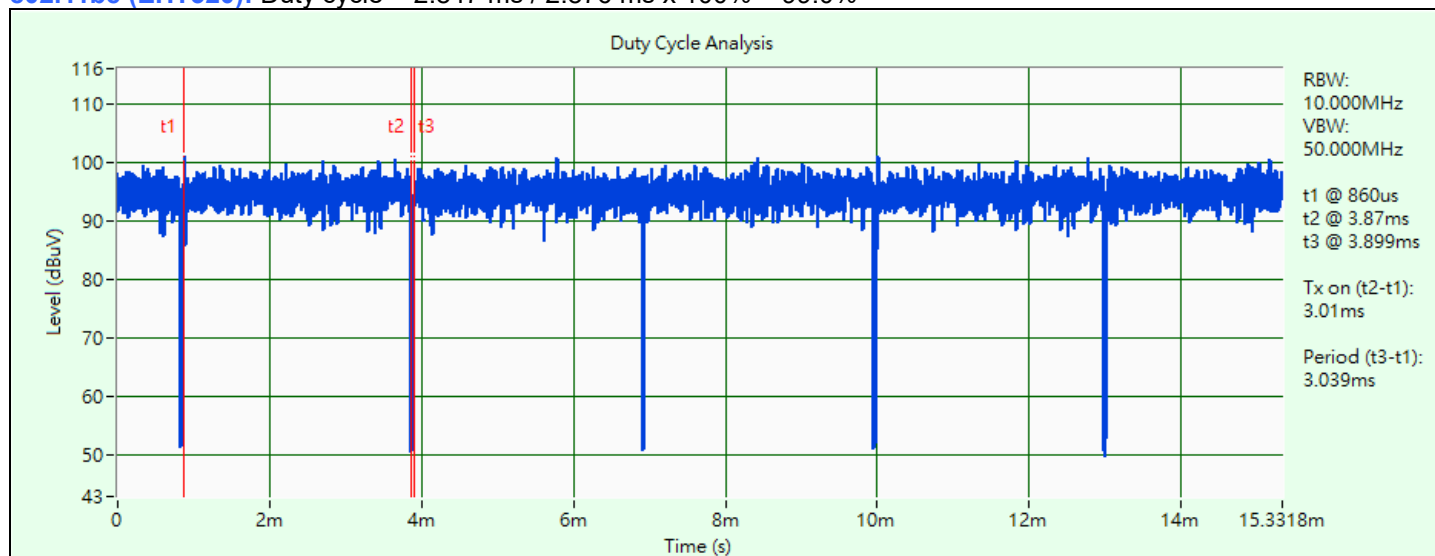


802.11a

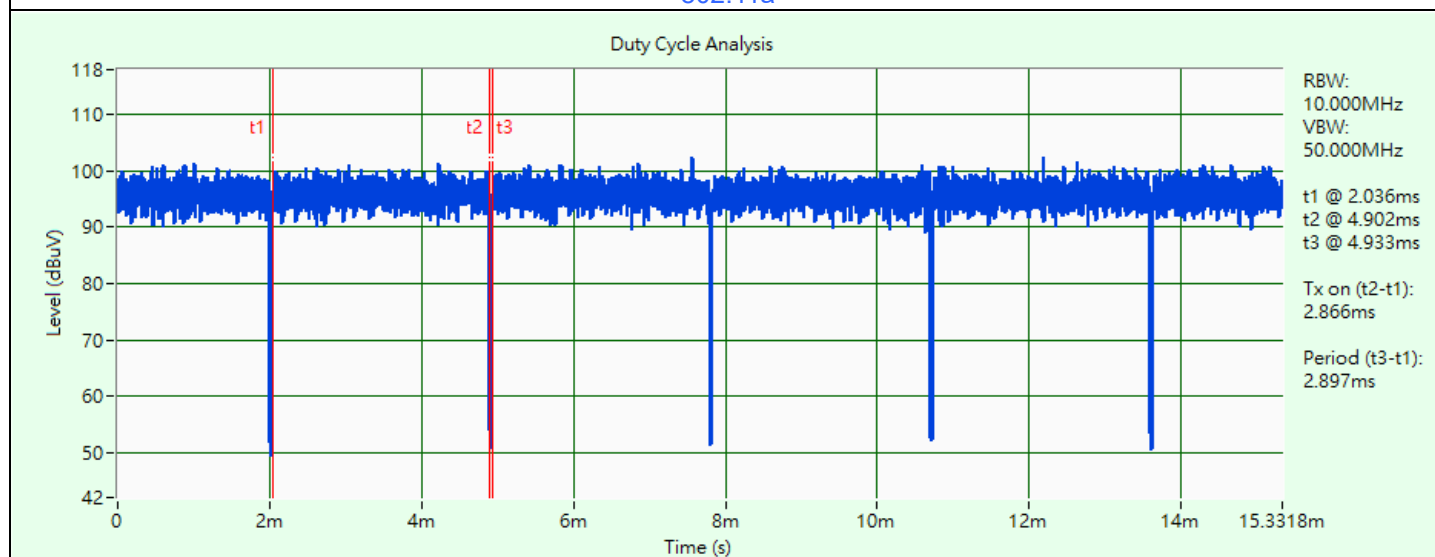


802.11be (EHT20)

Duty Cycle Analysis

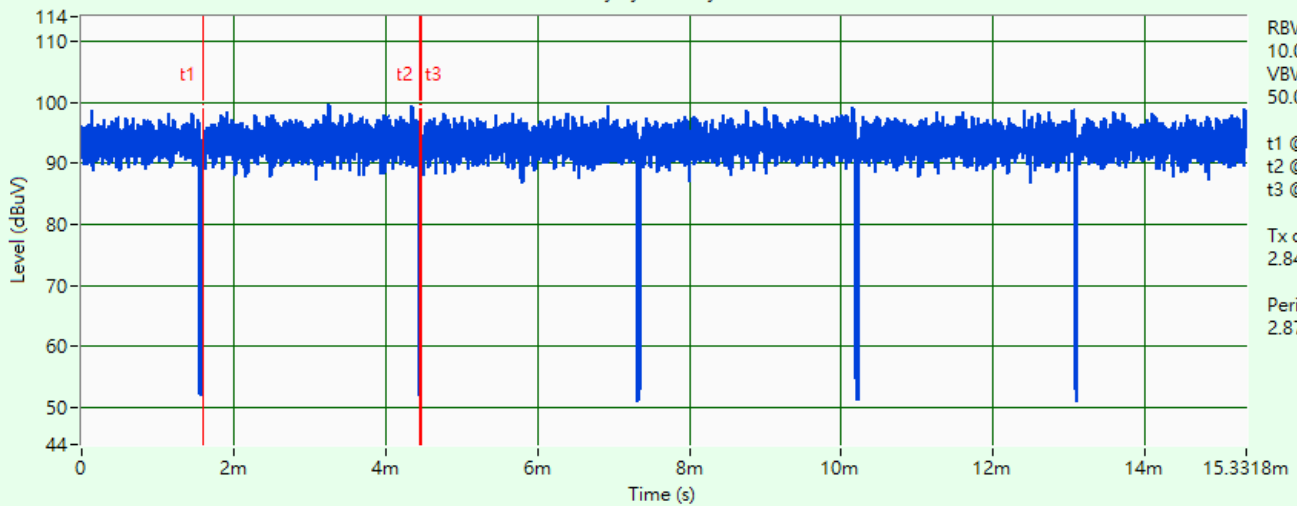


802.11be (EHT40)

Duty Cycle Analysis

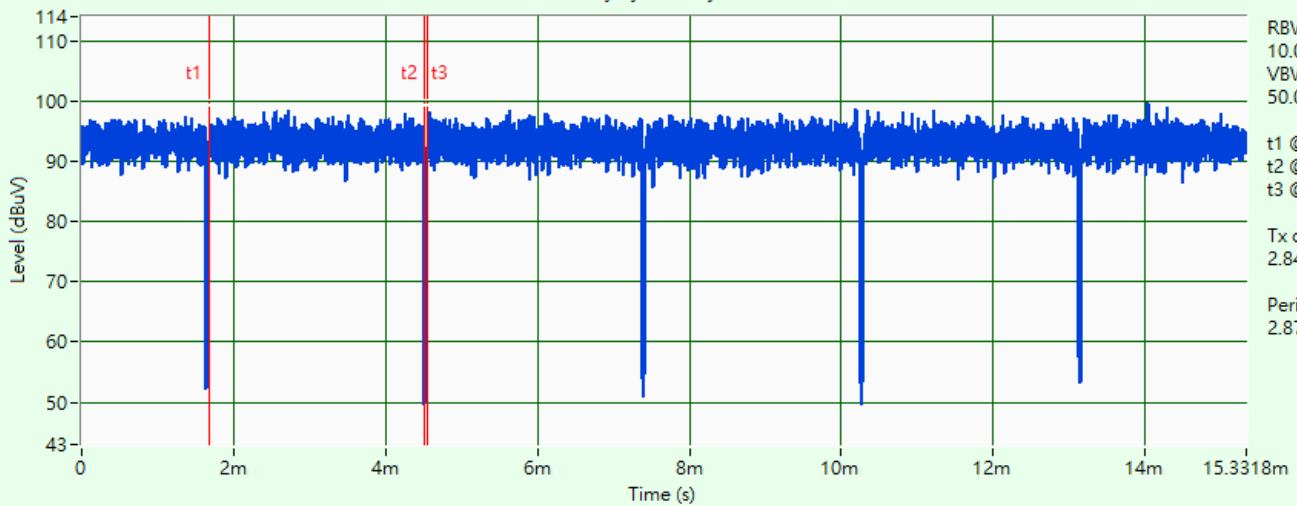


802.11be (EHT80)

Duty Cycle Analysis

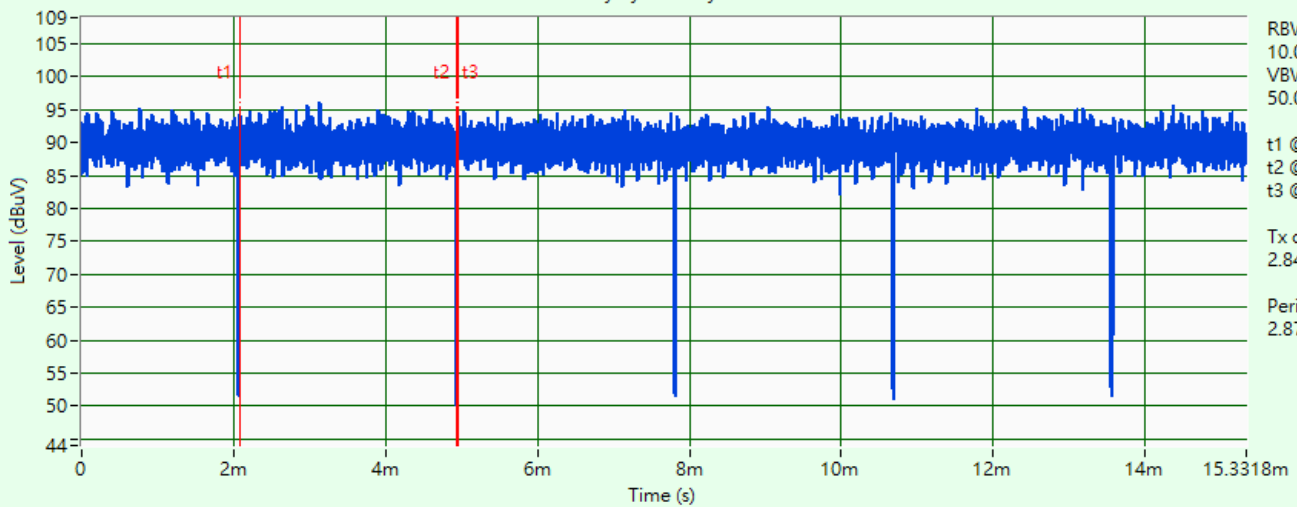


802.11be (EHT160)

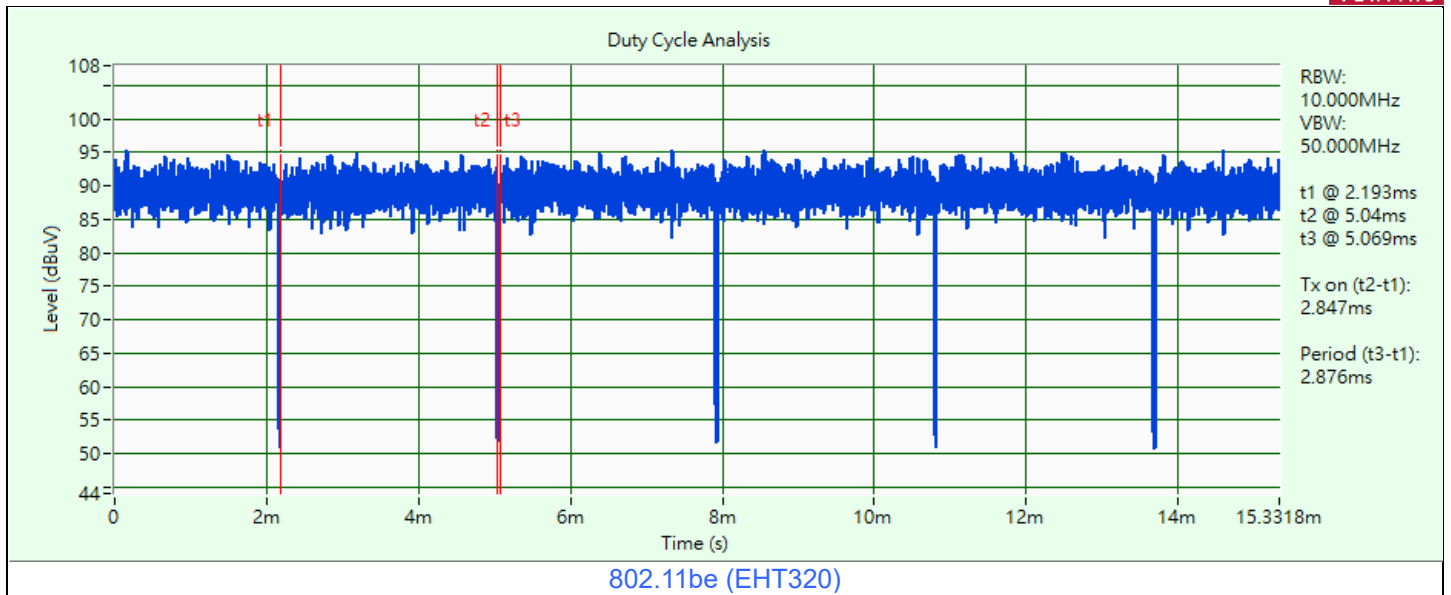

3.6 Test Program Used and Operation Descriptions

Controlling software (accessMTool 3.3.0.9) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

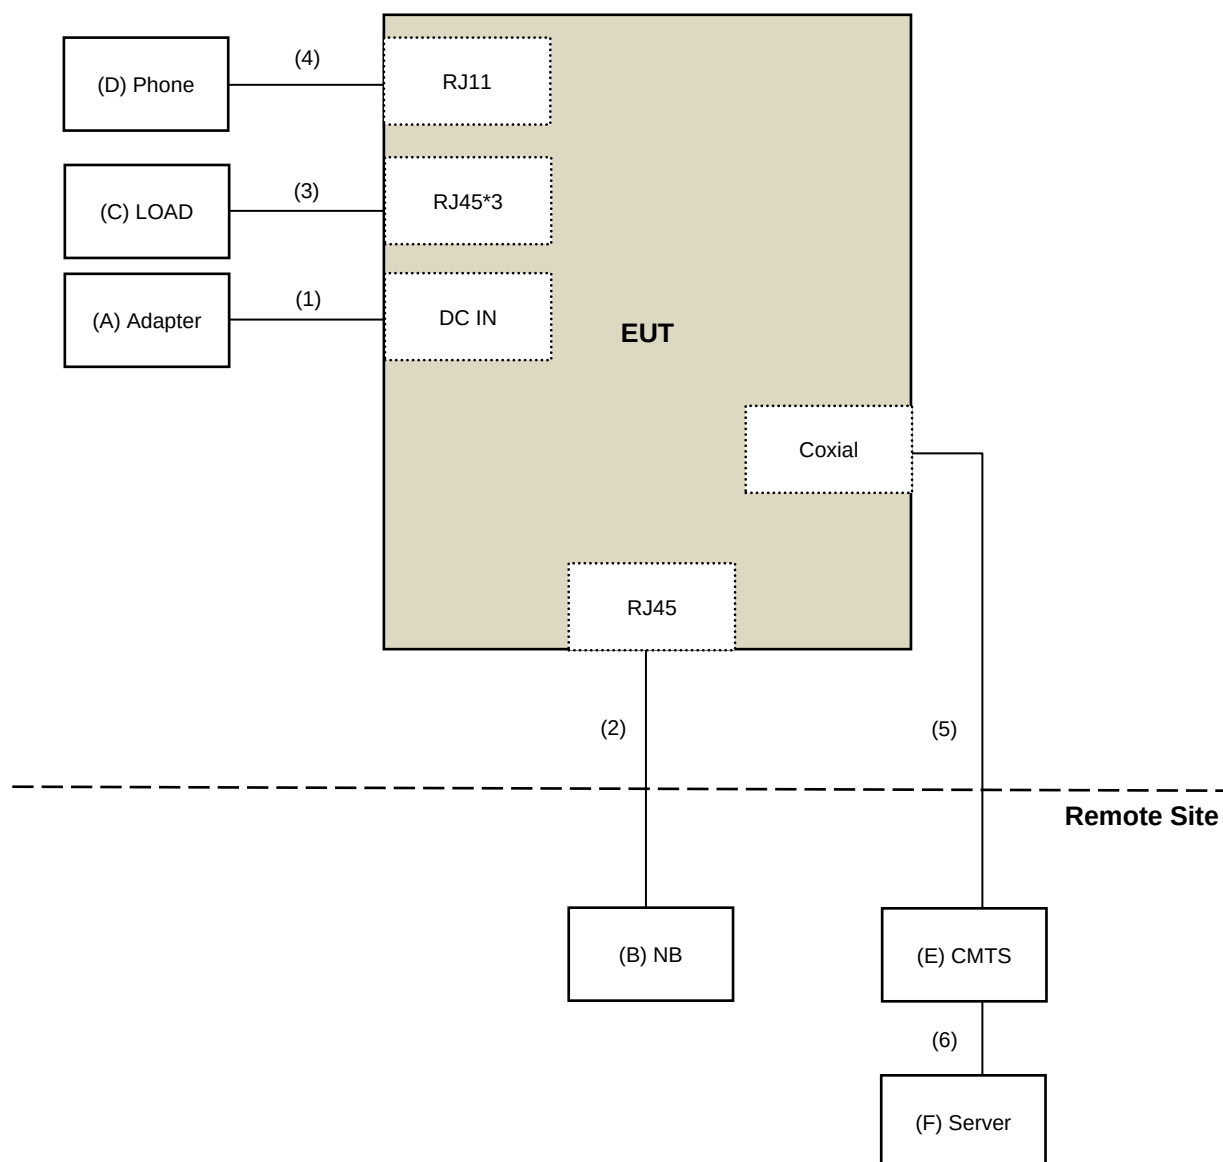

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	Delta	ADH-80AW BA	N/A	N/A	Supplied by applicant
B	NB	DELL	LA65NS2-01	N/A	N/A	Provided by Lab
C	LOAD	BV	BV	N/A	N/A	Provided by Lab
D	Phone	ISit0	IS-333	N/A	N/A	Provided by Lab
E	CMTS	Harmonic	D4.0 CMTS System	N/A	N/A	Supplied by applicant
F	Server	Harmonic	D4.0 CMTS System	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	Adapter DC cable	1	1.8	N	0	Supplied by applicant
2	LAN cable	1	10	N	0	Provided by Lab
3	LAN cable	3	1.5	N	0	Provided by Lab
4	Telecom	1	2.17	N	0	Provided by Lab
5	Coaxial	1	10	Y	0	Provided by Lab
6	Coaxial	1	15	Y	0	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Maximum RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFA-515BSN	N/A	N/A	N/A
EXA Signal Analyzer Agilent	N9010A	MY52220207	2024/12/30	2025/12/29
Horn Antenna RFSPIN	DRH18-E	210104A18E	2024/11/10	2025/11/9
Horn Antenna Schwarzbeck	BBHA 9170	9170-1049	2024/11/10	2025/11/9
MXE EMI Receiver Agilent	N9038A	MY52260177	2024/9/19	2025/9/18
Preamplifier Agilent	83017A	MY39501357	2024/6/12	2025/6/11
Preamplifier EMCI	EMC184045SE	980788	2025/1/14	2026/1/13
RF Coaxial Cable EMCI	EMC101G-KM-KM-2000	201254	2025/1/14	2026/1/13
	EMC101G-KM-KM-3000	201258	2025/1/14	2026/1/13
	EMC101G-KM-KM-5000	201261	2025/1/14	2026/1/13
	EMC104-SM-SM-1000	210103	2025/1/14	2026/1/13
	EMC104-SM-SM-3000	201241	2025/1/14	2026/1/13
	EMC104-SM-SM-9000	201244	2025/1/14	2026/1/13
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208676	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 9.
2. Tested Date: 2025/2/3 ~ 2025/2/5

4.2 Maximum Power Spectral Density

Refer to section 4.1 to get the tested date and information of the instruments.

4.3 Emission Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030A	MY54490260	2024/7/17	2025/7/16
Signal Analyzer R&S	FSV40	101042	2024/9/12	2025/9/11
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in LK - Oven
2. Tested Date: 2025/1/23 ~ 2025/2/5

4.4 In-Band Emission Mask

Refer to section 4.3 to get the tested date and information of the instruments.

4.5 Occupied Bandwidth

Refer to section 4.3 to get the tested date and information of the instruments.

4.6 Contention-based Protocol

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
EXA Signal Analyzer Agilent	N9010A	MY52220207	2023/12/28	2024/12/27
MXG Vector Signal Generator Agilent	N5182B	MY53050430	2024/11/29	2025/11/28
MXG Vector Signal Generator Keysight	N5182BU	MY59360189	2024/11/29	2025/11/28
Power Divider Woken	0120A02058001M	DCMD33WIK3	2024/4/29	2025/4/28
		DCMD33WIK7	2024/4/29	2025/4/28

Notes:

1. The test was performed in Adaptivity room.
2. Tested Date: 2024/12/17

4.7 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
* Isolation Transformer Erika Fiedler	D-65396	46	2023/4/20	2025/4/19
50 ohm terminal resistance LYNICS	0900510	E1-011484	2024/8/12	2025/8/11
50 ohm terminal resistance SUHNER	65BNC-5001	E1-010773	2024/3/13	2025/3/12
EMI Test Receiver R&S	ESCI	100412	2024/9/3	2025/9/2
Fixed Attenuator STI	STI02-2200-10	NO.1	2024/9/12	2025/9/11
Isolation Transformer Erika Fiedler	D-65396	017	2024/9/18	2025/9/17
LISN R&S	ENV216	100024	2024/9/6	2025/9/5
		101196	2024/5/22	2025/5/21
		101197	2024/7/11	2025/7/10
LISN Schwarzbeck	NNLK 8121	8121-731	2024/6/12	2025/6/11
		8121-808	2024/4/26	2025/4/25
	NNLK 8129	8129229	2024/10/14	2025/10/13
RF Coaxial Cable PEWC	5D-FB	Cable-CO10-01	2024/2/7	2025/2/6
Software BVADT	Cond_V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2024/8/28	2025/8/27

Notes:

- * The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA
- The test was performed in Linkou Conduction 10.
- Tested Date: 2024/11/8

4.8 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	137	2024/10/9	2025/10/8
Coupling / Decoupling Network Schwarzbeck	CDNE-M2	00097	2024/5/28	2025/5/27
	CDNE-M3	00091	2024/5/28	2025/5/27
MXE EMI Receiver Agilent	N9038A	MY51210129	2024/3/22	2025/3/21
Preamplifier Agilent	8447D	2944A11064	2024/2/15	2025/2/14
Preamplifier EMCI	EMC001340	980269	2024/6/25	2025/6/24
Radiating Loop Antenna TESEQ	RLA 6120-20	80002	2024/7/30	2025/7/29
RF Coaxial Cable Pacfic	8D-FB	Cable-CH6-02	2024/6/25	2025/6/24
Signal Analyzer R&S	FSV40	101544	2024/6/20	2025/6/19
Software BVADT	Radiated_V8.7.08	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 6 (CH 6).
2. Tested Date: 2024/11/8

4.9 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFA-515BSN	N/A	N/A	N/A
EXA Signal Analyzer Agilent	N9010A	MY52220207	2023/12/28 2024/12/30	2024/12/27 2025/12/29
Horn Antenna RFSPIN	DRH18-E	210104A18E	2024/11/10	2025/11/9
Horn Antenna Schwarzbeck	BBHA 9170	9170-1049	2024/11/10	2025/11/9
MXE EMI Receiver Agilent	N9038A	MY52260177	2024/9/19	2025/9/18
Preamplifier Agilent	83017A	MY39501357	2024/6/12	2025/6/11
Preamplifier EMCI	EMC184045SE	980788	2024/1/15 2025/1/14	2025/1/14 2026/1/13
RF Coaxial Cable EMCI	EMC101G-KM-KM-2000	201254	2024/1/15 2025/1/14	2025/1/14 2026/1/13
	EMC101G-KM-KM-3000	201258	2024/1/15 2025/1/14	2025/1/14 2026/1/13
	EMC101G-KM-KM-5000	201261	2024/1/15 2025/1/14	2025/1/14 2026/1/13
	EMC104-SM-SM-1000	210103	2024/1/15 2025/1/14	2025/1/14 2026/1/13
	EMC104-SM-SM-3000	201241	2024/1/15 2025/1/14	2025/1/14 2026/1/13
	EMC104-SM-SM-9000	201244	2024/1/15 2025/1/14	2025/1/14 2026/1/13
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208676	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 9.
2. Tested Date: 2024/12/4 ~ 2025/1/22

5 Limits of Test Items

5.1 Maximum RF Output Power

Operation Band	Equipment Class	Limit
		Maximum Average Power
U-NII-5 U-NII-6 U-NII-7 U-NII-8	6ID: 15E 6 GHz Low-power indoor access point	EIRP 30 dBm

5.2 Maximum Power Spectral Density

Operation Band	Equipment Class	Limit
		Maximum Power Density
U-NII-5 U-NII-6 U-NII-7 U-NII-8	6ID: 15E 6 GHz Low-power indoor access point	EIRP 5 dBm/MHz

5.3 Emission Bandwidth

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 MHz.

5.4 In-Band Emission Mask

Test Item	Frequencies (MHz)	(X) dBc* ¹
Emission Mask	At 1 MHz outside of channel edge	20
	At one channel bandwidth from the channel center* ²	28
	At one- and one-half times the channel bandwidth away from channel center* ³	40
	More than one- and one-half times the channel bandwidth	40

*¹ : The power spectral density must be suppressed by "x" dB

*² : At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression,

*³ : At frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression.

5.5 Occupied Bandwidth

The results are for reference only.

5.6 Contention-based Protocol

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm (The threshold is referenced to a 0 dBi antenna gain.) or lower. Additionally, indoor low-power devices must detect co-channel energy with 90% or greater certainty.

5.7 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.8 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.9 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Frequencies (MHz)	EIRP Limit	Equivalent Field Strength at 3 m
5925 MHz > F > 7125 MHz	Peak: -7 (dBm/MHz)	88.2 (dBuV/m)
	Average: -27 (dBm/MHz)	68.2 (dBuV/m)


Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

6 Test Arrangements

6.1 Maximum RF Output Power

6.1.1 Test Setup

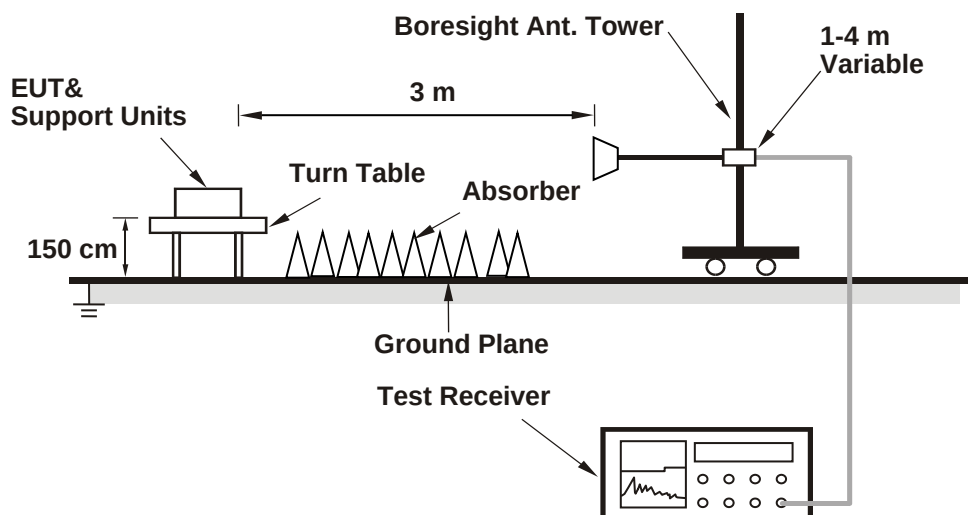

6.1.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP level.
- Follow ANSI C63.10 section 12.7.3, $EIRP \text{ Value (dBm)} = \text{Field Strength Value (dBuV / m)} + \text{Correction Factor @ 3 m}$.
- $\text{Correction Factor (dB) @ 3 m} = 20\log(D) - 104.77 = -95.23 \text{ dB}$; where D is the measurement distance @3 m.

Spectrum analyzer setting as below:


Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

Note: When measuring power, use compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

6.2 Maximum Power Spectral Density

6.2.1 Test Setup

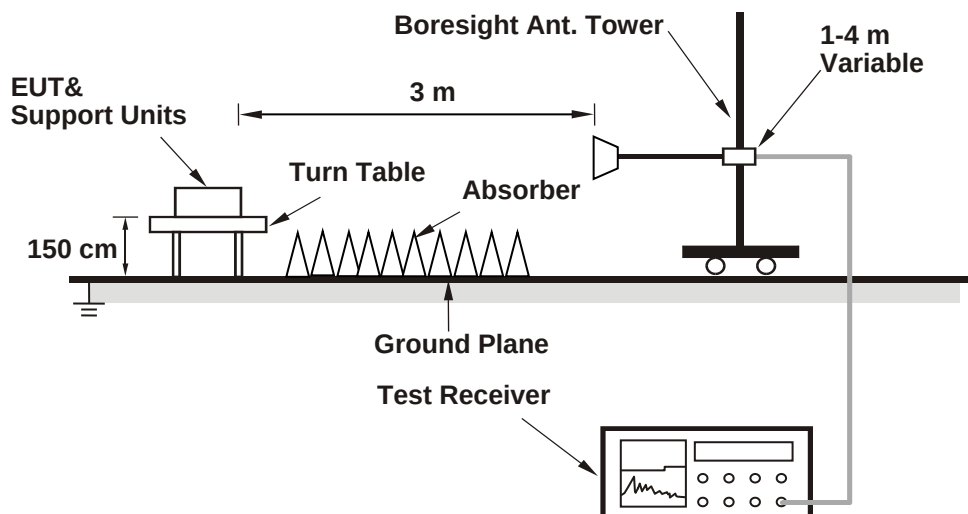

6.2.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP level.
- Follow ANSI C63.10 section 12.7.3, $EIRP \text{ Value (dBm)} = \text{Field Strength Value (dBuV/m)} + \text{Correction Factor @ 3 m}$.
- $\text{Correction Factor (dB) @ 3 m} = 20\log(D) - 104.77$; where D is the measurement distance @3 m = -95.23 dB


Spectrum analyzer setting as below:

Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

6.3 Emission Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.4 In-Band Emission Mask

6.4.1 Test Setup




6.4.2 Test Procedure

- Connect output of the antenna port to a spectrum analyzer and adjust appropriate attenuation.
- Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (Determine the channel edge.)
- Measure the power spectral density (for emissions mask reference) using the following procedure:
 - Set the span to encompass the entire 26 dB EBW of the signal.
 - Set RBW = same RBW used for 26 dB EBW measurement.
 - Set VBW $\geq [3 \times \text{RBW}]$.
 - Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - Sweep time = auto.
 - Detector = RMS (i.e., power averaging).
 - Trace average at least 100 traces in power averaging (rms) mode.
 - Use the peak search function on the instrument to find the peak of the spectrum.
- Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - Suppressed by 28 dB at one channel bandwidth from the channel center.
 - Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
- Adjust the span to encompass the entire mask as necessary and clear trace.
- Trace average at least 100 traces in power averaging (rms) mode.
- Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

6.5 Occupied Bandwidth

6.5.1 Test Setup




6.5.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

6.6 Contention-based Protocol

6.6.1 Test Setup

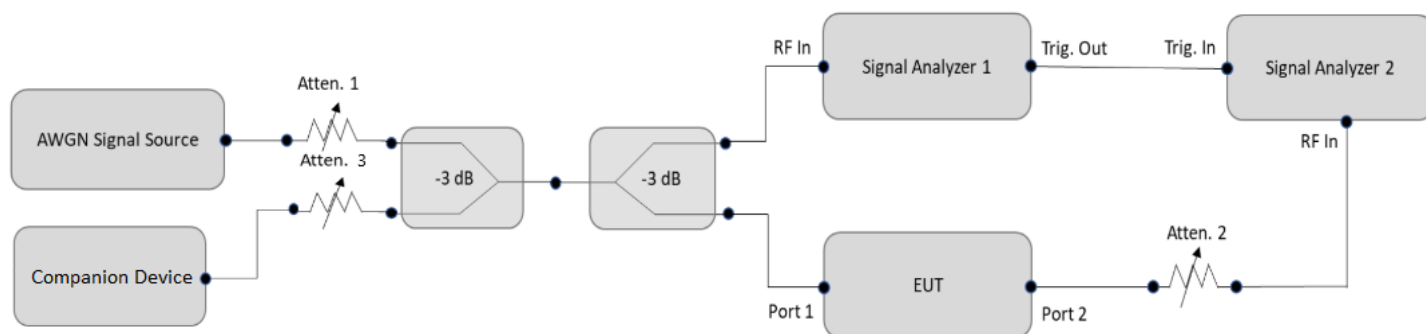

6.6.2 Test Procedure


- Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
- Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters (set as following section 4.7.5 EUT operating condition).
- Determine number of times detection threshold test as following table,

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Same as EUT transmission
$BW_{Inc} < BW_{EUT} \leq 2 \times BW_{Inc}$	Once	Contained within BW_{EUT}
$2 \times BW_{Inc} < BW_{EUT} \leq 4 \times BW_{Inc}$	Twice. (Incumbent transmission is contained within BW_{EUT})	Closely to the lower edge and upper edge of the EUT Channel
$BW_{EUT} > 4 \times BW_{Inc}$	Three times	Closely to the lower edge ,in the middle and upper edge of the EUT Channel

- Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use step c table to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT.
- Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
- Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- Refer to step c table to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step d, choose a different center frequency for the AWGN signal and repeat the process.

6.7 AC Power Conducted Emissions

6.7.1 Test Setup

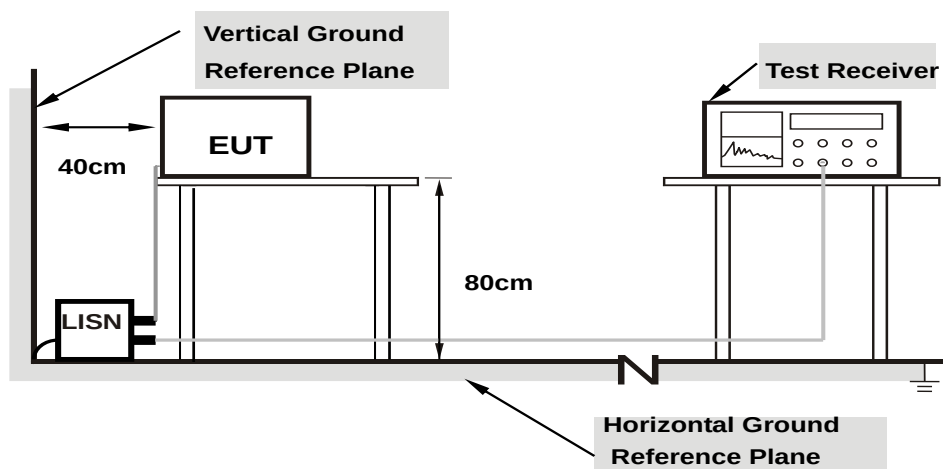

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.8 Unwanted Emissions below 1 GHz

6.8.1 Test Setup

For Radiated emission below 30 MHz

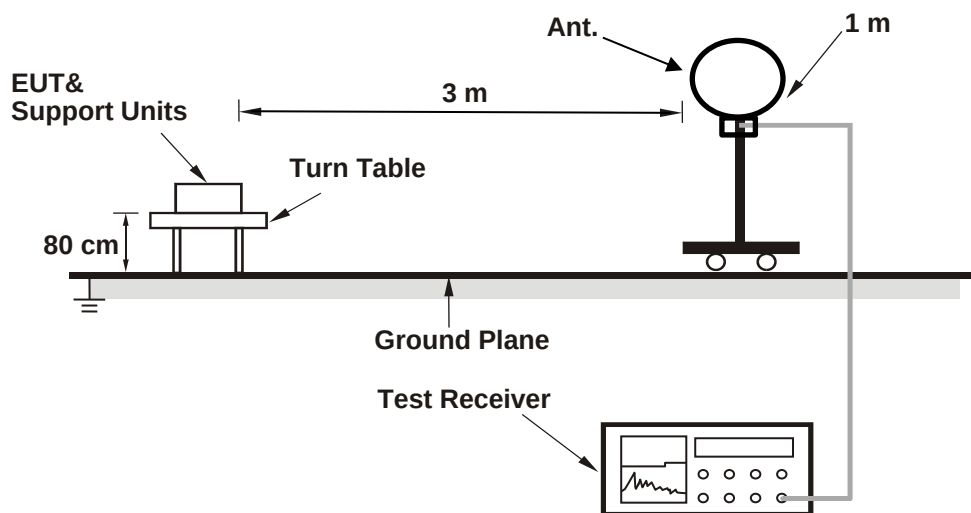

For Radiated emission above 30 MHz

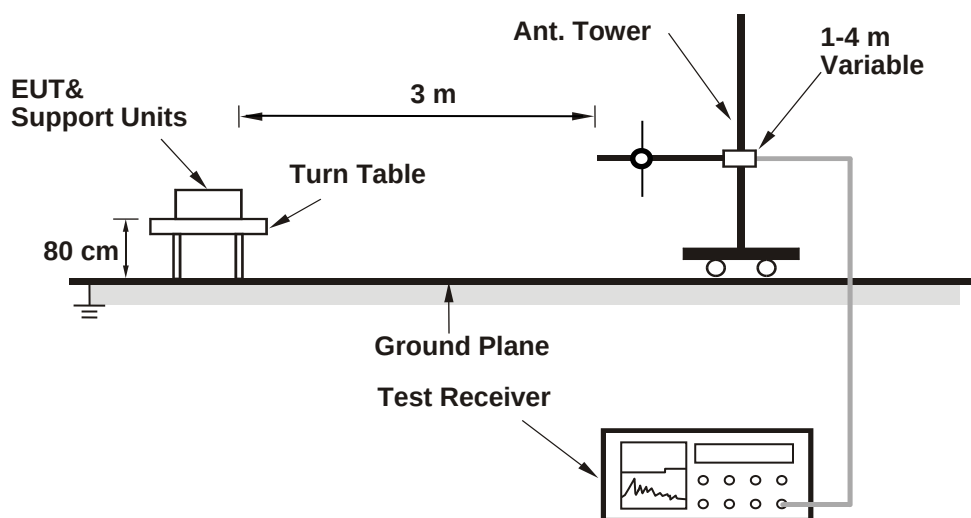

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.9 Unwanted Emissions above 1 GHz

6.9.1 Test Setup

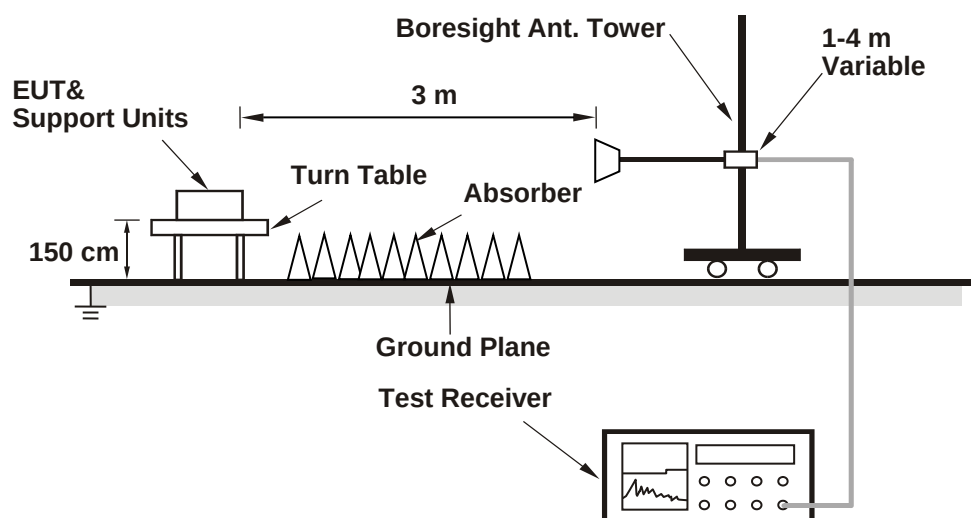

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.9.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 Maximum RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

802.11a CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	109.65	-95.23	27.669	14.42	30	Pass
45	6175	109.62	-95.23	27.479	14.39	30	Pass
93	6415	109.51	-95.23	26.792	14.28	30	Pass
97	6435	109.47	-95.23	26.546	14.24	30	Pass
105	6475	109.46	-95.23	26.485	14.23	30	Pass
113	6515	109.58	-95.23	27.227	14.35	30	Pass
117	6535	109.45	-95.23	26.424	14.22	30	Pass
149	6695	109.51	-95.23	26.792	14.28	30	Pass
181	6855	109.42	-95.23	26.242	14.19	30	Pass
185	6875	109.45	-95.23	26.424	14.22	30	Pass
209	6995	109.41	-95.23	26.182	14.18	30	Pass
229	7095	108.77	-95.23	22.594	13.54	30	Pass

802.11ax (HE20) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	109.55	-95.23	27.04	14.32	30	Pass
45	6175	109.44	-95.23	26.363	14.21	30	Pass
93	6415	109.27	-95.23	25.351	14.04	30	Pass
97	6435	109.17	-95.23	24.774	13.94	30	Pass
105	6475	109.25	-95.23	25.235	14.02	30	Pass
113	6515	109.13	-95.23	24.547	13.90	30	Pass
117	6535	109.16	-95.23	24.717	13.93	30	Pass
149	6695	109.46	-95.23	26.485	14.23	30	Pass
181	6855	109.45	-95.23	26.424	14.22	30	Pass
185	6875	109.33	-95.23	25.704	14.10	30	Pass
209	6995	109.55	-95.23	27.04	14.32	30	Pass
229	7095	109.38	-95.23	26.002	14.15	30	Pass

802.11ax (HE40) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
3	5965	111.93	-95.23	46.774	16.70	30	Pass
43	6165	111.81	-95.23	45.499	16.58	30	Pass
91	6405	111.73	-95.23	44.668	16.50	30	Pass
99	6445	111.90	-95.23	46.452	16.67	30	Pass
107	6485	111.76	-95.23	44.978	16.53	30	Pass
115	6525	111.90	-95.23	46.452	16.67	30	Pass
123	6565	111.72	-95.23	44.566	16.49	30	Pass
155	6725	111.87	-95.23	46.132	16.64	30	Pass
179	6845	111.86	-95.23	46.026	16.63	30	Pass
187	6885	111.82	-95.23	45.604	16.59	30	Pass
211	7005	111.92	-95.23	46.666	16.69	30	Pass
227	7085	111.84	-95.23	45.814	16.61	30	Pass

802.11ax (HE80) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
7	5985	114.71	-95.23	88.716	19.48	30	Pass
39	6145	114.77	-95.23	89.95	19.54	30	Pass
87	6385	114.87	-95.23	92.045	19.64	30	Pass
103	6465	114.82	-95.23	90.991	19.59	30	Pass
119	6545	114.91	-95.23	92.897	19.68	30	Pass
151	6705	114.81	-95.23	90.782	19.58	30	Pass
183	6865	114.70	-95.23	88.512	19.47	30	Pass
199	6945	114.70	-95.23	88.512	19.47	30	Pass
215	7025	114.95	-95.23	93.756	19.72	30	Pass

802.11ax (HE160) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
15	6025	118.12	-95.23	194.536	22.89	30	Pass
47	6185	117.94	-95.23	186.638	22.71	30	Pass
79	6345	117.72	-95.23	177.419	22.49	30	Pass
111	6505	117.69	-95.23	176.198	22.46	30	Pass
143	6665	117.67	-95.23	175.388	22.44	30	Pass
175	6825	117.47	-95.23	167.494	22.24	30	Pass
207	6985	117.91	-95.23	185.353	22.68	30	Pass

802.11be (EHT20) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	109.63	-95.23	27.542	14.40	30	Pass
45	6175	109.52	-95.23	26.853	14.29	30	Pass
93	6415	109.31	-95.23	25.586	14.08	30	Pass
97	6435	109.26	-95.23	25.293	14.03	30	Pass
105	6475	109.32	-95.23	25.645	14.09	30	Pass
113	6515	109.28	-95.23	25.41	14.05	30	Pass
117	6535	109.31	-95.23	25.586	14.08	30	Pass
149	6695	109.58	-95.23	27.227	14.35	30	Pass
181	6855	109.52	-95.23	26.853	14.29	30	Pass
185	6875	109.47	-95.23	26.546	14.24	30	Pass
209	6995	109.59	-95.23	27.29	14.36	30	Pass
229	7095	109.51	-95.23	26.792	14.28	30	Pass

802.11be (EHT40) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
3	5965	111.97	-95.23	47.206	16.74	30	Pass
43	6165	111.92	-95.23	46.666	16.69	30	Pass
91	6405	111.88	-95.23	46.238	16.65	30	Pass
99	6445	111.95	-95.23	46.989	16.72	30	Pass
107	6485	111.89	-95.23	46.345	16.66	30	Pass
115	6525	111.93	-95.23	46.774	16.70	30	Pass
123	6565	111.87	-95.23	46.132	16.64	30	Pass
155	6725	111.95	-95.23	46.989	16.72	30	Pass
179	6845	111.96	-95.23	47.098	16.73	30	Pass
187	6885	111.92	-95.23	46.666	16.69	30	Pass
211	7005	111.94	-95.23	46.881	16.71	30	Pass
227	7085	111.92	-95.23	46.666	16.69	30	Pass

802.11be (EHT80) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
7	5985	114.76	-95.23	89.743	19.53	30	Pass
39	6145	114.92	-95.23	93.111	19.69	30	Pass
87	6385	114.95	-95.23	93.756	19.72	30	Pass
103	6465	114.91	-95.23	92.897	19.68	30	Pass
119	6545	114.97	-95.23	94.189	19.74	30	Pass
151	6705	114.95	-95.23	93.756	19.72	30	Pass
183	6865	114.83	-95.23	91.201	19.60	30	Pass
199	6945	114.81	-95.23	90.782	19.58	30	Pass
215	7025	115.05	-95.23	95.94	19.82	30	Pass

802.11be (EHT160) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
15	6025	118.15	-95.23	195.884	22.92	30	Pass
47	6185	118.02	-95.23	190.108	22.79	30	Pass
79	6345	117.82	-95.23	181.552	22.59	30	Pass
111	6505	117.75	-95.23	178.649	22.52	30	Pass
143	6665	117.78	-95.23	179.887	22.55	30	Pass
175	6825	117.58	-95.23	171.791	22.35	30	Pass
207	6985	117.94	-95.23	186.638	22.71	30	Pass

802.11be (EHT320) CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
31	6105	120.68	-95.23	350.752	25.45	30	Pass
63	6265	120.73	-95.23	354.813	25.50	30	Pass
95	6425	120.72	-95.23	353.997	25.49	30	Pass
127	6585	120.76	-95.23	357.273	25.53	30	Pass
159	6745	120.66	-95.23	349.14	25.43	30	Pass
191	6905	119.45	-95.23	264.241	24.22	30	Pass

802.11ax (HE20) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	113.26	-95.23	63.533	18.03	30	Pass
45	6175	113.05	-95.23	60.534	17.82	30	Pass
93	6415	112.18	-95.23	49.545	16.95	30	Pass
97	6435	112.40	-95.23	52.119	17.17	30	Pass
105	6475	112.45	-95.23	52.723	17.22	30	Pass
113	6515	112.40	-95.23	52.119	17.17	30	Pass
117	6535	113.03	-95.23	60.256	17.80	30	Pass
149	6695	113.23	-95.23	63.096	18.00	30	Pass
181	6855	113.11	-95.23	61.376	17.88	30	Pass
185	6875	113.20	-95.23	62.661	17.97	30	Pass
209	6995	113.16	-95.23	62.087	17.93	30	Pass
229	7095	112.90	-95.23	58.479	17.67	30	Pass

802.11ax (HE40) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
3	5965	115.37	-95.23	103.276	20.14	30	Pass
43	6165	115.43	-95.23	104.713	20.20	30	Pass
91	6405	115.23	-95.23	100	20.00	30	Pass
99	6445	115.28	-95.23	101.158	20.05	30	Pass
107	6485	115.74	-95.23	112.46	20.51	30	Pass
115	6525	115.75	-95.23	112.72	20.52	30	Pass
123	6565	115.37	-95.23	103.276	20.14	30	Pass
155	6725	115.72	-95.23	111.944	20.49	30	Pass
179	6845	115.43	-95.23	104.713	20.20	30	Pass
187	6885	115.66	-95.23	110.408	20.43	30	Pass
211	7005	115.81	-95.23	114.288	20.58	30	Pass
227	7085	115.74	-95.23	112.46	20.51	30	Pass

802.11ax (HE80) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
7	5985	118.16	-95.23	196.336	22.93	30	Pass
39	6145	117.89	-95.23	184.502	22.66	30	Pass
87	6385	117.84	-95.23	182.39	22.61	30	Pass
103	6465	117.93	-95.23	186.209	22.70	30	Pass
119	6545	117.87	-95.23	183.654	22.64	30	Pass
151	6705	118.14	-95.23	195.434	22.91	30	Pass
183	6865	117.96	-95.23	187.499	22.73	30	Pass
199	6945	118.02	-95.23	190.108	22.79	30	Pass
215	7025	117.90	-95.23	184.927	22.67	30	Pass

802.11ax (HE160) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
15	6025	121.21	-95.23	396.278	25.98	30	Pass
47	6185	121.21	-95.23	396.278	25.98	30	Pass
79	6345	121.02	-95.23	379.315	25.79	30	Pass
111	6505	120.96	-95.23	374.111	25.73	30	Pass
143	6665	120.92	-95.23	370.681	25.69	30	Pass
175	6825	120.45	-95.23	332.66	25.22	30	Pass
207	6985	121.00	-95.23	377.572	25.77	30	Pass

802.11be (EHT20) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
1	5955	113.45	-95.23	66.374	18.22	30	Pass
45	6175	113.22	-95.23	62.951	17.99	30	Pass
93	6415	112.33	-95.23	51.286	17.10	30	Pass
97	6435	112.54	-95.23	53.827	17.31	30	Pass
105	6475	112.61	-95.23	54.702	17.38	30	Pass
113	6515	112.59	-95.23	54.45	17.36	30	Pass
117	6535	113.15	-95.23	61.944	17.92	30	Pass
149	6695	113.38	-95.23	65.313	18.15	30	Pass
181	6855	113.26	-95.23	63.533	18.03	30	Pass
185	6875	113.35	-95.23	64.863	18.12	30	Pass
209	6995	113.32	-95.23	64.417	18.09	30	Pass
229	7095	113.09	-95.23	61.094	17.86	30	Pass

802.11be (EHT40) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
3	5965	115.51	-95.23	106.66	20.28	30	Pass
43	6165	115.62	-95.23	109.396	20.39	30	Pass
91	6405	115.42	-95.23	104.472	20.19	30	Pass
99	6445	115.47	-95.23	105.682	20.24	30	Pass
107	6485	115.85	-95.23	115.345	20.62	30	Pass
115	6525	115.92	-95.23	117.22	20.69	30	Pass
123	6565	115.51	-95.23	106.66	20.28	30	Pass
155	6725	115.82	-95.23	114.551	20.59	30	Pass
179	6845	115.62	-95.23	109.396	20.39	30	Pass
187	6885	115.82	-95.23	114.551	20.59	30	Pass
211	7005	115.91	-95.23	116.95	20.68	30	Pass
227	7085	115.94	-95.23	117.761	20.71	30	Pass

802.11be (EHT80) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
7	5985	118.35	-95.23	205.116	23.12	30	Pass
39	6145	118.09	-95.23	193.197	22.86	30	Pass
87	6385	118.04	-95.23	190.985	22.81	30	Pass
103	6465	118.05	-95.23	191.426	22.82	30	Pass
119	6545	118.02	-95.23	190.108	22.79	30	Pass
151	6705	118.32	-95.23	203.704	23.09	30	Pass
183	6865	118.11	-95.23	194.089	22.88	30	Pass
199	6945	118.16	-95.23	196.336	22.93	30	Pass
215	7025	118.04	-95.23	190.985	22.81	30	Pass

802.11be (EHT160) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
15	6025	121.35	-95.23	409.261	26.12	30	Pass
47	6185	121.32	-95.23	406.443	26.09	30	Pass
79	6345	121.12	-95.23	388.15	25.89	30	Pass
111	6505	121.15	-95.23	390.841	25.92	30	Pass
143	6665	121.05	-95.23	381.944	25.82	30	Pass
175	6825	120.55	-95.23	340.408	25.32	30	Pass
207	6985	121.19	-95.23	394.457	25.96	30	Pass

802.11be (EHT320) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
31	6105	123.31	-95.23	642.688	28.08	30	Pass
63	6265	123.77	-95.23	714.496	28.54	30	Pass
95	6425	123.33	-95.23	645.654	28.10	30	Pass
127	6585	123.51	-95.23	672.977	28.28	30	Pass
159	6745	123.62	-95.23	690.24	28.39	30	Pass
191	6905	121.15	-95.23	390.841	25.92	30	Pass

Spectrum Plot of Maximum Value



802.11a CDD : CH 1



802.11be (EHT20) CDD : CH 1



802.11be (EHT40) CDD : CH 3



802.11be (EHT80) CDD : CH 215



802.11be (EHT160) CDD : CH 15



802.11be (EHT320) CDD : CH 127

Spectrum Plot of Maximum Value



802.11be (EHT20) Beamforming : CH 1



802.11be (EHT40) Beamforming : CH 227



802.11be (EHT80) Beamforming : CH 7



802.11be (EHT160) Beamforming : CH 15



802.11be (EHT320) Beamforming : CH 63

7.2 Maximum Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

802.11a CDD

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	100.21	-95.23	4.98	5	Pass
45	6175	100.19	-95.23	4.96	5	Pass
93	6415	100.19	-95.23	4.96	5	Pass
97	6435	100.15	-95.23	4.92	5	Pass
105	6475	100.15	-95.23	4.92	5	Pass
113	6515	100.19	-95.23	4.96	5	Pass
117	6535	100.18	-95.23	4.95	5	Pass
149	6695	100.18	-95.23	4.95	5	Pass
181	6855	100.16	-95.23	4.93	5	Pass
185	6875	100.18	-95.23	4.95	5	Pass
209	6995	100.16	-95.23	4.93	5	Pass
229	7095	100.12	-95.23	4.89	5	Pass

802.11be (EHT20) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
1	5955	100.21	-95.23	4.98	5	Pass
45	6175	100.18	-95.23	4.95	5	Pass
93	6415	100.12	-95.23	4.89	5	Pass
97	6435	100.06	-95.23	4.83	5	Pass
105	6475	100.08	-95.23	4.85	5	Pass
113	6515	100.07	-95.23	4.84	5	Pass
117	6535	100.12	-95.23	4.89	5	Pass
149	6695	100.11	-95.23	4.88	5	Pass
181	6855	100.15	-95.23	4.92	5	Pass
185	6875	100.18	-95.23	4.95	5	Pass
209	6995	100.17	-95.23	4.94	5	Pass
229	7095	100.10	-95.23	4.87	5	Pass

802.11be (EHT40) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
3	5965	100.05	-95.23	4.82	5	Pass
43	6165	100.15	-95.23	4.92	5	Pass
91	6405	100.08	-95.23	4.85	5	Pass
99	6445	100.09	-95.23	4.86	5	Pass
107	6485	100.18	-95.23	4.95	5	Pass
115	6525	100.19	-95.23	4.96	5	Pass
123	6565	100.05	-95.23	4.82	5	Pass
155	6725	100.17	-95.23	4.94	5	Pass
179	6845	100.09	-95.23	4.86	5	Pass
187	6885	100.17	-95.23	4.94	5	Pass
211	7005	100.18	-95.23	4.95	5	Pass
227	7085	100.21	-95.23	4.98	5	Pass

802.11be (EHT80) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
7	5985	100.19	-95.23	4.96	5	Pass
39	6145	100.12	-95.23	4.89	5	Pass
87	6385	100.05	-95.23	4.82	5	Pass
103	6465	100.06	-95.23	4.83	5	Pass
119	6545	100.05	-95.23	4.82	5	Pass
151	6705	100.18	-95.23	4.95	5	Pass
183	6865	100.08	-95.23	4.85	5	Pass
199	6945	100.18	-95.23	4.95	5	Pass
215	7025	100.05	-95.23	4.82	5	Pass


802.11be (EHT160) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
15	6025	100.18	-95.23	4.95	5	Pass
47	6185	100.15	-95.23	4.92	5	Pass
79	6345	100.11	-95.23	4.88	5	Pass
111	6505	100.12	-95.23	4.89	5	Pass
143	6665	100.06	-95.23	4.83	5	Pass
175	6825	100.03	-95.23	4.80	5	Pass
207	6985	100.13	-95.23	4.90	5	Pass


802.11be (EHT320) Beamforming

Chan.	Chan. Freq. (MHz)	Field Strength (dBuV/m)	Correction Factor (dB)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
31	6105	99.65	-95.23	4.42	5	Pass
63	6265	100.19	-95.23	4.96	5	Pass
95	6425	100.12	-95.23	4.89	5	Pass
127	6585	100.16	-95.23	4.93	5	Pass
159	6745	100.18	-95.23	4.95	5	Pass
191	6905	97.82	-95.23	2.59	5	Pass

Spectrum Plot of Maximum Value

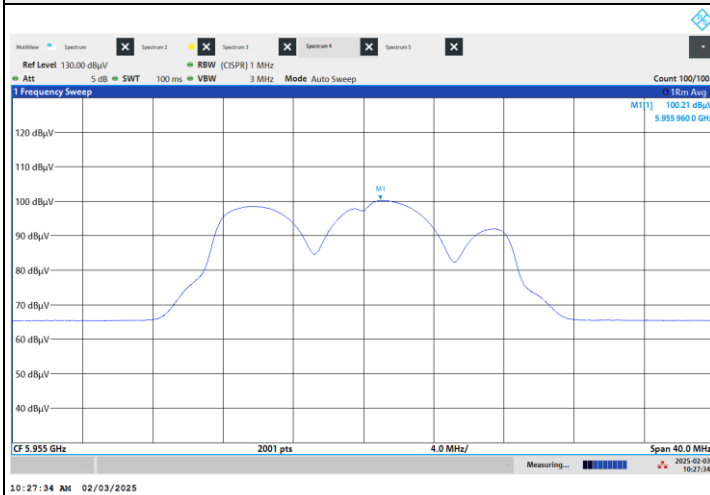

802.11a CDD : CH 1

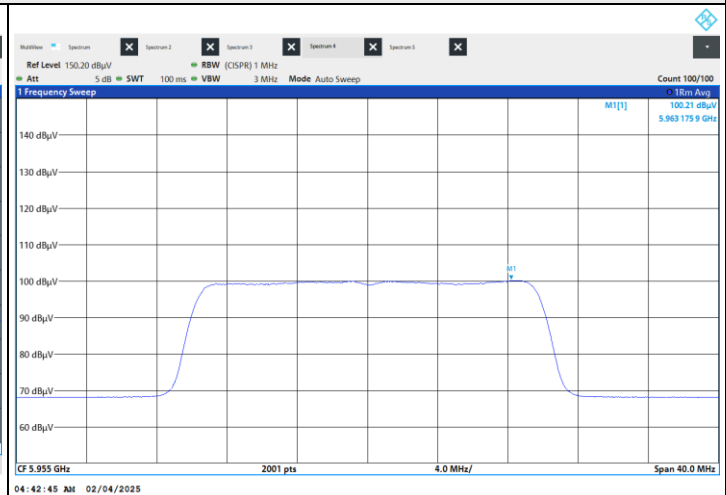


802.11be (EHT20) Beamforming : CH 1



802.11be (EHT40) Beamforming : CH 227



802.11be (EHT80) Beamforming : CH 7

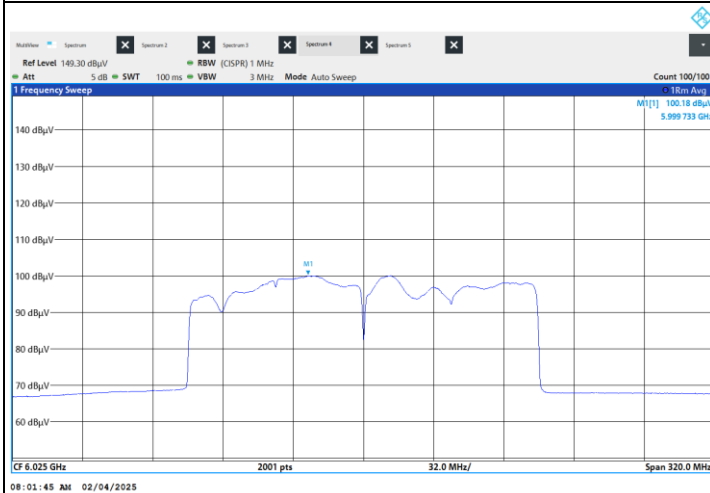

802.11be (EHT160) Beamforming : CH 15



802.11be (EHT320) Beamforming : CH 63

7.3 Emission Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

802.11a

Channel	Frequency (MHz)	26dB Bandwidth (MHz)				Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
1	5955	21.87	21.87	21.96	21.97	320	Pass
45	6175	21.84	22.12	21.82	22.08	320	Pass
93	6415	21.97	22.01	22.03	22.03	320	Pass
97	6435	21.99	21.90	21.92	21.89	320	Pass
105	6475	22.02	22.00	21.89	21.91	320	Pass
113	6515	21.97	21.95	22.01	22.01	320	Pass
117	6535	21.89	21.96	22.01	21.92	320	Pass
149	6695	22.05	21.98	21.97	21.95	320	Pass
181	6855	21.93	21.88	21.84	21.96	320	Pass
185	6875	22.00	22.08	21.78	21.88	320	Pass
209	6995	21.95	21.83	21.85	21.59	320	Pass
229	7095	21.96	21.71	22.04	21.87	320	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)				Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
1	5955	21.58	21.79	21.66	21.88	320	Pass
45	6175	21.66	21.86	21.59	21.61	320	Pass
93	6415	21.50	21.90	21.94	21.61	320	Pass
97	6435	21.64	21.79	21.76	21.83	320	Pass
105	6475	21.78	21.95	21.76	21.79	320	Pass
113	6515	21.75	21.54	21.92	21.81	320	Pass
117	6535	21.74	21.83	21.52	21.72	320	Pass
149	6695	21.74	21.75	21.70	21.73	320	Pass
181	6855	21.65	21.79	21.75	21.42	320	Pass
185	6875	21.94	21.69	21.85	21.82	320	Pass
209	6995	21.69	21.32	21.64	21.54	320	Pass
229	7095	21.51	21.97	21.83	21.79	320	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)				Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
3	5965	40.85	41.18	41.09	41.07	320	Pass
43	6165	40.96	40.88	41.17	41.40	320	Pass
91	6405	41.04	41.09	40.96	41.05	320	Pass
99	6445	41.04	40.93	41.23	40.87	320	Pass
107	6485	41.06	40.97	41.05	41.38	320	Pass
115	6525	41.07	41.21	41.26	41.11	320	Pass
123	6565	41.18	41.14	41.20	40.94	320	Pass
155	6725	41.10	40.94	41.02	40.86	320	Pass
179	6845	40.77	40.97	41.06	40.95	320	Pass
187	6885	41.13	41.10	40.87	41.26	320	Pass
211	7005	40.65	40.81	40.57	40.52	320	Pass
227	7085	40.97	40.88	40.81	41.13	320	Pass

802.11be (EHT80)

Channel	Frequency (MHz)	26dB Bandwidth (MHz)				Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
7	5985	82.34	82.72	82.57	82.85	320	Pass
39	6145	82.79	82.79	82.84	83.00	320	Pass
87	6385	82.84	82.60	82.89	83.25	320	Pass
103	6465	82.69	82.95	82.71	82.83	320	Pass
119	6545	82.73	83.05	82.91	82.79	320	Pass
151	6705	82.64	82.64	82.82	82.94	320	Pass
183	6865	82.55	82.60	82.54	82.59	320	Pass
199	6945	82.11	82.83	82.63	82.76	320	Pass
215	7025	82.67	82.61	82.41	82.48	320	Pass

802.11be (EHT160)


Channel	Frequency (MHz)	26dB Bandwidth (MHz)				Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
15	6025	164.42	165.74	165.48	165.11	320	Pass
47	6185	165.42	165.61	165.42	165.87	320	Pass
79	6345	166.01	166.52	166.36	165.45	320	Pass
111	6505	166.01	167.10	166.01	165.81	320	Pass
143	6665	165.25	166.81	165.92	166.20	320	Pass
175	6825	167.02	166.31	166.22	166.42	320	Pass
207	6985	165.13	165.09	166.10	165.60	320	Pass

802.11be (EHT320)


Channel	Frequency (MHz)	26dB Bandwidth (MHz)				Maximum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
31	6105	340.79	344.61	344.00	385.85	320	Note
63	6265	328.96	399.81	331.68	372.02	320	Note
95	6425	335.29	342.08	331.77	330.89	320	Note
127	6585	352.55	331.15	330.49	352.85	320	Note
159	6745	349.37	345.59	348.55	347.94	320	Note
191	6905	331.35	331.20	330.39	331.15	320	Note

Note: For channels with a nominal bandwidth of 320 MHz, compliance is demonstrated by way of the 99% BW.


Spectrum Plot of Maximum Value

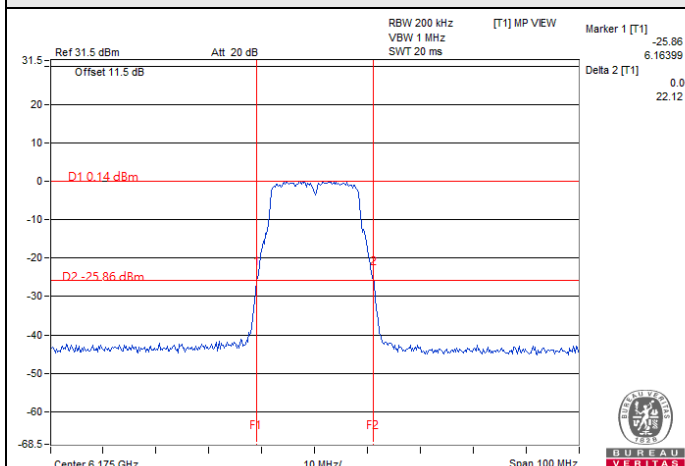


802.11a / Chain 1 : CH 45

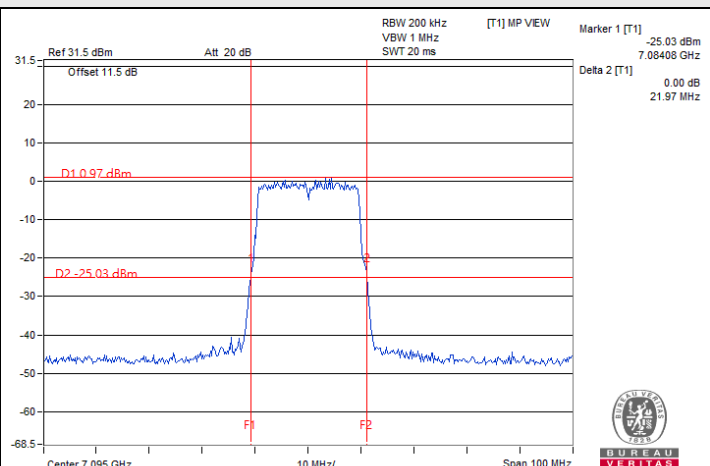


802.11be (EHT20) / Chain 1 : CH 229

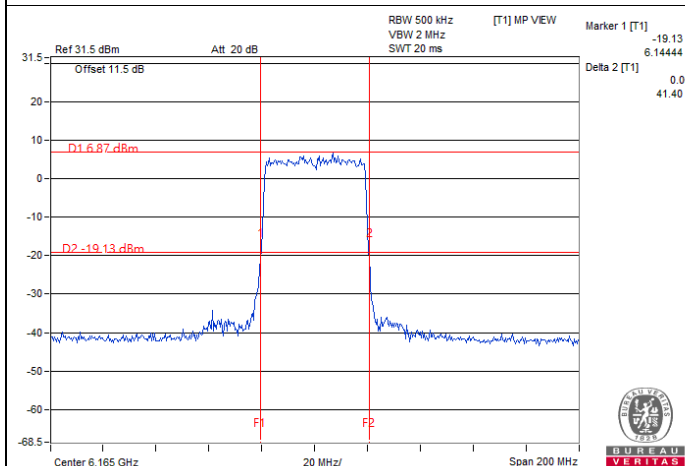


802.11be (EHT40) / Chain 3 : CH 43

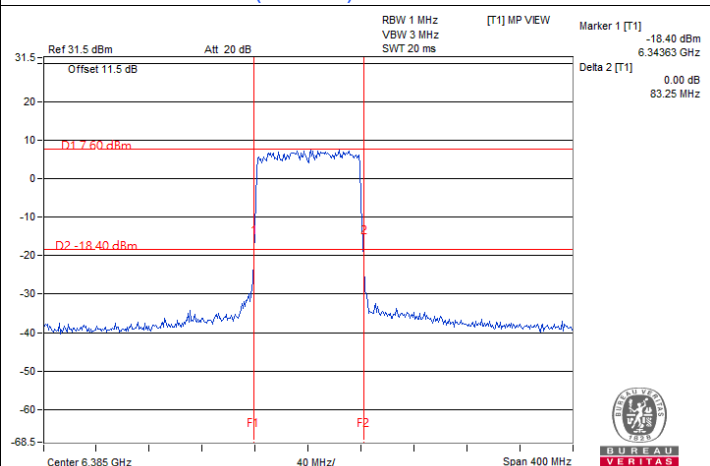

802.11be (EHT80) / Chain 3 : CH 87

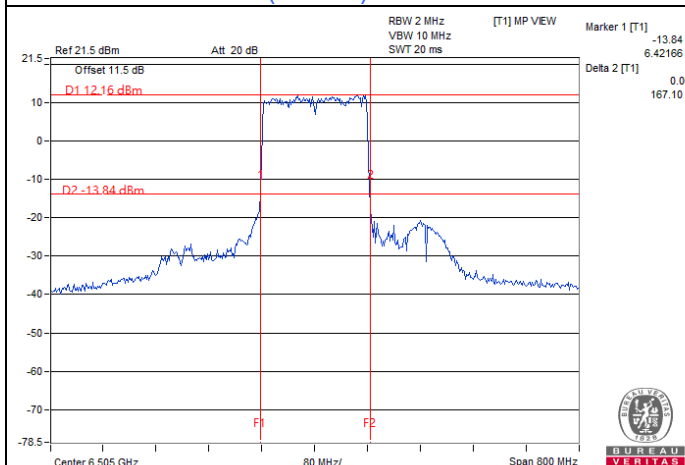

802.11be (EHT160) / Chain 1 : CH 111

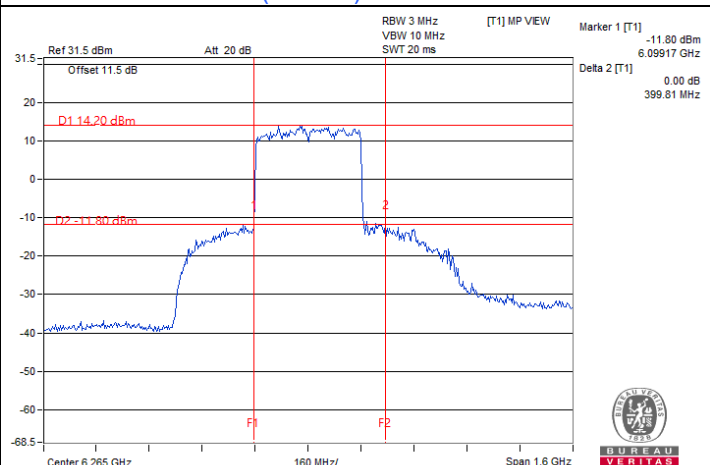


802.11be (EHT320) / Chain 1 : CH 63







7.4 In-Band Emission Mask

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------


802.11a

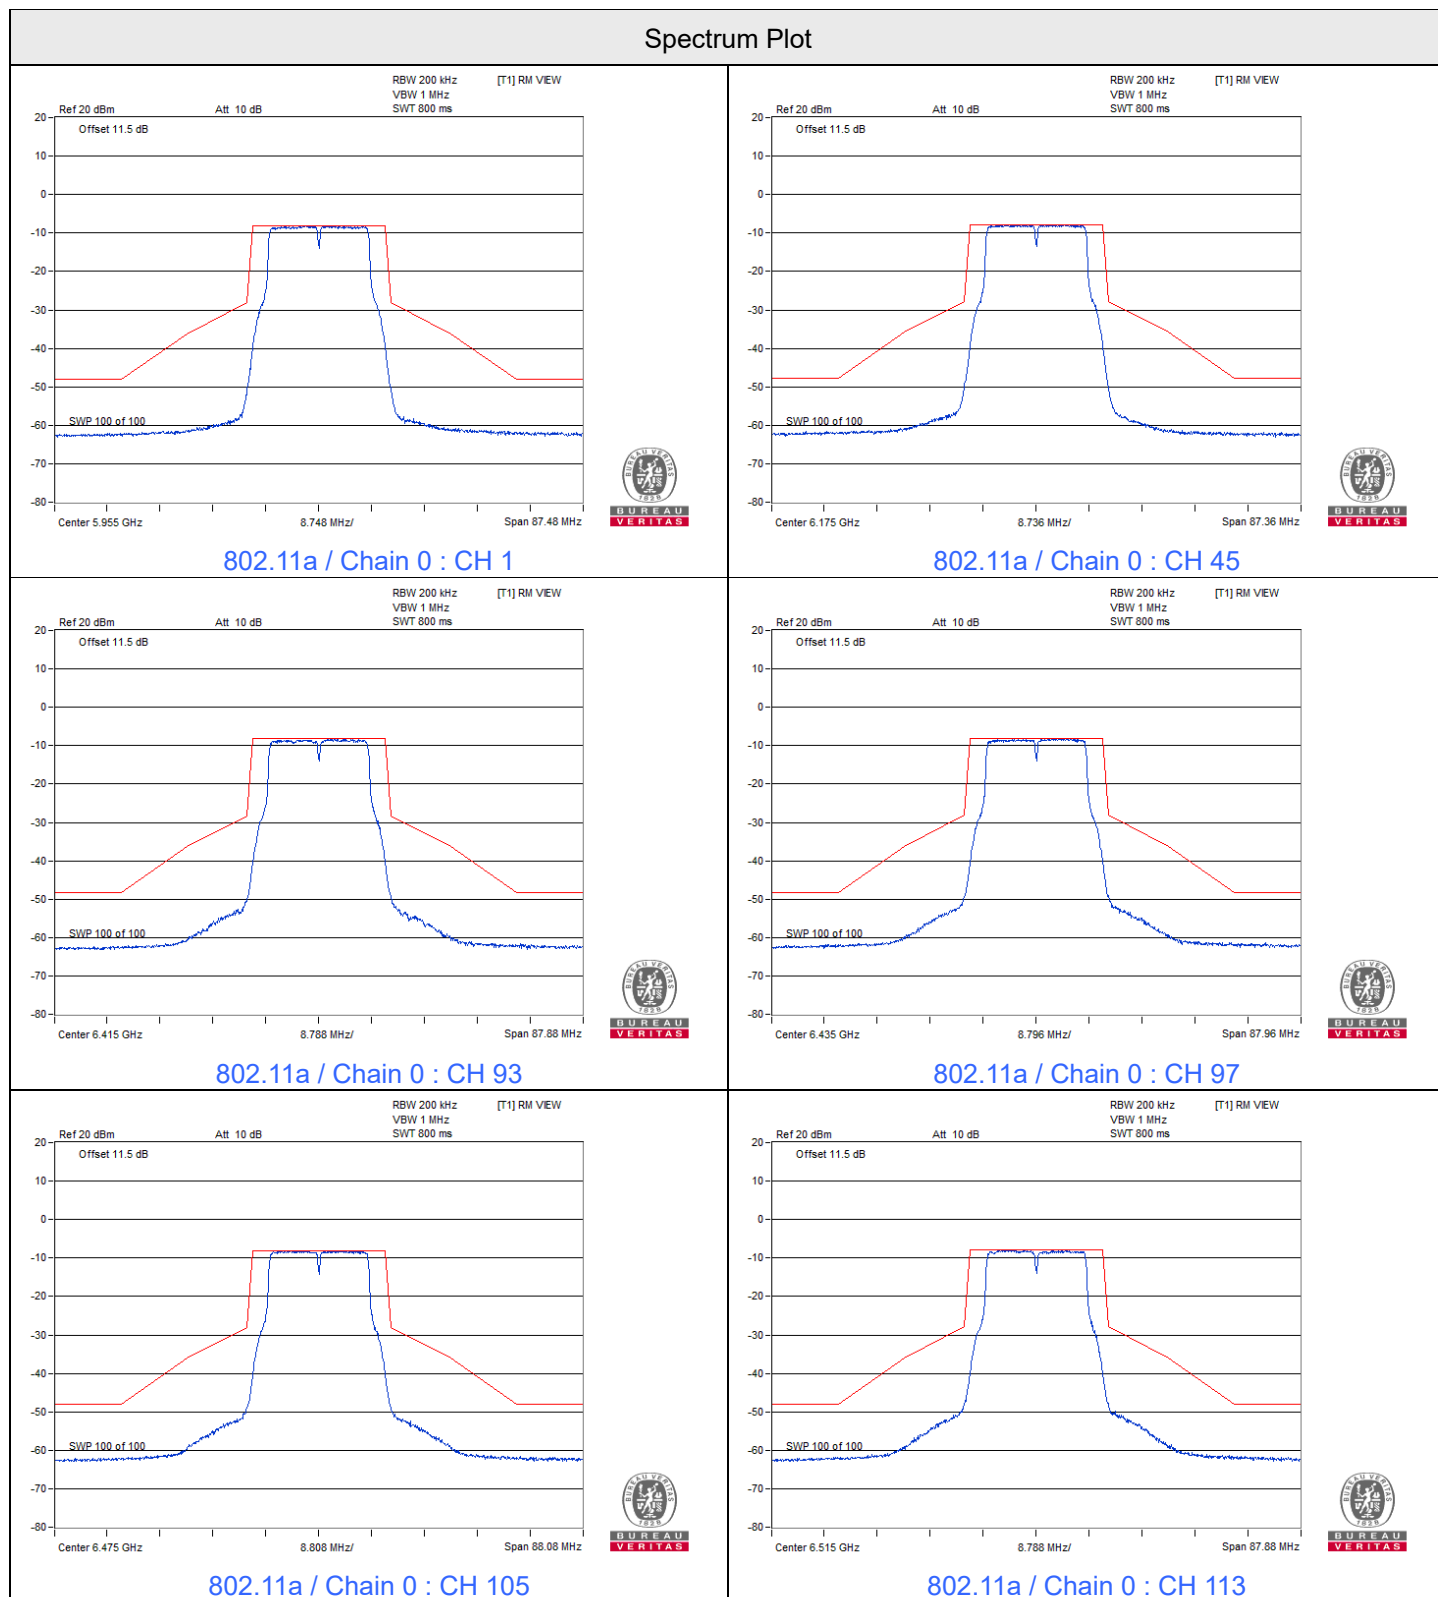


Spectrum Plot

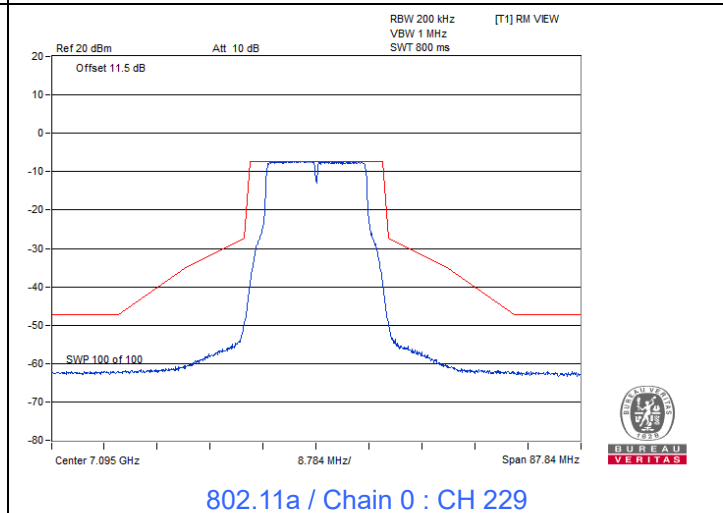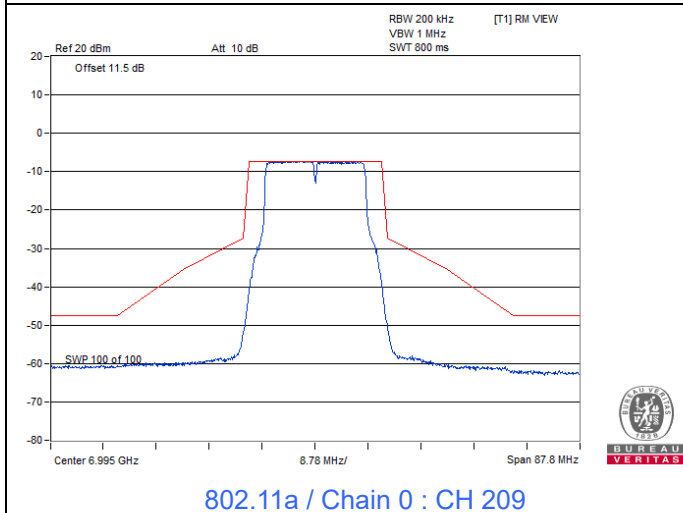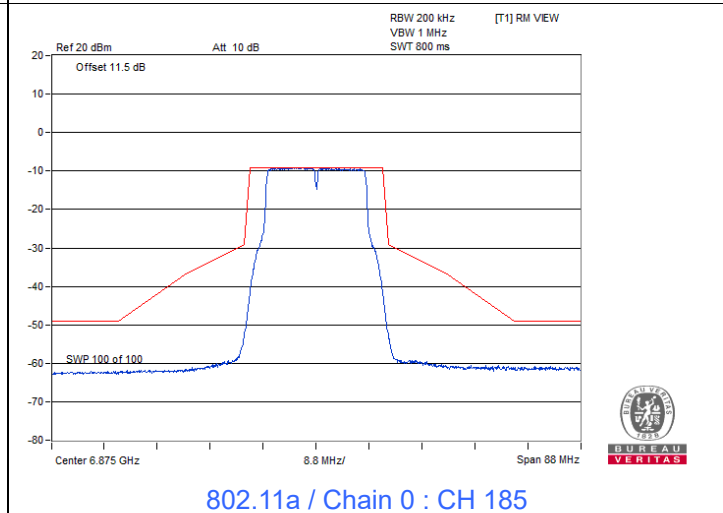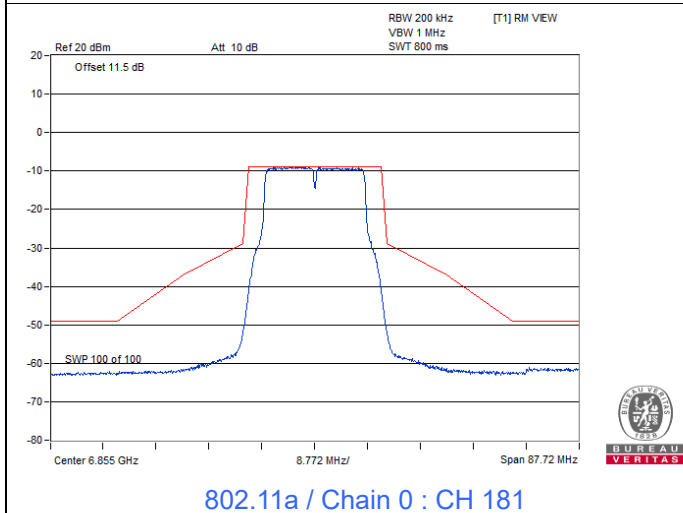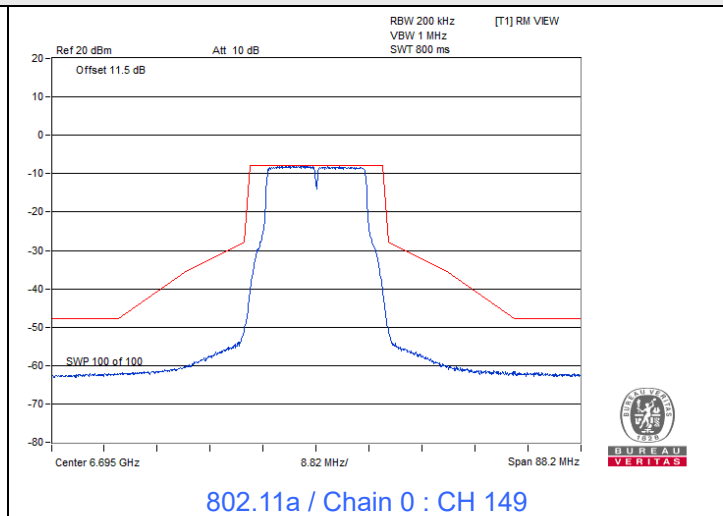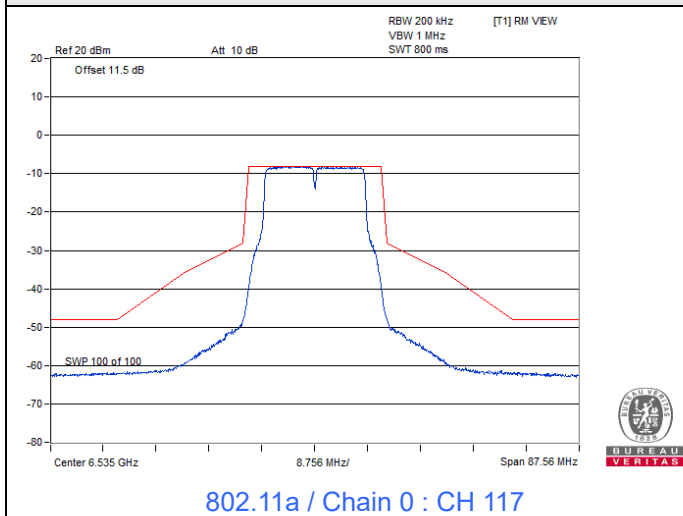


Spectrum Plot

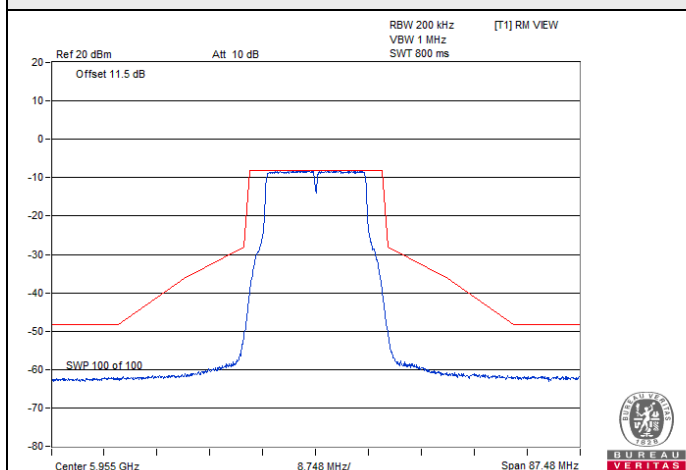


802.11a / Chain 1 : CH 1

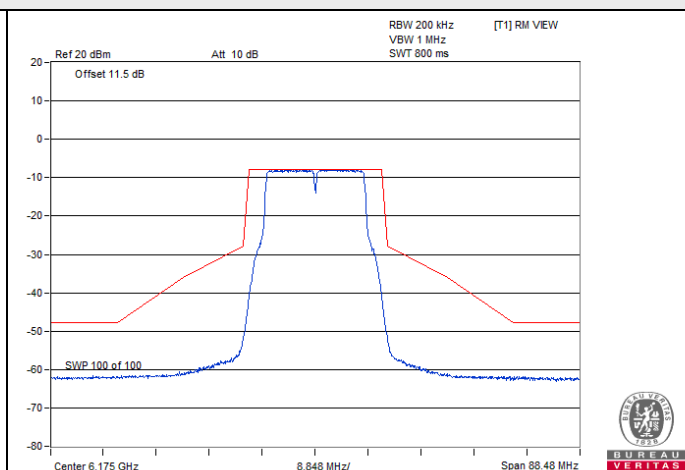


802.11a / Chain 1 : CH 45

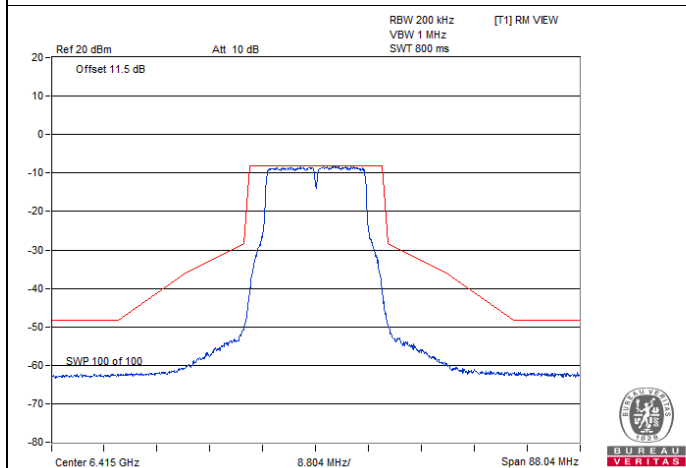


802.11a / Chain 1 : CH 93

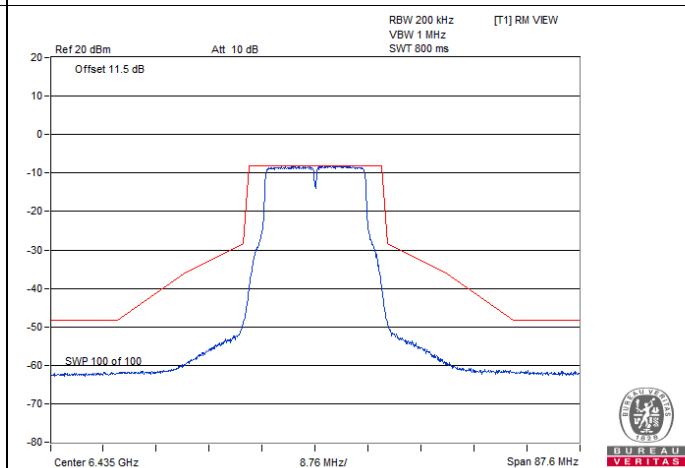

802.11a / Chain 1 : CH 97

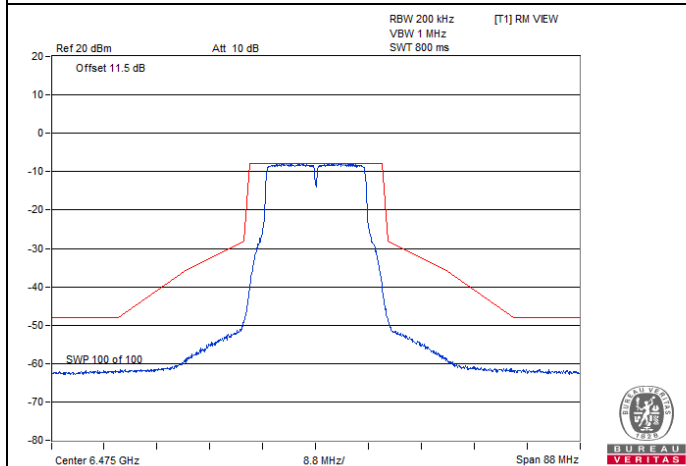


802.11a / Chain 1 : CH 105

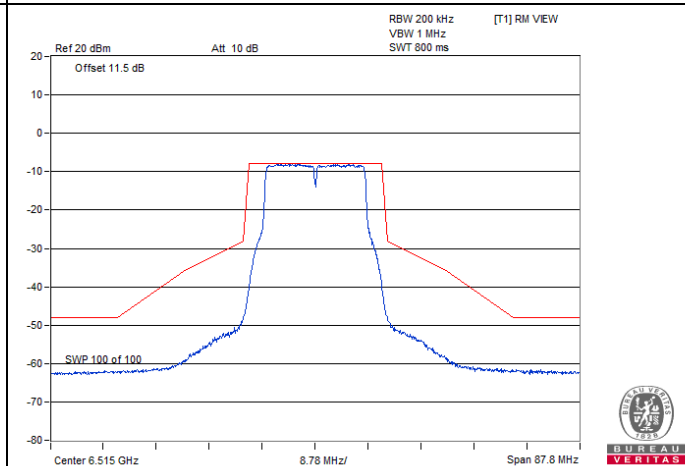


802.11a / Chain 1 : CH 113


Spectrum Plot

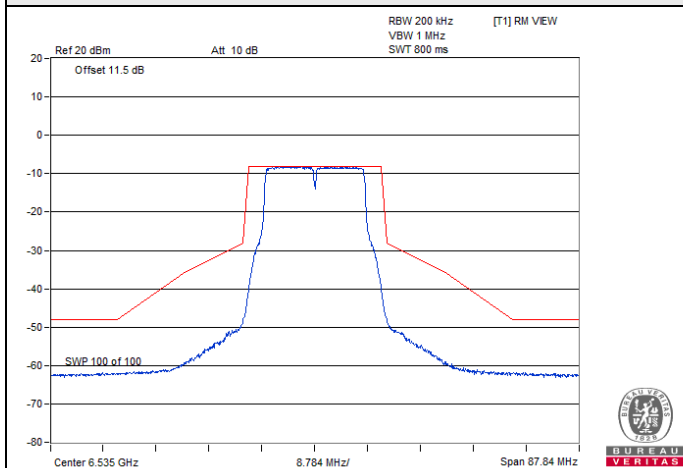


802.11a / Chain 1 : CH 117

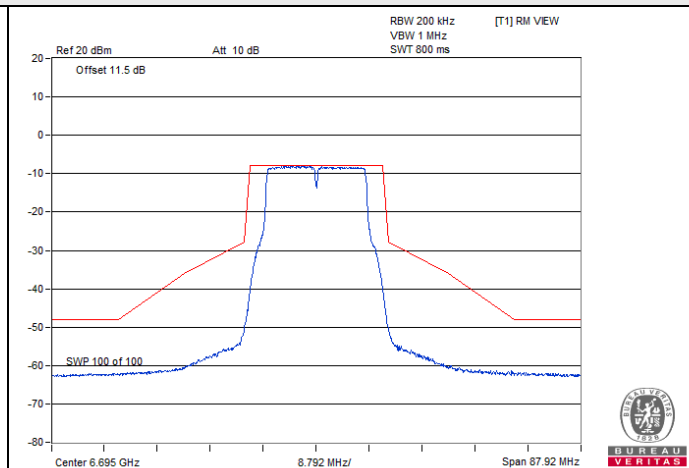


802.11a / Chain 1 : CH 149

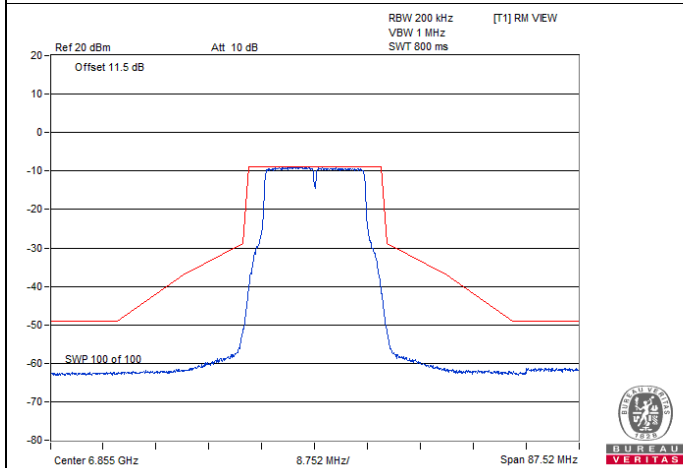


802.11a / Chain 1 : CH 181

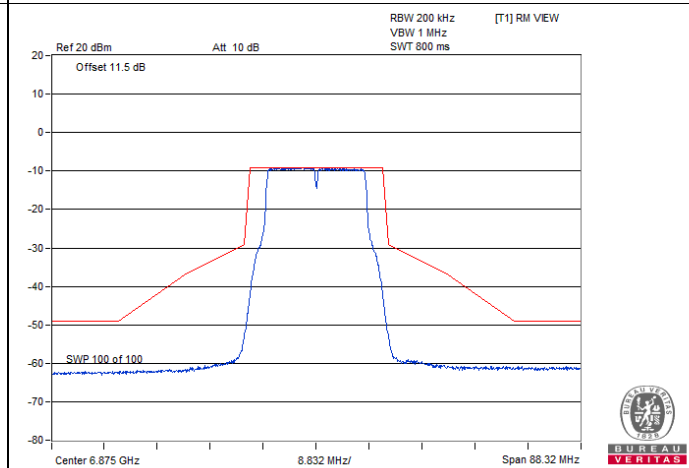

802.11a / Chain 1 : CH 185






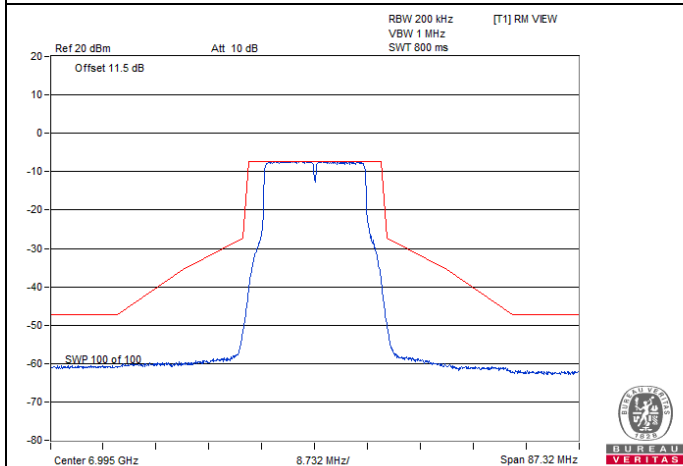


802.11a / Chain 1 : CH 209

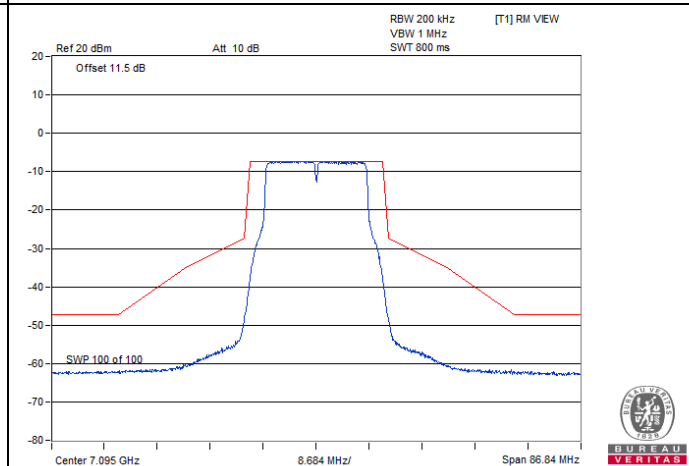


802.11a / Chain 1 : CH 229


Spectrum Plot

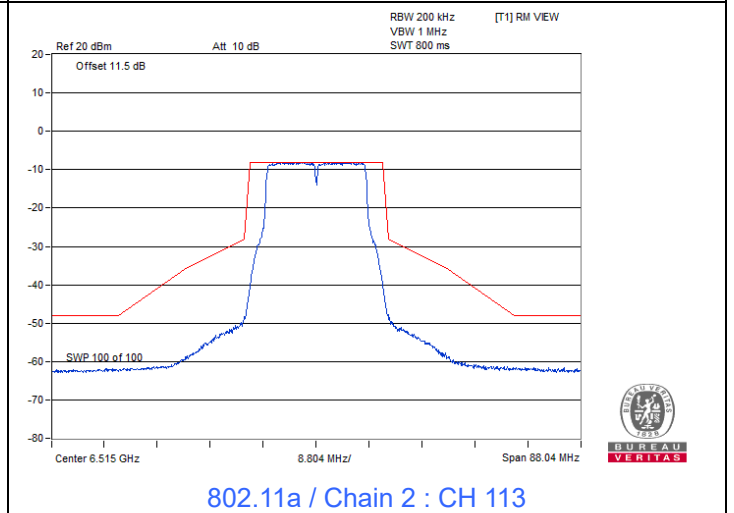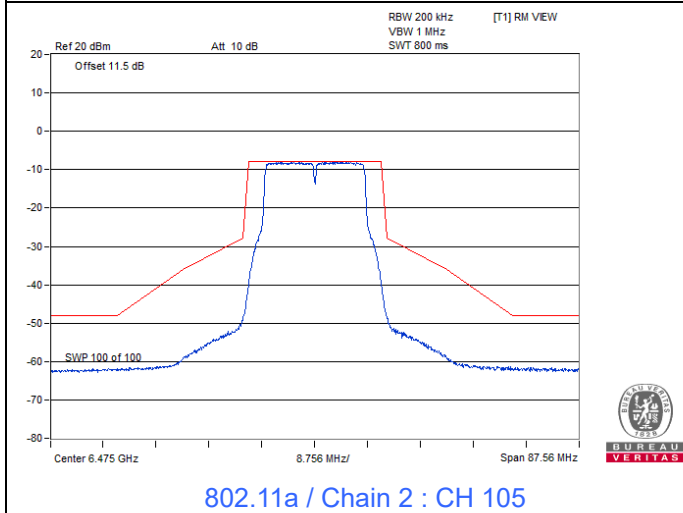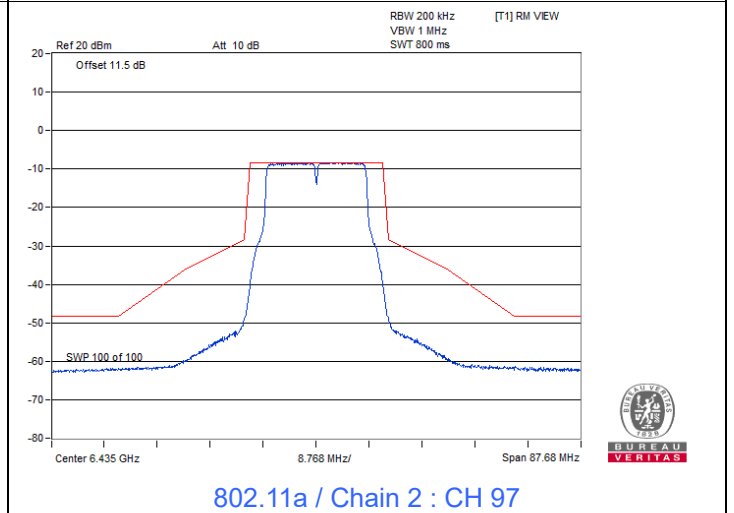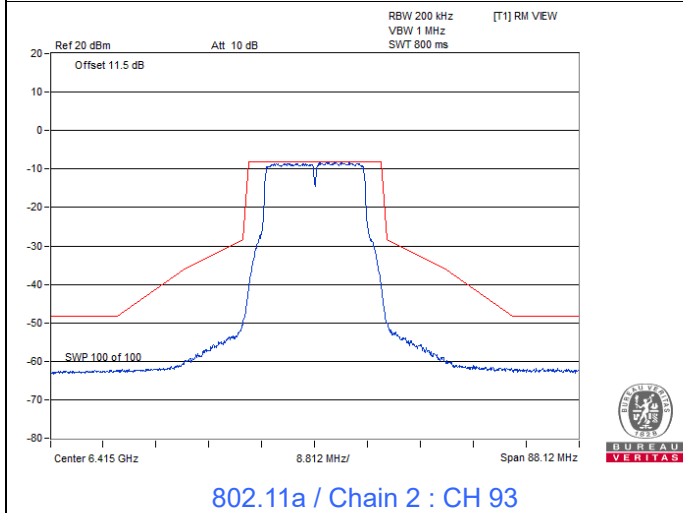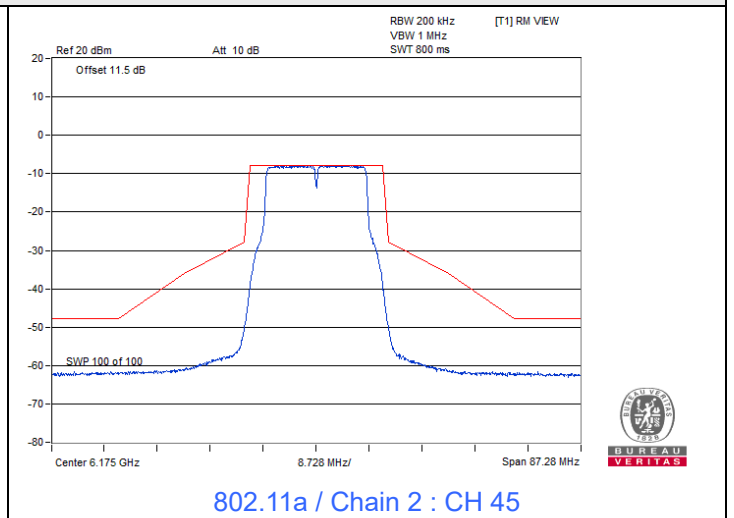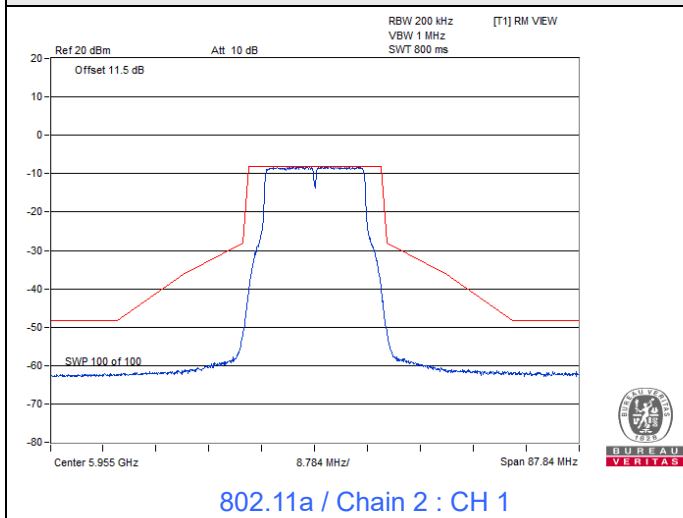


Spectrum Plot

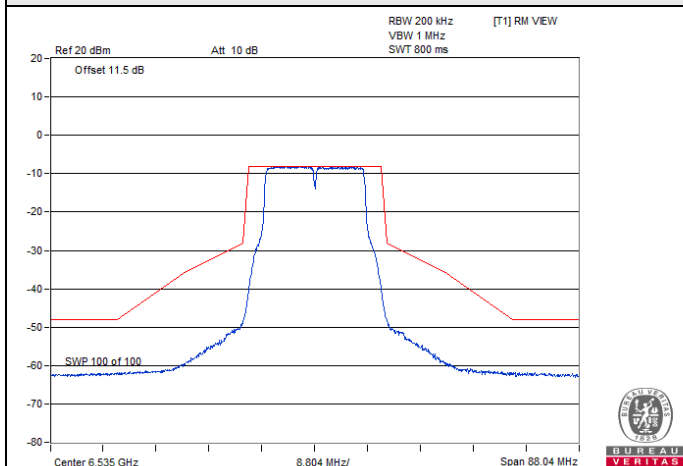


802.11a / Chain 2 : CH 117

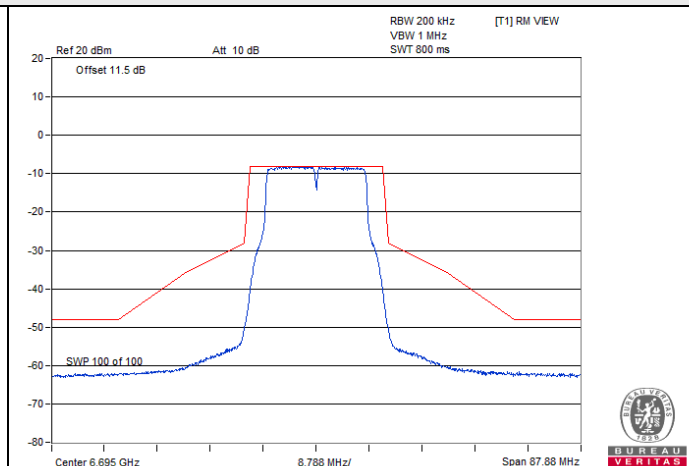


802.11a / Chain 2 : CH 149

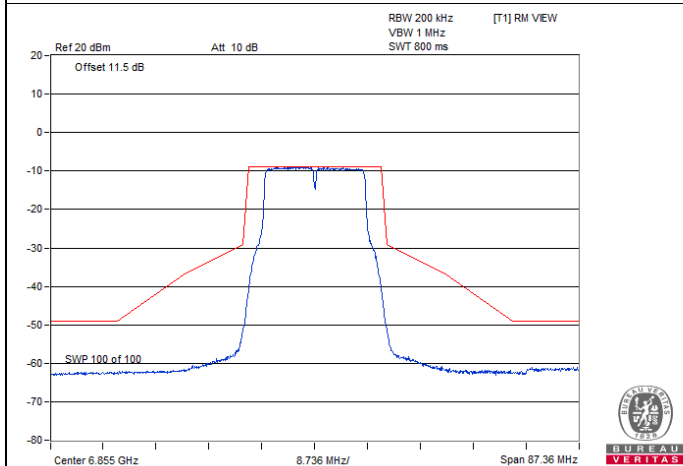


802.11a / Chain 2 : CH 181

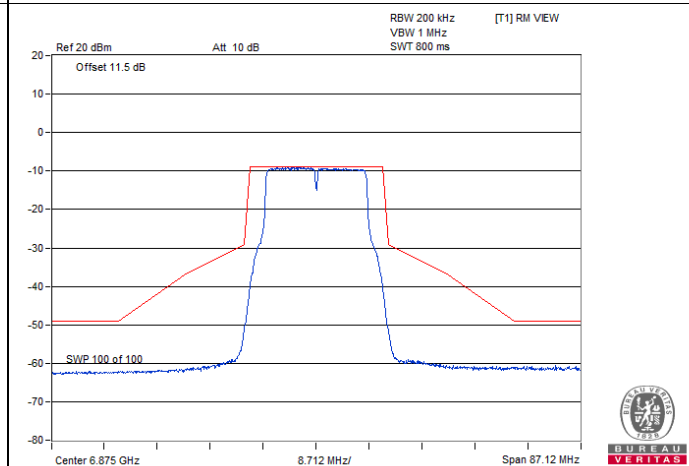

802.11a / Chain 2 : CH 185






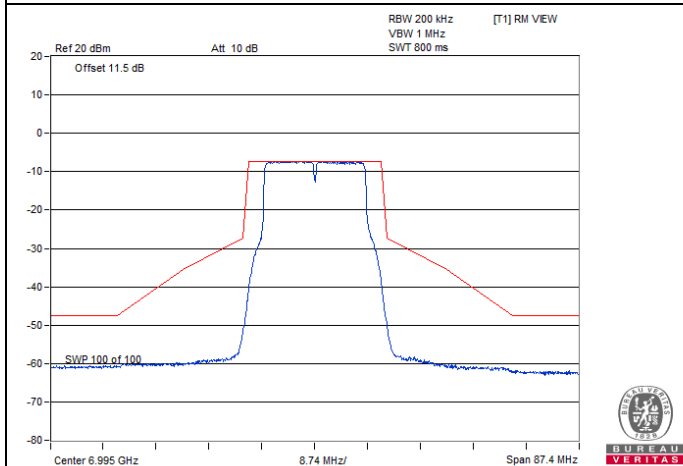


802.11a / Chain 2 : CH 209






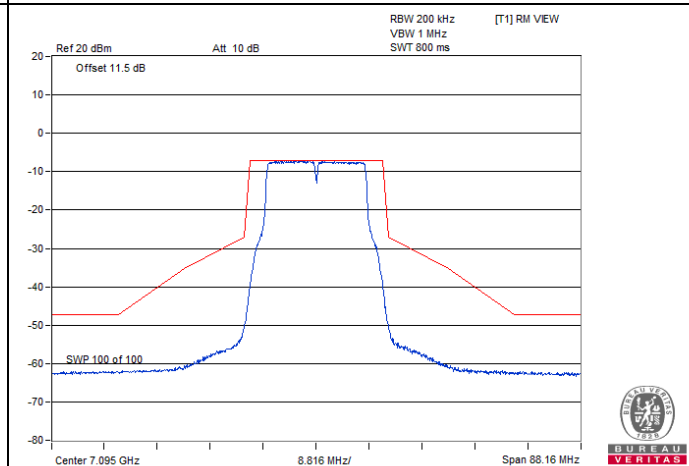


802.11a / Chain 2 : CH 229

Spectrum Plot

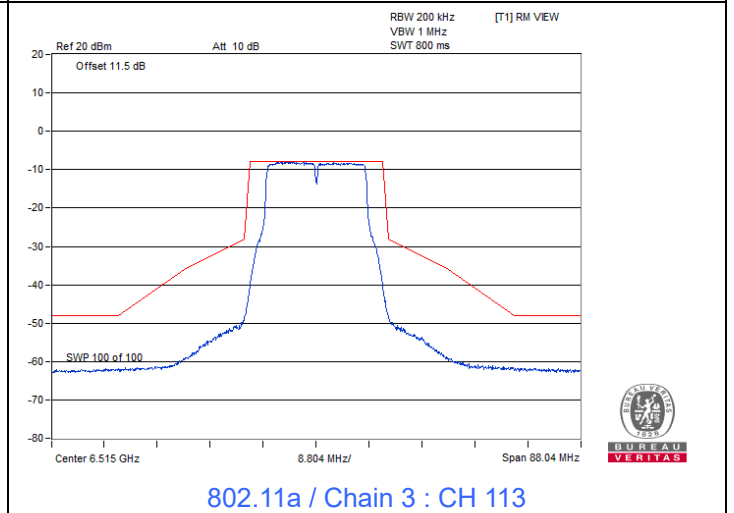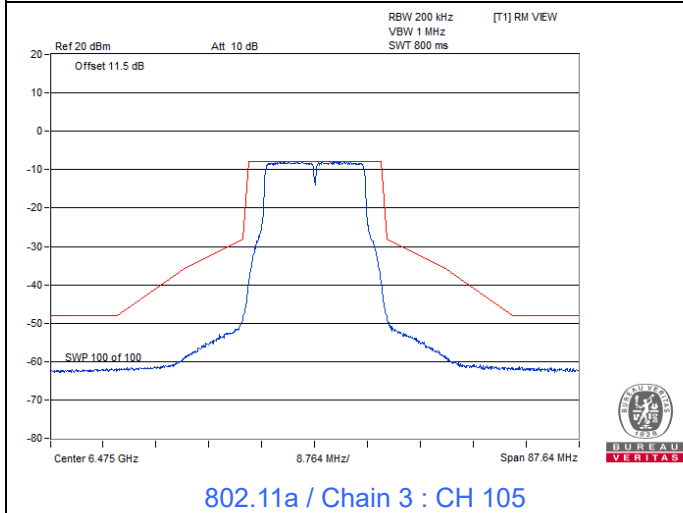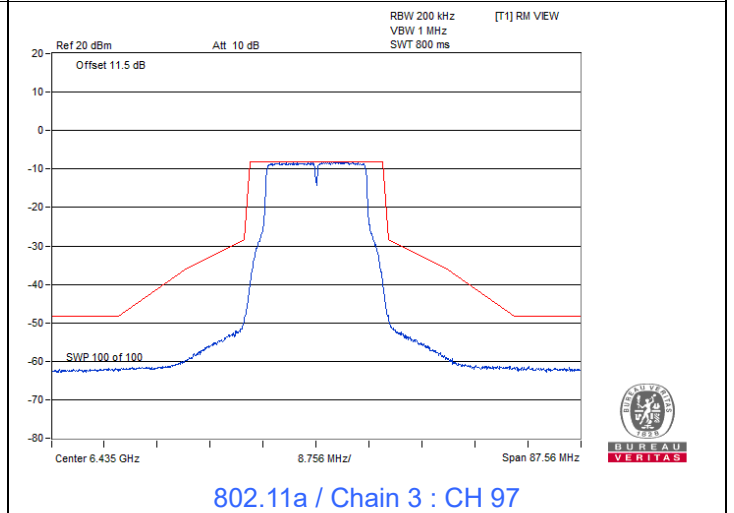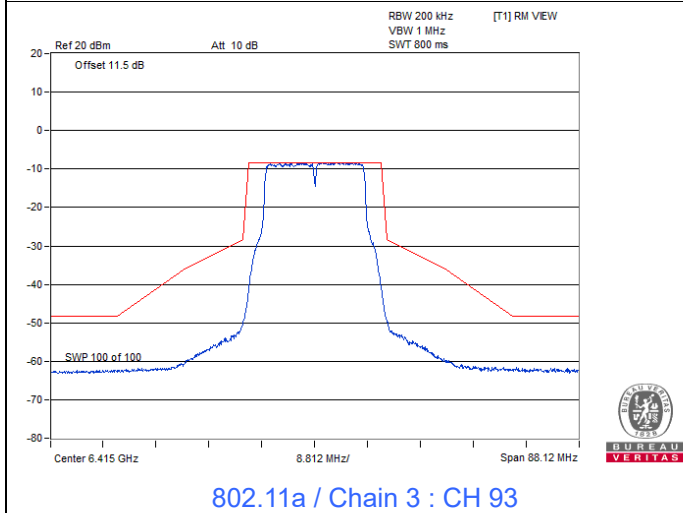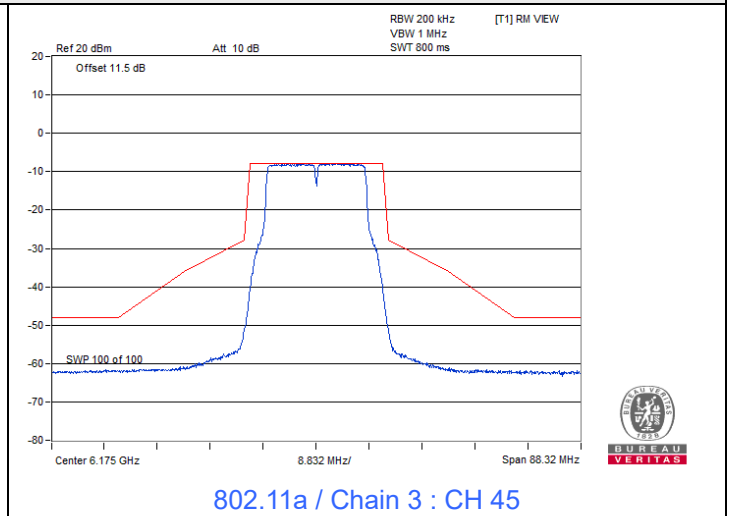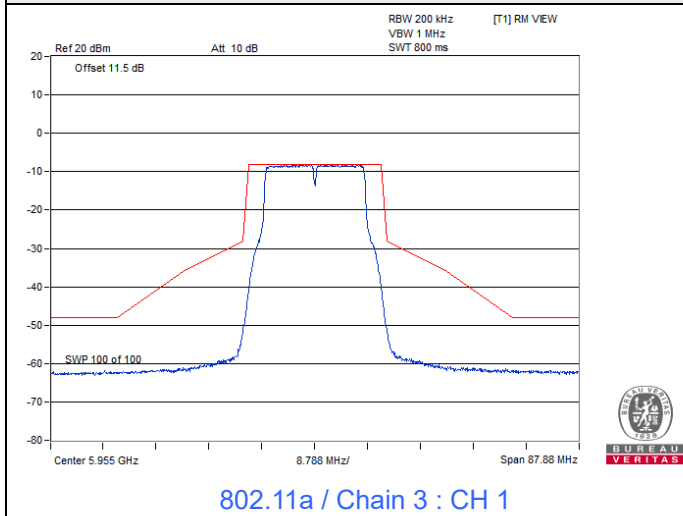


Spectrum Plot

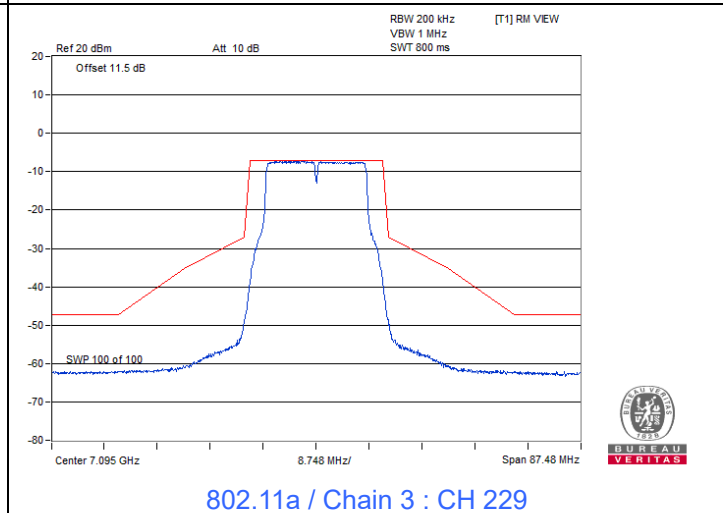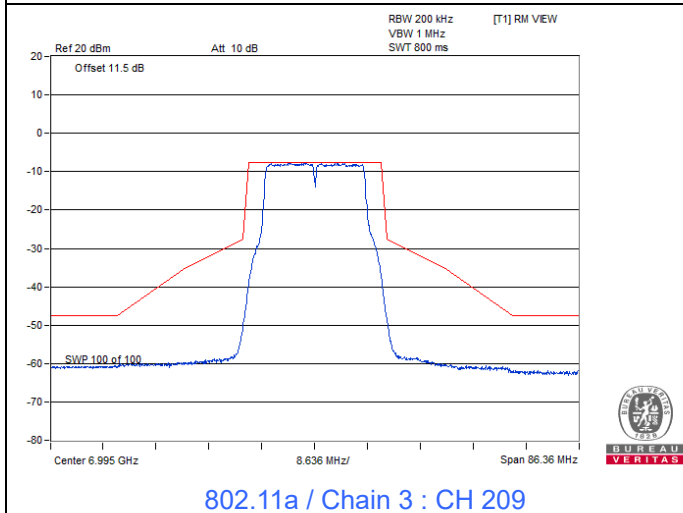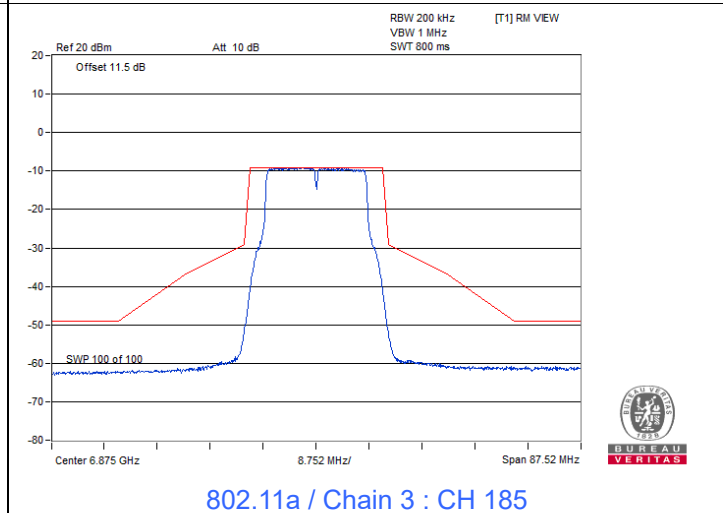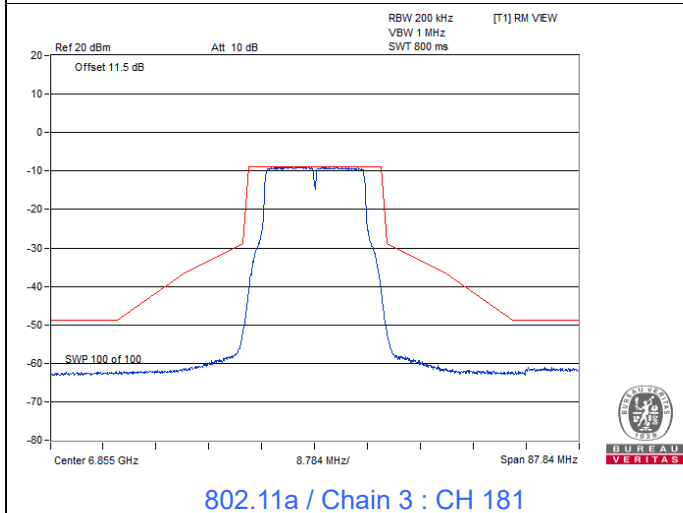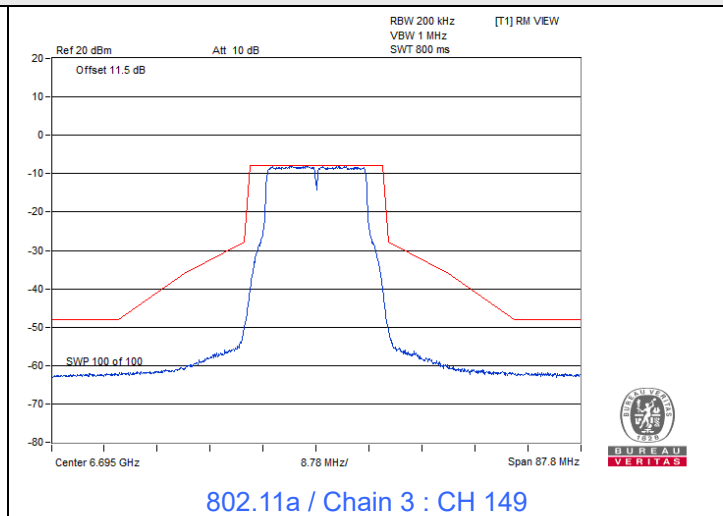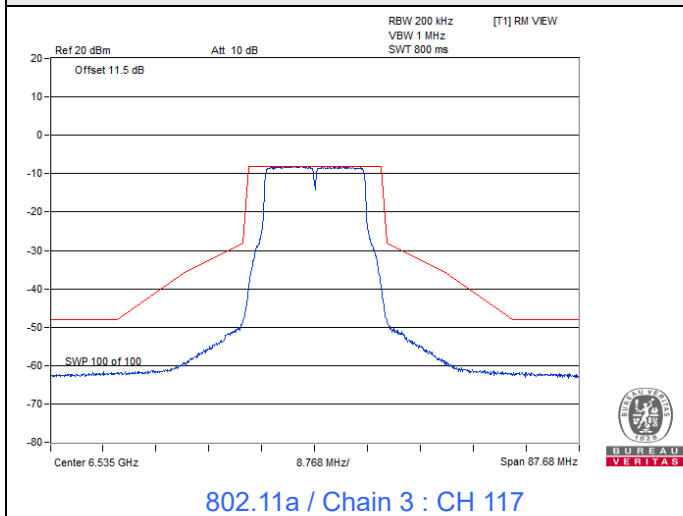


802.11be (EHT20)


Spectrum Plot

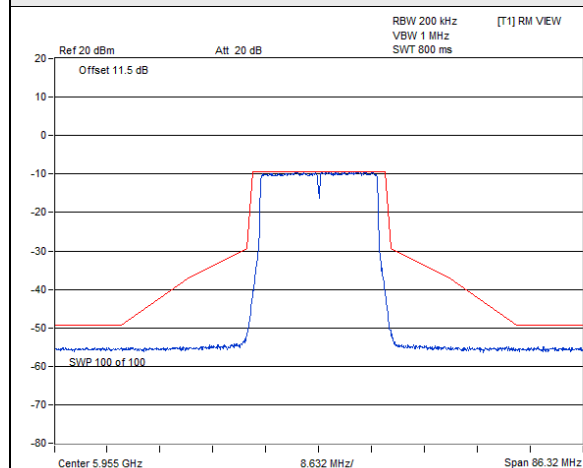


802.11be (EHT20) / Chain 0 : CH 1

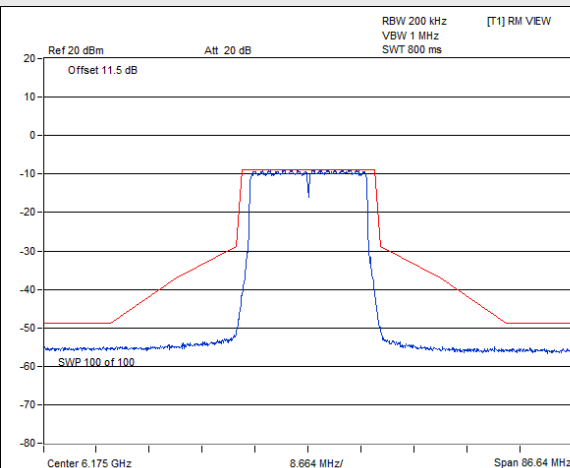


802.11be (EHT20) / Chain 0 : CH 45

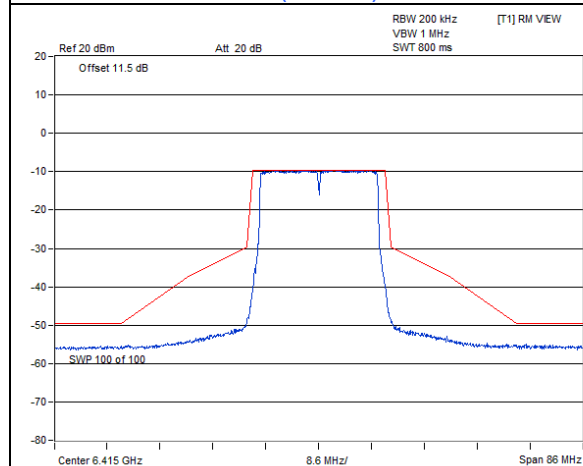


802.11be (EHT20) / Chain 0 : CH 93

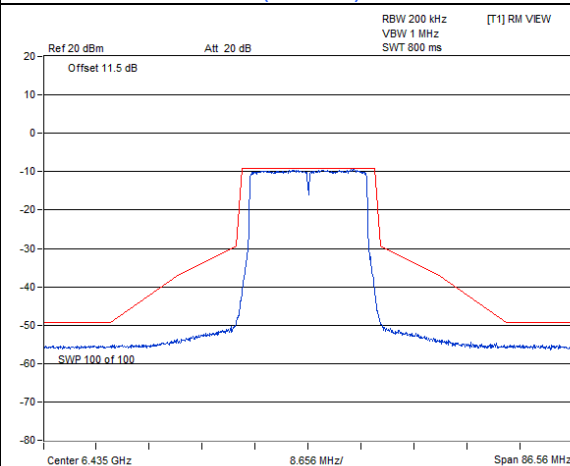

802.11be (EHT20) / Chain 0 : CH 97

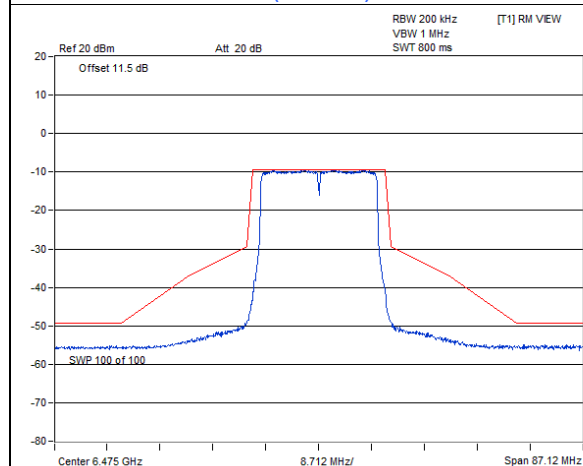


802.11be (EHT20) / Chain 0 : CH 105

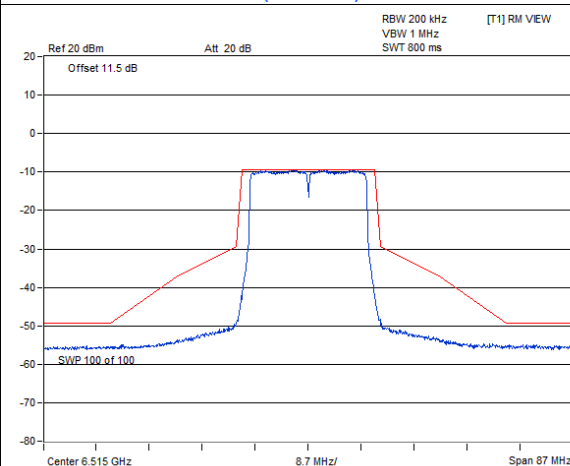


802.11be (EHT20) / Chain 0 : CH 113


Spectrum Plot

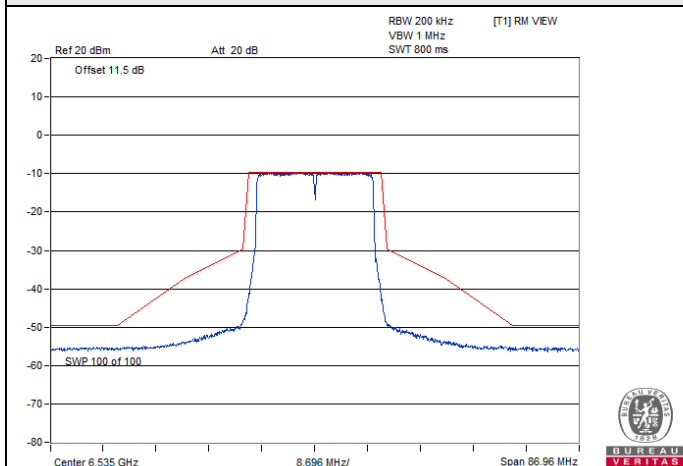


802.11be (EHT20) / Chain 0 : CH 117

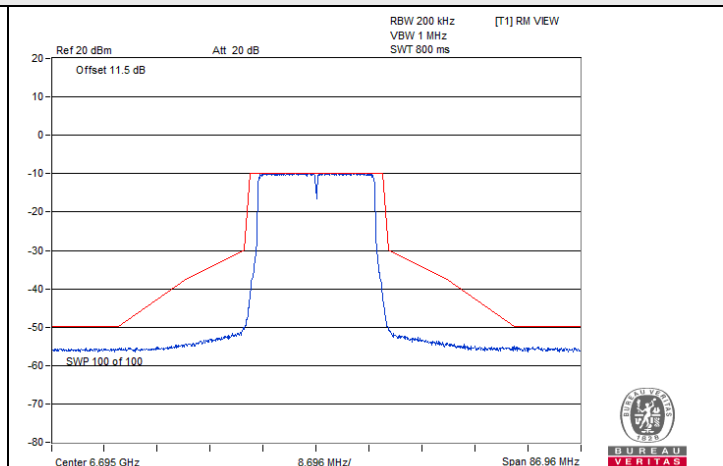


802.11be (EHT20) / Chain 0 : CH 149

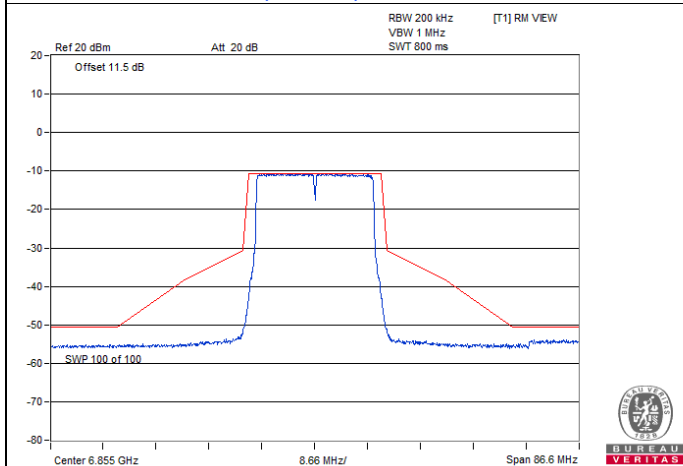


802.11be (EHT20) / Chain 0 : CH 181

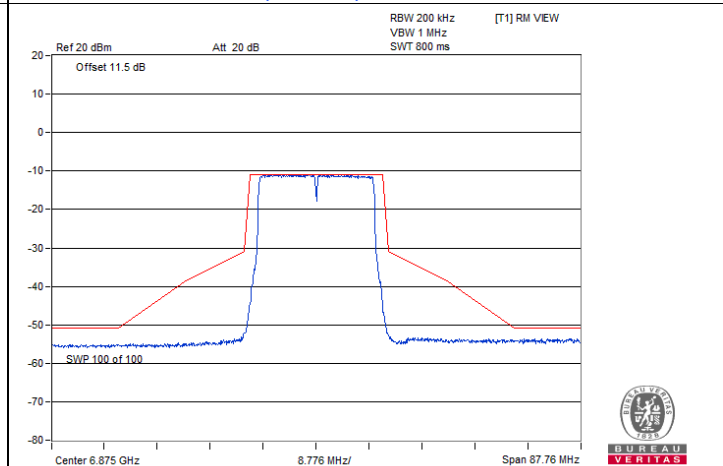

802.11be (EHT20) / Chain 0 : CH 185

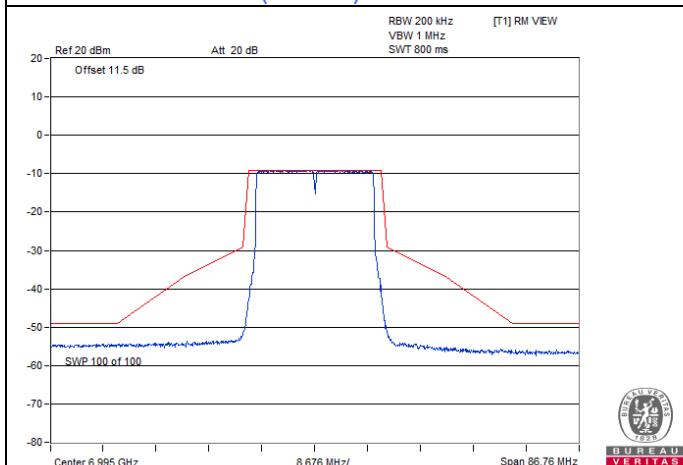


802.11be (EHT20) / Chain 0 : CH 209

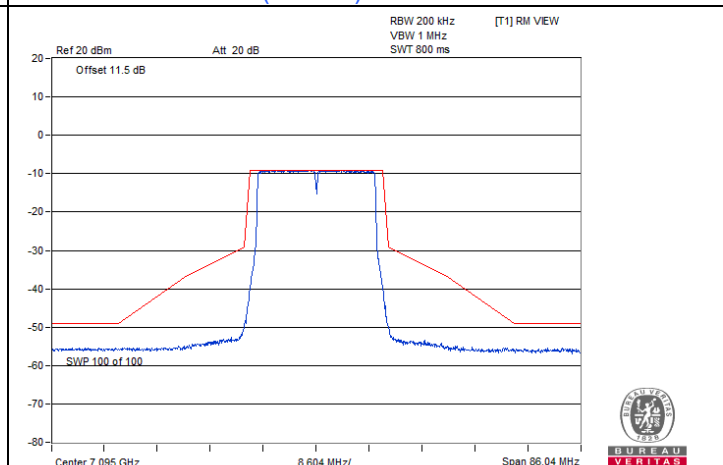


802.11be (EHT20) / Chain 0 : CH 229


Spectrum Plot

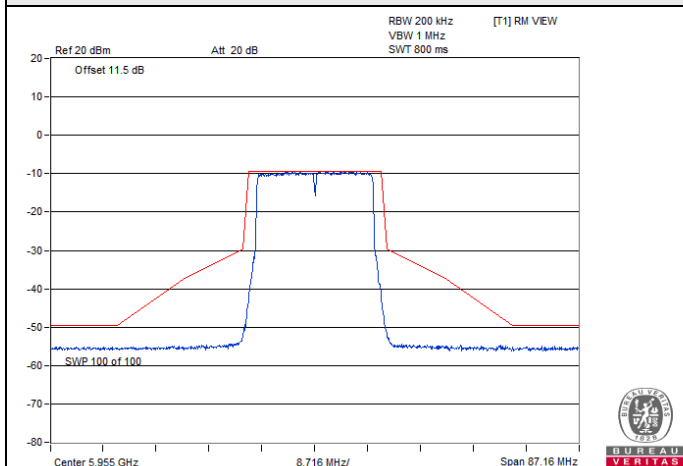


802.11be (EHT20) / Chain 1 : CH 1

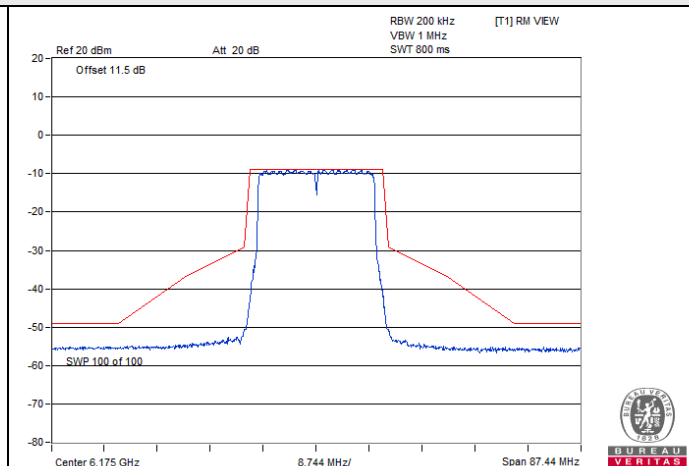


802.11be (EHT20) / Chain 1 : CH 45

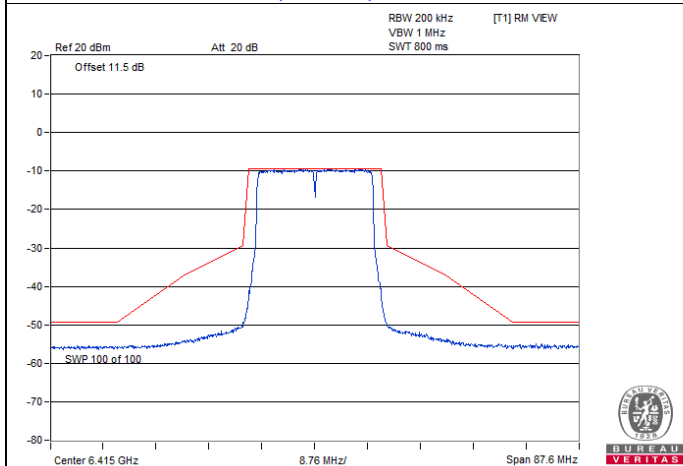


802.11be (EHT20) / Chain 1 : CH 93

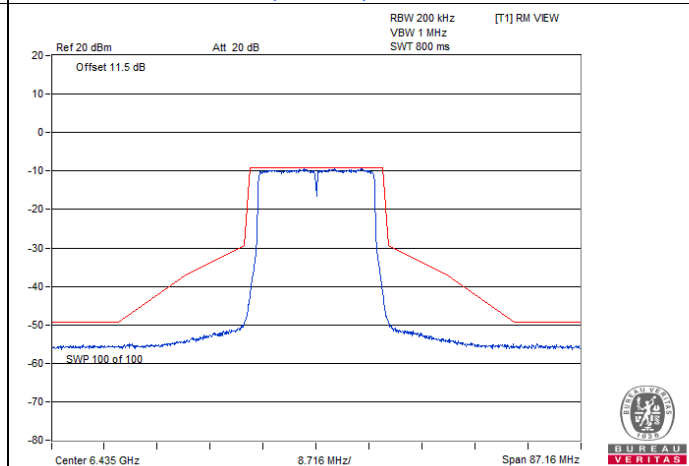

802.11be (EHT20) / Chain 1 : CH 97

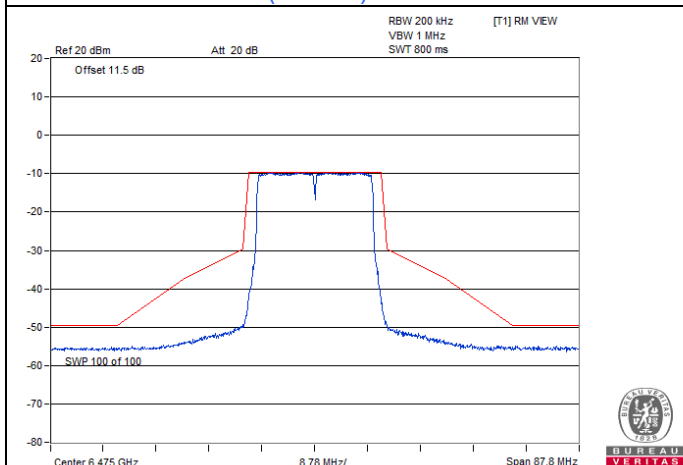


802.11be (EHT20) / Chain 1 : CH 105

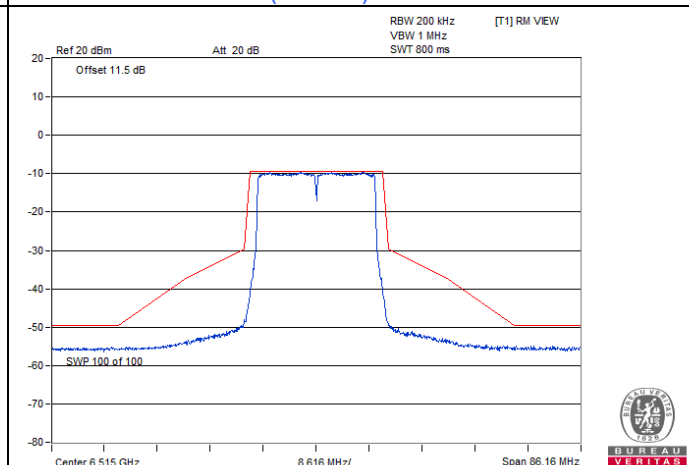


802.11be (EHT20) / Chain 1 : CH 113


Spectrum Plot

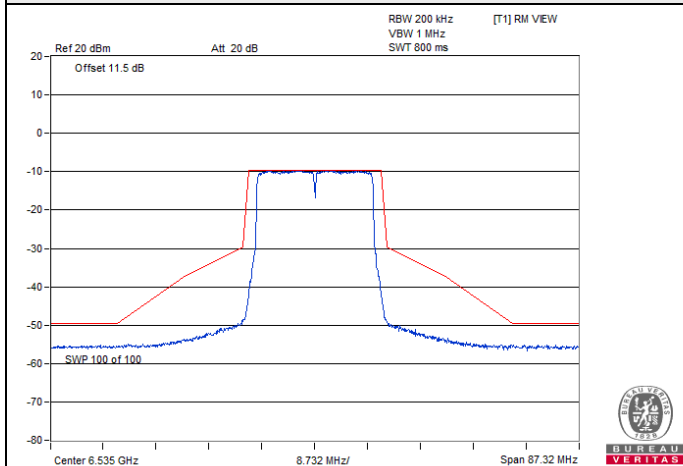


802.11be (EHT20) / Chain 1 : CH 117

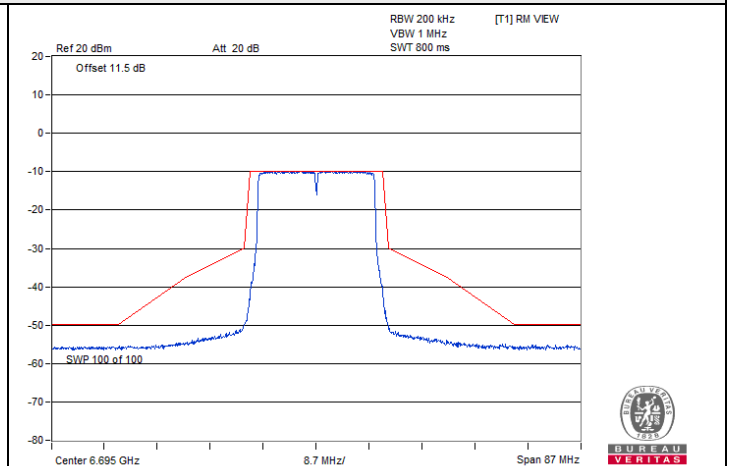


802.11be (EHT20) / Chain 1 : CH 149

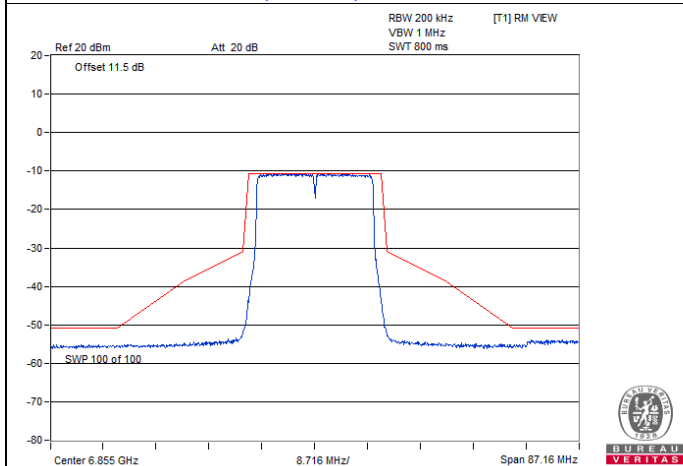


802.11be (EHT20) / Chain 1 : CH 181

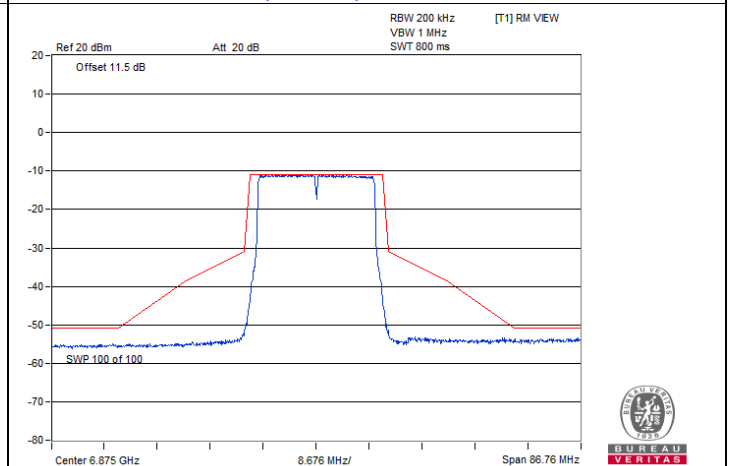

802.11be (EHT20) / Chain 1 : CH 185

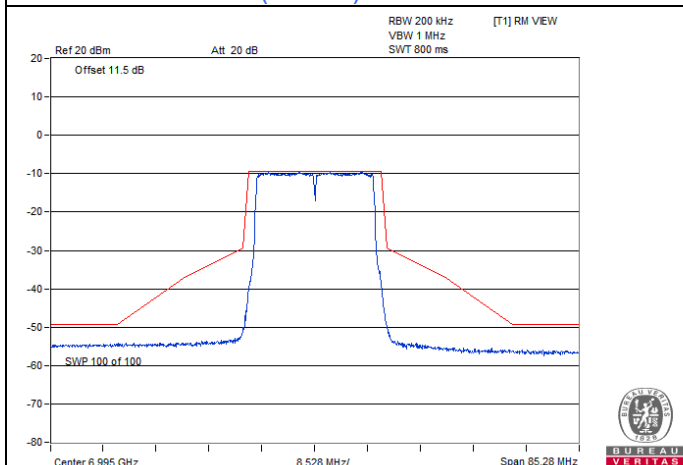


802.11be (EHT20) / Chain 1 : CH 209

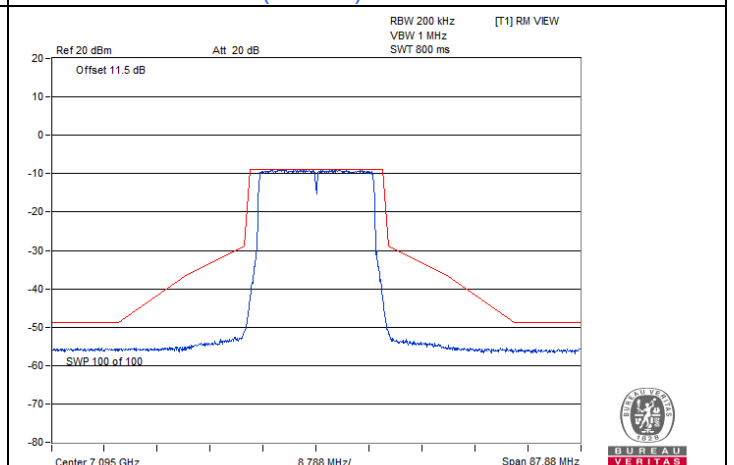


802.11be (EHT20) / Chain 1 : CH 229


Spectrum Plot

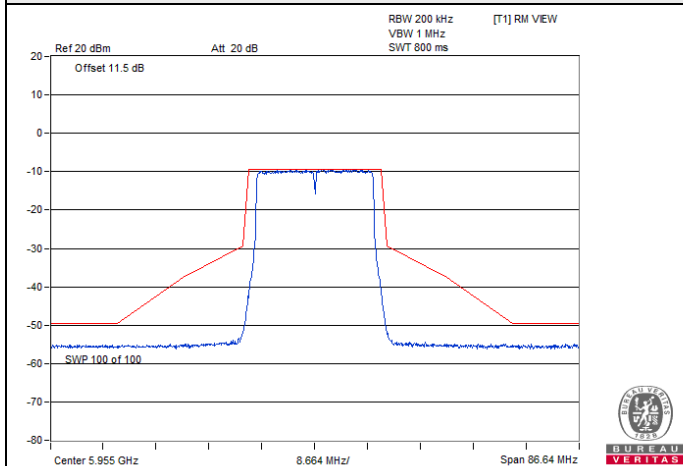


802.11be (EHT20) / Chain 2 : CH 1

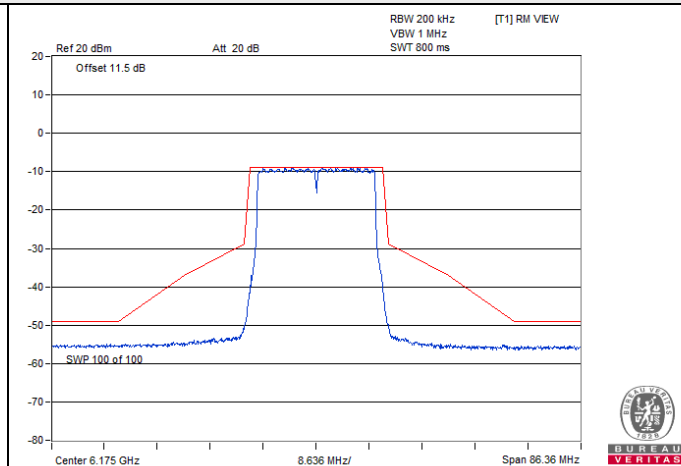


802.11be (EHT20) / Chain 2 : CH 45

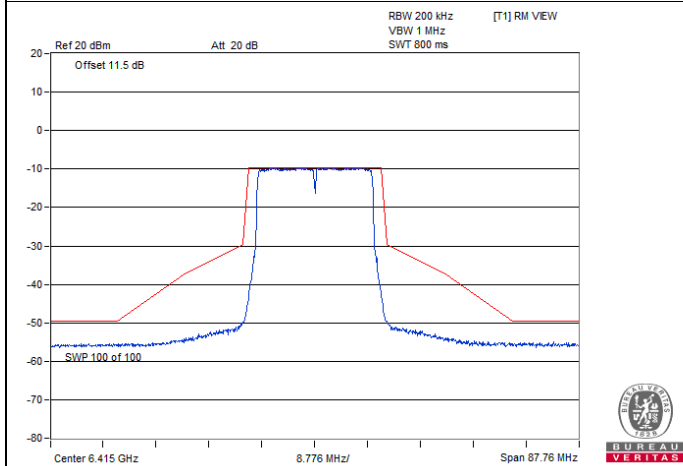


802.11be (EHT20) / Chain 2 : CH 93

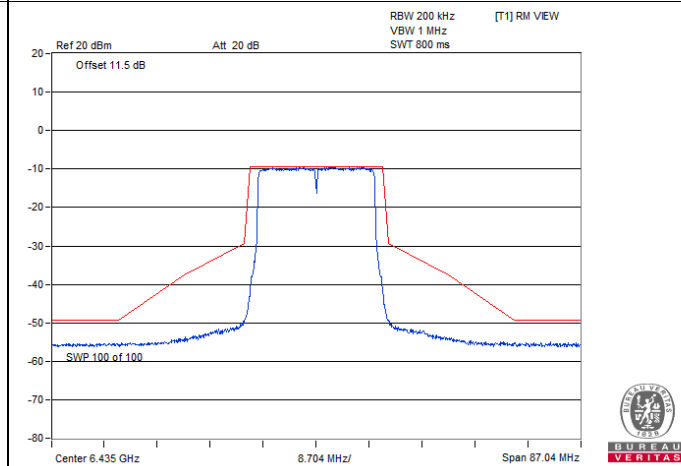

802.11be (EHT20) / Chain 2 : CH 97

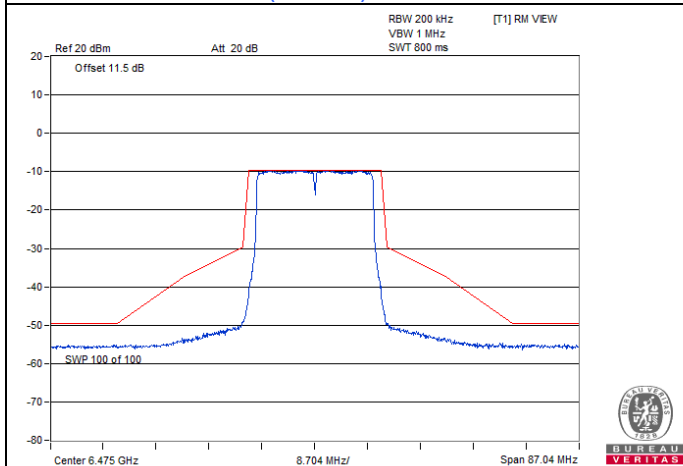


802.11be (EHT20) / Chain 2 : CH 105

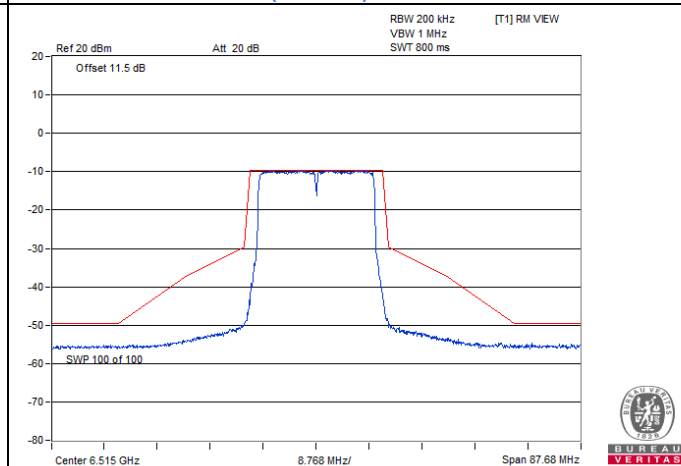


802.11be (EHT20) / Chain 2 : CH 113


Spectrum Plot

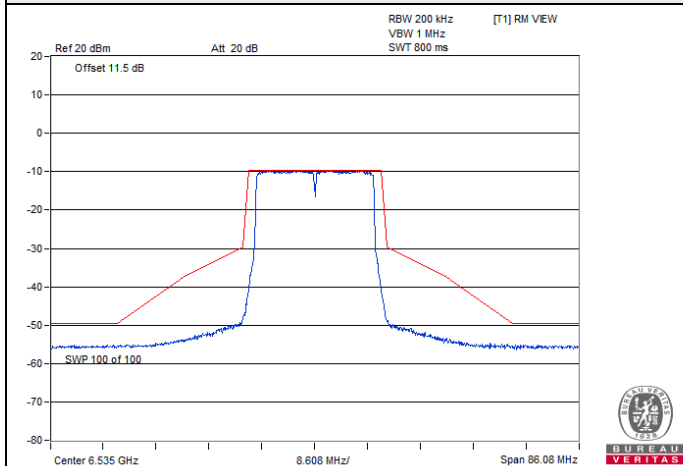


802.11be (EHT20) / Chain 2 : CH 117

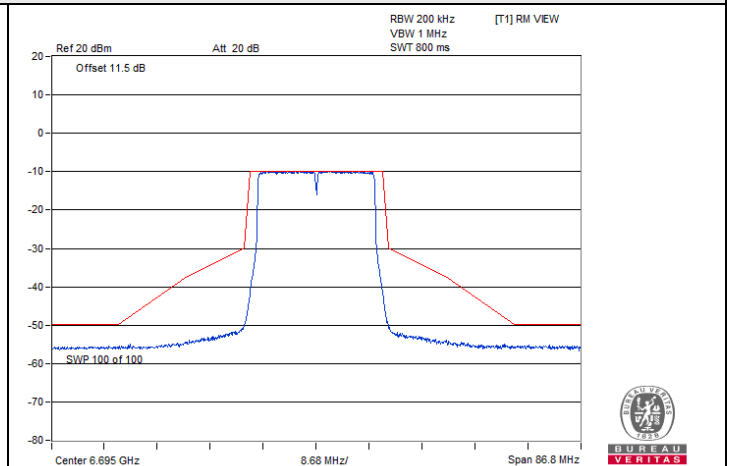


802.11be (EHT20) / Chain 2 : CH 149

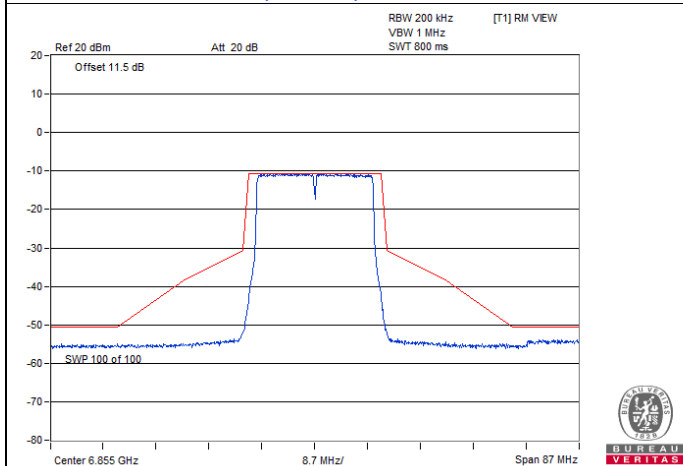


802.11be (EHT20) / Chain 2 : CH 181

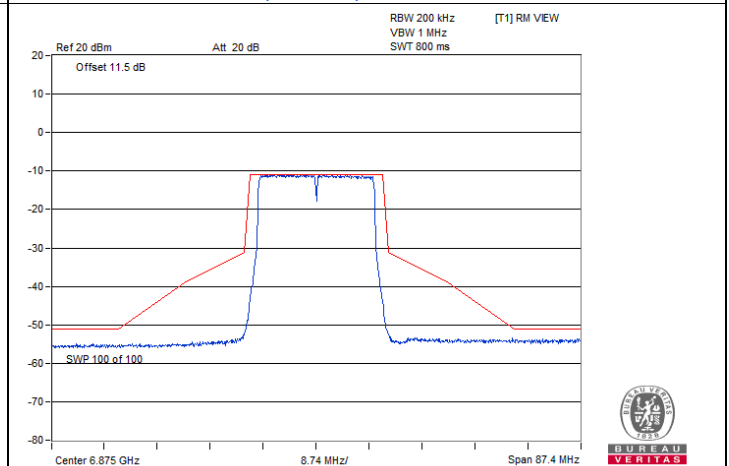

802.11be (EHT20) / Chain 2 : CH 185

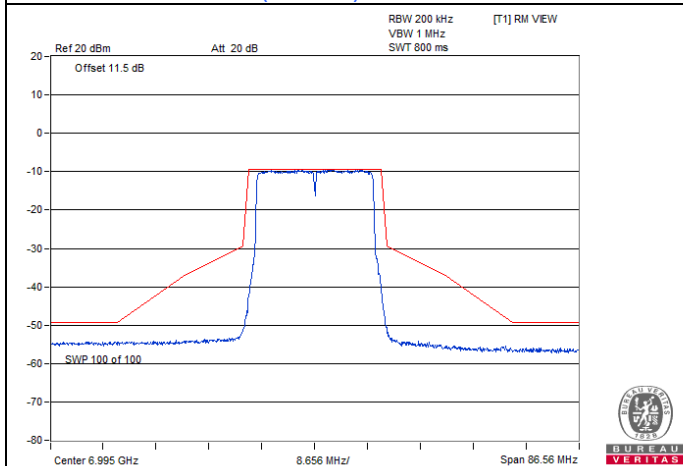


802.11be (EHT20) / Chain 2 : CH 209

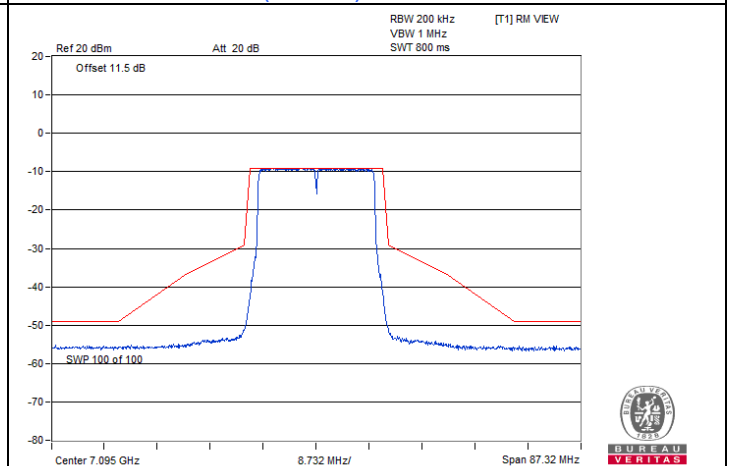


802.11be (EHT20) / Chain 2 : CH 229


Spectrum Plot

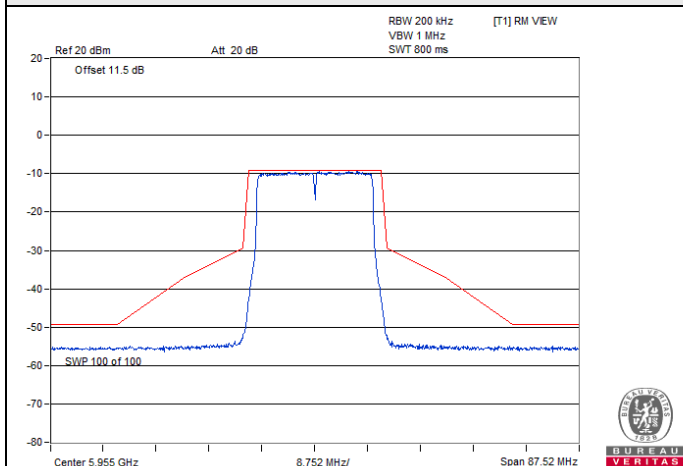


802.11be (EHT20) / Chain 3 : CH 1

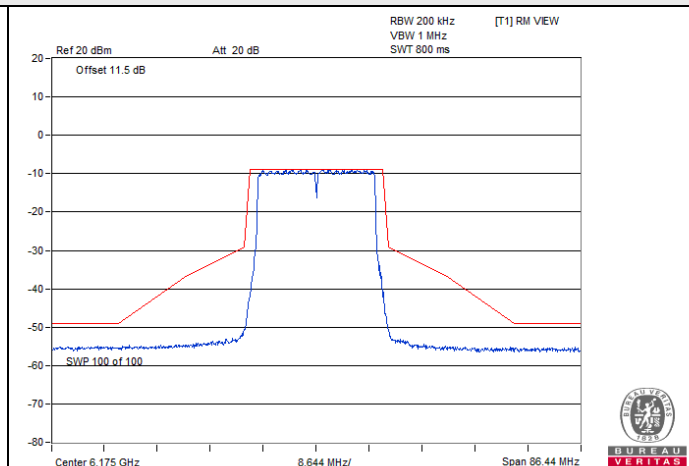


802.11be (EHT20) / Chain 3 : CH 45

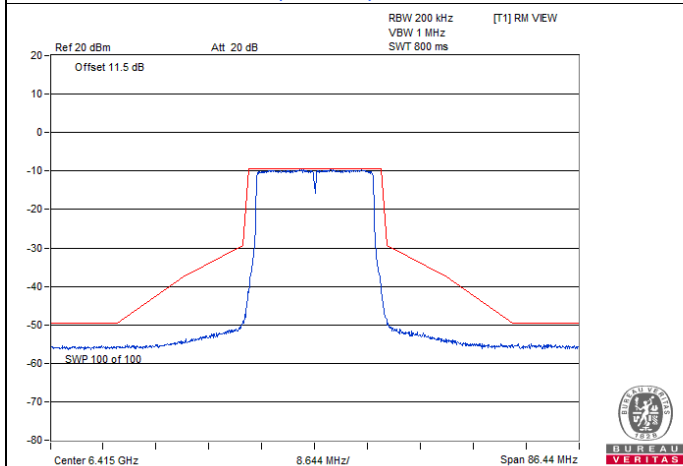


802.11be (EHT20) / Chain 3 : CH 93

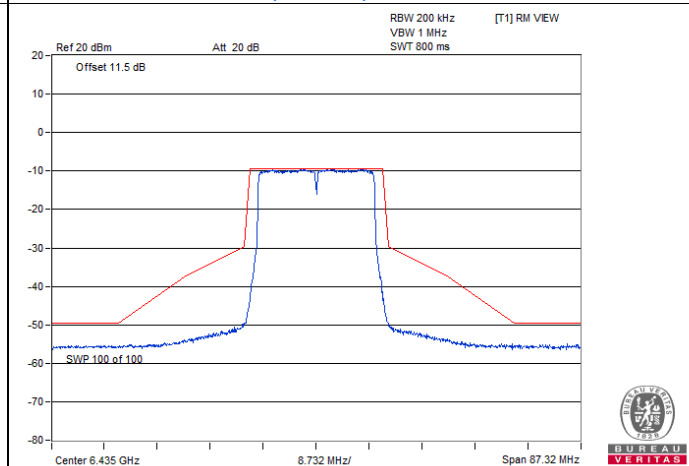

802.11be (EHT20) / Chain 3 : CH 97

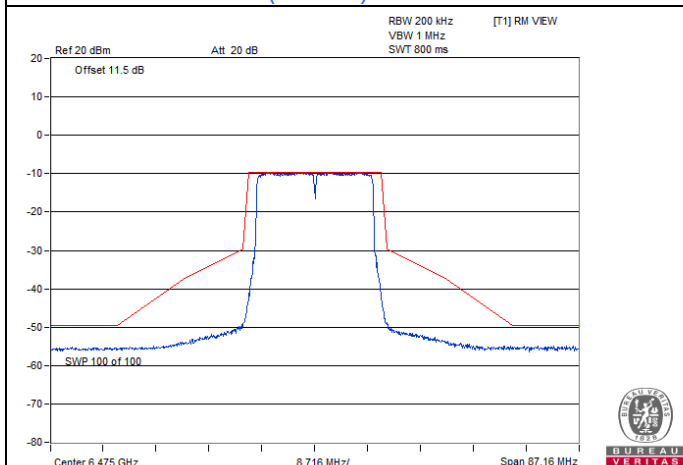


802.11be (EHT20) / Chain 3 : CH 105

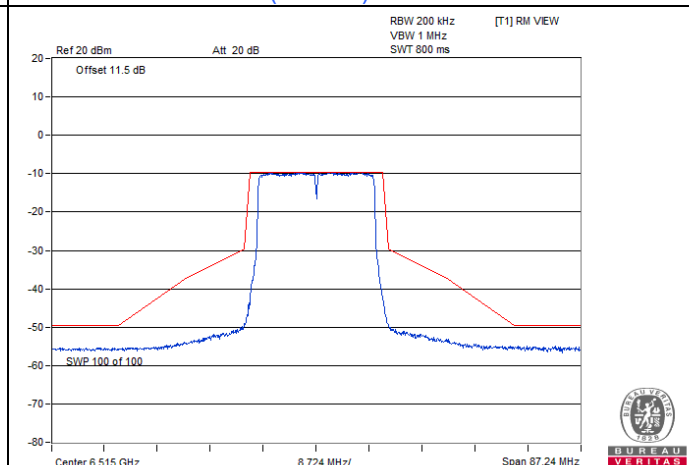


802.11be (EHT20) / Chain 3 : CH 113


Spectrum Plot

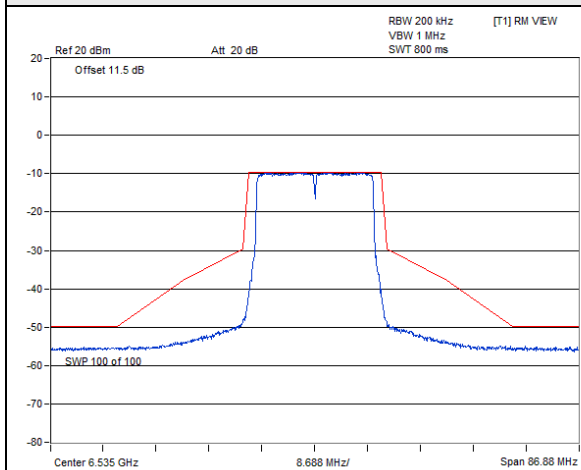


802.11be (EHT20) / Chain 3 : CH 117

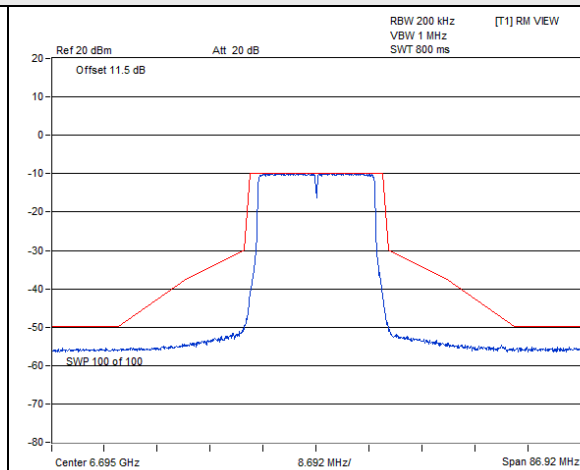


802.11be (EHT20) / Chain 3 : CH 149

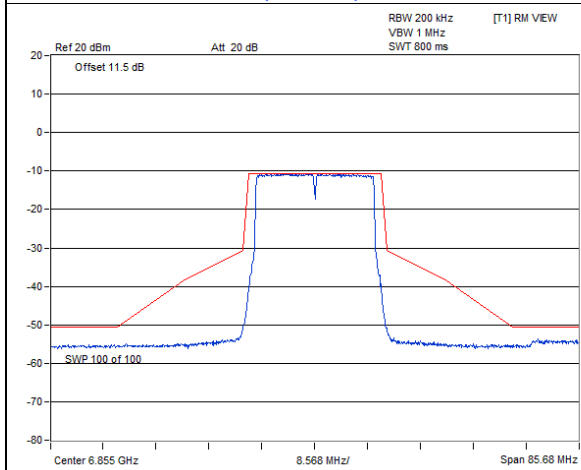


802.11be (EHT20) / Chain 3 : CH 181

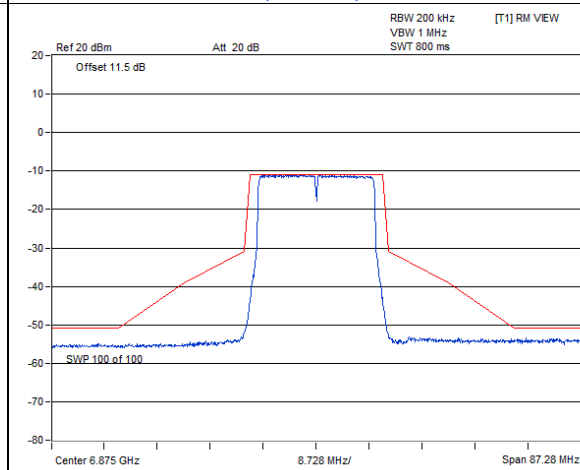

802.11be (EHT20) / Chain 3 : CH 185

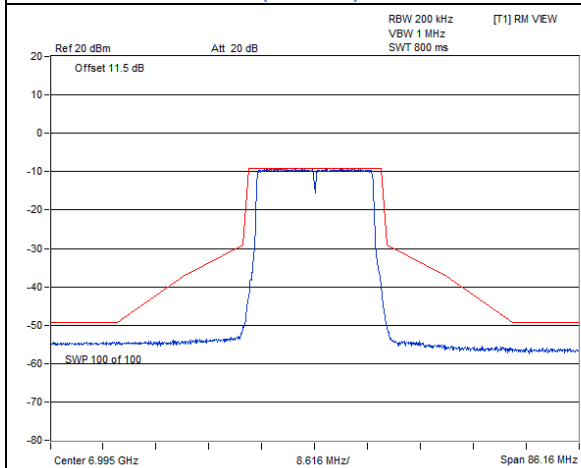


802.11be (EHT20) / Chain 3 : CH 209

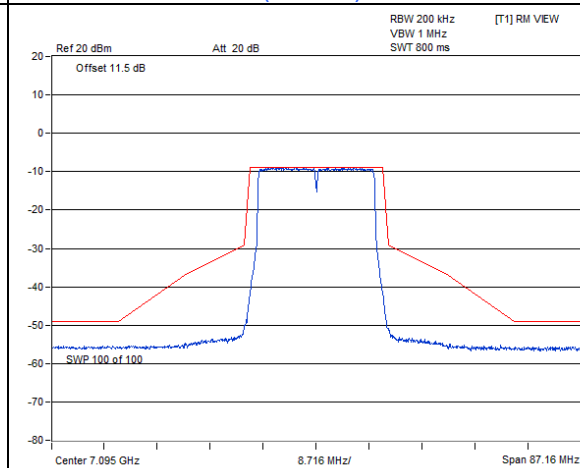


802.11be (EHT20) / Chain 3 : CH 229

802.11be (EHT40)


Spectrum Plot

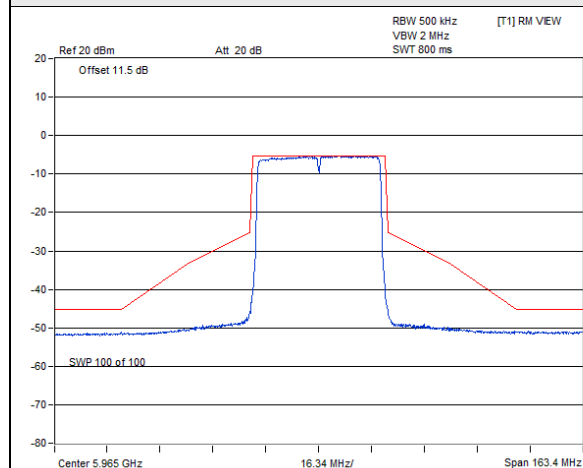


802.11be (EHT40) / Chain 0 : CH 3

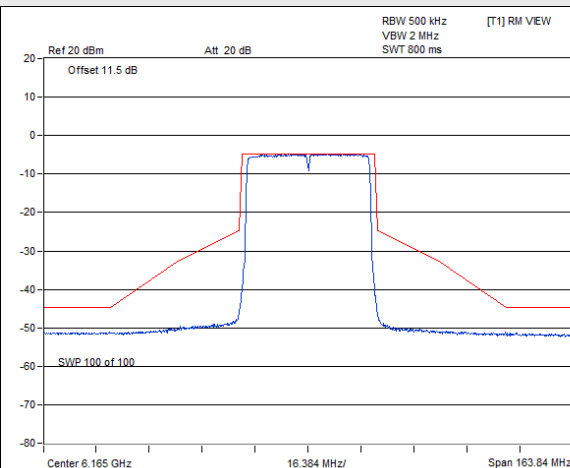


802.11be (EHT40) / Chain 0 : CH 43

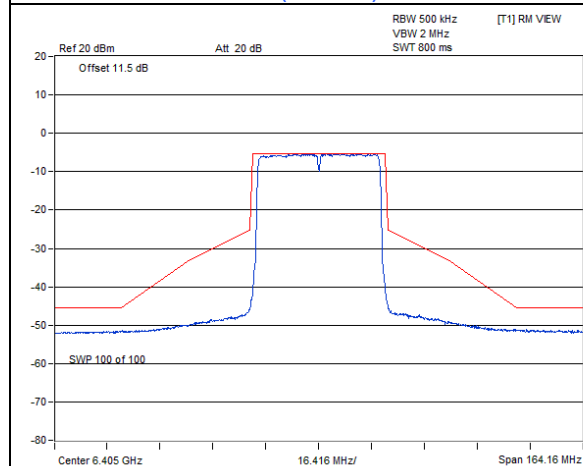


802.11be (EHT40) / Chain 0 : CH 91

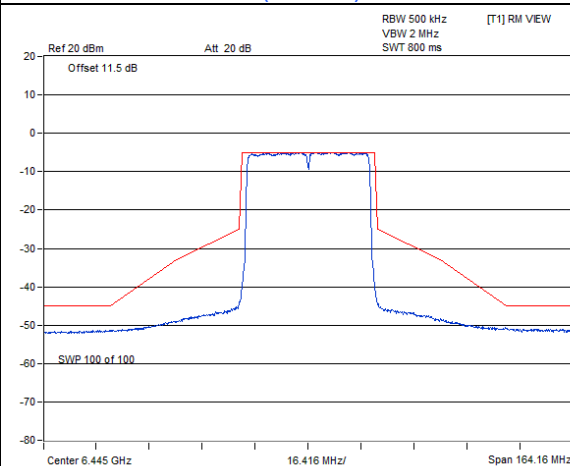

802.11be (EHT40) / Chain 0 : CH 99

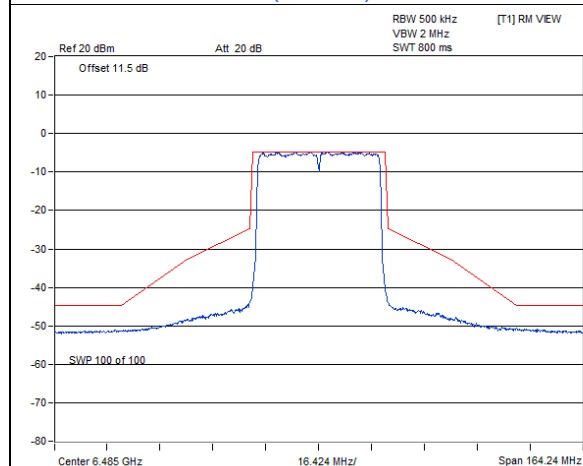


802.11be (EHT40) / Chain 0 : CH 107

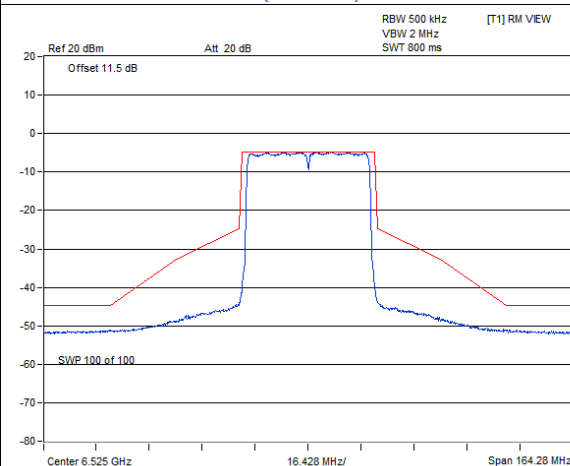


802.11be (EHT40) / Chain 0 : CH 115


Spectrum Plot

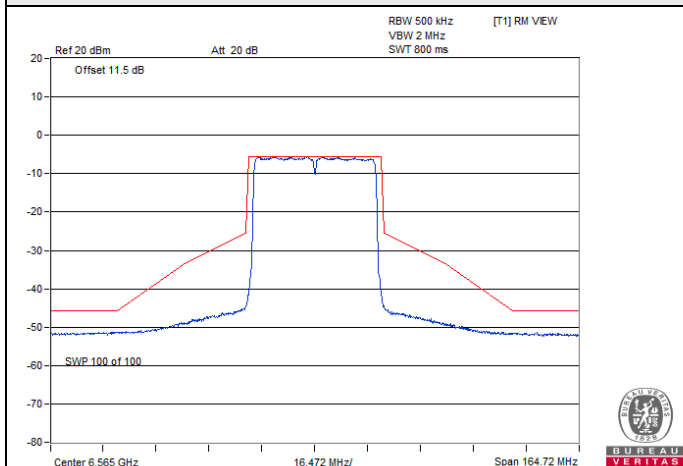


802.11be (EHT40) / Chain 0 : CH 123

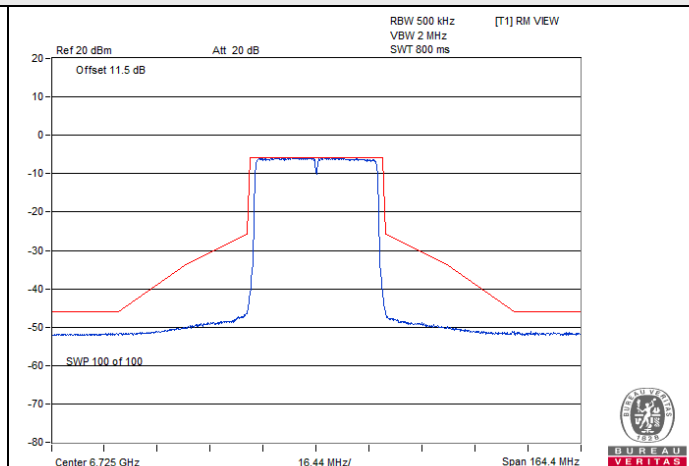


802.11be (EHT40) / Chain 0 : CH 155

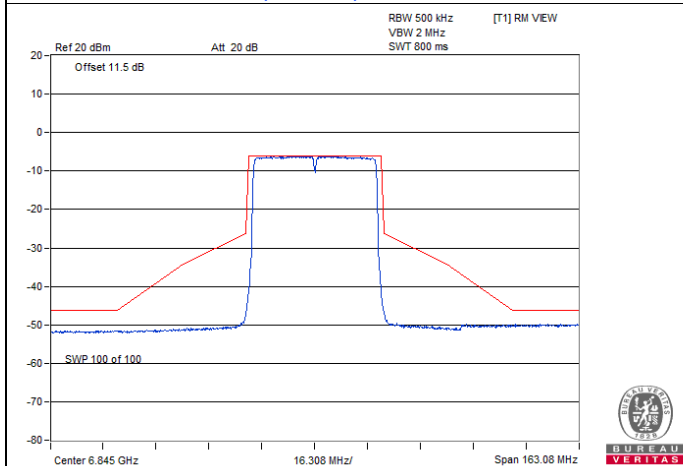


802.11be (EHT40) / Chain 0 : CH 179

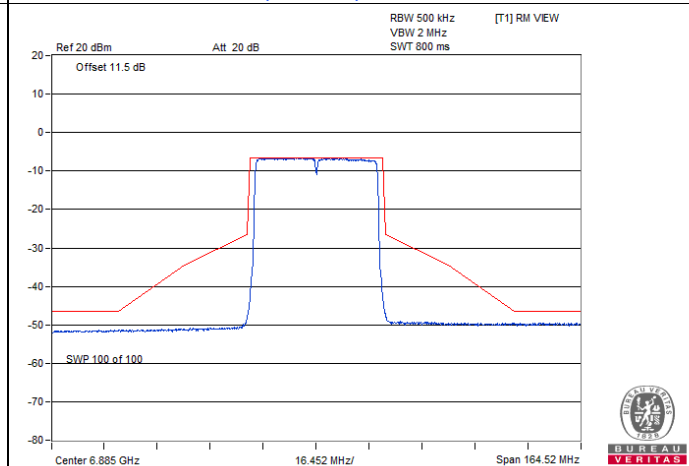

802.11be (EHT40) / Chain 0 : CH 187






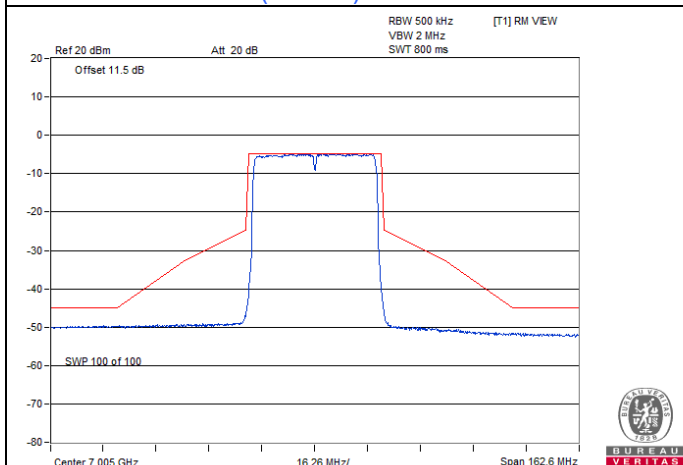


802.11be (EHT40) / Chain 0 : CH 211

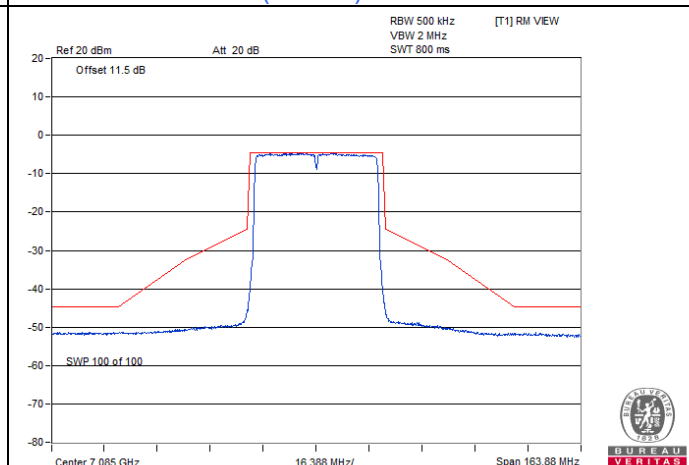


802.11be (EHT40) / Chain 0 : CH 227


Spectrum Plot

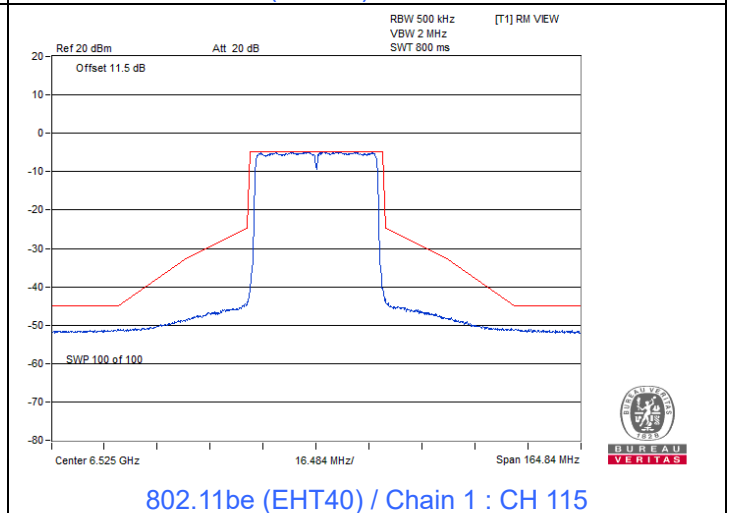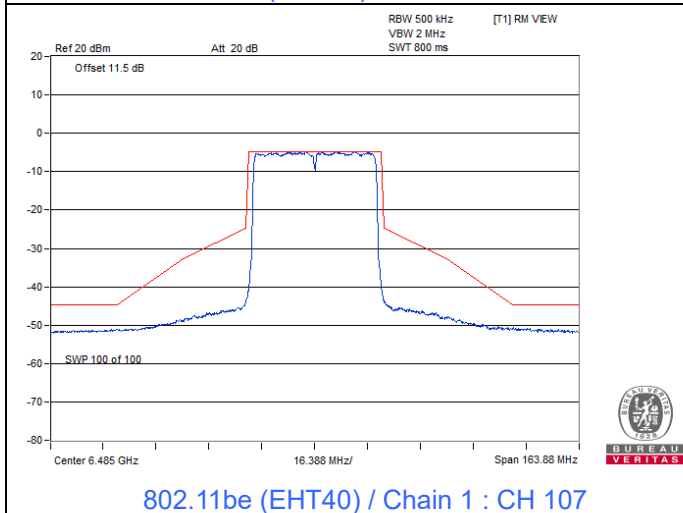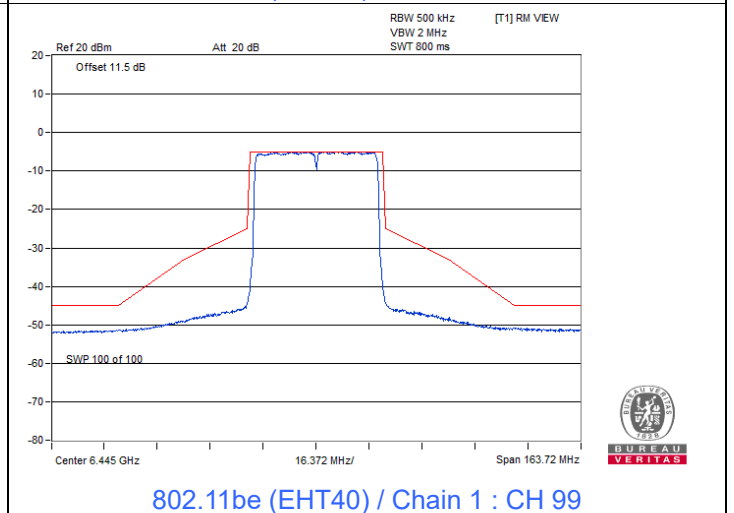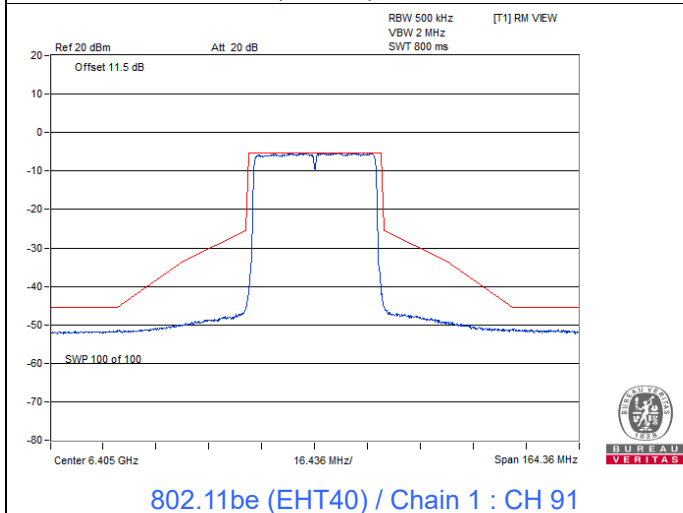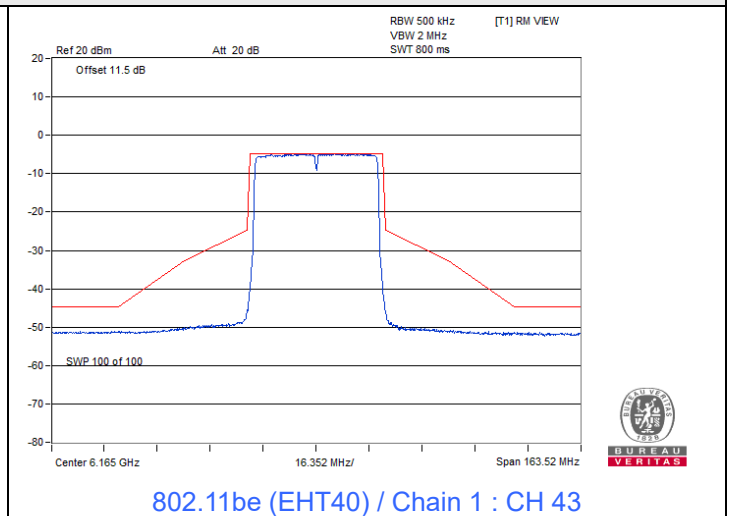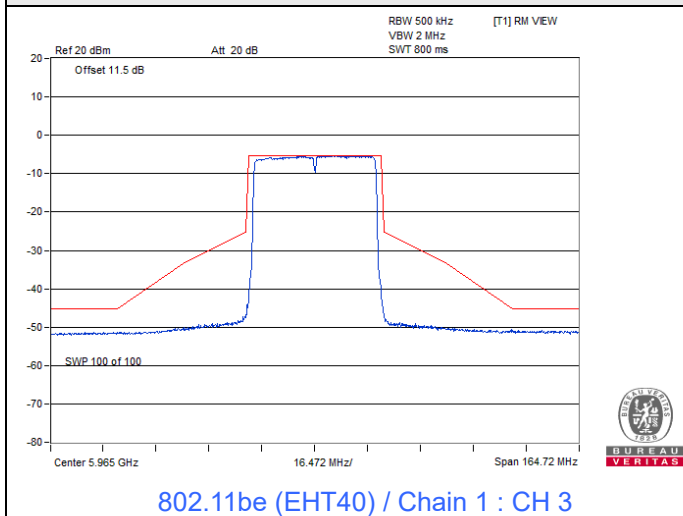


Spectrum Plot

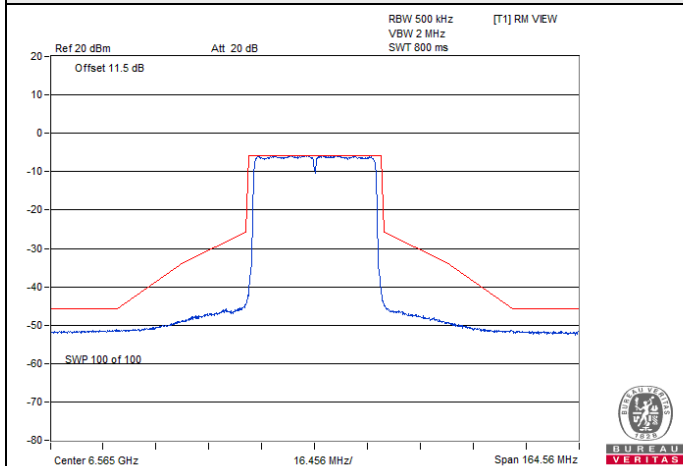


802.11be (EHT40) / Chain 1 : CH 123

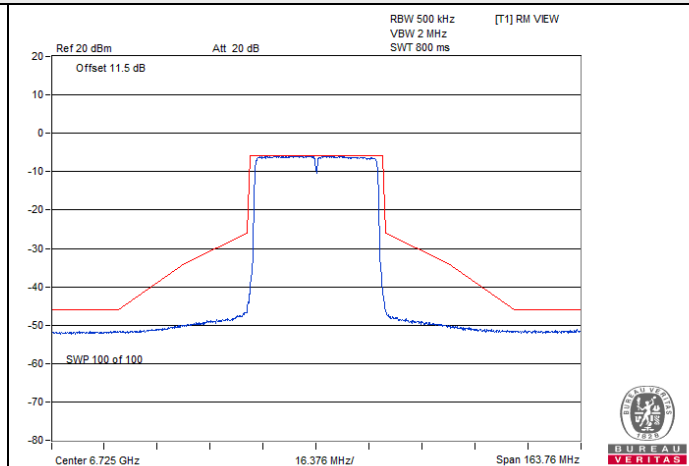


802.11be (EHT40) / Chain 1 : CH 155

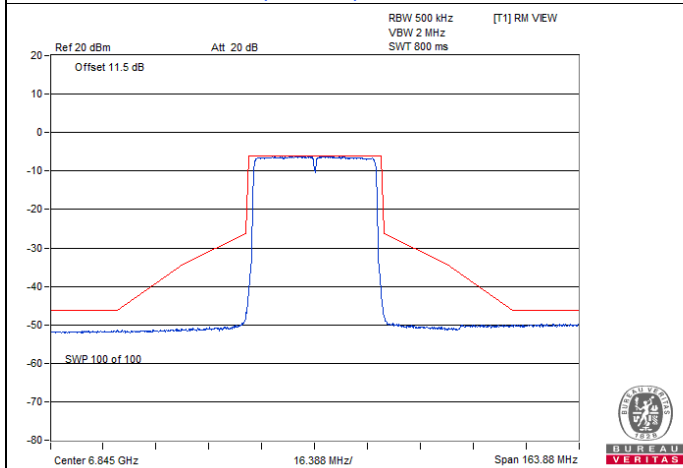


802.11be (EHT40) / Chain 1 : CH 179

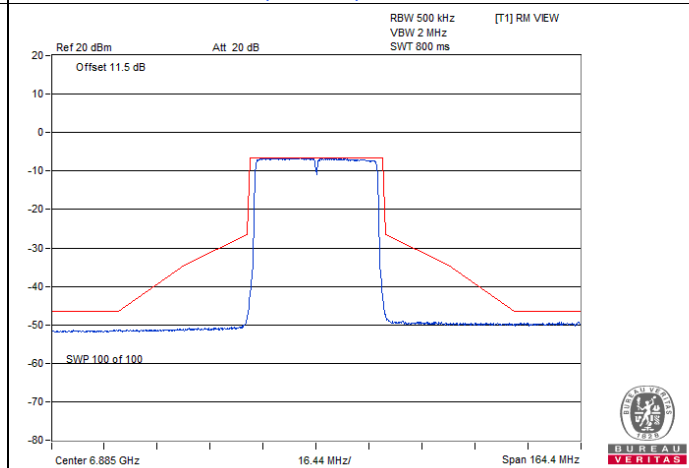

802.11be (EHT40) / Chain 1 : CH 187

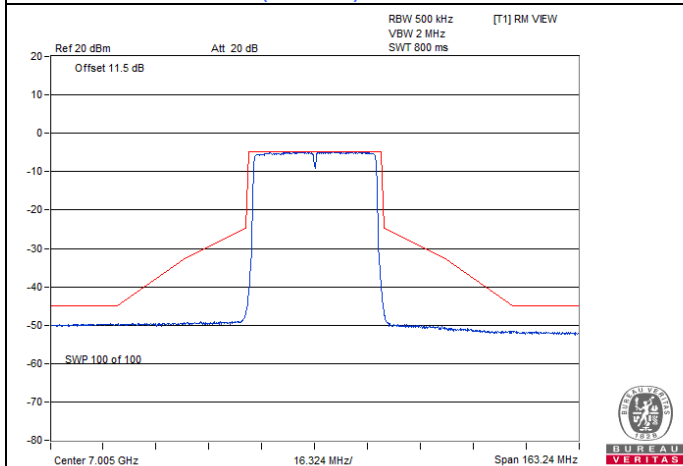


802.11be (EHT40) / Chain 1 : CH 211

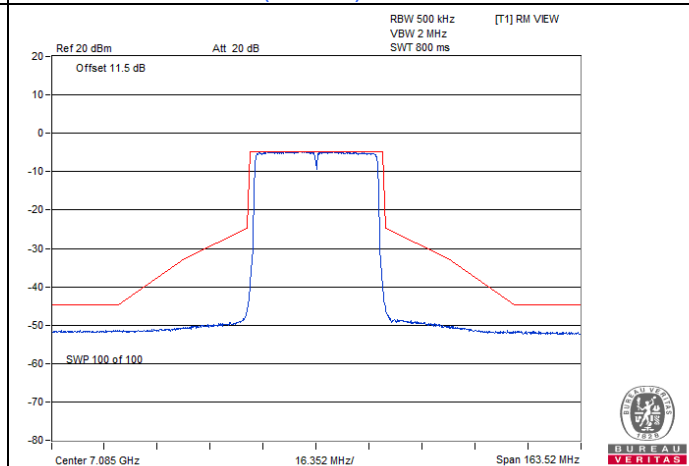


802.11be (EHT40) / Chain 1 : CH 227


Spectrum Plot

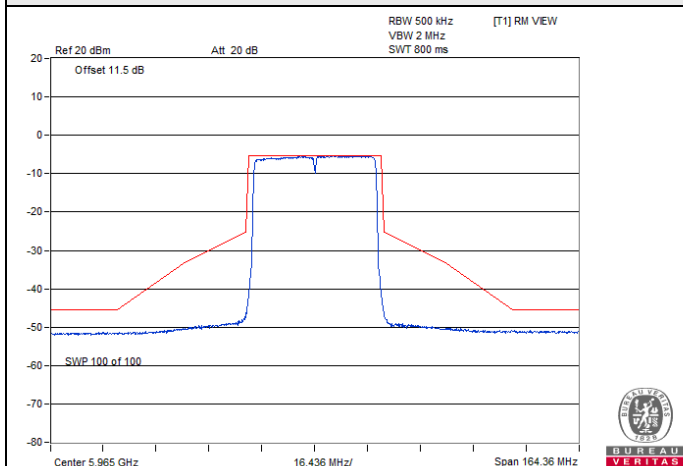


802.11be (EHT40) / Chain 2 : CH 3

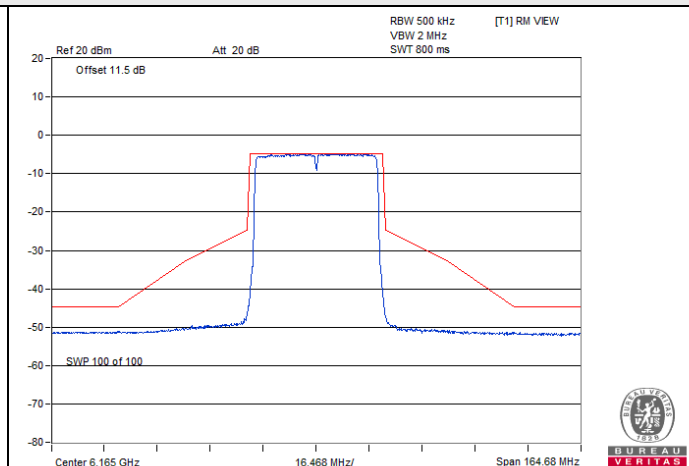


802.11be (EHT40) / Chain 2 : CH 43

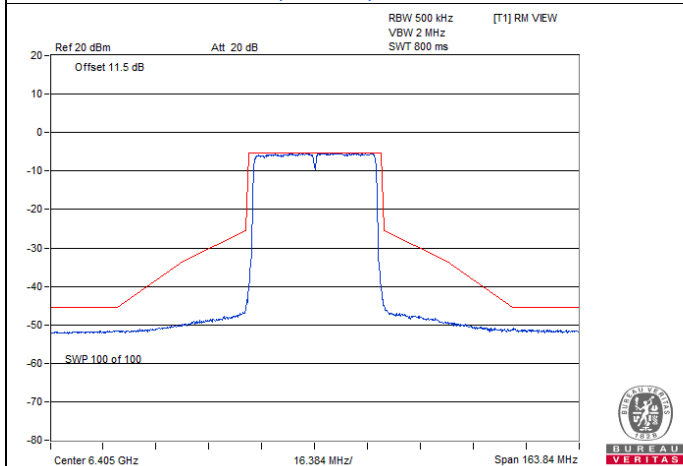


802.11be (EHT40) / Chain 2 : CH 91

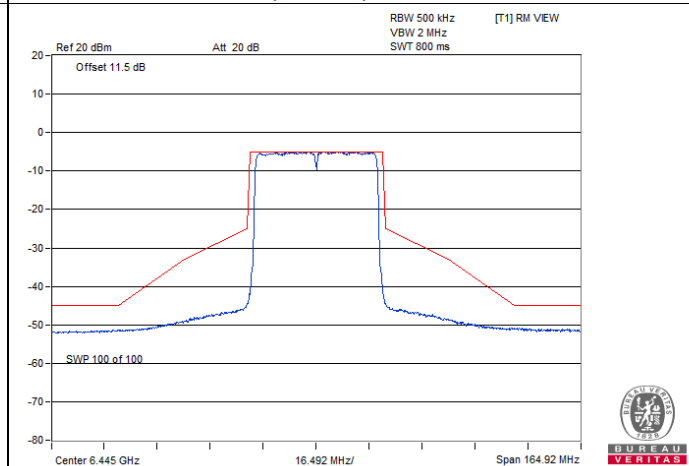

802.11be (EHT40) / Chain 2 : CH 99

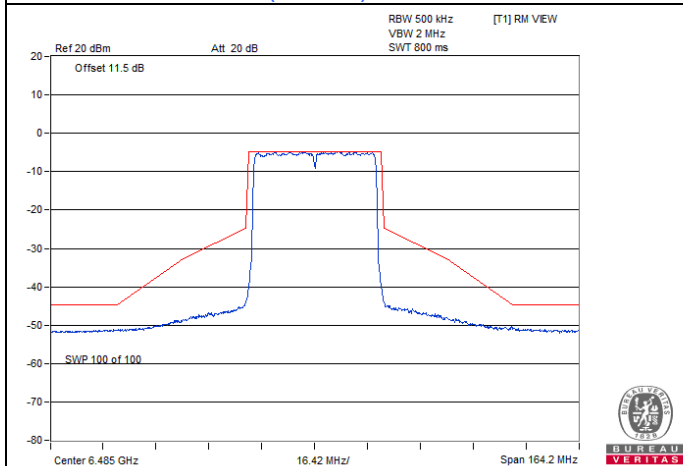


802.11be (EHT40) / Chain 2 : CH 107

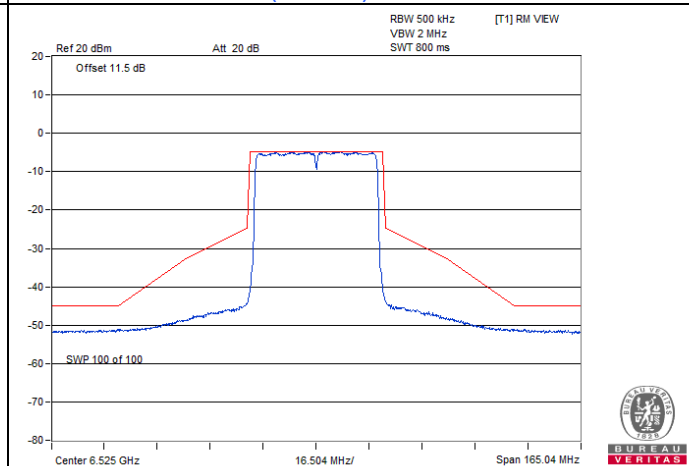


802.11be (EHT40) / Chain 2 : CH 115


Spectrum Plot

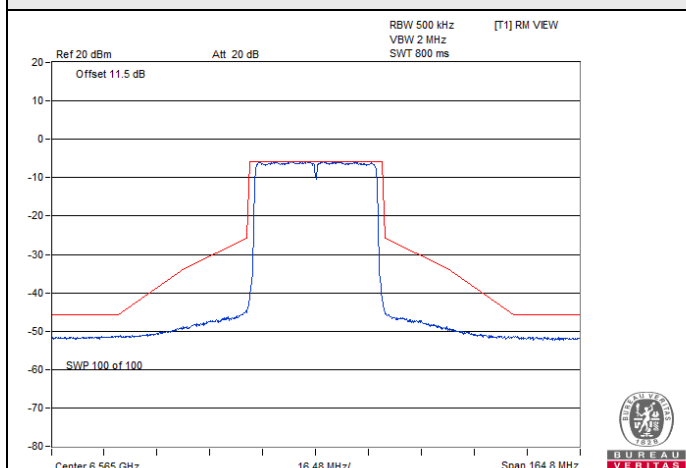


802.11be (EHT40) / Chain 2 : CH 123

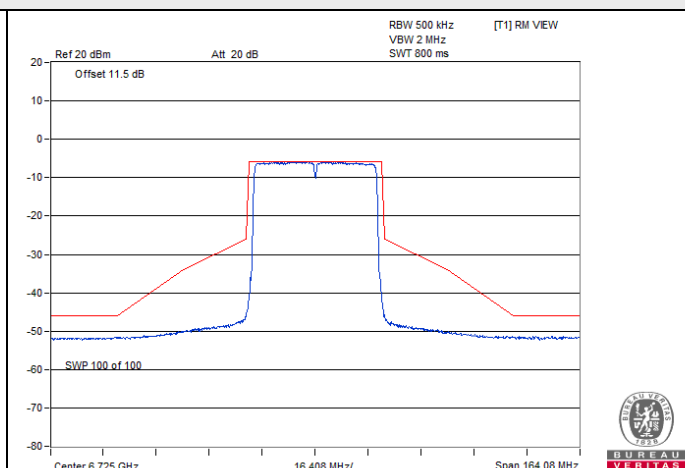


802.11be (EHT40) / Chain 2 : CH 155

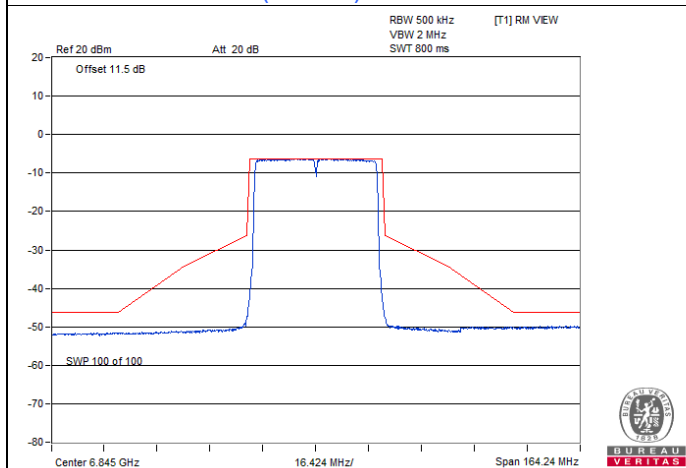


802.11be (EHT40) / Chain 2 : CH 179

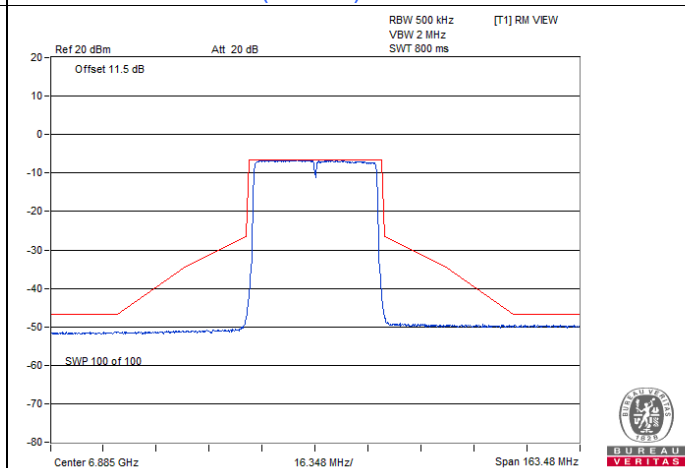

802.11be (EHT40) / Chain 2 : CH 187

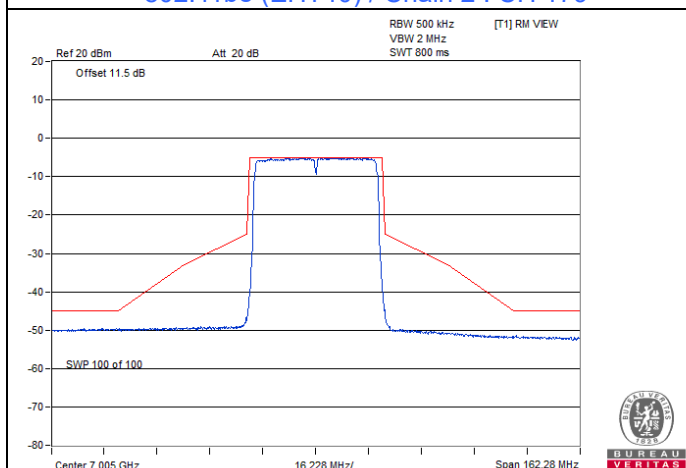


802.11be (EHT40) / Chain 2 : CH 211

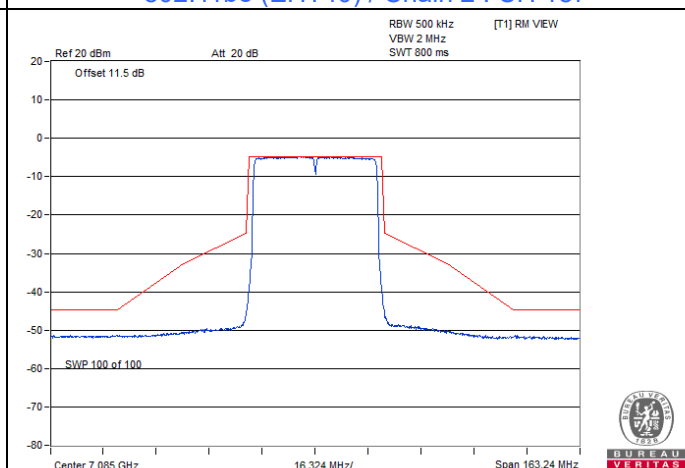


802.11be (EHT40) / Chain 2 : CH 227


Spectrum Plot

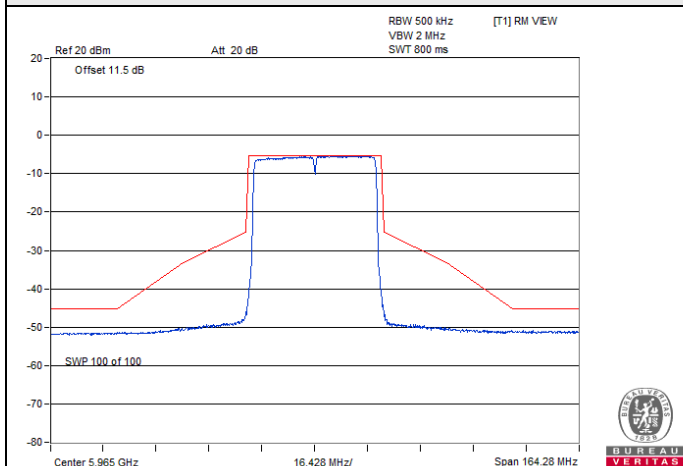


802.11be (EHT40) / Chain 3 : CH 3

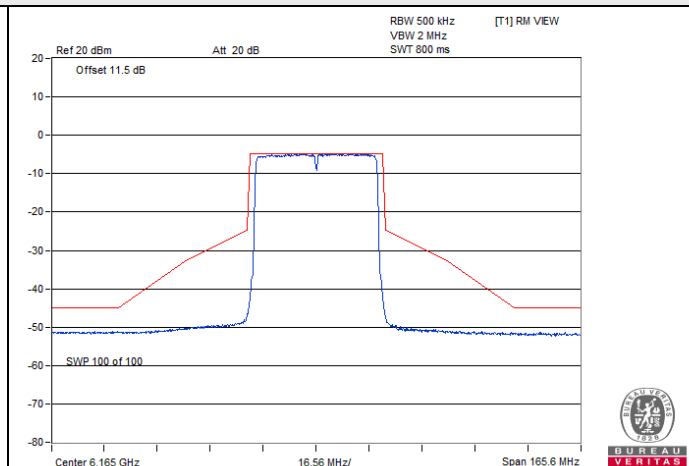


802.11be (EHT40) / Chain 3 : CH 43

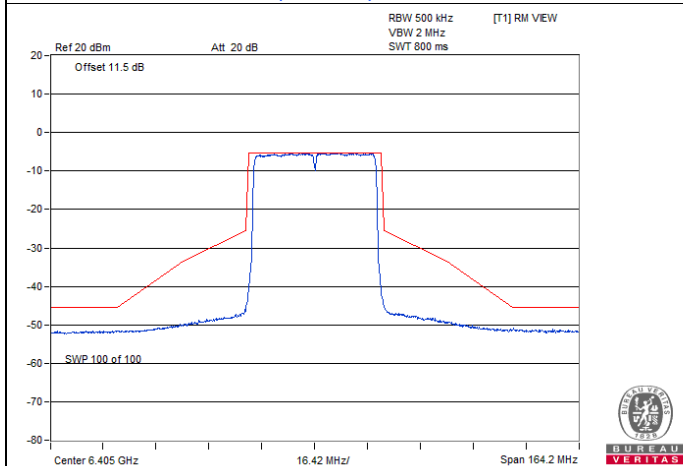


802.11be (EHT40) / Chain 3 : CH 91

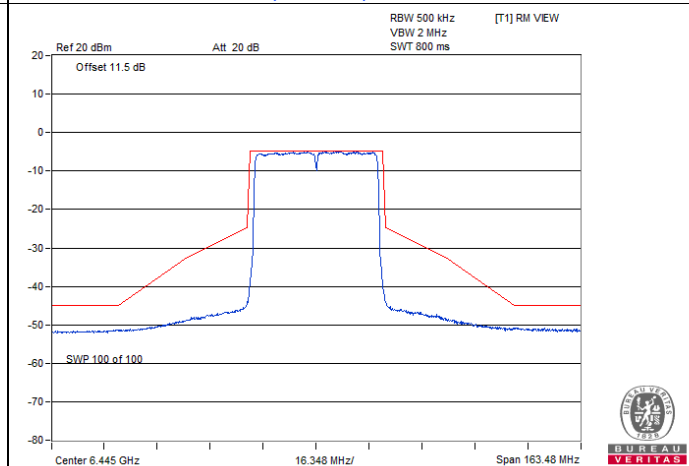

802.11be (EHT40) / Chain 3 : CH 99






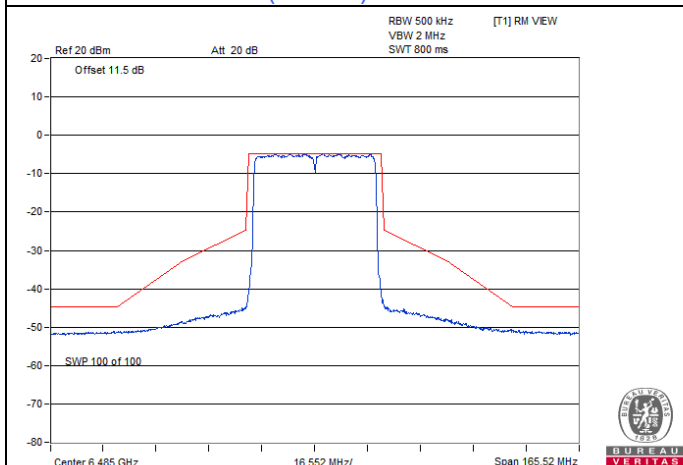


802.11be (EHT40) / Chain 3 : CH 107

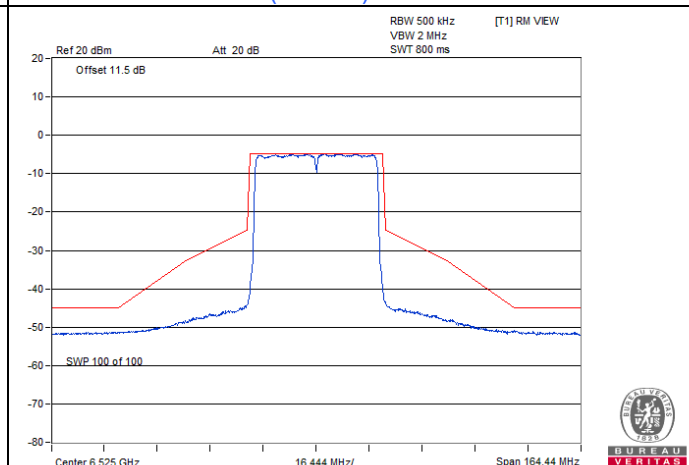


802.11be (EHT40) / Chain 3 : CH 115

Spectrum Plot

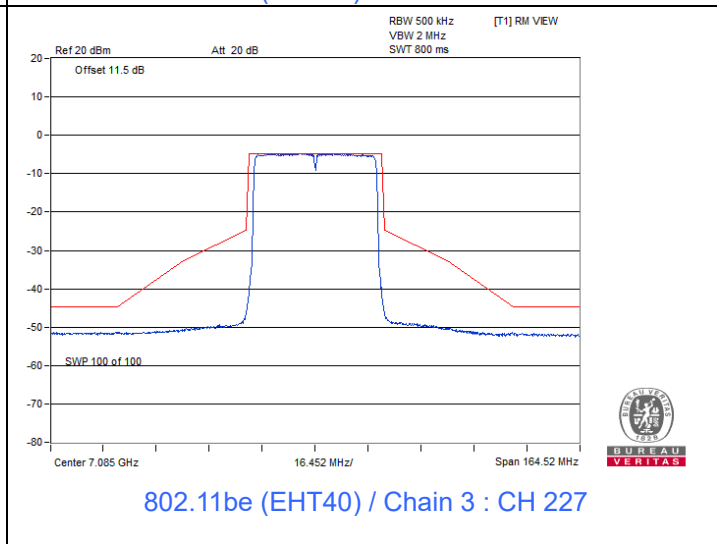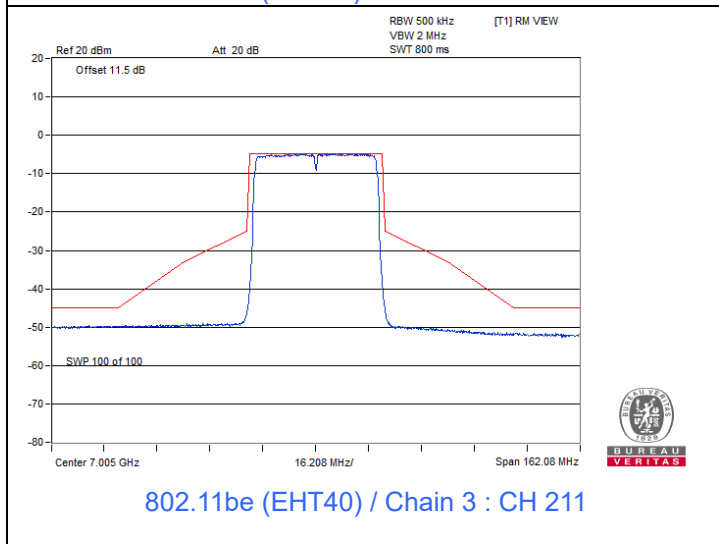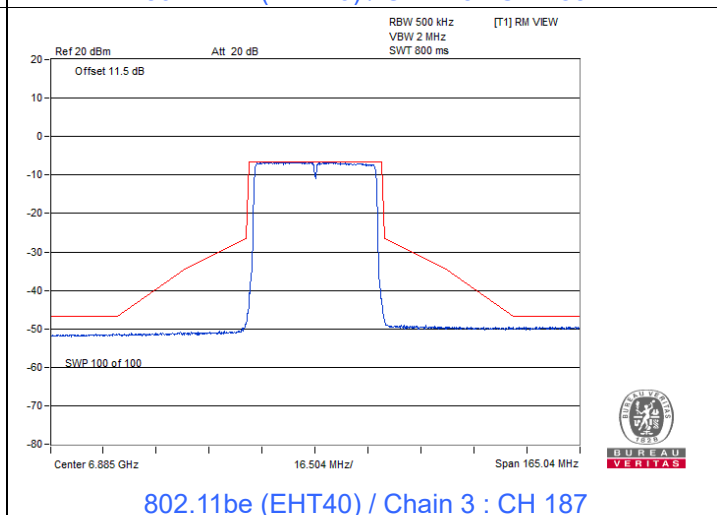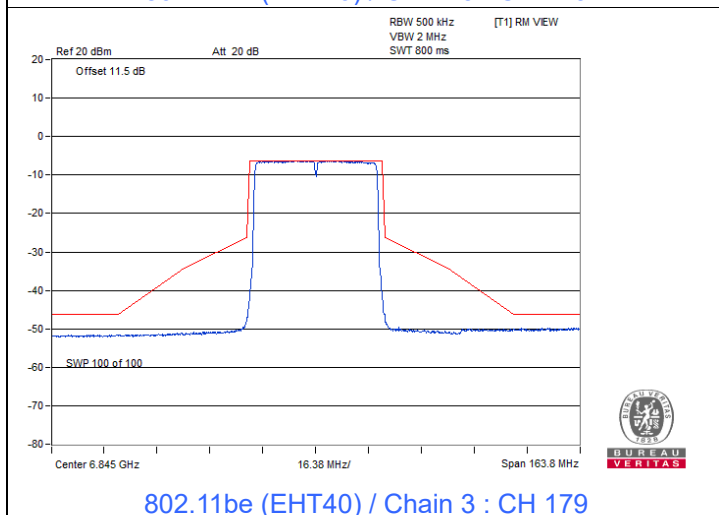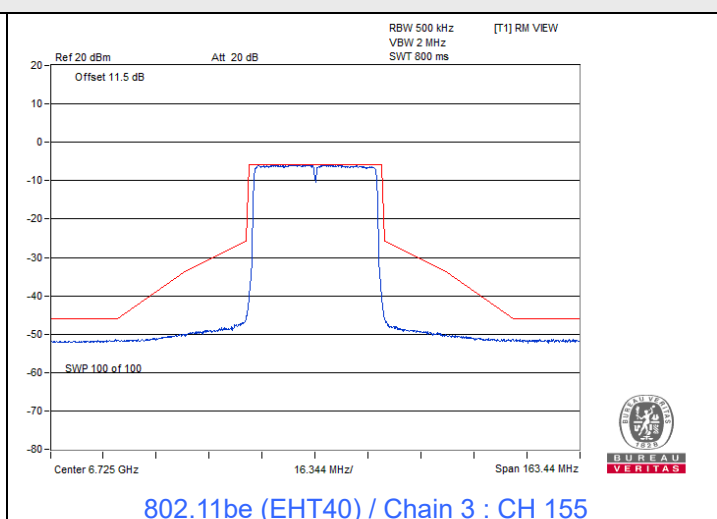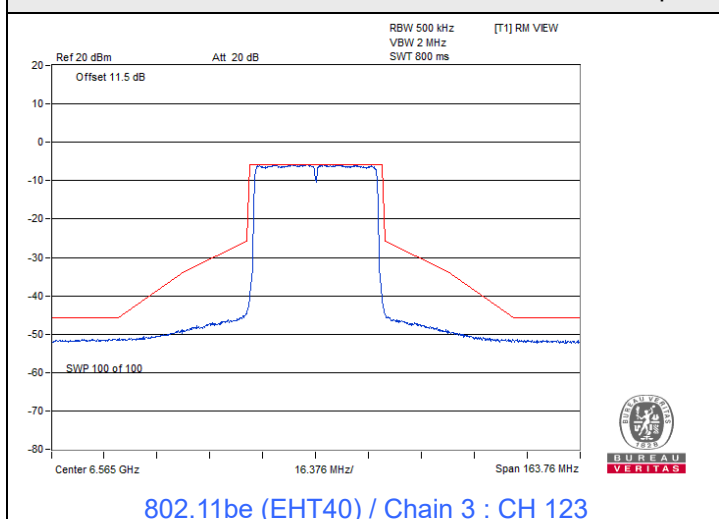


802.11be (EHT80)


Spectrum Plot

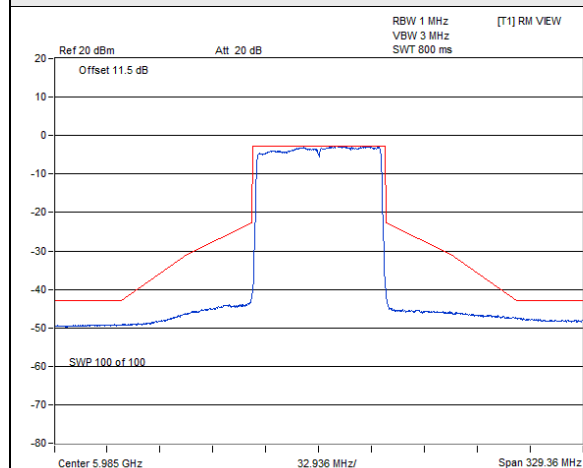


802.11be (EHT80) / Chain 0 : CH 7

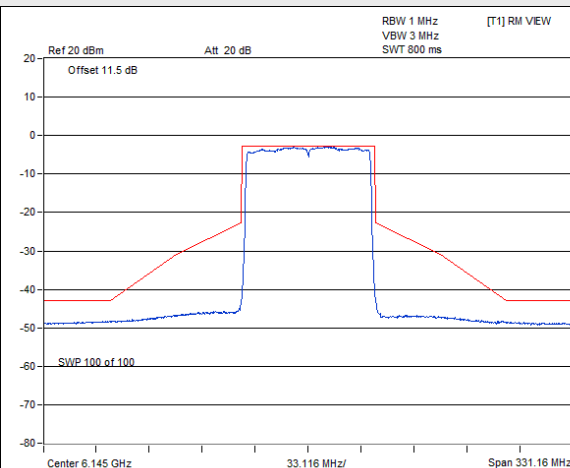


802.11be (EHT80) / Chain 0 : CH 39

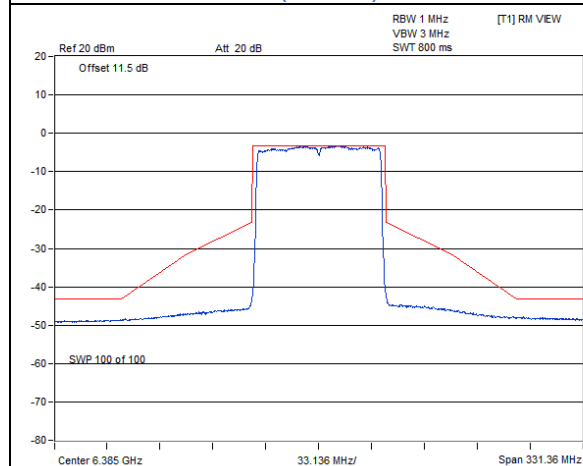


802.11be (EHT80) / Chain 0 : CH 87

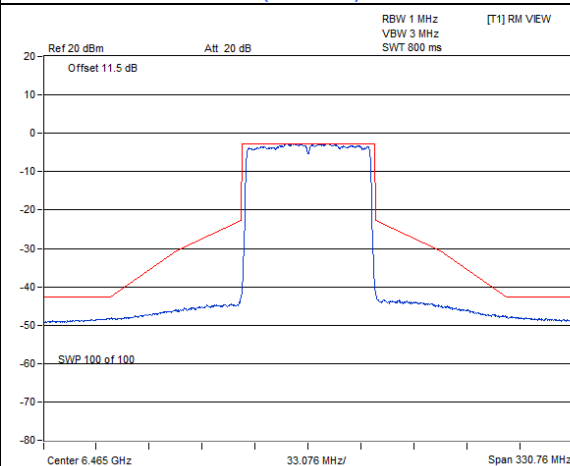

802.11be (EHT80) / Chain 0 : CH 103

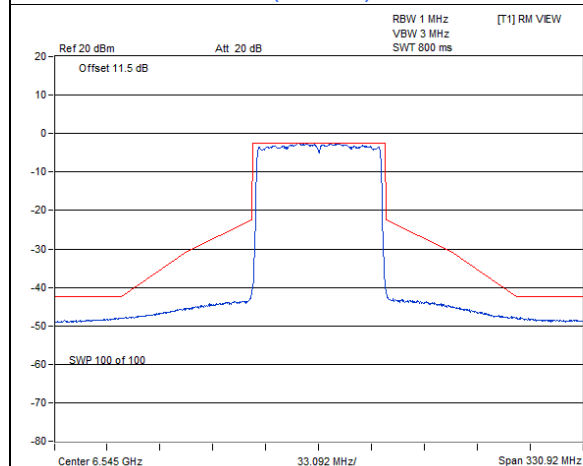


802.11be (EHT80) / Chain 0 : CH 119

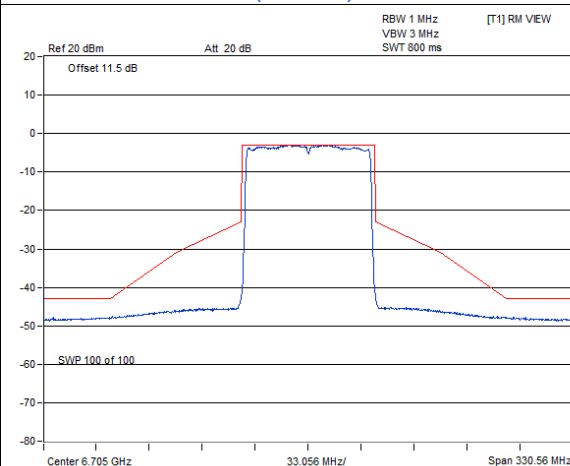


802.11be (EHT80) / Chain 0 : CH 151




Spectrum Plot

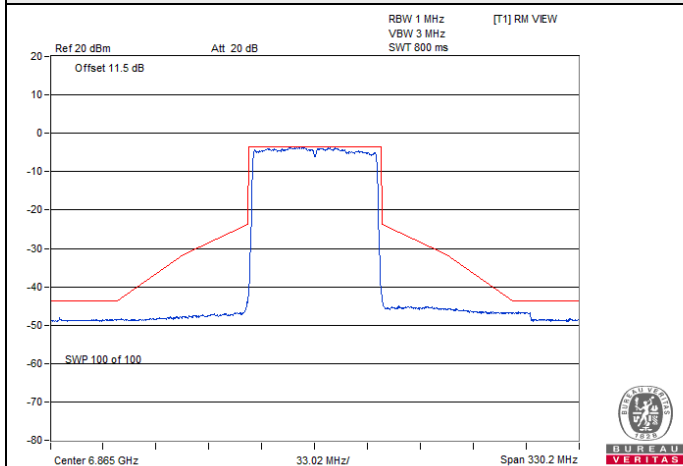


802.11be (EHT80) / Chain 0 : CH 183

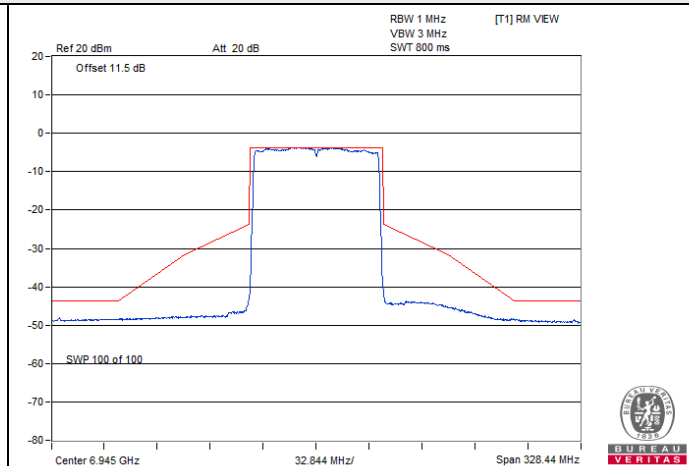


802.11be (EHT80) / Chain 0 : CH 199

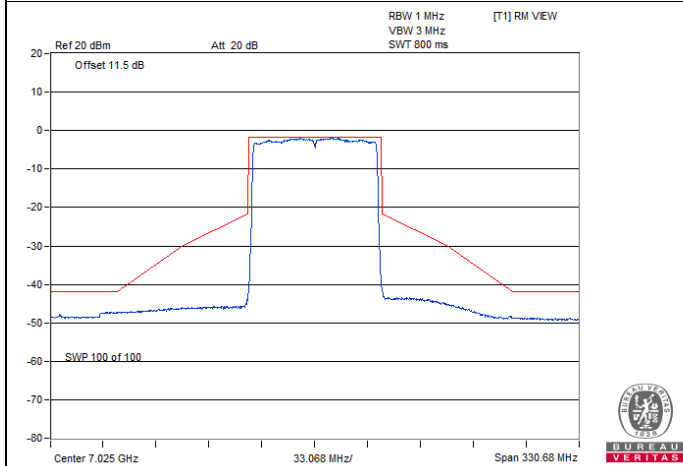


802.11be (EHT80) / Chain 0 : CH 215

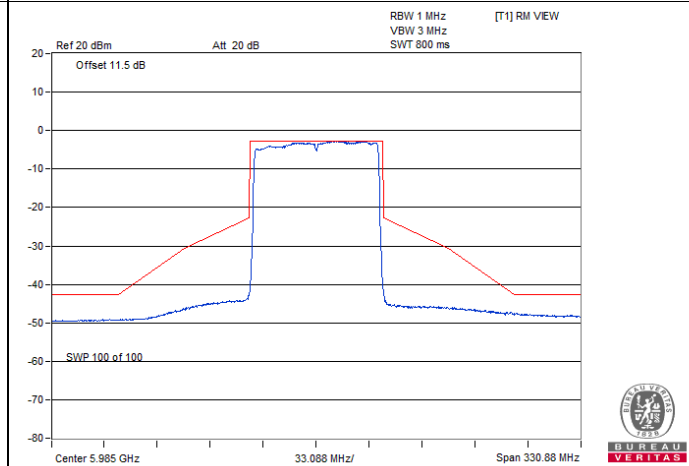

802.11be (EHT80) / Chain 1 : CH 7

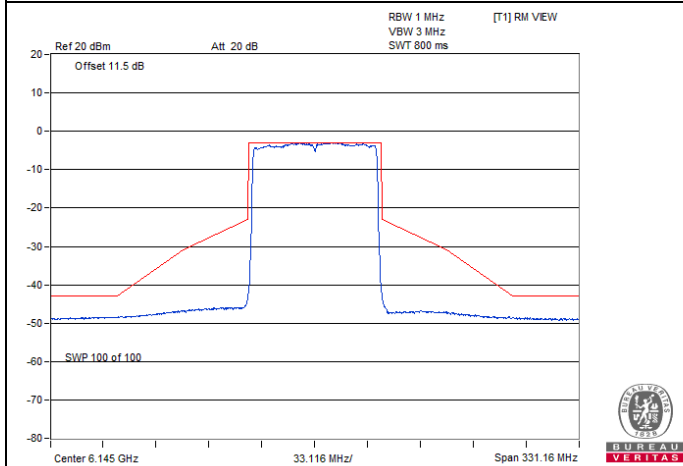


802.11be (EHT80) / Chain 1 : CH 39

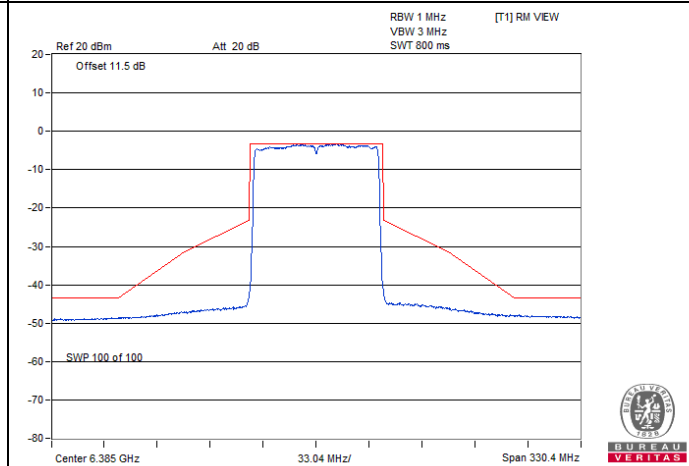


802.11be (EHT80) / Chain 1 : CH 87


Spectrum Plot

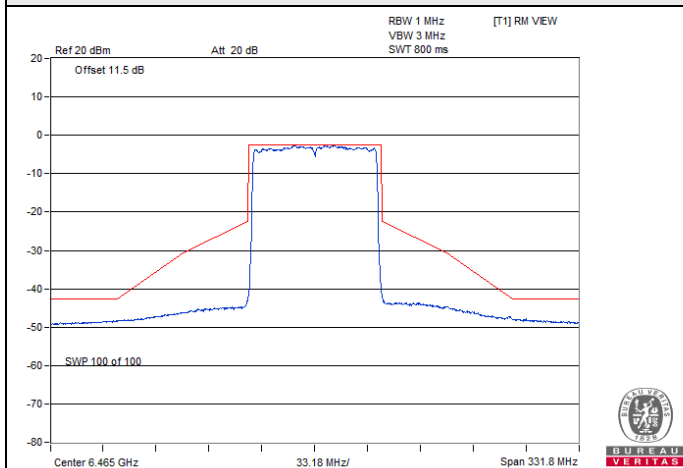


802.11be (EHT80) / Chain 1 : CH 103

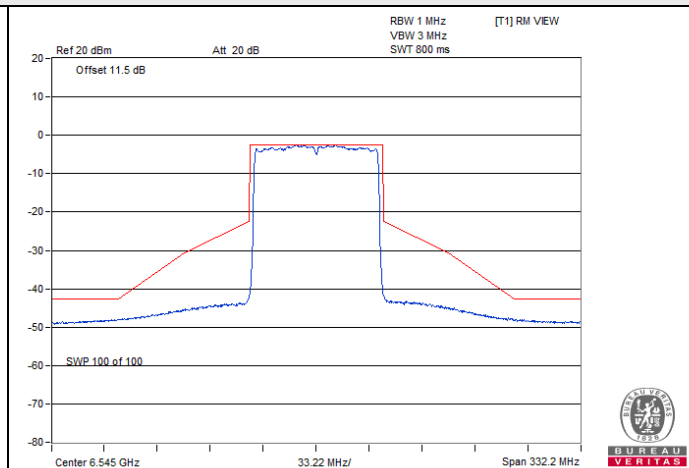


802.11be (EHT80) / Chain 1 : CH 119

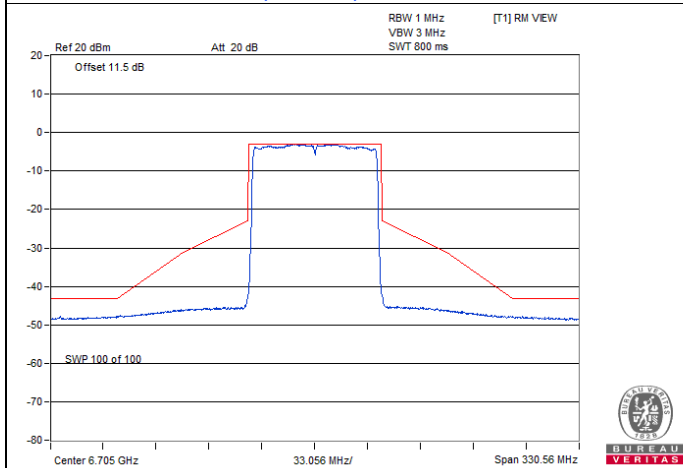


802.11be (EHT80) / Chain 1 : CH 151

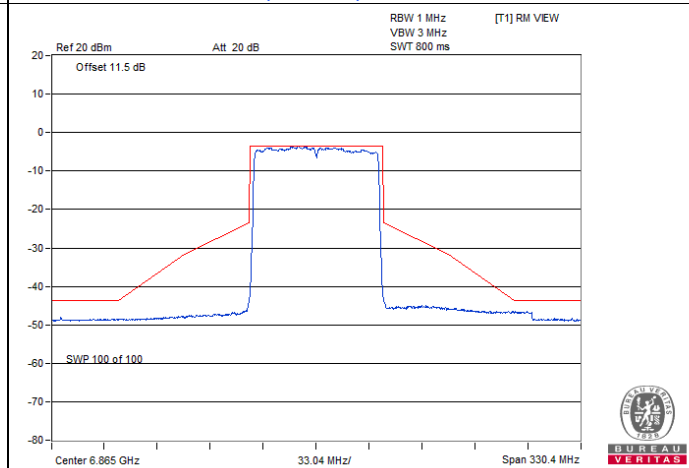

802.11be (EHT80) / Chain 1 : CH 183






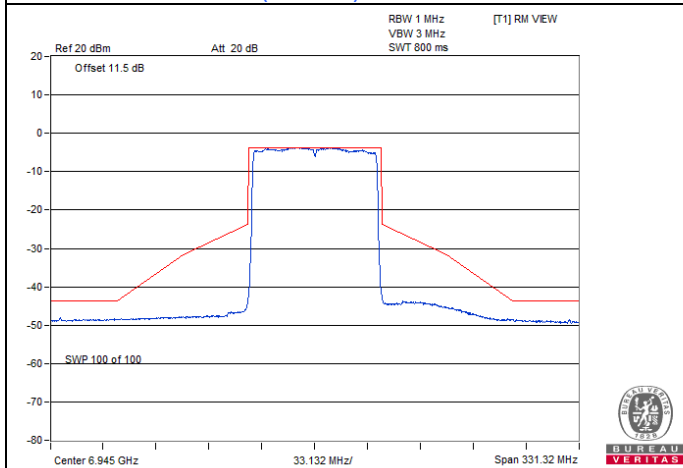


802.11be (EHT80) / Chain 1 : CH 199

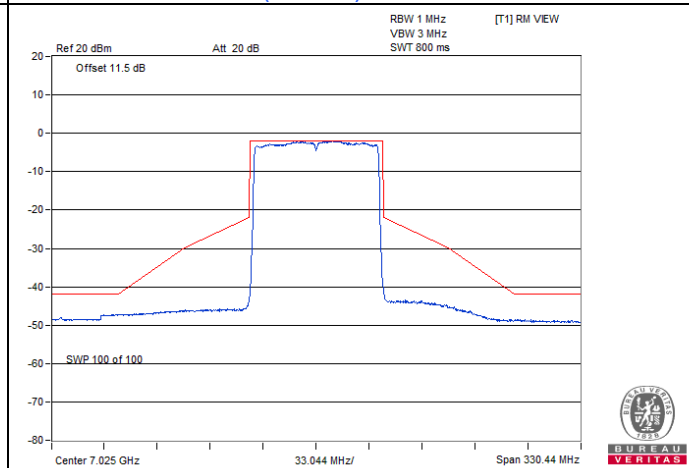


802.11be (EHT80) / Chain 1 : CH 215


Spectrum Plot

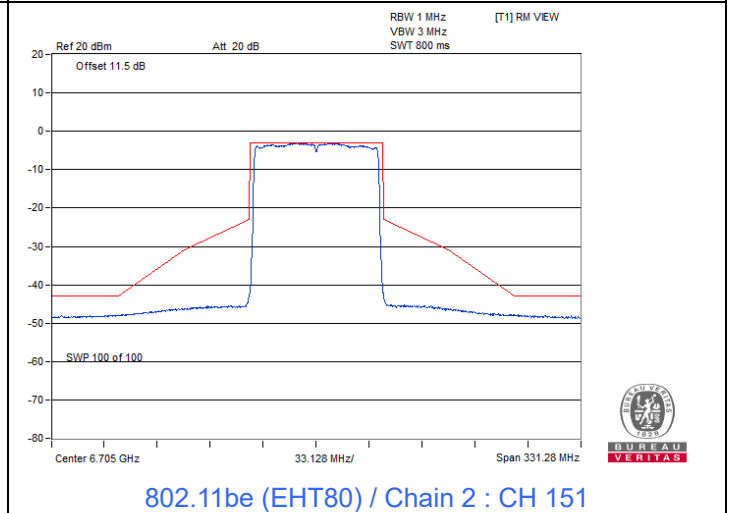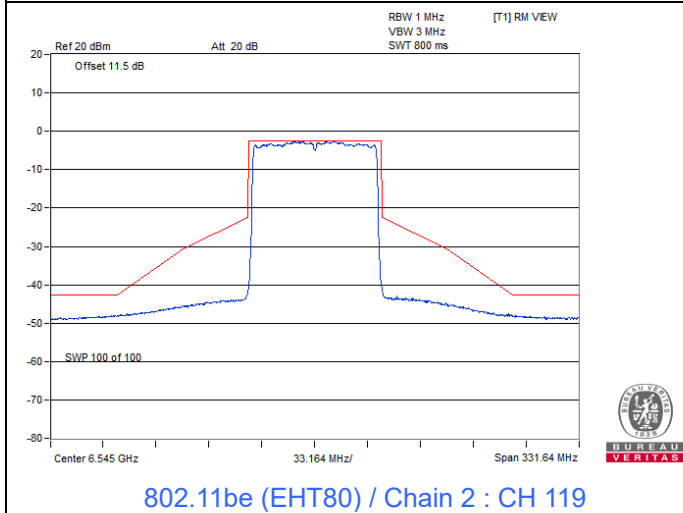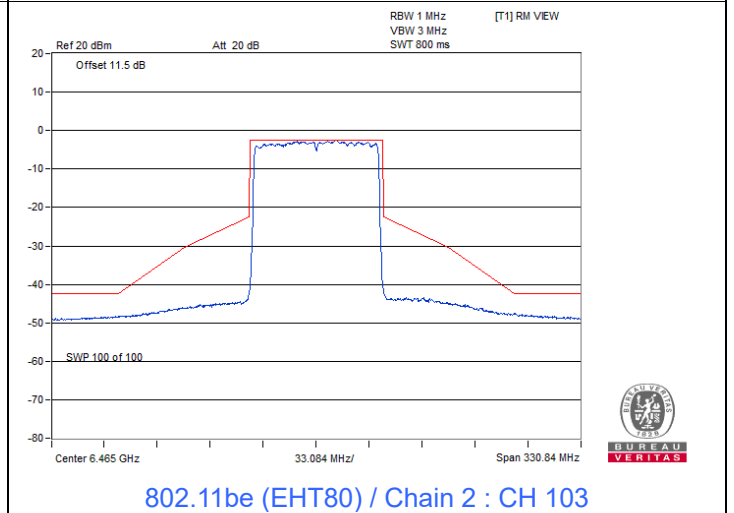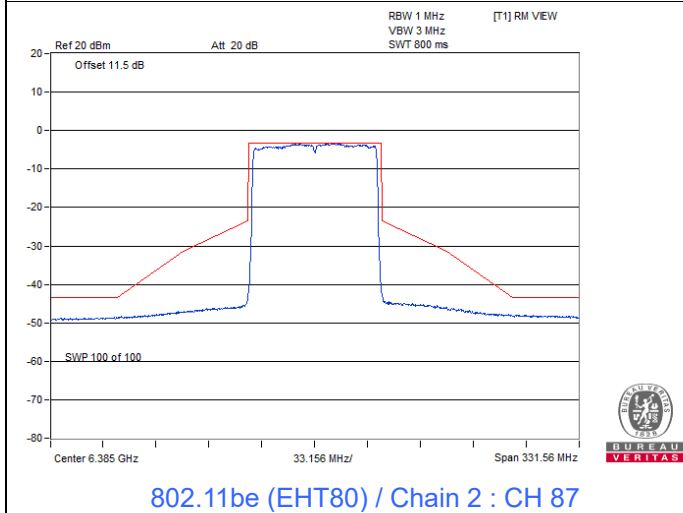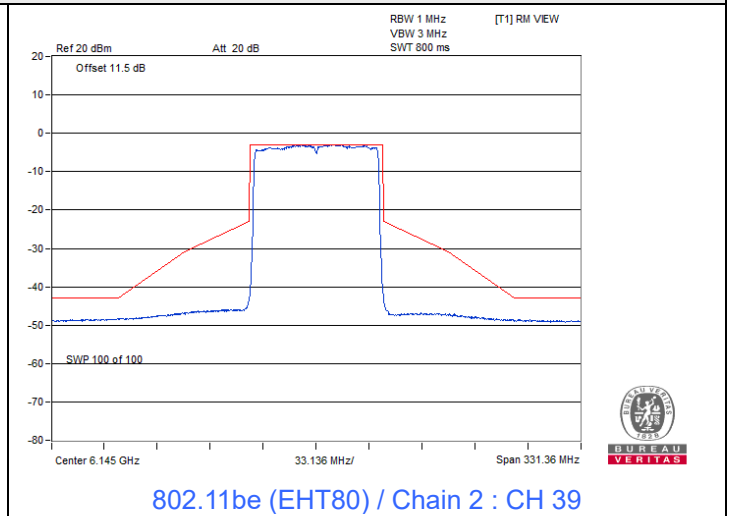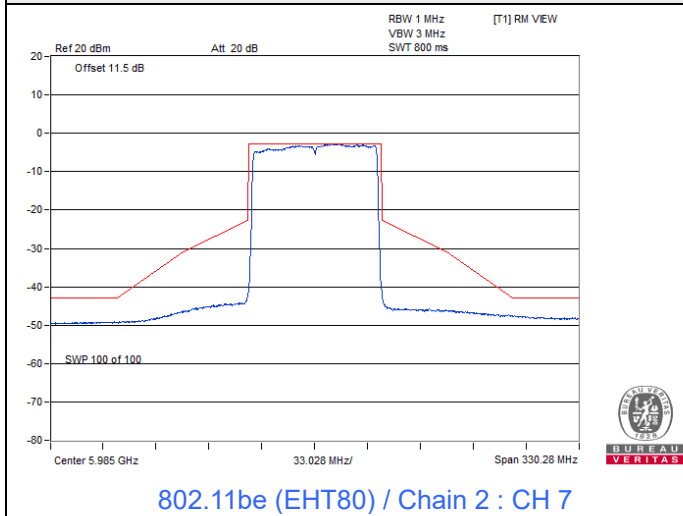


Spectrum Plot

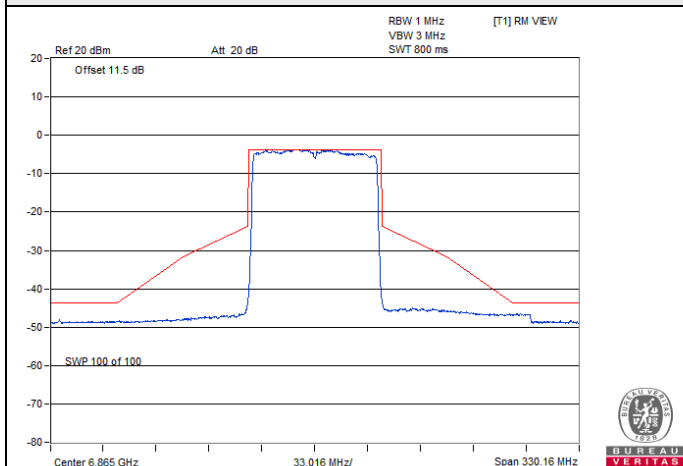


802.11be (EHT80) / Chain 2 : CH 183

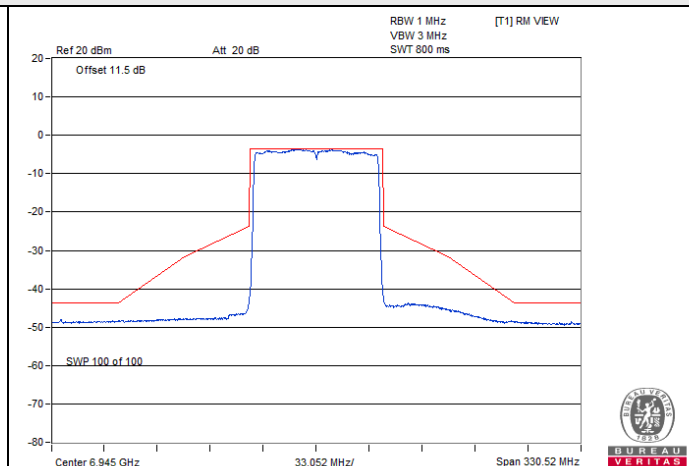


802.11be (EHT80) / Chain 2 : CH 199

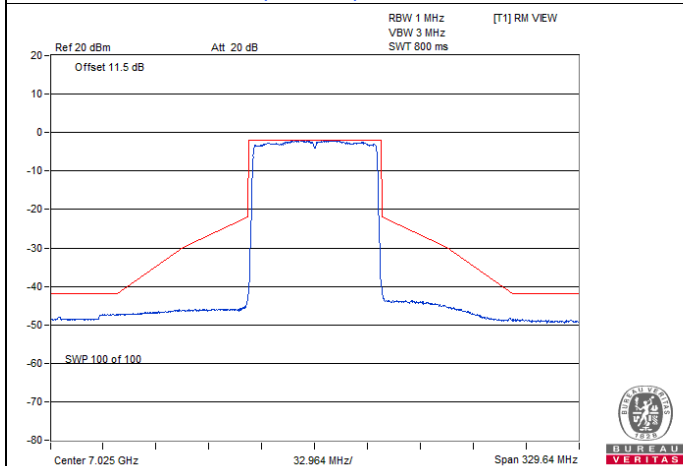


802.11be (EHT80) / Chain 2 : CH 215

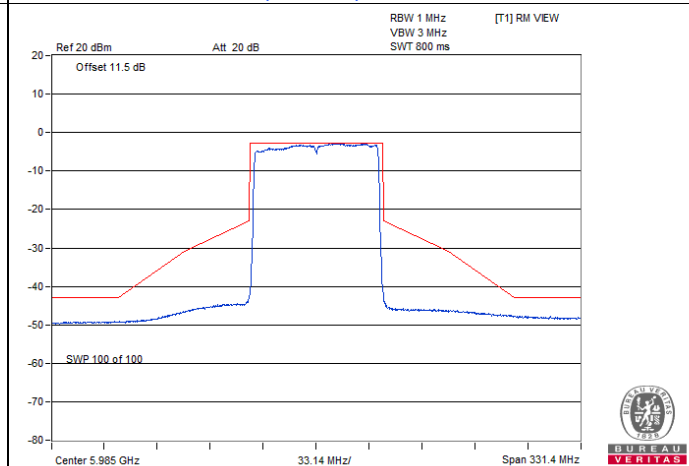

802.11be (EHT80) / Chain 3 : CH 7

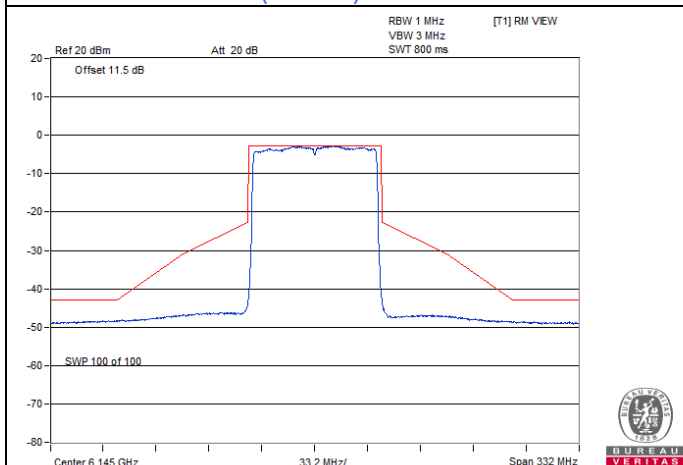


802.11be (EHT80) / Chain 3 : CH 39

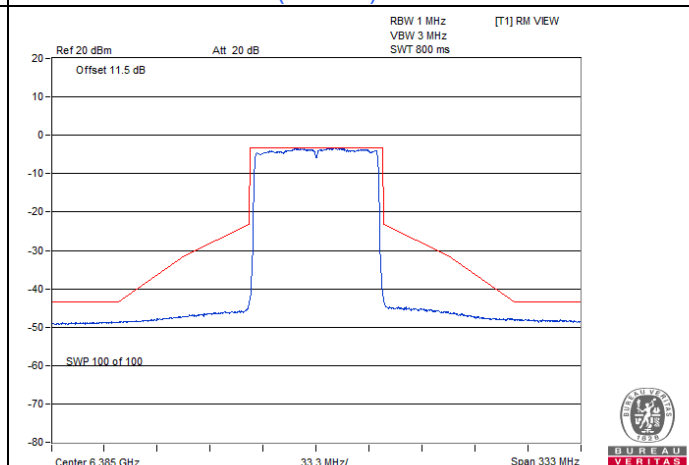


802.11be (EHT80) / Chain 3 : CH 87


Spectrum Plot

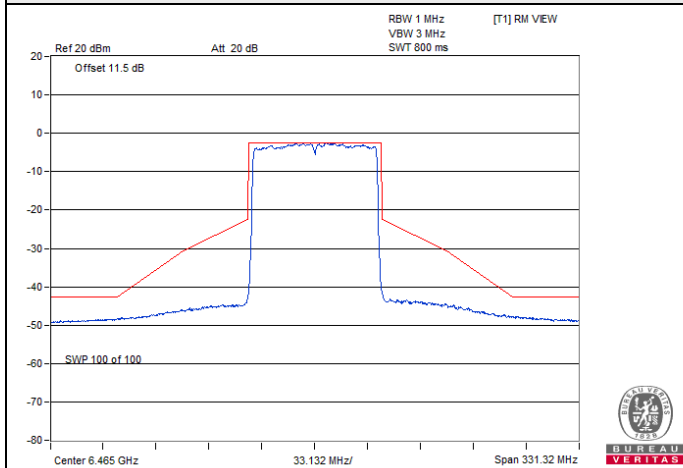


802.11be (EHT80) / Chain 3 : CH 103

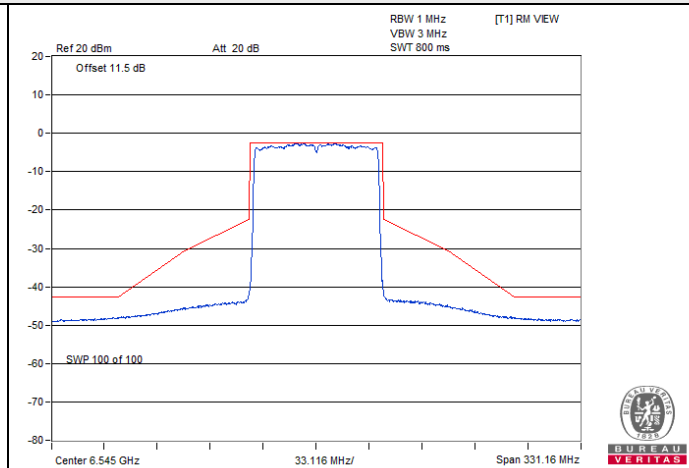


802.11be (EHT80) / Chain 3 : CH 119

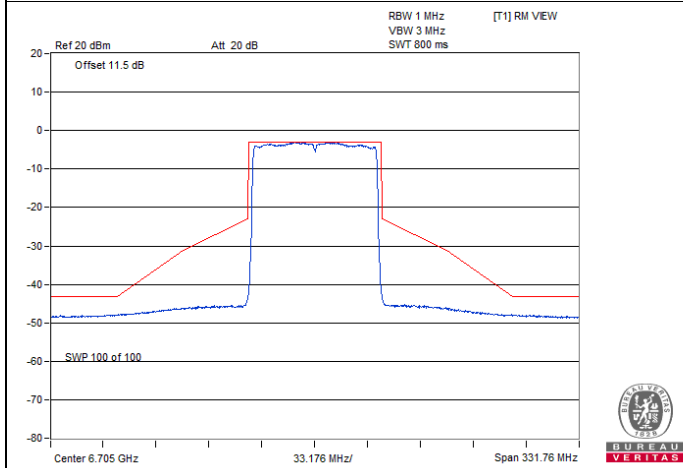


802.11be (EHT80) / Chain 3 : CH 151

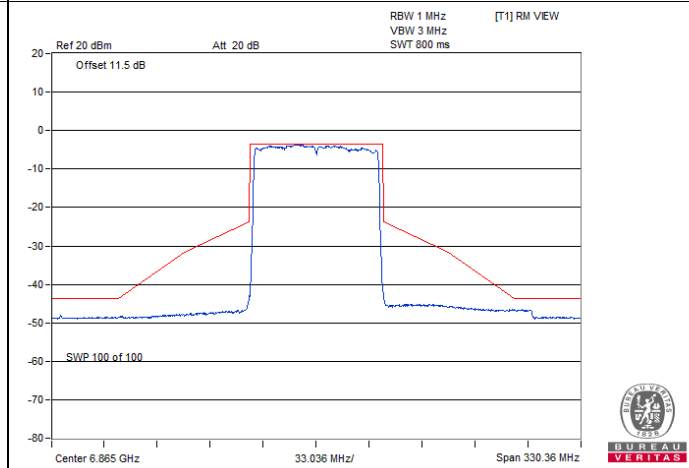

802.11be (EHT80) / Chain 3 : CH 183

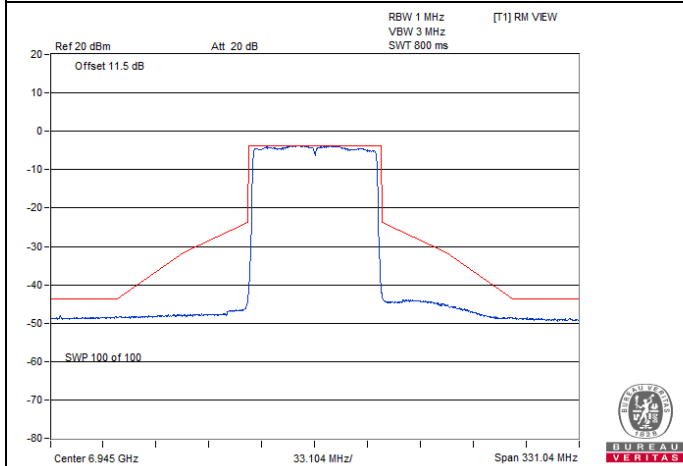


802.11be (EHT80) / Chain 3 : CH 199

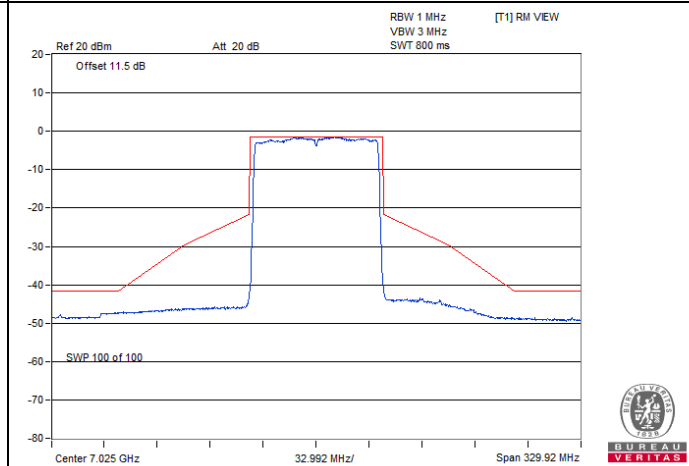


802.11be (EHT80) / Chain 3 : CH 215

802.11be (EHT160)


Spectrum Plot

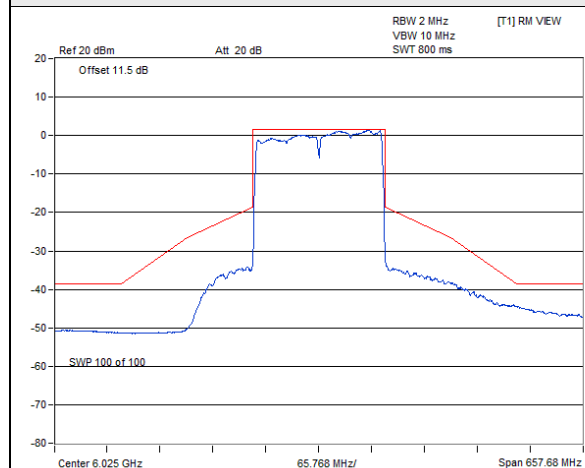


802.11be (EHT160) / Chain 0 : CH 15

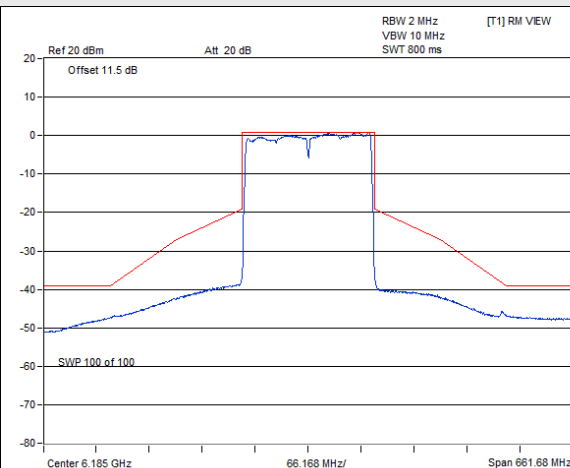


802.11be (EHT160) / Chain 0 : CH 47

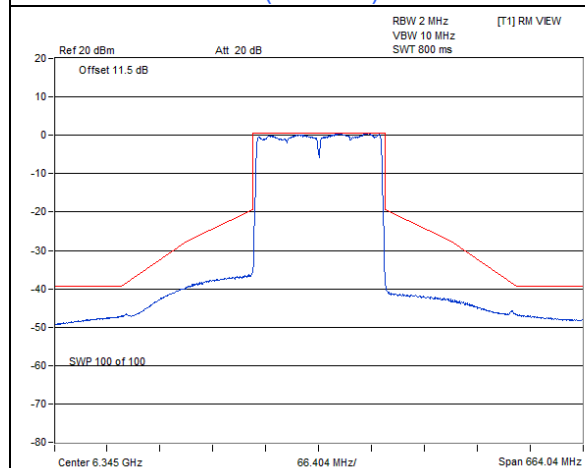


802.11be (EHT160) / Chain 0 : CH 79

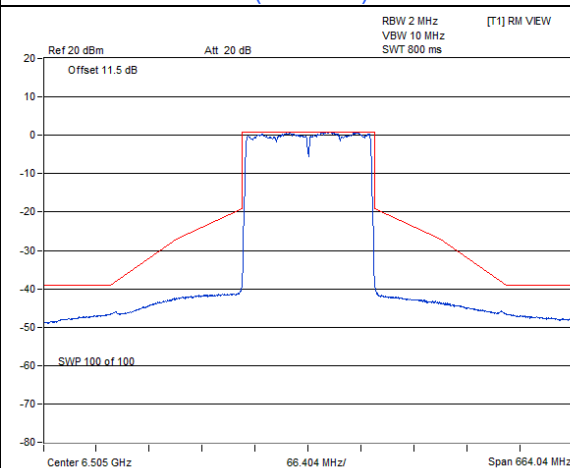

802.11be (EHT160) / Chain 0 : CH 111

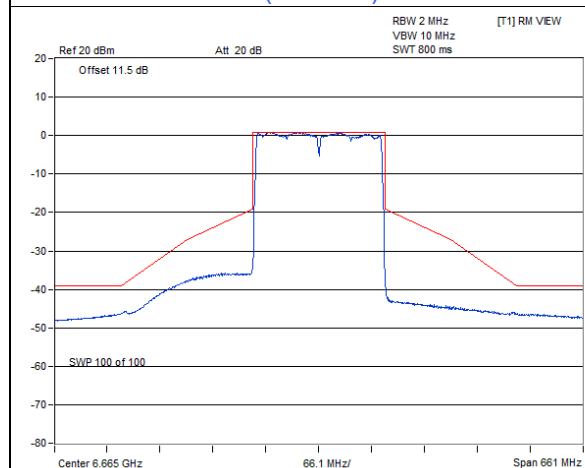


802.11be (EHT160) / Chain 0 : CH 143

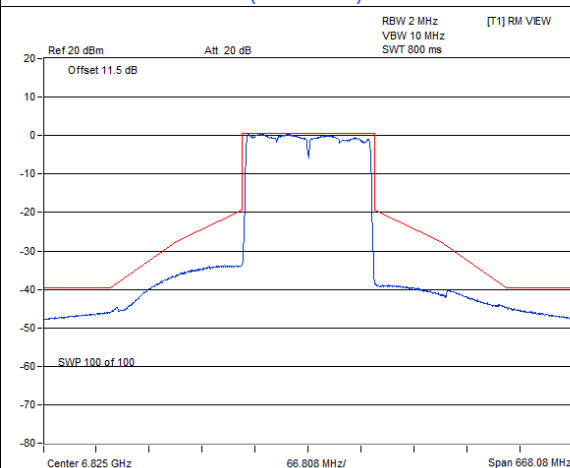


802.11be (EHT160) / Chain 0 : CH 175


Spectrum Plot

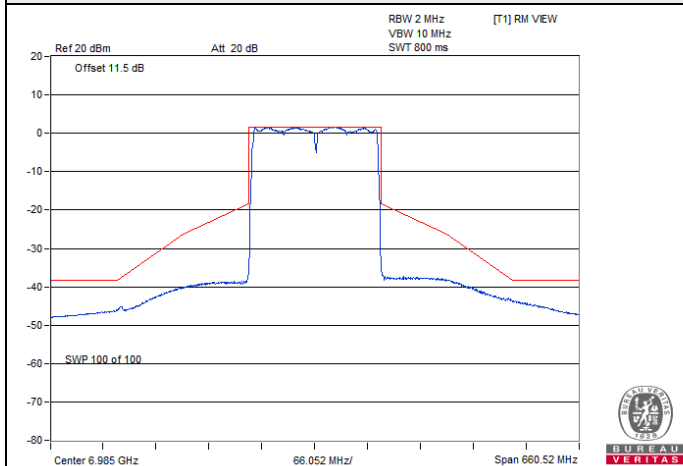


802.11be (EHT160) / Chain 0 : CH 207

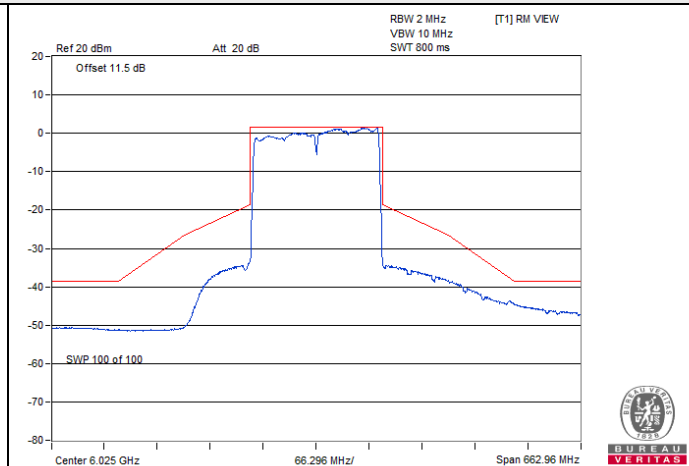


802.11be (EHT160) / Chain 1 : CH 15

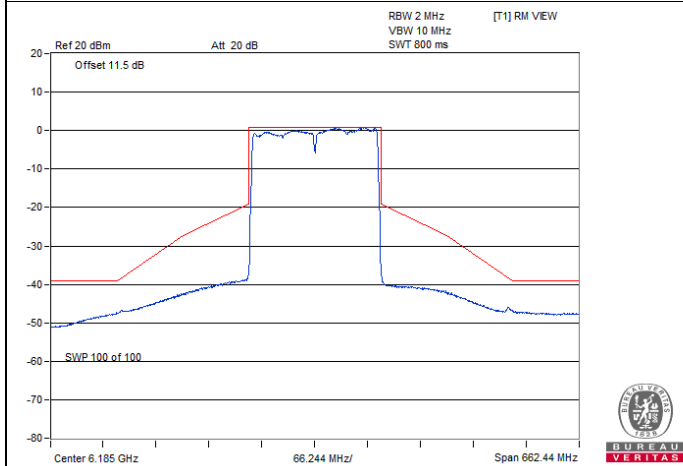


802.11be (EHT160) / Chain 1 : CH 47

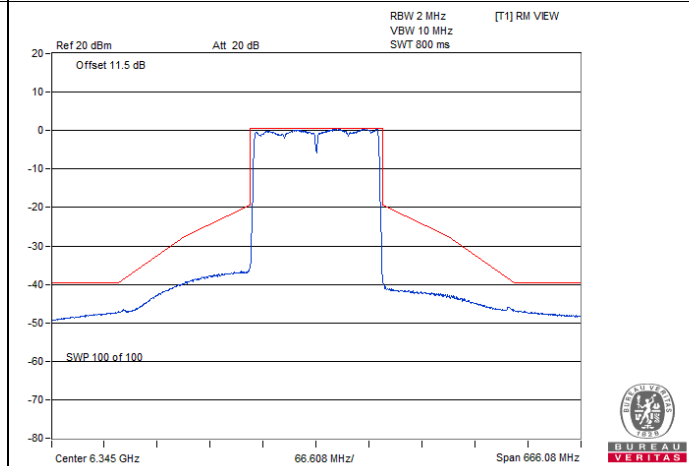

802.11be (EHT160) / Chain 1 : CH 79

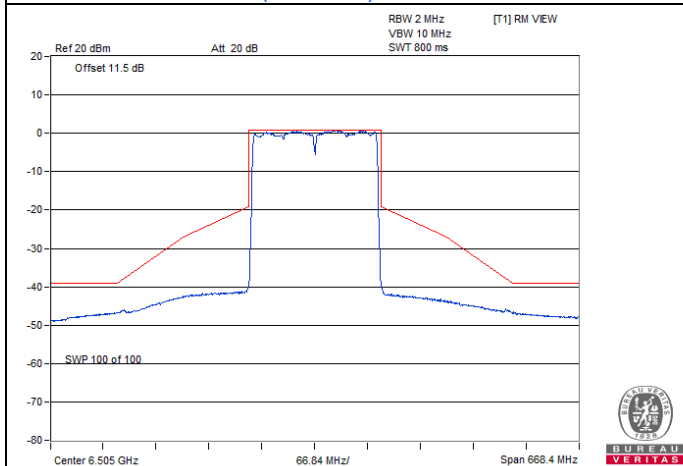


802.11be (EHT160) / Chain 1 : CH 111

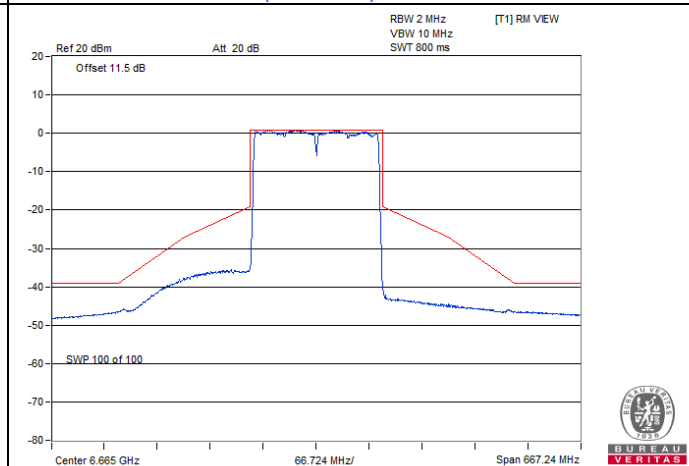


802.11be (EHT160) / Chain 1 : CH 143


Spectrum Plot

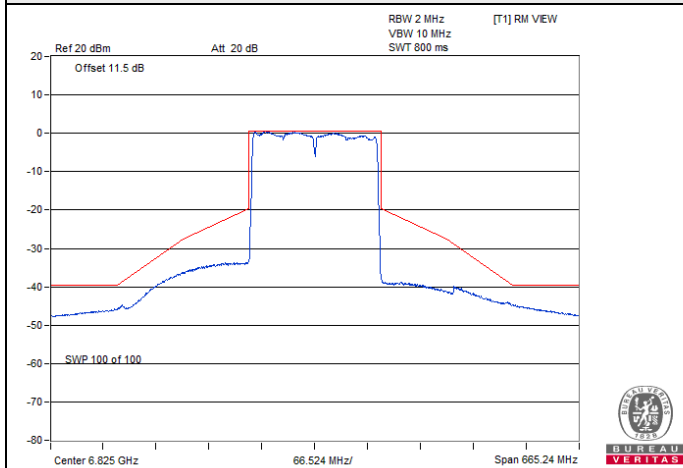


802.11be (EHT160) / Chain 1 : CH 175

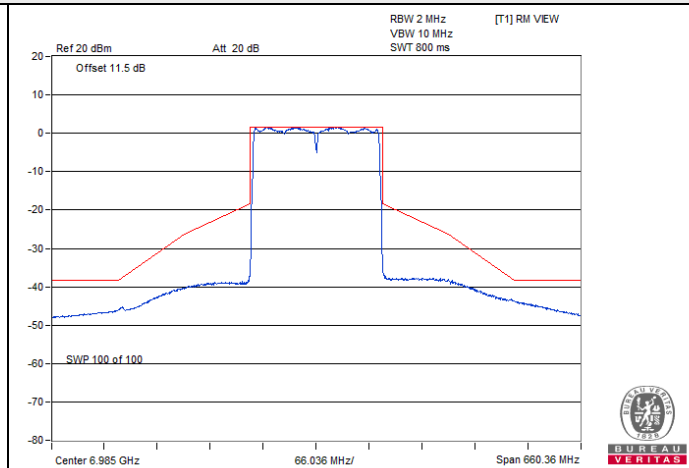


802.11be (EHT160) / Chain 1 : CH 207

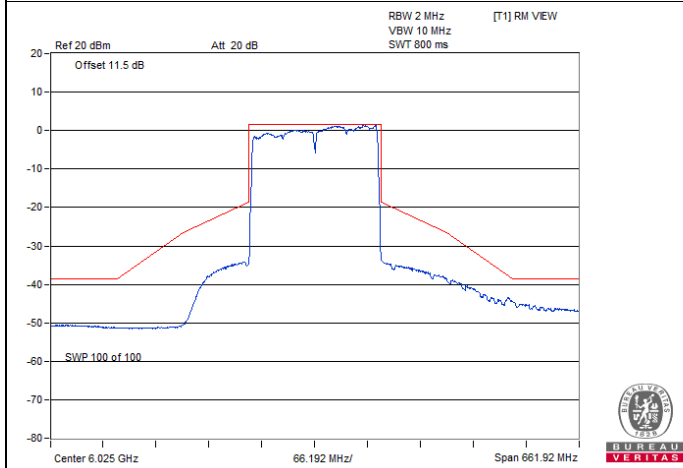


802.11be (EHT160) / Chain 2 : CH 15

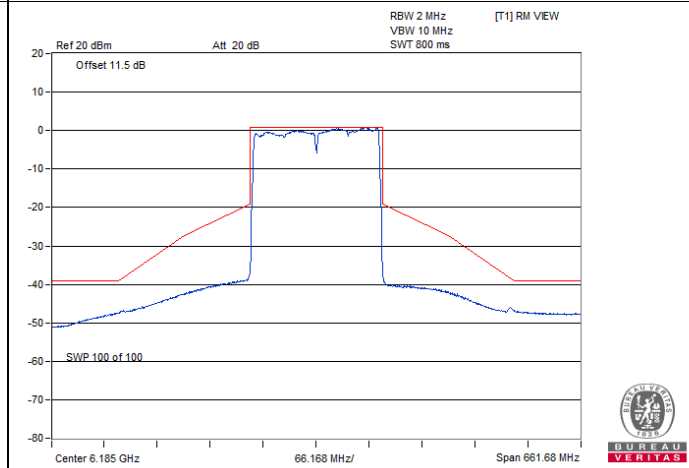

802.11be (EHT160) / Chain 2 : CH 47

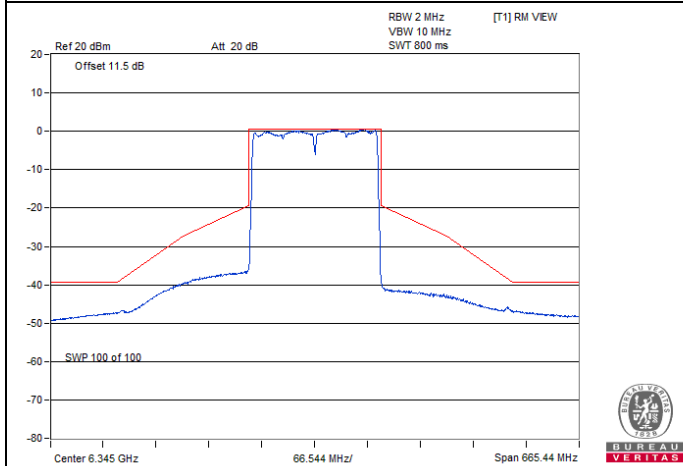


802.11be (EHT160) / Chain 2 : CH 79

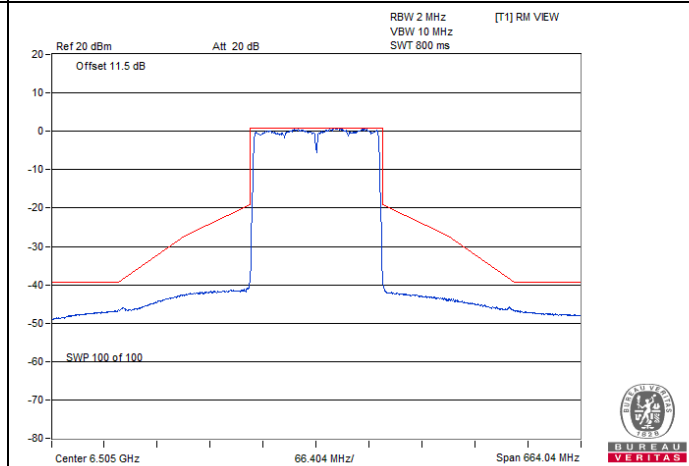


802.11be (EHT160) / Chain 2 : CH 111


Spectrum Plot

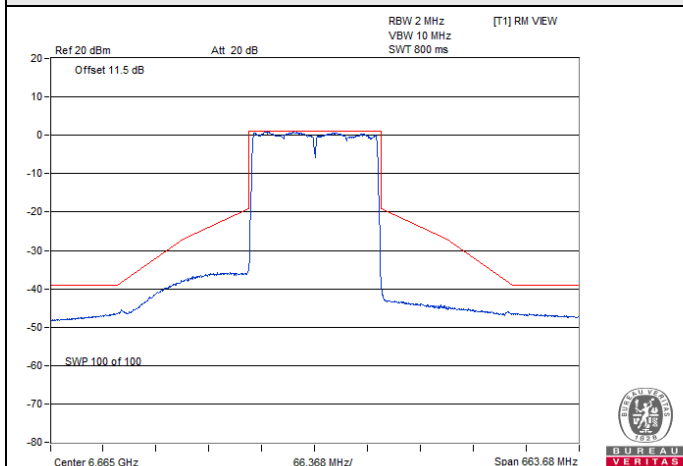


802.11be (EHT160) / Chain 2 : CH 143

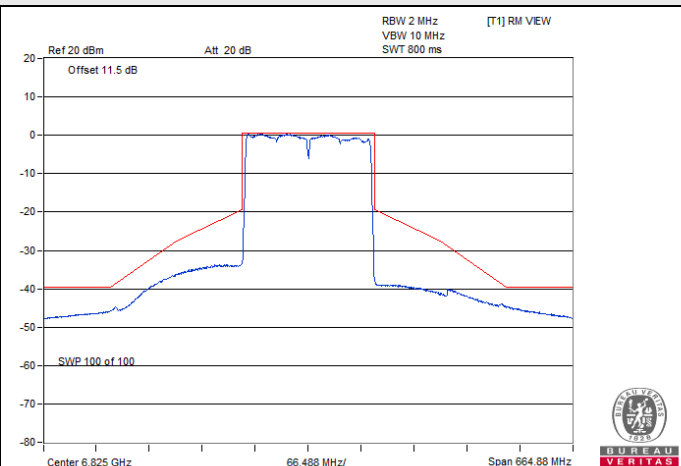


802.11be (EHT160) / Chain 2 : CH 175

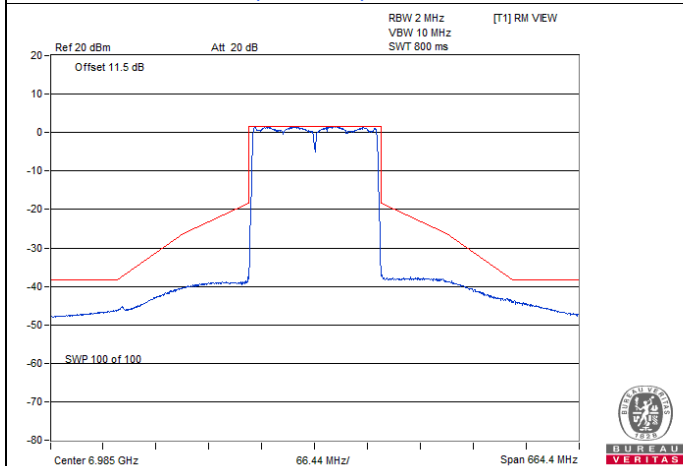


802.11be (EHT160) / Chain 2 : CH 207

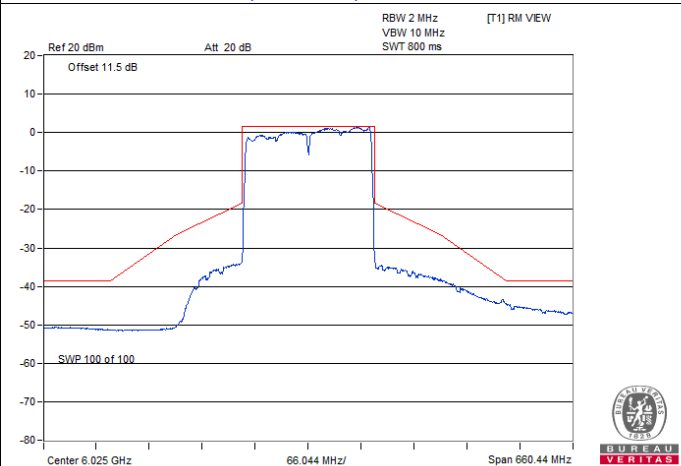

802.11be (EHT160) / Chain 3 : CH 15

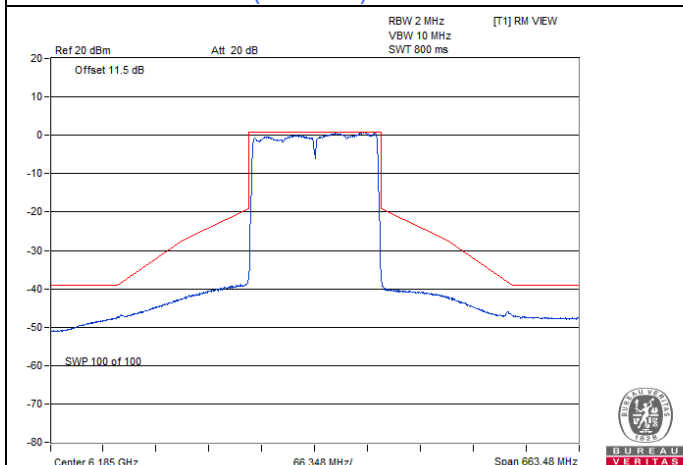


802.11be (EHT160) / Chain 3 : CH 47

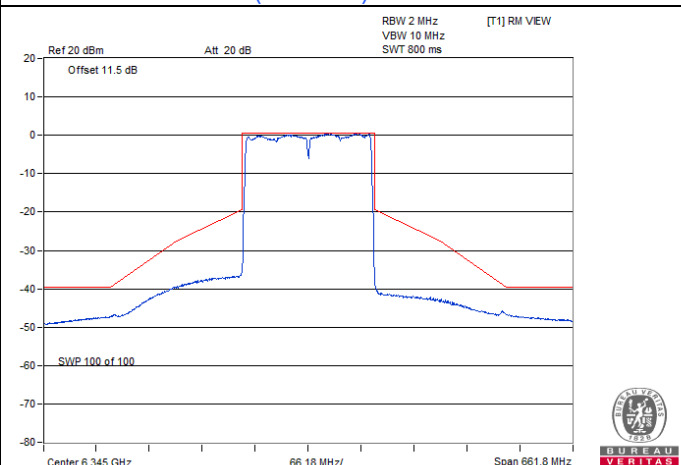


802.11be (EHT160) / Chain 3 : CH 79


Spectrum Plot

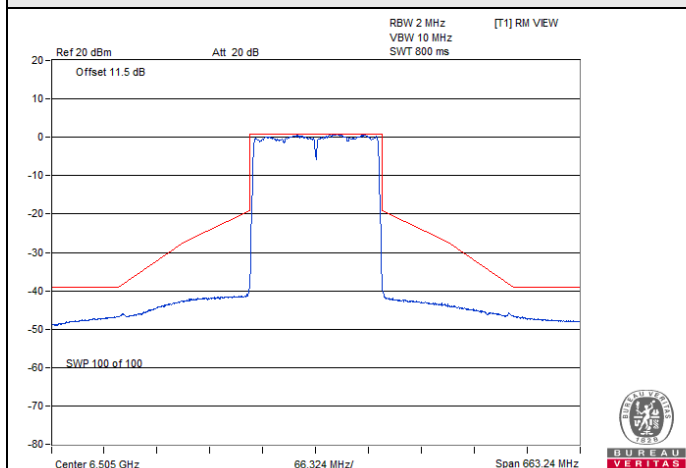


802.11be (EHT160) / Chain 3 : CH 111

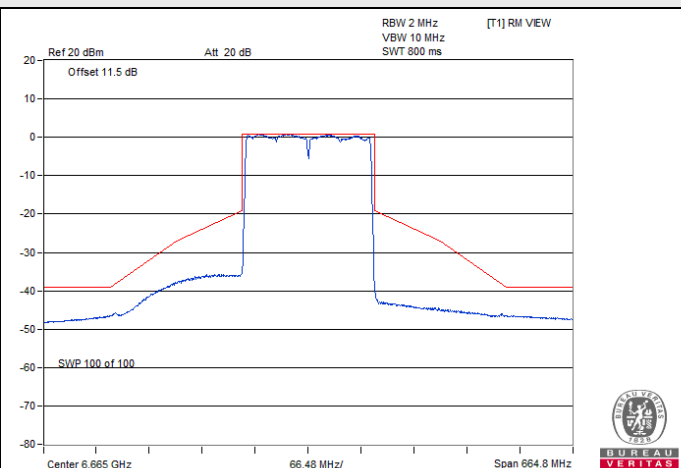

802.11be (EHT160) / Chain 3 : CH 143

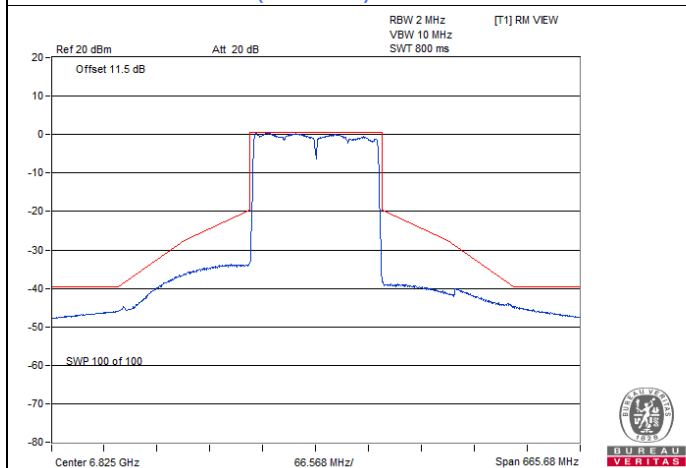


802.11be (EHT160) / Chain 3 : CH 175

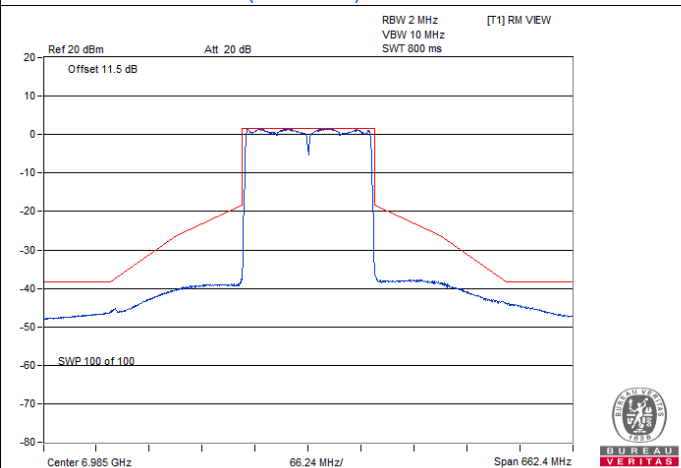


802.11be (EHT160) / Chain 3 : CH 207

802.11be (EHT320)


Spectrum Plot

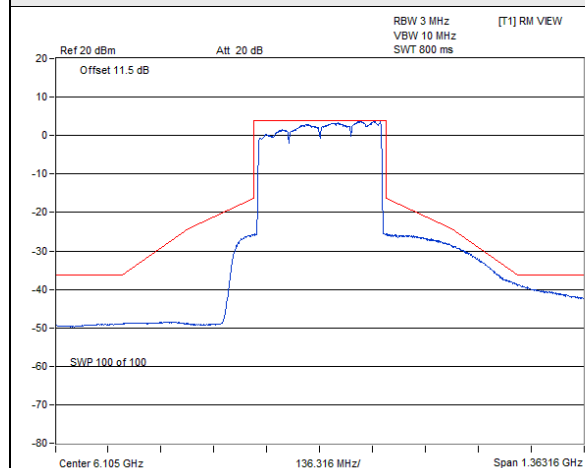


802.11be (EHT320) / Chain 0 : CH 31

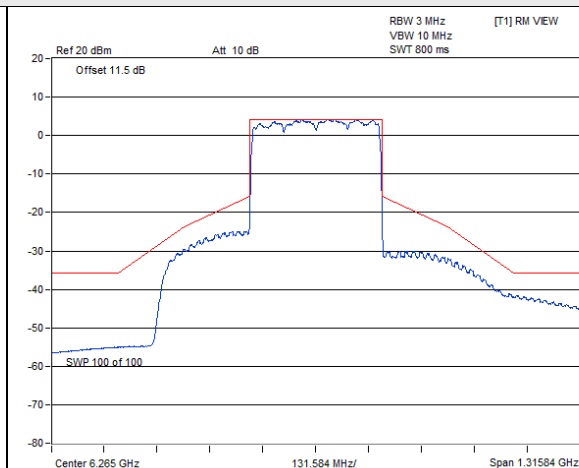


802.11be (EHT320) / Chain 0 : CH 63

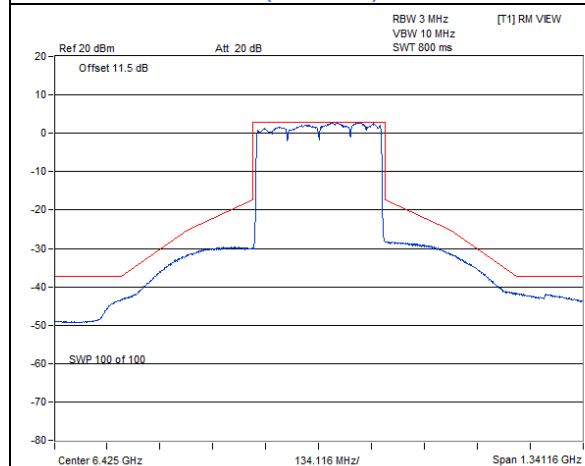


802.11be (EHT320) / Chain 0 : CH 95

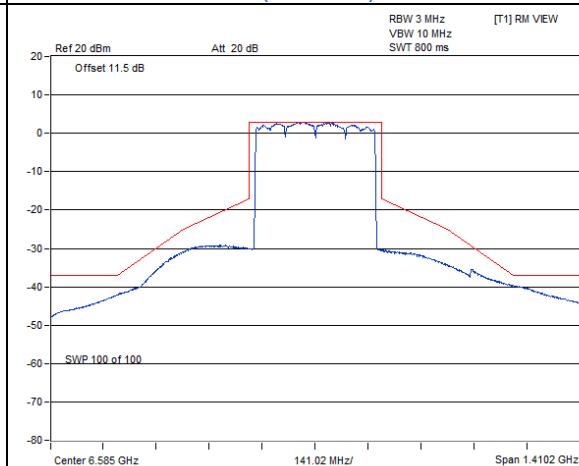

802.11be (EHT320) / Chain 0 : CH 127






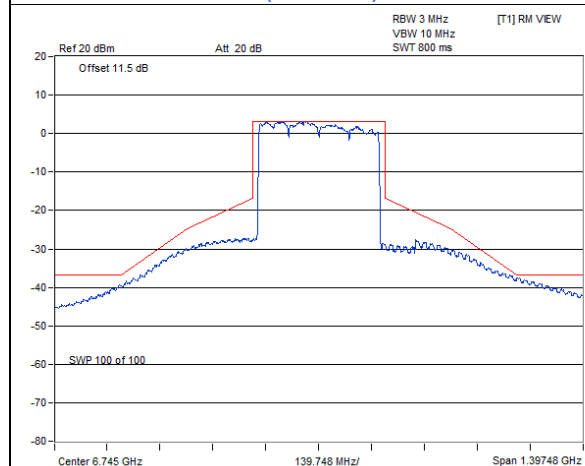


802.11be (EHT320) / Chain 0 : CH 159

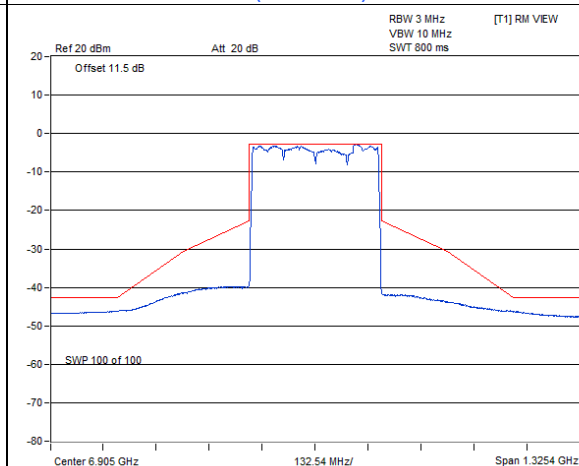


802.11be (EHT320) / Chain 0 : CH 191


Spectrum Plot

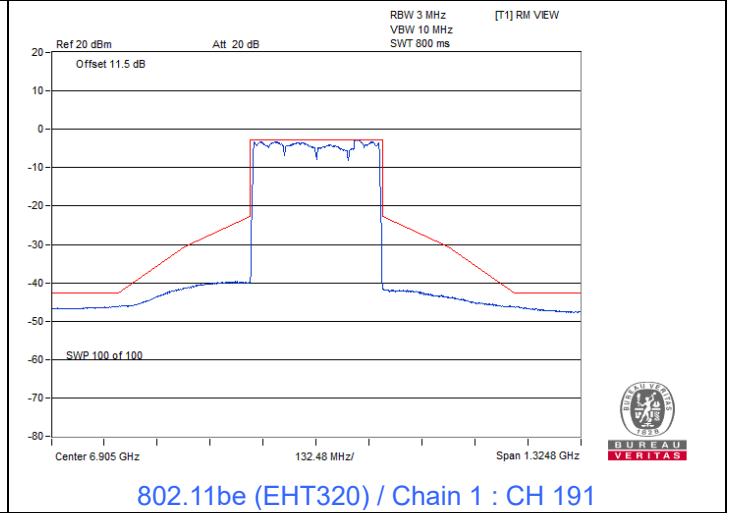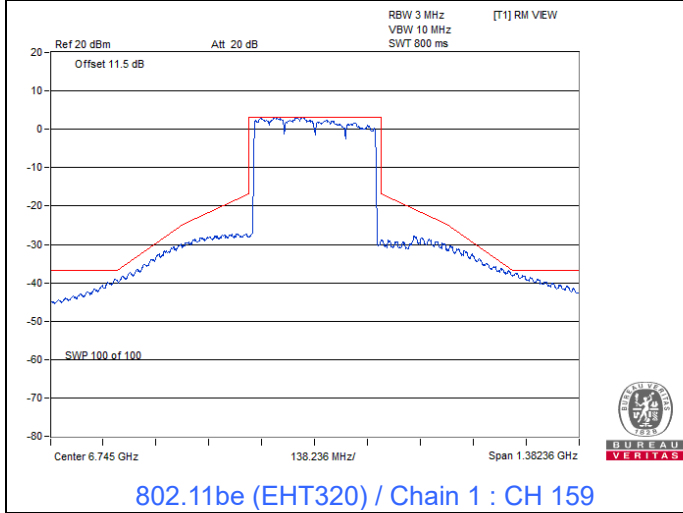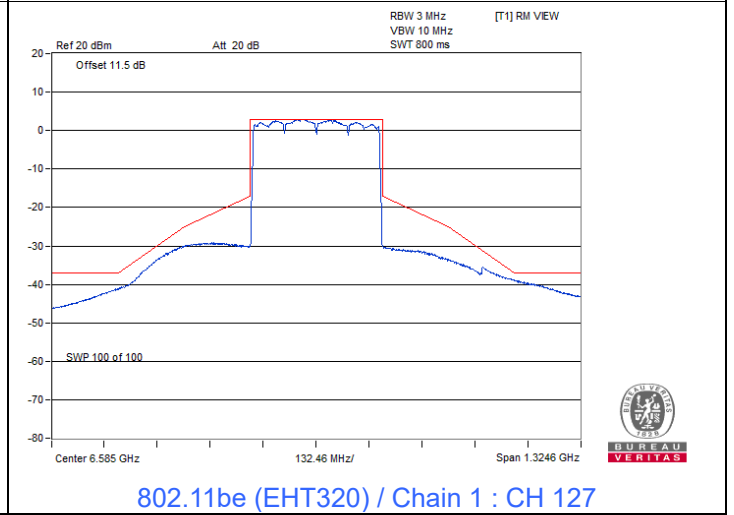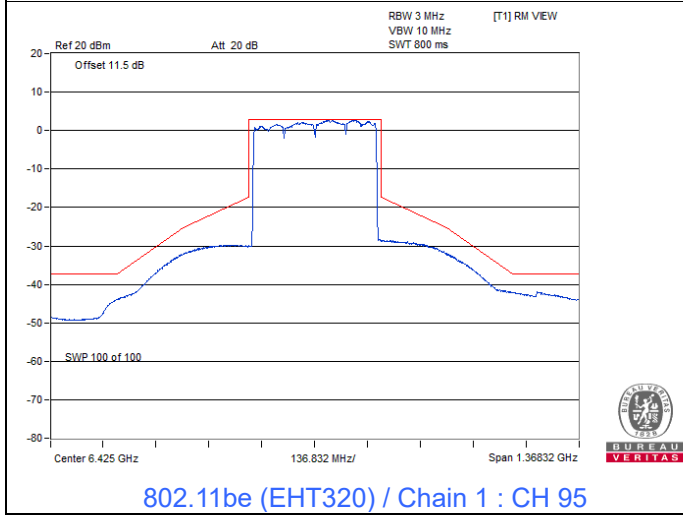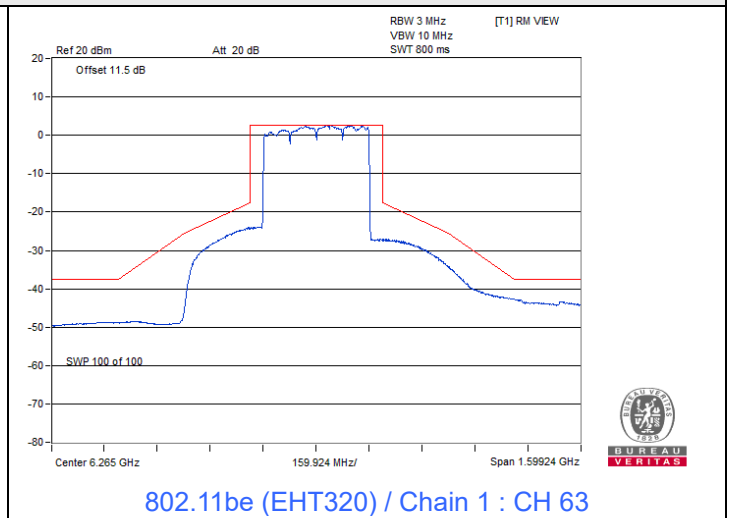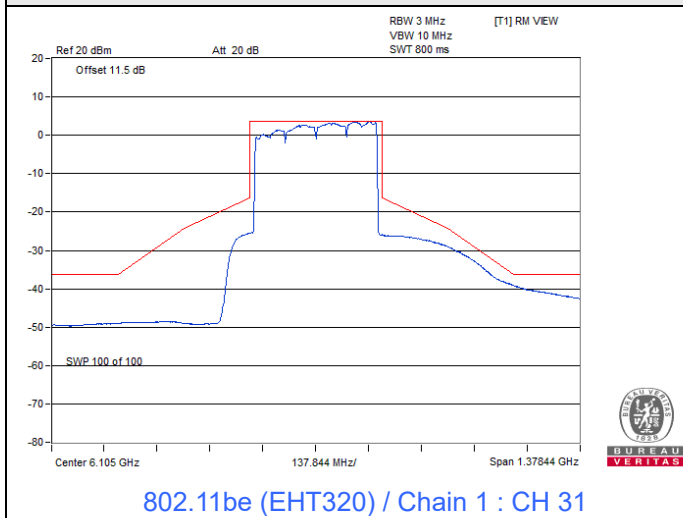


Spectrum Plot

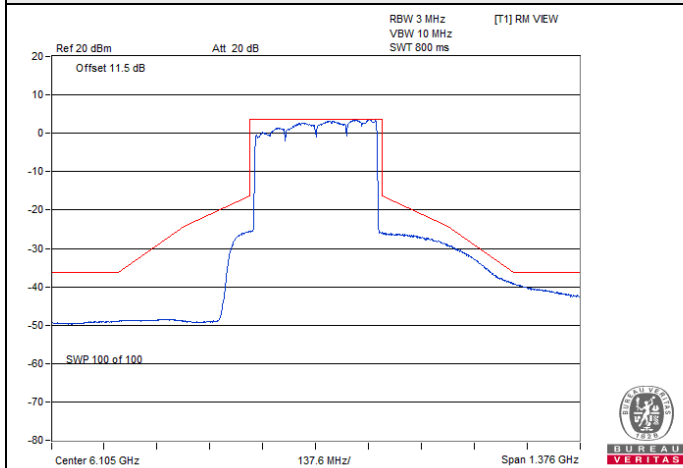


802.11be (EHT320) / Chain 2 : CH 31

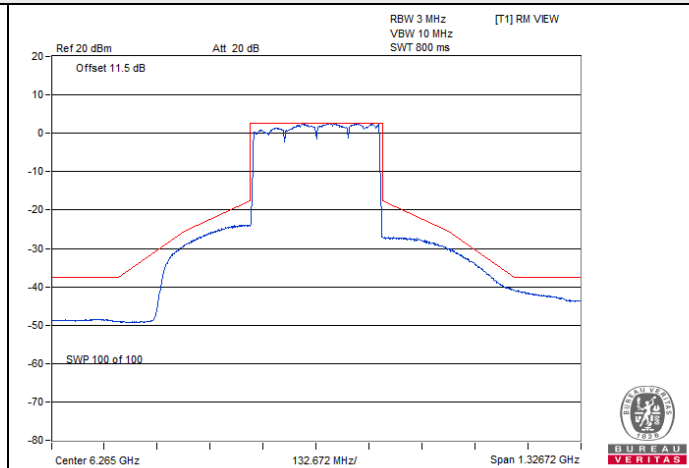


802.11be (EHT320) / Chain 2 : CH 63

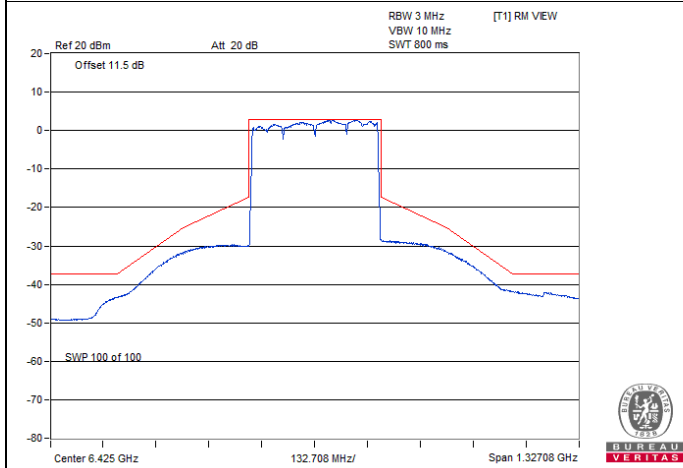


802.11be (EHT320) / Chain 2 : CH 95

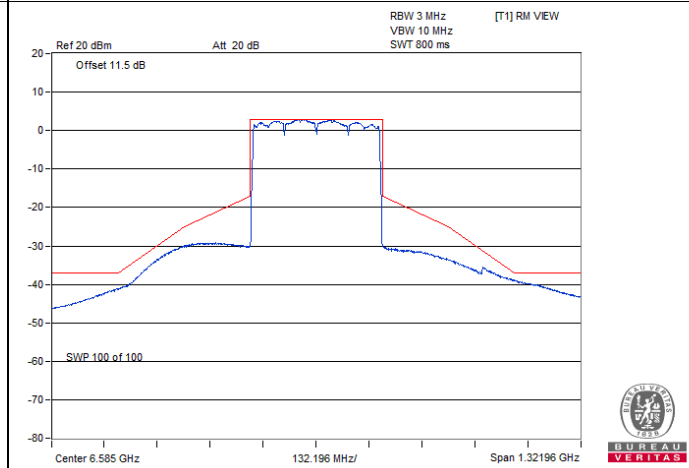

802.11be (EHT320) / Chain 2 : CH 127

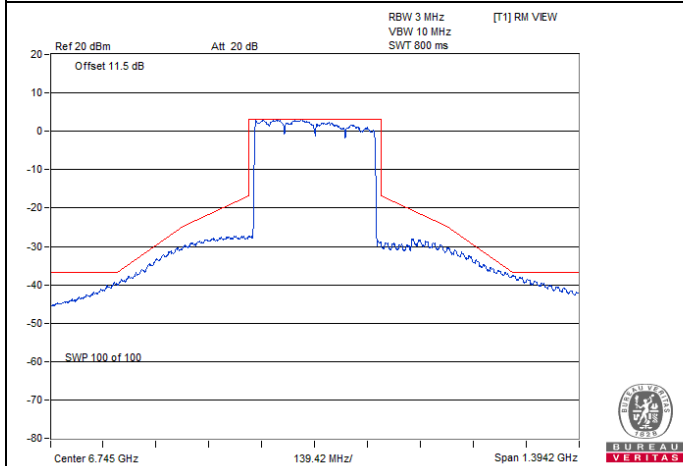


802.11be (EHT320) / Chain 2 : CH 159

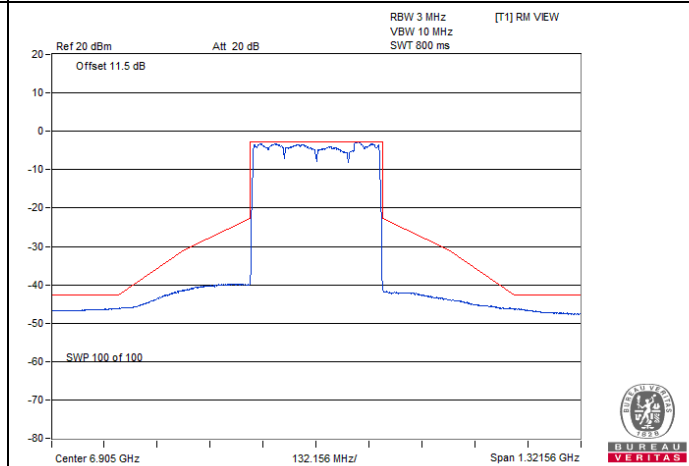


802.11be (EHT320) / Chain 2 : CH 191


Spectrum Plot

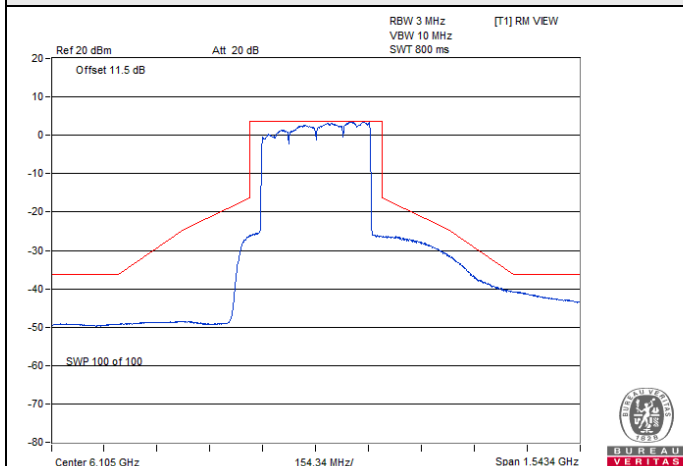


802.11be (EHT320) / Chain 3 : CH 31

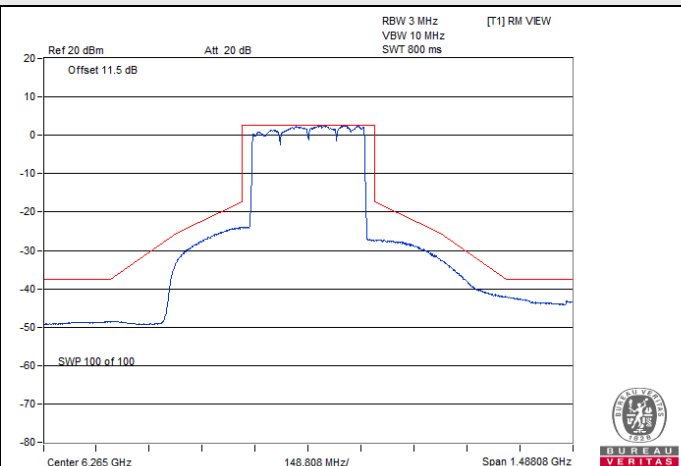


802.11be (EHT320) / Chain 3 : CH 63

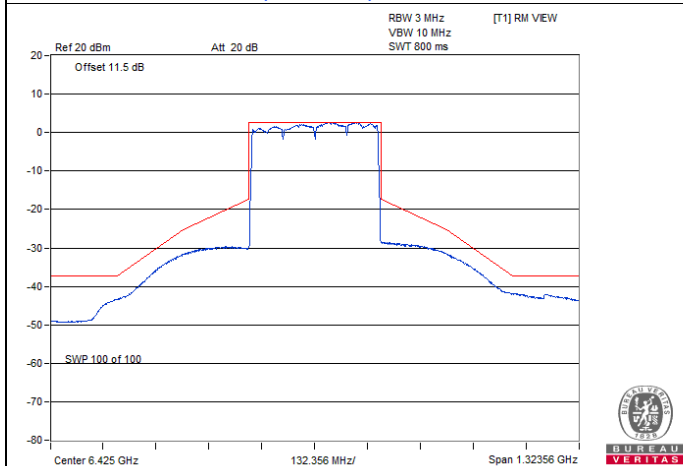


802.11be (EHT320) / Chain 3 : CH 95

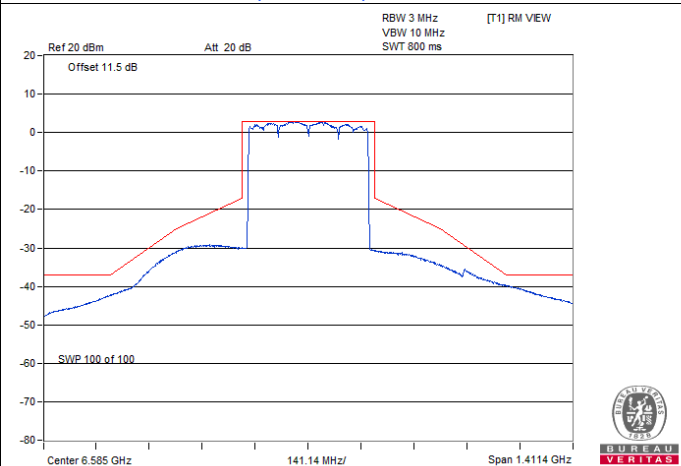

802.11be (EHT320) / Chain 3 : CH 127

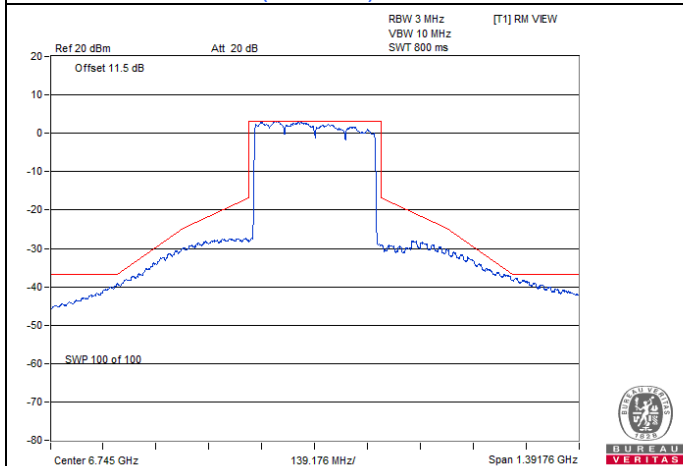

802.11be (EHT320) / Chain 3 : CH 159

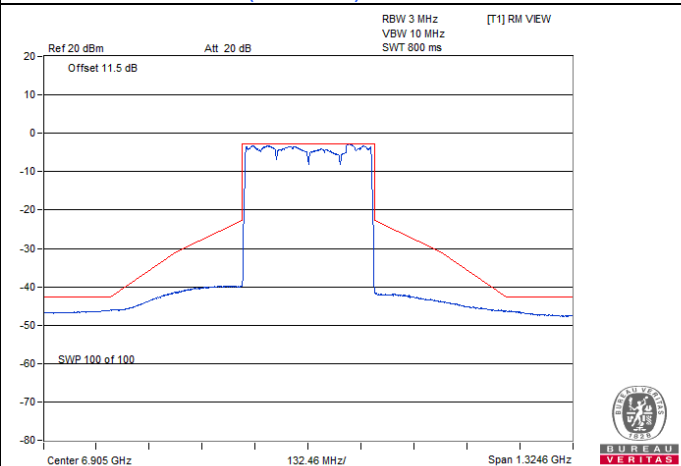

802.11be (EHT320) / Chain 3 : CH 191

7.5 Occupied Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
1	5955	17.13	17.28	17.04	17.16
45	6175	17.04	17.04	17.04	17.16
93	6415	17.04	17.16	17.04	17.16
97	6435	17.04	17.04	17.04	17.04
105	6475	17.16	17.04	17.16	17.04
113	6515	17.04	17.16	17.16	17.16
117	6535	17.16	17.16	17.04	17.04
149	6695	17.16	17.16	17.16	17.16
181	6855	17.04	17.04	17.04	17.16
185	6875	17.04	17.04	17.04	16.92
209	6995	17.22	17.16	17.16	16.92
229	7095	17.04	17.04	17.16	17.16

802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
1	5955	19.14	19.20	19.20	19.20
45	6175	19.20	19.20	19.20	19.20
93	6415	19.20	19.20	19.20	19.20
97	6435	19.20	19.20	19.08	19.08
105	6475	19.20	19.20	19.20	19.08
113	6515	19.20	19.20	19.20	19.08
117	6535	19.20	19.32	19.08	19.08
149	6695	19.20	19.20	19.20	19.20
181	6855	19.20	19.08	19.20	19.20
185	6875	19.20	19.08	19.20	19.20
209	6995	19.08	19.20	19.20	19.20
229	7095	19.20	19.20	19.08	19.20

802.11be (EHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
3	5965	37.92	37.92	38.16	37.92
43	6165	38.16	38.16	37.92	37.92
91	6405	38.16	37.92	37.92	38.16
99	6445	37.92	38.16	38.16	37.92
107	6485	37.92	38.16	38.16	38.16
115	6525	38.78	37.92	37.92	38.16
123	6565	38.16	38.40	38.16	37.92
155	6725	38.16	37.92	38.16	38.16
179	6845	38.16	37.92	38.16	38.16
187	6885	38.16	37.92	37.92	37.92
211	7005	37.92	37.92	37.92	37.92
227	7085	38.16	37.92	37.92	38.16

802.11be (EHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
7	5985	77.57	77.76	77.28	77.76
39	6145	77.76	77.28	77.76	77.28
87	6385	77.28	77.76	77.28	77.28
103	6465	77.28	77.76	77.28	76.80
119	6545	77.28	76.80	77.28	77.28
151	6705	77.28	77.28	77.28	77.28
183	6865	77.28	77.28	77.28	77.28
199	6945	77.28	77.28	77.28	77.28
215	7025	76.80	76.80	76.80	77.28


802.11be (EHT160)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
15	6025	156.52	157.44	157.44	156.48
47	6185	157.44	157.44	157.44	157.44
79	6345	157.44	157.44	156.48	157.44
111	6505	156.48	157.44	157.44	157.44
143	6665	157.44	156.48	156.48	156.48
175	6825	157.44	157.44	157.44	157.44
207	6985	157.44	157.44	157.44	157.44


802.11be (EHT320)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
31	6105	314.44	316.80	316.80	314.88
63	6265	314.88	318.72	318.72	316.80
95	6425	318.72	314.88	314.88	314.88
127	6585	316.80	316.80	316.80	316.80
159	6745	316.80	316.80	316.80	316.80
191	6905	316.80	316.80	316.80	316.80


Spectrum Plot of Maximum Value

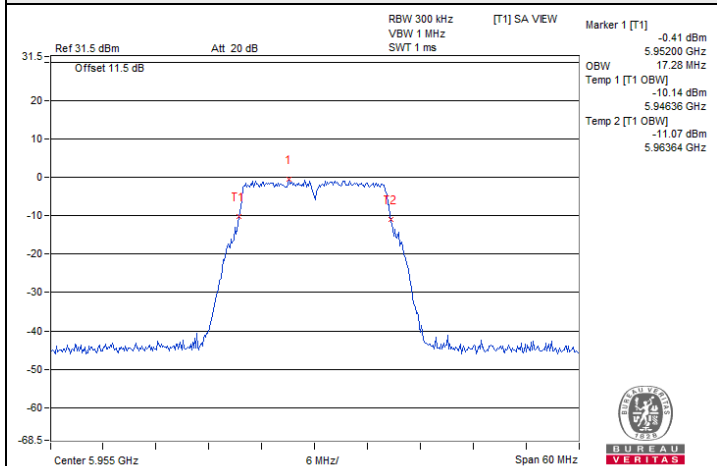


802.11a / Chain 1 : CH 1

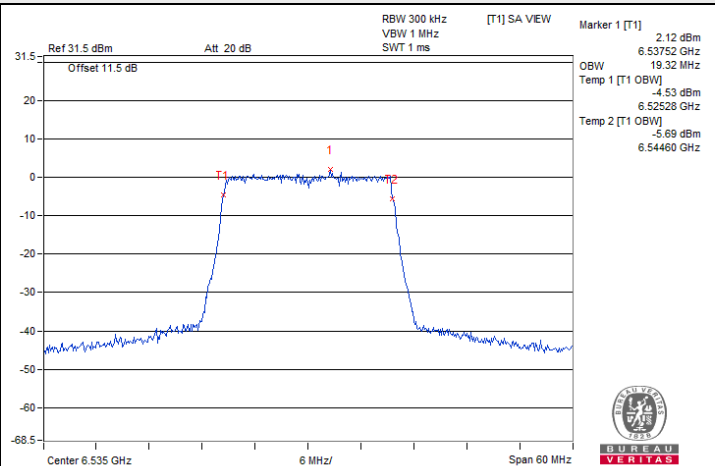


802.11be (EHT20) / Chain 1 : CH 117

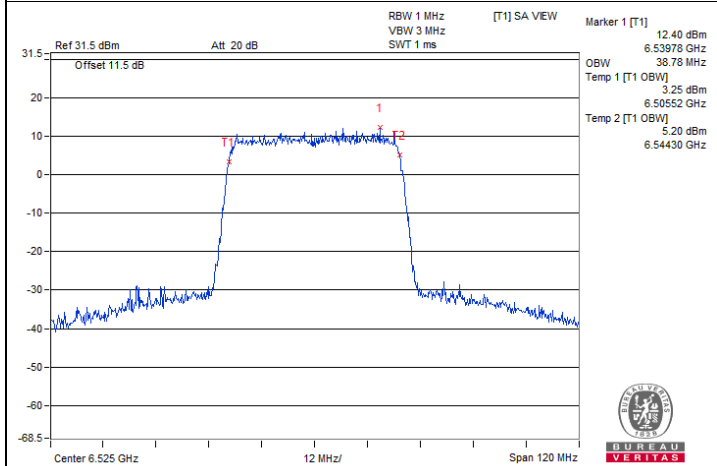


802.11be (EHT40) / Chain 0 : CH 115

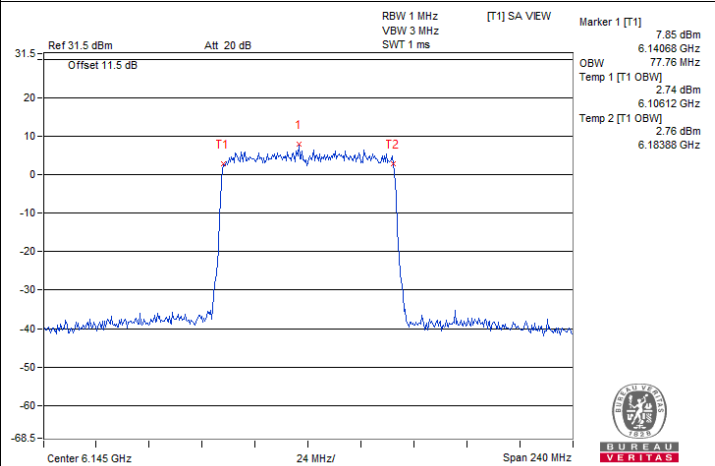

802.11be (EHT80) / Chain 0 : CH 39

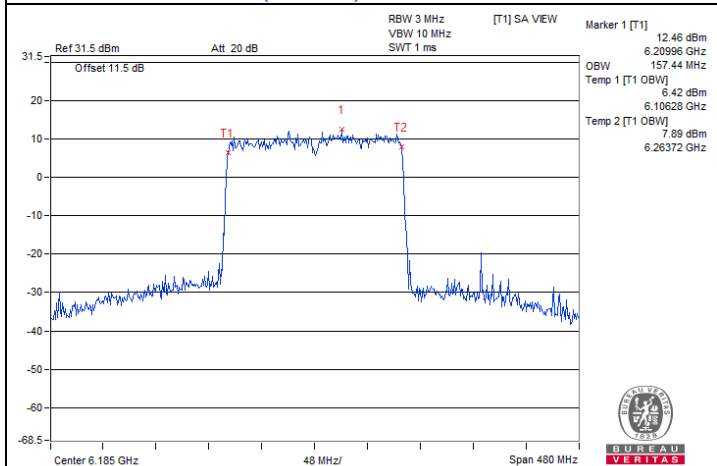

802.11be (EHT160) / Chain 0 : CH 47

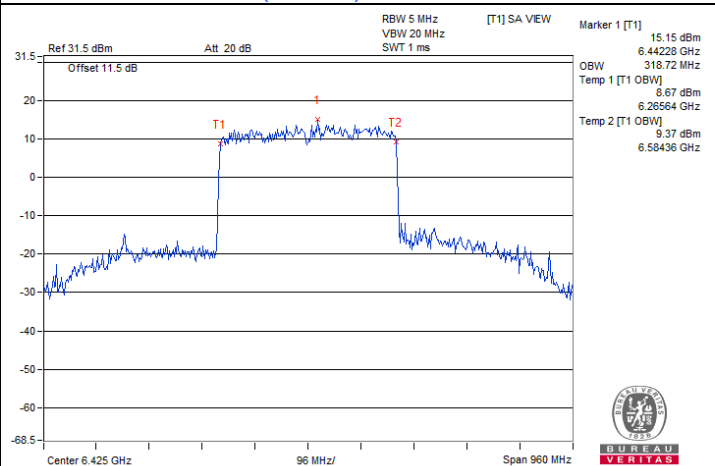

802.11be (EHT320) / Chain 0 : CH 95

7.6 Contention-based Protocol

Environmental Conditions:	25°C, 60% RH	Tested By:	Frankie Chang
---------------------------	--------------	------------	---------------

Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
Wireless Module	Intel	BE200	23.40.0.4

Note: The EUT device modulation technique OFDMA does not support partial RUs (resource units), channel puncturing, and bandwidth reduction mechanisms.

For U-NII-5

Contention Based Protocol Measurement

Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	45	6175	6175	-60	4.3	0	-64.3	-62	OFF
					-62	4.3	0	-66.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
	320	31	6105	5950	-60	4.3	0	-64.3	-62	OFF
					-63	4.3	0	-67.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
				6105	-61	4.3	0	-65.3	-62	OFF
					-64	4.3	0	-68.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON
				6260	-61	4.3	0	-65.3	-62	OFF
					-64	4.3	0	-68.3	-62	Minimal
					-77.7	4.3	0	-82	-62	ON



Notes:

1. After investigation (consider antenna gain and path loss), the one representative port (Ant. 4) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability

Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6175	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	5950	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6105	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6260	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

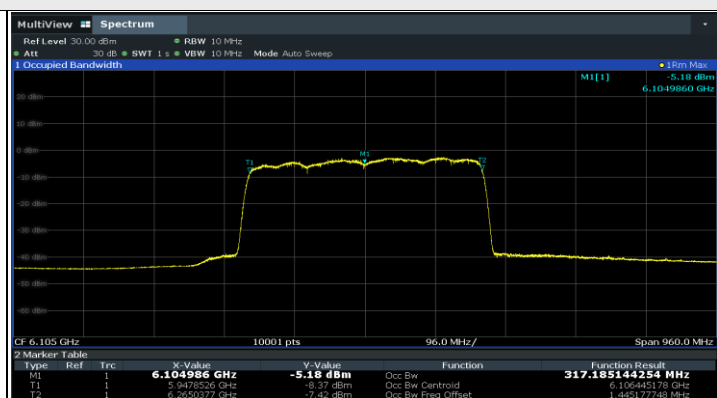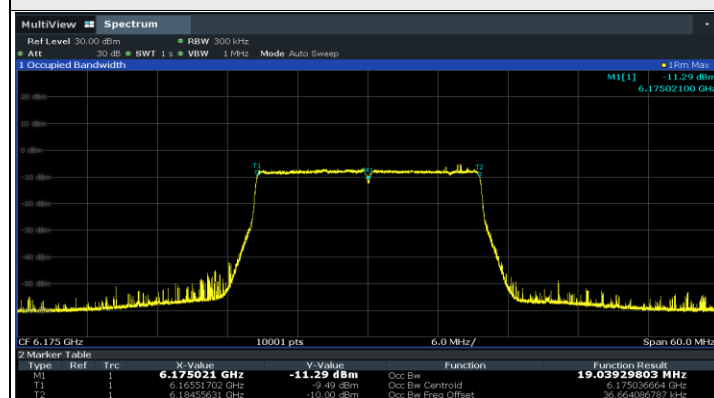


Plots of Injected signal (AWGN) level

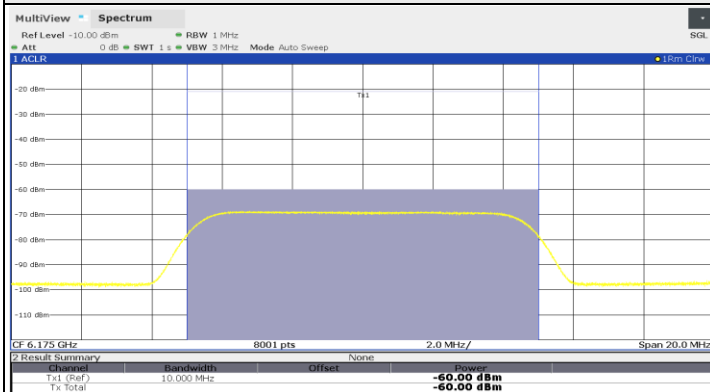


802.11be (EHT20) / CH45

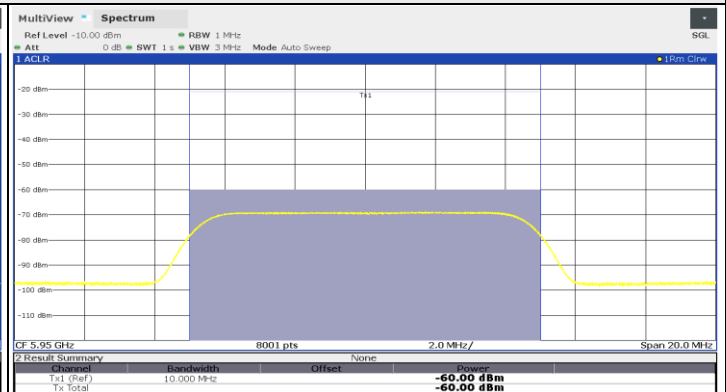

802.11be (EHT320) / CH31(Low Edge)

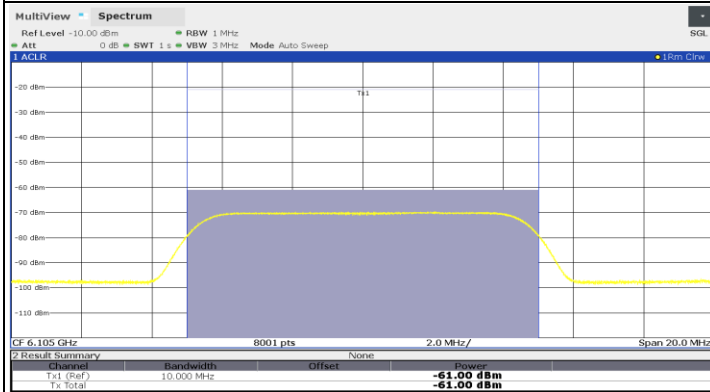


802.11be (EHT320) / CH31(Middle)

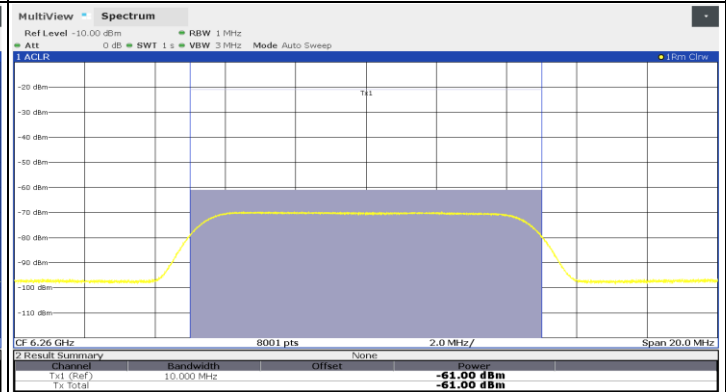

802.11be (EHT320) / CH31(High Edge)

Plots of EUT ceased transmission in the time domain


CBP

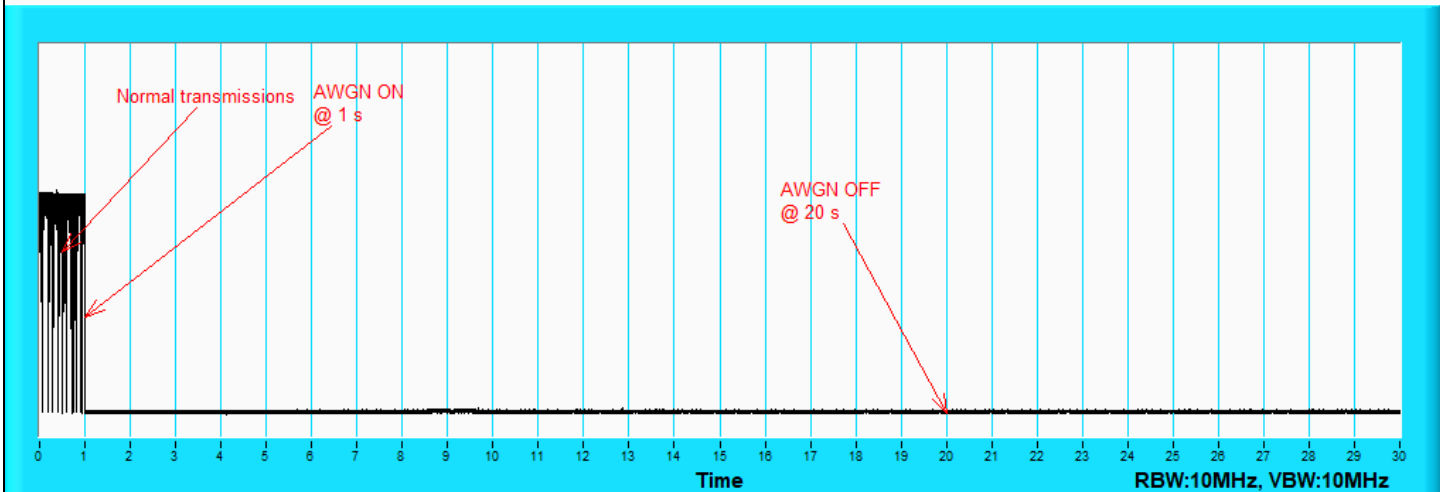

802.11be (EHT20) / CH45


Plots of EUT ceased transmission in the time domain

CBP

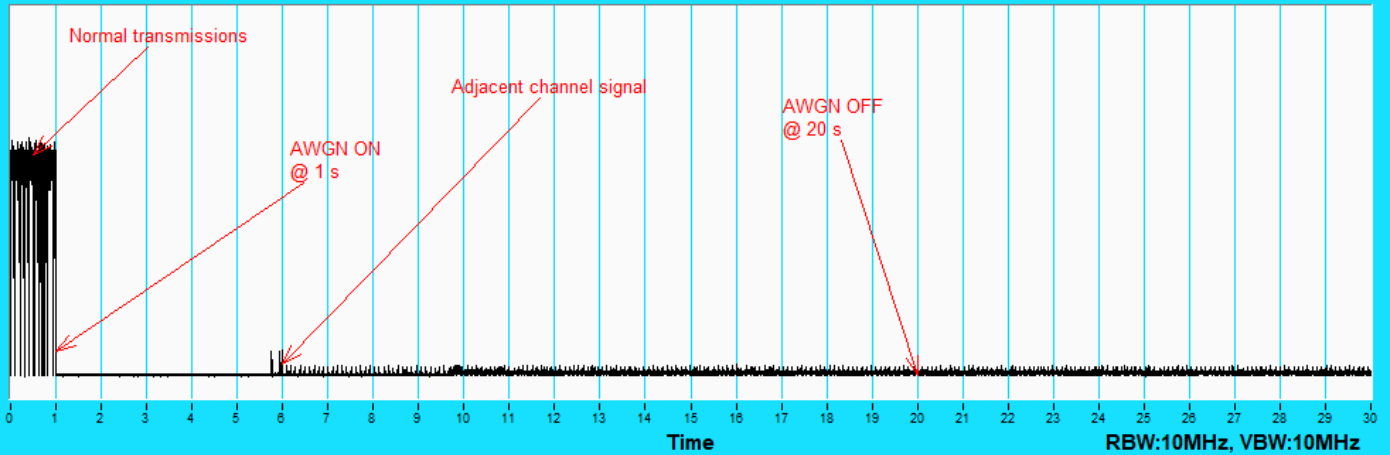


802.11be (EHT320) / CH31(Low Edge)

CBP

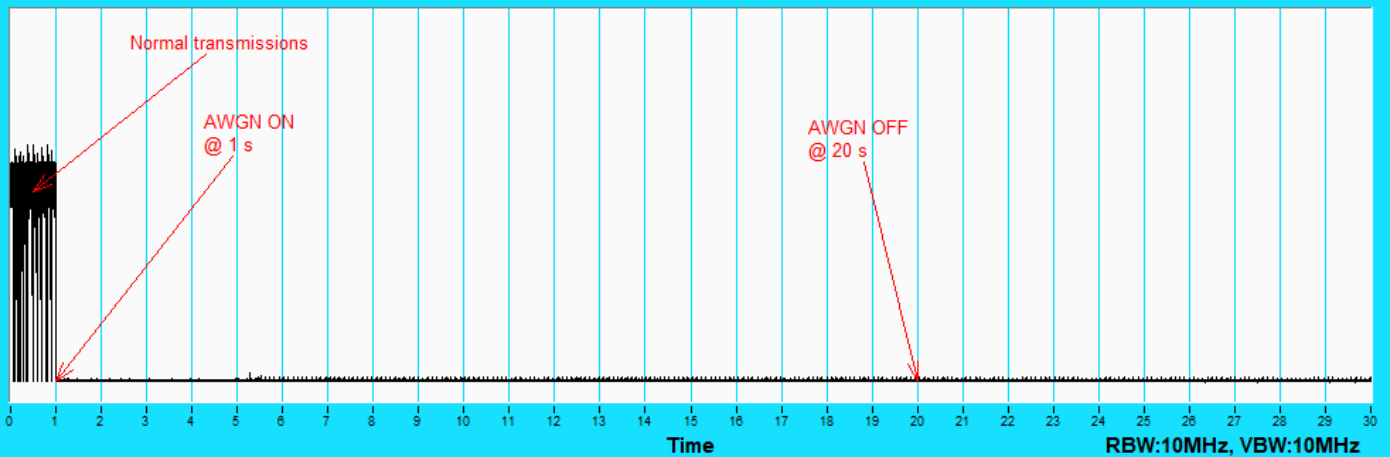

802.11be (EHT320) / CH31(Middle)

CBP

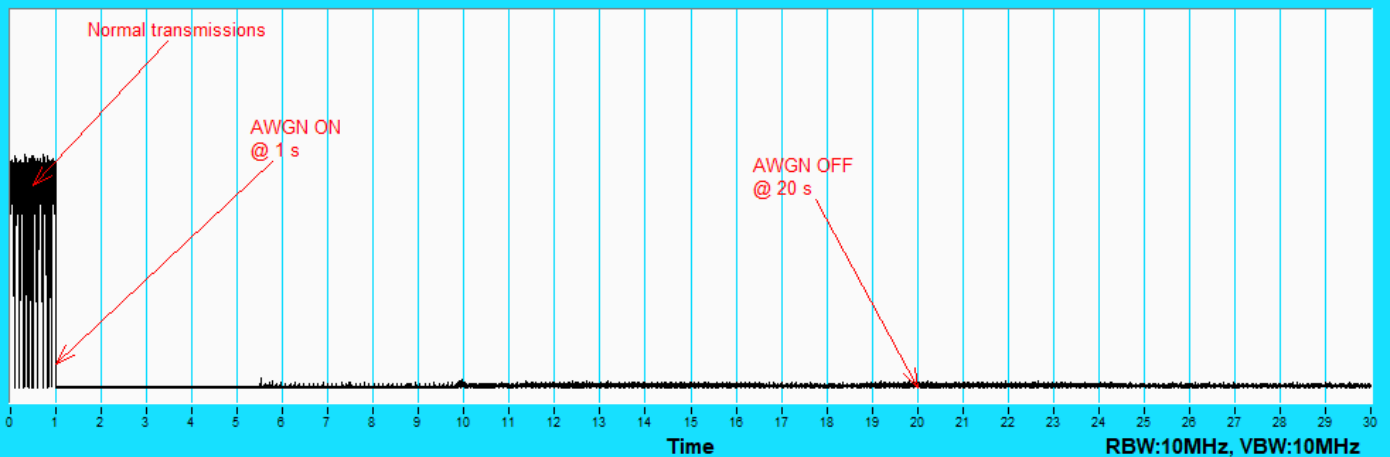

802.11be (EHT320) / CH31(High Edge)