


FCC RADIO TEST REPORT

FCC ID : QYLPN7462B
Equipment : RFID Module
Brand Name : Getac
Model Name : K120 PN7462 NFC
Applicant : Getac Technology Corporation.
5F., Building A, No. 209, Sec.1, Nangang
Rd., Nangang Dist., Taipei City 11568,
Taiwan, R.O.C.
Standard : FCC Part 15 Subpart C §15.225

The product was received on Nov. 12, 2019 and testing was started from Nov. 20, 2019 and completed on Nov. 28, 2019. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Reviewed by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1. General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2. Test Configuration of Equipment Under Test.....	7
2.1 Descriptions of Test Mode	7
2.2 Connection Diagram of Test System	7
2.3 Table for Supporting Units	8
2.4 EUT Operation Test Setup	8
3. Test Results	9
3.1 AC Power Line Conducted Emissions Measurement	9
3.2 20dB and 99% OBW Spectrum Bandwidth Measurement.....	11
3.3 Frequency Stability Measurement	12
3.4 Field Strength of Fundamental Emissions and Mask Measurement.....	13
3.5 Radiated Emissions Measurement.....	15
3.6 Antenna Requirements.....	18
4. List of Measuring Equipment	19
5. Uncertainty of Evaluation	20
Appendix A. Test Results of Conducted Emission Test	
Appendix B. Test Results of Conducted Test Items	
B1. Test Result of 20dB Spectrum Bandwidth	
B2. Test Result of Frequency Stability	
Appendix C. Test Results of Radiated Test Items	
C1. Test Result of Field Strength of Fundamental Emissions	
C2. Results of Radiated Emissions (9 kHz~30MHz)	
C3. Results of Radiated Emissions (30MHz~1GHz)	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR9N1220-03	01	Initial issue of report	Jan. 16, 2020

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.207	AC Power Line Conducted Emissions	Pass
3.2	15.215(c)	20dB Spectrum Bandwidth	Pass
	2.1049	99% OBW Spectrum Bandwidth	Reporting only
3.3	15.225(e)	Frequency Stability	Pass
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Pass
3.5	15.225(d) 15.209	Radiated Spurious Emissions	Pass
3.6	15.203	Antenna Requirements	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Amy Chen

1. General Description

1.1 Product Feature of Equipment Under Test

NFC

Product Specification subjective to this standard	
Antenna Type	NFC: Loop Antenna

The product was installed into Notebook (Brand Name: Getac, Model Name: B360) during test:

B360	SKU A	SKU C	SKU E
CPU	i7-10510U	i7-10510U	i7-10510U
Memory (DDR4)	8G x 2	8G x 2	8G x 2
Storage (OPAL SSD)	Main: 512GB	Main:512GB	Main:512GB
	Second: 512GB	Second:512GB	Second:512GB
WLAN	AX200NGW	AX200NGW	AX200NGW
WWAN	EN7455	EM7511	N/A
GPS	v	v	v
Camera FN20FF-679H (RGB)	N/A	N/A	N/A
Camera FN23FF-678H (RGB+IR)	v	v	v
FINGERPRINT	N/A	N/A	N/A
RFID	v	v	v
BCR Honeywell N6603	v	v	v
VGA	v	v	v
HDMI	v	v	v
RS232	v	v	v
LAN	v	v	v
2nd LAN	N/A	N/A	N/A
USB	v	v	v
USB3.1 Type C	N/A	N/A	N/A
Smart Card	v	v	v
SD Card Reader	v	v	v
MXM Nvidia GTX1050 (Expansion)	N/A	N/A	N/A
ODD (Expansion)	N/A	N/A	N/A
RS232 (Expansion)	N/A	N/A	N/A
Touch Screen	v	v	v

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH03-HY	CO05-HY	03CH07-HY
Test Engineer	Louis Chung	Tom Lee	KenWu
Temperature	22~24°C	24~26°C	23~24°C
Relative Humidity	53~55%	49~53%	55~57%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.225
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.


The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report.

Test Cases	
AC Conducted Emission	Mode 1 : LTE Band 5 Idle + Bluetooth Idle + RFID (13.56 MHz) Tx + WLAN (5GHz) Idle + TF + TC + Adapter 3 (MTA190474W4) for SKU A
Remark: <ol style="list-style-type: none"> 1. TF stands for Test Function, and consists of H-Pattern, MPEG4 , Barcode Scan, Camera, Smart Card Reader, and GPS Rx 2. TC stands for Test Configuration, and consists of Earphone + Mic, SD Card, USB HD(Data Link)(USB 2.0*1, USB 3.0*2), LCD Monitor(HDMI out), LCD Monitor(VGA out), LAN Link, RS-232 Load, and Battery 3. For Radiated Test Cases were performed with SKU A, Battery 1 (Model: BP3S1P2100S-02) and Adapter 3 (Model: MTA190474W4). 	

2.2 Connection Diagram of Test System

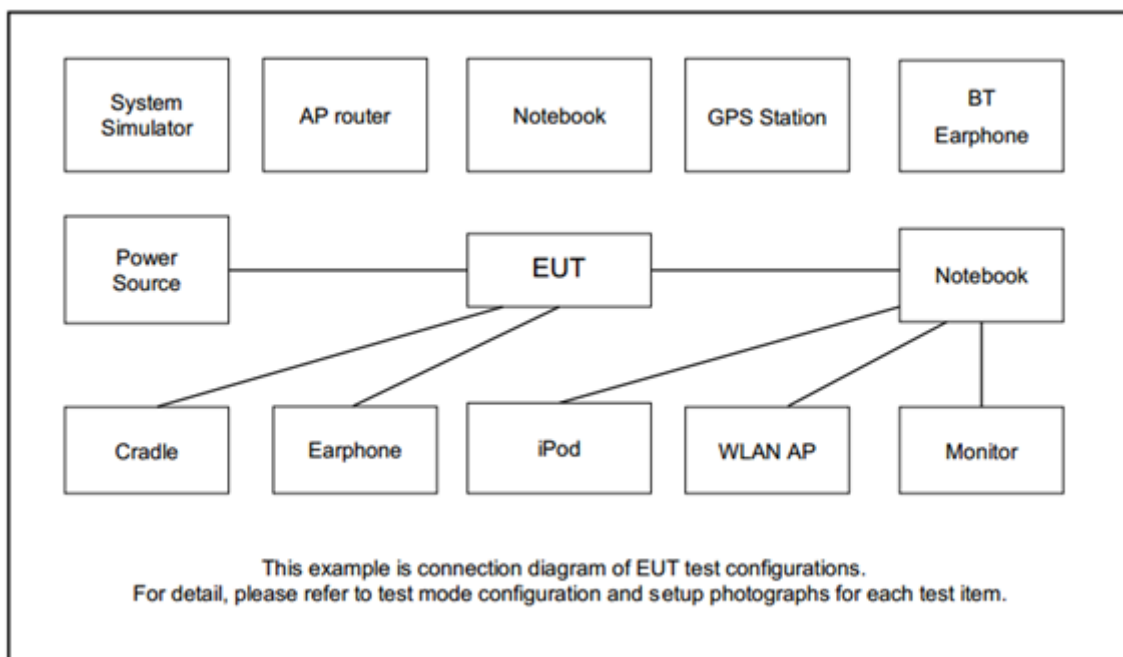

2.3 Table for Supporting Units

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded, 1.8m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
4.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
5.	iPod Earphone	Apple	N/A	Verification	UnShielded, 1.2m	N/A
6.	Notebook	DELL	Latitude E3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
7.	LCD Monitor	ASUS	PB27U	FCC DoC	Shielded, 1.6m	Unshielded, 1.8m
8.	LCD Monitor	DELL	U2410	FCC DoC	Shielded, 1.6m	Unshielded, 1.8m
9.	USB HD	lenovo	F310S	FCC DoC	Shielded, 1.0m	N/A
10.	SD Card	Trancend	MicroSD HC	FCC DoC	N/A	N/A
11.	Smart Card	N/A	N/A	N/A	N/A	N/A

2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 0 cm gap to the EUT.

3. Test Results

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test setup

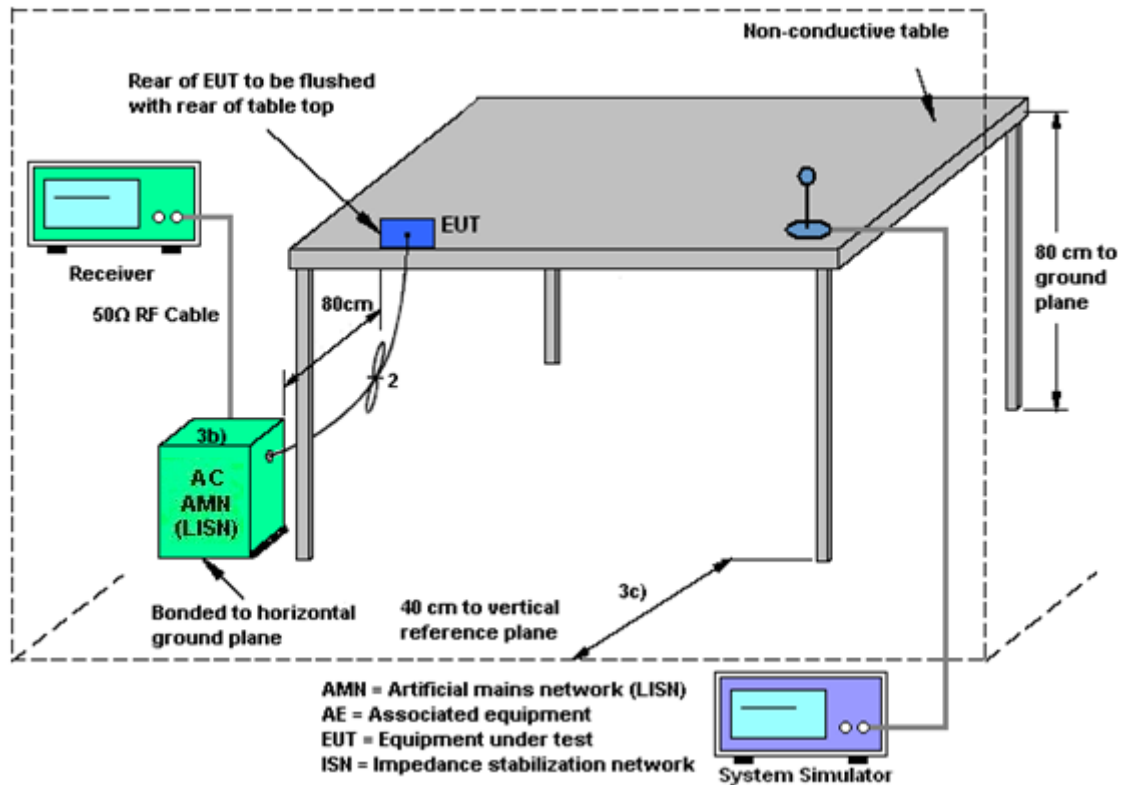

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

3.2.4 Test Setup

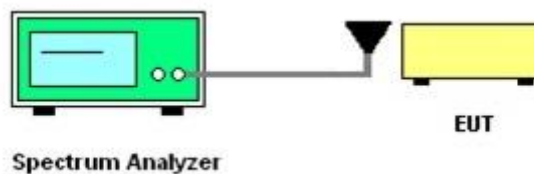

3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

3.3 Frequency Stability Measurement

3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. Extreme temperature rule is -20°C~50°C.

3.3.4 Test Setup

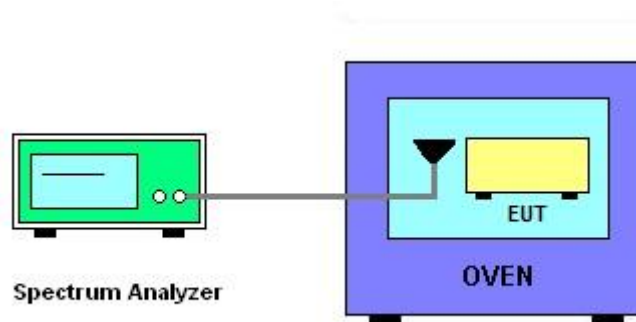

3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.

3.4 Field Strength of Fundamental Emissions and Mask Measurement

3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength ($\mu\text{V/m}$) at 30m	Field Strength (dB $\mu\text{V/m}$) at 30m	Field Strength (dB $\mu\text{V/m}$) at 10m	Field Strength (dB $\mu\text{V/m}$) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

3.4.2 Measuring Instruments

See list of measuring instruments of this test report.


3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.

Note: Emission level (dBμV/m) = 20 log Emission level (μV/m).

3.4.4 Test Setup

For radiated emissions below 30MHz

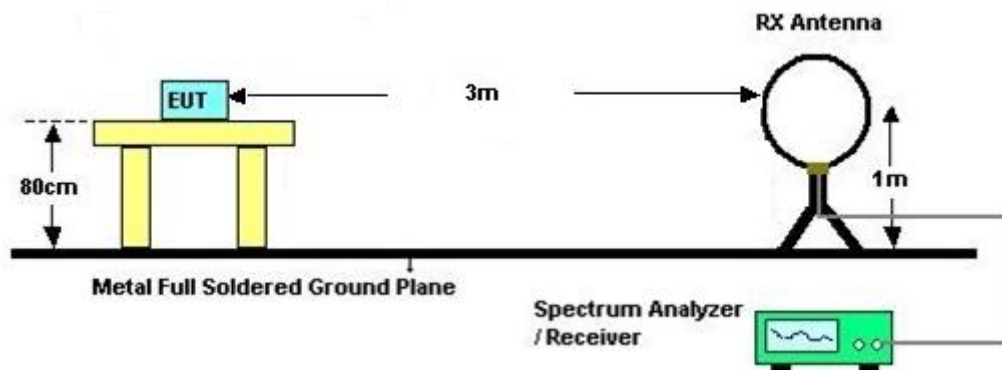

3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.

3.5 Radiated Emissions Measurement

3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (μ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Measuring Instrument Setting

The following table is the setting of receiver:

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak


Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver.

3.5.5 Test Setup

For radiated emissions below 30MHz

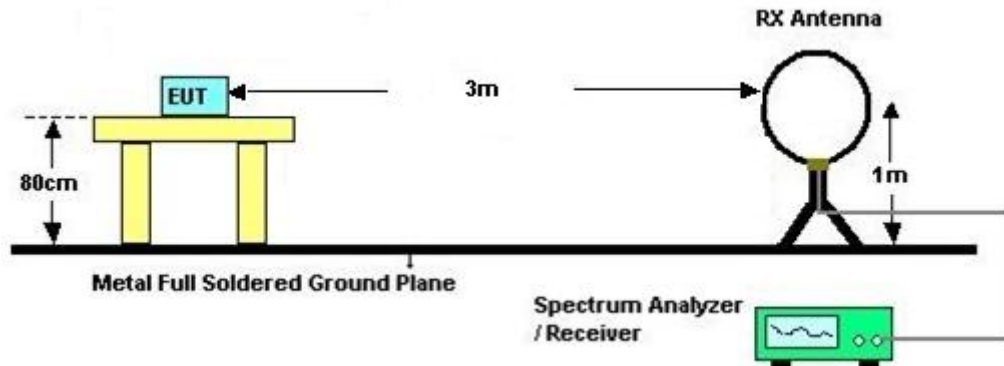

For radiated emissions above 30MHz

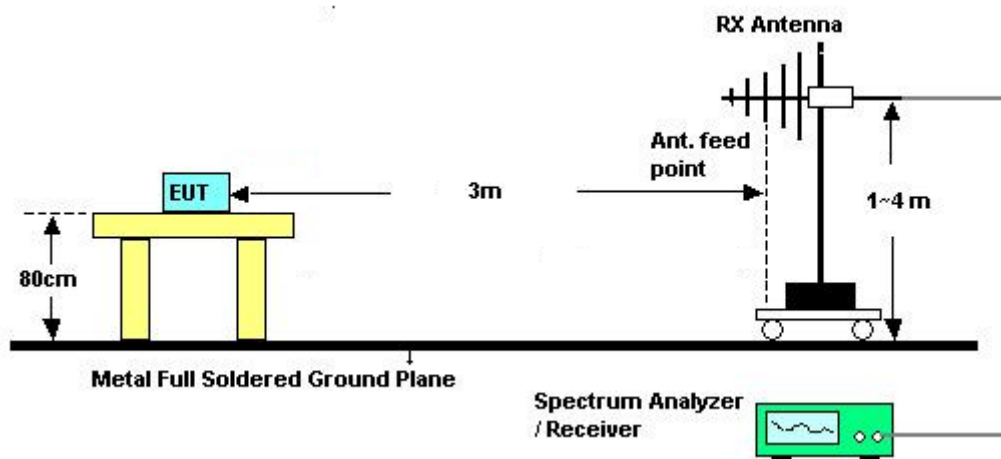

3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

Remark: There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6 Antenna Requirements

3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	Apr. 12, 2019	Nov. 20, 2019~ Nov. 21, 2019	Apr. 11, 2020	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 04, 2019	Nov. 20, 2019~ Nov. 21, 2019	Sep. 03, 2020	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 28, 2018	Nov. 20, 2019~ Nov. 21, 2019	Nov. 27, 2019	Conducted (TH03-HY)
Power Divider	Warison	WCOU-0.4-26.5S-20	#A	N/A	Nov. 06, 2019	Nov. 20, 2019~ Nov. 21, 2019	Nov. 05, 2020	Conducted (TH03-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 28, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Nov. 28, 2019	Nov. 14, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 20, 2019	Nov. 28, 2019	Nov. 19, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	Nov. 28, 2019	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Nov. 28, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Dec. 31, 2018	Nov. 28, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Dec. 31, 2018	Nov. 28, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 11, 2019	Nov. 22, 2019	Jan. 10, 2020	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 30, 2019	Nov. 22, 2019	Apr. 29, 2020	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz~26.5GHz	Jan. 23, 2019	Nov. 22, 2019	Jan. 22, 2020	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 20, 2019	Nov. 22, 2019	May 19, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4, MY28655/4	9kHz~30MHz	Feb. 26, 2019	Nov. 22, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 26, 2019	Nov. 22, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	80504004656 H	N/A	N/A	Nov. 22, 2019	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Nov. 22, 2019	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Nov. 22, 2019	N/A	Radiation (03CH07-HY)

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.0
---	-----

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.6
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.6
---	-----




Appendix A. Test Results of Conducted Emission Test

Test Engineer :	Tom Lee	Temperature :	24~26℃
		Relative Humidity :	49~53%

EUT Information

Report NO : 9N1220-03
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

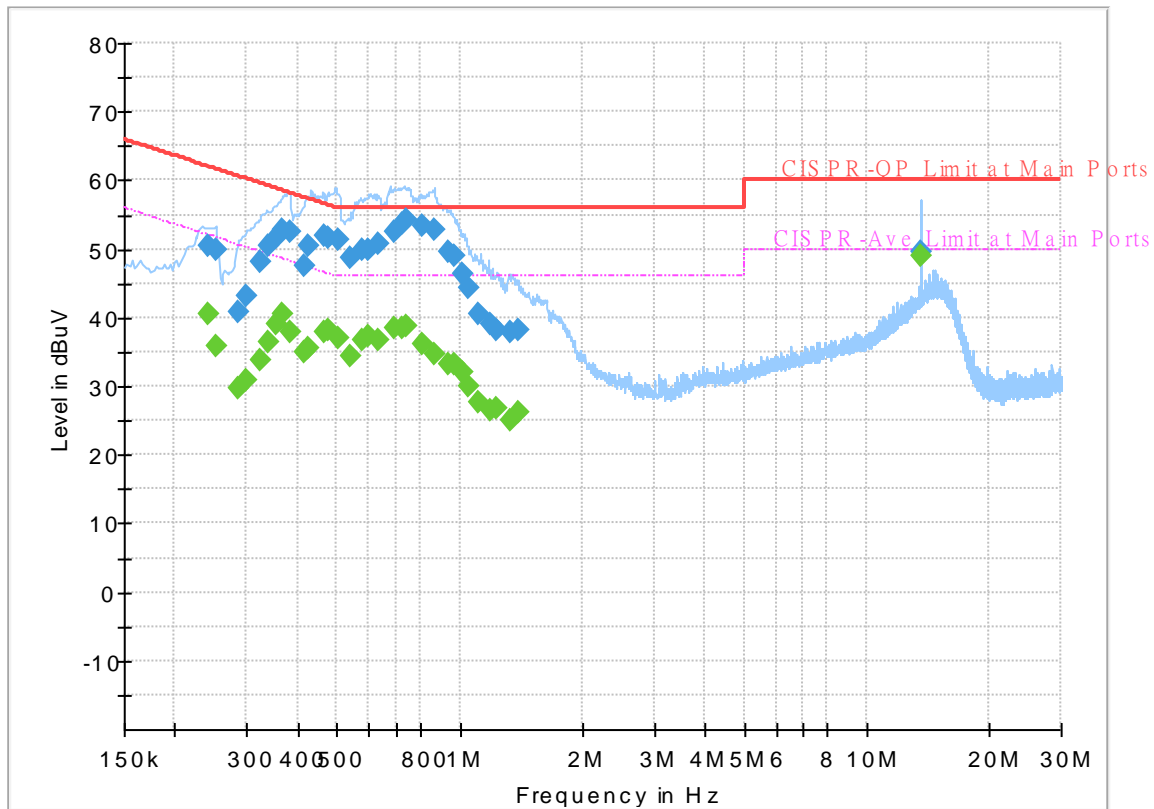

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.242250	50.43	---	62.02	11.59	L1	OFF	19.5
0.242250	---	40.54	52.02	11.48	L1	OFF	19.5
0.251160	49.96	---	61.72	11.76	L1	OFF	19.5
0.251160	---	35.73	51.72	15.99	L1	OFF	19.5
0.287250	40.70	---	60.60	19.90	L1	OFF	19.5
0.287250	---	29.61	50.60	20.99	L1	OFF	19.5
0.299400	43.28	---	60.26	16.98	L1	OFF	19.5
0.299400	---	30.80	50.26	19.46	L1	OFF	19.5
0.323250	48.12	---	59.62	11.50	L1	OFF	19.5
0.323250	---	33.84	49.62	15.78	L1	OFF	19.5
0.339990	50.47	---	59.20	8.73	L1	OFF	19.5
0.339990	---	36.39	49.20	12.81	L1	OFF	19.5
0.353940	51.62	---	58.87	7.25	L1	OFF	19.5
0.353940	---	39.04	48.87	9.83	L1	OFF	19.5
0.368250	52.71	---	58.54	5.83	L1	OFF	19.5
0.368250	---	40.42	48.54	8.12	L1	OFF	19.5
0.381750	52.43	---	58.24	5.81	L1	OFF	19.5
0.381750	---	37.89	48.24	10.35	L1	OFF	19.5
0.413250	47.59	---	57.58	9.99	L1	OFF	19.5
0.413250	---	35.10	47.58	12.48	L1	OFF	19.5
0.426750	50.41	---	57.32	6.91	L1	OFF	19.5

0.426750	---	35.43	47.32	11.89	L1	OFF	19.5
0.465000	51.90	---	56.60	4.70	L1	OFF	19.5
0.465000	---	38.03	46.60	8.57	L1	OFF	19.5
0.477870	51.71	---	56.38	4.67	L1	OFF	19.5
0.477870	---	38.19	46.38	8.19	L1	OFF	19.5
0.502800	51.36	---	56.00	4.64	L1	OFF	19.5
0.502800	---	37.16	46.00	8.84	L1	OFF	19.5
0.538620	48.71	---	56.00	7.29	L1	OFF	19.5
0.538620	---	34.41	46.00	11.59	L1	OFF	19.5
0.575250	49.99	---	56.00	6.01	L1	OFF	19.5
0.575250	---	36.73	46.00	9.27	L1	OFF	19.5
0.597750	49.98	---	56.00	6.02	L1	OFF	19.5
0.597750	---	37.23	46.00	8.77	L1	OFF	19.5
0.629250	50.74	---	56.00	5.26	L1	OFF	19.5
0.629250	---	36.78	46.00	9.22	L1	OFF	19.5
0.691350	52.58	---	56.00	3.42	L1	OFF	19.5
0.691350	---	38.36	46.00	7.64	L1	OFF	19.5
0.727080	53.75	---	56.00	2.25	L1	OFF	19.5
0.727080	---	38.59	46.00	7.41	L1	OFF	19.5
0.742020	54.19	---	56.00	1.81	L1	OFF	19.5
0.742020	---	38.90	46.00	7.10	L1	OFF	19.5
0.806370	53.28	---	56.00	2.72	L1	OFF	19.5
0.806370	---	36.26	46.00	9.74	L1	OFF	19.5
0.867120	52.92	---	56.00	3.08	L1	OFF	19.5
0.867120	---	34.75	46.00	11.25	L1	OFF	19.5
0.943890	49.46	---	56.00	6.54	L1	OFF	19.5
0.943890	---	33.11	46.00	12.89	L1	OFF	19.5
0.966750	49.13	---	56.00	6.87	L1	OFF	19.5
0.966750	---	33.19	46.00	12.81	L1	OFF	19.5
1.014000	46.33	---	56.00	9.67	L1	OFF	19.5
1.014000	---	32.16	46.00	13.84	L1	OFF	19.5
1.047750	44.28	---	56.00	11.72	L1	OFF	19.5
1.047750	---	29.92	46.00	16.08	L1	OFF	19.5
1.112640	40.56	---	56.00	15.44	L1	OFF	19.5
1.112640	---	27.70	46.00	18.30	L1	OFF	19.5
1.186350	39.08	---	56.00	16.92	L1	OFF	19.5
1.186350	---	26.63	46.00	19.37	L1	OFF	19.5
1.230000	38.20	---	56.00	17.80	L1	OFF	19.5
1.230000	---	26.70	46.00	19.30	L1	OFF	19.5
1.326750	37.88	---	56.00	18.12	L1	OFF	19.5
1.326750	---	25.12	46.00	20.88	L1	OFF	19.5
1.387950	38.29	---	56.00	17.71	L1	OFF	19.5
1.387950	---	26.21	46.00	19.79	L1	OFF	19.5
13.560000	---	48.92	50.00	1.08	L1	OFF	19.7
13.560000	49.58	---	60.00	10.42	L1	OFF	19.7

EUT Information

Report NO : 9N1220-03
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

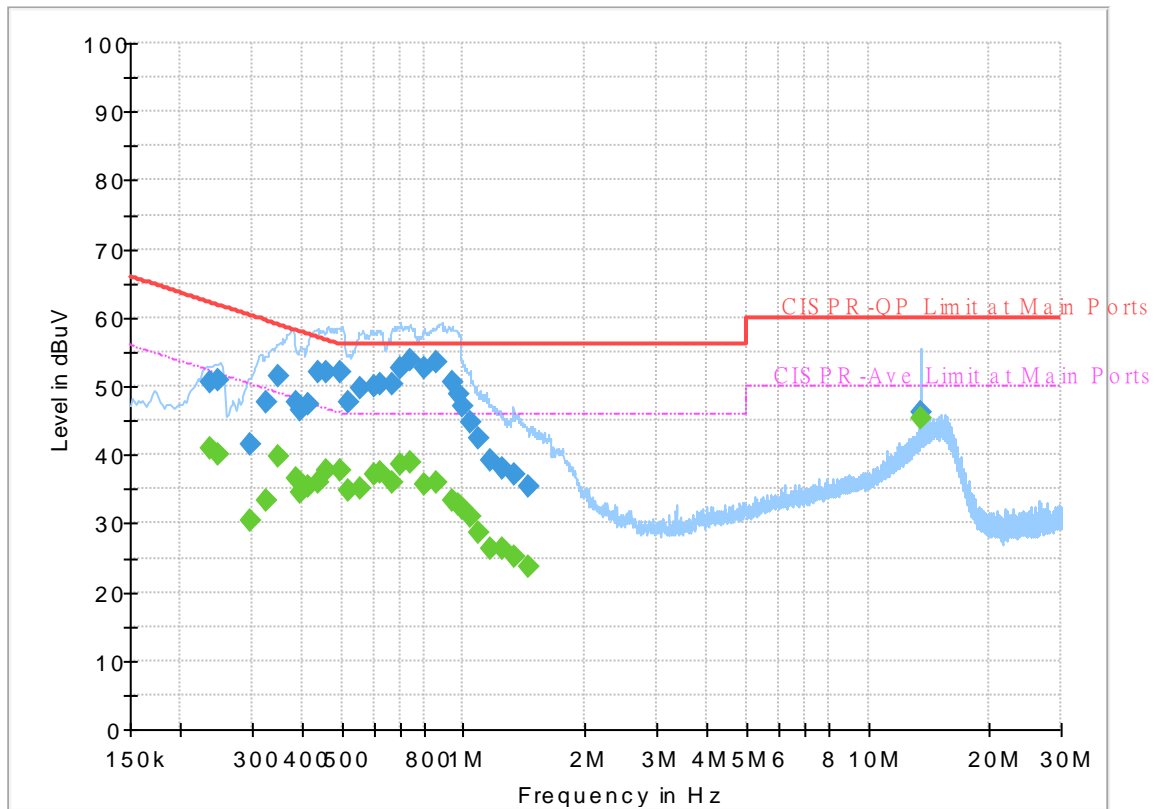

Final_Result



Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.235500	---	40.82	52.25	11.43	N	OFF	19.5
0.235500	50.55	---	62.25	11.70	N	OFF	19.5
0.247830	---	39.95	51.83	11.88	N	OFF	19.5
0.247830	50.80	---	61.83	11.03	N	OFF	19.5
0.298500	---	30.48	50.28	19.80	N	OFF	19.5
0.298500	41.63	---	60.28	18.65	N	OFF	19.5
0.325500	---	33.46	49.57	16.11	N	OFF	19.5
0.325500	47.81	---	59.57	11.76	N	OFF	19.5
0.350250	---	39.87	48.96	9.09	N	OFF	19.5
0.350250	51.38	---	58.96	7.58	N	OFF	19.5
0.386250	---	36.49	48.14	11.65	N	OFF	19.5
0.386250	47.73	---	58.14	10.41	N	OFF	19.5
0.393000	---	34.40	48.00	13.60	N	OFF	19.5
0.393000	46.35	---	58.00	11.65	N	OFF	19.5
0.412710	---	35.25	47.59	12.34	N	OFF	19.5
0.412710	47.49	---	57.59	10.10	N	OFF	19.5
0.438000	---	36.10	47.10	11.00	N	OFF	19.5
0.438000	52.17	---	57.10	4.93	N	OFF	19.5
0.460500	---	37.80	46.68	8.88	N	OFF	19.5
0.460500	52.03	---	56.68	4.65	N	OFF	19.5
0.498750	---	37.66	46.02	8.36	N	OFF	19.5

0.498750	52.12	---	56.02	3.90	N	OFF	19.5
0.519000	---	34.84	46.00	11.16	N	OFF	19.5
0.519000	47.67	---	56.00	8.33	N	OFF	19.5
0.557070	---	35.18	46.00	10.82	N	OFF	19.5
0.557070	49.80	---	56.00	6.20	N	OFF	19.5
0.599370	---	37.16	46.00	8.84	N	OFF	19.5
0.599370	49.94	---	56.00	6.06	N	OFF	19.5
0.624750	---	37.37	46.00	8.63	N	OFF	19.5
0.624750	50.40	---	56.00	5.60	N	OFF	19.5
0.667770	---	35.83	46.00	10.17	N	OFF	19.5
0.667770	50.24	---	56.00	5.76	N	OFF	19.5
0.701160	---	38.46	46.00	7.54	N	OFF	19.5
0.701160	52.66	---	56.00	3.34	N	OFF	19.5
0.738600	---	38.84	46.00	7.16	N	OFF	19.5
0.738600	53.86	---	56.00	2.14	N	OFF	19.5
0.800700	---	35.76	46.00	10.24	N	OFF	19.5
0.800700	52.56	---	56.00	3.44	N	OFF	19.5
0.862260	---	35.88	46.00	10.12	N	OFF	19.5
0.862260	53.38	---	56.00	2.62	N	OFF	19.5
0.942000	---	33.25	46.00	12.75	N	OFF	19.5
0.942000	50.45	---	56.00	5.55	N	OFF	19.5
0.975750	---	32.77	46.00	13.23	N	OFF	19.5
0.975750	48.95	---	56.00	7.05	N	OFF	19.5
0.999240	---	32.17	46.00	13.83	N	OFF	19.5
0.999240	47.12	---	56.00	8.88	N	OFF	19.5
1.036500	---	30.87	46.00	15.13	N	OFF	19.5
1.036500	44.78	---	56.00	11.22	N	OFF	19.5
1.092750	---	28.65	46.00	17.35	N	OFF	19.5
1.092750	42.39	---	56.00	13.61	N	OFF	19.5
1.169250	---	26.40	46.00	19.60	N	OFF	19.5
1.169250	39.12	---	56.00	16.88	N	OFF	19.5
1.248000	---	26.40	46.00	19.60	N	OFF	19.5
1.248000	37.89	---	56.00	18.11	N	OFF	19.5
1.333500	---	25.09	46.00	20.91	N	OFF	19.5
1.333500	37.23	---	56.00	18.77	N	OFF	19.5
1.442490	---	23.71	46.00	22.29	N	OFF	19.5
1.442490	35.29	---	56.00	20.71	N	OFF	19.5
13.560000	---	45.33	50.00	4.67	N	OFF	19.8
13.560000	46.33	---	60.00	13.67	N	OFF	19.8



Appendix B. Test Results of Conducted Test Items

B1. Test Result of 20dB Spectrum Bandwidth

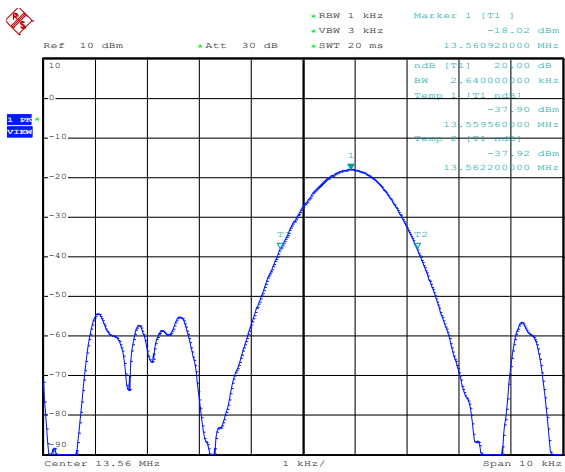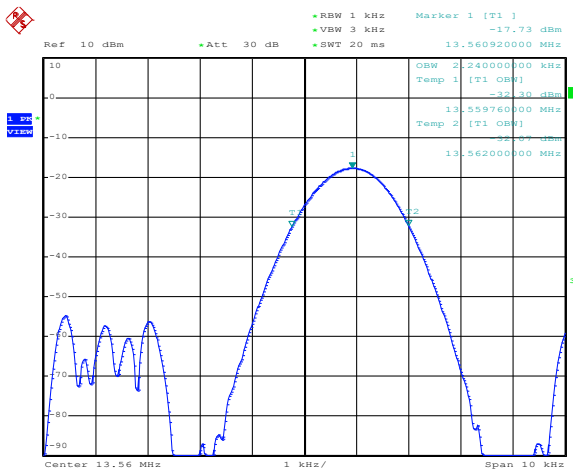Test mode		Test Frequency (MHz)	
NFC Tx		13.56	
			
20dB Bandwidth (kHz)		99% OccupiedBW(kHz)	
2.640		2.240	
Frequency range (MHz)		$f_L > 13.553$	Test Result
		$f_H < 13.567$	Complies

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

**B2. Test Result of Frequency Stability**


Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
120	13.560880	-20	0	13.560900
102	13.560880		2	13.560900
138	13.560880		5	13.560900
			10	13.560890
		-10	0	13.560900
			2	13.560900
			5	13.560900
			10	13.560900
		0	0	13.560900
			2	13.560900
			5	13.560900
			10	13.560900
		10	0	13.560900
			2	13.560900
			5	13.560900
			10	13.560900
		20	0	13.560880
			2	13.560880
			5	13.560880
			10	13.560880
		30	0	13.560880
			2	13.560880
			5	13.560880
			10	13.560880
		40	0	13.560880
			2	13.560880
			5	13.560880
			10	13.560880





Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
		50	0	13.560870
			2	13.560880
			5	13.560880
			10	13.560880
Max.Deviation (MHz)	0.000880	Max.Deviation (MHz)		0.000900
Max.Deviation (ppm)	64.8968	Max.Deviation (ppm)		66.3717
Limit	FS < ±100 ppm	Limit		FS < ±100 ppm
Test Result	PASS	Test Result		PASS


Appendix C. Test Results of Radiated Test Items

C1. Test Result of Field Strength of Fundamental Emissions

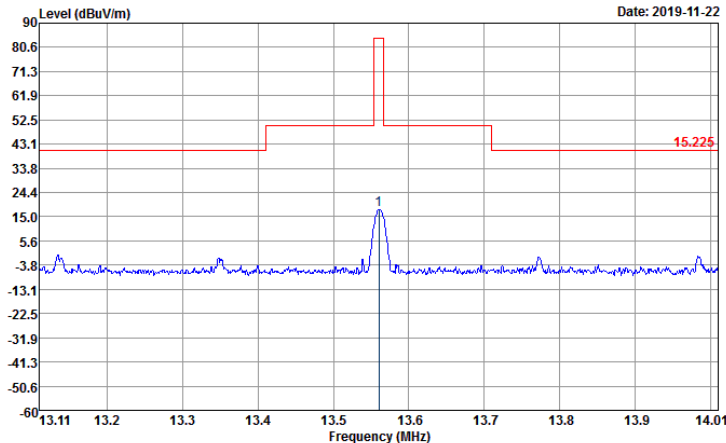
Test Mode :		NFC Tx		Test Frequency (MHz)		13.56			
				Date: 2019-11-22					
Site		: 03CH07-HY							
Condition		: 15.225 3m LOOP_ANT(H)_100315 HORIZONTAL							
		: RBW:9.000KHz VBW:9.000KHz SWT:Auto							
Project		: 9N1220-03							
Mode		: 1							
Freq		Level	Over	Limit	ReadAntenna	Cable	A/Pos	T/Pos	Remark
MHz		dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg
1	13.56	17.79	-66.21	84.00	37.43	19.80	0.56	100	182 QP

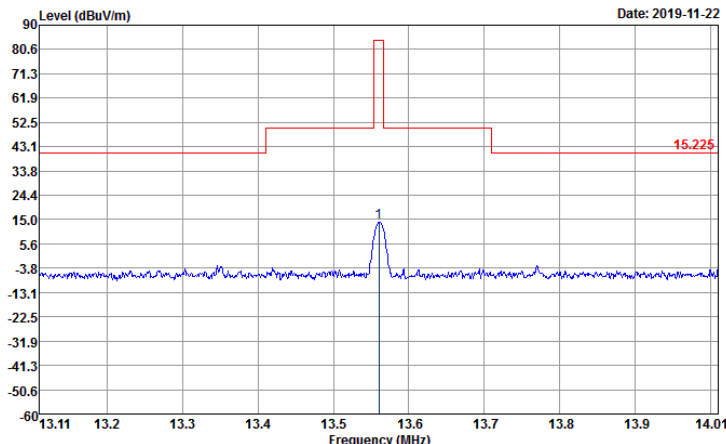
				Date: 2019-11-22					
Site		: 03CH07-HY							
Condition		: 15.225 3m LOOP_ANT(V)_100315 VERTICAL							
		: RBW:9.000KHz VBW:9.000KHz SWT:Auto							
Project		: 9N1220-03							
Mode		: 1							
Freq		Level	Over	Limit	ReadAntenna	Cable	A/Pos	T/Pos	Remark
MHz		dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg
1	13.56	14.03	-69.97	84.00	33.67	19.80	0.56	100	265 QP

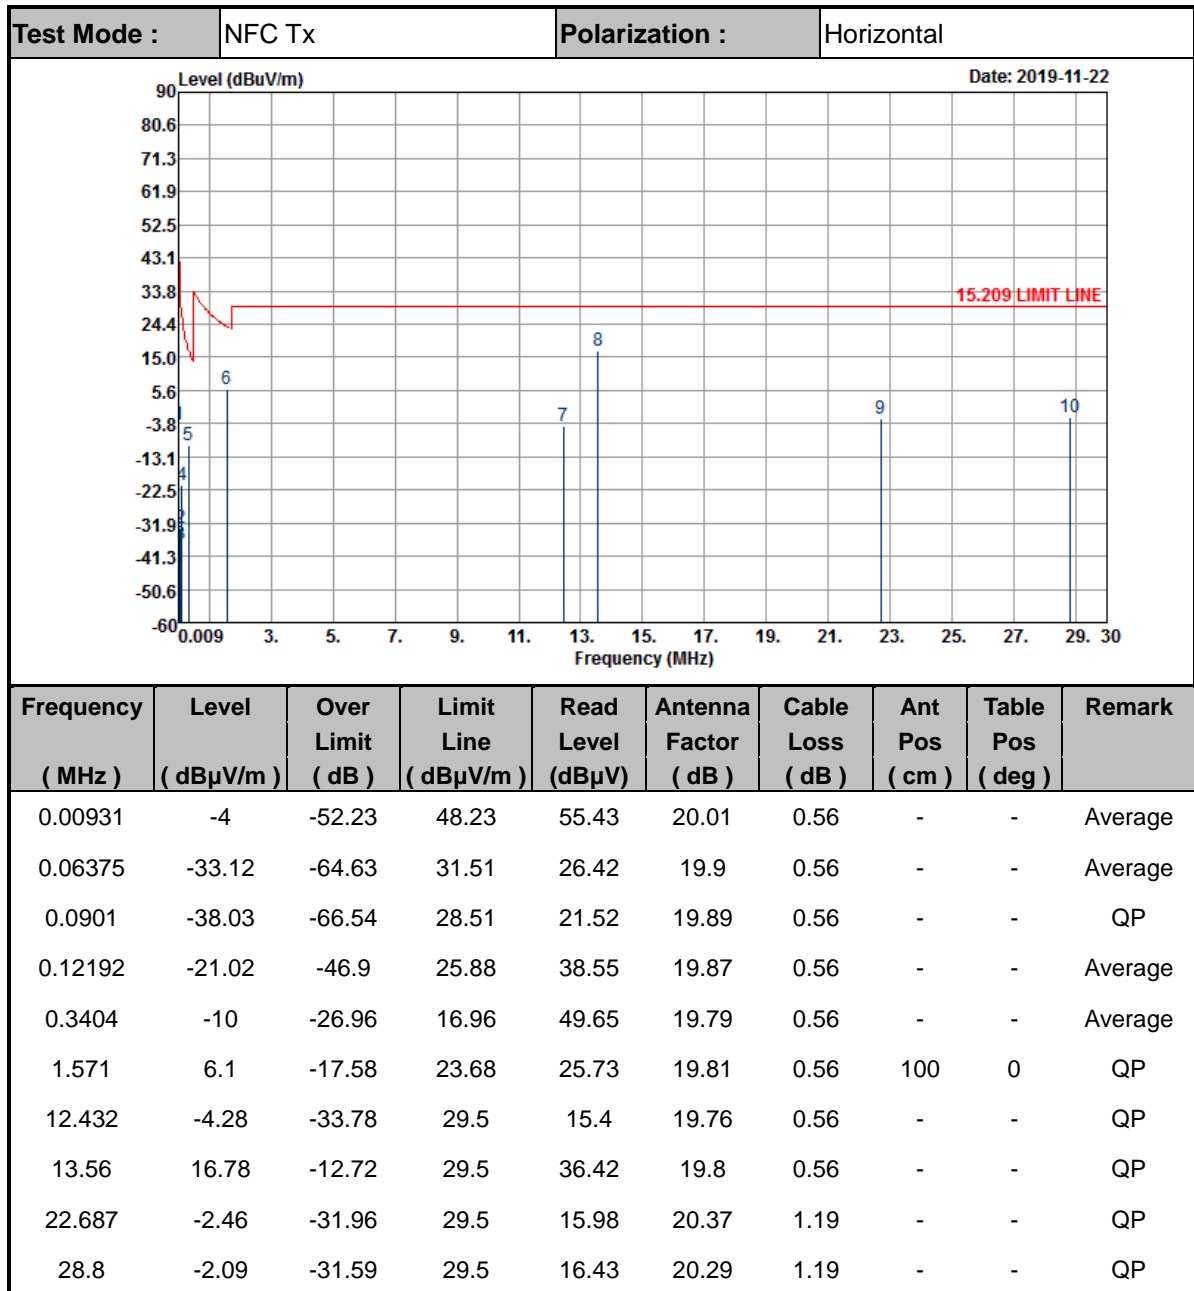C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

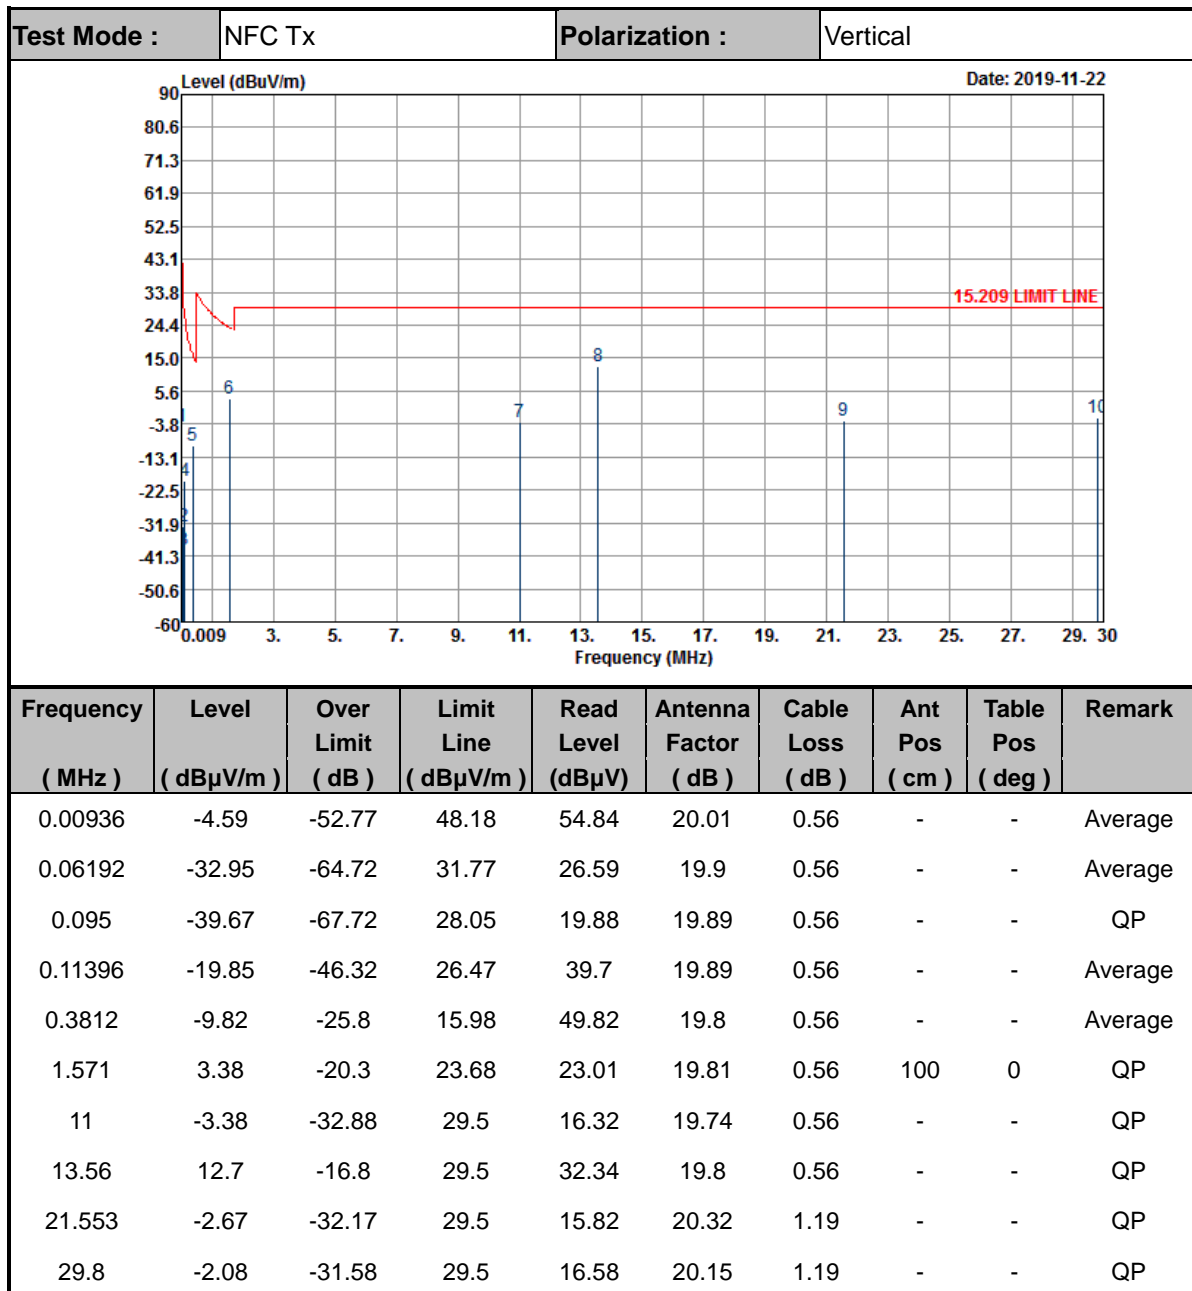

Note:

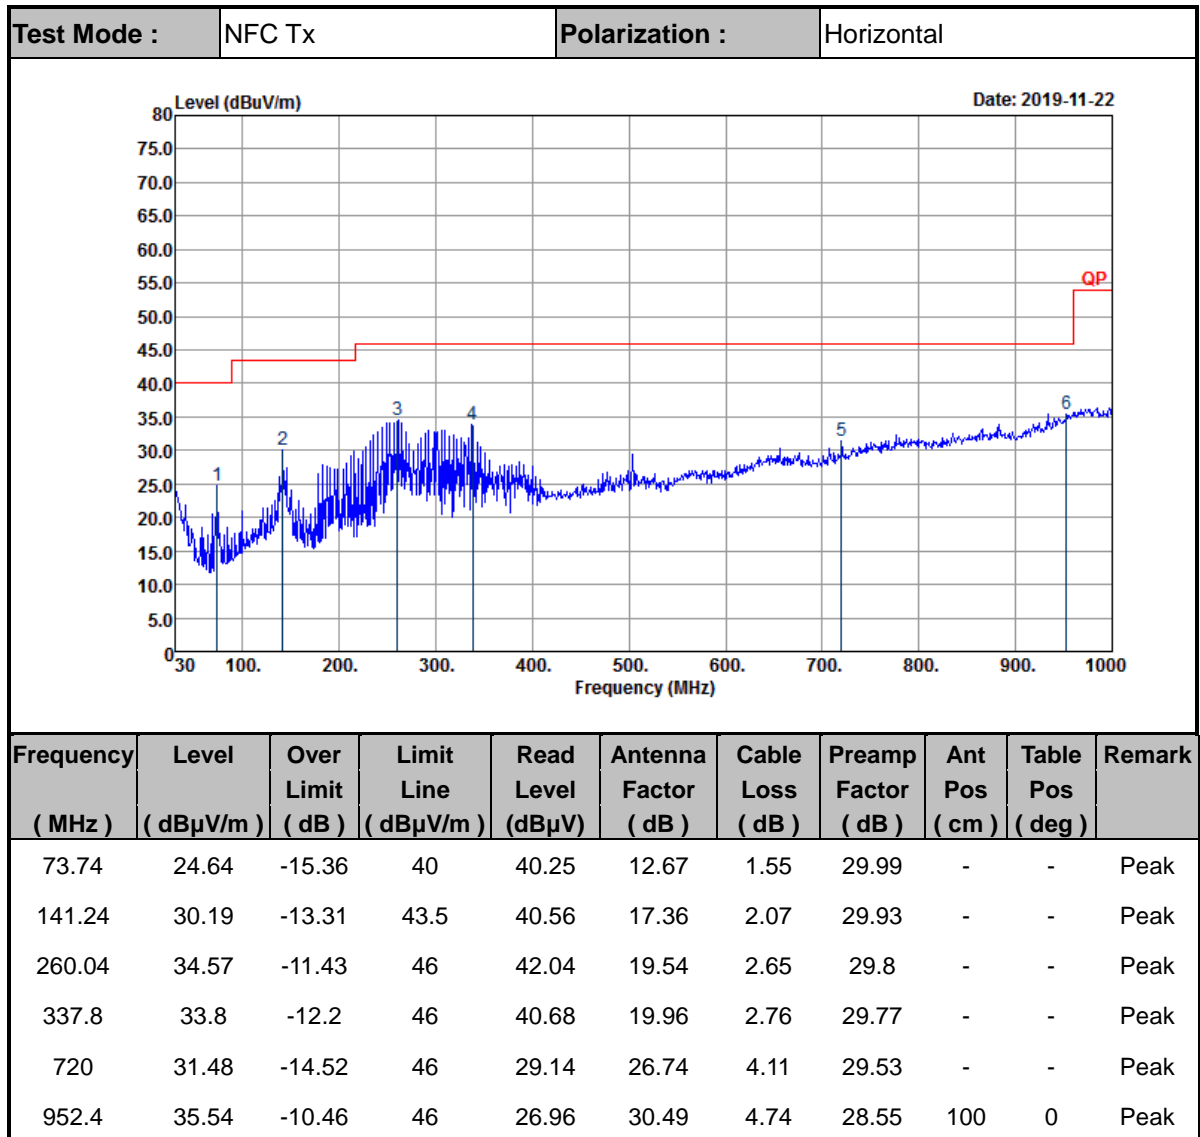1. 13.56 MHz is fundamental signal which can be ignored.
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
4. Limit line = specific limits (dBμV) + distance extrapolation factor.

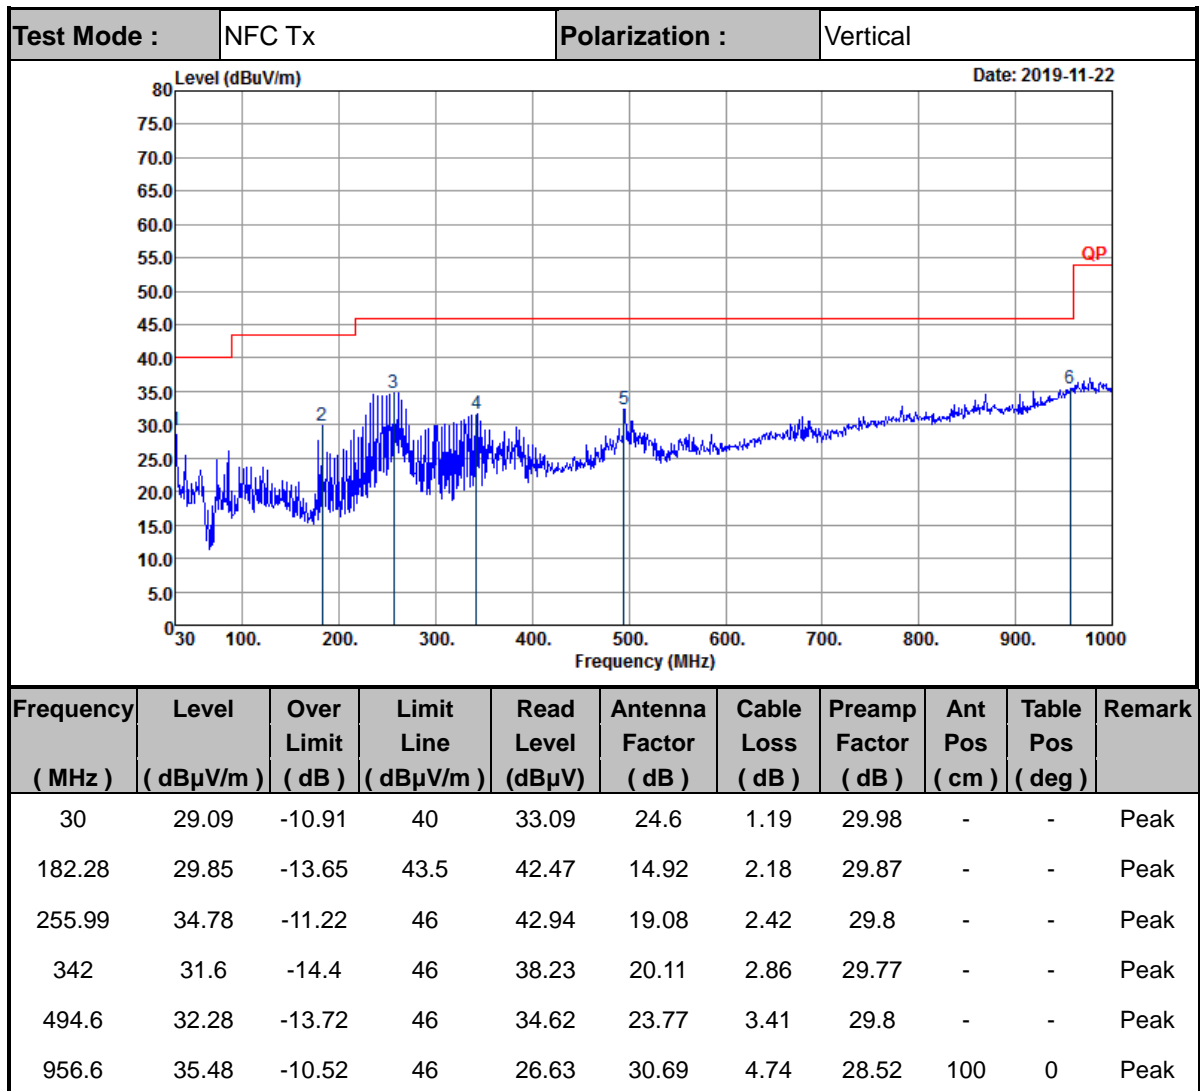C3. Results of Radiated Spurious Emissions (30MHz~1GHz)



Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.