

TEST REPORT

Applicant	SHENZHEN OTTO INTELLIGENCE TECHNOLOGY CO LTD
Address	RM.101-102, BLDG, F13, F518 IDEA LAND, NO: 1065 BAOYUAN RD, XLXLANG AVENUE, BAO-AN, SHENZHEN, CHINA

Manufacturer or Supplier	Wuyi Chuangxin Metal Tools Co.,Ltd
Address	Jinyanshan Industry Area, Quanxi Town, Wuyi County, Jinhua City, Zhejiang
Product	ELECTRICAL SYSTEMS FOR SELF-BALANCING SCOOTERS
Brand Name	N/A
Model	T62324WE
Additional Model & Model Difference	N/A
Date of tests	Mar. 21, 2018 ~ Apr. 25, 2018

the tests have been carried out according to the requirements of the following standards:

☒ **FCC Part 15, Subpart C, Section 15.247**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Breeze Jiang Project Engineer / EMC Department	Approved by Chris Chen Manager / EMC Department
	
	Date: May 16, 2018

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1 SUMMARY OF TEST RESULTS.....	6
2 MEASUREMENT UNCERTAINTY	6
3 GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT.....	7
3.2 DESCRIPTION OF TEST MODES.....	7
3.2.1. CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	11
3.4 DESCRIPTION OF SUPPORT UNITS.....	11
4 TEST TYPES AND RESULTS	12
4.1. CONDUCTED EMISSION MEASUREMENT	12
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS.....	15
4.2. RADIATED EMISSION AND BANDEDGE MEASUREMENT	17
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	17
4.2.2 TEST INSTRUMENTS	18
4.2.3 TEST PROCEDURES.....	19
4.2.4 DEVIATION FROM TEST STANDARD.....	20
4.2.5 TEST SETUP	20
4.2.6 EUT OPERATING CONDITIONS	21
4.2.7 TEST RESULTS.....	22
4.3. NUMBER OF HOPPING FREQUENCY USED.....	22
4.3.1. LIMIT OF HOPPING FREQUENCY USED	30
4.3.2. TEST SETUP	30
4.3.3. TEST INSTRUMENTS.....	30
4.3.4. TEST PROCEDURES	31
4.3.5. DEVIATION FROM TEST STANDARD	31
4.3.6. TEST RESULTS.....	31

4.4. DWELL TIME ON EACH CHANNEL	34
4.4.1 LIMIT OF DWELL TIME USED	34
4.4.2 TEST SETUP	34
4.4.3 TEST INSTRUMENTS	34
4.4.4 TEST PROCEDURES.....	34
4.4.5 DEVIATION FROM TEST STANDARD	35
4.4.6 TEST RESULTS.....	35
4.5. CHANNEL BANDWIDTH.....	38
4.5.1 LIMITS OF CHANNEL BANDWIDTH.....	38
4.5.2 TEST SETUP	38
4.5.3 TEST INSTRUMENTS	38
4.5.4 TEST PROCEDURE	38
4.5.5 DEVIATION FROM TEST STANDARD	38
4.5.6 EUT OPERATING CONDITION	38
4.5.7 TEST RESULTS.....	39
4.6. HOPPING CHANNEL SEPARATION	43
4.6.1. LIMIT OF HOPPING CHANNEL SEPARATION	43
4.6.2. TEST SETUP	43
4.6.3. TEST INSTRUMENTS.....	43
4.6.4. TEST PROCEDURES	43
4.6.5. DEVIATION FROM TEST STANDARD	43
4.6.6. TEST RESULTS.....	44
4.7. CONDUCTED OUTPUT POWER	48
4.7.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	48
4.7.2 TEST SETUP	48
4.7.3 TEST INSTRUMENTS	48
4.7.4 TEST PROCEDURES.....	48
4.7.5 DEVIATION FROM TEST STANDARD.....	48
4.7.6 EUT OPERATING CONDITION.....	48
4.7.7 TEST RESULTS.....	49
4.8. OUT OF BAND EMISSION MEASUREMENT	51
4.8.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT	51
4.8.2 TEST INSTRUMENTS	51
4.8.3 TEST PROCEDURE	51
4.8.4 DEVIATION FROM TEST STANDARD.....	51
4.8.5 EUT OPERATING CONDITION	51
4.8.6 TEST RESULTS.....	51



Test Report No.: RF180321N025

5. PHOTOGRAPHS OF THE TEST CONFIGURATION	56
6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	57



Test Report No.: RF180321N025

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF180321N025	Original release	May 16, 2018

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.247(d)&15.209	Transmitter Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1GMHz	3.83dB
	1GHz ~ 18GHz	4.66dB
	18GHz ~ 40GHz	4.80dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	ELECTRICAL SYSTEMS FOR SELF-BALANCING SCOOTERS
MODEL NO.	T62324WE
ADDITIONAL MODEL	N/A
FCC ID	2APO6OTTO623
POWER SUPPLY	DC 25.2V from Li-ion Battery or DC 29.4V from Adapter
MODULATION TECHNOLOGY	FHSS
MODULATION TYPE	GFSK, $\pi/4$ DQPSK, 8DPSK
OPERATING FREQUENCY	2402MHz~2480MHz
NUMBER OF CHANNEL	79
PEAK OUTPUT POWER	1.057mW (Max. Measured)
ANTENNA TYPE	PCB Antenna, 2dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 180321N025) for detailed product photo.
4. The EUT has two colors with appearance, It's the same material and inside circuit.
5. The EUT was powered by the following adapter:

ADAPTER	
BRAND:	CD
MODEL:	CP2910
INPUT:	AC 100 - 130V 50/60hz 1.0A
OUTPUT:	DC 29.4V 1A
DC LINE:	Unshielded, Non-detachable, 1.5m.

3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on X axis for radiated emission.

Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	-	-	-	√	Powered By Fully Battery
B	√	√	√	-	Powered By Adapter

Where **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	39	FHSS	GFSK	DH5

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH5

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	Hopping	FHSS	GFSK	DH5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	26deg. C, 50%RH	DC 29.4V from Adapter	Arnold
RE≥1G	26deg. C, 50%RH	DC 29.4V from Adapter	Arnold
PLC	25deg. C, 55%RH	DC 29.4V from Adapter	Sen He
APCM	20deg. C, 55%RH	DC 25.2V from Battery	Sen He



Test Report No.: RF180321N025

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. Section 15.247
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit without any other necessary accessory or support units.

4 TEST TYPES AND RESULTS

4.1. CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,18	Apr. 04,19
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 03,18	Mar. 02,19
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 05,18	Apr. 04,19
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 17,18	Jan. 16,19
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 553.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

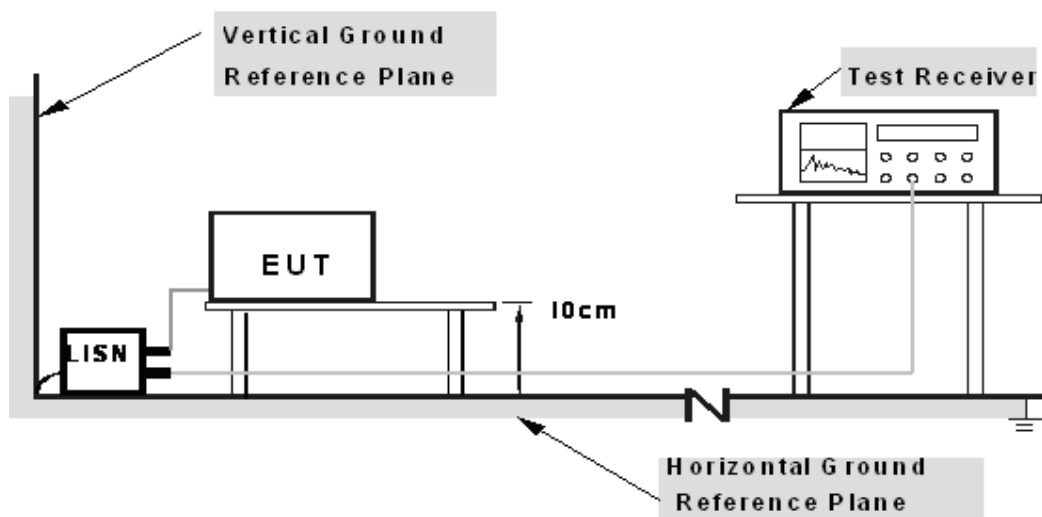

**Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA:

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17925	10.22	46.06	29.00	56.28	39.22	64.52	54.52	-8.24	-15.30
2	3.76509	10.22	38.48	25.23	48.70	35.45	56.00	46.00	-7.30	-10.55
3	4.62750	10.22	31.86	19.88	42.08	30.10	56.00	46.00	-13.92	-15.90
4	6.06075	10.22	32.65	21.62	42.87	31.84	60.00	50.00	-17.13	-18.16
5	19.26825	10.26	37.10	26.16	47.36	36.42	60.00	50.00	-12.64	-13.58
6	20.34150	10.26	41.84	32.31	52.10	42.57	60.00	50.00	-7.90	-7.43


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

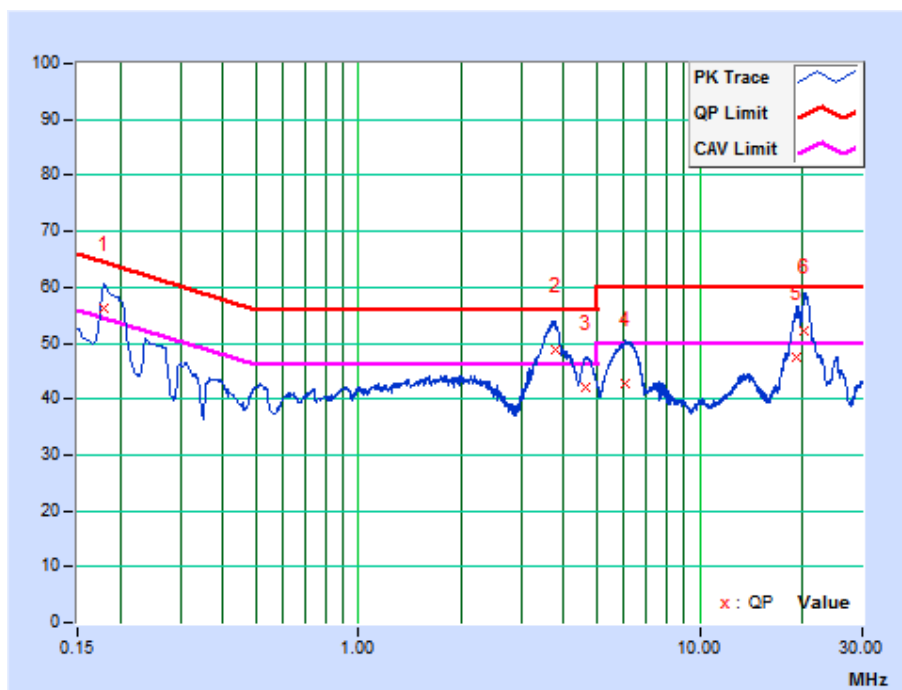

PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17933	10.01	47.34	29.04	57.35	39.05	64.52	54.52	-7.17	-15.47
2	0.24488	10.01	38.34	23.70	48.35	33.71	61.93	51.93	-13.58	-18.22
3	0.30812	10.01	34.56	19.68	44.57	29.69	60.02	50.02	-15.45	-20.33
4	3.77700	10.02	37.20	20.87	47.22	30.89	56.00	46.00	-8.78	-15.11
5	21.06600	10.15	37.52	29.29	47.67	39.44	60.00	50.00	-12.33	-10.56
6	25.14075	10.17	29.04	16.01	39.21	26.18	60.00	50.00	-20.79	-23.82

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

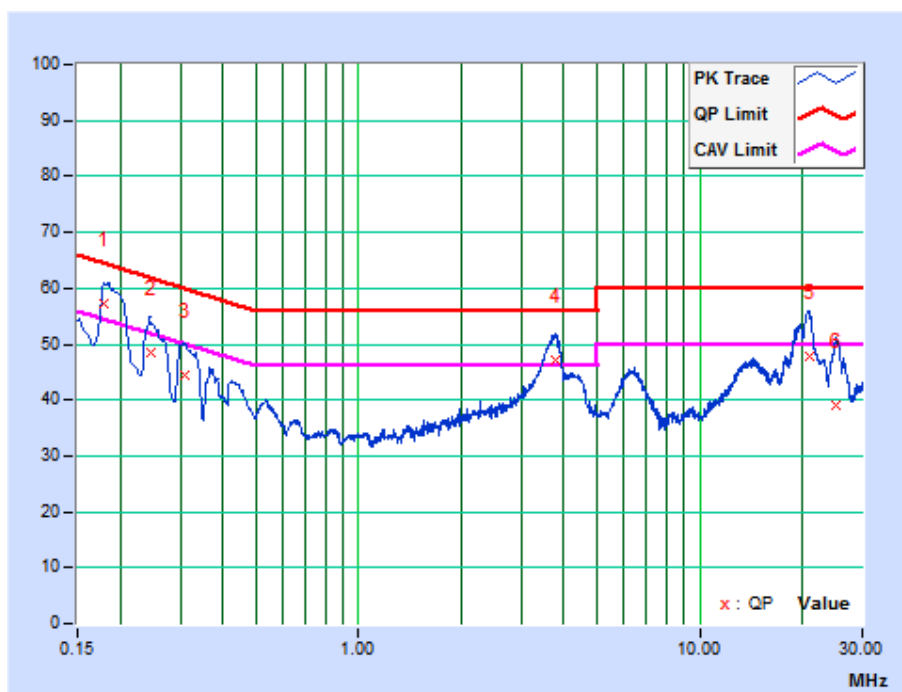

4.2. RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 11,18	Mar. 10,19
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 04,17	Nov. 03,18
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 31,17	May 30,18
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Apr. 05,18	Apr. 04,19
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	Jul. 28, 17	Jul. 27, 18
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 19,17	May 18,18
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 15,18	Mar. 14,19
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 06,18	Mar. 05,19
Test Software	ADT	ADT_Radiate d_V7.6.15.9.2	N/A	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Mar. 06,18	Mar. 05,19
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 08,17	Nov. 07,18
Test Software	ADT	ADT_Radiate d_V7.6.15.9.2	N/A	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug. 10,17	Aug. 09,18

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. Bluetooth duty factor correction is not correct as it is based on 79 channels, worst case would be with AFH enabled and device using the minimum of 20 channels. Channel hop rate = 800 hops/second (AFH Mode), Adjusted channel hop rate for DH5 mode = 133.33 hops/second, Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.5 \text{ ms}$, Time to cycle through all channels = $7.5 \times 20 \text{ channels} = 150 \text{ ms}$, Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$, Worst case dwell time = 7.5 ms, Duty cycle connection factor = $20\log_{10}(7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$. Average value = peak reading + 20log(duty cycle).
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

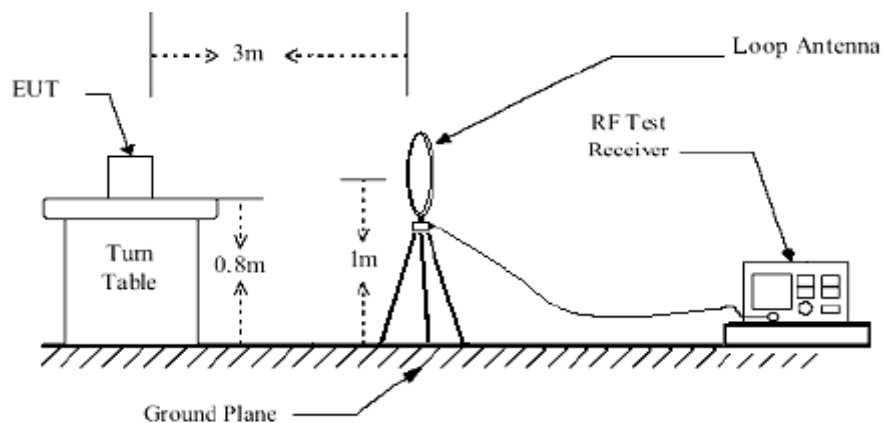


Below 1GHz test setup

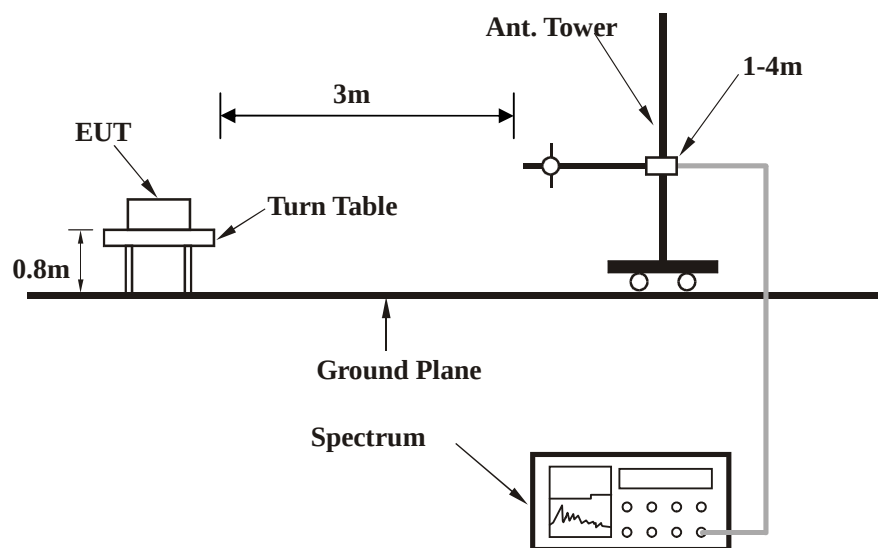

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

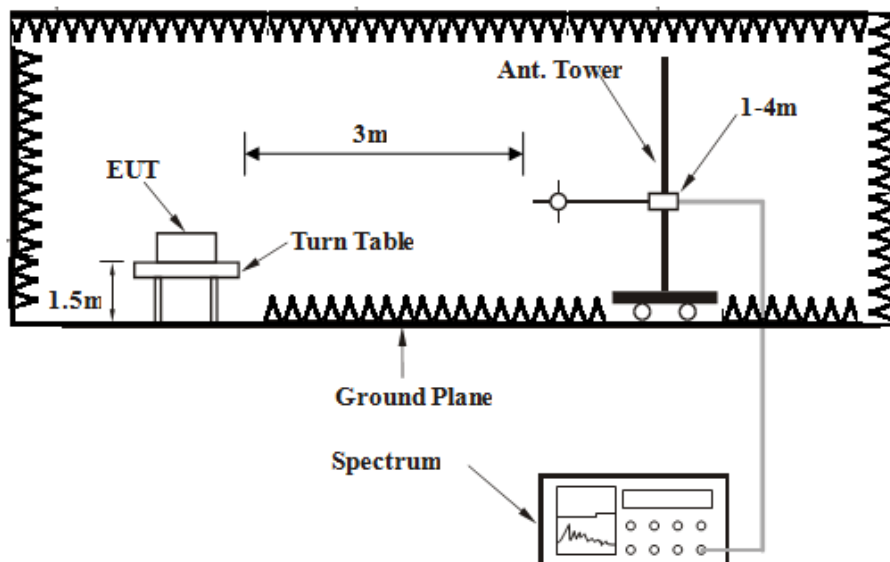

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


GFSK DH5

CHANNEL	Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	30.00	26.25 QP	40.00	-13.75	2.00 H	216	31.72	-5.47
2	468.37	28.20 QP	46.00	-17.80	2.00 H	29	29.38	-1.18
3	564.74	31.51 QP	46.00	-14.49	2.00 H	309	29.22	2.29
4	658.01	32.46 QP	46.00	-13.54	2.00 H	251	29.38	3.08
5	794.81	34.68 QP	46.00	-11.32	2.00 H	174	29.42	5.26
6	875.64	36.90 QP	46.00	-9.10	2.00 H	48	31.19	5.71

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

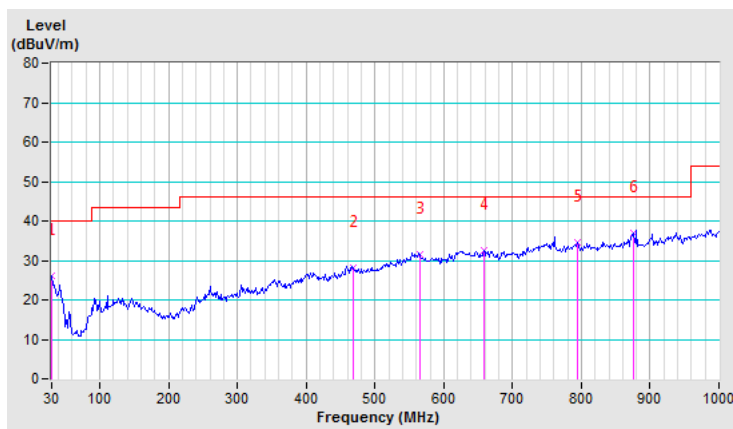


CHANNEL	Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	30.00	27.51 QP	40.00	-12.49	1.00 V	124	32.98	-5.47
2	469.92	28.55 QP	46.00	-17.45	1.00 V	264	29.71	-1.16
3	563.19	31.48 QP	46.00	-14.52	1.00 V	57	29.05	2.43
4	698.43	32.65 QP	46.00	-13.35	1.00 V	25	29.58	3.07
5	752.84	35.60 QP	46.00	-10.40	1.00 V	128	30.64	4.96
6	875.64	39.62 QP	46.00	-6.38	1.00 V	49	33.91	5.71

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

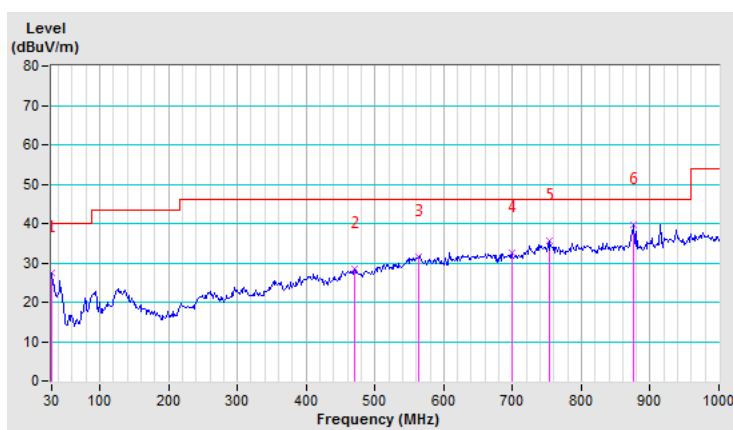

ABOVE 1GHz DATA

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.52 PK	74.00	-19.48	1.45 H	109	51.42	3.10
2	2390.00	32.02 AV	54.00	-21.98	1.45 H	109	28.92	3.10
3	*2402.00	95.53 PK			1.34 H	117	92.39	3.14
4	*2402.00	73.03 AV			1.34 H	117	69.89	3.14
5	4804.00	57.99 PK	74.00	-16.01	1.69 H	237	51.93	6.06
6	4804.00	35.49 AV	54.00	-18.51	1.69 H	237	29.43	6.06
7	#7206.00	55.07 PK	74.00	-18.93	1.17 H	16	43.65	11.42
8	#7206.00	32.57 AV	54.00	-21.43	1.17 H	16	21.15	11.42
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.69 PK	74.00	-26.31	1.00 V	280	44.59	3.10
2	2390.00	25.19 AV	54.00	-28.81	1.00 V	280	22.09	3.10
3	*2402.00	87.32 PK			1.00 V	280	84.18	3.14
4	*2402.00	64.82 AV			1.00 V	280	61.68	3.14
5	4804.00	53.27 PK	74.00	-20.73	1.52 V	261	47.21	6.06
6	4804.00	30.77 AV	54.00	-23.23	1.52 V	261	24.71	6.06
7	#7206.00	54.01 PK	74.00	-19.99	1.42 V	301	42.59	11.42
8	#7206.00	31.51 AV	54.00	-22.49	1.42 V	301	20.09	11.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	96.52 PK			2.68 H	119	93.24	3.28
2	*2441.00	74.02 AV			2.68 H	119	70.74	3.28
3	4882.00	56.18 PK	74.00	-17.82	1.00 H	178	49.96	6.22
4	4882.00	33.68 AV	54.00	-20.32	1.00 H	178	27.46	6.22
5	7323.00	53.57 PK	74.00	-20.43	1.34 H	189	41.82	11.75
6	7323.00	31.07 AV	54.00	-22.93	1.34 H	189	19.32	11.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	88.73 PK			3.18 V	203	85.45	3.28
2	*2441.00	66.23 AV			3.18 V	203	62.95	3.28
3	4882.00	53.85 PK	74.00	-20.15	1.00 V	267	47.63	6.22
4	4882.00	31.35 AV	54.00	-22.65	1.00 V	267	25.13	6.22
5	7323.00	53.90 PK	74.00	-20.10	1.56 V	314	42.15	11.75
6	7323.00	31.40 AV	54.00	-22.60	1.56 V	314	19.65	11.75

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	92.61 PK			1.00 H	128	89.18	3.43
2	*2480.00	70.11 AV			1.00 H	128	66.68	3.43
3	2483.50	52.33 PK	74.00	-21.67	1.16 H	226	48.89	3.44
4	2483.50	29.83 AV	54.00	-24.17	1.16 H	226	26.39	3.44
5	4960.00	57.25 PK	74.00	-16.75	1.00 H	190	50.87	6.38
6	4960.00	34.75 AV	54.00	-19.25	1.00 H	190	28.37	6.38
7	7440.00	57.62 PK	74.00	-16.38	1.46 H	174	45.54	12.08
8	7440.00	35.12 AV	54.00	-18.88	1.46 H	174	23.04	12.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	83.55 PK			1.67 V	247	80.12	3.43
2	*2480.00	61.05 AV			1.67 V	247	57.62	3.43
3	2483.50	47.76 PK	74.00	-26.24	1.47 V	247	44.32	3.44
4	2483.50	25.26 AV	54.00	-28.74	1.47 V	247	21.82	3.44
5	4960.00	57.79 PK	74.00	-16.21	1.67 V	0	51.41	6.38
6	4960.00	35.29 AV	54.00	-18.71	1.67 V	0	28.91	6.38
7	7440.00	57.32 PK	74.00	-16.68	1.00 V	310	45.24	12.08
8	7440.00	34.82 AV	54.00	-19.18	1.00 V	310	22.74	12.08

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

BT_π/4 DQPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.91 PK	74.00	-19.09	1.37 H	176	51.81	3.10
2	2390.00	32.41 AV	54.00	-21.59	1.37 H	176	29.31	3.10
3	*2402.00	94.14 PK			1.56 H	116	91.00	3.14
4	*2402.00	73.64 AV			1.56 H	116	70.50	3.14
5	4804.00	55.23 PK	74.00	-18.77	1.23 H	197	49.17	6.06
6	4804.00	32.73 AV	54.00	-21.27	1.23 H	197	26.67	6.06
7	#7206.00	57.53 PK	74.00	-16.47	1.00 H	264	46.11	11.42
8	#7206.00	35.03 AV	54.00	-18.97	1.00 H	264	23.61	11.42
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.87 PK	74.00	-23.13	1.00 V	217	47.77	3.10
2	2390.00	28.37 AV	54.00	-25.63	1.00 V	217	25.27	3.10
3	*2402.00	87.31 PK			1.00 V	287	84.17	3.14
4	*2402.00	64.81 AV			1.00 V	287	61.67	3.14
5	4804.00	52.30 PK	74.00	-21.70	1.00 V	45	46.24	6.06
6	4804.00	29.80 AV	54.00	-24.20	1.00 V	45	23.74	6.06
7	#7206.00	57.14 PK	74.00	-16.86	1.00 V	241	45.72	11.42
8	#7206.00	34.64 AV	54.00	-19.36	1.00 V	241	23.22	11.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	97.23 PK			2.75 H	118	93.95	3.28
2	*2441.00	74.73 AV			2.75 H	118	71.45	3.28
3	4882.00	55.80 PK	74.00	-18.20	1.25 H	176	49.58	6.22
4	4882.00	33.30 AV	54.00	-20.70	1.25 H	176	27.08	6.22
5	7323.00	56.59 PK	74.00	-17.41	1.00 H	229	44.84	11.75
6	7323.00	34.09 AV	54.00	-19.91	1.00 H	229	22.34	11.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	89.36 PK			2.28 V	202	86.08	3.28
2	*2441.00	66.86 AV			2.28 V	202	63.58	3.28
3	4882.00	53.98 PK	74.00	-20.02	1.00 V	270	47.76	6.22
4	4882.00	31.48 AV	54.00	-22.52	1.00 V	270	25.26	6.22
5	7323.00	56.85 PK	74.00	-17.15	1.00 V	259	45.10	11.75
6	7323.00	31.48 AV	54.00	-22.52	1.00 V	259	19.73	11.75

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	94.00 PK			1.00 H	131	90.57	3.43
2	*2480.00	71.50 AV			1.00 H	131	68.07	3.43
3	2483.50	53.79 PK	74.00	-20.21	1.00 H	247	50.35	3.44
4	2483.50	31.29 AV	54.00	-22.71	1.00 H	247	27.85	3.44
5	4960.00	57.24 PK	74.00	-16.76	1.17 H	188	50.86	6.38
6	4960.00	34.74 AV	54.00	-19.26	1.17 H	188	28.36	6.38
7	7440.00	57.44 PK	74.00	-16.56	1.00 H	219	45.36	12.08
8	7440.00	34.94 AV	54.00	-19.06	1.00 H	219	22.86	12.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	83.69 PK			1.00 V	245	80.26	3.43
2	*2480.00	61.19 AV			1.00 V	245	57.76	3.43
3	2483.50	48.21 PK	74.00	-25.79	1.20 V	117	44.77	3.44
4	2483.50	25.71 AV	54.00	-28.29	1.20 V	117	22.27	3.44
5	4960.00	53.97 PK	74.00	-20.03	1.00 V	203	47.59	6.38
6	4960.00	31.47 AV	54.00	-22.53	1.00 V	203	25.09	6.38
7	7440.00	57.00 PK	74.00	-17.00	1.24 V	171	44.92	12.08
8	7440.00	34.50 AV	54.00	-19.50	1.24 V	171	22.42	12.08

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST SETUP

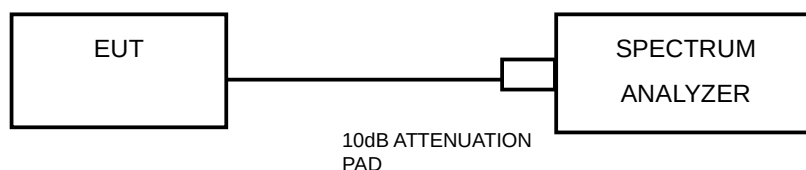

4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 19,17	May 18,18
Power Sensor	Keysight	U2021XA	MY55060018	May 19,17	May 18,18
Power Meter	Anritsu	ML2495A	1139001	Nov. 04,17	Nov. 03,18
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 21, 17	Oct.20, 18
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,17	Sep. 04,18
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 08,17	Nov. 07,18
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,17	Nov. 03,18
Signal Generator	Agilent	N5183A	MY50140980	Jan. 02,18	Jan. 01,19
Agile Signal Generator	Agilent	8645A	Agilent	Sep.01, 17	Aug.31, 18
Spectrum Analyzer	Keysight	N9020A	MY55400499	Apr. 10,18	Apr. 09,19
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jan. 02,18	Jan. 01,19
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug.10, 17	Aug.09, 18
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.



4.3.5 DEVIATION FROM TEST STANDARD

No deviation.



4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

GFSK

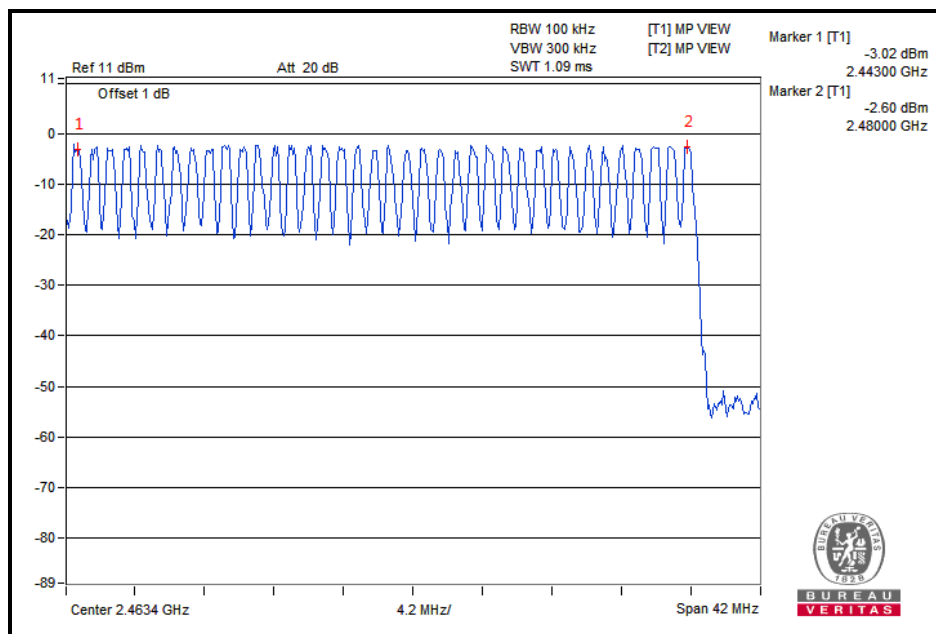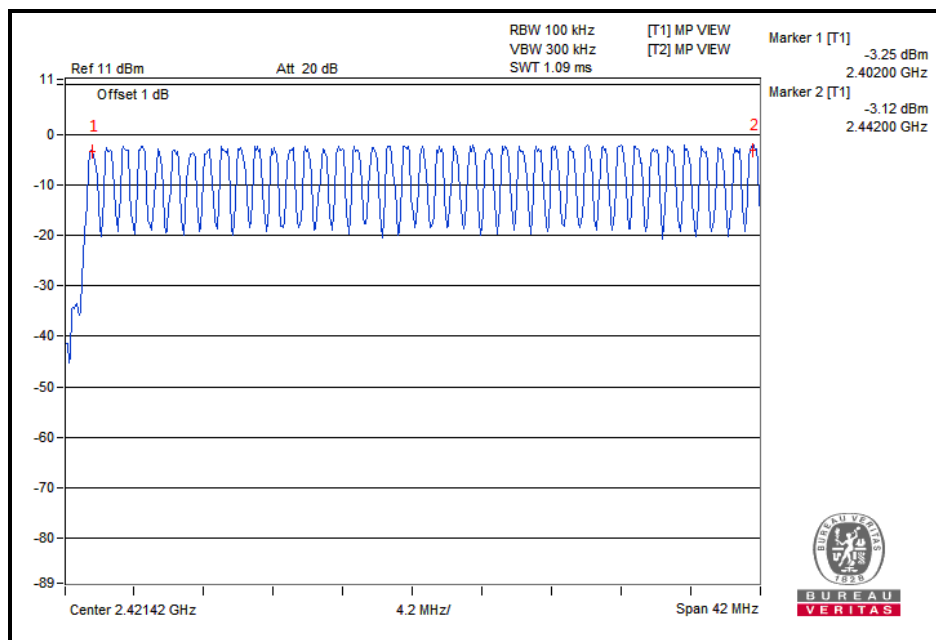

$\pi/4$ DQPSK

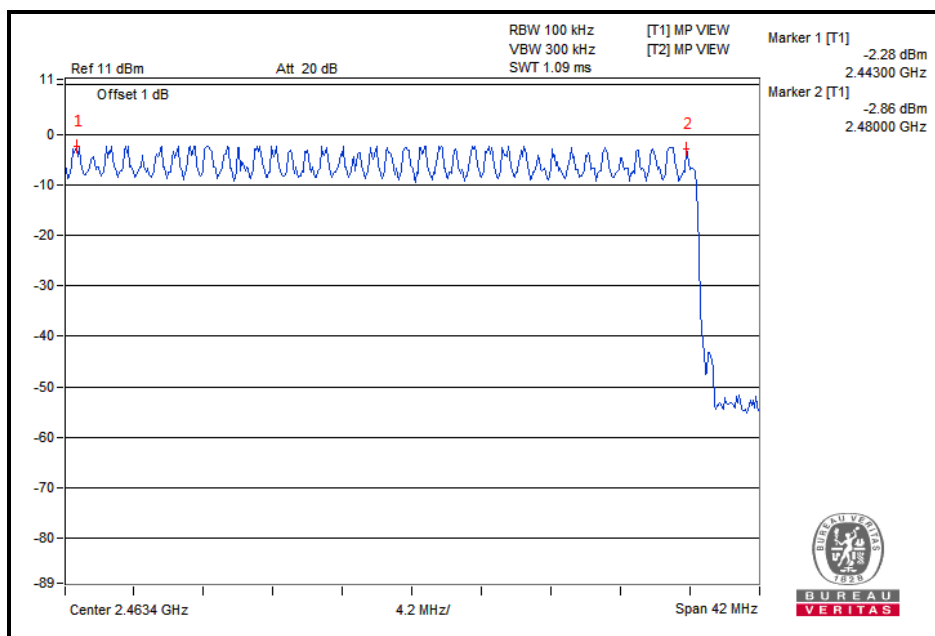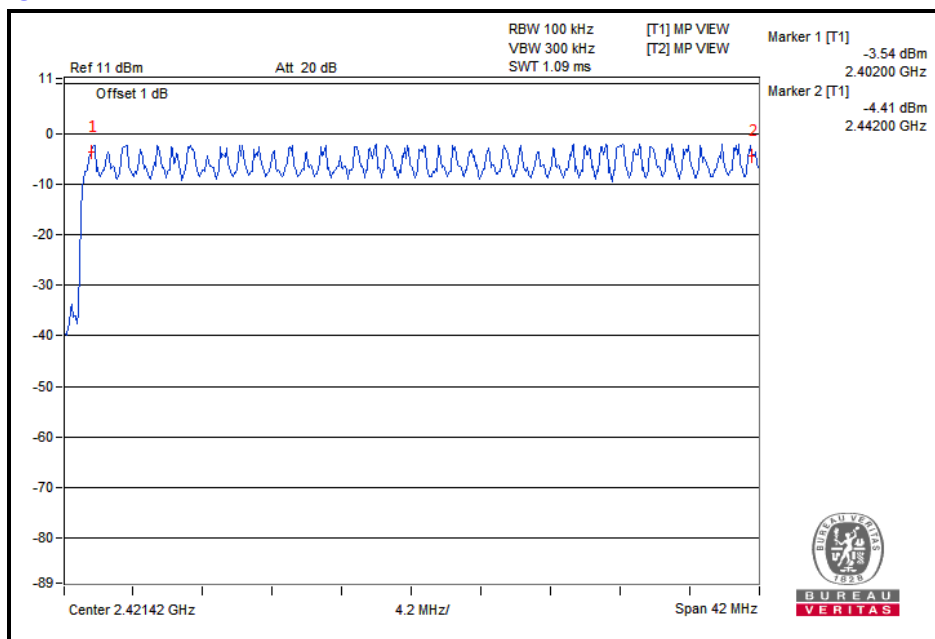


4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST SETUP

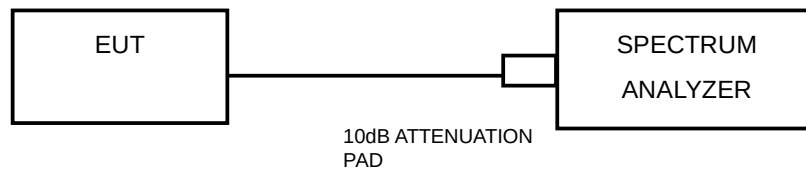

4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 TEST RESULTS

GFSK


Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
DH1	79	31.6	5	51	322.32	0.444	143.11	400	PASS
DH3	79	31.6	5	28	176.96	1.680	297.29	400	PASS
DH5	79	31.6	5	16	101.12	3.040	307.40	400	PASS

$\pi/4$ DQPSK


Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
2DH1	79	31.6	5	50	316.00	0.426	134.62	400	PASS
2DH3	79	31.6	5	25	158.00	1.690	267.02	400	PASS
2DH5	79	31.6	5	17	107.44	2.960	318.02	400	PASS

NOTE: Test plots of the transmitting time slot are shown on next page.

GFSK

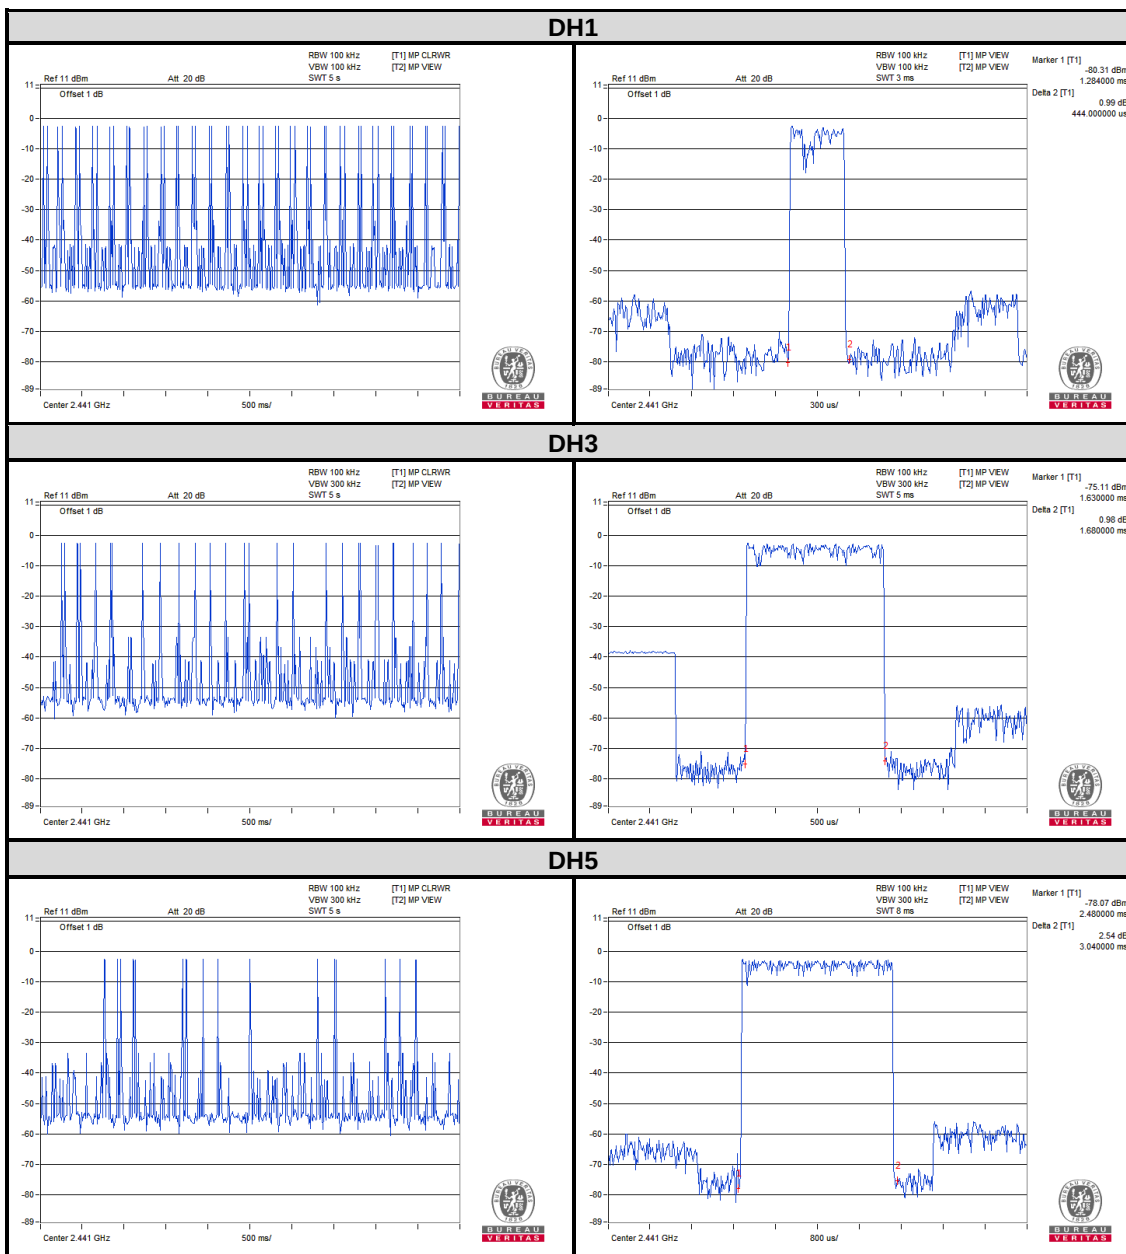

Π/4 DQPSK

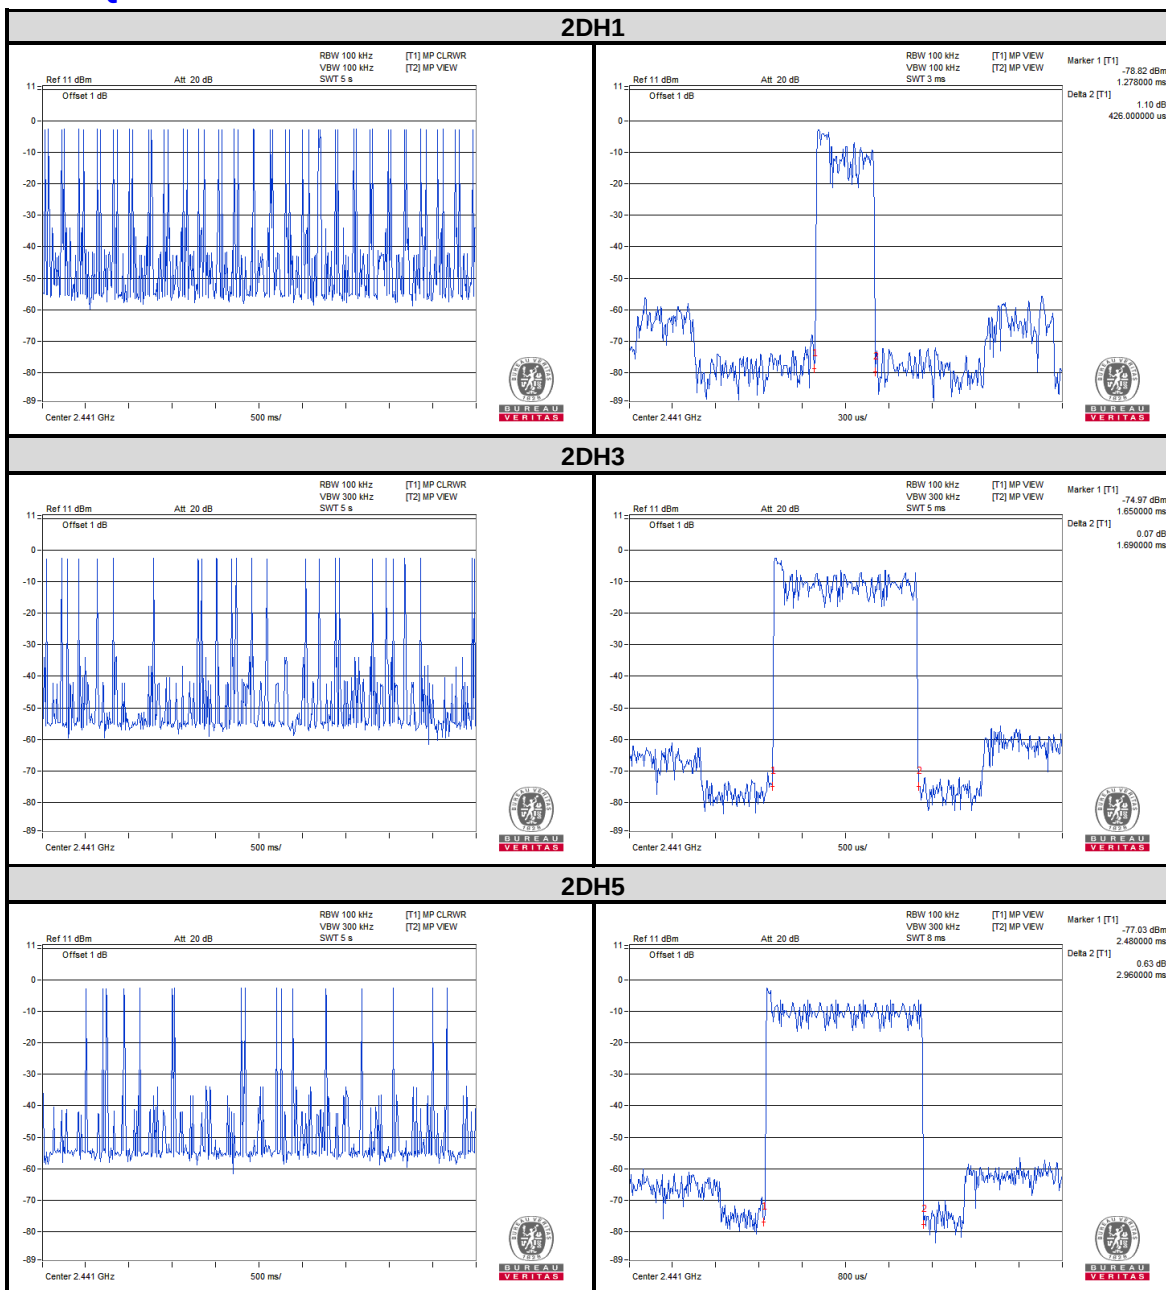


4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST SETUP

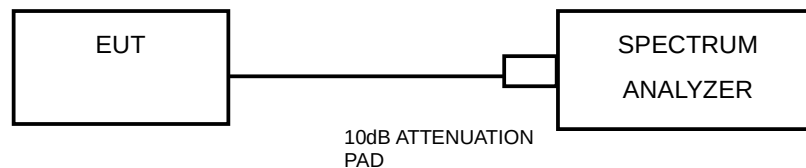

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS


GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.951
39	2441	0.953
78	2480	0.956


CH 0

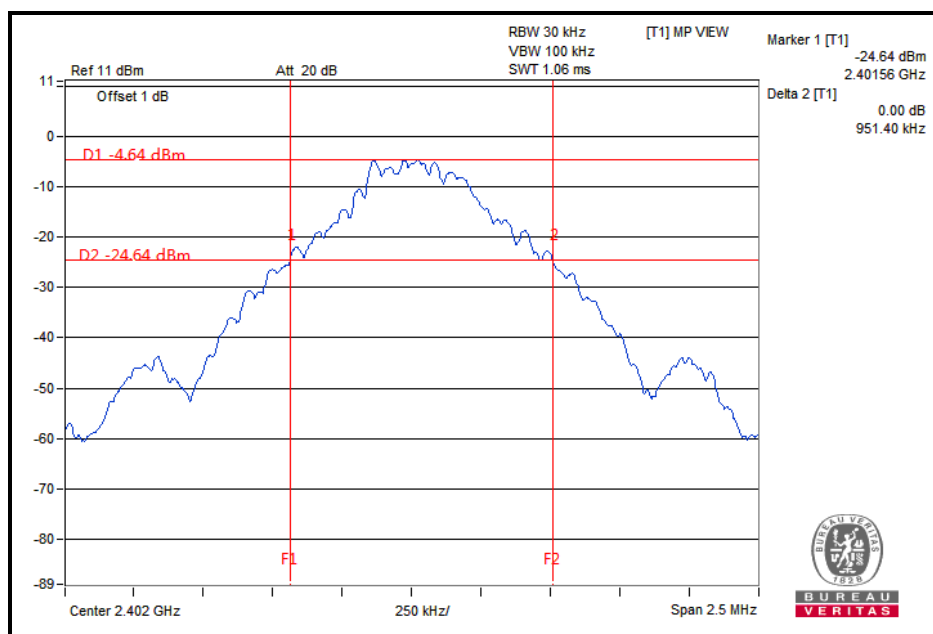

CH 39

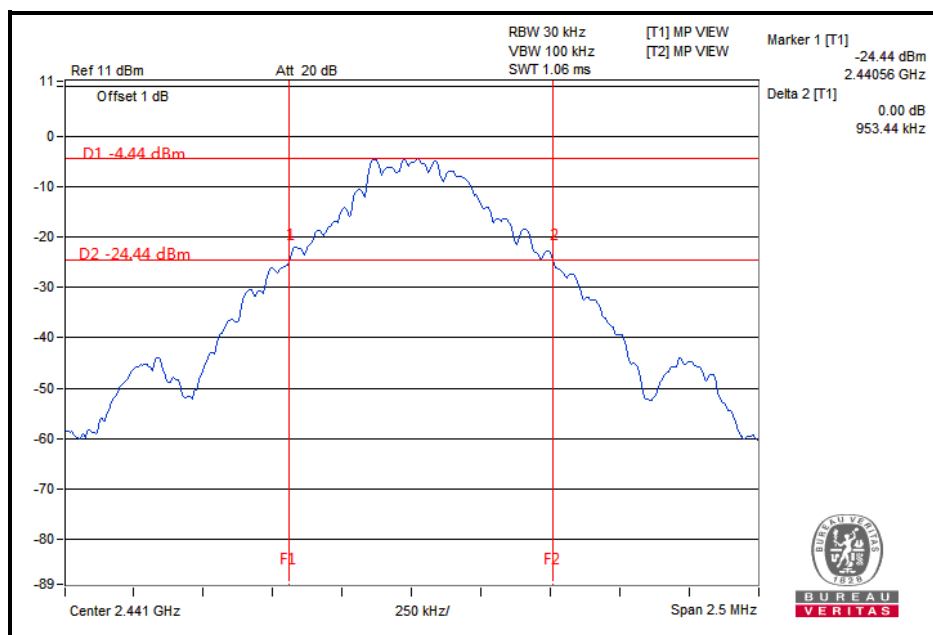


CH 78

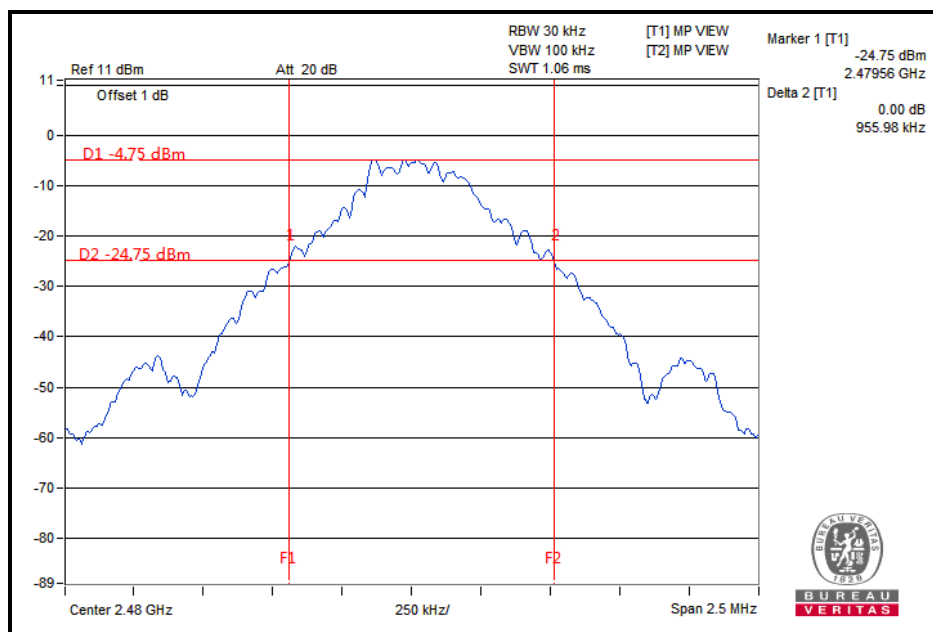


Π/4 DQPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.29
39	2441	1.29
78	2480	1.29


CH 0

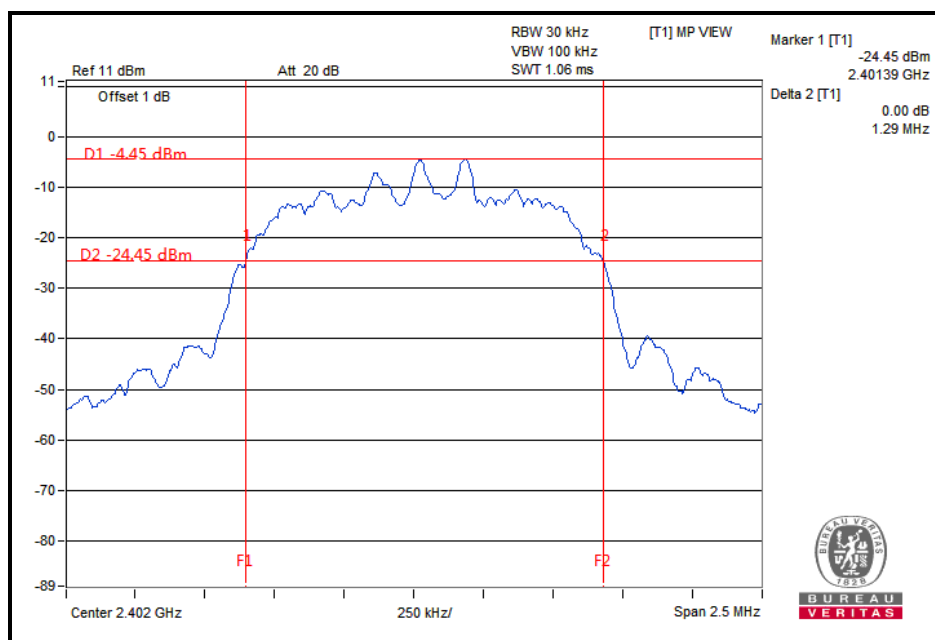

CH 39

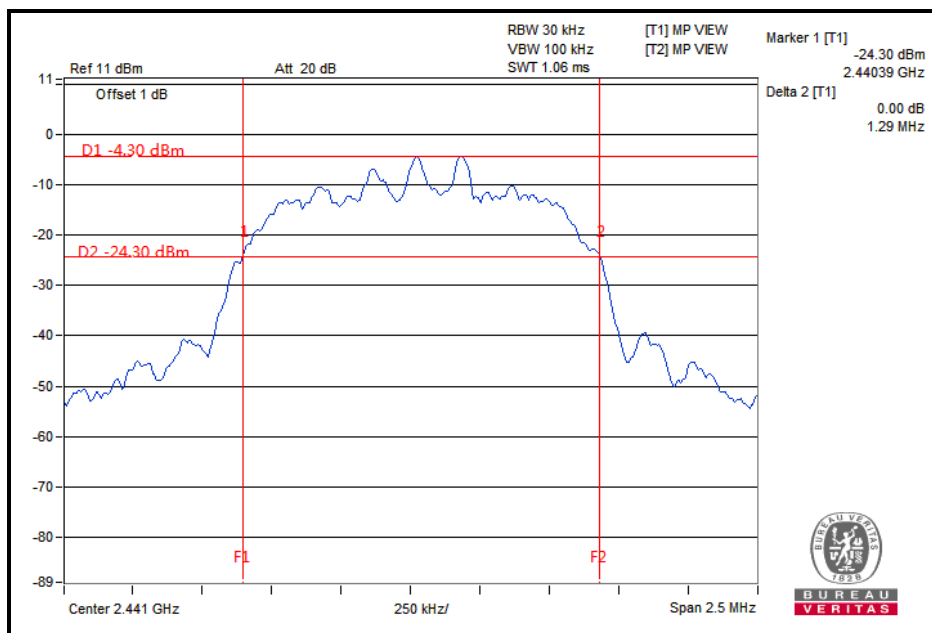

CH 78

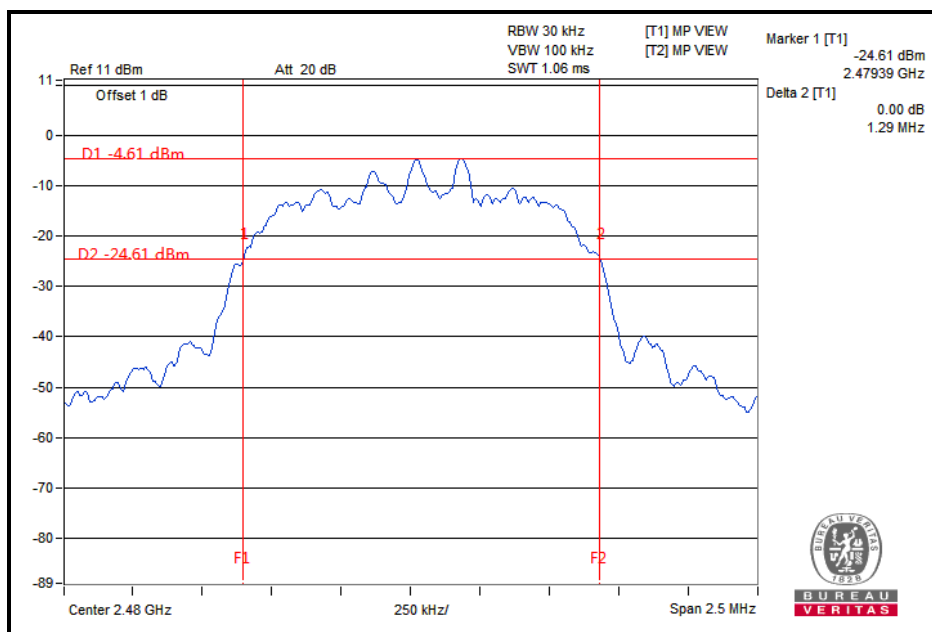


4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST SETUP

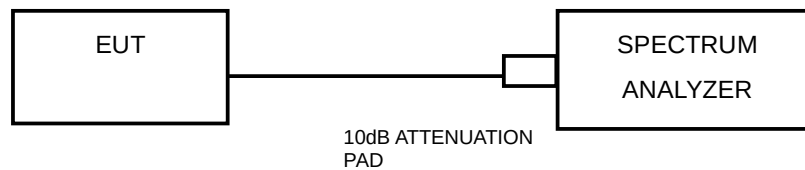

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.


4.6.6 TEST RESULTS

GFSK


CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.01	0.951	0.634	PASS
39	2441	1.01	0.953	0.635	PASS
78	2480	1.00	0.956	0.637	PASS

NOTE: The minimum limit is two-third 20dB bandwidth.


CH 0

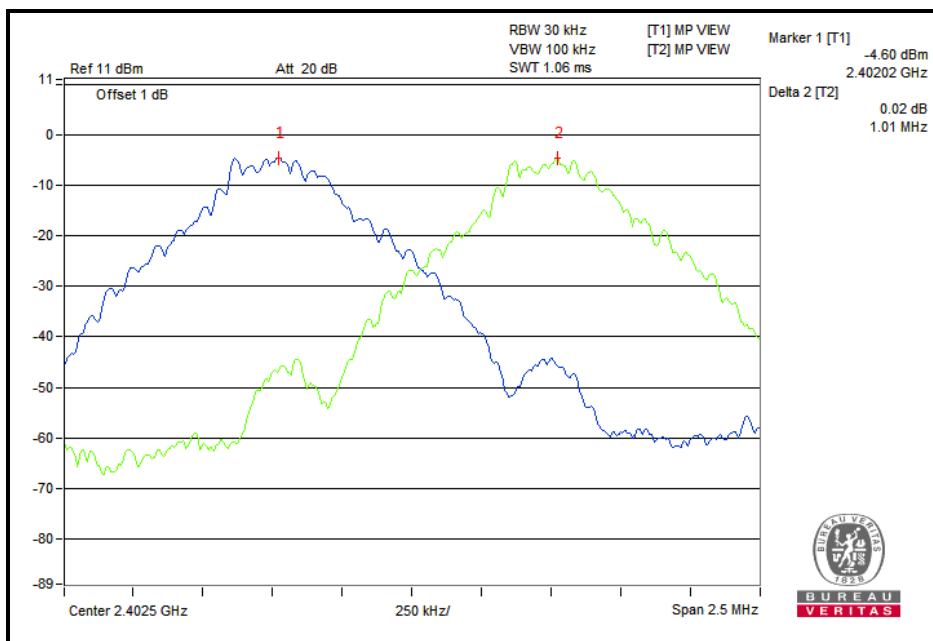

CH 39

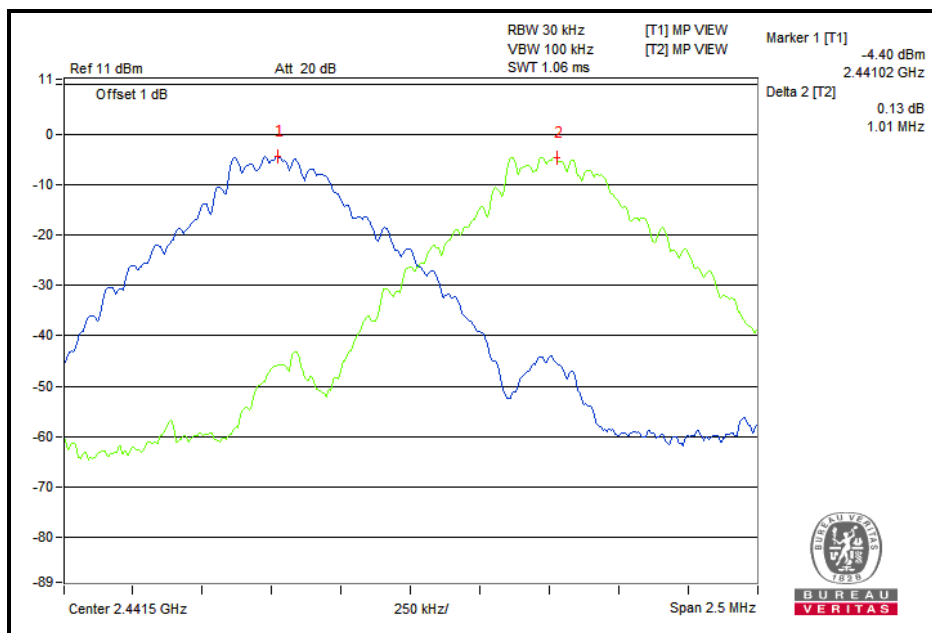

CH 78

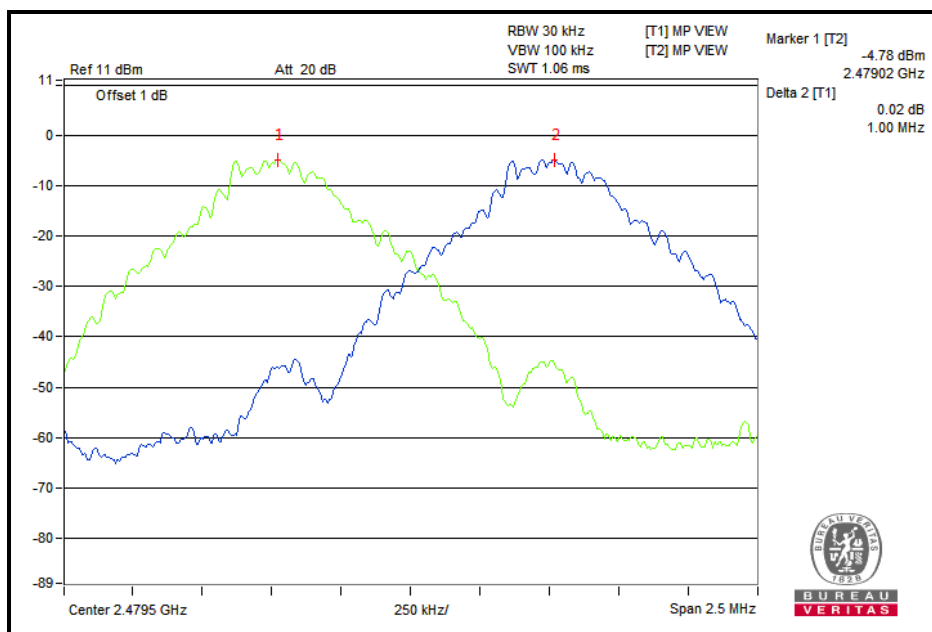


II/4 DQPSK


CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.00	1.29	0.86	PASS
39	2441	1.00	1.29	0.86	PASS
78	2480	1.01	1.29	0.86	PASS

NOTE: The minimum limit is two-third 20dB bandwidth.


CH 0

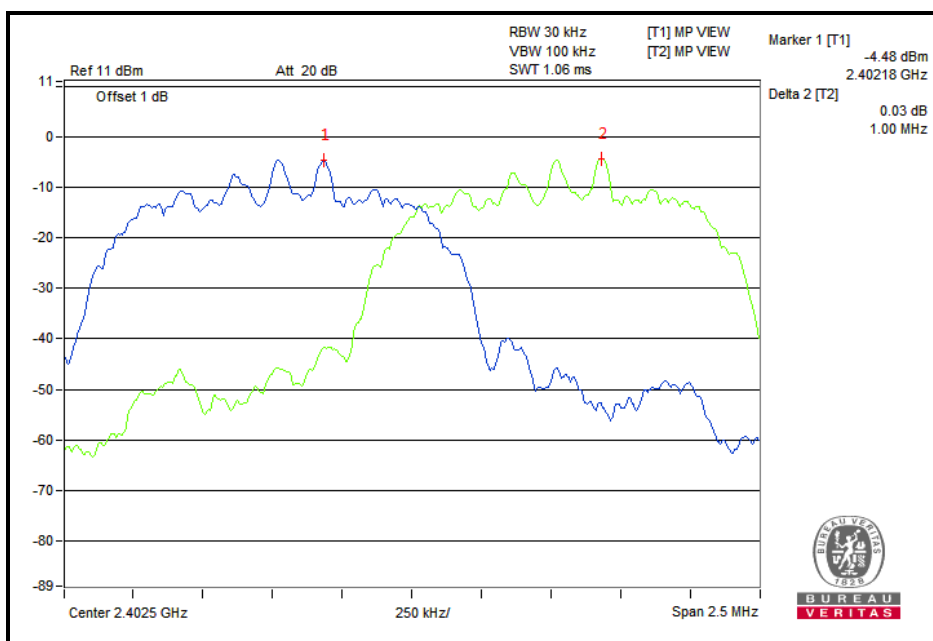

CH 39

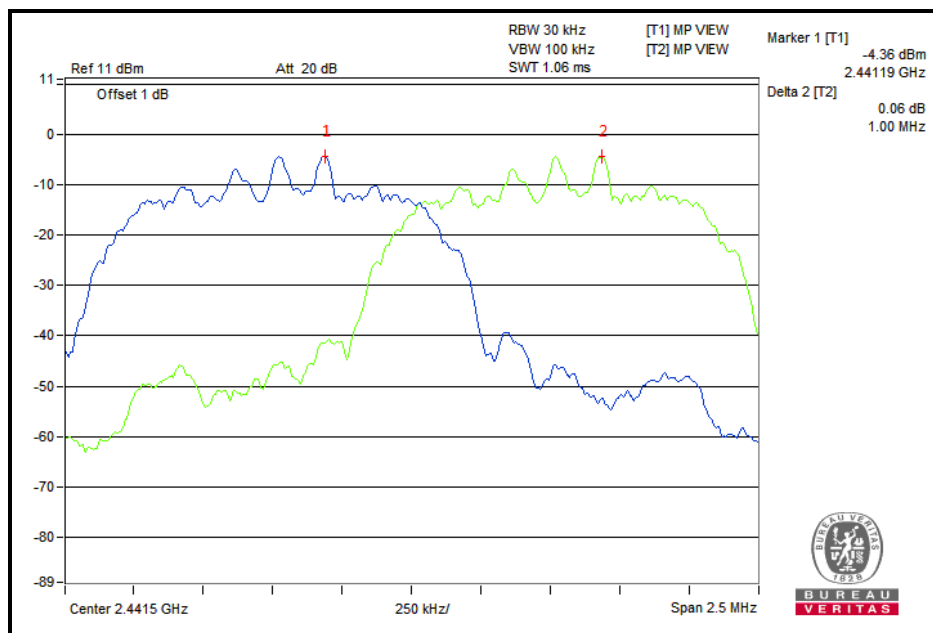

CH 78

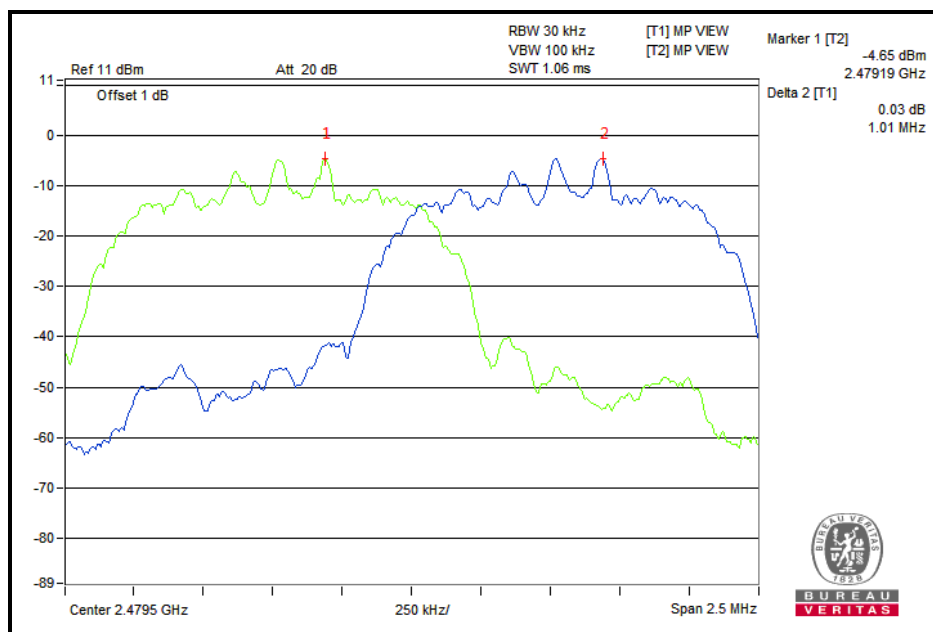


4.7 CONDUCTED OUTPUT POWER

4.7.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

4.7.2 TEST SETUP

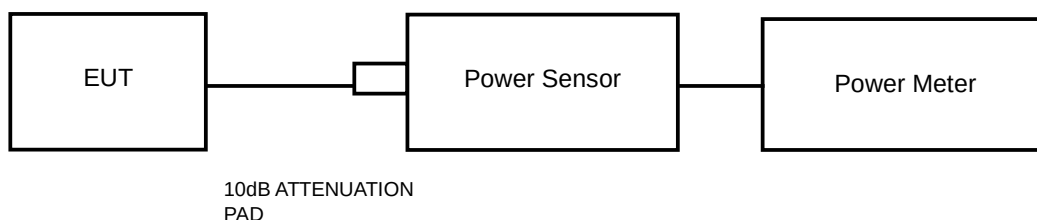

4.7.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.7.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.7.5 DEVIATION FROM TEST STANDARD

No deviation.

4.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 TEST RESULTS

MAXIMUM PEAK OUTPUT POWER

GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	-0.92	0.8091	125	PASS
39	2441	-0.91	0.8110	125	PASS
78	2480	-0.89	0.8147	125	PASS

Π/4 DQPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	0.24	1.057	125	PASS
39	2441	0.21	1.050	125	PASS
78	2480	0.18	1.042	125	PASS

8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	0.21	1.050	125	PASS
39	2441	0.19	1.045	125	PASS
78	2480	0.15	1.035	125	PASS

Remark: Due 8DPSK power less than Π/4 DQPSK, so test Π/4 DQPSK in all other item only

AVERAGE OUTPUT POWER(FOR REFERENCE)

GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	-2.24	0.597
39	2441	-2.22	0.600
78	2480	-2.18	0.605

II/4 DQPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	-2.61	0.548
39	2441	-2.73	0.533
78	2480	-2.76	0.530

8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	-2.87	0.516
39	2441	-2.94	0.508
78	2480	-2.79	0.526

4.8 OUT OF BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. of Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.


4.8.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

GFSK

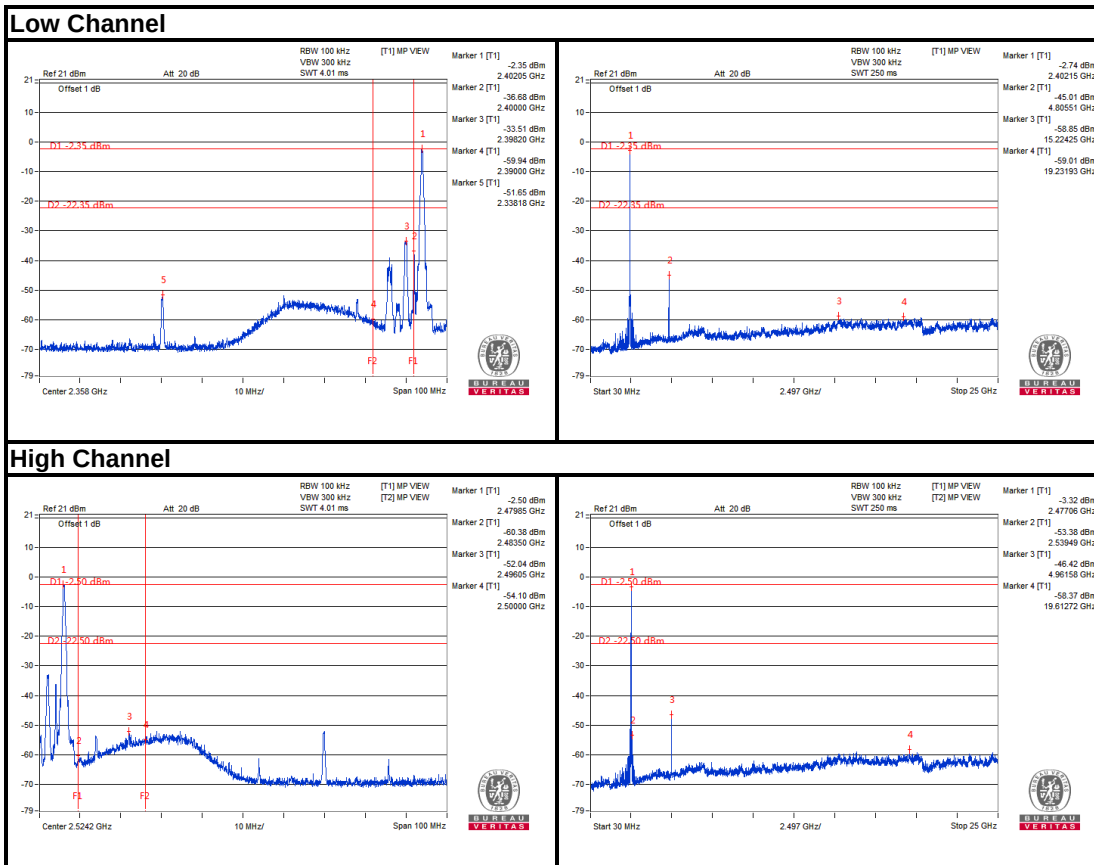


II/4 DQPSK


Low Channel

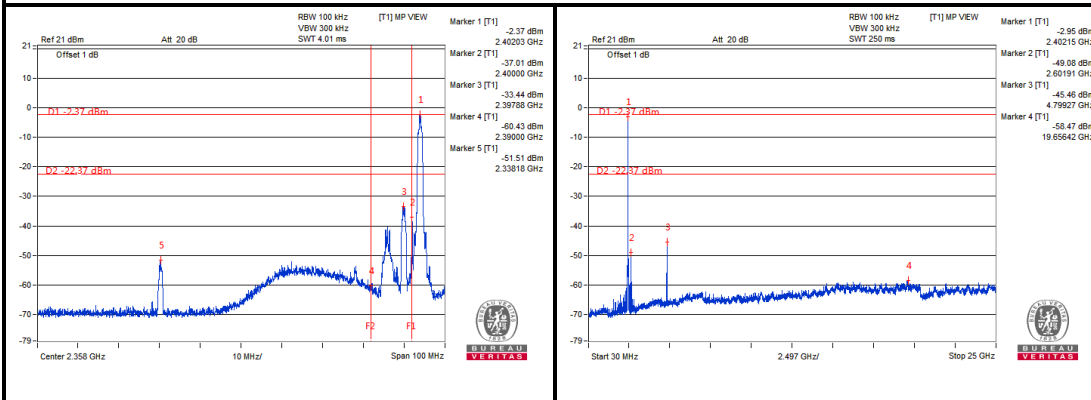

High Channel

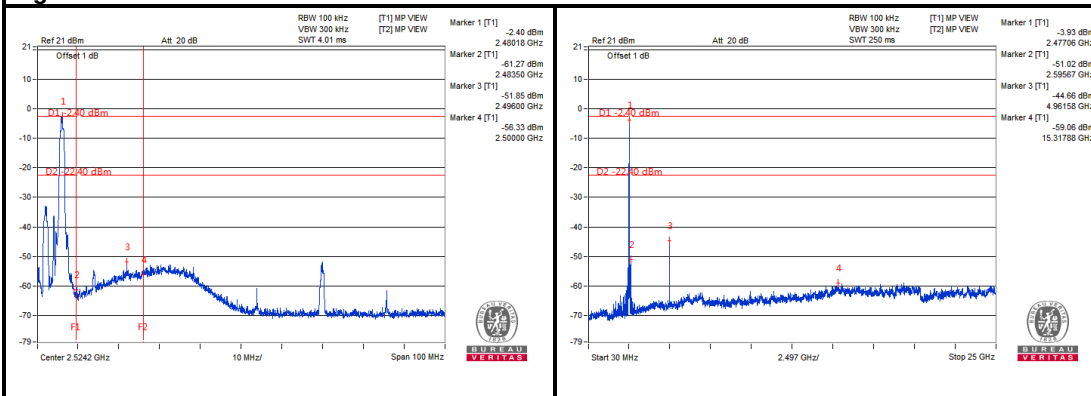


GFSK

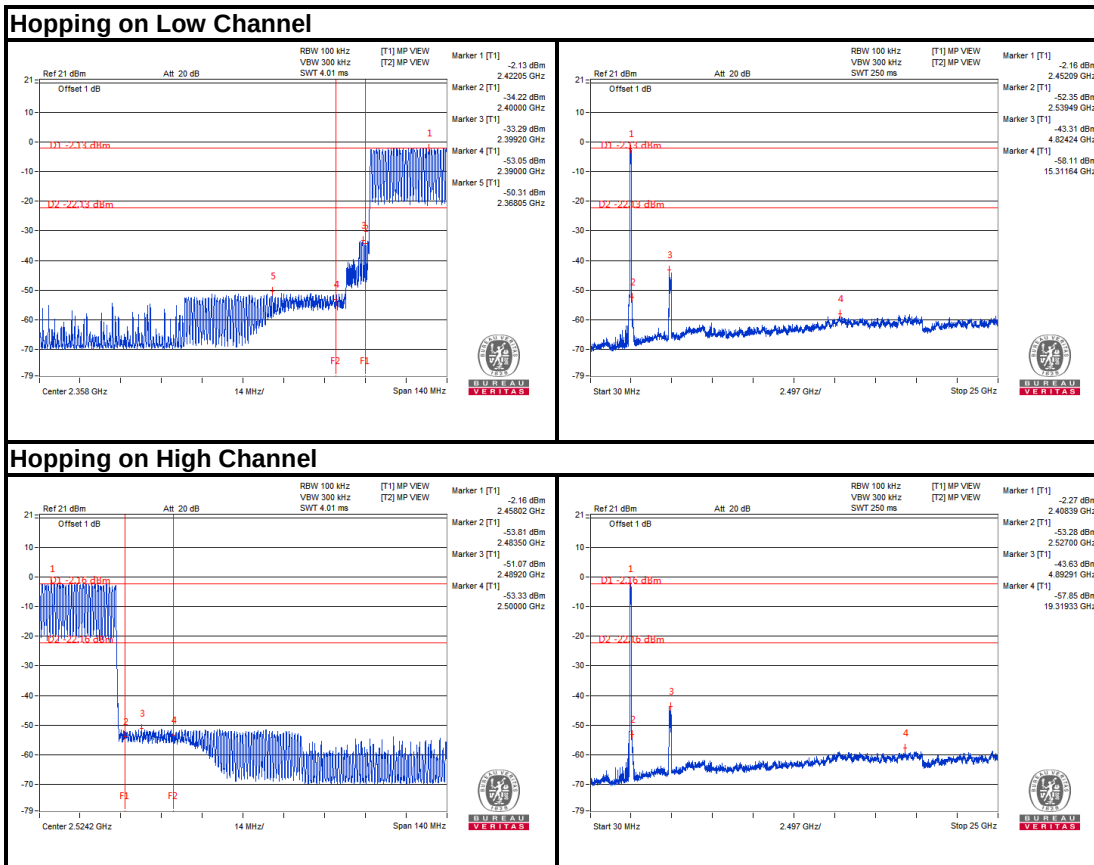


II/4 DQPSK

Hopping on Low Channel

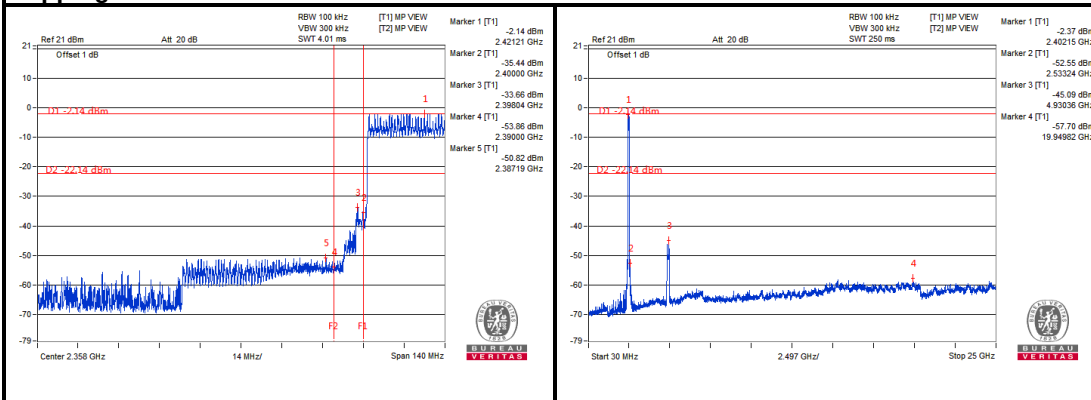

Hopping on High Channel

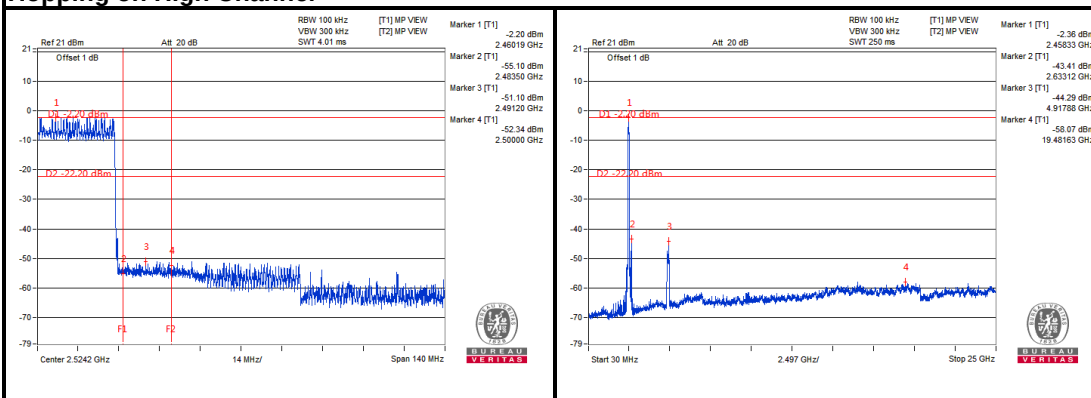



Test Report No.: RF180321N025

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF180321N025

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---