



RF TEST REPORT

Applicant Huawei Technologies Co., Ltd.
FCC ID QISKSA-LX3
Product Smart Phone
Brand HONOR
Model KSA-LX3
Report No. R1903H0046-R2
Issue Date April 12, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 24E (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility.....	4
1.3. Testing Location	5
2. General Description of Equipment under Test.....	6
3. Applied Standards.....	8
4. Test Configuration.....	9
5. Test Case Results.....	11
5.1. RF Power Output.....	11
5.2. Effective Isotropic Radiated Power	16
5.3. Occupied Bandwidth	20
5.4. Band Edge Compliance.....	31
5.5. Peak-to-Average Power Ratio (PAPR)	42
5.6. Frequency Stability	45
5.7. Spurious Emissions at Antenna Terminals	51
5.8. Radiates Spurious Emission	64
6. Main Test Instruments	70
ANNEX A: Product Change Description	71

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	Refer to the Original
2	Effective Isotropic Radiated power	24.232(c)	Refer to the Original
3	Occupied Bandwidth	2.1049	Refer to the Original
4	Band Edge Compliance	2.1051 /24.238(a)	Refer to the Original
5	Peak-to-Average Power Ratio	24.232/KDB 971168 D01(5.7)	Refer to the Original
6	Frequency Stability	2.1055 / 24.235	Refer to the Original
7	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	Refer to the Original
8	Radiates Spurious Emission	2.1053 / 24.238(a)	Refer to the Original
Date of Testing: March 17, 2019 ~ March 29, 2019			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			

KSA-LX3 (Report No:R1903H0046-R2) is a variant model of AMN-LX3 (Report No: R1903H0043-R2). Test values duplicated from Original for variant. There is no test for variant in this report. The detailed product change description please refers to the ANNEX A.

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	Huawei Technologies Co., Ltd.
Applicant address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen 518129 P.R.China
Manufacturer	Huawei Technologies Co., Ltd.
Manufacturer address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen 518129 P.R.China

General information

EUT Description			
Model	KSA-LX3		
IMEI	IMEI 1: 866698040023628 IMEI 2: 866698040028825		
Hardware Version	HL1AMNM		
Software Version	5.0.1.37(C900E20R1P2)		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain	GSM1900: 0.57dBi WCDMA Band II: 0.57dBi LTE Band 2: 0.57dBi		
Test Mode(s)	GSM1900; WCDMA Band II; LTE Band 2		
Test Modulation	(GSM)GMSK,8PSK; (WCDMA)QPSK,16QAM; (LTE)QPSK,16QAM		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
HSDPA UE Category	14		
HSUPA UE Category	7		
DC-HSDPA UE Category	24		
HSPA+ UE Category	7		
LTE Category	4		
Maximum E.I.R.P	GSM 1900:	29.72dBm	
	WCDMA Band II:	24.16dBm	
	LTE Band 2:	24.10dBm	
Rated Power Supply Voltage	3.82V		
Extreme Voltage	Minimum: 3.6V Maximum: 4.4V		
Extreme Temperature	Lowest: -10°C Highest: +55°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM1900	1850 ~ 1910	1930 ~ 1990

	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
EUT Accessory			
Adapter 1	Manufacturer: HuaweiTechnologies Co., Ltd. (SHENZHEN HUNTKEY ELECTRIC CO., LTD.) Model: HW-050100U01		
Adapter 2	Manufacturer: HuaweiTechnologies Co., Ltd. (HUIZHOU BYD ELECTRONIC CO., LTD.) Model: HW-050100U01		
Adapter 3	Manufacturer: HuaweiTechnologies Co., Ltd. (Dongguan Phitek Electronics Co., Ltd.) Model: HW-050100U01		
Battery 1	Manufacturer: HuaweiTechnologies Co., Ltd. (Sunwoda Electronic Co.,LTD) Model: HB405979ECW		
Battery 2	Manufacturer: HuaweiTechnologies Co., Ltd. (SCUD (Fujian) Electronics Co., LTD.) Model: HB405979ECW		
Battery 3	Manufacturer: HuaweiTechnologies Co., Ltd. (Desay Battery Electronic Co.,LTD) Model: HB405979ECW		
Earphone 1	Manufacturer: Jiangxi Lianchuang Hongsheng Electronic Co. ,LTD Model: MEND1532B528A02		
Earphone 2	Manufacturer: Boluo County Quancheng Electronic Co.,ltd. Model: 1293-3283-3.5MM-322		
USB Cable 1	Manufacturer: HONGLIN TECHNOLOGY CO.,LTD. Model: 130-26654		
USB Cable 2	Manufacturer: Dongguan Ming Ji Electronics Co.,Ltd. Model: 203-0786-0		
USB Cable 3	Manufacturer: Luxshare Precision industry Co., Ltd. Model: L99U2013-CS-H		
USB Cable 4	Manufacturer: NingBo Broad Telecommunication Co., Ltd. Model: WA0007		
Note: 1. The information of the EUT is declared by the manufacturer. 2. There are more than one Adapter, Battery, Earphone and USB Cable, each one should be applied throughout the compliance test respectively, however, only the worst case (Adapter 2, Battery 2 and USB Cable 2) will be recorded in this report.			

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2019)

FCC CFR 47 Part 24E (2019)

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 1900	WCDMA Band II
RF power output	GSM GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA HSPA+
Effective Isotropic Radiated power	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC

Test modes are chosen to be reported as the worst case configuration below for LTE Band 2:

Test items	Bandwidth (MHz)						Modulation		RB			Test Channel		
	1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Conducted Spurious Emissions	O	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	-	-	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

5. Test Case Results

5.1.RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

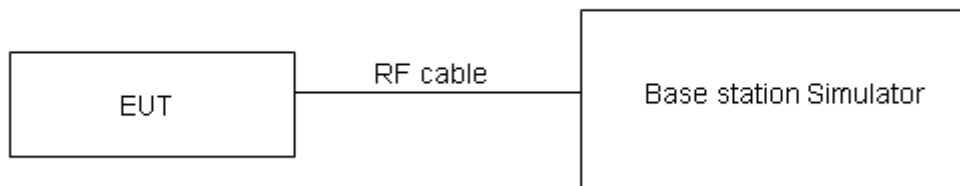

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

GSM 1900		Conducted Power(dBm)		
		Channel 512	Channel 661	Channel 810
		1850.2(MHz)	1880(MHz)	1909.8(MHz)
GSM	Results	27.61	27.56	27.48
GPRS/EGPRS (GMSK)	1TXslot	27.60	27.55	27.48
	2TXslots	24.68	24.66	24.59
	3TXslots	22.97	22.98	22.92
	4TXslots	21.69	21.67	21.60
EGPRS (8PSK)	1TXslot	25.72	25.91	25.84
	2TXslots	23.04	23.02	22.96
	3TXslots	21.50	21.47	21.41
	4TXslots	19.60	19.74	19.51

WCDMA Band II		Conducted Power(dBm)		
		Channel 9262	Channel 9400	Channel 9538
		1852.4(MHz)	1880(MHz)	1907.6(MHz)
RMC	12.2k	20.70	20.55	20.63
	64k	20.69	20.56	20.61
	144k	20.72	20.53	20.64
	384k	20.73	20.52	20.65
HSDPA	Sub - Test 1	20.16	19.97	20.07
	Sub - Test 2	20.15	19.99	20.04
	Sub - Test 3	19.62	19.49	19.56
	Sub - Test 4	19.63	19.50	19.54
HSUPA	Sub - Test 1	20.12	19.96	20.02
	Sub - Test 2	19.11	18.94	19.01
	Sub - Test 3	19.58	19.42	19.50
	Sub - Test 4	19.04	18.91	18.98
	Sub - Test 5	20.05	19.89	19.96
DC-HSDPA	Sub - Test 1	20.04	19.91	19.97
	Sub - Test 2	20.03	19.90	19.96
	Sub - Test 3	19.61	19.39	19.47
	Sub - Test 4	19.60	19.38	19.46
HSPA+	16QAM	19.59	19.46	19.53

LTE Band 2				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18607/1850.7	18900/1880	19193/1909.3
1.4MHz	QPSK	1	0	20.06	19.92	19.92
		1	2	20.37	20.10	20.26
		1	5	19.98	19.78	20.06
		3	0	20.21	20.02	20.16
		3	2	20.25	20.07	20.23
		3	3	20.23	19.90	20.09
		6	0	20.23	20.06	20.21
	16QAM	1	0	20.37	20.27	20.32
		1	2	20.61	20.47	20.54
		1	5	20.60	20.24	20.37
		3	0	20.31	20.07	20.23
		3	2	20.36	20.13	20.32
		3	3	20.30	20.08	20.16
		6	0	20.35	20.10	20.28
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18615/1851.5	18900/1880	19185/1908.5
3MHz	QPSK	1	0	20.08	19.96	19.95
		1	7	20.40	20.15	20.30
		1	14	20.01	19.83	20.10
		8	0	20.29	20.12	20.27
		8	4	20.35	20.15	20.33
		8	7	20.31	19.99	20.17
		15	0	20.26	20.10	20.24
	16QAM	1	0	20.40	20.29	20.35
		1	7	20.64	20.52	20.58
		1	14	20.62	20.28	20.42
		8	0	20.40	20.18	20.33
		8	4	20.45	20.24	20.42
		8	7	20.38	20.19	20.27
		15	0	20.38	20.14	20.31
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18625/1852.5	18900/1880	19175/1907.5
5MHz	QPSK	1	0	20.05	19.94	19.91
		1	13	20.38	20.11	20.27
		1	24	19.98	19.78	20.06
		12	0	20.26	20.07	20.23



		12	6	20.33	20.11	20.28
		12	13	20.29	19.97	20.13
		25	0	20.24	20.09	20.22
	16QAM	1	0	20.37	20.25	20.32
		1	13	20.61	20.50	20.55
		1	24	20.59	20.26	20.36
		12	0	20.38	20.14	20.30
		12	6	20.42	20.19	20.37
		12	13	20.35	20.13	20.23
		25	0	20.36	20.10	20.26
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18650/1855	18900/1880	19150/1905
10MHz	QPSK	1	0	20.07	19.95	19.94
		1	25	20.41	20.16	20.31
		1	49	20.00	19.82	20.09
		25	0	20.29	20.12	20.27
		25	13	20.36	20.16	20.32
		25	25	20.31	20.01	20.18
		50	0	20.32	20.11	20.26
	16QAM	1	0	20.39	20.28	20.34
		1	25	20.64	20.54	20.58
		1	49	20.62	20.28	20.39
		25	0	20.41	20.19	20.34
		25	13	20.44	20.23	20.42
		25	25	20.38	20.18	20.27
		50	0	20.39	20.15	20.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18675/1857.5	18900/1880	19125/1902.5
15MHz	QPSK	1	0	20.06	19.91	19.92
		1	38	20.39	20.15	20.28
		1	74	19.97	19.77	20.05
		36	0	20.27	20.08	20.24
		36	18	20.33	20.11	20.26
		36	39	20.28	19.98	20.14
		75	0	20.30	20.07	20.21
	16QAM	1	0	20.34	20.26	20.32
		1	38	20.62	20.51	20.56
		1	74	20.59	20.24	20.36
		36	0	20.38	20.17	20.31
		36	18	20.41	20.18	20.37



		36	39	20.36	20.14	20.24
		75	0	20.36	20.10	20.26
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18700/1860	18900/1880	19100/1900
20MHz	QPSK	1	0	20.03	19.87	19.89
		1	50	20.38	20.11	20.26
		1	99	19.95	19.76	20.02
		50	0	20.24	20.03	20.20
		50	25	20.31	20.07	20.25
		50	50	20.25	19.93	20.10
		100	0	20.27	20.02	20.17
	16QAM	1	0	20.32	20.22	20.27
		1	50	20.58	20.49	20.52
		1	99	20.57	20.21	20.34
		50	0	20.35	20.13	20.28
		50	25	20.38	20.16	20.34
		50	50	20.33	20.09	20.20
		100	0	20.34	20.06	20.23

5.2. Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$
 where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

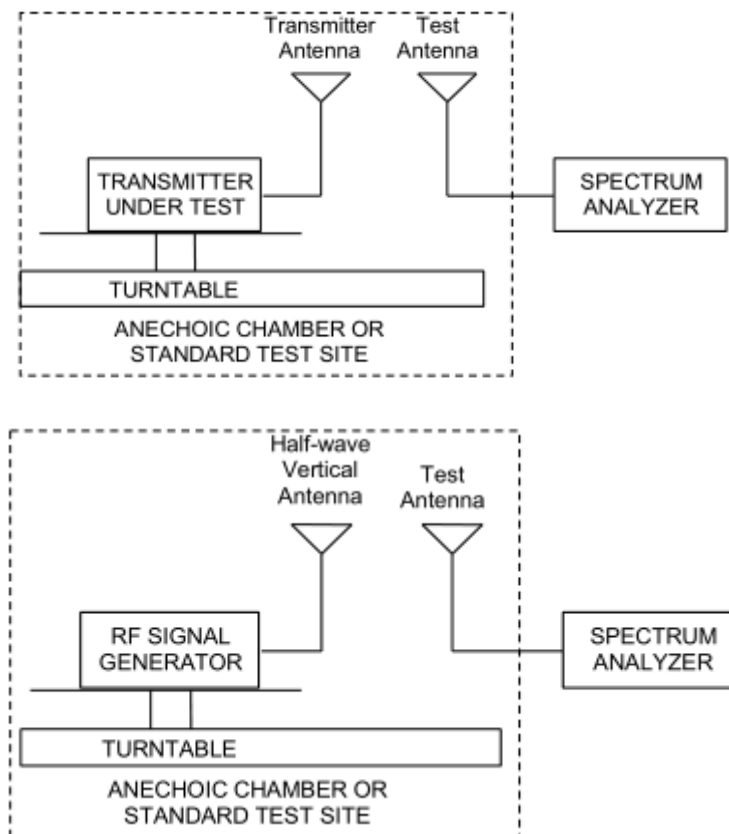

Limits

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Limit	$\leq 2 \text{ W}$ (33 dBm)
-------	-----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

Test Results:

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
GSM 1900	Low	1850.2	Horizontal	29.39	33	Pass
	Mid	1880	Horizontal	29.39	33	Pass
	High	1909.8	Horizontal	28.35	33	Pass
GPRS 1900	Low	1850.2	Horizontal	29.71	33	Pass
	Mid	1880	Horizontal	29.72	33	Pass
	High	1909.8	Horizontal	28.72	33	Pass
EGPRS 1900	Low	1850.2	Horizontal	28.11	33	Pass
	Mid	1880	Horizontal	28.51	33	Pass
	High	1909.8	Horizontal	27.59	33	Pass
WCDMA Band II	Low	1852.4	Horizontal	22.98	33	Pass
	Mid	1880	Horizontal	23.67	33	Pass
	High	1907.6	Horizontal	24.16	33	Pass

LTE Band 2						
bandwidth	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	1850.7	Horizontal	21.35	33	Pass
	Mid	1880	Horizontal	23.52	33	Pass
	High	1909.3	Horizontal	24.10	33	Pass
3 MHz (QPSK)	Low	1851.5	Horizontal	22.43	33	Pass
	Mid	1880	Horizontal	23.05	33	Pass
	High	1908.5	Horizontal	22.41	33	Pass
5 MHz (QPSK)	Low	1852.5	Horizontal	22.38	33	Pass
	Mid	1880	Horizontal	23.43	33	Pass
	High	1907.5	Horizontal	22.87	33	Pass
10 MHz (QPSK)	Low	1855	Horizontal	23.19	33	Pass
	Mid	1880	Horizontal	22.75	33	Pass
	High	1905	Horizontal	22.49	33	Pass
15 MHz (QPSK)	Low	1857.5	Horizontal	23.12	33	Pass
	Mid	1880	Horizontal	24.05	33	Pass
	High	1902.5	Horizontal	23.34	33	Pass
20 MHz (QPSK)	Low	1860	Horizontal	21.97	33	Pass
	Mid	1880	Horizontal	22.81	33	Pass
	High	1900	Horizontal	22.97	33	Pass
1.4 MHz (16QAM)	Low	1850.7	Horizontal	20.89	33	Pass
	Mid	1880	Horizontal	23.03	33	Pass
	High	1909.3	Horizontal	23.54	33	Pass
3 MHz (16QAM)	Low	1851.5	Horizontal	21.76	33	Pass
	Mid	1880	Horizontal	22.52	33	Pass
	High	1908.5	Horizontal	21.75	33	Pass
5 MHz (16QAM)	Low	1852.5	Horizontal	21.88	33	Pass
	Mid	1880	Horizontal	22.94	33	Pass
	High	1907.5	Horizontal	22.41	33	Pass
10 MHz (16QAM)	Low	1855	Horizontal	22.78	33	Pass
	Mid	1880	Horizontal	22.05	33	Pass
	High	1905	Horizontal	22.06	33	Pass
15 MHz (16QAM)	Low	1857.5	Horizontal	22.50	33	Pass
	Mid	1880	Horizontal	23.57	33	Pass
	High	1902.5	Horizontal	22.61	33	Pass
20 MHz (16QAM)	Low	1860	Horizontal	21.48	33	Pass
	Mid	1880	Horizontal	22.23	33	Pass
	High	1900	Horizontal	22.54	33	Pass

5.3.Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900,

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band II,


RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2 (1.4MHz),

RBW is set to 100kHz,VBW is set to 300kHz for LTE Band 2 (3MHz/5MHz),

RBW is set to 300kHz,VBW is set to 1MHz for LTE Band 2 (10MHz/15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

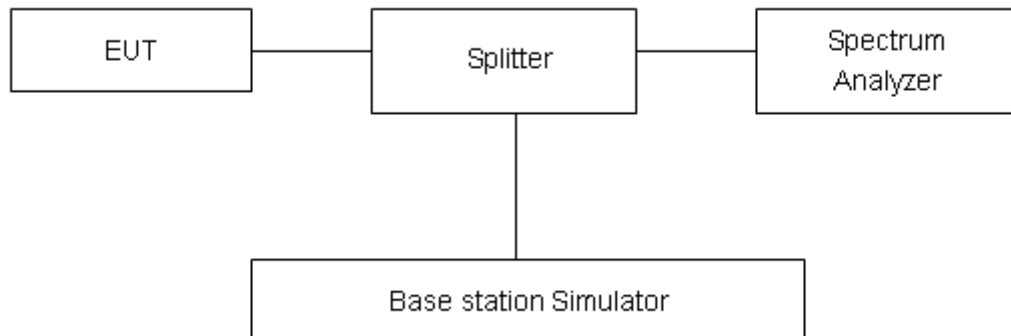

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Result

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 1900 (GSM)	512	1850.2	0.24603	0.3064
	661	1880.0	0.24526	0.3072
	810	1909.8	0.24685	0.3141
GPRS 1900 (GMSK)	512	1850.2	0.24439	0.3072
	661	1880.0	0.24887	0.3106
	810	1909.8	0.24756	0.3099
EGPRS 1900 (8-PSK)	512	1850.2	0.25206	0.3147
	661	1880.0	0.24547	0.3107
	810	1909.8	0.24635	0.3113
WCDMA Band II (RMC)	9262	1852.4	4.1659	4.693
	9400	1880	4.1658	4.677
	9538	1907.6	4.1539	4.669

LTE Band 2					
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
QPSK	1.4	18607	1850.7	1.1205	1.344
		18900	1880.0	1.1296	1.350
		19193	1909.3	1.1269	1.335
	3	18615	1851.5	2.7244	2.997
		18900	1880	2.7278	3.003
		19185	1908.5	2.7302	3.002
	5	18625	1852.5	4.5130	4.925
		18900	1880	4.5067	4.929
		19175	1907.5	4.5003	4.904
	10	18650	1855	9.0519	10.020
		18900	1880	9.0286	9.963
		19150	1905	9.0430	9.886
	15	18675	1857.5	13.4890	14.630



		18900	1880	13.4680	14.590
		19125	1902.5	13.4770	14.540
	20	18700	1860	17.9090	19.040
		18900	1880	17.9260	19.220
		19100	1900	17.8880	19.140
16QAM	1.4	18607	1850.7	1.1195	1.331
		18900	1880.0	1.1153	1.320
		19193	1909.3	1.1175	1.343
	3	18615	1851.5	2.7196	3.022
		18900	1880	2.7258	2.984
		19185	1908.5	2.7232	2.987
	5	18625	1852.5	4.4975	5.311
		18900	1880	4.5148	4.932
		19175	1907.5	4.5265	5.677
	10	18650	1855	9.0436	9.893
		18900	1880	9.0456	10.710
		19150	1905	9.0563	10.920
	15	18675	1857.5	13.5030	14.530
		18900	1880	13.5080	14.560
		19125	1902.5	13.4800	14.590
	20	18700	1860	17.9050	19.250
		18900	1880	17.9440	19.380
		19100	1900	17.9210	19.090




GSM1900 GSM CH-Low




GSM1900 GPRS CH-Low




GSM 1900 GSM CH-Middle

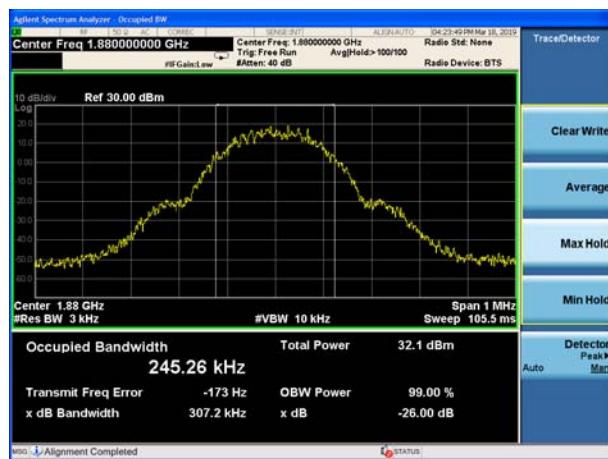

GSM 1900 GPRS CH-Middle

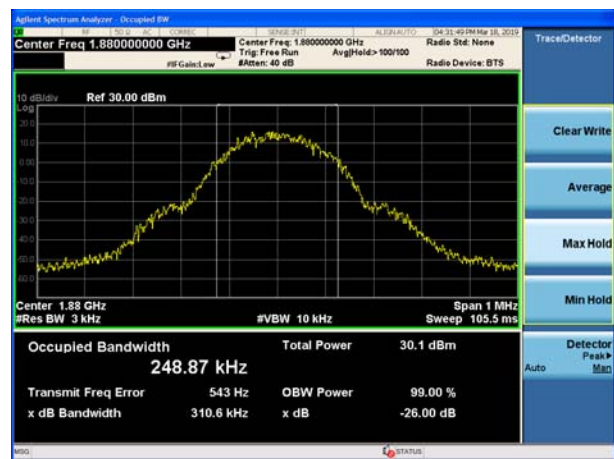

GSM 1900 GSM CH-High

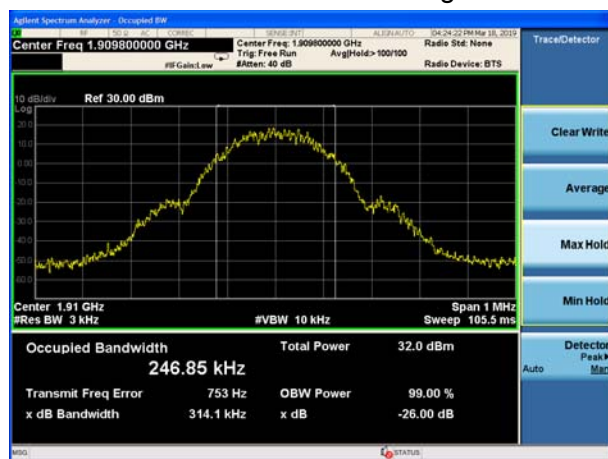

GSM 1900 GPRS CH-High






GSM1900 EGPRS CH-Low




WCDMA Band II RMC CH-LOW

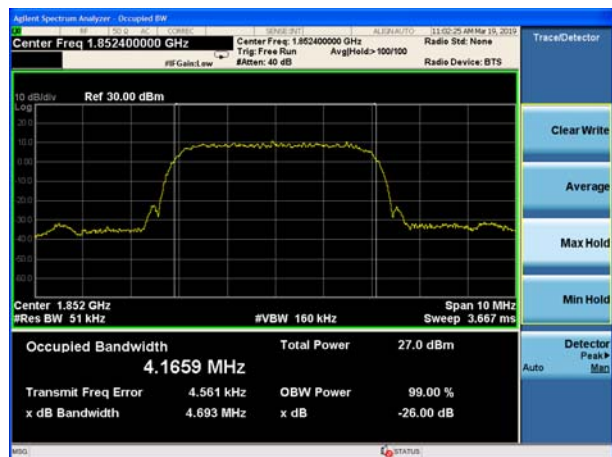


GSM 1900 EGPRS CH-Middle




WCDMA Band II RMC CH-Middle

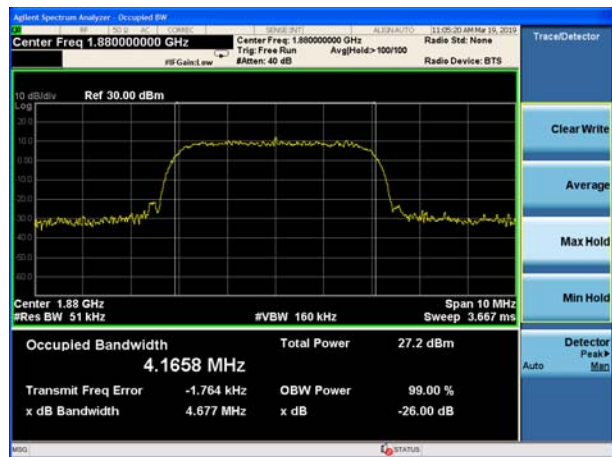

GSM 1900 EGPRS CH-High

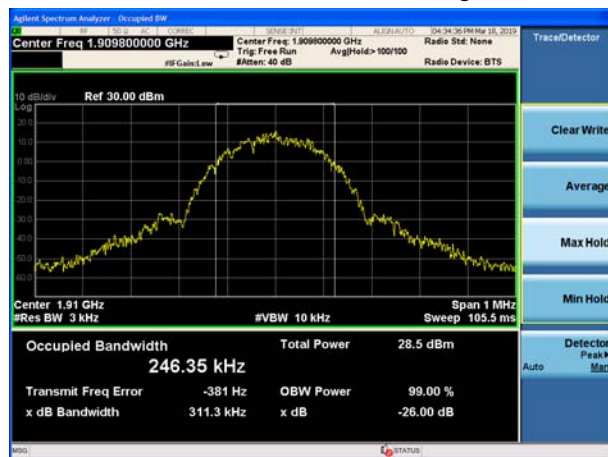


WCDMA Band II RMC CH-High

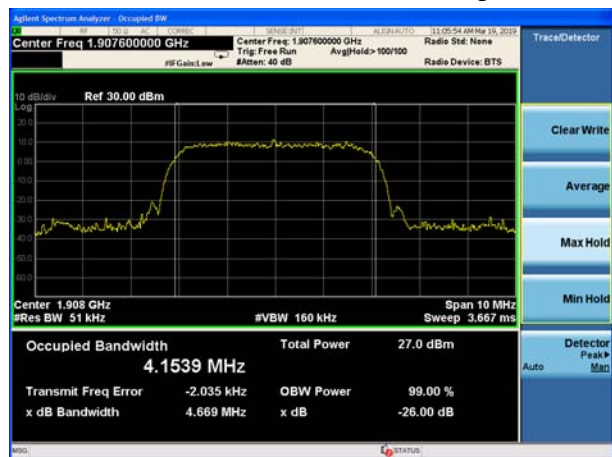





LTE Band 2 1.4MHz QPSK CH-Low

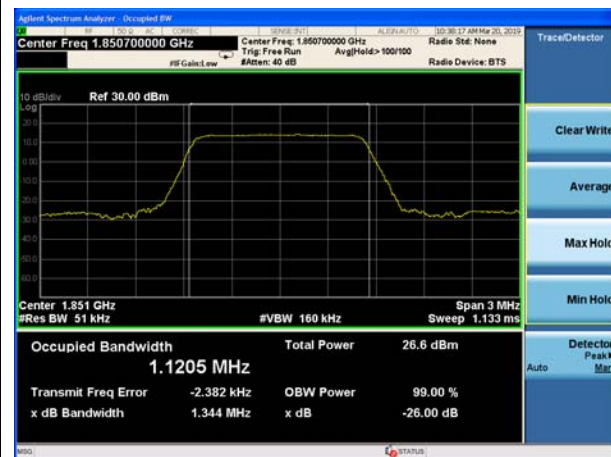


LTE Band 2 3MHz QPSK CH-Low

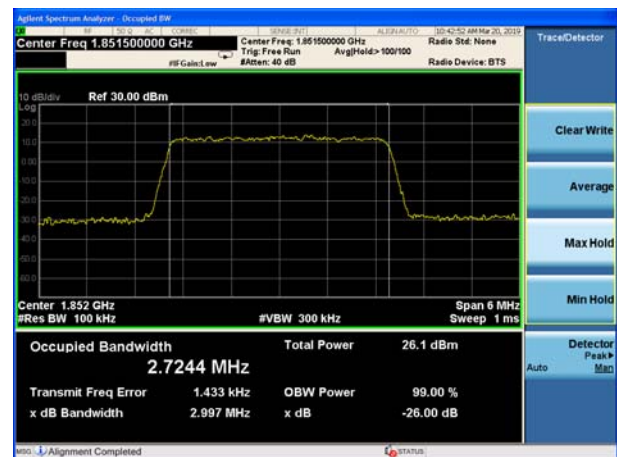


LTE Band 2 1.4MHz QPSK CH-Middle

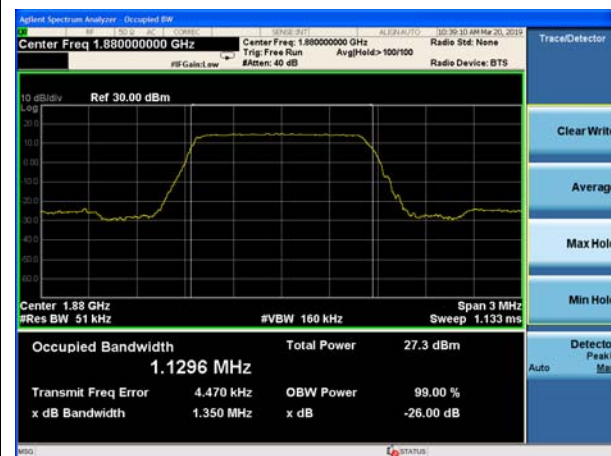

LTE Band 2 3MHz QPSK CH-Middle

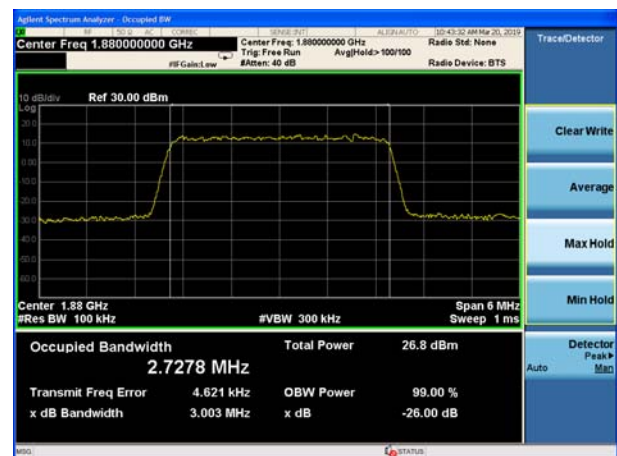


LTE Band 2 1.4MHz QPSK CH-High

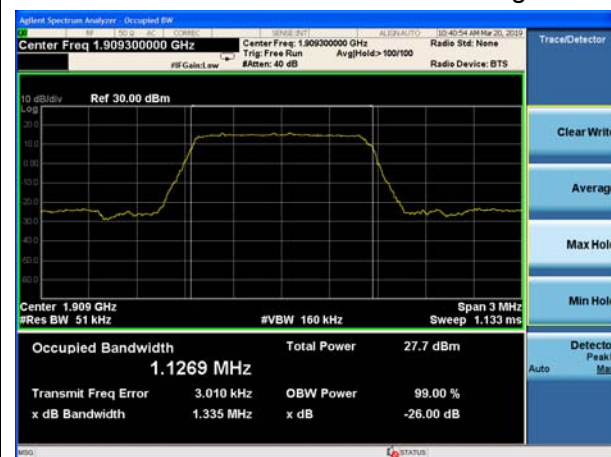


LTE Band 2 3MHz QPSK CH-High




LTE Band 2 5MHz QPSK CH-Low

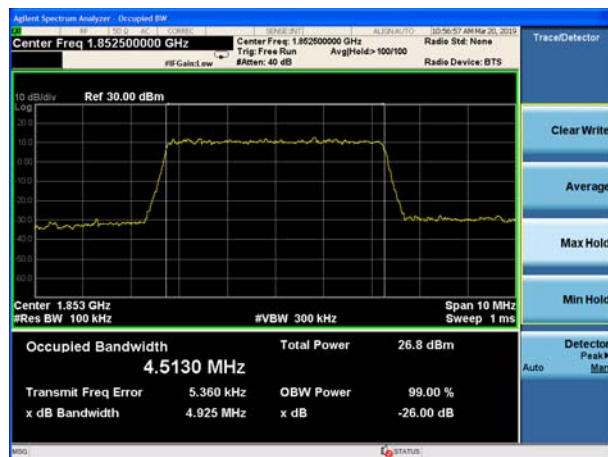

LTE Band 2 10MHz QPSK CH-Low

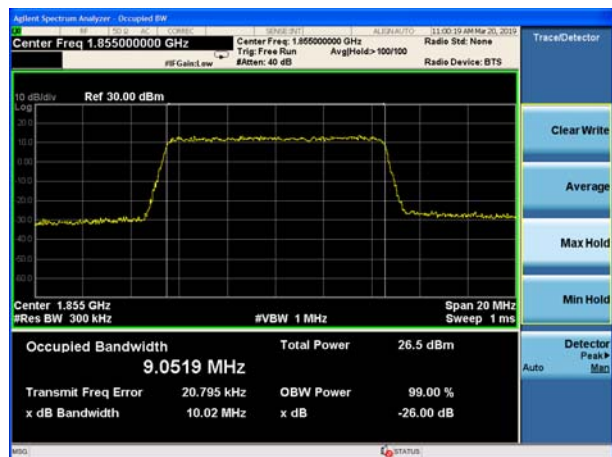


LTE Band 2 5MHz QPSK CH-Middle

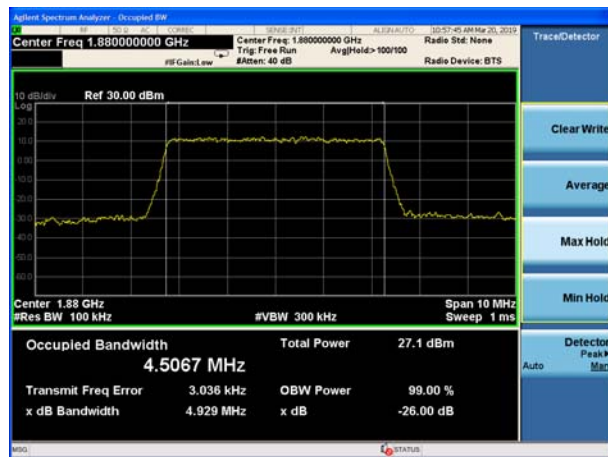


LTE Band 2 10MHz QPSK CH-Middle



LTE Band 2 5MHz QPSK CH-High

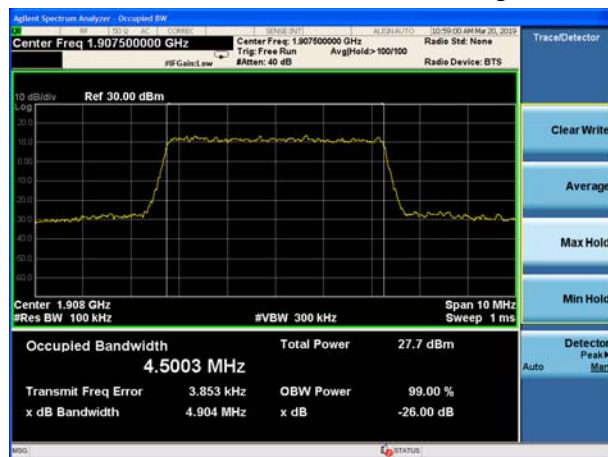


LTE Band 2 10MHz QPSK CH-High

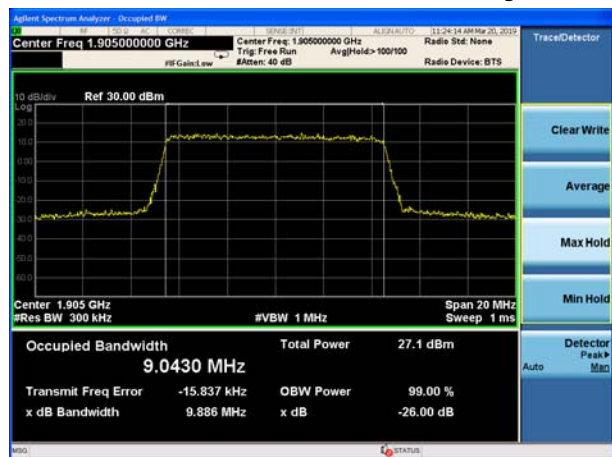





LTE Band 2 15MHz QPSK CH-Low

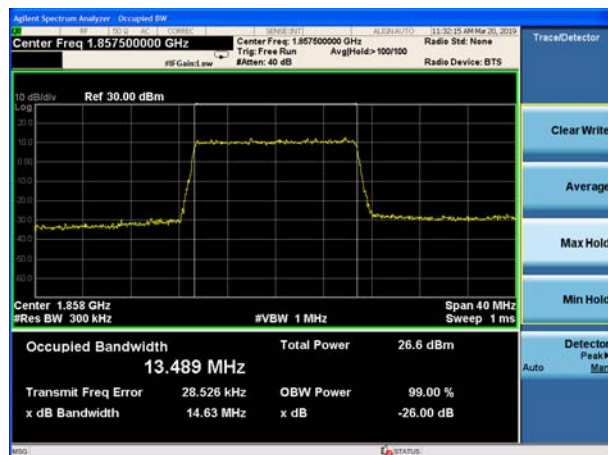


LTE Band 2 20MHz QPSK CH-Low

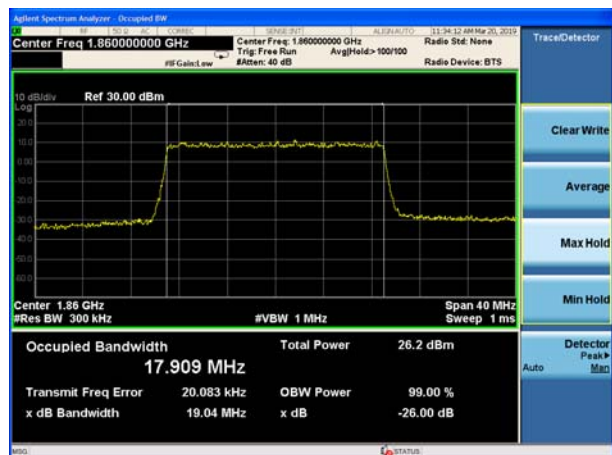


LTE Band 2 15MHz QPSK CH-Middle

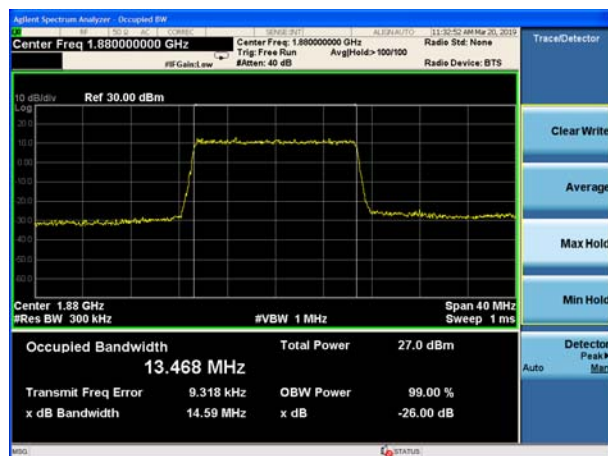


LTE Band 2 20MHz QPSK CH-Middle

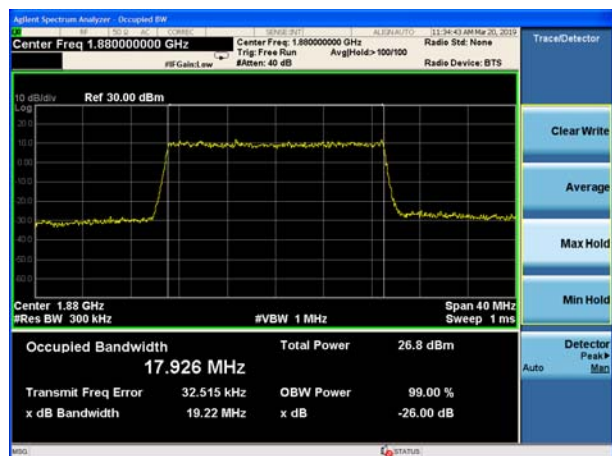

LTE Band 2 15MHz QPSK CH-High

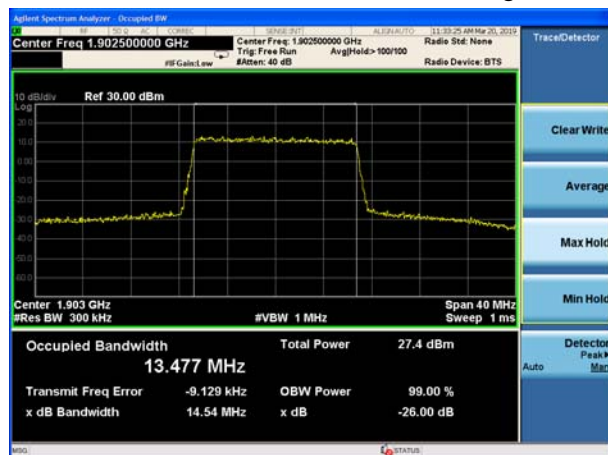


LTE Band 2 20MHz QPSK CH-High

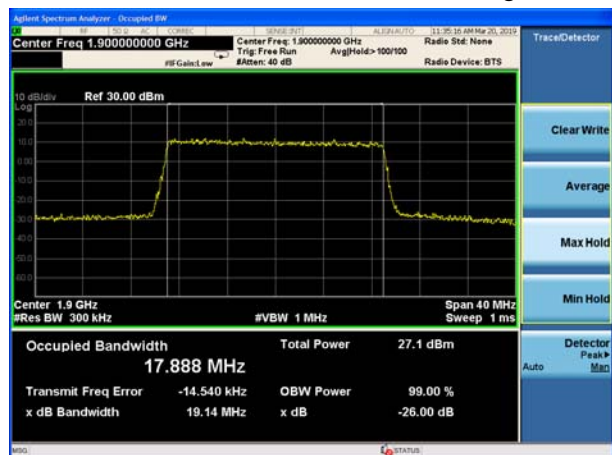





LTE Band 2 1.4MHz 16QAM CH-Low

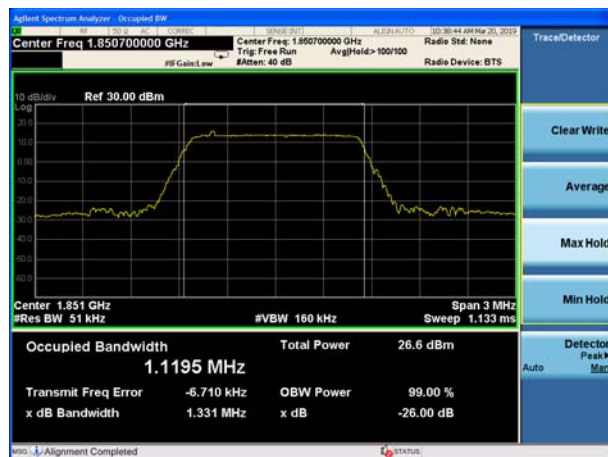


LTE Band 2 3MHz 16QAM CH-Low

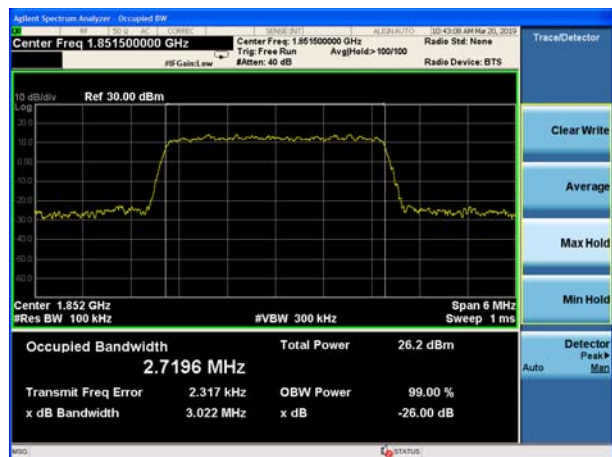


LTE Band 2 1.4MHz 16QAM CH-Middle

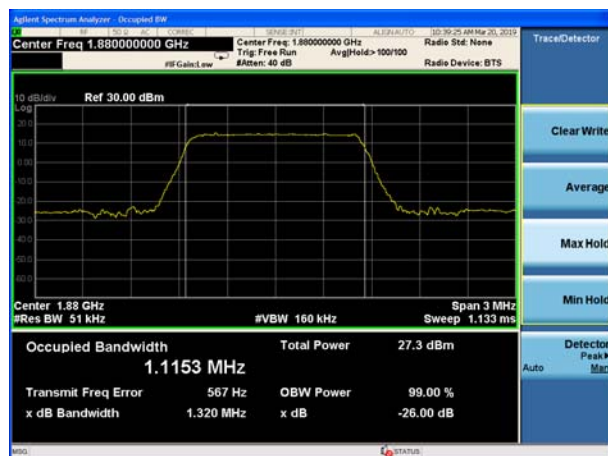


LTE Band 2 3MHz 16QAM CH-Middle

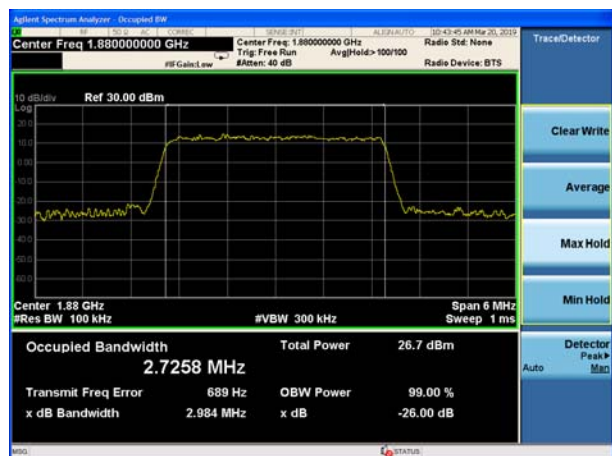

LTE Band 2 1.4MHz 16QAM CH-High

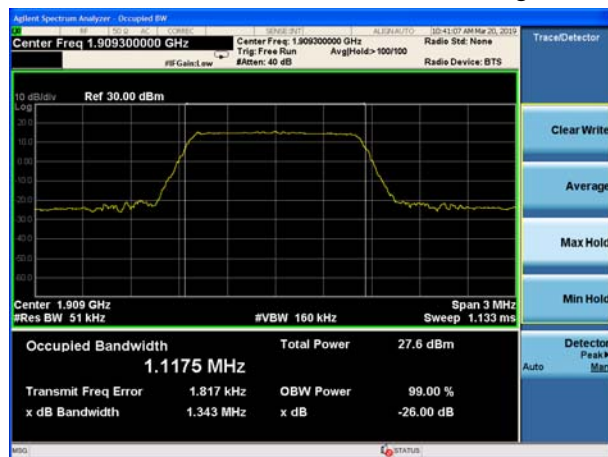

LTE Band 2 3MHz 16QAM CH-High

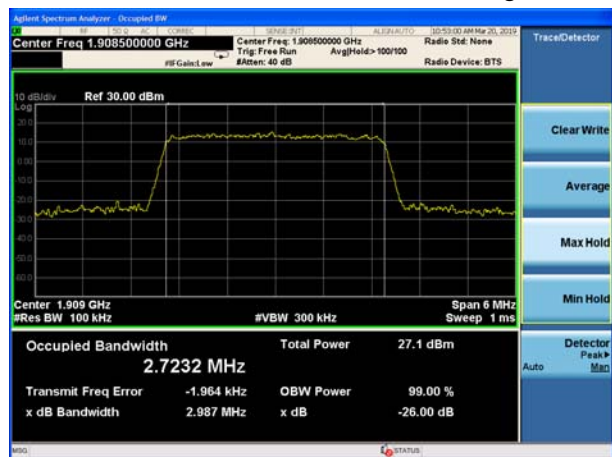


LTE Band 2 5MHz 16QAM CH-Low




LTE Band 2 10MHz 16QAM CH-Low



LTE Band 2 5MHz 16QAM CH-Middle

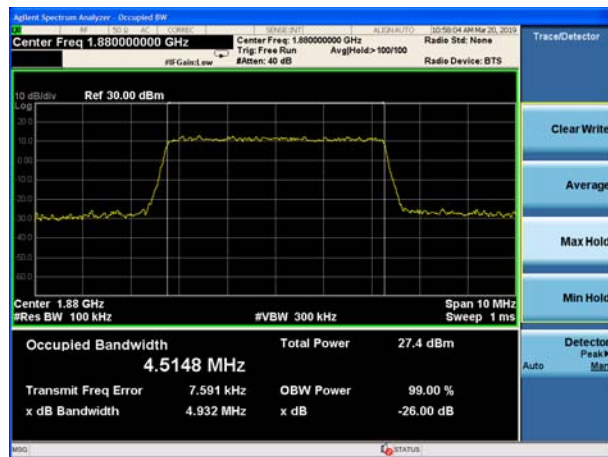


LTE Band 2 10MHz 16QAM CH-Middle

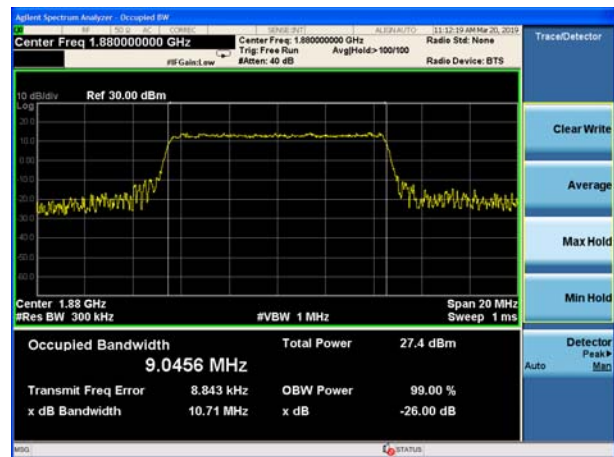


LTE Band 2 5MHz 16QAM CH-High




LTE Band 2 10MHz 16QAM CH-High

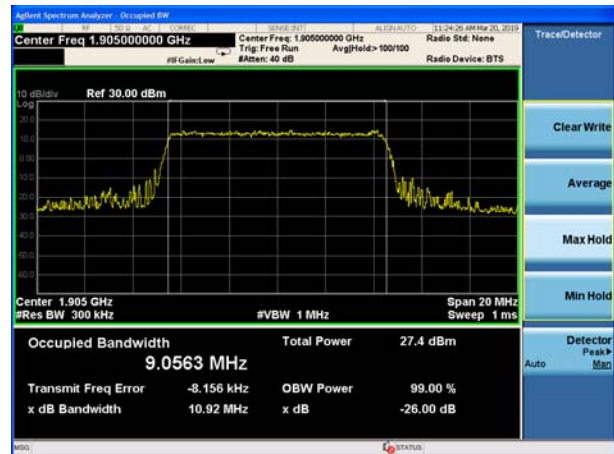


LTE Band 2 15MHz 16QAM CH-Low

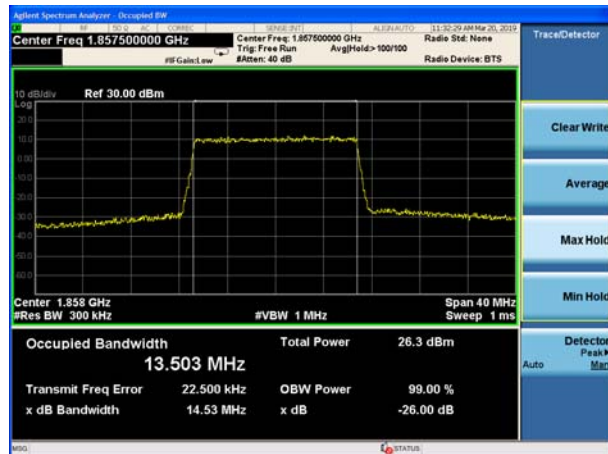


LTE Band 2 20MHz 16QAM CH-Low

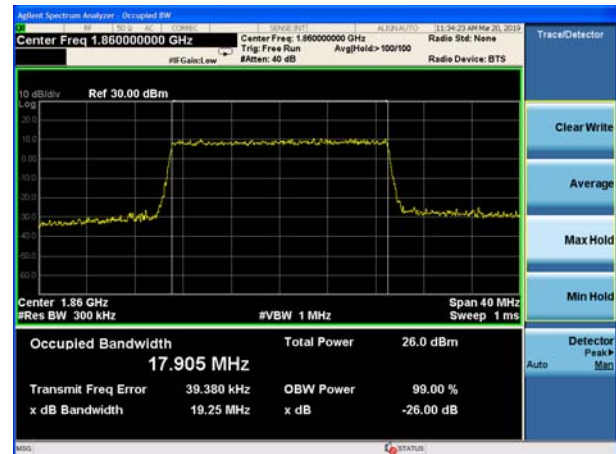


LTE Band 2 15MHz 16QAM CH-Middle

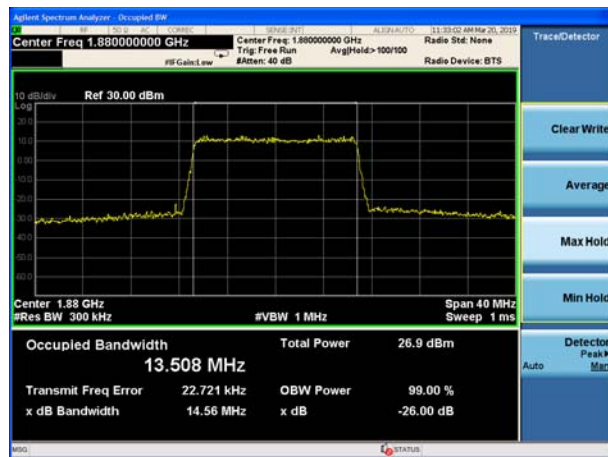


LTE Band 2 20MHz 16QAM CH-Middle

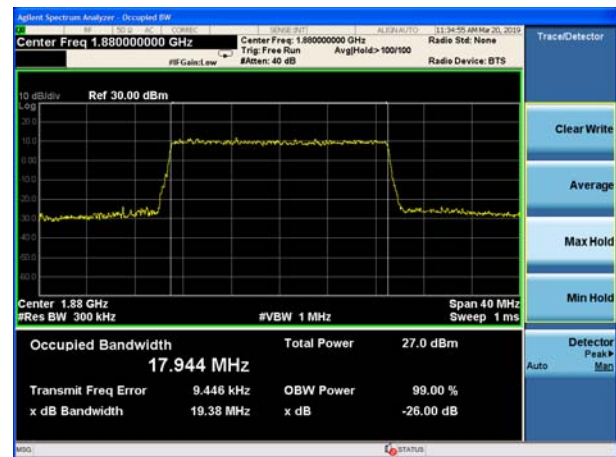

LTE Band 2 15MHz 16QAM CH-High

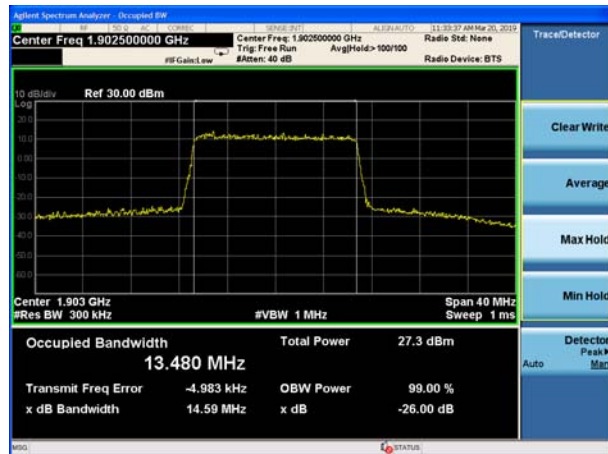

LTE Band 2 20MHz 16QAM CH-High

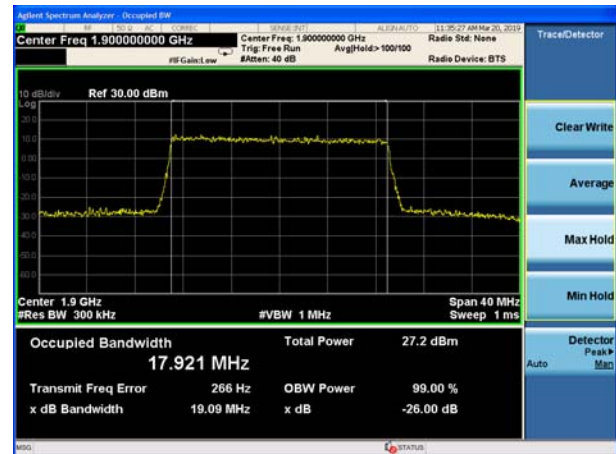

5.4. Band Edge Compliance


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900, RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band II, RBW is set to 15kHz, VBW is set to 51kHz for LTE Band 2 (1.4MHz), RBW is set to 30kHz, VBW is set to 100kHz for LTE Band 2 (3MHz), RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2 (5MHz), RBW is set to 100kHz, VBW is set to 300kHz for LTE Band 2 (10MHz), RBW is set to 150kHz, VBW is set to 510kHz for LTE Band 2 (15MHz), RBW is set to 200kHz, VBW is set to 620kHz for LTE Band 2 (20MHz). Spectrum analyzer plots are included on the following pages.

Test Setup

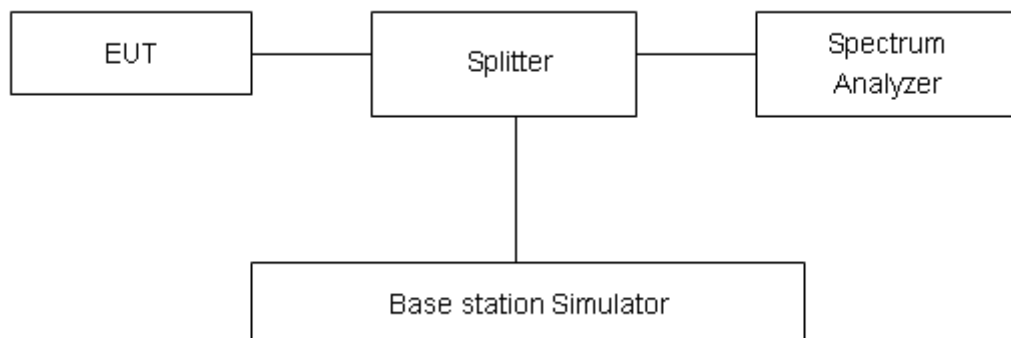

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:

GSM1900 GSM CH-Low

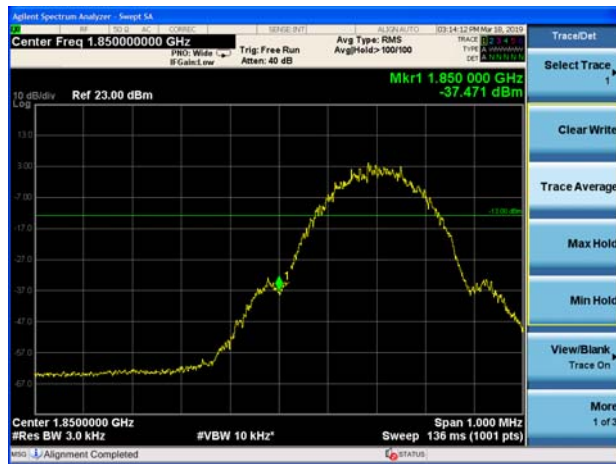

GSM 1900 GSM CH-High



GSM1900 GPRS CH-Low




GSM 1900 GPRS CH-High



GSM1900 EGPRS CH-Low



GSM 1900 EGPRS CH-High

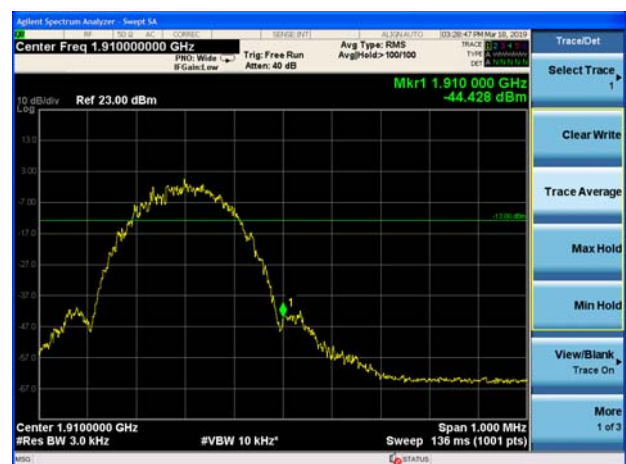




WCDMA Band II RMC CH-Low




WCDMA Band II RMC CH-High




LTE Band 2 1.4MHz QPSK 1RB CH-Low

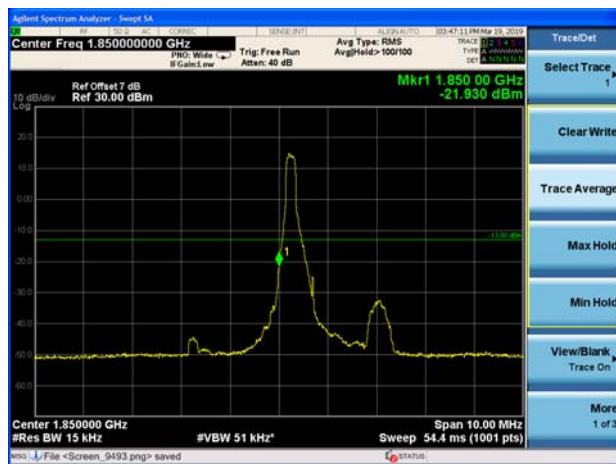


LTE Band 2 1.4MHz QPSK 1RB CH-High

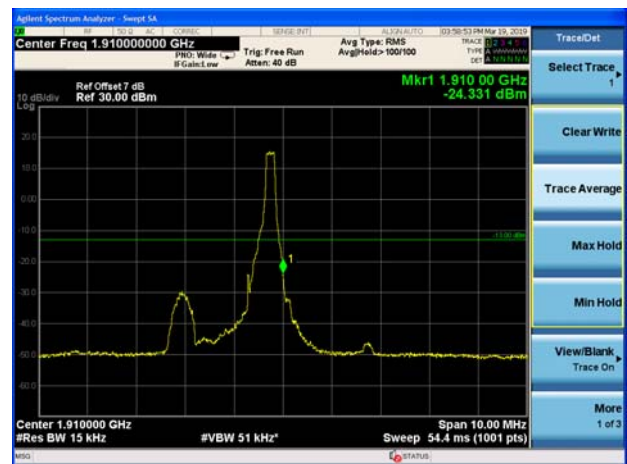

LTE Band 2 1.4MHz QPSK 100%RB CH-Low

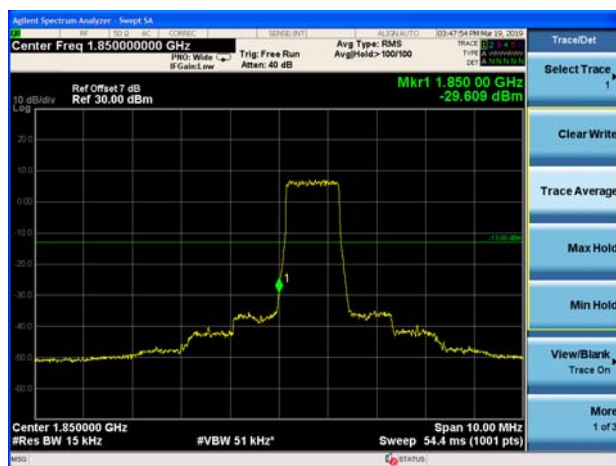


LTE Band 2 1.4MHz QPSK 100%RB CH-High

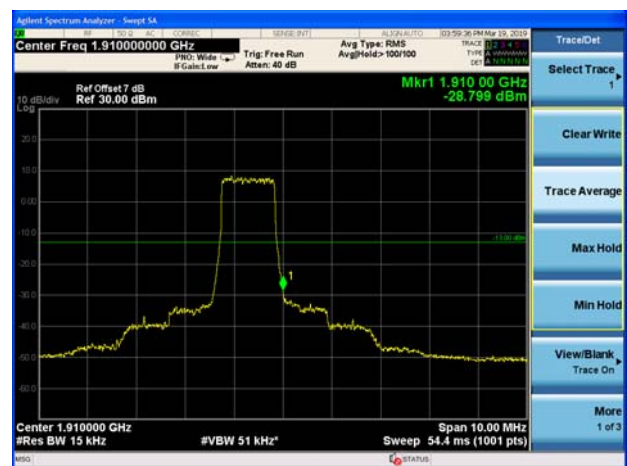


LTE Band 2 3MHz QPSK 1RB CH-Low



LTE Band 2 3MHz QPSK 1RB CH-High

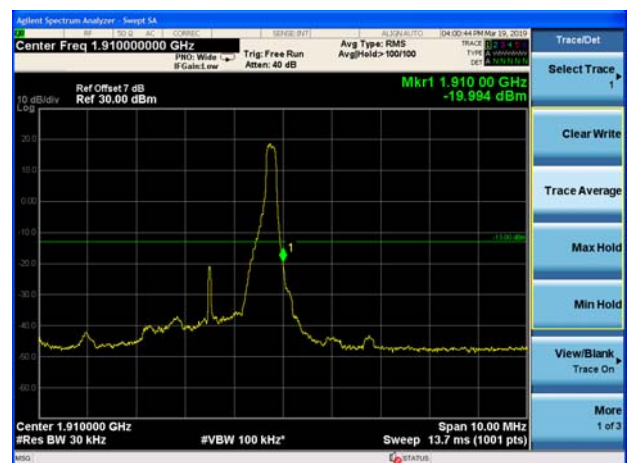

LTE Band 2 3MHz QPSK 100%RB CH-Low

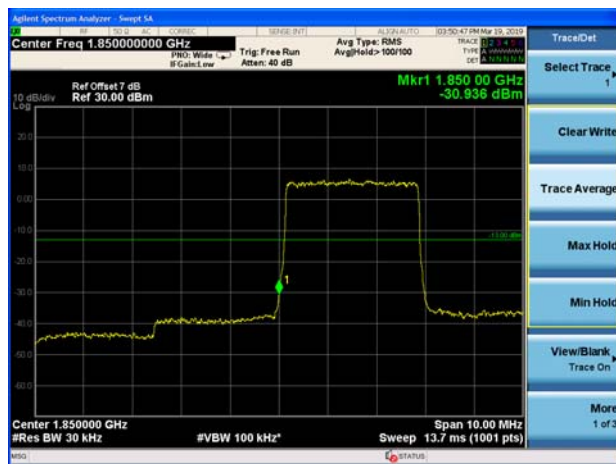


LTE Band 2 3MHz QPSK 100%RB CH-High




LTE Band 2 5MHz QPSK 1RB CH-Low



LTE Band 2 5MHz QPSK 1RB CH-High

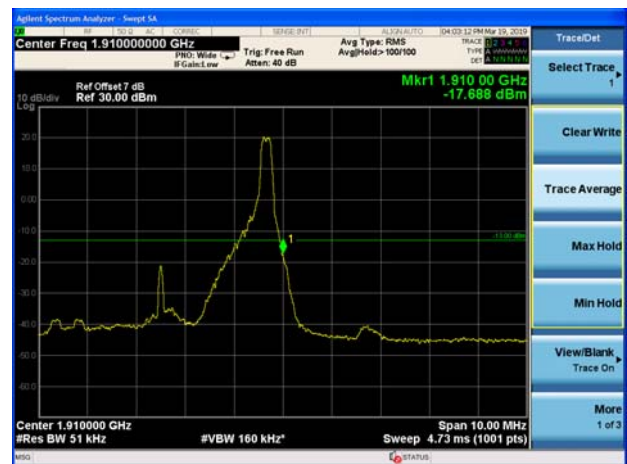

LTE Band 2 5MHz QPSK 100%RB CH-Low

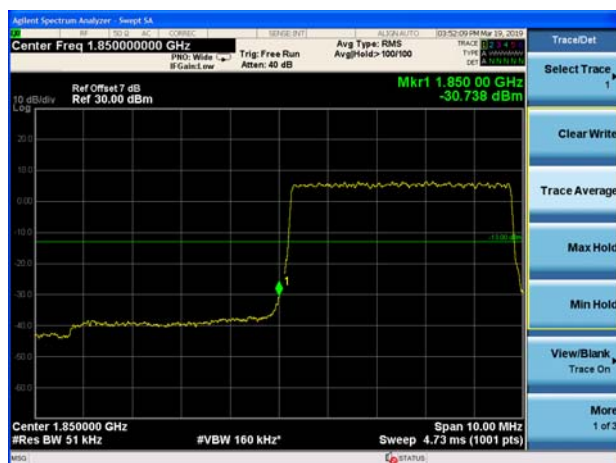


LTE Band 2 5MHz QPSK 100%RB CH-High






LTE Band 2 10MHz QPSK 1RB CH-Low

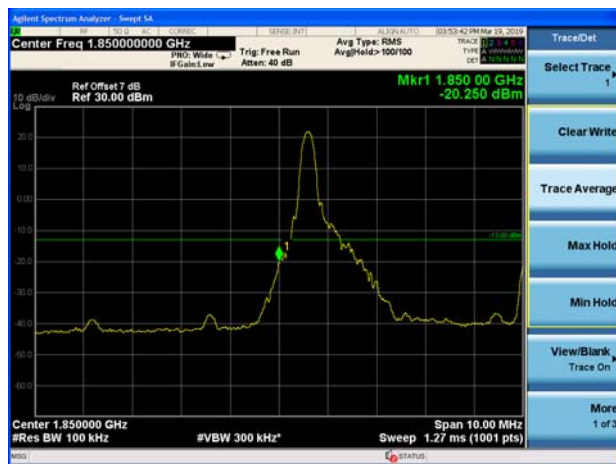

LTE Band 2 10MHz QPSK 1RB CH-High

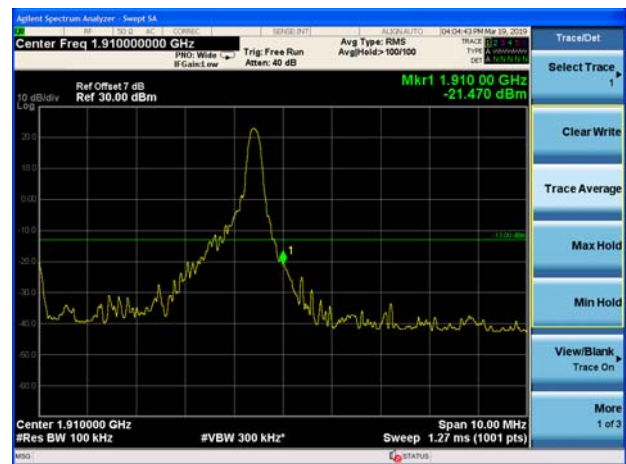


LTE Band 2 10MHz QPSK 100%RB CH-Low




LTE Band 2 10MHz QPSK 100%RB CH-High



LTE Band 2 15MHz QPSK 1RB CH-Low

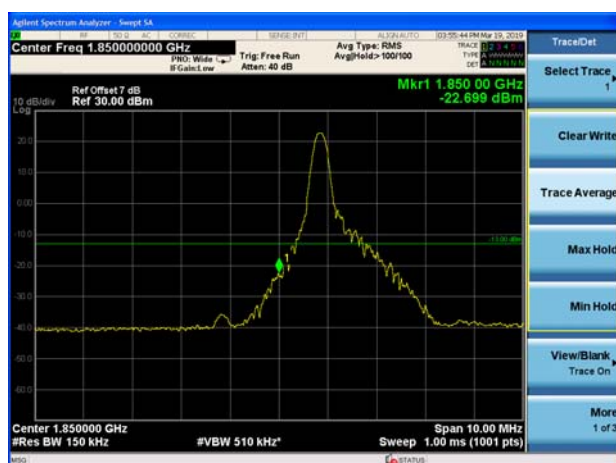


LTE Band 2 15MHz QPSK 1RB CH-High

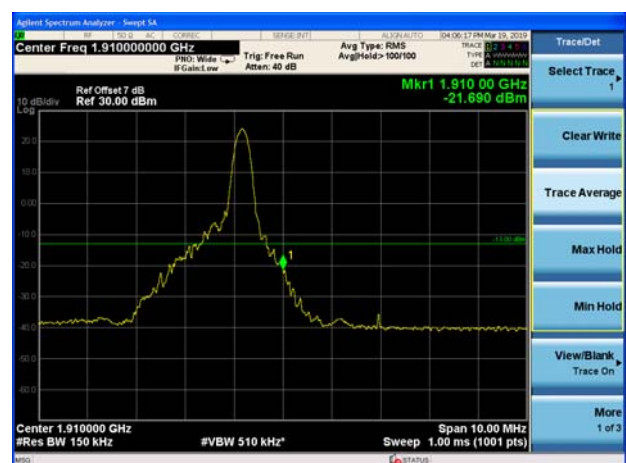




LTE Band 2 15MHz QPSK 100%RB CH-Low

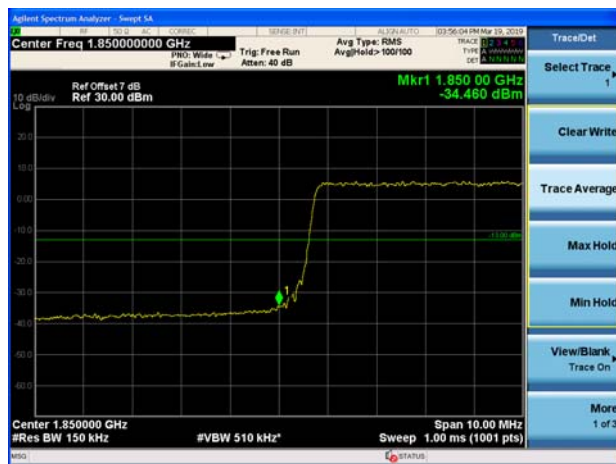


LTE Band 2 15MHz QPSK 100%RB CH-High



LTE Band 2 20MHz QPSK 1RB CH-Low

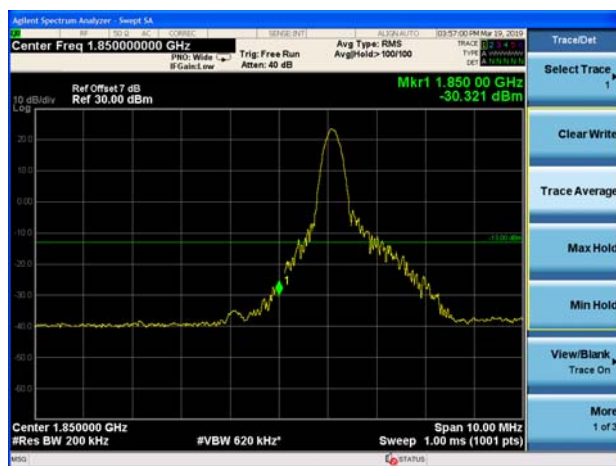

LTE Band 2 20MHz QPSK 1RB CH-High

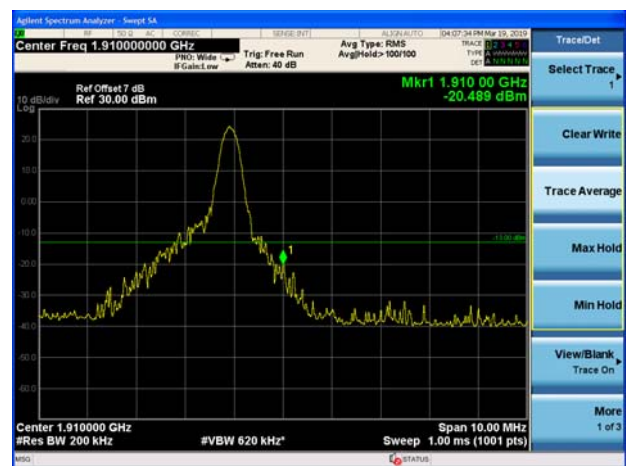


LTE Band 2 20MHz QPSK 100%RB CH-Low




LTE Band 2 20MHz QPSK 100%RB CH-High




LTE Band 2 1.4MHz 16QAM 1RB CH-Low

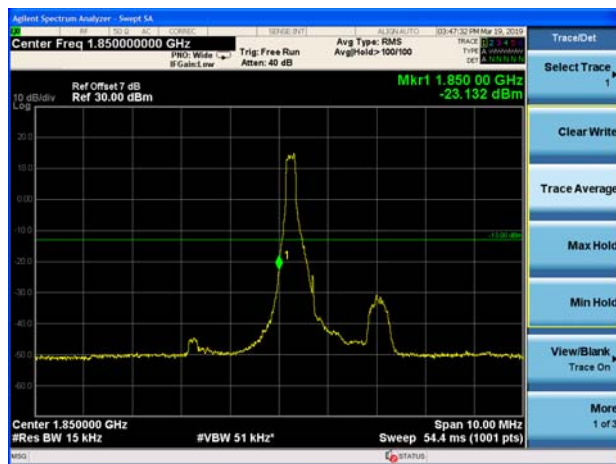


LTE Band 2 1.4MHz 16QAM 1RB CH-High

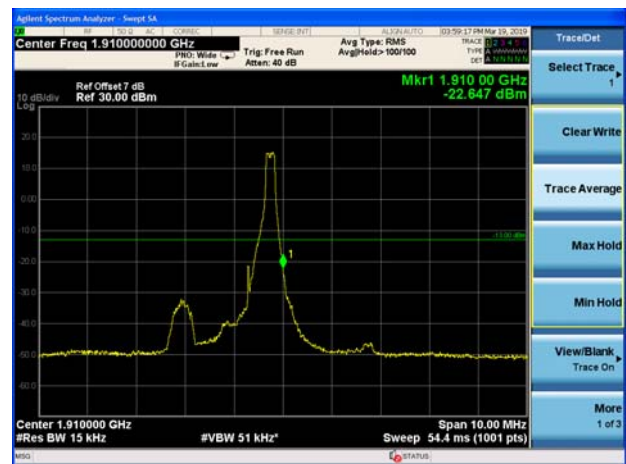

LTE Band 2 1.4MHz 16QAM 100%RB CH-Low

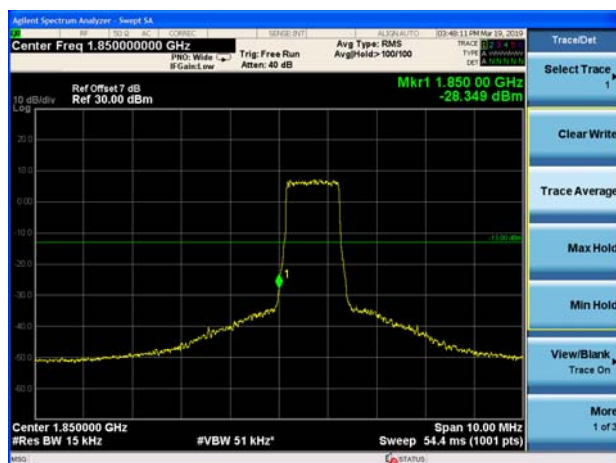

LTE Band 2 1.4MHz 16QAM 100%RB CH-High

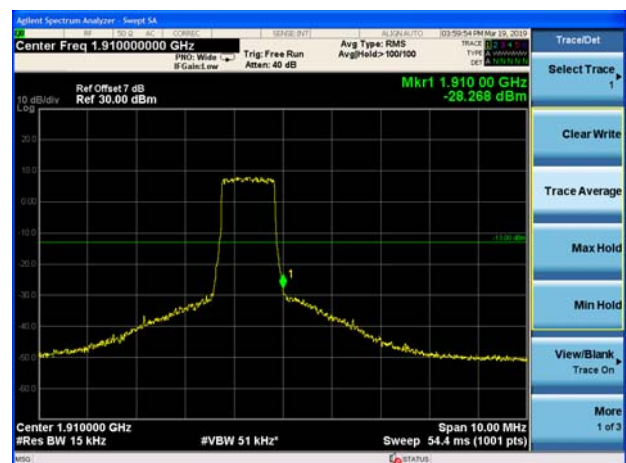

LTE Band 2 3MHz 16QAM 1RB CH-Low



LTE Band 2 3MHz 16QAM 1RB CH-High







LTE Band 2 3MHz 16QAM 100%RB CH-Low




LTE Band 2 3MHz 16QAM 100%RB CH-High

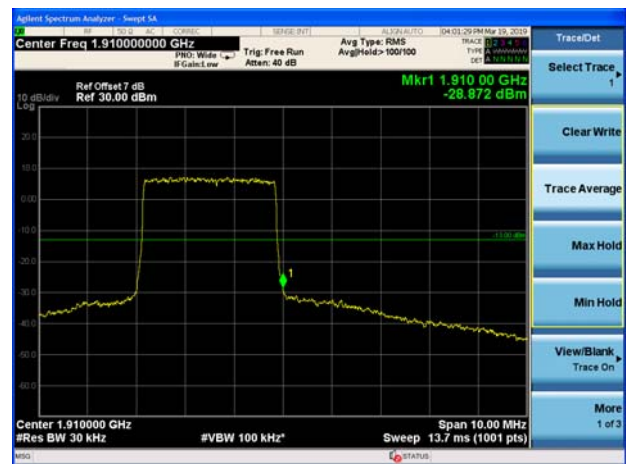

LTE Band 2 5MHz 16QAM 1RB CH-Low

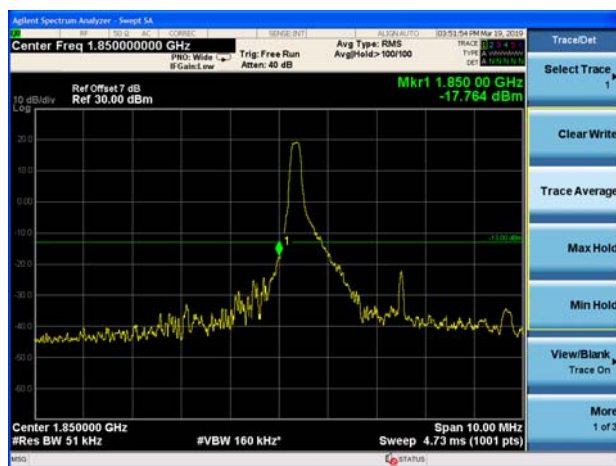

LTE Band 2 5MHz 16QAM 1RB CH-High

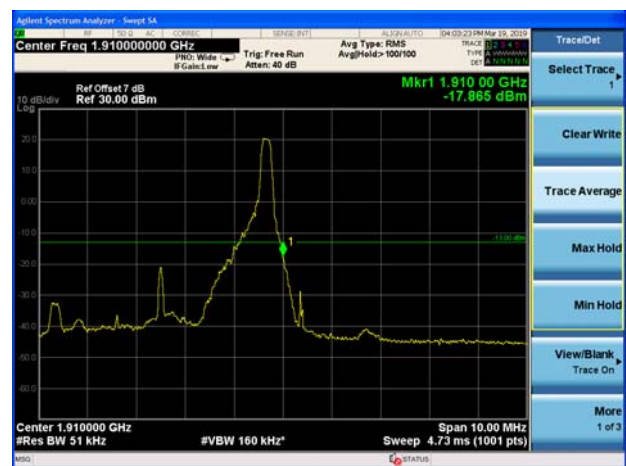


LTE Band 2 5MHz 16QAM 100%RB CH-Low



LTE Band 2 5MHz 16QAM 100%RB CH-High



LTE Band 2 10MHz 16QAM 1RB CH-Low

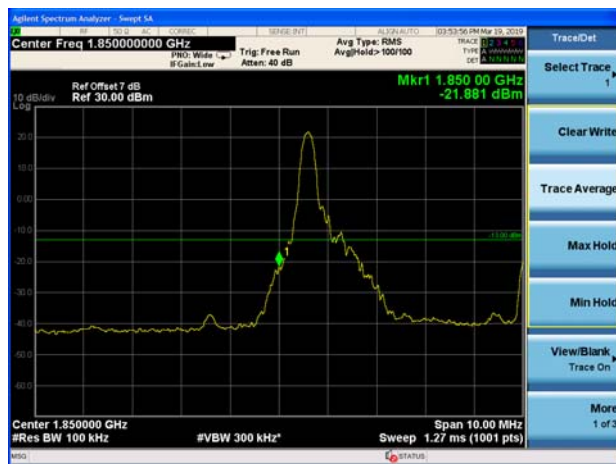

LTE Band 2 10MHz 16QAM 1RB CH-High




LTE Band 2 10MHz 16QAM 100%RB CH-Low




LTE Band 2 10MHz 16QAM 100%RB CH-High



LTE Band 2 15MHz 16QAM 1RB CH-Low

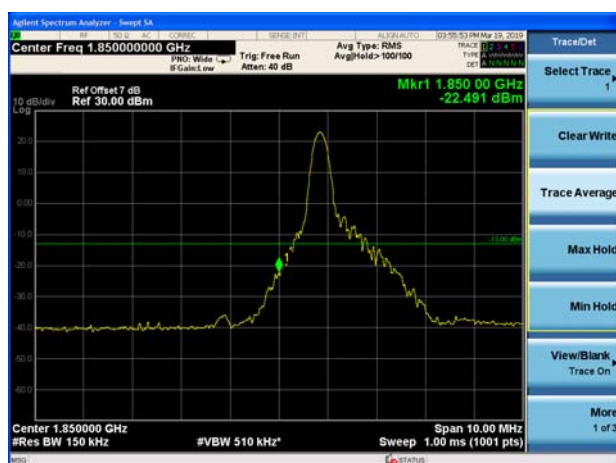

LTE Band 2 15MHz 16QAM 1RB CH-High

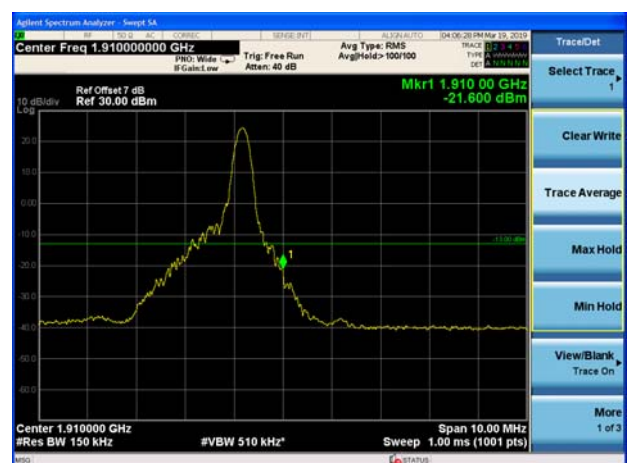

LTE Band 2 15MHz 16QAM 100%RB CH-Low




LTE Band 2 15MHz 16QAM 100%RB CH-High



LTE Band 2 20MHz 16QAM 1RB CH-Low




LTE Band 2 20MHz 16QAM 1RB CH-High

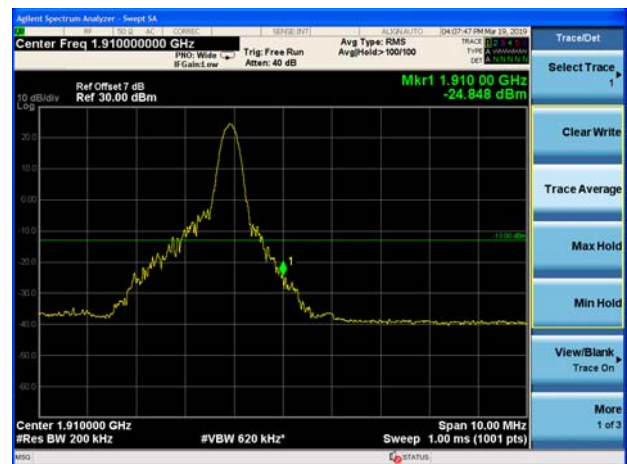

LTE Band 2 20MHz 16QAM 100%RB CH-Low



LTE Band 2 20MHz 16QAM 100%RB CH-High

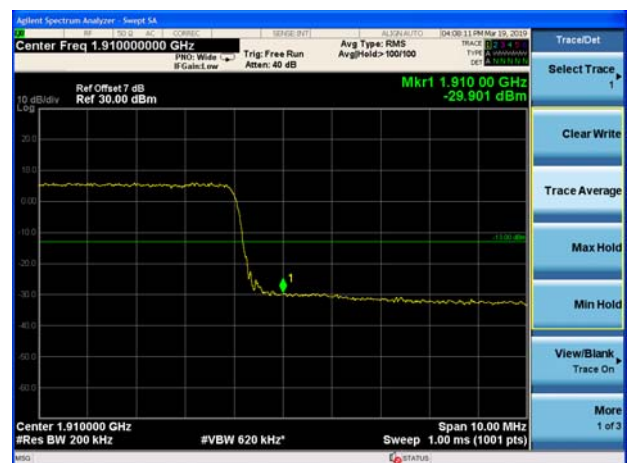

5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

Test Setup

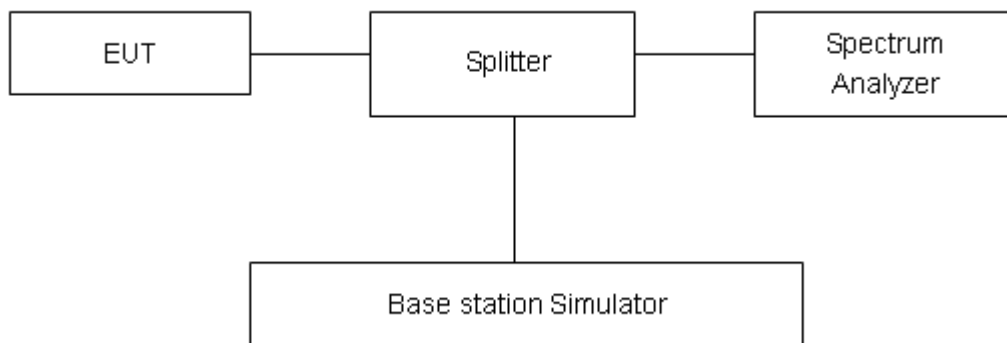

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

**Test Results**

Mode	Channel	Frequency (MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)	Limit(dB)	Conclusion
GSM 1900 (GSM)	512	1850.2	30.87	29.99	0.88	≤13	PASS
	661	1880	30.75	29.79	0.96	≤13	PASS
	810	1909.8	30.58	29.68	0.90	≤13	PASS
GPRS 1900 (GMSK)	512	1850.2	27.09	26.12	0.97	≤13	PASS
	661	1880	27.02	26.01	1.01	≤13	PASS
	810	1909.8	26.91	25.97	0.94	≤13	PASS
EGPRS 1900 (8-PSK)	512	1850.2	24.35	23.34	1.01	≤13	PASS
	661	1880	24.22	23.27	0.95	≤13	PASS
	810	1909.8	24.09	23.11	0.98	≤13	PASS
WCDMA Band II (RMC)	9262	1852.4	21.48	18.39	3.09	≤13	PASS
	9400	1880	21.73	18.50	3.23	≤13	PASS
	9538	1907.6	21.83	18.55	3.28	≤13	PASS

LTE Band 2								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	18607	1850.7	24.81	19.22	5.59	≤13	PASS
		18900	1880.0	25.18	19.48	5.70	≤13	PASS
		19193	1909.3	25.17	19.39	5.78	≤13	PASS
	3	18615	1851.5	24.71	19.07	5.64	≤13	PASS
		18900	1880	25.08	19.35	5.73	≤13	PASS
		19185	1908.5	25.15	19.41	5.74	≤13	PASS
	5	18625	1852.5	24.74	19.06	5.68	≤13	PASS
		18900	1880	25.09	19.23	5.86	≤13	PASS
		19175	1907.5	25.41	19.64	5.77	≤13	PASS
	10	18650	1855	25.03	19.39	5.64	≤13	PASS
		18900	1880	25.06	19.25	5.81	≤13	PASS
		19150	1905	25.13	19.41	5.72	≤13	PASS
	15	18675	1857.5	25.09	19.12	5.97	≤13	PASS
		18900	1880	25.42	19.23	6.19	≤13	PASS
		19125	1902.5	25.60	19.50	6.10	≤13	PASS
	20	18700	1860	24.90	19.21	5.69	≤13	PASS
		18900	1880	25.19	19.32	5.87	≤13	PASS
		19100	1900	25.29	19.46	5.83	≤13	PASS
16QAM	1.4	18607	1850.7	25.33	19.27	6.06	≤13	PASS
		18900	1880.0	26.01	19.57	6.44	≤13	PASS
		19193	1909.3	25.26	18.92	6.34	≤13	PASS
	3	18615	1851.5	25.14	18.92	6.22	≤13	PASS
		18900	1880	25.62	19.18	6.44	≤13	PASS
		19185	1908.5	25.84	19.46	6.38	≤13	PASS
	5	18625	1852.5	25.25	19.10	6.15	≤13	PASS
		18900	1880	25.76	19.35	6.41	≤13	PASS
		19175	1907.5	26.14	19.78	6.36	≤13	PASS
	10	18650	1855	25.32	19.13	6.19	≤13	PASS
		18900	1880	25.69	19.26	6.43	≤13	PASS
		19150	1905	25.75	19.46	6.29	≤13	PASS
	15	18675	1857.5	25.32	19.05	6.27	≤13	PASS
		18900	1880	25.77	19.25	6.52	≤13	PASS
		19125	1902.5	25.82	19.44	6.38	≤13	PASS
	20	18700	1860	25.38	19.12	6.26	≤13	PASS
		18900	1880	25.78	19.30	6.48	≤13	PASS
		19100	1900	25.96	19.56	6.40	≤13	PASS

5.6.Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.4 V, with a nominal voltage of 3.82V.

Test setup

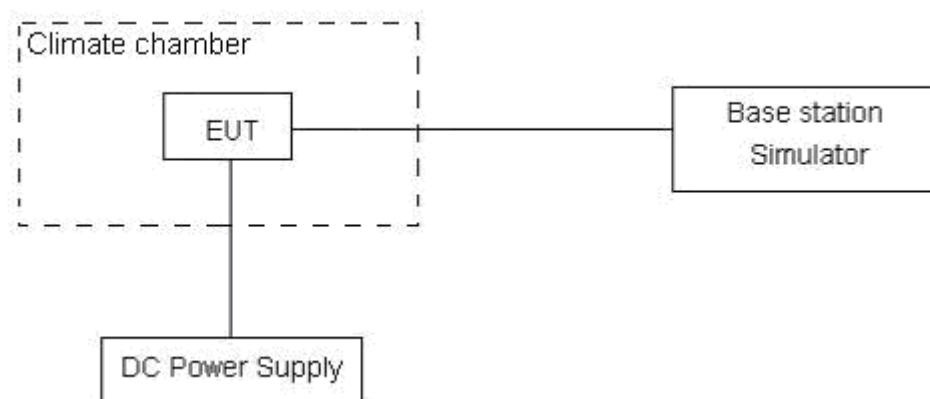

Limits

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Result

GSM1900						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage					
Normal (25℃)	Normal	11.79	17.18	0.00627	0.00914	PASS
Extreme (55℃)		9.22	7.30	0.00490	0.00389	PASS
Extreme (50℃)		2.13	9.88	0.00113	0.00525	PASS
Extreme (40℃)		17.24	13.47	0.00917	0.00716	PASS
Extreme (30℃)		8.30	15.41	0.00442	0.00820	PASS
Extreme (20℃)		3.23	9.63	0.00172	0.00512	PASS
Extreme (10℃)		14.91	11.20	0.00793	0.00596	PASS
Extreme (0℃)		16.12	2.57	0.00857	0.00137	PASS
Extreme (-10℃)		8.14	9.84	0.00433	0.00524	PASS
Extreme (-20℃)		5.03	13.98	0.00268	0.00743	PASS
Extreme (-30℃)		16.84	6.50	0.00896	0.00345	PASS
25℃	LV	15.68	14.56	0.00834	0.00774	PASS
	HV	14.91	2.48	0.00793	0.00132	PASS

WCDMA Band II						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage					
Normal (25℃)	Normal	7.50	11.66	0.00399	0.00620	PASS
Extreme (55℃)		3.87	4.75	0.00206	0.00253	PASS
Extreme (50℃)		5.81	5.93	0.00309	0.00316	PASS
Extreme (40℃)		3.97	14.47	0.00211	0.00769	PASS
Extreme (30℃)		15.79	3.00	0.00840	0.00160	PASS
Extreme (20℃)		12.28	11.92	0.00653	0.00634	PASS
Extreme (10℃)		14.69	16.20	0.00781	0.00862	PASS
Extreme (0℃)		7.21	11.91	0.00383	0.00634	PASS
Extreme (-10℃)		12.46	11.10	0.00663	0.00590	PASS
Extreme (-20℃)		3.25	10.17	0.00173	0.00541	PASS
Extreme (-30℃)		6.16	9.43	0.00328	0.00502	PASS
25℃	LV	11.14	10.04	0.00592	0.00534	PASS
	HV	7.24	4.92	0.00385	0.00262	PASS

LTE Band 2, BANDWIDTH 1.4MHz						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	10.64	4.53	0.00566	0.00241	
Extreme (55℃)		13.93	12.92	0.00741	0.00687	
Extreme (50℃)		9.71	14.88	0.00516	0.00791	
Extreme (40℃)		14.78	4.50	0.00786	0.00239	
Extreme (30℃)		9.37	2.27	0.00498	0.00121	
Extreme (20℃)		17.36	3.23	0.00923	0.00172	
Extreme (10℃)		13.51	13.53	0.00719	0.00720	
Extreme (0℃)		9.72	2.35	0.00517	0.00125	
Extreme (-10℃)		15.09	5.17	0.00803	0.00275	
Extreme (-20℃)		1.92	11.42	0.00102	0.00607	
Extreme (-30℃)		4.26	17.95	0.00227	0.00955	
25℃	LV	8.45	6.93	0.00449	0.00369	
	HV	10.60	9.60	0.00564	0.00511	

LTE Band 2, BANDWIDTH 3MHz						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	6.76	15.12	0.00360	0.00804	PASS
Extreme (55℃)		14.10	9.93	0.00750	0.00528	PASS
Extreme (50℃)		6.62	9.47	0.00352	0.00504	PASS
Extreme (40℃)		13.86	6.38	0.00737	0.00339	PASS
Extreme (30℃)		14.68	2.25	0.00781	0.00120	PASS
Extreme (20℃)		2.28	14.63	0.00121	0.00778	PASS
Extreme (10℃)		4.74	17.21	0.00252	0.00916	PASS
Extreme (0℃)		5.79	4.45	0.00308	0.00237	PASS
Extreme (-10℃)		1.35	2.21	0.00072	0.00118	PASS
Extreme (-20℃)		5.40	2.72	0.00287	0.00145	PASS
Extreme (-30℃)		2.59	10.43	0.00138	0.00555	PASS
25℃	LV	6.09	4.11	0.00324	0.00219	PASS
	HV	17.18	5.81	0.00914	0.00309	PASS

LTE Band 2, BANDWIDTH 5MHz						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	10.20	3.36	0.00543	0.00179	PASS
Extreme (55℃)		4.10	16.93	0.00218	0.00901	PASS
Extreme (50℃)		10.66	5.96	0.00567	0.00317	PASS
Extreme (40℃)		8.96	13.65	0.00477	0.00726	PASS
Extreme (30℃)		1.30	10.75	0.00069	0.00572	PASS
Extreme (20℃)		1.16	7.29	0.00062	0.00388	PASS
Extreme (10℃)		6.55	10.03	0.00348	0.00534	PASS
Extreme (0℃)		13.10	13.37	0.00697	0.00711	PASS
Extreme (-10℃)		15.35	4.59	0.00816	0.00244	PASS
Extreme (-20℃)		2.72	16.97	0.00145	0.00903	PASS
Extreme (-30℃)		16.66	8.24	0.00886	0.00438	PASS
25℃	LV	3.86	5.81	0.00205	0.00309	PASS
	HV	13.58	15.71	0.00723	0.00835	PASS

LTE Band 2, BANDWIDTH 10MHz						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	12.95	17.33	0.00689	0.00922	PASS
Extreme (55℃)		6.06	7.31	0.00322	0.00389	PASS
Extreme (50℃)		10.71	10.33	0.00570	0.00550	PASS
Extreme (40℃)		6.77	9.44	0.00360	0.00502	PASS
Extreme (30℃)		15.65	15.59	0.00833	0.00829	PASS
Extreme (20℃)		16.75	8.18	0.00891	0.00435	PASS
Extreme (10℃)		14.92	9.99	0.00793	0.00532	PASS
Extreme (0℃)		4.12	2.26	0.00219	0.00120	PASS
Extreme (-10℃)		12.56	8.47	0.00668	0.00450	PASS
Extreme (-20℃)		4.98	1.03	0.00265	0.00055	PASS
Extreme (-30℃)		1.25	3.45	0.00067	0.00183	PASS
25℃	LV	4.88	10.94	0.00259	0.00582	PASS
	HV	12.30	6.61	0.00654	0.00351	PASS

LTE Band 2, BANDWIDTH 15MHz						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	5.72	2.71	0.00304	0.00144	
Extreme (55℃)		15.16	2.44	0.00806	0.00130	
Extreme (50℃)		11.13	6.80	0.00592	0.00362	
Extreme (40℃)		12.26	1.37	0.00652	0.00073	
Extreme (30℃)		9.05	5.31	0.00482	0.00282	
Extreme (20℃)		12.89	2.12	0.00686	0.00113	
Extreme (10℃)		5.37	11.84	0.00286	0.00630	
Extreme (0℃)		9.93	13.70	0.00528	0.00729	
Extreme (-10℃)		14.94	7.47	0.00795	0.00397	
Extreme (-20℃)		12.76	1.51	0.00679	0.00080	
Extreme (-30℃)		3.99	15.41	0.00212	0.00820	
25℃	LV	11.78	2.96	0.00627	0.00157	
	HV	3.27	13.40	0.00174	0.00713	

LTE Band 2, BANDWIDTH 20MHz						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	20MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	14.30	1.23	0.00761	0.00065	PASS
Extreme (55℃)		5.36	10.85	0.00285	0.00577	PASS
Extreme (50℃)		16.06	6.94	0.00854	0.00369	PASS
Extreme (40℃)		11.78	3.58	0.00627	0.00190	PASS
Extreme (30℃)		12.80	16.53	0.00681	0.00879	PASS
Extreme (20℃)		14.91	10.60	0.00793	0.00564	PASS
Extreme (10℃)		4.27	7.09	0.00227	0.00377	PASS
Extreme (0℃)		4.51	16.01	0.00240	0.00852	PASS
Extreme (-10℃)		5.54	11.26	0.00294	0.00599	PASS
Extreme (-20℃)		4.18	16.54	0.00222	0.00880	PASS
Extreme (-30℃)		9.41	12.22	0.00500	0.00650	PASS
25℃	LV	3.60	17.79	0.00191	0.00946	PASS
	HV	3.18	11.85	0.00169	0.00630	PASS

5.7. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

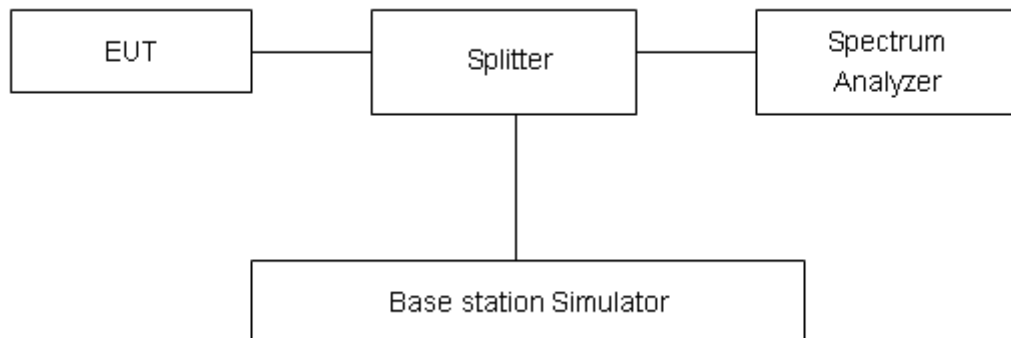

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB

Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

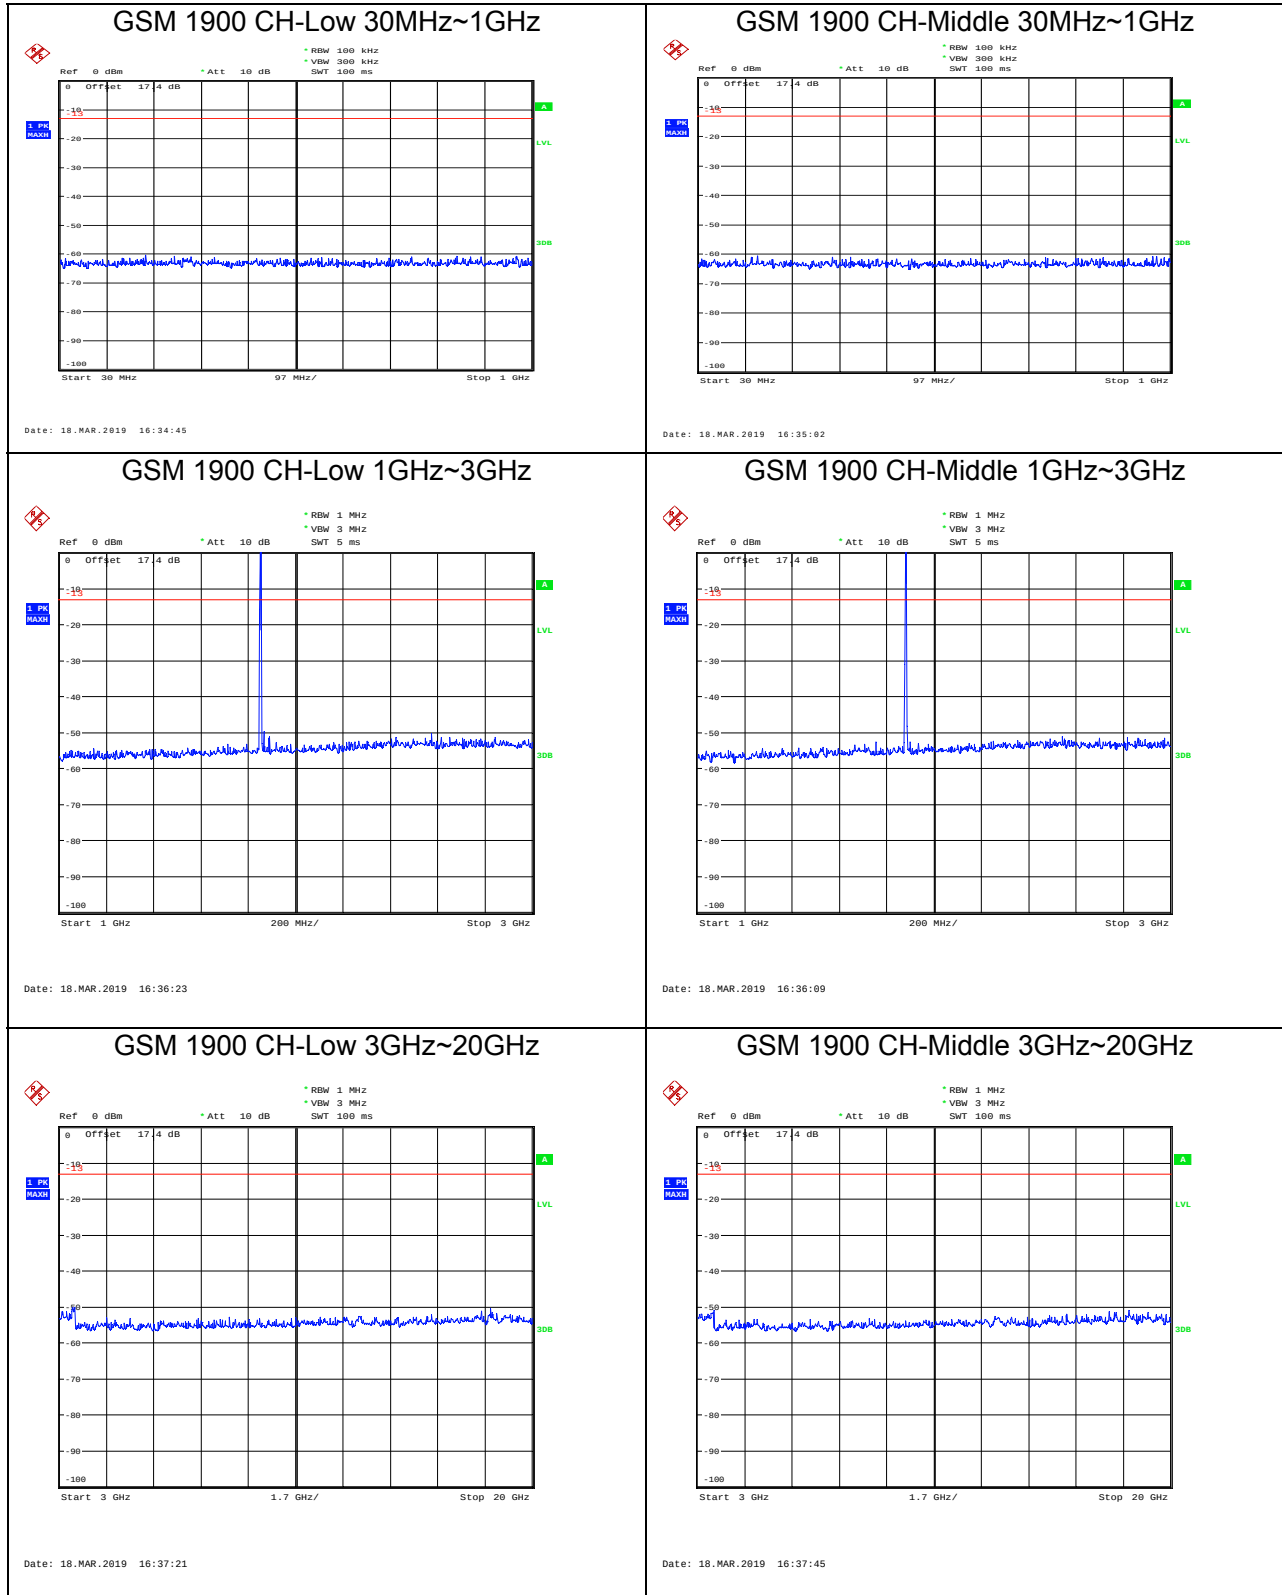




GSM 1900 CH-High 30MHz~1GHz

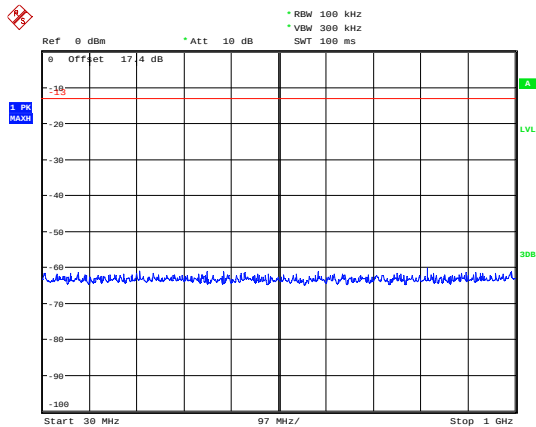


Date: 18.MAR.2019 16:35:16

WCDMA Band II CH-Low 30MHz~1GHz

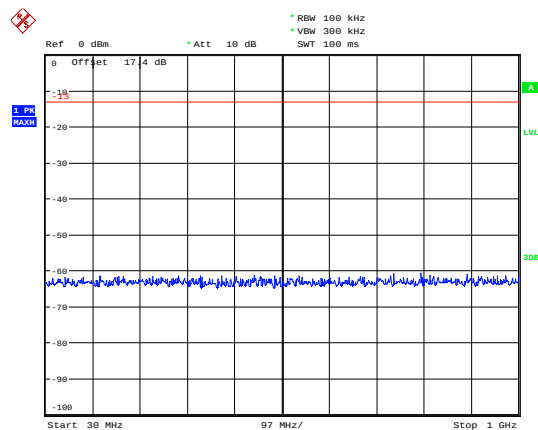


Date: 19.MAR.2019 12:06:24

GSM 1900 CH-High 1GHz~3GHz

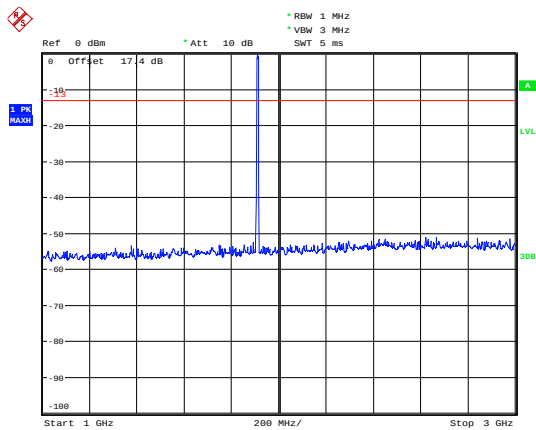


Date: 18.MAR.2019 16:35:42

WCDMA BAND II CH-Low 1GHz~3GHz

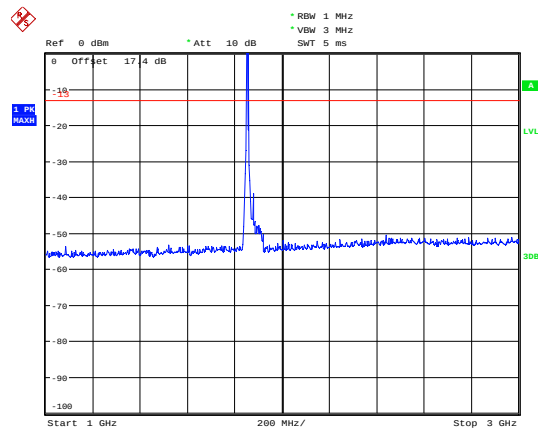


Date: 19.MAR.2019 12:10:36

GSM 1900 CH-High 3GHz~20GHz

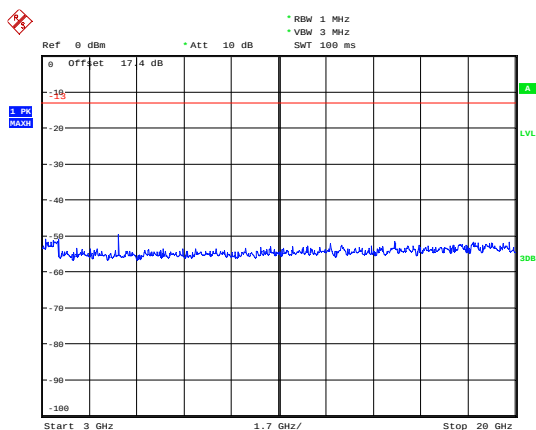

Date: 18.MAR.2019 16:37:57


WCDMA BAND II CH-Low 3GHz~20GHz

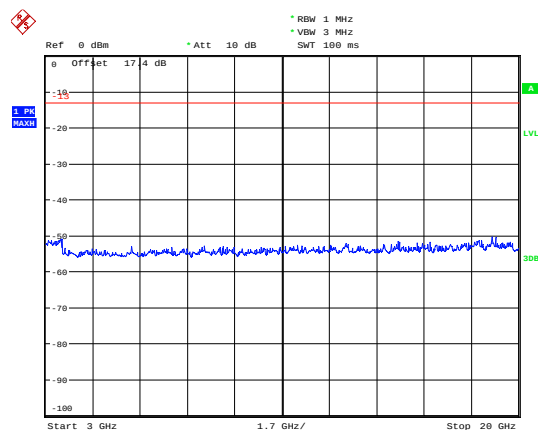

Date: 19.MAR.2019 13:46:26




WCDMA Band II CH- Middle 30MHz~1GHz

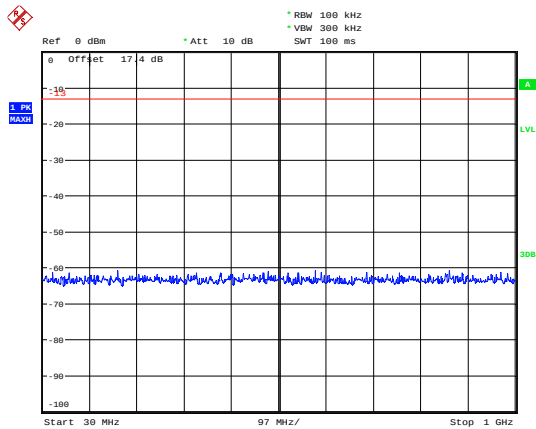


Date: 19.MAR.2019 12:06:42

WCDMA Band II CH- High 30MHz~1GHz

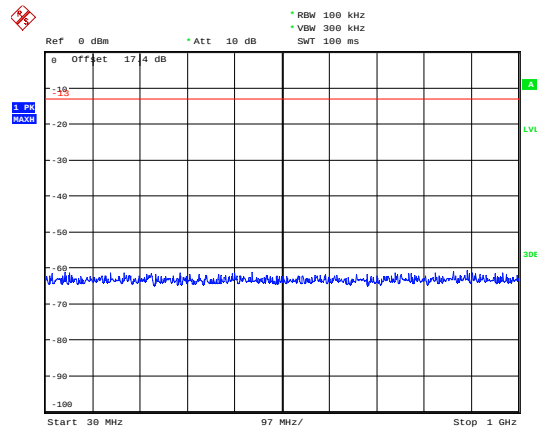


Date: 19.MAR.2019 12:07:16

WCDMA BAND II CH-Middle 1GHz~3GHz

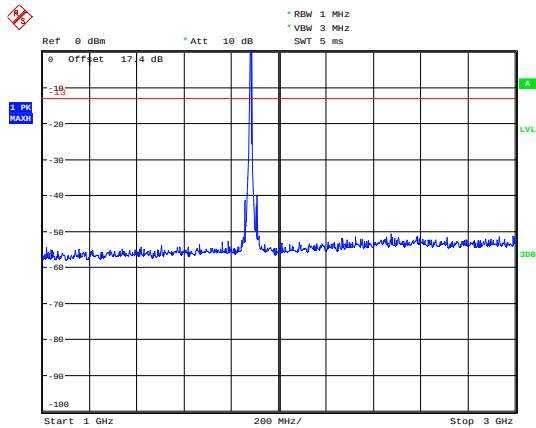


Date: 19.MAR.2019 12:10:55

WCDMA BAND II CH-High 1GHz~3GHz

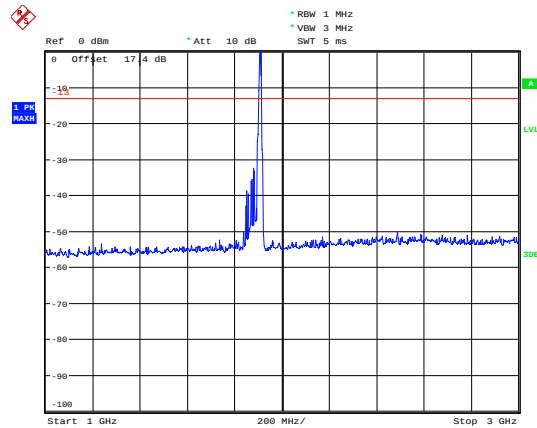


Date: 19.MAR.2019 12:11:20

WCDMA BAND II CH-Middle 3GHz~20GHz

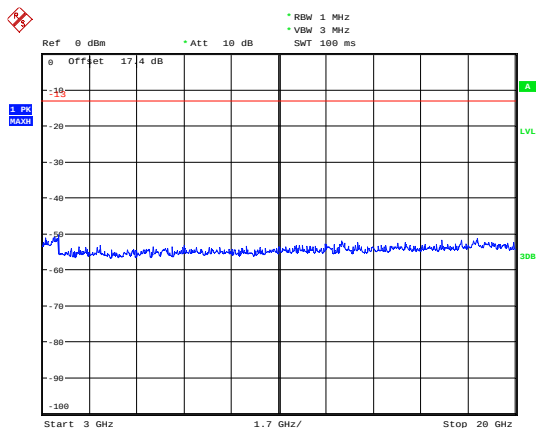

Date: 19.MAR.2019 13:46:53


WCDMA BAND II CH-High 3GHz~20GHz

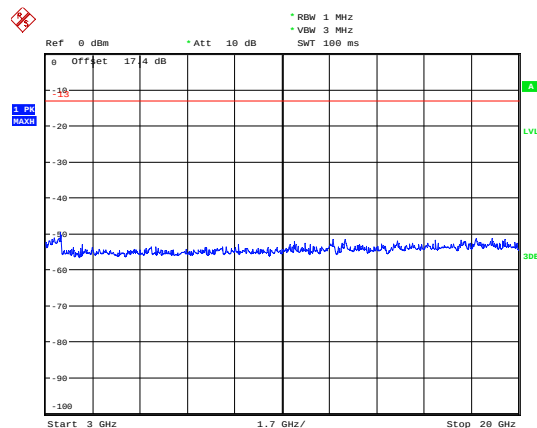

Date: 19.MAR.2019 13:47:11




LTE Band 2 1.4MHz CH-Low 30MHz~1GHz

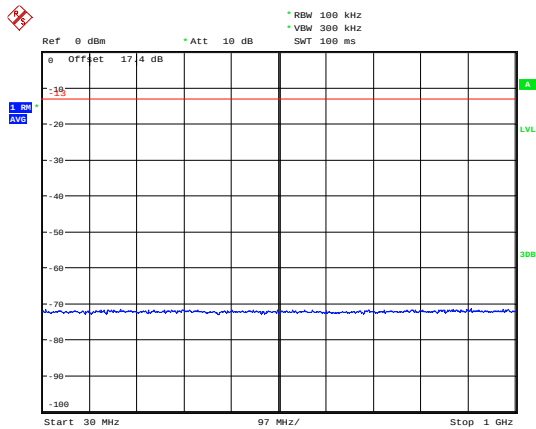


Date: 24.MAR.2019 10:03:16

LTE Band 2 1.4MHz CH-Middle 30MHz~1GHz

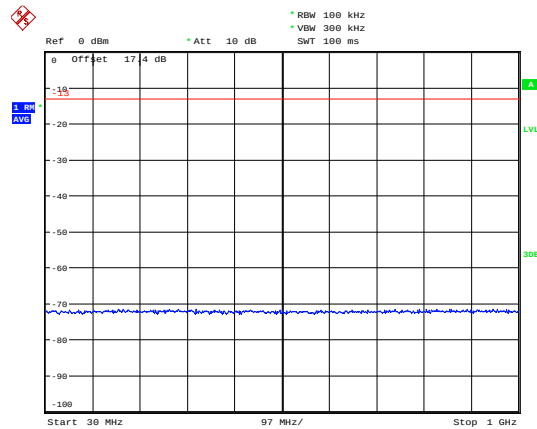


Date: 24.MAR.2019 10:03:41

LTE Band 2 1.4MHz CH-Low 1GHz~3GHz

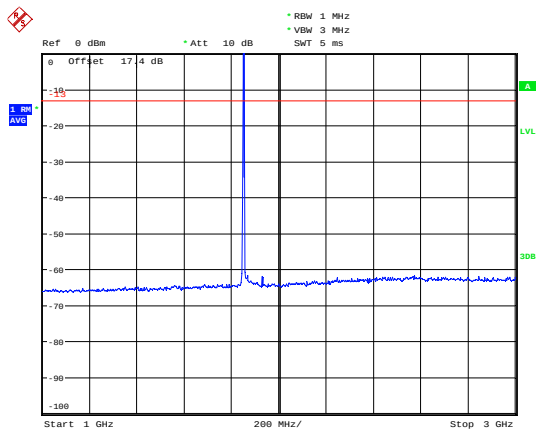


Date: 24.MAR.2019 10:11:20

LTE Band 2 1.4MHz CH-Middle 1GHz~3GHz

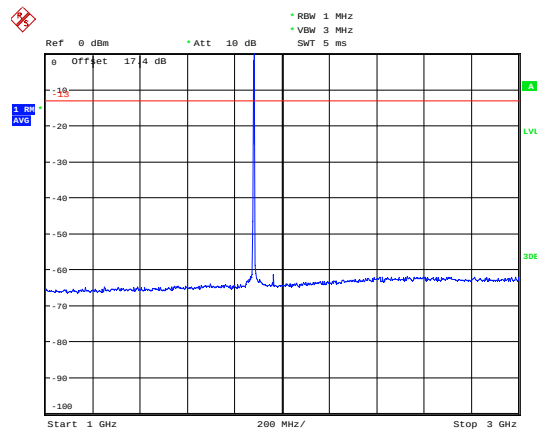


Date: 24.MAR.2019 10:11:33

LTE Band 2 1.4MHz CH-Low 3GHz~20GHz

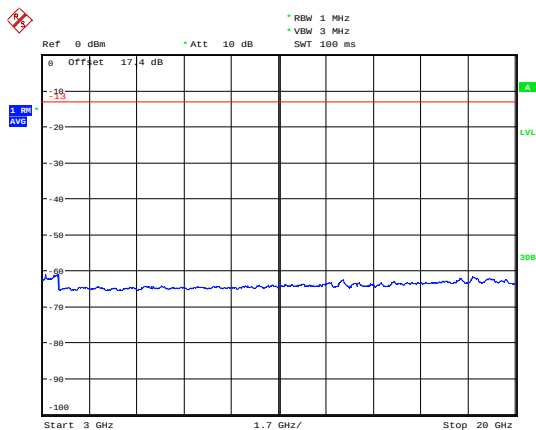

Date: 24.MAR.2019 10:17:28


LTE Band 2 1.4MHz CH-Middle 3GHz~20GHz

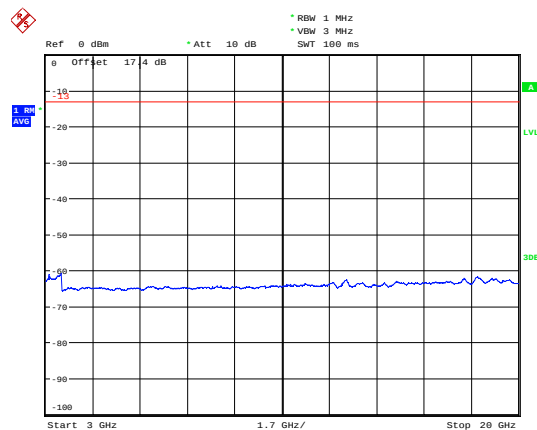

Date: 24.MAR.2019 10:17:42




LTE Band 2 1.4MHz CH-High 30MHz~1GHz

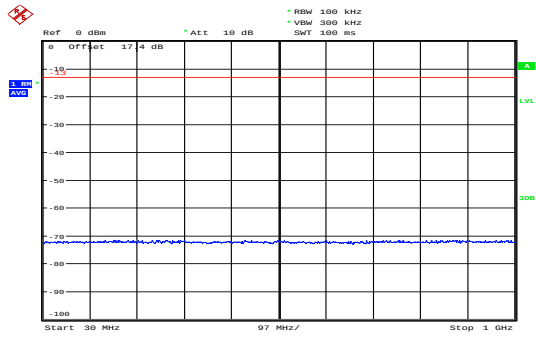


Date: 24.MAR.2019 10:04:07

LTE Band 2 3MHz CH-Low 30MHz~1GHz

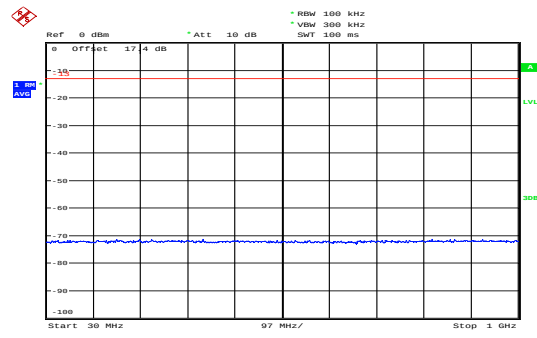


Date: 24.MAR.2019 10:04:39

LTE Band 2 1.4MHz CH-High 1GHz~3GHz

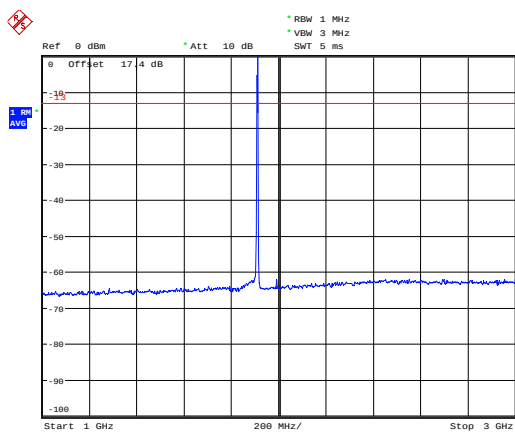


Date: 24.MAR.2019 10:11:46

LTE Band 2 3MHz CH-Low 1GHz~3GHz

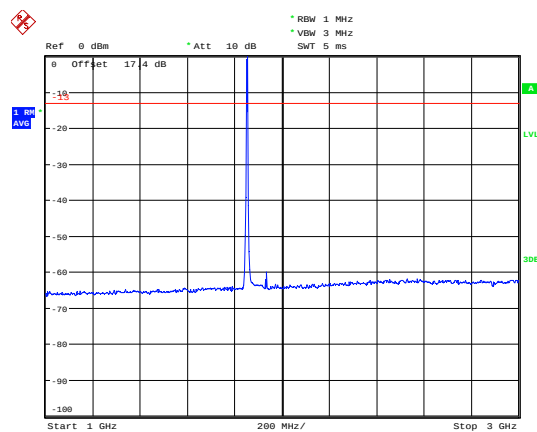


Date: 24.MAR.2019 10:12:12

LTE Band 2 1.4MHz CH-High 3GHz~20GHz

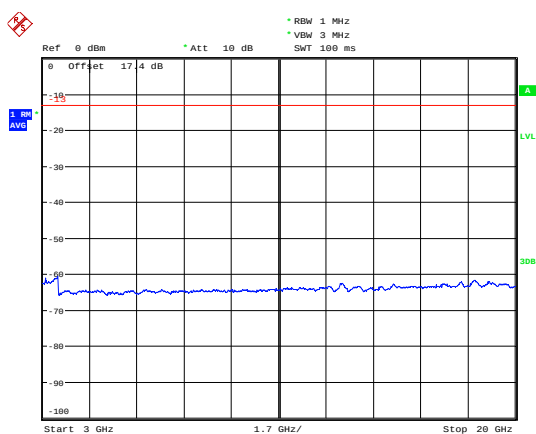

Date: 24.MAR.2019 10:17:56


LTE Band 2 3MHz CH-Low 3GHz~20GHz

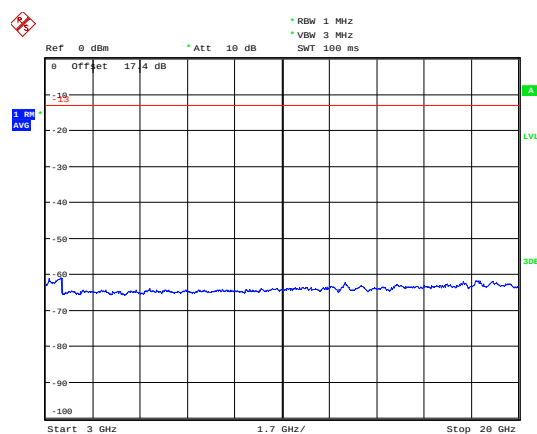

Date: 24.MAR.2019 10:18:21




LTE Band 2 3MHz CH-Middle 30MHz~1GHz

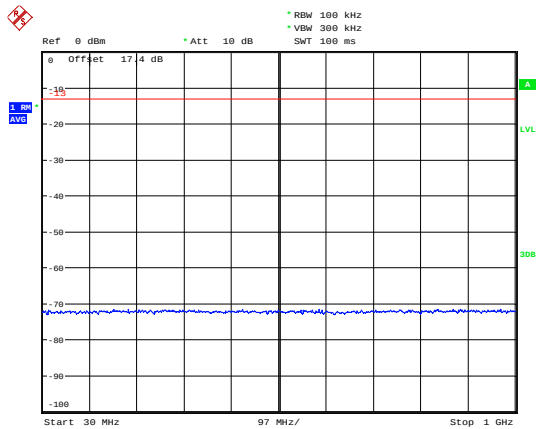


Date: 24.MAR.2019 10:05:18

LTE Band 2 3MHz CH-High 30MHz~1GHz

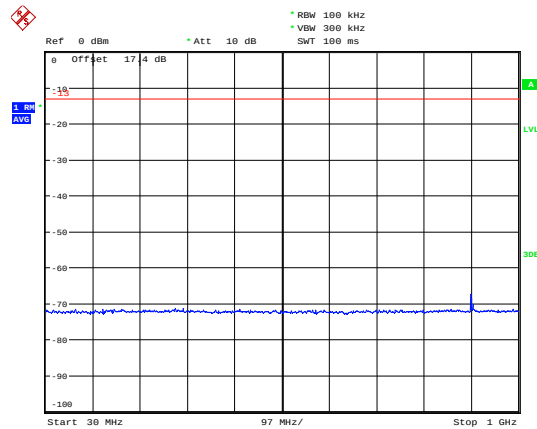


Date: 24.MAR.2019 10:05:38

LTE Band 2 3MHz CH-Middle 1GHz~3GHz

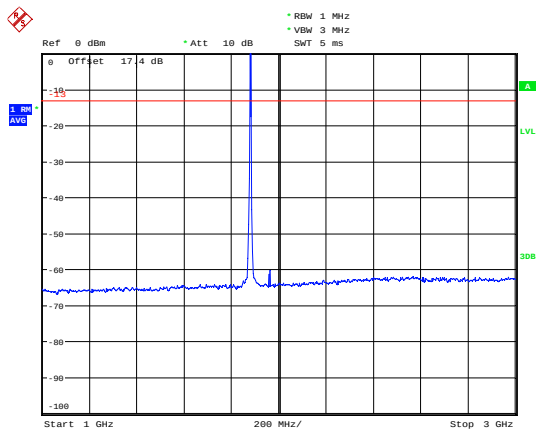


Date: 24.MAR.2019 10:12:27

LTE Band 2 3MHz CH-High 1GHz~3GHz

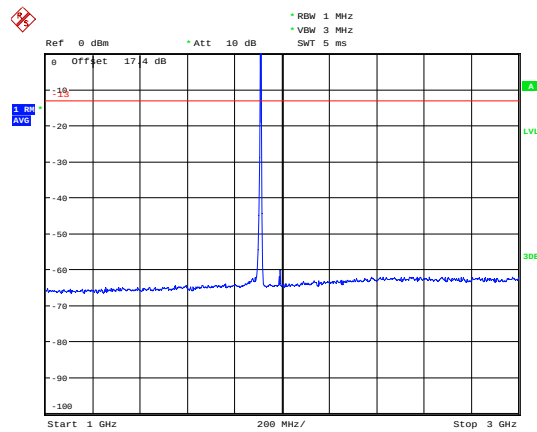


Date: 24.MAR.2019 10:12:41

LTE Band 2 3MHz CH-Middle 3GHz~20GHz

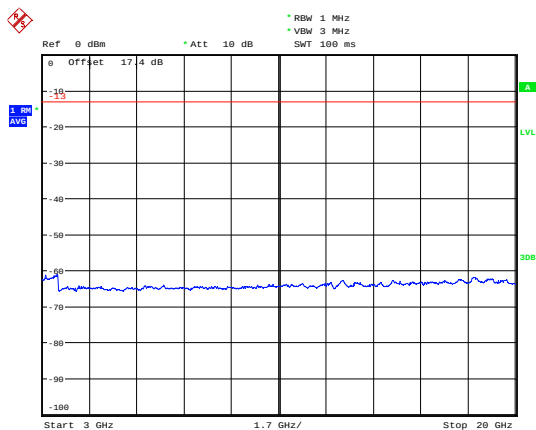

Date: 24.MAR.2019 10:18:31


LTE Band 2 3MHz CH-High 3GHz~20GHz

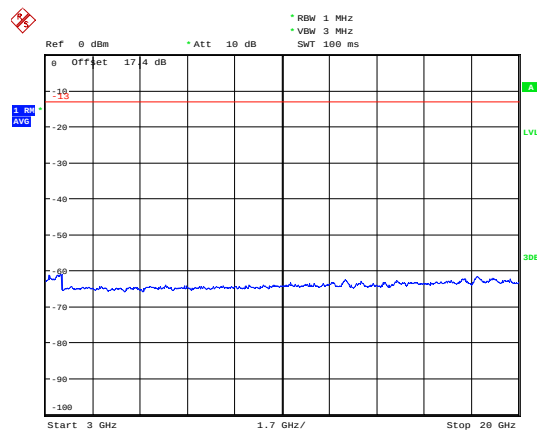

Date: 24.MAR.2019 10:18:45




LTE Band 2 5MHz CH-Low 30MHz~1GHz

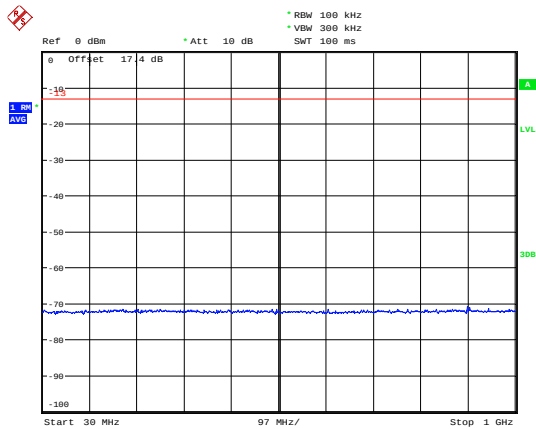


Date: 24.MAR.2019 10:05:56

LTE Band 2 5MHz CH-Middle 30MHz~1GHz

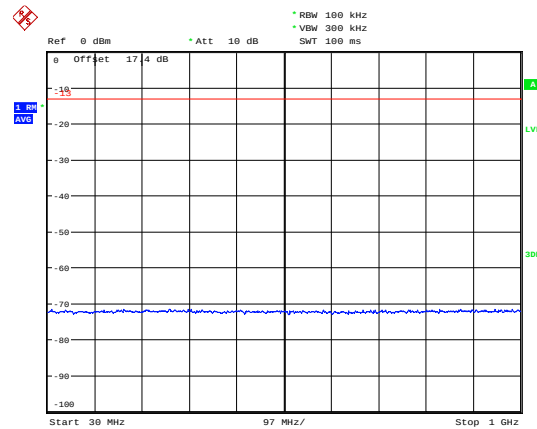


Date: 24.MAR.2019 10:06:59

LTE Band 2 5MHz CH-Low 1GHz~3GHz

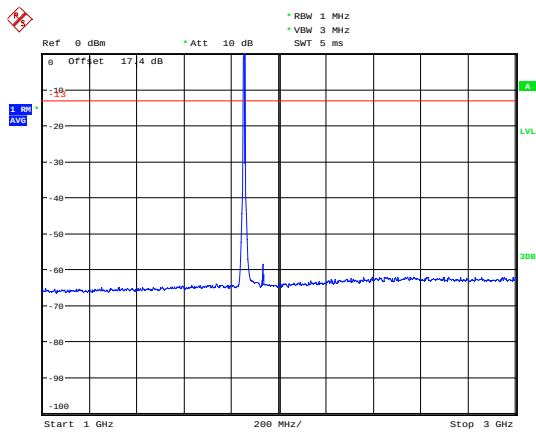


Date: 24.MAR.2019 10:13:09

LTE Band 2 5MHz CH-Middle 1GHz~3GHz

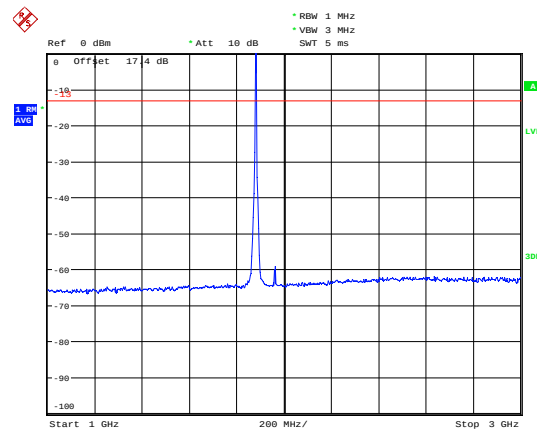


Date: 24.MAR.2019 10:13:22

LTE Band 2 5MHz CH-Low 3GHz~20GHz

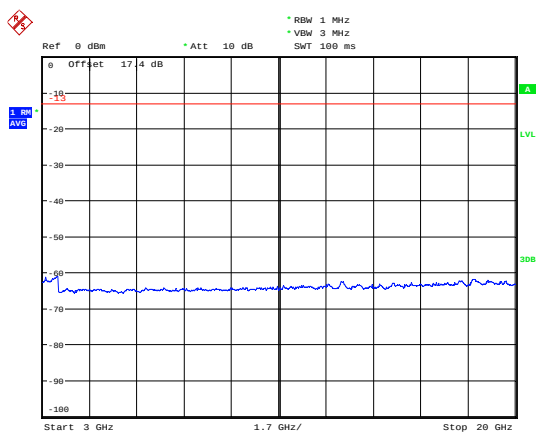

Date: 24.MAR.2019 10:19:03


LTE Band 2 5MHz CH-Middle 3GHz~20GHz

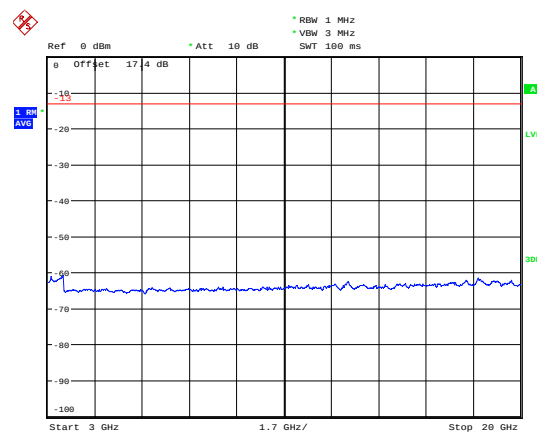

Date: 24.MAR.2019 10:19:24




LTE Band 2 5MHz CH-High 30MHz~1GHz

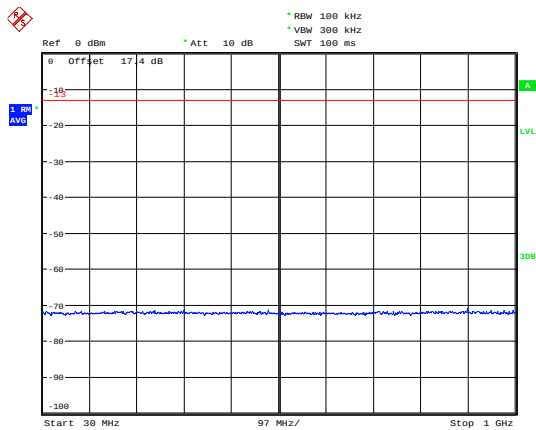


Date: 24.MAR.2019 10:07:21

LTE Band 2 10MHz CH-Low 30MHz~1GHz

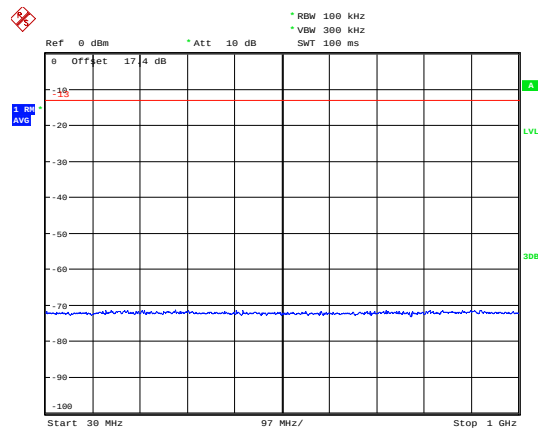


Date: 24.MAR.2019 10:07:40

LTE Band 2 5MHz CH-High 1GHz~3GHz

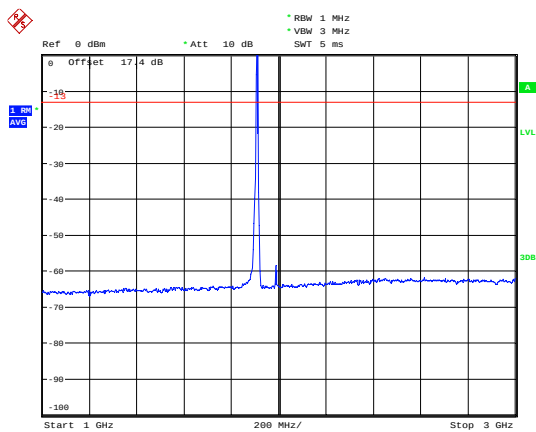


Date: 24.MAR.2019 10:13:34

LTE Band 2 10MHz CH-Low 1GHz~3GHz

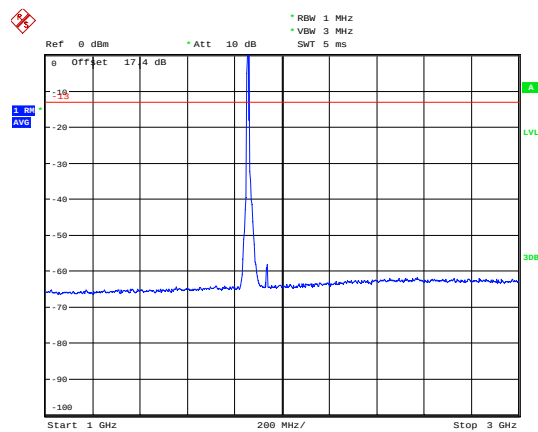


Date: 24.MAR.2019 10:13:59

LTE Band 2 5MHz CH-High 3GHz~20GHz

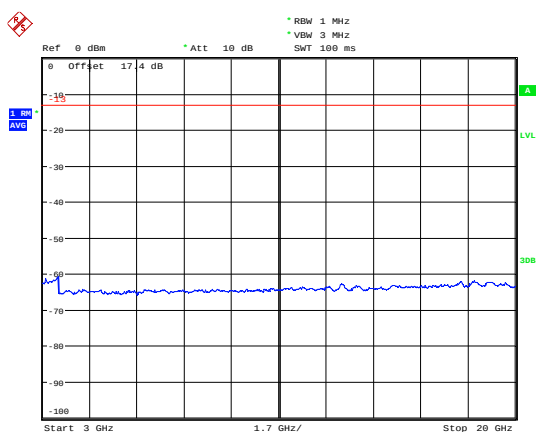

Date: 24.MAR.2019 10:19:39


LTE Band 2 10MHz CH-Low 3GHz~20GHz

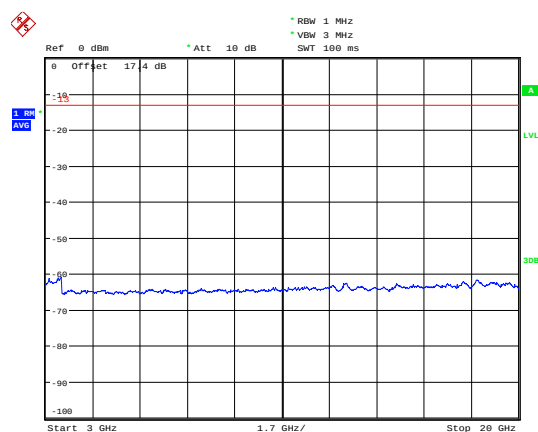

Date: 24.MAR.2019 10:20:11




LTE Band 2 10MHz CH-Middle 30MHz~1GHz

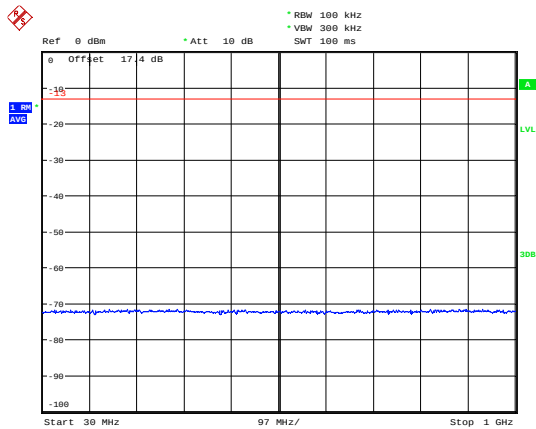


Date: 24.MAR.2019 10:07:57

LTE Band 2 10MHz CH-High 30MHz~1GHz

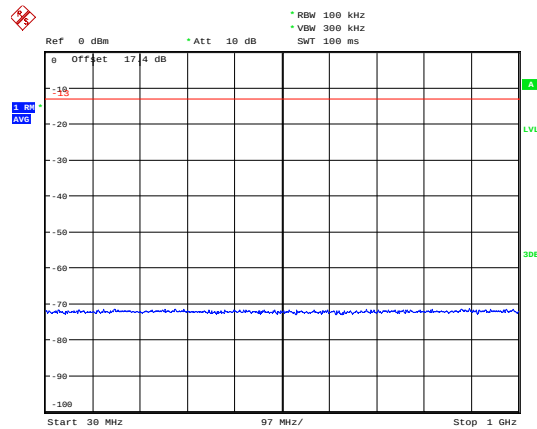


Date: 24.MAR.2019 10:08:27

LTE Band 2 10MHz CH-Middle 1GHz~3GHz

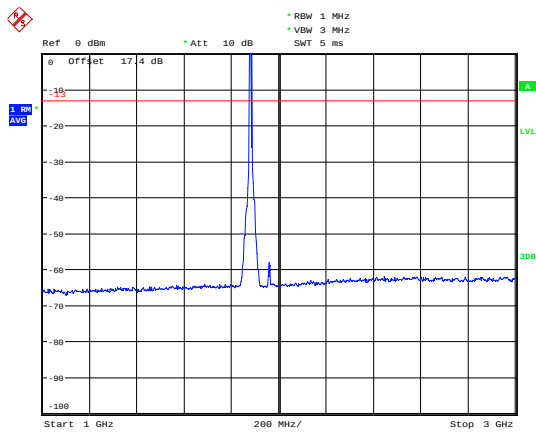


Date: 24.MAR.2019 10:14:09

LTE Band 2 10MHz CH-High 1GHz~3GHz

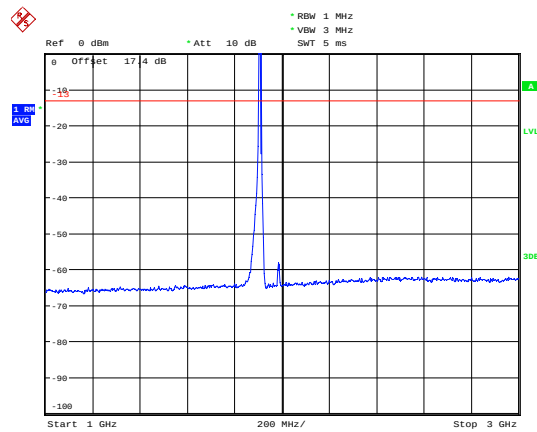


Date: 24.MAR.2019 10:14:35

LTE Band 2 10MHz CH-Middle 3GHz~20GHz

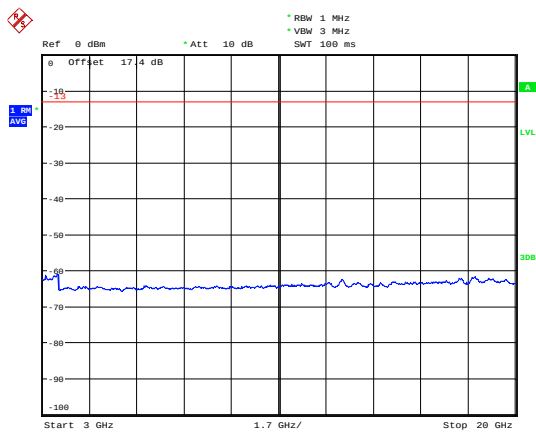

Date: 24.MAR.2019 10:20:24


LTE Band 2 10MHz CH-High 3GHz~20GHz

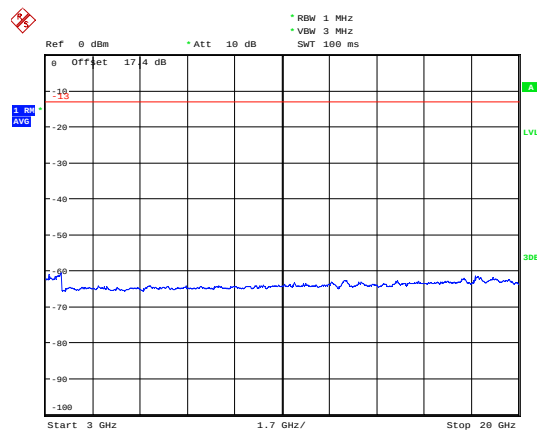

Date: 24.MAR.2019 10:20:46




LTE Band 2 15MHz CH-Low 30MHz~1GHz

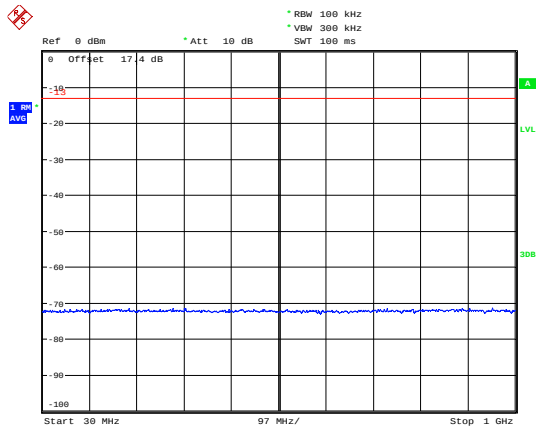


Date: 24.MAR.2019 10:08:51

LTE Band 2 15MHz CH-Middle 30MHz~1GHz

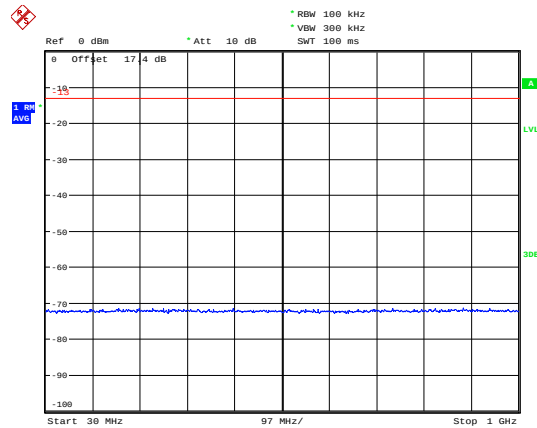


Date: 24.MAR.2019 10:09:08

LTE Band 2 15MHz CH-Low 1GHz~3GHz

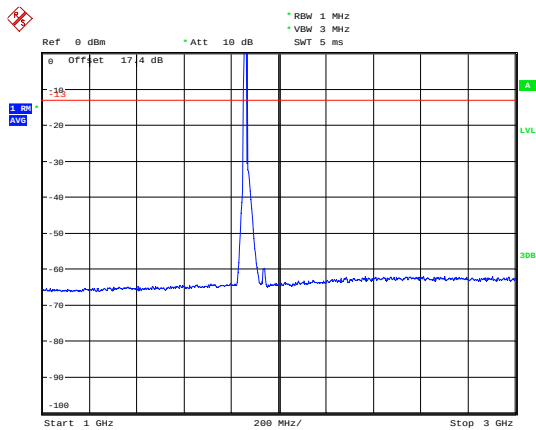


Date: 24.MAR.2019 10:14:57

LTE Band 2 15MHz CH-Middle 1GHz~3GHz

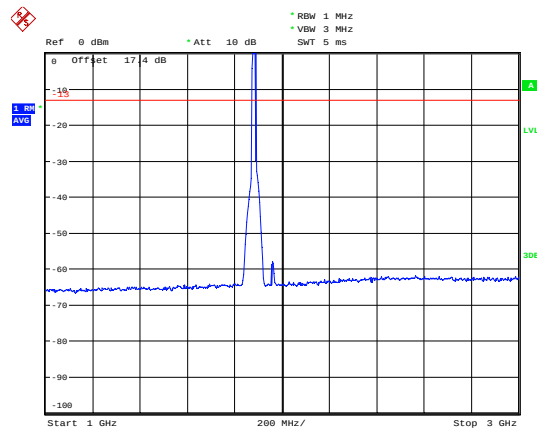


Date: 24.MAR.2019 10:15:08

LTE Band 2 15MHz CH-Low 3GHz~20GHz

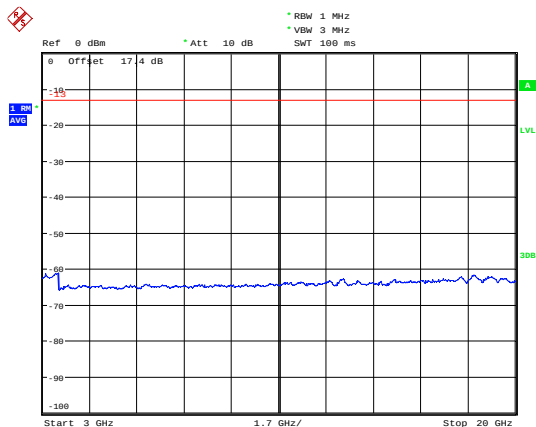

Date: 24.MAR.2019 10:21:06


LTE Band 2 15MHz CH-Middle 3GHz~20GHz

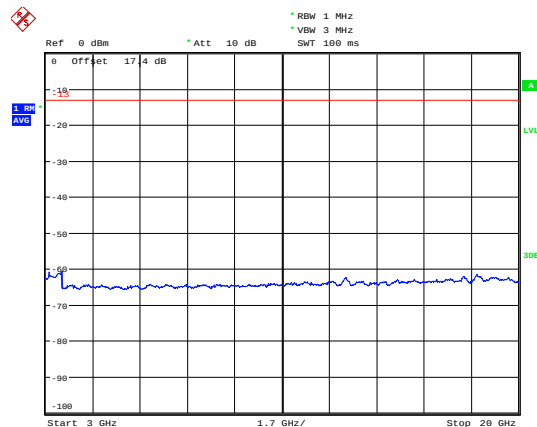

Date: 24.MAR.2019 10:21:19




LTE Band 2 15MHz CH-High 30MHz~1GHz

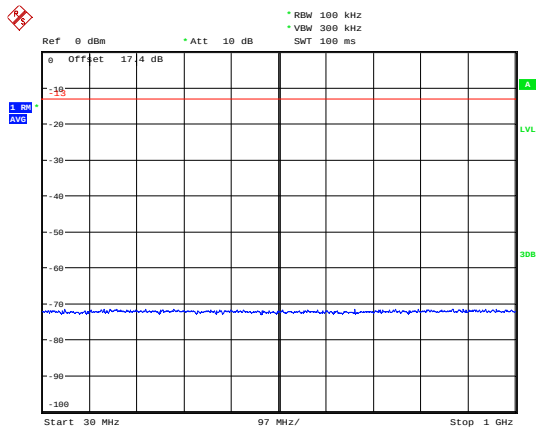


Date: 24.MAR.2019 10:09:17

LTE Band 2 20MHz CH-Low 30MHz~1GHz

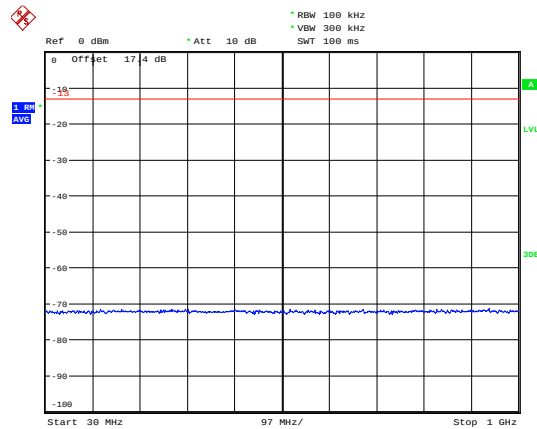


Date: 24.MAR.2019 10:09:40

LTE Band 2 15MHz CH-High 1GHz~3GHz

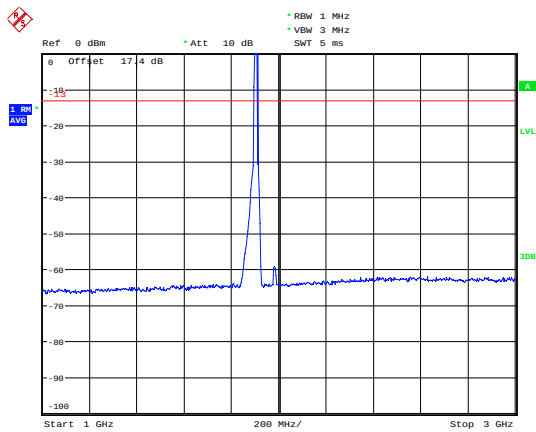


Date: 24.MAR.2019 10:15:22

LTE Band 2 20MHz CH-Low 1GHz~3GHz

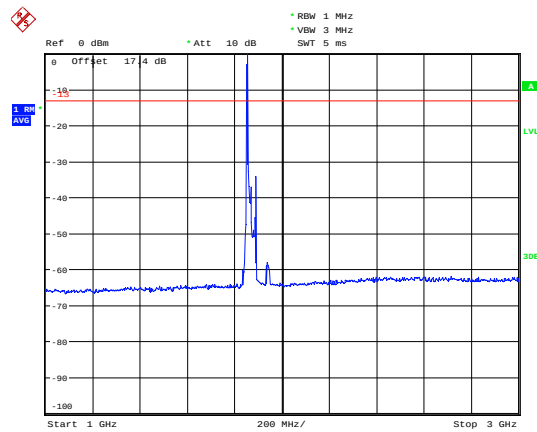


Date: 24.MAR.2019 10:15:45

LTE Band 2 15MHz CH-High 3GHz~20GHz

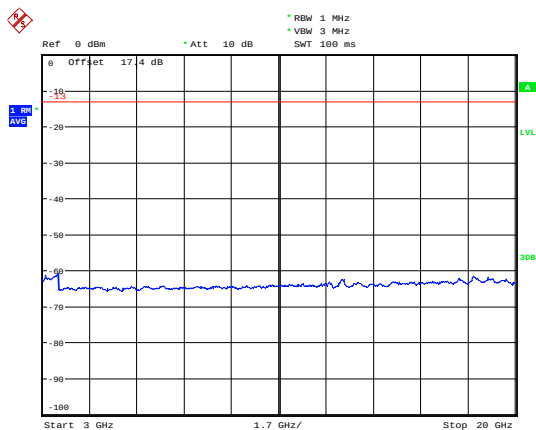

Date: 24.MAR.2019 10:21:33


LTE Band 2 20MHz CH-Low 3GHz~20GHz

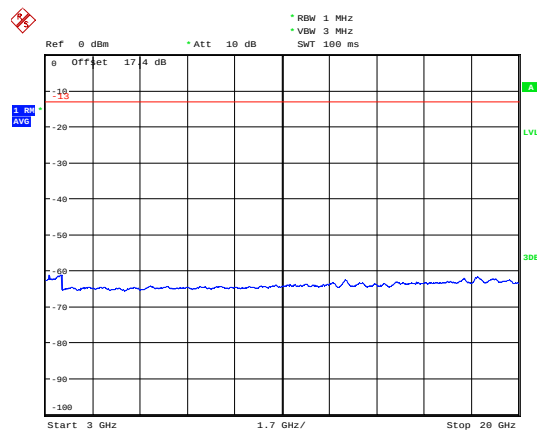

Date: 24.MAR.2019 10:16:54




LTE Band 2 20MHz CH-Middle 30MHz~1GHz

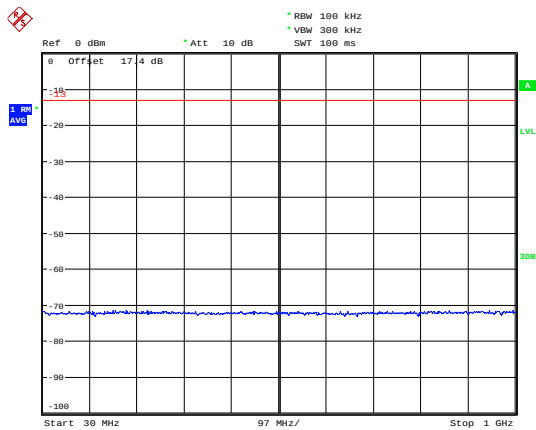


Date: 24.MAR.2019 10:09:52

LTE Band 2 20MHz CH-High 30MHz~1GHz

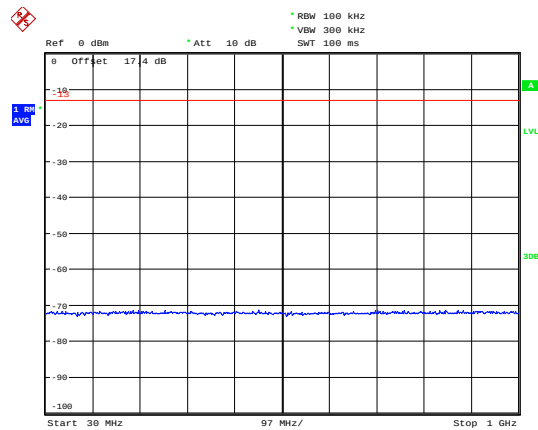


Date: 24.MAR.2019 10:10:01

LTE Band 2 20MHz CH-Middle 1GHz~3GHz

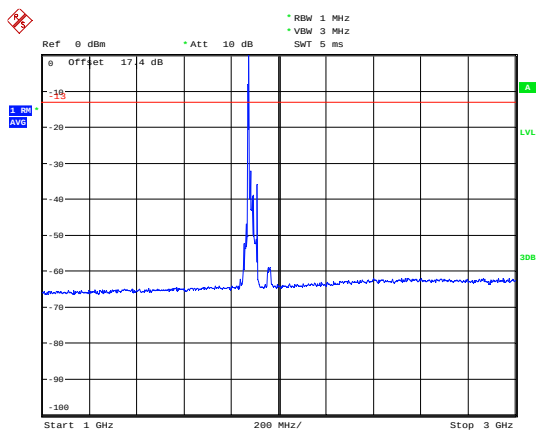


Date: 24.MAR.2019 10:15:56

LTE Band 2 20MHz CH-High 1GHz~3GHz

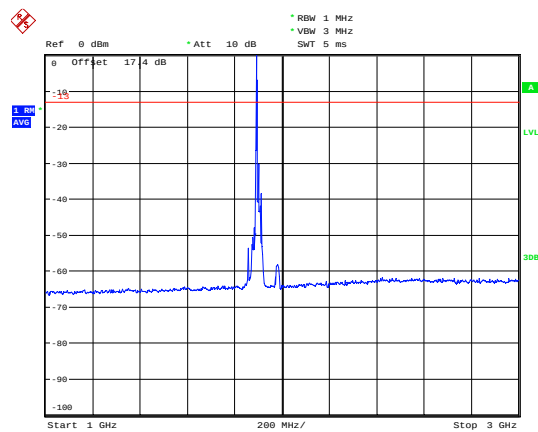


Date: 24.MAR.2019 10:16:08

LTE Band 2 20MHz CH-Middle 3GHz~20GHz

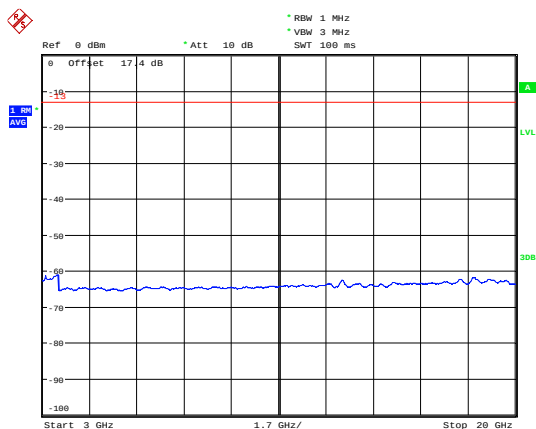

Date: 24.MAR.2019 10:16:37

LTE Band 2 20MHz CH-High 3GHz~20GHz

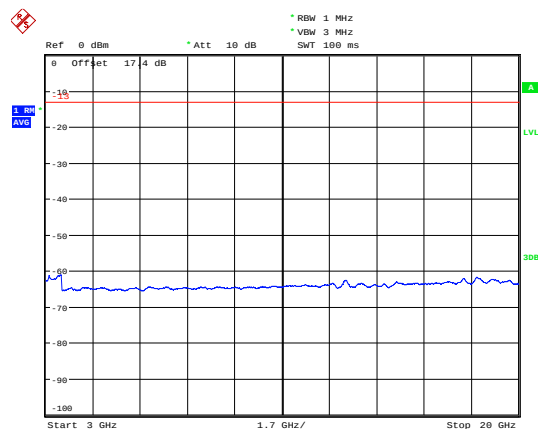

Date: 24.MAR.2019 10:16:25

5.8.Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

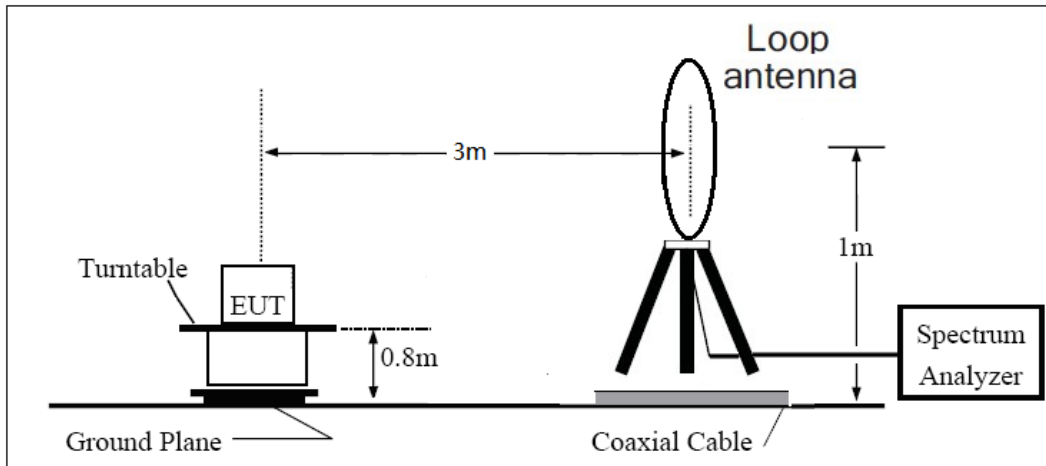

30MHz ~ 1GHz

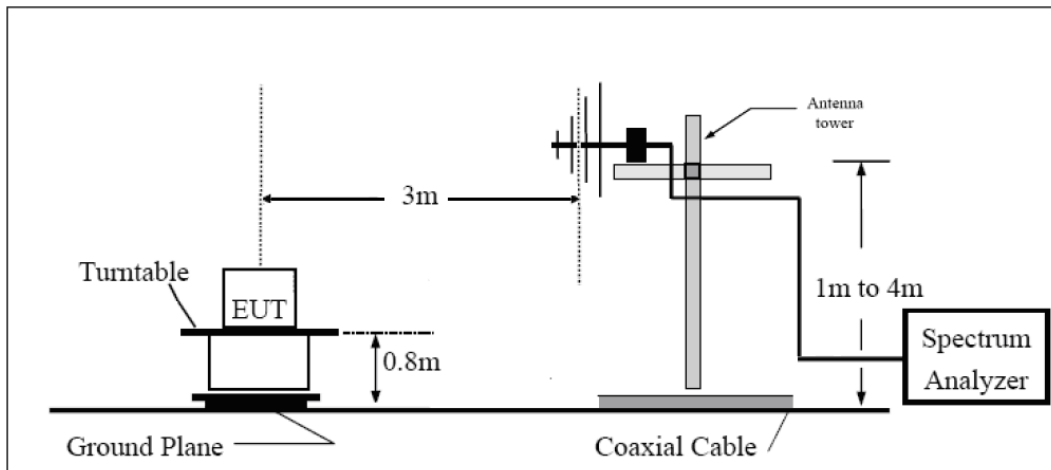

Above 1GHz

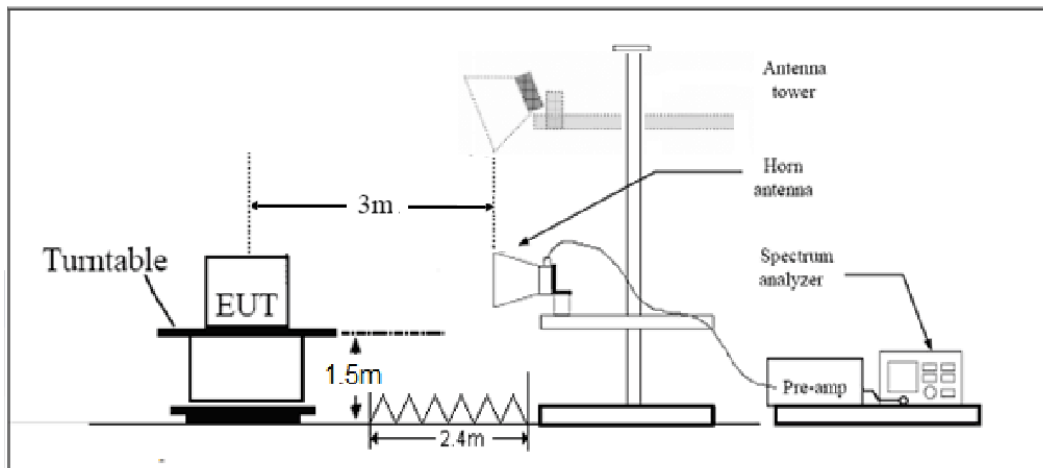



Note: Area side: 2.4mX3.6m

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

GSM 1900 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.9	-63.10	5.10	11.05	Horizontal	-57.15	-13.00	44.15	135
3	5640.2	-61.11	5.42	12.65	Horizontal	-53.88	-13.00	40.88	225
4	7519.5	-55.66	6.70	13.85	Horizontal	-48.51	-13.00	35.51	90
5	9402.8	-55.49	7.01	14.75	Horizontal	-47.75	-13.00	34.75	180
6	11279.3	-52.47	7.48	15.95	Horizontal	-44.00	-13.00	31.00	45
7	13159.1	-53.80	7.51	16.55	Horizontal	-44.76	-13.00	31.76	0
8	15041.3	-51.84	8.24	15.35	Horizontal	-44.73	-13.00	31.73	270
9	16922.3	-50.49	8.41	14.95	Horizontal	-43.95	-13.00	30.95	135
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

WCDMA Band II CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-59.54	5.10	11.05	Horizontal	-53.59	-13.00	40.59	45
3	5640.0	-61.78	5.42	12.65	Horizontal	-54.55	-13.00	41.55	270
4	7520.0	-56.87	6.70	13.85	Horizontal	-49.72	-13.00	36.72	90
5	9400.0	-54.84	7.01	14.75	Horizontal	-47.10	-13.00	34.10	0
6	11280.0	-52.57	7.48	15.95	Horizontal	-44.10	-13.00	31.10	315
7	13160.0	-54.04	7.51	16.55	Horizontal	-45.00	-13.00	32.00	225
8	15040.0	-52.71	8.24	15.35	Horizontal	-45.60	-13.00	32.60	180
9	16920.0	-52.33	8.41	14.95	Horizontal	-45.79	-13.00	32.79	135
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.0	-58.76	5.10	11.05	Horizontal	-52.81	-13.00	39.81	90
3	5638.9	-60.92	5.42	12.65	Horizontal	-53.69	-13.00	40.69	225
4	7520.0	-54.82	6.70	13.85	Horizontal	-47.67	-13.00	34.67	135
5	9400.0	-54.49	7.01	14.75	Horizontal	-46.75	-13.00	33.75	180
6	11280.0	-52.17	7.48	15.95	Horizontal	-43.70	-13.00	30.70	45
7	13160.0	-51.23	7.51	16.55	Horizontal	-42.19	-13.00	29.19	225
8	15040.0	-53.36	8.24	15.35	Horizontal	-46.25	-13.00	33.25	315
9	16920.0	-49.44	8.41	14.95	Horizontal	-42.90	-13.00	29.90	180
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-61.05	5.10	11.05	Horizontal	-55.10	-13.00	42.10	90
3	5640.0	-60.33	5.42	12.65	Horizontal	-53.10	-13.00	40.10	45
4	7520.0	-56.46	6.70	13.85	Horizontal	-49.31	-13.00	36.31	225
5	9400.0	-53.93	7.01	14.75	Horizontal	-46.19	-13.00	33.19	135
6	11280.0	-52.81	7.48	15.95	Horizontal	-44.34	-13.00	31.34	0
7	13160.0	-53.84	7.51	16.55	Horizontal	-44.80	-13.00	31.80	180
8	15040.0	-52.33	8.24	15.35	Horizontal	-45.22	-13.00	32.22	270
9	16920.0	-49.10	8.41	14.95	Horizontal	-42.56	-13.00	29.56	135
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-58.50	5.10	11.05	Horizontal	-52.55	-13.00	39.55	270
3	5640.0	-60.31	5.42	12.65	Horizontal	-53.08	-13.00	40.08	135
4	7520.0	-54.90	6.70	13.85	Horizontal	-47.75	-13.00	34.75	315
5	9400.0	-54.51	7.01	14.75	Horizontal	-46.77	-13.00	33.77	225
6	11280.0	-52.76	7.48	15.95	Horizontal	-44.29	-13.00	31.29	90
7	13160.0	-53.15	7.51	16.55	Horizontal	-44.11	-13.00	31.11	0
8	15040.0	-52.99	8.24	15.35	Horizontal	-45.88	-13.00	32.88	45
9	16920.0	-49.98	8.41	14.95	Horizontal	-43.44	-13.00	30.44	90
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2018-05-13	2019-05-12
Base Station Simulator	R&S	CMW500	113824	2018-05-20	2019-05-19
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2018-05-20	2019-05-19
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2018-05-20	2019-05-19
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2018-05-20	2019-05-19
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-07	2019-05-06
RF Cable	Agilent	SMA 15cm	0001	2019-03-15	2019-06-14
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****

ANNEX A: Product Change Description

Huawei Technologies Co., Ltd.

Difference Declaration Letter

Article 1: Difference description:

The difference between model AMN-LX3 and model KSA-LX3 is show in the below table:

	Model	AMN-LX3	KSA-LX3
Licensed Frequency	LTE BAND	the same	the same
	UMTS BAND	the same	the same
	GSM	the same	the same
	IC	the same	the same
	Antenna	the same	the same
	RF conducted power	the same	the same
Unlicensed Frequency	Bluetooth	the same	the same
	2.4G Wi-Fi	the same	the same
	IC	the same	the same
	Antenna	the same	the same
Hardware	NFC	Not support	Not support
	MIC	the same	the same
	Ram / Rom	the same	the same
	Camera	the same	the same
	PCB	the same	the same
	USB Port	the same	the same
	SIM	the same	the same
RF	RF	the same	the same
Appearance	Dimension	the same	Only the rear camera has a different curved appearance
	Color	the same	the same
Accessory	Battery	the same	the same
	Charger	the same	the same
	USB label	the same	the same
	Earphone	the same	the same