



FCC RF Test Report

APPLICANT : Huawei Technologies Co., Ltd.
EQUIPMENT : Smart Phone
BRAND NAME : HUAWEI
MODEL NAME : GLK-LX3
FCC ID : QISGLK-LX3
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Apr. 12, 2019 and testing was completed on May 10, 2019. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Derreck Chen

Reviewed by: Derreck Chen / Supervisor

Eric Shih

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification of Equipment Under Test.....	6
1.4 Modification of EUT	6
1.5 Testing Location	7
1.6 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB Bandwidth Measurement	12
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	30
3.6 AC Conducted Emission Measurement.....	34
3.7 Antenna Requirements.....	36
4 LIST OF MEASURING EQUIPMENT	37
5 UNCERTAINTY OF EVALUATION	38
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR941205C	Rev. 01	Initial issue of report	May 13, 2019

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.26 dB at 35.820 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.59 dB at 0.150 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	GLK-LX3
FCC ID	QISGLK-LX3
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth BR/EDR/LE, FM Receiver, GNSS
IMEI Code	Conducted: 867795040011469/867795040015627 Conduction: 867795040010867/867795040015023 Radiation: 867795040010933/867795040015098
HW Version	HL6SENEM
SW Version	9.1.0.104(C900E103R1P1)

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum Output Power to antenna	802.11b : 16.30 dBm (0.0427 W) 802.11g : 14.50 dBm (0.0282 W) 802.11n HT20 : 12.60 dBm (0.0182 W) 802.11n HT40 : 12.40 dBm (0.0174 W)
Antenna Type / Gain	Internal Antenna with gain -0.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ CO01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China TEL: +86-755-3320-2398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM1900 Idle + Bluetooth Idle + WLAN Idle(2.4G) + Earphone 1 + USB Cable 6(Charging from Adapter 6)
Remark: For Radiated Test Cases, The tests were performance with Adapter 5, Earphone 5 and USB Cable 5.	

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.0 + 10 = 15.0 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Occupied Bandwidth

Please refer to Appendix A.

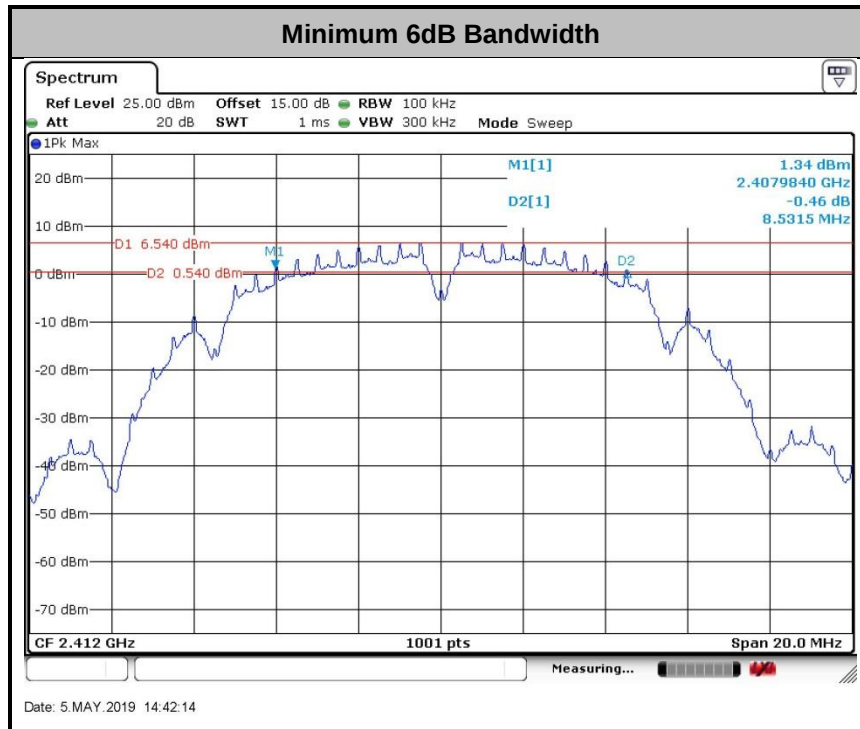

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

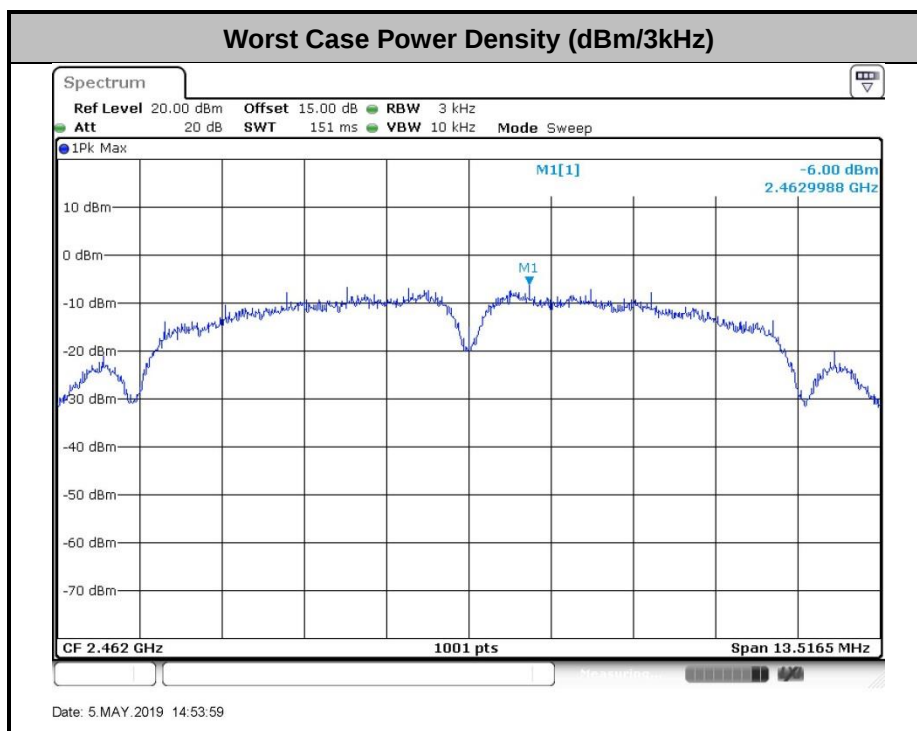

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

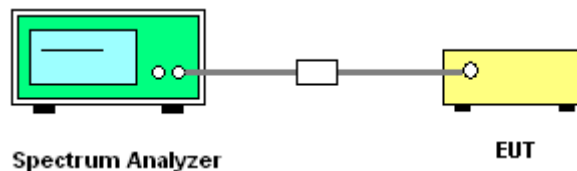




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Zhang Jiang	Temperature :	24~26°C
		Relative Humidity :	50~53%


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

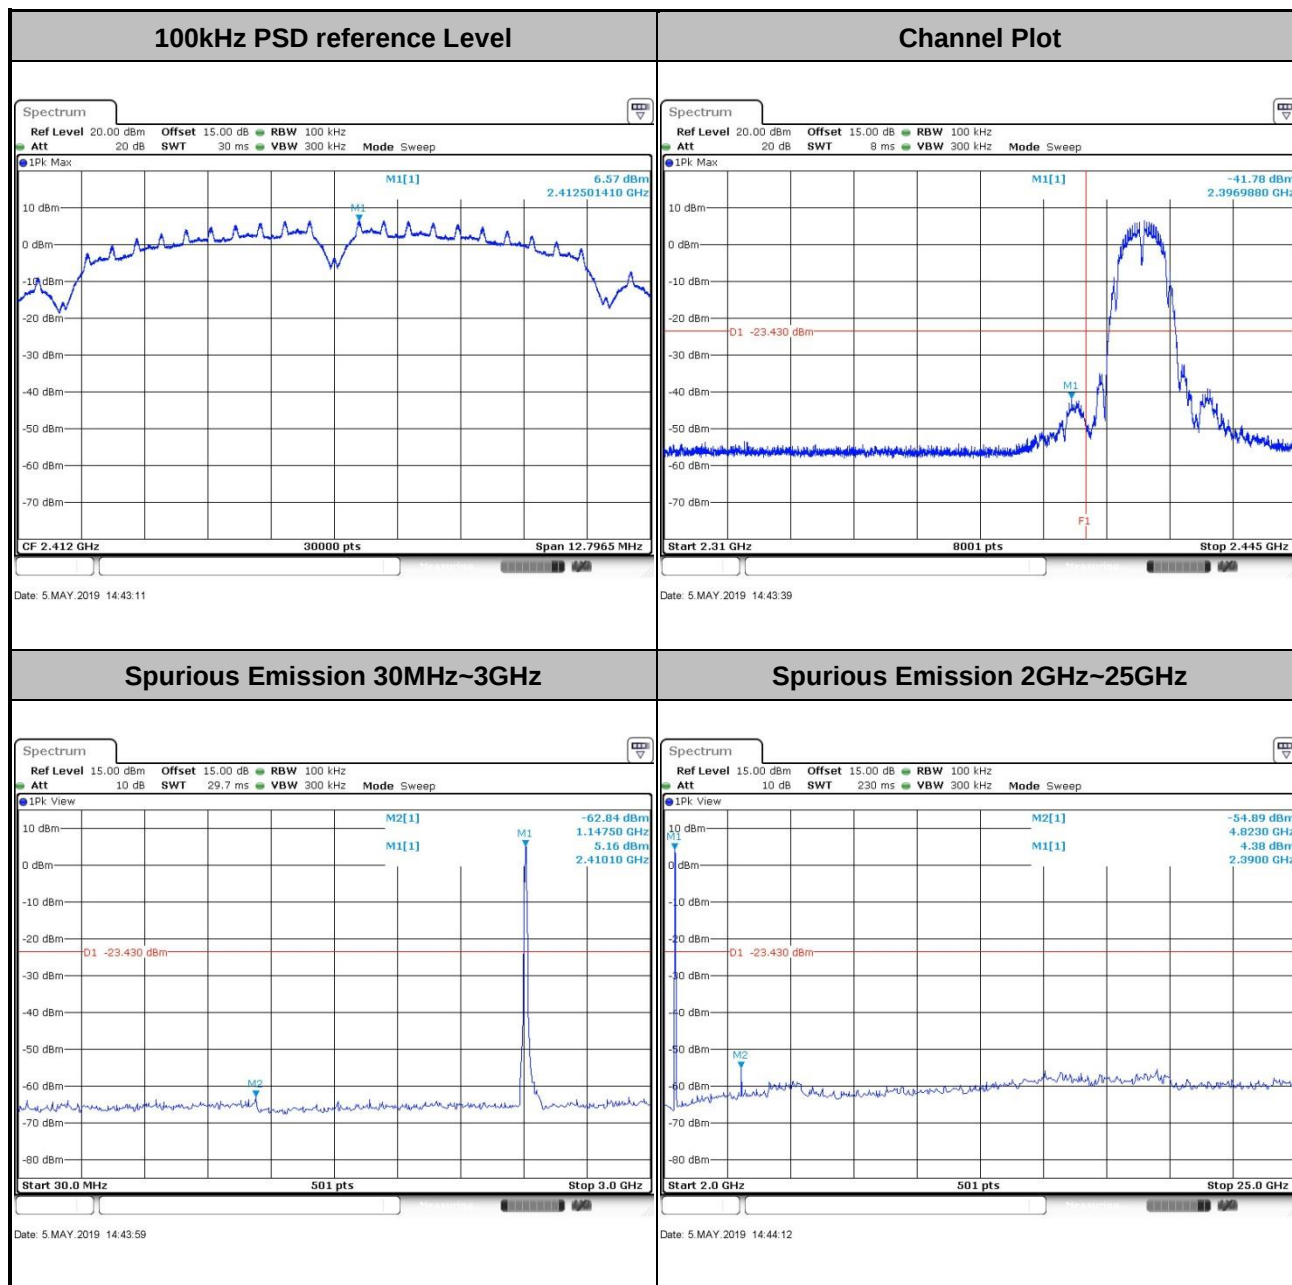




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----


100kHz PSD reference Level

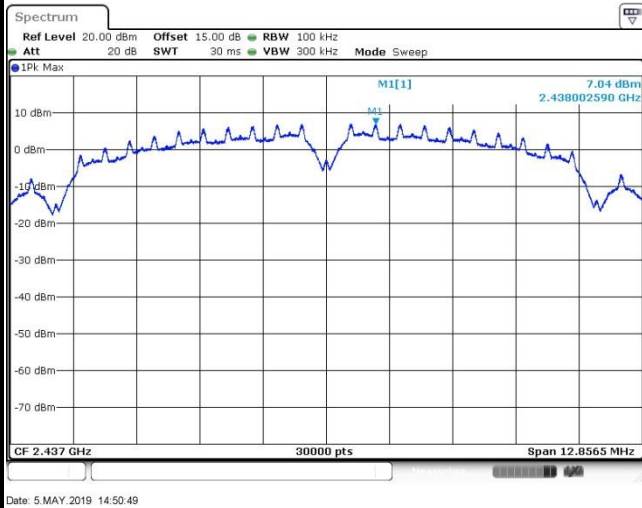

Spurious Emission 30MHz~3GHz

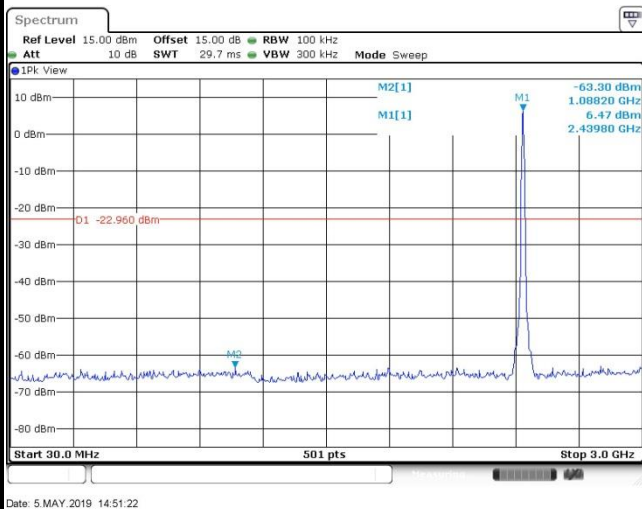


Spurious Emission 2GHz~25GHz

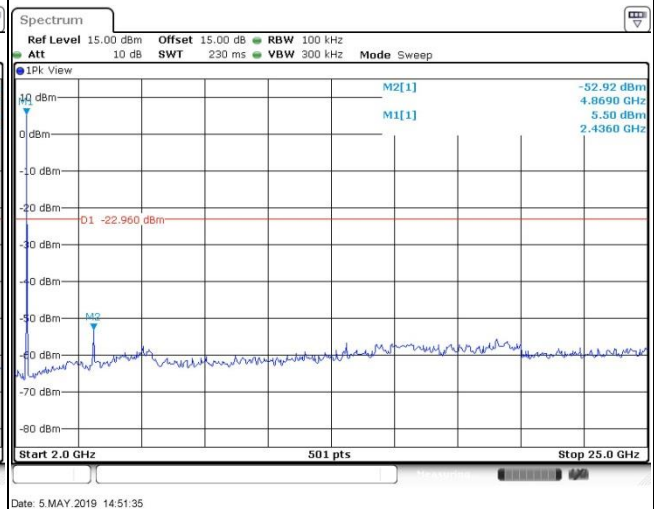




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

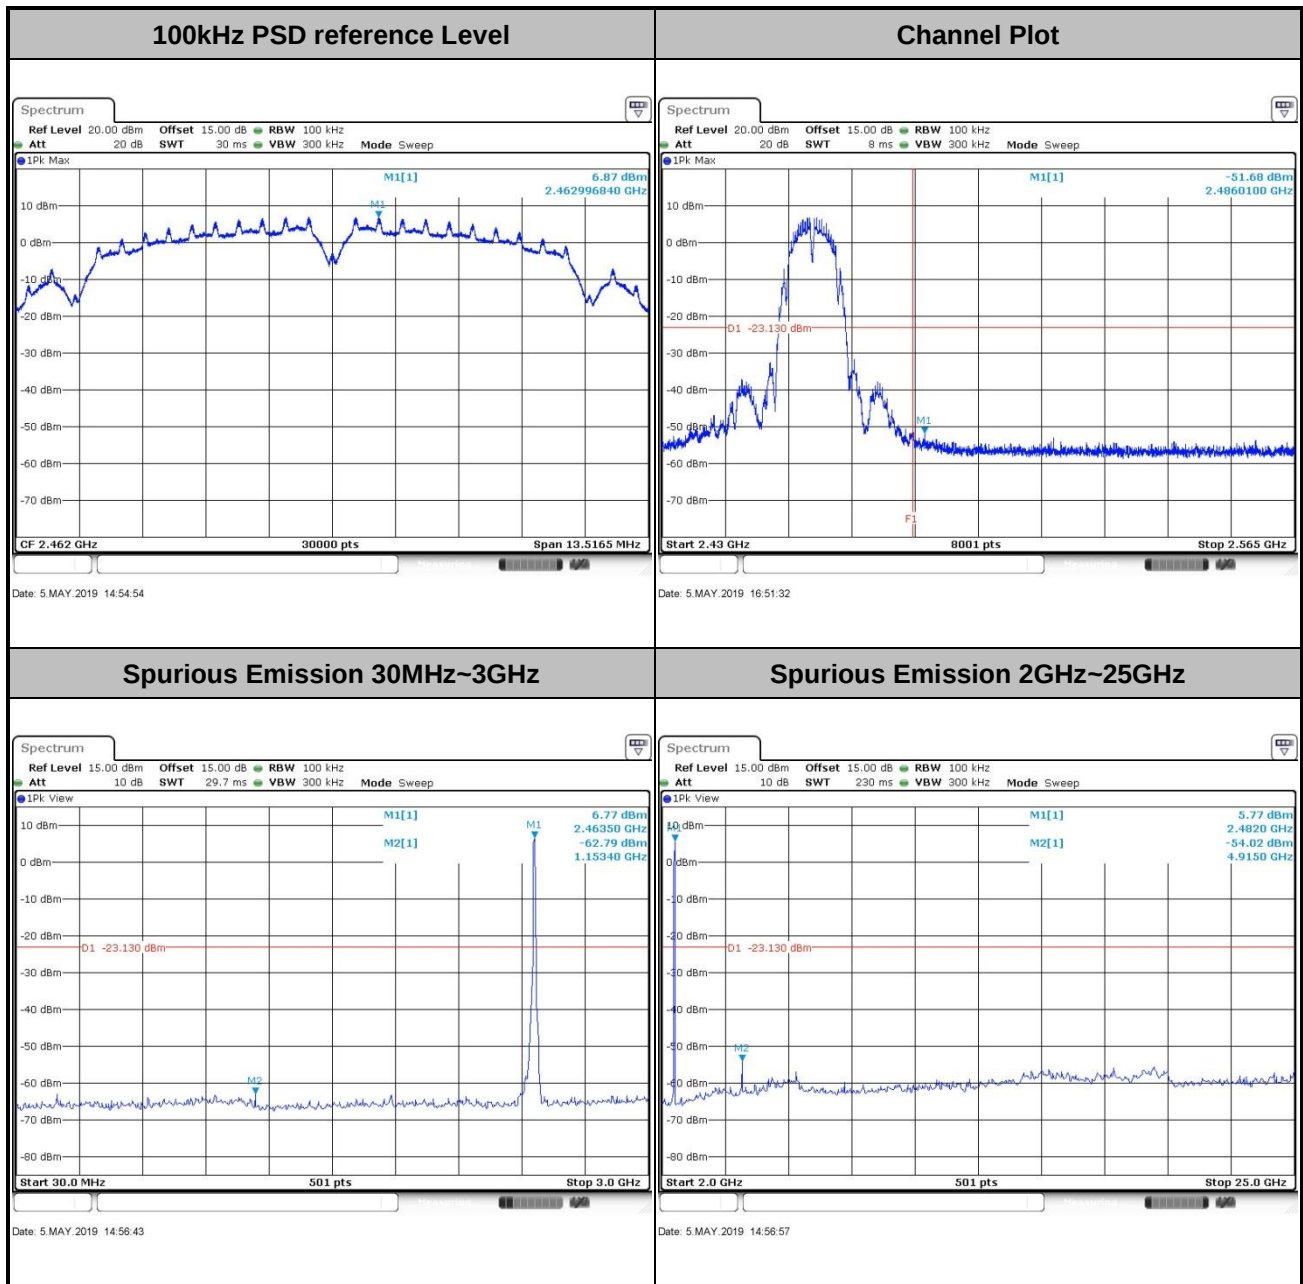




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

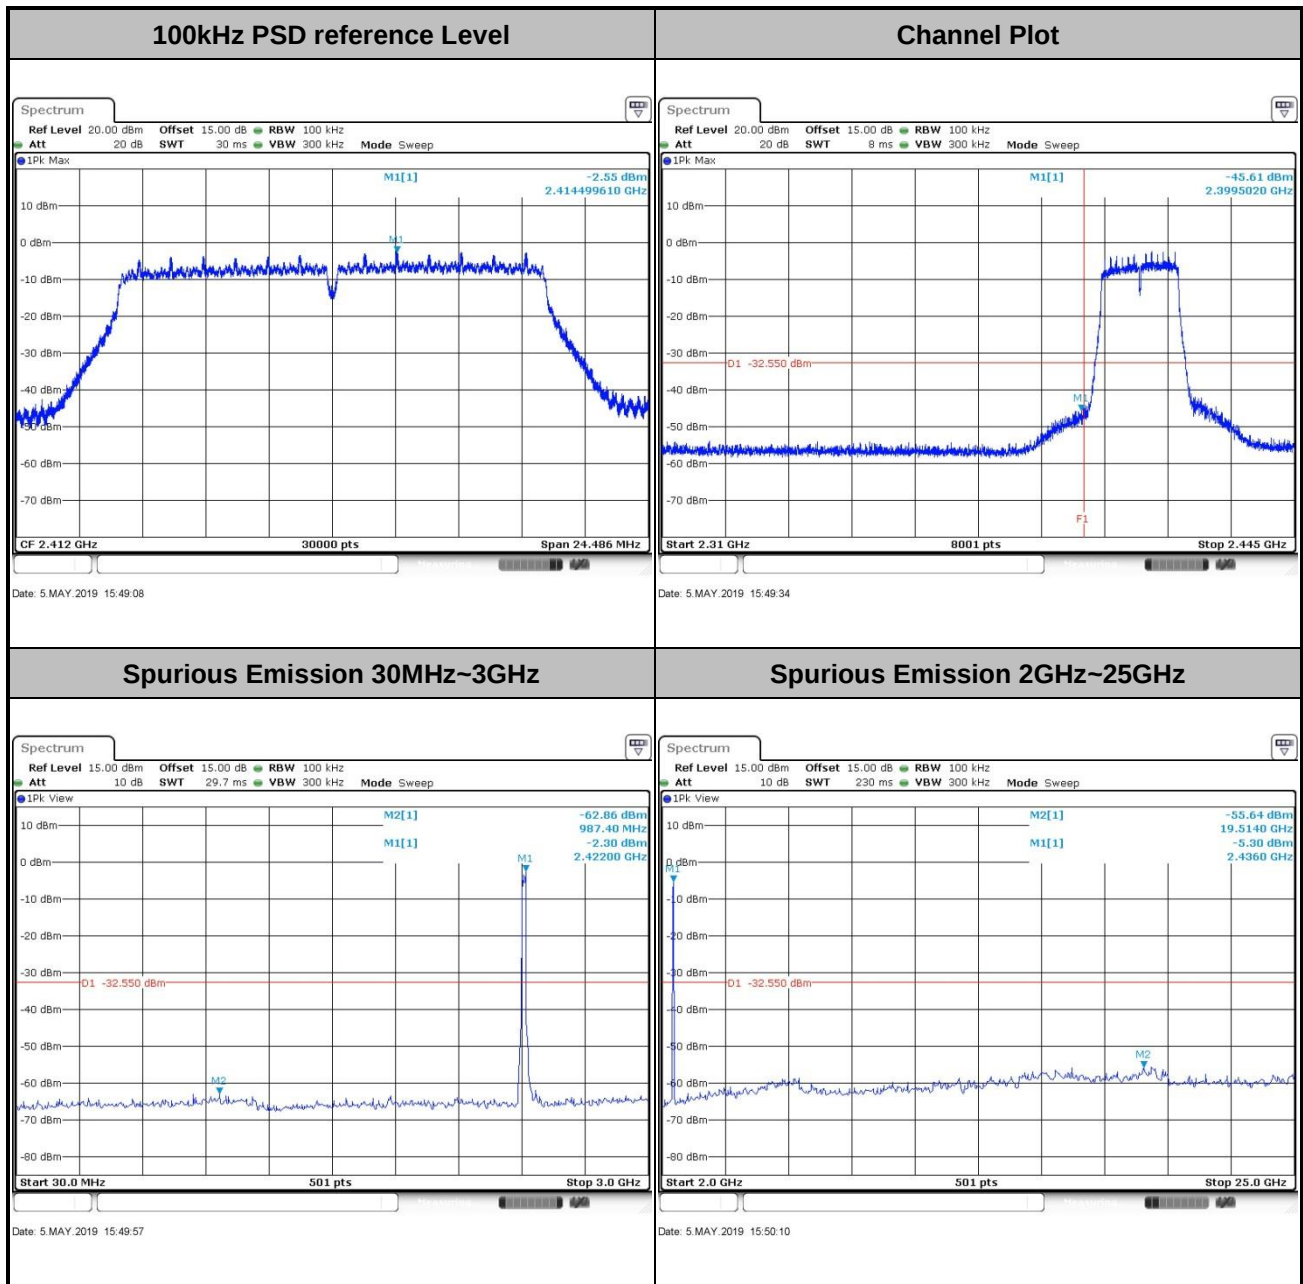




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----


100kHz PSD reference Level

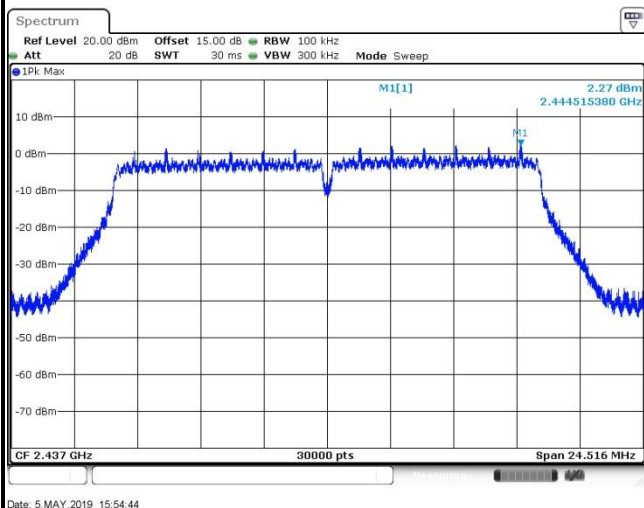

Spurious Emission 30MHz~3GHz

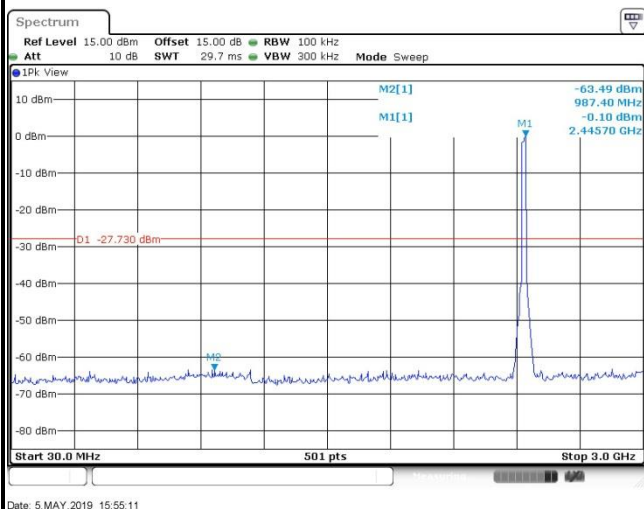


Spurious Emission 2GHz~25GHz

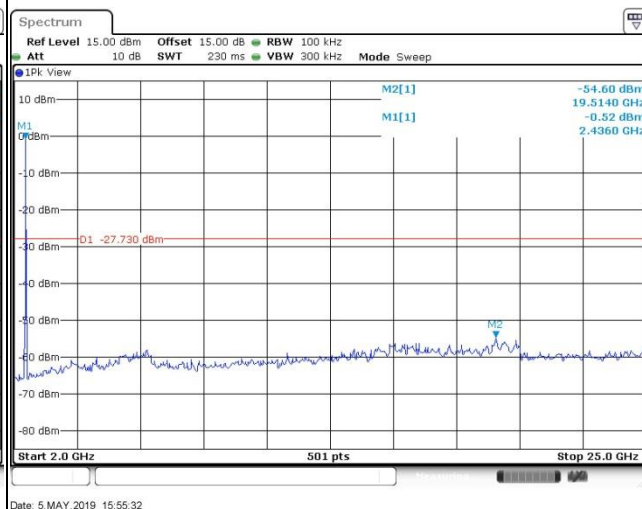




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

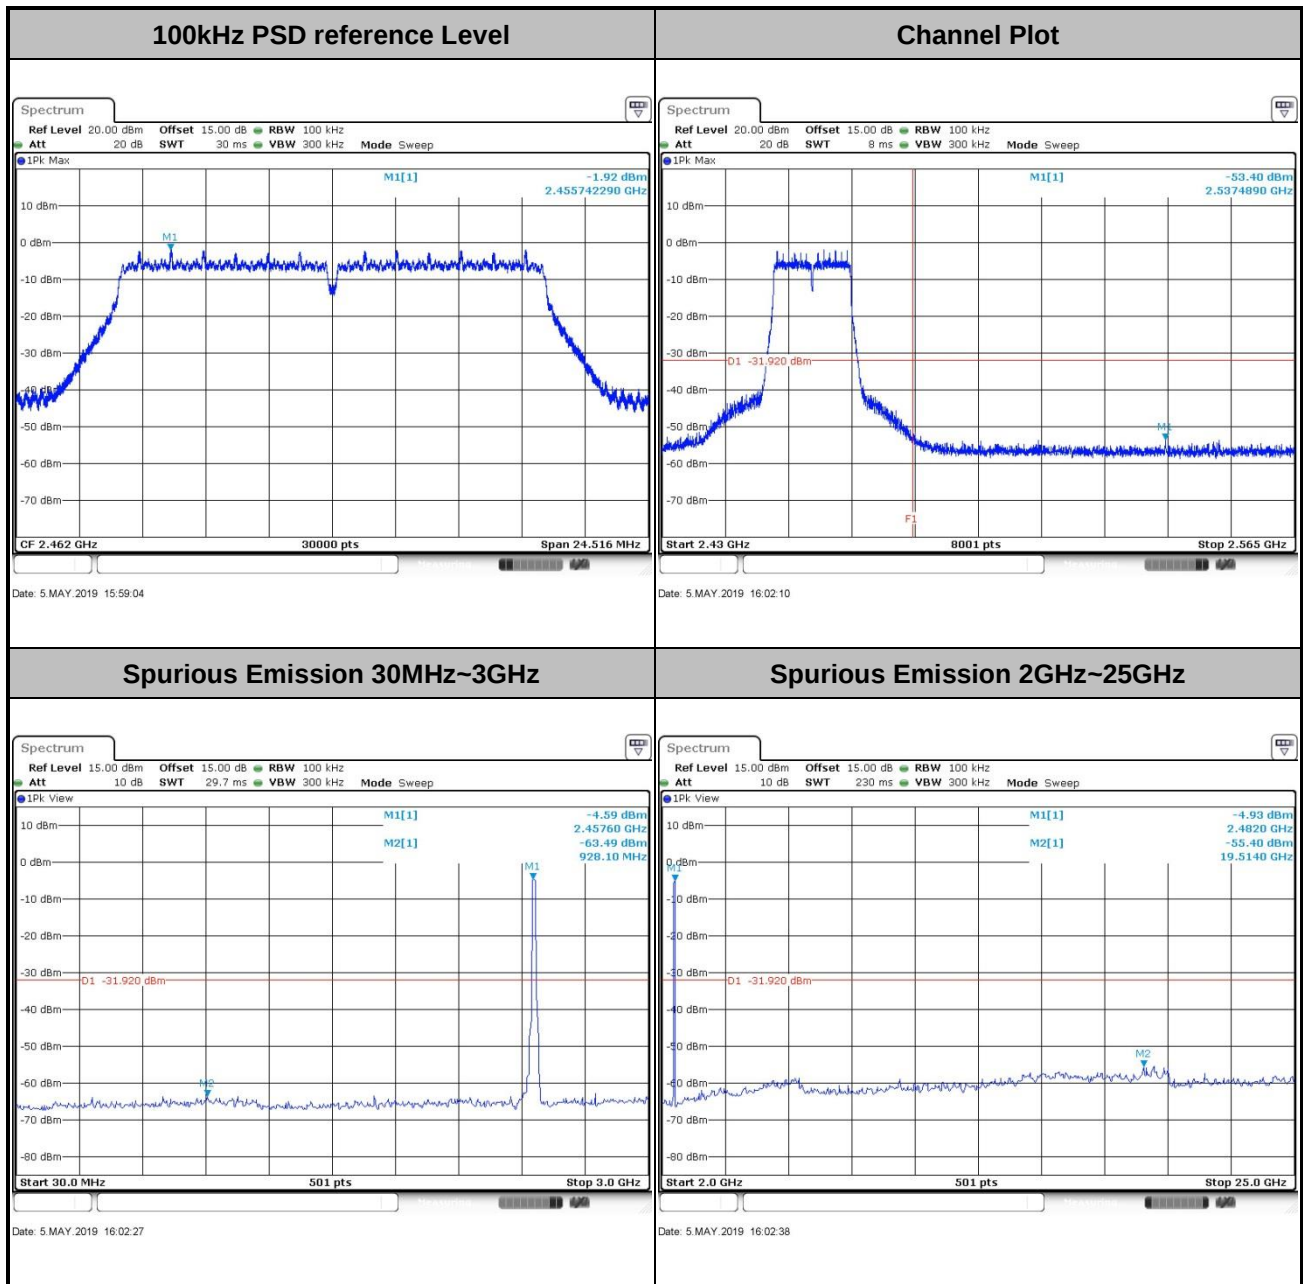




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

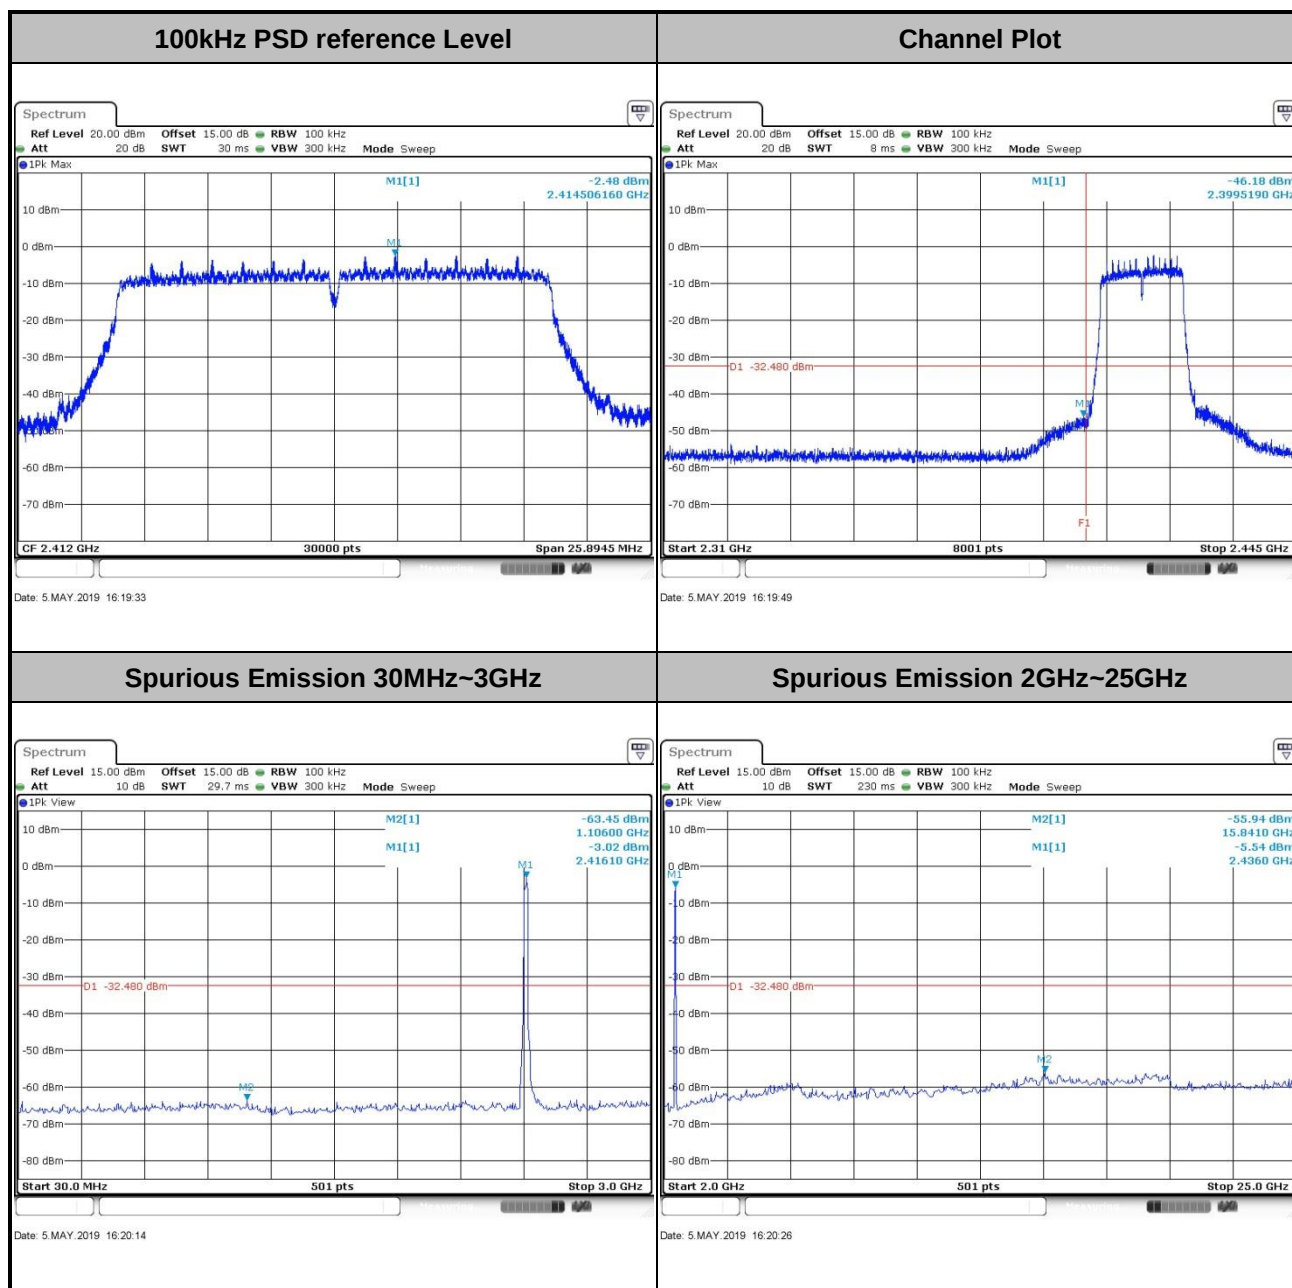




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

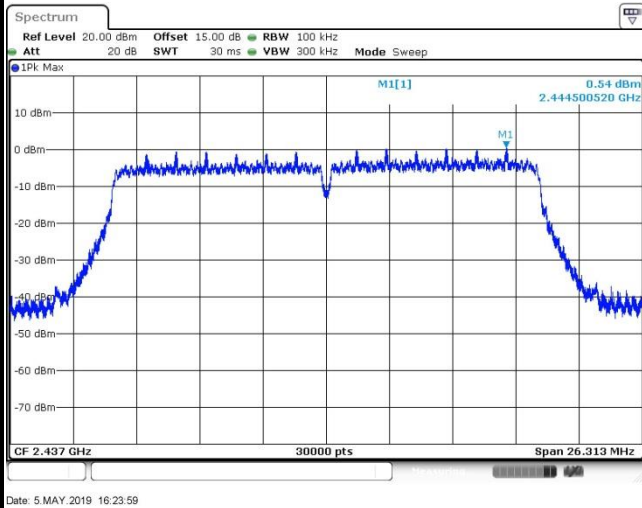

Spurious Emission 30MHz~3GHz

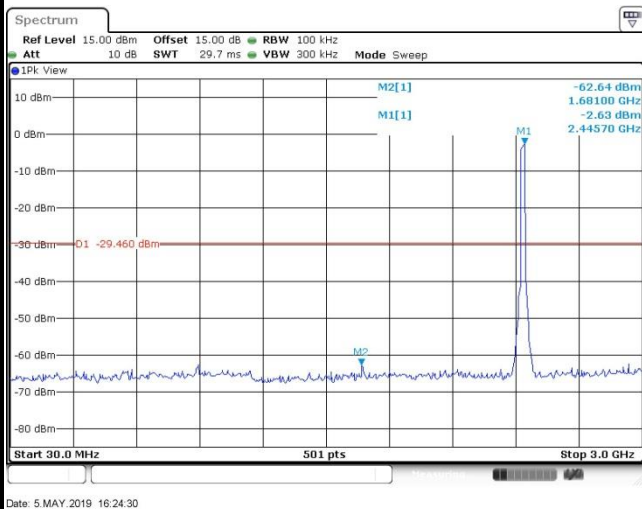

Spurious Emission 2GHz~25GHz

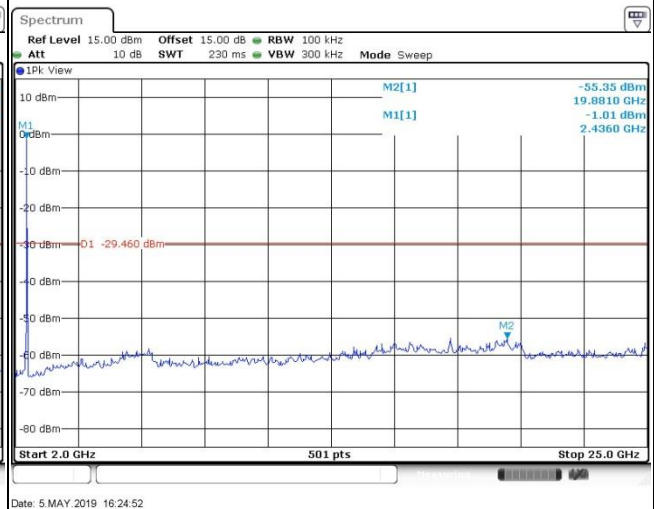




Test Mode : 802.11n HT20


Test Channel : 11

100kHz PSD reference Level

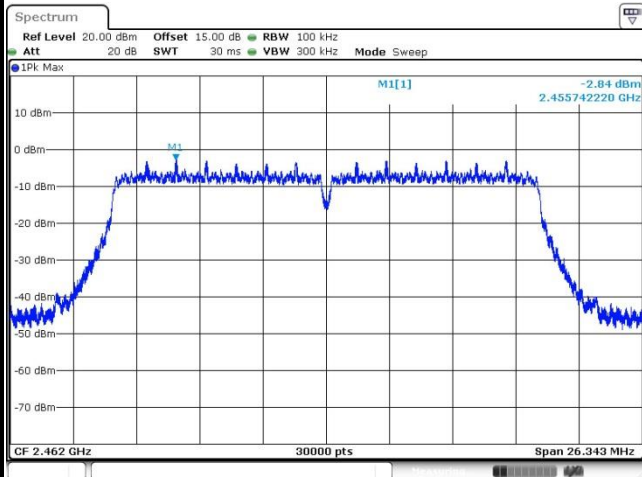


Date: 5 MAY 2019 16:27:33

Channel Plot

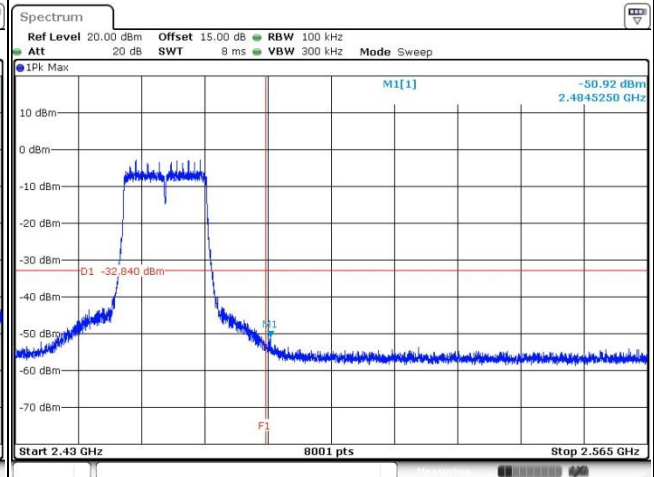


Date: 5 MAY 2019 16:27:50

Spurious Emission 30MHz~3GHz

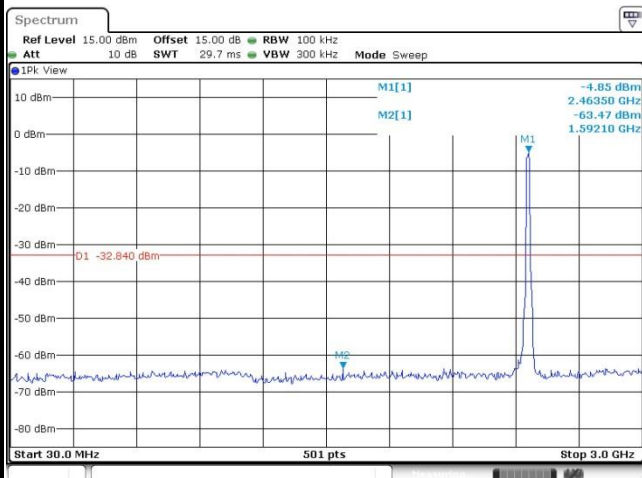

Date: 5 MAY 2019 16:28:09

Spurious Emission 2GHz~25GHz

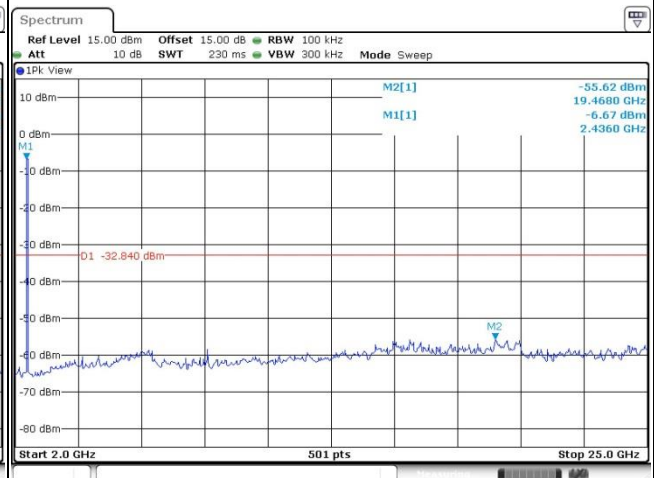


Date: 5 MAY 2019 16:28:41




Test Mode : 802.11n HT40

Test Channel : 03


100kHz PSD reference Level

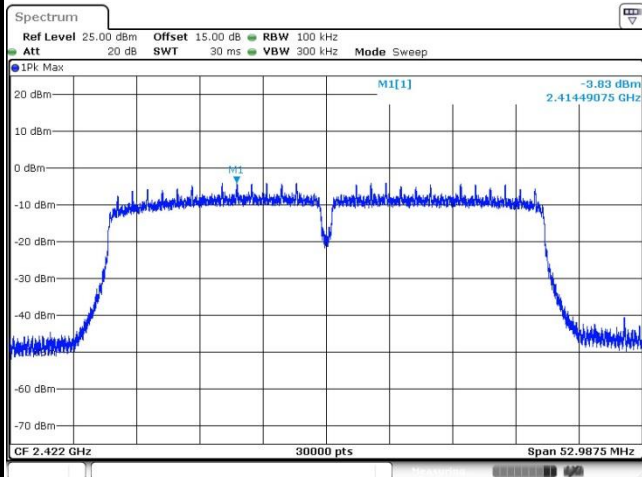


Channel Plot

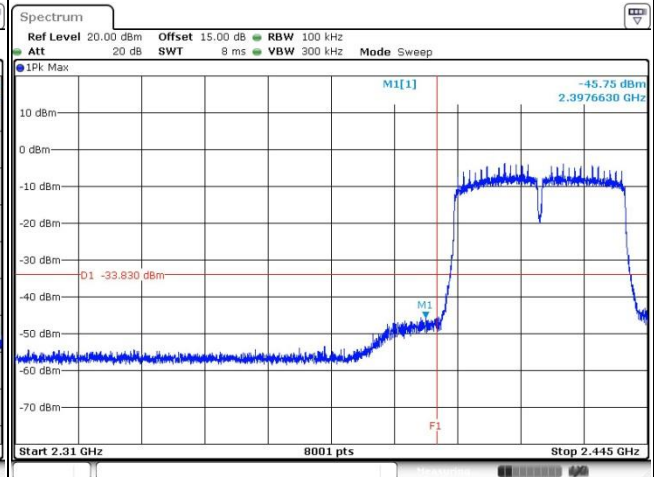

Spurious Emission 30MHz~3GHz

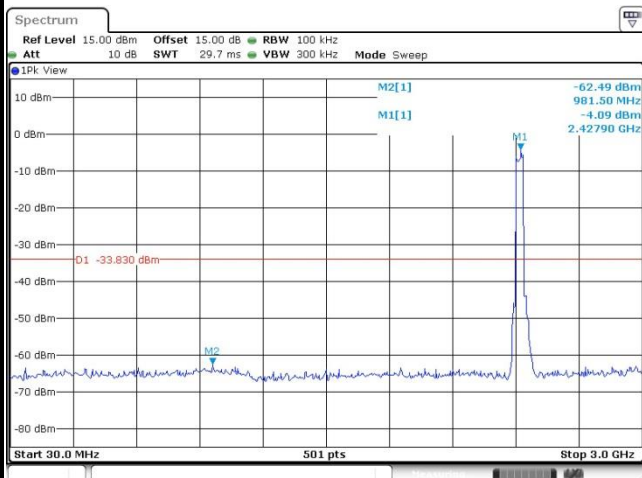


Spurious Emission 2GHz~25GHz

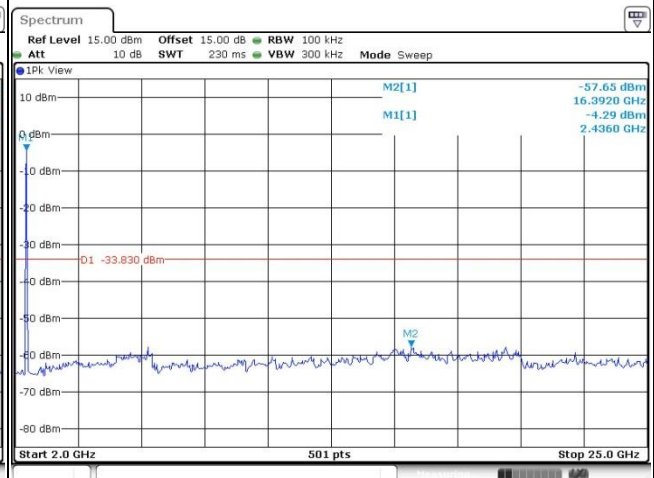




Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

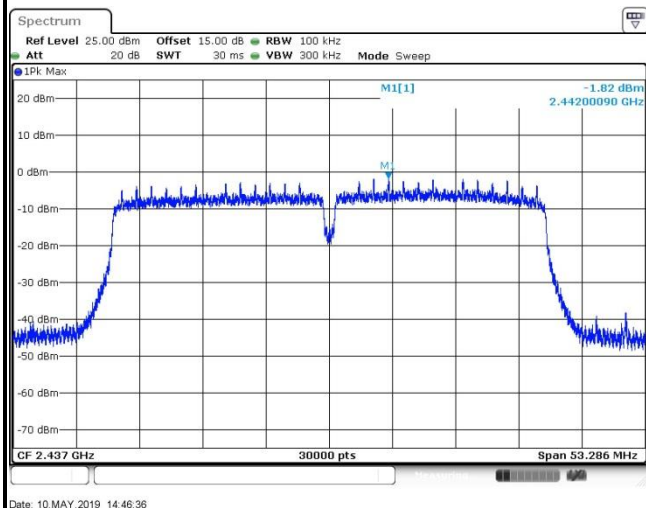

Spurious Emission 30MHz~3GHz

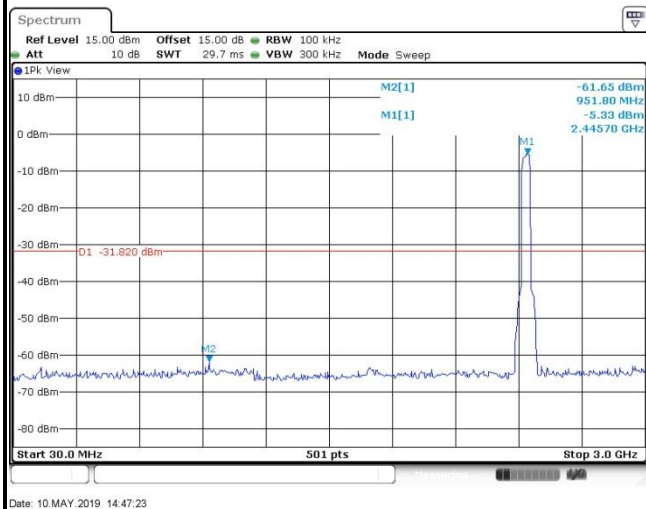

Spurious Emission 2GHz~25GHz

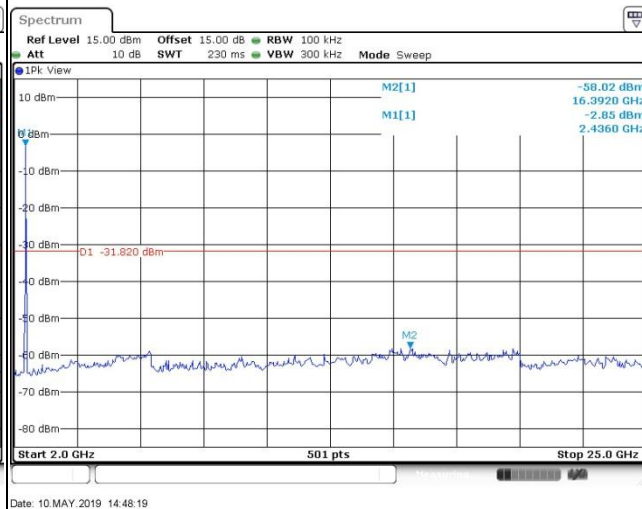





Test Mode : 802.11n HT40

Test Channel : 09


100kHz PSD reference Level

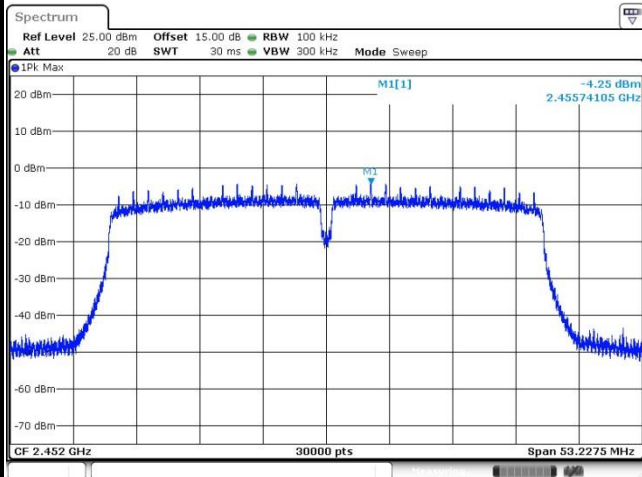


Channel Plot

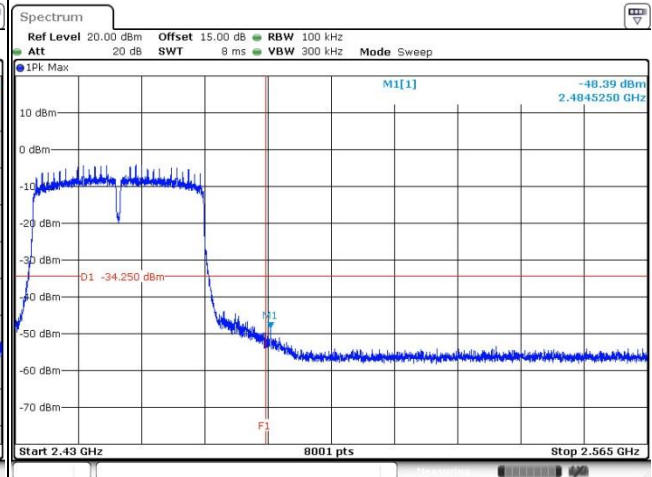

Spurious Emission 30MHz~3GHz

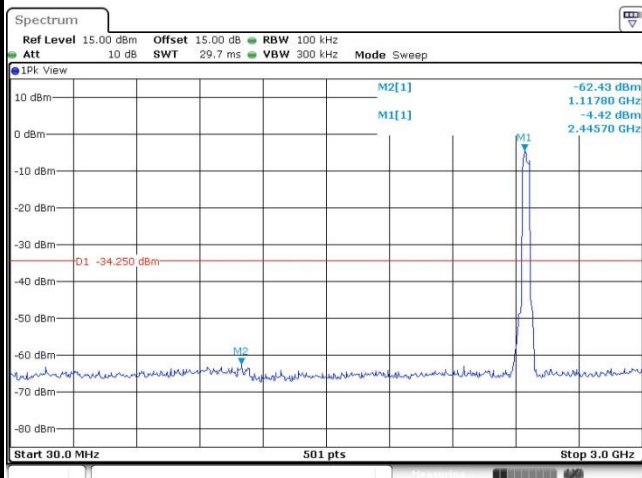

Spurious Emission 2GHz~25GHz

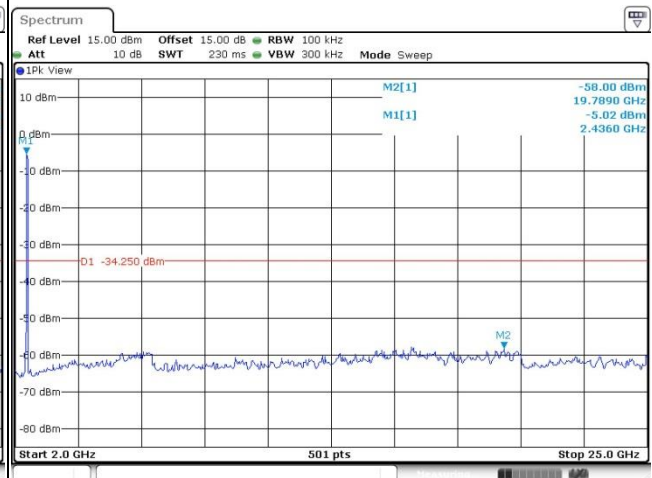

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup

For radiated emissions below 30MHz



For radiated emissions from 30MHz to 1GHz

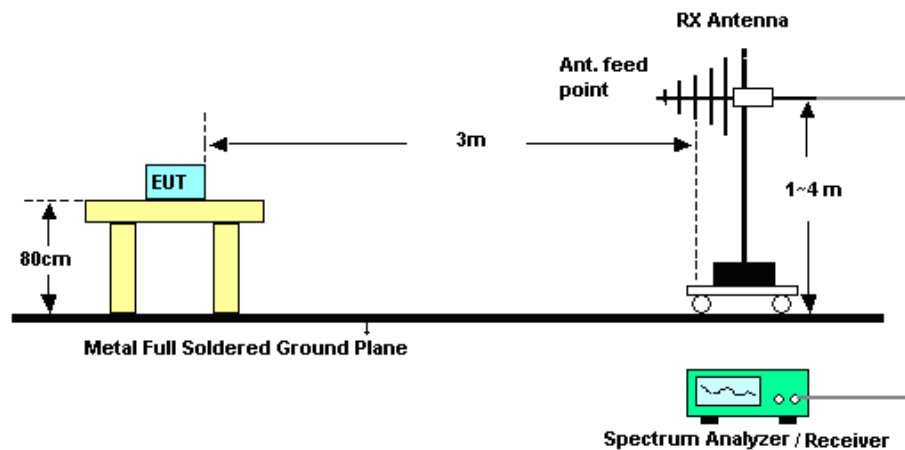

For radiated emissions above 1GHz



**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 18, 2019	May 05, 2019~ May 10, 2019	Apr. 17, 2020	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 22, 2018	May 05, 2019~ May 10, 2019	Dec. 21, 2019	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 22, 2018	May 05, 2019~ May 10, 2019	Dec. 21, 2019	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY522601 85	20Hz~26.5GHz	Aug. 30, 2018	May 01, 2019	Aug. 29, 2019	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 29, 2018	May 01, 2019	May 29, 2020	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Jun. 05, 2018	May 01, 2019	Jun. 04, 2019	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	119436	1GHz~18GHz	Jun. 28, 2018	May 01, 2019	Jun. 27, 2019	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Mar. 30, 2019	May 01, 2019	Mar. 29, 2020	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 19, 2019	May 01, 2019	Apr. 18, 2020	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1707137	1GHz~18GHz	Oct. 19, 2018	May 01, 2019	Oct. 18, 2019	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 04	0.5GHz~26.5GHz	Dec. 22, 2018	May 01, 2019	Dec. 21, 2019	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 17, 2018	May 01, 2019	Jul. 16, 2019	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	NCR	May 01, 2019	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 01, 2019	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 01, 2019	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 23, 2018	Apr. 30, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 18, 2018	Apr. 30, 2019	Oct. 17, 2019	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 23, 2018	Apr. 30, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Jul. 18, 2018	Apr. 30, 2019	Jul. 17, 2019	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.6dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3dB
---	-------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Zhang Jiang	Temperature:	24~26	°C
Test Date:	2019/5/5~2019/5/10	Relative Humidity:	50~53	%

TEST RESULTS DATA
6dB Occupied Bandwidth

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2		
11b	1Mbps	1	1	2412	-	-	8.53	-	0.50	Pass
11b	1Mbps	1	6	2437	-	-	8.57	-	0.50	Pass
11b	1Mbps	1	11	2462	-	-	9.01	-	0.50	Pass
11g	6Mbps	1	1	2412	-	-	16.32	-	0.50	Pass
11g	6Mbps	1	6	2437	-	-	16.34	-	0.50	Pass
11g	6Mbps	1	11	2462	-	-	16.34	-	0.50	Pass
HT20	MCS0	1	1	2412	-	-	17.26	-	0.50	Pass
HT20	MCS0	1	6	2437	-	-	17.54	-	0.50	Pass
HT20	MCS0	1	11	2462	-	-	17.56	-	0.50	Pass
HT40	MCS0	1	3	2422	-	-	17.58	-	0.50	Pass
HT40	MCS0	1	6	2437	-	-	17.54	-	0.50	Pass
HT40	MCS0	1	9	2452	-	-	17.54	-	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	15.70	-	-	30.00	-	-0.50	-	15.20	-	36.00	-	Pass
11b	1Mbps	1	6	2437	16.30	-		30.00	-	-0.50	-	15.80	-	36.00	-	Pass
11b	1Mbps	1	11	2462	16.10	-		30.00	-	-0.50	-	15.60	-	36.00	-	Pass
11g	6Mbps	1	1	2412	9.60	-		30.00	-	-0.50	-	9.10	-	36.00	-	Pass
11g	6Mbps	1	6	2437	14.50	-		30.00	-	-0.50	-	14.00	-	36.00	-	Pass
11g	6Mbps	1	11	2462	10.50	-		30.00	-	-0.50	-	10.00	-	36.00	-	Pass
HT20	MCS0	1	1	2412	9.70	-		30.00	-	-0.50	-	9.20	-	36.00	-	Pass
HT20	MCS0	1	6	2437	12.60	-		30.00	-	-0.50	-	12.10	-	36.00	-	Pass
HT20	MCS0	1	11	2462	9.50	-		30.00	-	-0.50	-	9.00	-	36.00	-	Pass
HT40	MCS0	1	3	2422	10.30	-		30.00	-	-0.50	-	9.80	-	36.00	-	Pass
HT40	MCS0	1	6	2437	12.40	-		30.00	-	-0.50	-	11.90	-	36.00	-	Pass
HT40	MCS0	1	9	2452	10.10	-		30.00	-	-0.50	-	9.60	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 1	Ant 2	Worse + 3.01	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	-6.61	-	-	-0.50	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-6.63	-	-	-0.50	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-6.00	-	-	-0.50	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-16.45	-	-	-0.50	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-11.03	-	-	-0.50	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-15.43	-	-	-0.50	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-15.41	-	-	-0.50	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-13.86	-	-	-0.50	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-16.55	-	-	-0.50	-	8.00	-	Pass
HT40	MCS0	1	3	2422	-15.03	-	-	-0.50	-	8.00	-	Pass
HT40	MCS0	1	6	2437	-12.35	-	-	-0.50	-	8.00	-	Pass
HT40	MCS0	1	9	2452	-15.57	-	-	-0.50	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

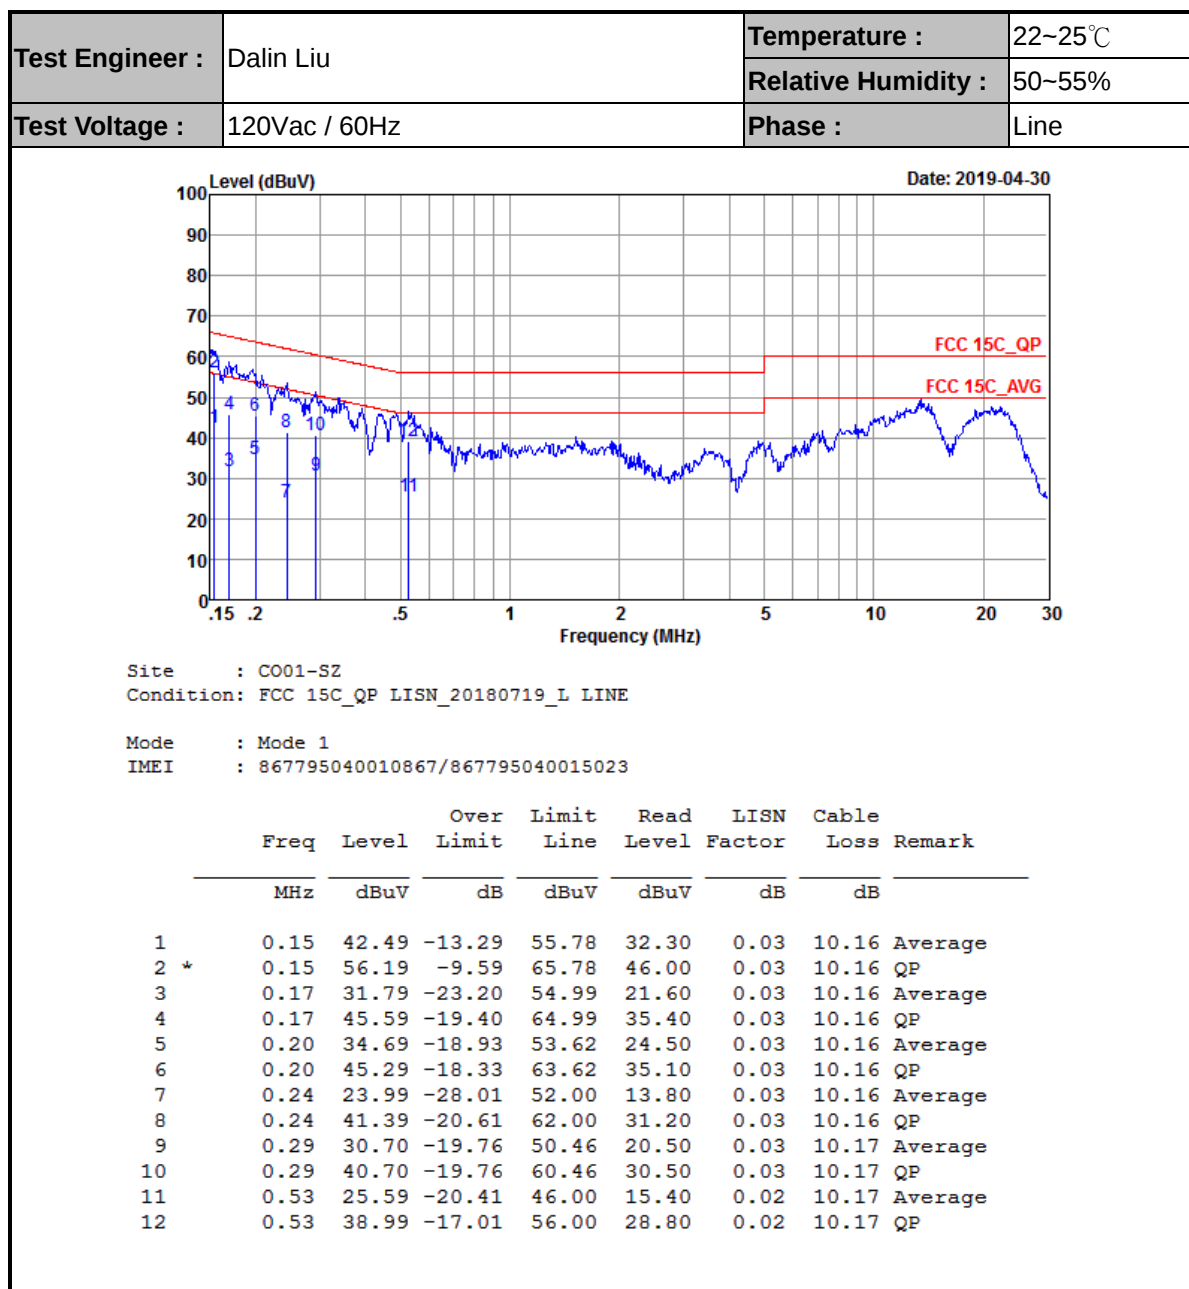



Test Engineer :	Dalin Liu	Temperature :	22~25℃
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

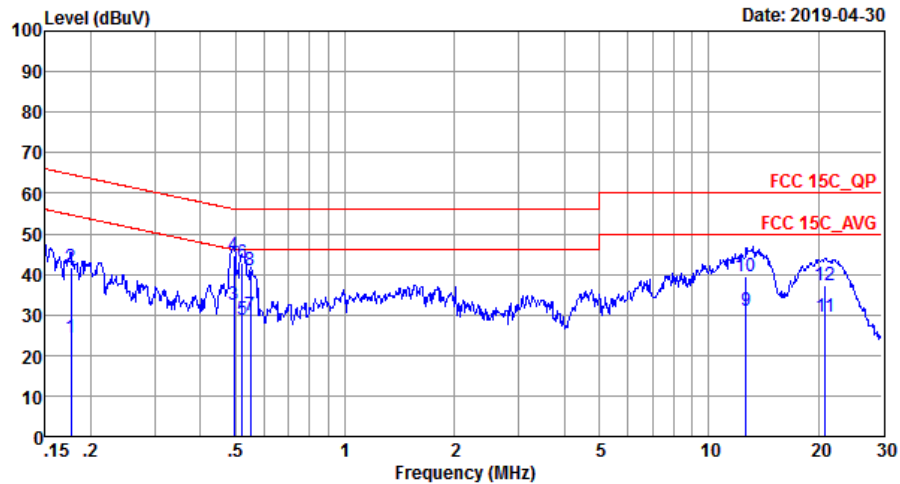

Site : C001-SZ
Condition: FCC 15C_QP LISN_20180719_N NEUTRAL

Mode : Mode 1
IMEI : 867795040010867/867795040015023

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.18	24.29	-30.35	54.64	14.10	0.03	10.16	Average
2	0.18	41.69	-22.95	64.64	31.50	0.03	10.16	QP
3	0.49	32.39	-13.71	46.10	22.20	0.02	10.17	Average
4 *	0.49	44.79	-11.31	56.10	34.60	0.02	10.17	QP
5	0.52	28.79	-17.21	46.00	18.60	0.02	10.17	Average
6	0.52	42.89	-13.11	56.00	32.70	0.02	10.17	QP
7	0.55	29.90	-16.10	46.00	19.70	0.02	10.18	Average
8	0.55	41.00	-15.00	56.00	30.80	0.02	10.18	QP
9	12.65	30.82	-19.18	50.00	20.29	0.26	10.27	Average
10	12.65	39.42	-20.58	60.00	28.89	0.26	10.27	QP
11	20.92	29.34	-20.66	50.00	18.40	0.67	10.27	Average
12	20.92	37.44	-22.56	60.00	26.50	0.67	10.27	QP



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2385.81	53.94	-20.06	74	46.3	31.5	9.14	33	154	28	P	H
		2390	44.82	-9.18	54	37.18	31.5	9.14	33	154	28	A	H
	*	2412	103.93	-	-	96.22	31.57	9.14	33	154	28	P	H
	*	2412	102.22	-	-	94.51	31.57	9.14	33	154	28	A	H
		2333.73	54.52	-19.48	74	47.01	31.57	8.94	33	260	102	P	V
		2390	43.93	-10.07	54	36.29	31.5	9.14	33	260	102	A	V
	*	2412	102.68	-	-	94.97	31.57	9.14	33	260	102	P	V
	*	2412	101.01	-	-	93.3	31.57	9.14	33	260	102	A	V
802.11b CH 06 2437MHz		2311.96	53.04	-20.96	74	45.51	31.59	8.94	33	154	31	P	H
		2389.94	42.81	-11.19	54	35.17	31.5	9.14	33	154	31	A	H
	*	2437	104.01	-	-	96.09	31.71	9.21	33	154	31	P	H
	*	2437	102.17	-	-	94.25	31.71	9.21	33	154	31	A	H
		2492.3	53.64	-20.36	74	45.43	31.93	9.28	33	154	31	P	H
		2484.74	43.3	-10.7	54	35.16	31.86	9.28	33	154	31	A	H
		2319.38	53.51	-20.49	74	46	31.57	8.94	33	270	98	P	V
		2388.96	42.9	-11.1	54	35.26	31.5	9.14	33	270	98	A	V
	*	2437	100.4	-	-	92.48	31.71	9.21	33	270	98	P	V
	*	2437	98.62	-	-	90.7	31.71	9.21	33	270	98	A	V
		2486.56	54.13	-19.87	74	45.99	31.86	9.28	33	270	98	P	V
		2484.88	43.36	-10.64	54	35.22	31.86	9.28	33	270	98	A	V



802.11b CH 11 2462MHz	*	2462	105.21	-	-	97.21	31.79	9.21	33	146	29	P	H
	*	2462	103.38	-	-	95.38	31.79	9.21	33	146	29	A	H
		2487.84	54.86	-19.14	74	46.65	31.93	9.28	33	146	29	P	H
		2483.52	46.45	-7.55	54	38.31	31.86	9.28	33	146	29	A	H
	*	2462	101.79	-	-	93.79	31.79	9.21	33	266	103	P	V
	*	2462	100.02	-	-	92.02	31.79	9.21	33	266	103	A	V
		2483.6	54.14	-19.86	74	46	31.86	9.28	33	266	103	P	V
		2483.52	45.39	-8.61	54	37.25	31.86	9.28	33	266	103	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b		4824	46.44	-27.56	74	57.25	33.77	12.9	57.48	185	255	P	H
CH 01 2412MHz		4824	46.76	-27.24	74	57.57	33.77	12.9	57.48	185	255	P	V
802.11b		4874	45.95	-28.05	74	56.71	33.75	13.01	57.52	165	214	P	H
CH 06		7311	47.15	-26.85	74	54.1	35.46	16.51	58.92	152	63	P	H
2437MHz		4874	45.08	-28.92	74	55.84	33.75	13.01	57.52	165	106	P	V
		7311	50.85	-23.15	74	57.8	35.46	16.51	58.92	174	100	P	V
		7311	46.5	-7.5	54	53.45	35.46	16.51	58.92	174	100	A	V
802.11b		4924	45.31	-28.69	74	55.92	33.73	13.21	57.55	150	285	P	H
CH 11		7386	48.59	-25.41	74	55.34	35.61	16.6	58.96	155	274	P	H
2462MHz		7386	46.02	-7.98	54	52.77	35.61	16.6	58.96	155	274	A	H
		4924	45.52	-28.48	74	56.13	33.73	13.21	57.55	150	285	P	V
		7386	47.85	-26.15	74	54.6	35.61	16.6	58.96	162	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.7	55.42	-18.58	74	47.78	31.5	9.14	33	159	34	P	H
		2389.8	45.65	-8.35	54	38.01	31.5	9.14	33	159	34	A	H
	*	2412	100.17	-	-	92.46	31.57	9.14	33	159	34	P	H
	*	2412	93.15	-	-	85.44	31.57	9.14	33	159	34	A	H
		2386.34	54.06	-19.94	74	46.42	31.5	9.14	33	261	108	P	V
		2389.7	44.78	-9.22	54	37.14	31.5	9.14	33	261	108	A	V
	*	2412	99.39	-	-	91.68	31.57	9.14	33	261	108	P	V
	*	2412	92.49	-	-	84.78	31.57	9.14	33	261	108	A	V
802.11g CH 06 2437MHz		2385.6	53.92	-20.08	74	46.28	31.5	9.14	33	155	33	P	H
		2389.24	43.81	-10.19	54	36.17	31.5	9.14	33	155	33	A	H
	*	2437	104.43	-	-	96.51	31.71	9.21	33	155	33	P	H
	*	2437	96.77	-	-	88.85	31.71	9.21	33	155	33	A	H
		2486.63	53.47	-20.53	74	45.33	31.86	9.28	33	155	33	P	H
		2497.97	44.19	-9.81	54	35.98	31.93	9.28	33	155	33	A	H
		2316.86	53.98	-20.02	74	46.45	31.59	8.94	33	268	98	P	V
		2360.4	43.69	-10.31	54	36.11	31.54	9.04	33	268	98	A	V
	*	2437	101.46	-	-	93.54	31.71	9.21	33	268	98	P	V
	*	2437	94.36	-	-	86.44	31.71	9.21	33	268	98	A	V
		2485.3	53.86	-20.14	74	45.72	31.86	9.28	33	268	98	P	V
		2485.02	44.28	-9.72	54	36.14	31.86	9.28	33	268	98	A	V



802.11g CH 11 2462MHz	*	2462	102.97	-	-	94.97	31.79	9.21	33	159	29	P	H
	*	2462	95.68	-	-	87.68	31.79	9.21	33	159	29	A	H
		2483.52	56.49	-17.51	74	48.35	31.86	9.28	33	159	29	P	H
		2483.56	46.13	-7.87	54	37.99	31.86	9.28	33	159	29	A	H
	*	2462	98.97	-	-	90.97	31.79	9.21	33	269	119	P	V
	*	2462	91.84	-	-	83.84	31.79	9.21	33	269	119	A	V
		2497.72	55.03	-18.97	74	46.82	31.93	9.28	33	269	119	P	V
		2484.12	45.04	-8.96	54	36.9	31.86	9.28	33	269	119	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	44.71	-29.29	74	55.52	33.77	12.9	57.48	185	255	P	H
		4824	46.48	-27.52	74	57.29	33.77	12.9	57.48	185	255	P	V
802.11g CH 06 2437MHz		4874	43.16	-30.84	74	53.92	33.75	13.01	57.52	165	106	P	H
		7311	46.21	-27.79	74	53.16	35.46	16.51	58.92	174	100	P	H
		4874	41.65	-32.35	74	52.41	33.75	13.01	57.52	165	106	P	V
		7311	46.14	-27.86	74	53.09	35.46	16.51	58.92	174	100	P	V
802.11g CH 11 2462MHz		4924	43.41	-30.59	74	54.02	33.73	13.21	57.55	150	285	P	H
		7386	47.58	-26.42	74	54.33	35.61	16.6	58.96	155	274	P	H
		4924	42.87	-31.13	74	53.48	33.73	13.21	57.55	150	285	P	V
		7386	46.32	-27.68	74	53.07	35.61	16.6	58.96	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.59	57.17	-16.83	74	49.53	31.5	9.14	33	158	30	P	H
		2389.8	46.79	-7.21	54	39.15	31.5	9.14	33	158	30	A	H
	*	2412	101.7	-	-	93.99	31.57	9.14	33	158	30	P	H
	*	2412	93.61	-	-	85.9	31.57	9.14	33	158	30	A	H
		2389.7	56.33	-17.67	74	48.69	31.5	9.14	33	273	112	P	V
		2389.8	45.23	-8.77	54	37.59	31.5	9.14	33	273	112	A	V
	*	2412	97.21	-	-	89.5	31.57	9.14	33	273	112	P	V
	*	2412	90.93	-	-	83.22	31.57	9.14	33	273	112	A	V
802.11n HT20 CH 06 2437MHz		2344.86	53.25	-20.75	74	45.76	31.55	8.94	33	153	34	P	H
		2352	43.72	-10.28	54	36.14	31.54	9.04	33	153	34	A	H
	*	2437	101.85	-	-	93.93	31.71	9.21	33	153	34	P	H
	*	2437	94.1	-	-	86.18	31.71	9.21	33	153	34	A	H
		2490.76	53.85	-20.15	74	45.64	31.93	9.28	33	153	34	P	H
		2485.23	44.22	-9.78	54	36.08	31.86	9.28	33	153	34	A	H
		2310.84	53.86	-20.14	74	46.33	31.59	8.94	33	269	90	P	V
		2375.1	43.92	-10.08	54	36.36	31.52	9.04	33	269	90	A	V
	*	2437	99.16	-	-	91.24	31.71	9.21	33	269	90	P	V
	*	2437	91.81	-	-	83.89	31.71	9.21	33	269	90	A	V
		2486.21	54.16	-19.84	74	46.02	31.86	9.28	33	269	90	P	V
		2484.32	44.47	-9.53	54	36.33	31.86	9.28	33	269	90	A	V



802.11n HT20 CH 11 2462MHz	*	2462	101.14	-	-	93.14	31.79	9.21	33	161	36	P	H
	*	2462	93.91	-	-	85.91	31.79	9.21	33	161	36	A	H
		2486.12	55.15	-18.85	74	47.01	31.86	9.28	33	161	36	P	H
		2483.88	46.1	-7.9	54	37.96	31.86	9.28	33	161	36	A	H
	*	2462	98.55	-	-	90.55	31.79	9.21	33	245	93	P	V
	*	2462	91.71	-	-	83.71	31.79	9.21	33	245	93	A	V
		2484.12	54.08	-19.92	74	45.94	31.86	9.28	33	245	93	P	V
		2483.64	45.47	-8.53	54	37.33	31.86	9.28	33	245	93	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	42.39	-31.61	74	53.2	33.77	12.9	57.48	185	255	P	H
		4824	45.08	-28.92	74	55.89	33.77	12.9	57.48	185	255	P	V
802.11n HT20 CH 06 2437MHz		4874	42.29	-31.71	74	53.05	33.75	13.01	57.52	165	106	P	H
		7311	46.99	-27.01	74	53.94	35.46	16.51	58.92	174	100	P	H
		4874	44.16	-29.84	74	54.92	33.75	13.01	57.52	165	106	P	V
		7311	45.43	-28.57	74	52.38	35.46	16.51	58.92	174	100	P	V
802.11n HT20 CH 11 2462MHz		4924	43.73	-30.27	74	54.34	33.73	13.21	57.55	150	285	P	H
		7386	46.35	-27.65	74	53.1	35.61	16.6	58.96	155	274	P	H
		4924	42.79	-31.21	74	53.4	33.73	13.21	57.55	150	285	P	V
		7386	46.38	-27.62	74	53.13	35.61	16.6	58.96	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2388.68	54.8	-19.2	74	47.16	31.5	9.14	33	129	41	P	H
		2389.8	45.7	-8.3	54	38.06	31.5	9.14	33	129	41	A	H
	*	2422	96.91	-	-	89.13	31.64	9.14	33	129	41	P	H
	*	2422	89.85	-	-	82.07	31.64	9.14	33	129	41	P	H
		2484.18	53.87	-20.13	74	45.73	31.86	9.28	33	129	41	P	H
		2485.09	44.22	-9.78	54	36.08	31.86	9.28	33	129	41	A	H
		2388.4	53.61	-20.39	74	45.97	31.5	9.14	33	260	102	P	V
		2389.94	45.7	-8.3	54	38.06	31.5	9.14	33	260	102	A	V
	*	2422	95.03	-	-	87.25	31.64	9.14	33	260	102	P	V
	*	2422	88.39	-	-	80.61	31.64	9.14	33	260	102	A	V
		2498.81	54.32	-19.68	74	46.11	31.93	9.28	33	260	102	P	V
		2497.83	44.73	-9.27	54	36.52	31.93	9.28	33	260	102	A	V
802.11n HT40 CH 06 2437MHz		2389.66	55.16	-18.84	74	47.52	31.5	9.14	33	154	34	P	H
		2389.94	46.14	-7.86	54	38.5	31.5	9.14	33	154	34	A	H
	*	2437	99.49	-	-	91.57	31.71	9.21	33	154	34	P	H
	*	2437	92.58	-	-	84.66	31.71	9.21	33	154	34	A	H
		2489.01	54.24	-19.76	74	46.03	31.93	9.28	33	154	34	P	H
		2483.69	45.34	-8.66	54	37.2	31.86	9.28	33	154	34	A	H
		2389.38	54.62	-19.38	74	46.98	31.5	9.14	33	241	99	P	V
		2389.8	45.51	-8.49	54	37.87	31.5	9.14	33	241	99	A	V
	*	2437	96.72	-	-	88.8	31.71	9.21	33	241	99	P	V
	*	2437	89.85	-	-	81.93	31.71	9.21	33	241	99	A	V
		2483.62	54.44	-19.56	74	46.3	31.86	9.28	33	241	99	P	V
		2483.62	44.66	-9.34	54	36.52	31.86	9.28	33	241	99	A	V



802.11n HT40 CH 09 2452MHz		2312.1	53.25	-20.75	74	45.72	31.59	8.94	33	163	38	P	H
		2380.98	43.73	-10.27	54	36.17	31.52	9.04	33	163	38	A	H
	*	2452	97.34	-	-	89.42	31.71	9.21	33	163	38	P	H
	*	2452	90.35	-	-	82.43	31.71	9.21	33	163	38	A	H
		2484.04	54.91	-19.09	74	46.77	31.86	9.28	33	163	38	P	H
		2483.76	45.96	-8.04	54	37.82	31.86	9.28	33	163	38	A	H
		2334.36	53.74	-20.26	74	46.23	31.57	8.94	33	232	94	P	V
		2389.38	43.77	-10.23	54	36.13	31.5	9.14	33	232	94	A	V
	*	2452	94.92	-	-	87	31.71	9.21	33	232	94	P	V
	*	2452	87.78	-	-	79.86	31.71	9.21	33	232	94	A	V
		2486.21	53.91	-20.09	74	45.77	31.86	9.28	33	232	94	P	V
		2483.55	44.9	-9.1	54	36.76	31.86	9.28	33	232	94	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4844	43.25	-30.75	74	53.96	33.77	13.01	57.49	150	350	P	H
HT40		7266	45.43	-28.57	74	52.48	35.4	16.46	58.91	200	360	P	H
CH 03		4844	44.11	-29.89	74	54.82	33.77	13.01	57.49	150	350	P	V
2422MHz		7266	46.43	-27.57	74	53.48	35.4	16.46	58.91	200	360	P	V
802.11n		4874	42.04	-31.96	74	52.8	33.75	13.01	57.52	165	230	P	H
HT40		7311	45.79	-28.21	74	52.74	35.46	16.51	58.92	161	360	P	H
CH 06		4874	42.27	-31.73	74	53.03	33.75	13.01	57.52	165	230	P	V
2437MHz		7311	47.14	-26.86	74	54.09	35.46	16.51	58.92	186	323	P	V
802.11n		4904	43.17	-30.83	74	53.86	33.74	13.11	57.54	150	360	P	H
HT40		7356	46.25	-27.75	74	53.09	35.55	16.55	58.94	165	335	P	H
CH 09		4904	44.31	-29.69	74	55	33.74	13.11	57.54	150	360	P	V
2452MHz		7356	45.62	-28.38	74	52.46	35.55	16.55	58.94	165	335	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		34.85	24.22	-15.78	40	33.22	21.5	1	31.5	-	-	P	H
		95.96	26.52	-16.98	43.5	40.47	15.9	1.75	31.6	-	-	P	H
		174.53	28.32	-15.18	43.5	41.89	15.43	2.35	31.35	-	-	P	H
		199.75	27	-16.5	43.5	40.18	15.6	2.52	31.3	-	-	P	H
		638.19	29.42	-16.58	46	31.72	24.65	4.5	31.45	-	-	P	H
		890.39	31.03	-14.97	46	30.72	26.47	5.32	31.48	100	183	P	H
		35.82	33.74	-6.26	40	43.3	20.92	1.02	31.5	100	194	P	V
		165.8	32.31	-11.19	43.5	45.6	15.77	2.3	31.36	-	-	P	V
		467.47	26.68	-19.32	46	31.41	22.81	3.85	31.39	-	-	P	V
		633.34	28.72	-17.28	46	31.08	24.63	4.48	31.47	-	-	P	V
		829.28	30.35	-15.65	46	30.28	26.29	5.14	31.36	-	-	P	V
		918.52	31.55	-14.45	46	30.91	26.67	5.4	31.43	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.


Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	97.94	2.068	0.484	1KHz
802.11n HT20	97.36	1.920	0.521	1KHz
802.11n HT40	95.59	0.943	1.060	3KHz


802.11b

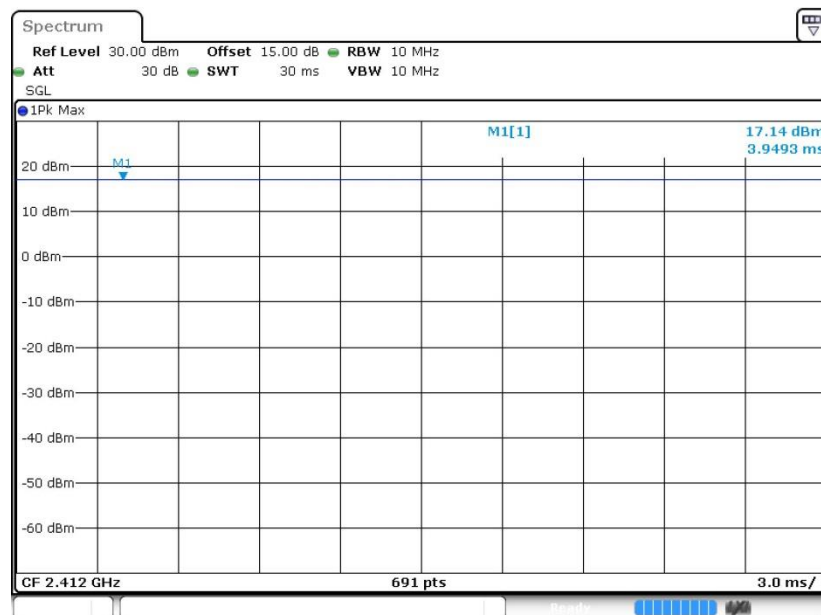

802.11g

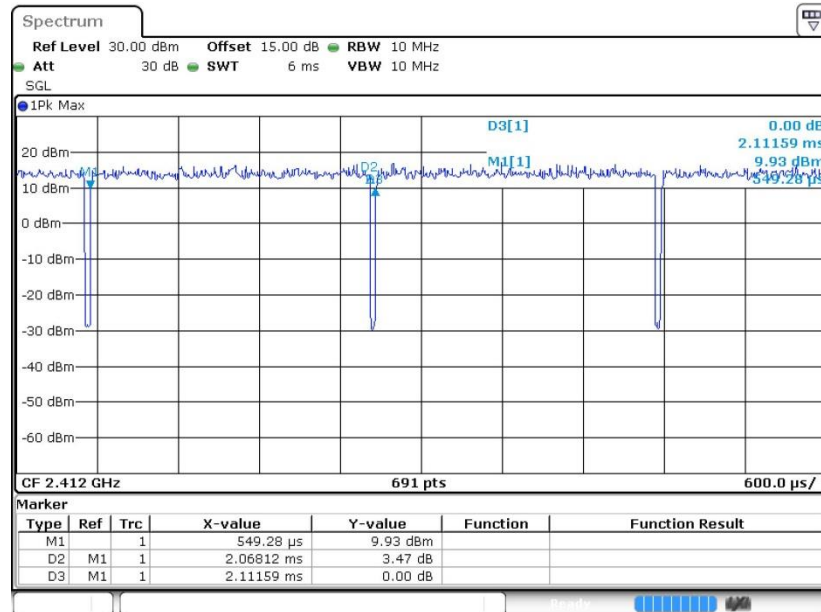

802.11n HT20

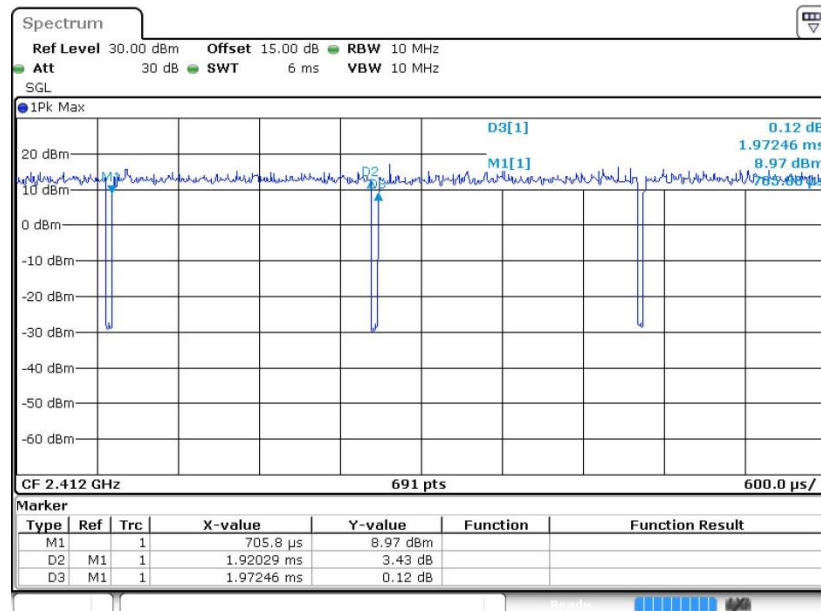



802.11n HT40

