

MEASUREMENT REPORT

of

IEEE 802.11b Wireless PCI Adapter

Applicant : CAMEO COMMUNICATIONS, INC.
Product Name : IEEE 802.11b Wireless PCI Adapter
Model Name : WLB-1200; WLB-1201; TEW-228PI; FD1814;
FD1814-A; ALL0181; S21191; GW-7100PCI
FCC ID : NHPWLB1200
Report No. : C5115640

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.


We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

Applicant : CAMEO COMMUNICATIONS, INC.
Applicant address : 6F, No.22, Chung Shin Rd., Hsi-Chih, Taipei 221, Taiwan
Product Name : IEEE 802.11b Wireless PCI Adapter
Model Name : WLB-1200; WLB-1201; TEW-228PI; FD1814;
FD1814-A; ALL0181; S21191; GW-7100PCI
FCC ID : NHPWLB1200
Test Report No. : C5115640
Test Date : May 8, 2003

Prepared by:


Jack Tsai

Approved by:


Frank Tsai

Conditions of issue :

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**

★ **NVLAP LAB CODE: 200174-0**

Federal Communications Commission

Declaration of Conformity

(DoC)

For the Following Equipment:

Product name : IEEE 802.11b Wireless PCI Adapter
Model name : WLB-1200; WLB-1201; TEW-228PI; FD1814;
 FD1814-A; ALL0181; S21191; GW-7100PCI
Trade name : CAMEO Communications, Inc. ; Trendware ; SVEC ; ALLNET ;
 KEY Systems Corp.

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number: C5115640

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,
including interference that may cause undesired operation

<i>Manufacturer</i>	<i>USA local representative</i>
Company name: CAMEO COMMUNICATIONS, INC.	To be determined
Computer address: 6F, No.22, Chung Shin Rd., Hsi-Chih, Taipei, Taiwan	
ZIP / Postal code 221	
Contact person: Jason Chang	
Title: Wireless Comm RD Dept Manager	
Internet e-mail address: jason_chang@mail.cameo.com.tw	
Tel / Fax: 886-2-26499800 / 886-2-26499984	

Tables of Contents

Declaration of Conformity (DoC)	3
I. GENERAL	6
1.1 Introduction	6
1.2 Description of EUT	6
1.3 Test method	6
1.4 Description of Support Equipment	7
1.5 Configuration of System Under Test	10
1.6 Verify the Frequency and Channel	12
1.7 Test Procedure	13
1.8 Location of the Test Site	13
1.9 General Test Condition	13
II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators	14
III. Section 15.203 : Antenna Requirement	15
IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	16
4.1 Test Condition & Setup	16
4.2 List of Test Instruments	16
4.3 Test Result of Conducted Emissions	17
Undetachable antenna	16
Detachable antenna	19
V. Section 15.247(a) : Technical Description of the EUT	22
VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System	23
6.1 Test Condition & Setup	23
6.2 Test Instruments Configuration	23
6.3 List of Test Instruments	23
6.4 Test Result of Bandwidth	24
Channel 01	25
Channel 06	26
Channel 11	27

VII. Section 15.247(b) : Power Output	28
7.1 Test Condition & Setup	28
7.2 List of Test Instruments	28
7.3 Test Result	28
VIII. Section 15.247(c) : Spurious Emissions (Radiated)	29
8.1 Test Condition & Setup	29
8.2 List of Test Instruments	30
8.3 Test Result of Spurious Radiated Emissions	31
Undetachable antenna for 30MHz to 1GHz	31
Detachable antenna for 30MHz to 1GHz	32
Undetachable antenna for 1GHz to 25GHz	33
Detachable antenna for 1GHz to 25GHz	36
8.4 Test Result of Bandedge	39
Undetachable antenna	40
Detachable antenna	42
IX. Section 15.247(d) : Power Spectral Density	44
9.1 Test Condition & Setup	44
9.2 Test Instruments Configuration	44
9.3 List of Test Instruments	44
9.4 Test Result of Power Spectral Density	44
Channel 01	45
Channel 06	46
Channel 11	47
Appendix A: Brand name and Modem name List	48

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the *cable gateway* certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

Product Name : IEEE 802.11b Wireless PCI Adapter
Model Name : WLB-1200; WLB-1201; TEW-228PI; FD1814;
FD1814-A; ALL0181; S21191; GW-7100PCI
Granted FCC ID : NHPWLB1200
Frequency Range : 2.412 GHz ~ 2.462GHz
Support Channel : 11 Channel
Modulation Skill : DBPSK, DQPSK, CCK
Power Type : By the Protocol Control Information interface of computer

1.3 Test method

1. Put the EUT into a personal computer's PCI bus and screw it.
2. Using the PC and software provided by the manufacturer to control the EUT in the continuous transmission mode, the test is performed under those specific conditions.
3. Then making EUT to the mode of continuous transmission and set different channel being tested and repeat the procedures above.
 - (a) Radiated for intentional test:
making EUT to the mode of continuous transmission
 - (b) Conducted and Radiated for unintentional test:
making EUT to the linking (Rx/Tx) mode with far support equipments

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : IBM 6840
 Model No. : 6840MJV
 Serial No. : 96CC 0BT
 FCC ID : DoC Approved
 檢磁 : 3892I279
 Power type : 100 ~ 127/ 200 ~ 240VAC, 4A/2A 50/60 Hz, Switching
 Power cord : Non-shielded, 182cm length, Plastic hood, No ferrite core

Monitor : HP 15' Color Monitor
 Model No. : D2827A
 Serial No. : KR91161716
 FCC ID : C5F7NFCMC1518X
 檢磁 : 3872B039
 Power type : 110 ~ 240 VAC / 50 ~ 60 Hz, Switching
 Power cord : Shielded, 1.83m long, No ferrite core
 Data cable : Shielded, 1.46m long, with two ferrite cores

Keyboard : HP
 Model No. : 5181
 Serial No. : BE21700405
 FCC ID : Doc Approved
 檢磁 : 3892C981
 Power type : By PC
 Data cable : Shielded, 1.70m length, with ferrite core

PS/2 Mouse : HP
 Model No. : M-S34
 Serial No. : LZB90714106
 FCC ID : DZL211029
 檢磁 : 4862A011
 Power type : By PC
 Power cord : Non-shielded, 1.88m long, No ferrite core

Printer : HP
Model No. : C6464A
Serial No. : TH16LEB5PK
FCC ID : N/A, DoC Approved
檢磁 : 3892H381
Power type : Switching Adapter
Power cord : Non-shield, 173cm long, No ferrite core
(between adaptor and AC source)
Non-shielded, 180cm long, with ferrite core
(between printer and adaptor)
Data cable : Shielded, 1.70m long, No ferrite core

Fax/Modem : Aceex
Model No. : DM-1414
Serial No. : 9010582
FCC ID : IFAXDM1414
Power type : 110 VAC / 50 ~ 60 Hz, Switching
Power Cord : Non-shielded, 1.90m long, Plastic hoods, and no ferrite bead
Data Cable : RS-232→ Shielded, 1.30m long, Metal hoods , No bead
RJ-11Cx2→ Non-shielded, 7' long, Plastic hoods, No bead

USBGamepad : Rockfire
Model No. : QF-337UV
Serial No. : KR91379759
FCC ID : None (CE approval)
Data cable : Shielded, 1.80m long, No ferrite core

Notebook : ASUSTek Computer
Model No. : AB00F
Serial No. : 24NP016361
FCC ID : DoC Approved
BSMI : 41016012
Power type : 100 ~ 240VAC, 1A 50/60 Hz, Switching

Adaptor of

Notebook : **LITE-ON Electronics, Inc.**

Model No. : PA-1530-01

Serial No. : 00151184

FCC ID : Doc Approved

檢磁 : 3882B259

Power cable : Non-shielded, 1.72m length, Plastic hood, No ferrite core
(Between power adaptor and AC power source)

Power cable : Shielded, 1.48m length, Plastic hood, with ferrite core
(Between power adaptor and notebook)


WLAN Card : **Gemtek Technology Co., Ltd.**

Model No. : C911003

FCC ID : MXF-C911003

1.5 Configuration of System Under Test


(Conducted and Radiated for unintentional)

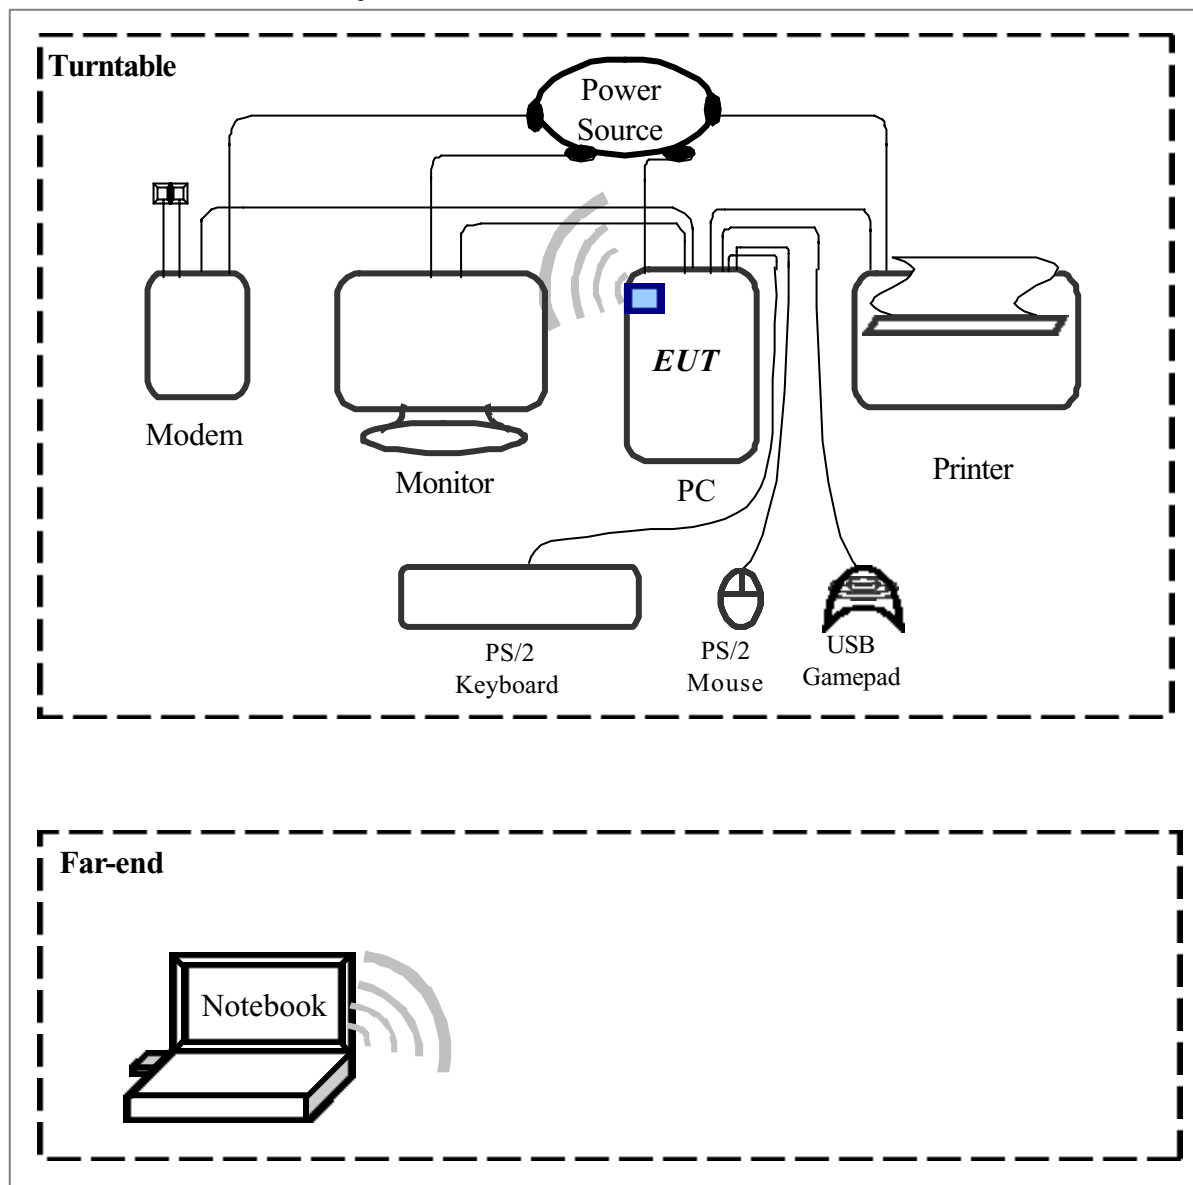

Connections of Computer:

- *Parallel Port --- a printer
- *Serial Port --- an external modem
- *PS/2 Port --- a PS/2 keyboard
- *PS/2 Port --- a PS/2 mouse
- *USB Port --- a USB gamepad
- *PCI Interface --- EUT

(Radiated of intentional)

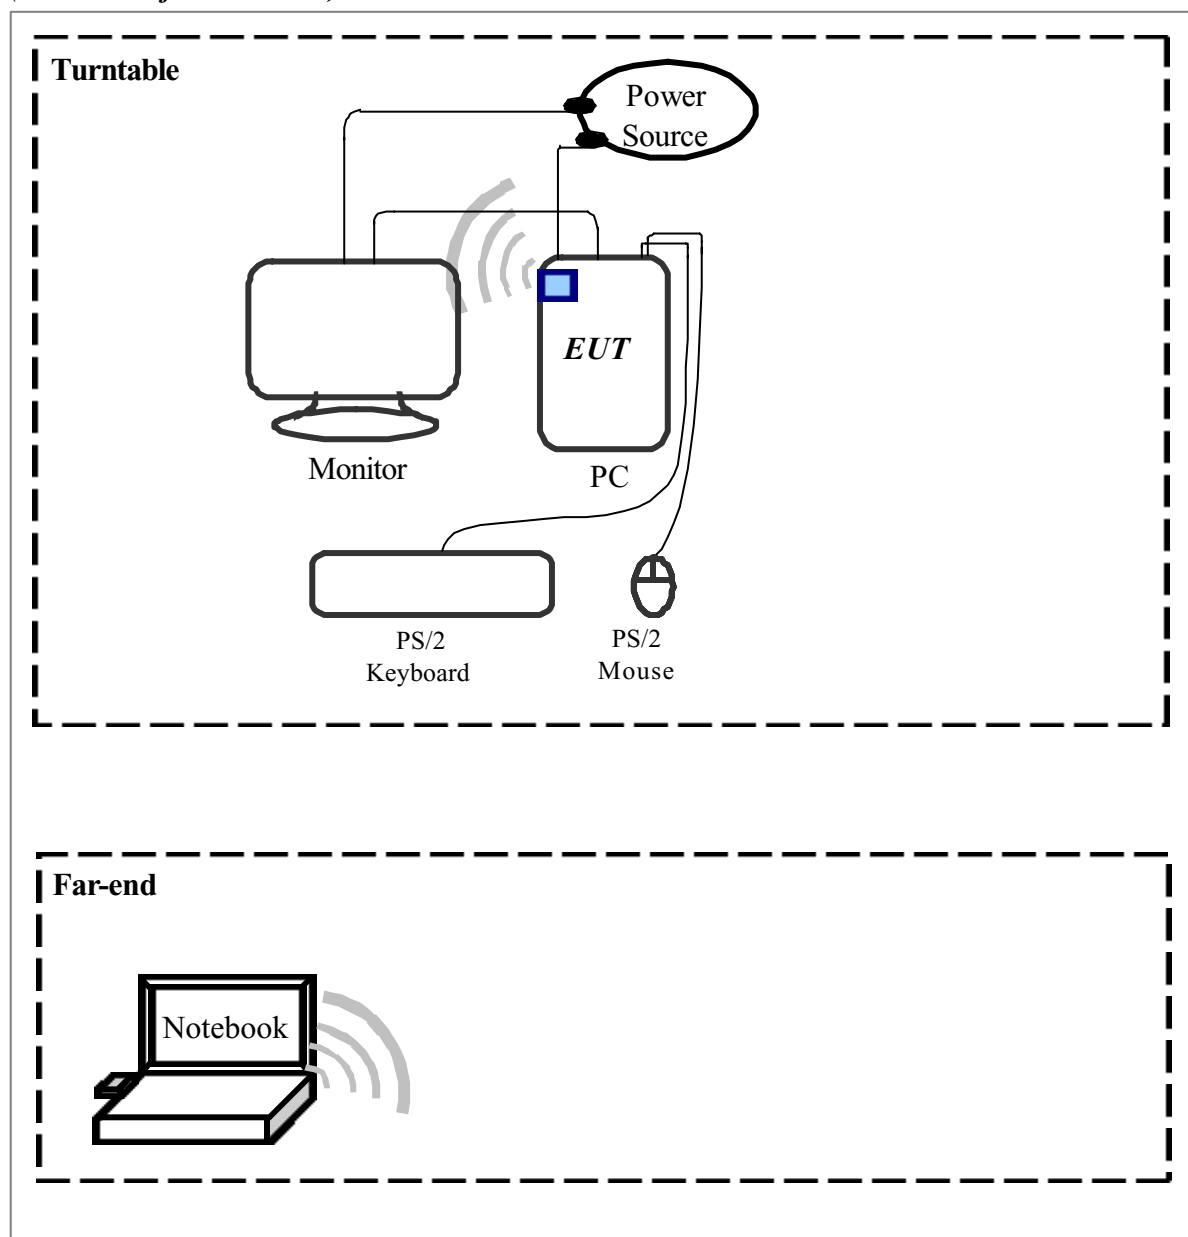

The tests below are carried out the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number.

The setting up procedure was recorded in <1.3> test method.

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a PCI interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Sect.15.107 (Conducted limits) and Sect.15.109 (Radiated emission limits) is same as Sect.15.207 and 15.247(C).

III. Section 15.203: Antenna requirement

The EUT has two kinds of antennas. Besides, it has an integral undetachable antenna, or detachable antenna. The detachable antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but does not use a standard antenna jack or electrical connector. The antenna requirement stated in Sect.15.203 is inapplicable to this EUT.

The antenna specification list as below:

(1) Undetachable

Manufacturer : Wha Yu Industrial Co., Ltd.
Part No. : C512-510052-A
Antenna Type : Dipole Antenna
Antenna Gain : 1.8dBi (Max.)
Coaxial Cable : Mil-C-17 RG-178

(2) Detachable

Manufacturer : Wha Yu Industrial Co., Ltd.
Part No. : C512-510070-A
Connector : SMA Straight Plug / Reverse
Antenna Type : Dipole Antenna
Antenna Gain : 1.8dBi (Max.)

IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units

4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.4.

There is a test condition apply in this test item, the test procedure description as <1.3 test method>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

4.2 List of Test Instruments

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Calibration Date</u>	
				<u>Last time</u>	<u>Next time</u>
EMI Receiver	8546A	H P	3520A00242	06/28/02	06/28/03
RF Filter Section	85460A	H P	3448A00217	06/28/02	06/28/03
LISN (EUT)	LISN-01	TRC	9912-03,04	06/04/02	06/04/03
LISN (Support E.)	LISN-01	TRC	9912-05	07/15/02	07/15/03
Auto Switch Box	ASB-01	TRC	9904-01	11/20/02	11/20/03
(< 30MHz)					

The level of confidence of 95%, the uncertainty of measurement of conducted emission is ± 2.02 dB.

4.3 Test Result of Power Line Conducted Emissions

EUT station transmit only

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. The worst case to show as follows.

Test Conditions: Temperature : 20.2 °C Humidity : 58.8 % RH

Table 1 Test mode: Undetachable Antenna, Channel 1

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	208.000	48.84	---	---	64.34	54.34	-5.50
	352.000	38.33	---	---	60.23	50.23	-11.90
	405.000	39.90	---	---	58.71	48.71	-8.81
	456.000	36.08	---	---	57.26	47.26	-11.18
	509.000	35.80	---	---	56.00	46.00	-10.20
	928.000	24.67	---	---	56.00	46.00	-21.33
Line 2	203.000	47.03	---	---	64.49	54.49	-7.46
	370.000	41.12	---	---	59.71	49.71	-8.59
	409.000	39.33	---	---	58.60	48.60	-9.27
	456.000	37.02	---	---	57.26	47.26	-10.24
	504.000	34.22	---	---	56.00	46.00	-11.78
	919.000	25.03	---	---	56.00	46.00	-20.97

NOTE:

(1)Margin = Peak Amplitude – Limit, The reading amplitudes are all under limit.

(2)A "+" sign in the margin column means the emission is OVER the Class B Limit
and "-" sign of means UNDER the Class B limit

Table 2 Test mode: Undetachable Antenna, Channel 6

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	203.000	49.05	---	---	59.71	49.71	-11.44
	366.000	37.90	---	---	56.00	46.00	-9.21
	405.000	39.49	---	---	56.00	46.00	-6.15
	456.000	37.29	---	---	56.00	46.00	-5.96
	504.000	34.41	---	---	56.00	46.00	-4.05
	919.000	23.85	---	---	56.00	46.00	-4.71
Line 2	205.000	48.47	---	---	64.43	54.43	-5.96
	409.000	39.64	---	---	58.60	48.60	-8.96
	456.000	37.02	---	---	57.26	47.26	-10.24
	499.000	34.98	---	---	56.03	46.03	-11.05
	928.000	25.73	---	---	56.00	46.00	-20.27
	1006.000	26.34	---	---	56.00	46.00	-19.66

Table 3 Test mode: Undetachable Antenna, Channel 11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	205.000	49.15	---	---	64.43	54.43	-5.28
	405.000	38.91	---	---	58.71	48.71	-9.80
	456.000	36.26	---	---	57.26	47.26	-11.00
	504.000	33.97	---	---	56.00	46.00	-12.03
	919.000	25.82	---	---	56.00	46.00	-20.18
	2201.000	22.31	---	---	56.00	46.00	-23.69
Line 2	205.000	49.36	---	---	64.43	54.43	-5.07
	373.000	39.28	---	---	59.63	49.63	-10.35
	409.000	39.05	---	---	58.60	48.60	-9.55
	509.000	35.47	---	---	56.00	46.00	-10.53
	1006.000	24.74	---	---	56.00	46.00	-21.26
	3349.000	22.81	---	---	56.00	46.00	-23.19

Table 4 Test mode: Undetachable Antenna, Standby

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	203.000	49.38	---	---	64.49	54.49	-5.11
	401.000	38.54	---	---	58.83	48.83	-10.29
	456.000	36.84	---	---	57.26	47.26	-10.42
	504.000	35.26	---	---	56.00	46.00	-10.74
	919.000	23.92	---	---	56.00	46.00	-22.08
	1936.000	23.27	---	---	56.00	46.00	-22.73
Line 2	203.000	48.63	---	---	64.49	54.49	-5.86
	405.000	40.83	---	---	58.71	48.71	-7.88
	452.000	35.96	---	---	57.37	47.37	-11.41
	504.000	34.04	---	---	56.00	46.00	-11.96
	998.000	23.08	---	---	56.00	46.00	-22.92
	2243.000	22.81	---	---	56.00	46.00	-23.19

Table 5 Test mode: Detachable Antenna, Channel 1

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	203.000	47.45	---	---	64.49	54.49	-7.04
	373.000	39.64	---	---	59.63	49.63	-9.99
	409.000	38.33	---	---	58.60	48.60	-10.27
	456.000	36.46	---	---	57.26	47.26	-10.80
	504.000	35.96	---	---	56.00	46.00	-10.04
	2265.000	22.31	---	---	56.00	46.00	-23.69
Line 2	205.000	49.12	---	---	64.43	54.43	-5.31
	355.000	38.15	---	---	60.14	50.14	-11.99
	409.000	39.37	---	---	58.60	48.60	-9.23
	452.000	37.11	---	---	57.37	47.37	-10.26
	504.000	35.75	---	---	56.00	46.00	-10.25
	919.000	25.21	---	---	56.00	46.00	-20.79

Table 6 Test mode: Detachable Antenna, Channel 6

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	203.000	48.75	---	---	64.49	54.49	-5.74
	370.000	38.33	---	---	59.71	49.71	-11.38
	405.000	39.47	---	---	58.71	48.71	-9.24
	452.000	36.67	---	---	57.37	47.37	-10.70
	504.000	35.92	---	---	56.00	46.00	-10.08
	2179.000	23.80	---	---	56.00	46.00	-22.20
Line 2	206.000	48.34	---	---	64.40	54.40	-6.06
	377.000	39.42	---	---	59.51	49.51	-10.09
	405.000	38.75	---	---	58.71	48.71	-9.96
	456.000	36.22	---	---	57.26	47.26	-11.04
	509.000	34.18	---	---	56.00	46.00	-11.82
	1006.000	24.55	---	---	56.00	46.00	-21.45

Table 7 Test mode: Detachable Antenna, Channel 11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	203.000	49.03	---	---	64.49	54.49	-5.46
	409.000	38.63	---	---	58.60	48.60	-9.97
	499.000	36.19	---	---	56.03	46.03	-9.84
	928.000	24.27	---	---	56.00	46.00	-21.73
	1836.000	22.83	---	---	56.00	46.00	-23.17
	2951.000	23.32	---	---	56.00	46.00	-22.68
Line 2	203.000	48.70	---	---	64.49	54.49	-5.79
	377.000	38.63	---	---	59.51	49.51	-10.88
	456.000	37.05	---	---	57.26	47.26	-10.21
	504.000	33.84	---	---	56.00	46.00	-12.16
	1006.000	23.11	---	---	56.00	46.00	-22.89
	3004.000	25.87	---	---	56.00	46.00	-20.13

Table 8 Test mode: Detachable Antenna, Standby

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	208.000	48.56	---	---	64.34	54.34	-5.78
	401.000	40.34	---	---	58.83	48.83	-8.49
	456.000	36.51	---	---	57.26	47.26	-10.75
	504.000	36.10	---	---	56.00	46.00	-9.90
	928.000	23.01	---	---	56.00	46.00	-22.99
	1766.000	22.20	---	---	56.00	46.00	-23.80
Line 2	206.000	49.00	---	---	64.40	54.40	-5.40
	409.000	39.24	---	---	58.60	48.60	-9.36
	504.000	34.98	---	---	56.00	46.00	-11.02
	911.000	24.78	---	---	56.00	46.00	-21.22
	998.000	24.55	---	---	56.00	46.00	-21.45
	3004.000	24.55	---	---	56.00	46.00	-21.45

V. Section 15.247 (a): Technical description of the EUT


Based on the Section 2.1, *Direct Sequence System* is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the Direct sequence spread spectrum system.

VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

6.2 Test Instruments Configuration

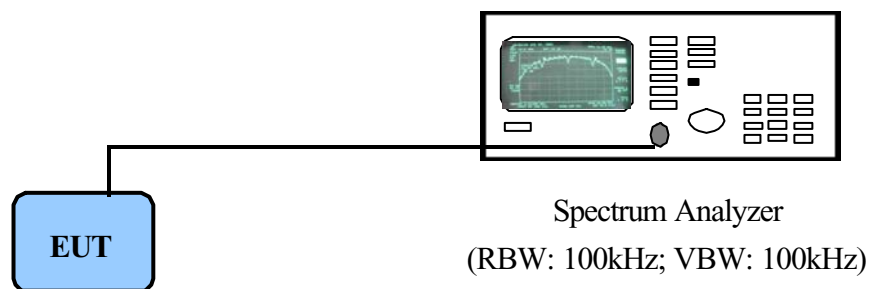

P.S.: Notebook computer to control the EUT at maximal power output and channel Number and set antenna kit

6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/11/02	09/11/03

6.4 Test Result of Bandwidth

Bandwidth of Channel 1

Bandwidth : 8.64 MHz
The min. 6dB BW at least : 500 KHz

Bandwidth of Channel 6

Bandwidth : 8.88 MHz
The min. 6dB BW at least : 500 KHz


Bandwidth of Channel 11

Bandwidth : 7.68 MHz
The min. 6dB BW at least : 500 KHz


Note:

1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth (RBW)= $100kHz$ and set the $span \gg RBW$. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
2. The attachments show these on the following pages.


Bandwidth of Channel 1: 8.64 MHz

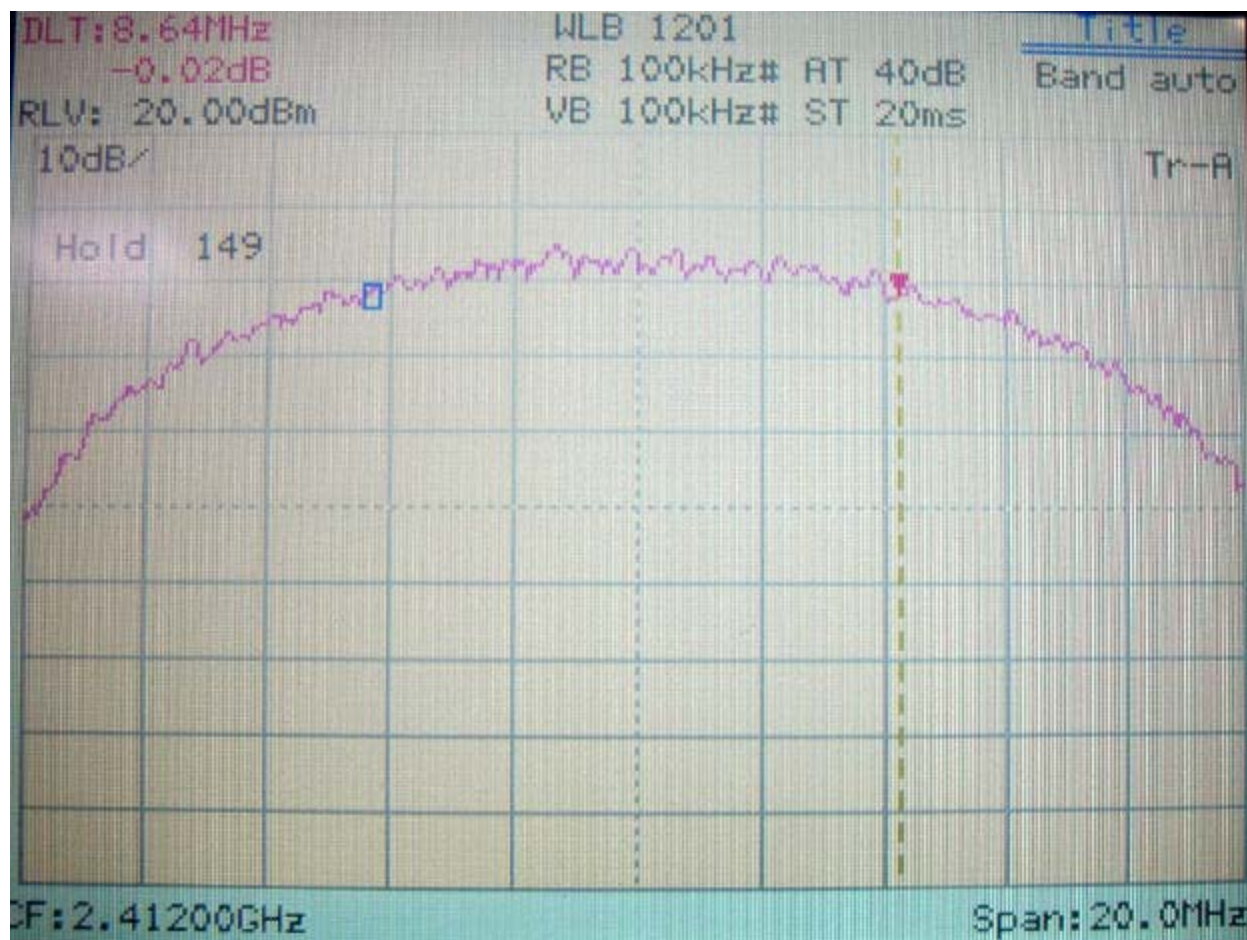

Bandwidth of Channel 6: 8.88 MHz

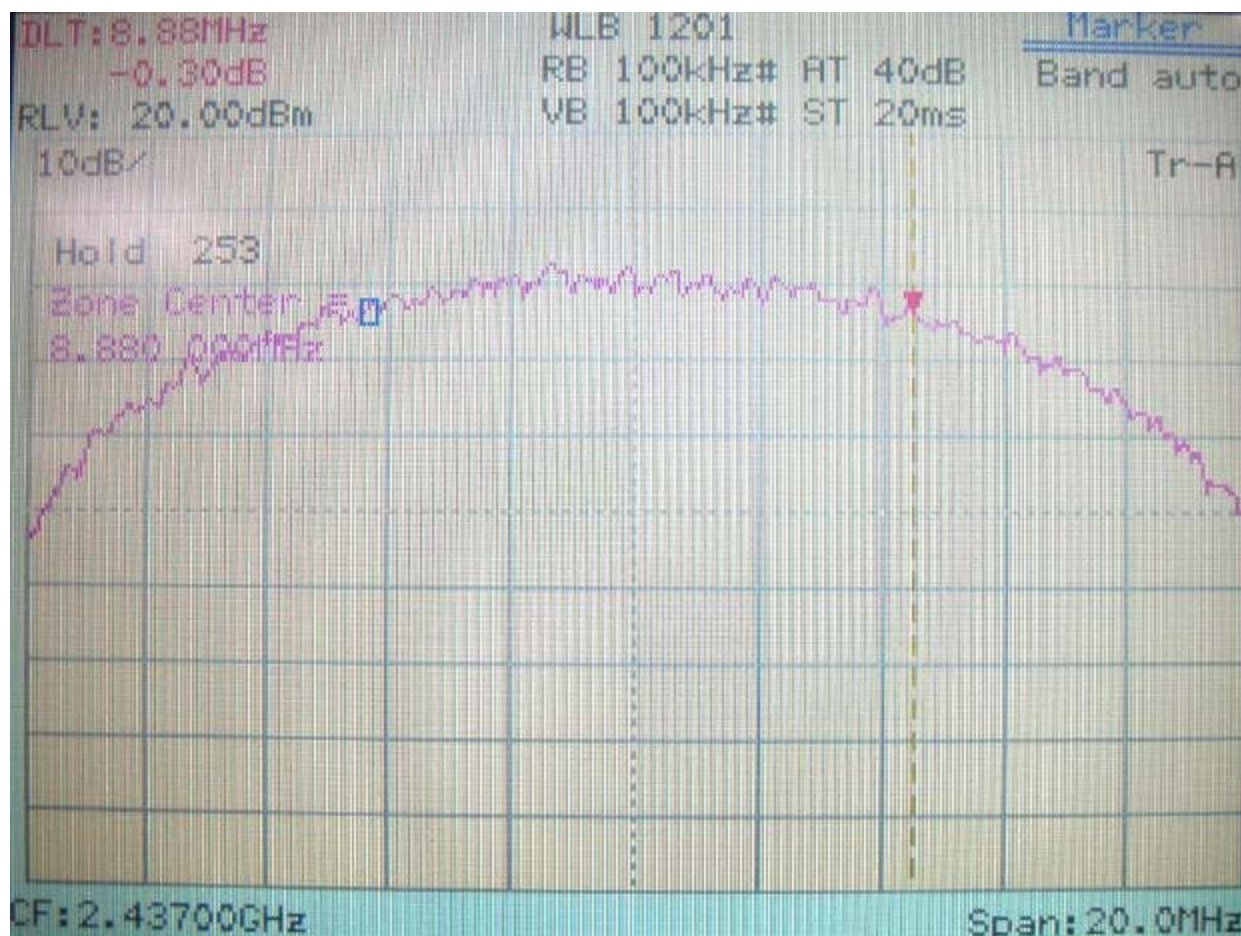


Bandwidth of Channel 11: 7.68 MHz

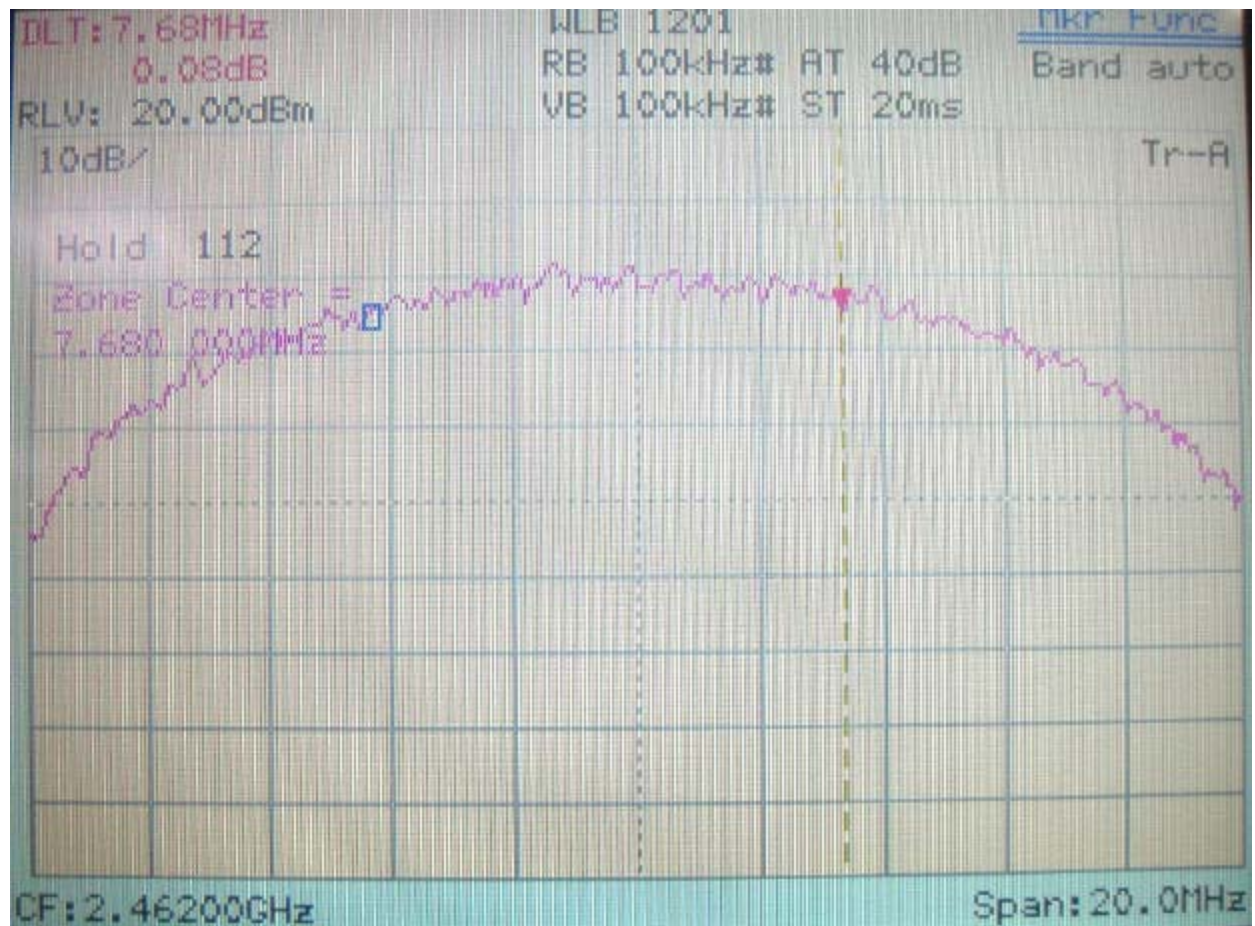

VII. Section 15.247(b): Power Output

7.1 Test Condition & Setup

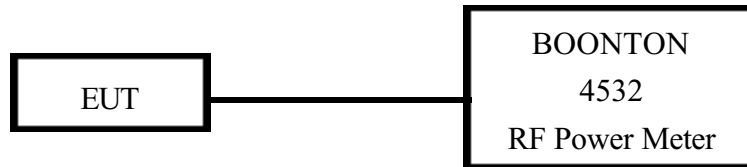

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

7.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.
RF Power Meter	4532	BOONTON	117501

7.3 Test Result

Formula:

Signal generator + |Cable loss| = Output peak power

Channel	Signal Generator	Cable Loss	Output peak power	
	dBm	dBm	dBm	mW
CH 1	19.14	0.50	19.64	92.045
CH 6	19.18	0.50	19.68	92.897
CH 11	18.25	0.50	18.75	74.989

Note:

The limit is vary according to the equipment class, listed below:

1. Spread Spectrum Transmitter (DSS): 1W

VIII. Section 15.247 (C): Spurious Emissions (Radiated)

8.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, M.E. whole range bi-log antenna (Model No.: VULB9160) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/CMT Horn Antenna (Model 3115 / RA42-K-F-4B-C) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition apply in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3 test method>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBμV/m) is determined by algebraically adding the measured reading in dBμV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

8.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	H P	3520A00242	06/28/02	06/28/03
RF Filter Section	85460A	H P	3448A00217	06/28/02	06/28/03
Bi-log Antenna	VULB9160	M. E.	3064	07/08/02	07/08/03
Switch/Control Unit	3488A	HP	N/A	11/20/02	11/20/03
(>30MHz)					
Auto Switch Box	ASB-01	TRC	9904-01	11/20/02	11/20/03
(>30MHz)					
Spectrum Analyzer	8564E	HP	US36433002	08/01/02	08/01/03
Microwave Preamplifier	83051A	HP	3232A00347	08/01/02	08/01/03
Horn Antenna	3115	EMCO	9704 – 5178	08/01/02	08/01/03
Horn Antenna	RA42-K-F-4B-C	CMT	961505-003	02/01/03	02/01/04
Anechoic Chamber (cable calibrated together)				05/20/02	05/20/03

The level of confidence of 95% , the uncertainty of measurement of radiated emission is $\pm 3.44\text{dB}$.

8.3 Test Result of Spurious Radiated Emissions

EUT's transmit only

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 23.5 ° C Humidity : 60.2 % RH

Table 9 Test mode: Undetachable antenna, 30MHz to 1GHz for Horizontal polarity

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
75.47	26.28	1.00	114	1.45	27.73	40.00	-12.27
530.76	26.57	1.00	340	5.98	32.55	46.00	-13.45
567.14	25.01	1.00	235	7.50	32.51	46.00	-13.49

Table 10 Test mode: Undetachable antenna, 30MHz to 1GHz for Vertical polarity

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
119.72	32.05	1.00	129	-1.25	30.80	43.50	-12.70
530.76	27.67	1.00	202	5.98	33.65	46.00	-12.35
563.50	28.20	1.00	18	7.37	35.57	46.00	-10.43

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain)

Table 11 Test mode: Detachable antenna, 30MHz to 1GHz for Horizontal polarity

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
71.22	26.08	1.00	136	1.97	28.05	40.00	-11.95
862.38	24.00	1.00	215	15.82	39.82	46.00	-6.18

Table 12 Test mode: Detachable antenna, 30MHz to 1GHz for Vertical polarity

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
71.22	25.63	1.00	199	1.97	27.60	40.00	-12.40
120.33	33.20	1.00	270	-1.27	31.93	43.50	-11.57
197.93	31.49	1.00	278	-2.64	28.85	43.50	-14.65
354.34	29.47	1.00	300	-1.20	28.27	46.00	-17.73

Table 13 Test mode: CH 1 of undetachable antenna, 1GHz to 25GHz for Horizontal polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4824.29	1.00	60	3.76	46.20	---	74.00	53.96	-7.76
7240.39	1.00	242	10.11	60.86	50.22	74.00	53.96	-3.74

Table 14 Test mode: CH 1 of undetachable antenna, 1GHz to 25GHz for Vertical polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4825.83	1.00	26	3.77	44.21	---	74.00	53.96	-9.75
7234.62	1.00	178	10.08	62.02	49.02	74.00	53.96	-4.94

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF Radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Table 15 Test mode: CH 6 of undetachable antenna, 1GHz to 25GHz for Horizontal polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
1990.97	1.00	159	1.87	38.71	---	74.00	53.96	-15.25
2268.75	1.00	246	2.73	41.90	---	74.00	53.96	-12.06
2591.67	1.00	147	3.62	44.95	---	74.00	53.96	-9.01
4875.17	1.00	226	3.96	45.90	---	74.00	53.96	-8.06
7303.29	1.00	35	10.28	52.22	---	74.00	53.96	-1.74

Table 16 Test mode: CH 6 of undetachable antenna, 1GHz to 25GHz for Vertical polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4875.17	1.00	26	3.96	46.73	---	74.00	53.96	-7.23
7309.96	1.00	178	10.29	55.22	43.23	74.00	53.96	-10.73

Table 17 Test mode: CH 11 of undetachable antenna, 1GHz to 25GHz for Horizontal polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4824.50	1.00	59	4.13	45.07	---	74.00	53.96	-8.89
7388.08	1.00	120	10.42	54.53	40.69	74.00	53.96	-13.27

Table 18 Test mode: CH 11 of undetachable antenna, 1GHz to 25GHz for Vertical polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4924.50	1.00	92	4.13	44.57	---	74.00	53.96	-9.39
7387.53	1.00	103	10.42	58.86	48.03	74.00	53.96	-5.93

Table 19 Test mode: CH 1 of detachable antenna, 1GHz to 25GHz for Horizontal polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4824.33	1.00	152	14.77	44.27	---	74.00	53.96	-9.69
7238.11	1.00	266	21.45	63.11	53.45	74.00	53.96	-0.51

Table 20 Test mode: CH 1 of detachable antenna, 1GHz to 25GHz for Vertical polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4826.75	1.00	32	14.79	45.79	---	74.00	53.96	-8.17
7234.61	1.00	113	21.44	60.28	50.77	74.00	53.96	-3.19

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF Radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Table 21 Test mode: CH 6 of detachable antenna, 1GHz to 25GHz for Horizontal polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4875.08	1.00	256	15.04	42.37	---	74.00	53.96	-11.59
7307.99	1.00	144	21.62	54.11	44.45	74.00	53.96	-9.51

Table 22 Test mode: CH 6 of detachable antenna, 1GHz to 25GHz for Vertical polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4875.08	1.00	89	15.04	45.21	---	74.00	53.96	-8.75
7309.61	1.00	106	21.62	53.61	43.12	74.00	53.96	-10.84

Table 23 Test mode: CH 11 of detachable antenna, 1GHz to 25GHz for Horizontal polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4825.83	1.00	200	15.27	42.77	---	74.00	53.96	-11.19
7386.00	1.00	164	21.77	48.77	---	74.00	53.96	-5.19

Table 24 Test mode: CH 11 of detachable antenna, 1GHz to 25GHz for Vertical polarity

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4925.83	1.00	52	15.27	40.10	---	74.00	53.96	-13.86
7387.52	1.00	101	21.79	52.78	43.11	74.00	53.96	-10.85

8.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a),*

We perform this section by the *conducted* manner, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured.* If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a).* (Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

Undetachable antenna, Channel 1

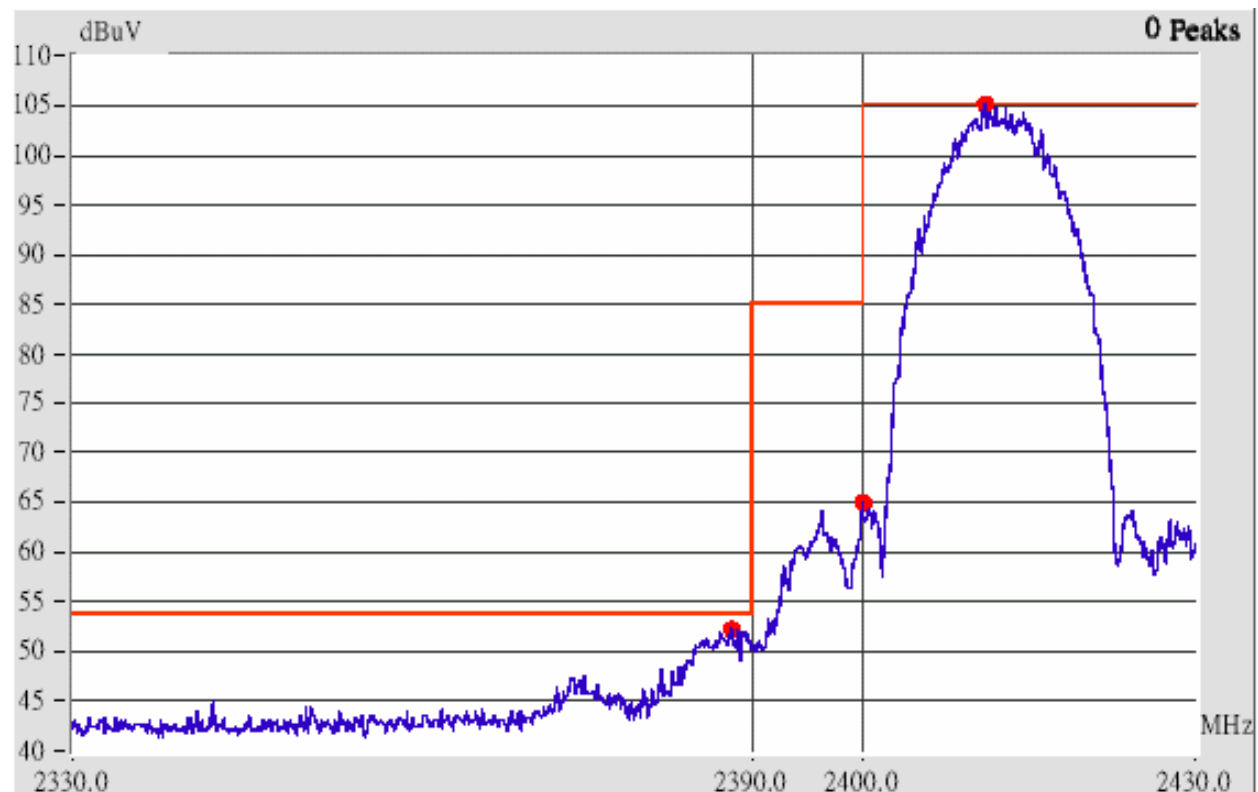


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2386.06	Hor	1.00	252	3.12	44.29	---	74.00	53.96	-9.67
2390.07	Hor	1.00	16	3.14	39.97	---	74.00	53.96	-13.99
2385.85	Ver	1.00	122	3.12	61.45	44.12	74.00	53.96	-9.84
2390.07	Ver	1.00	340	3.14	58.64	41.08	74.00	53.96	-12.88

Undetachable antenna, Channel 11

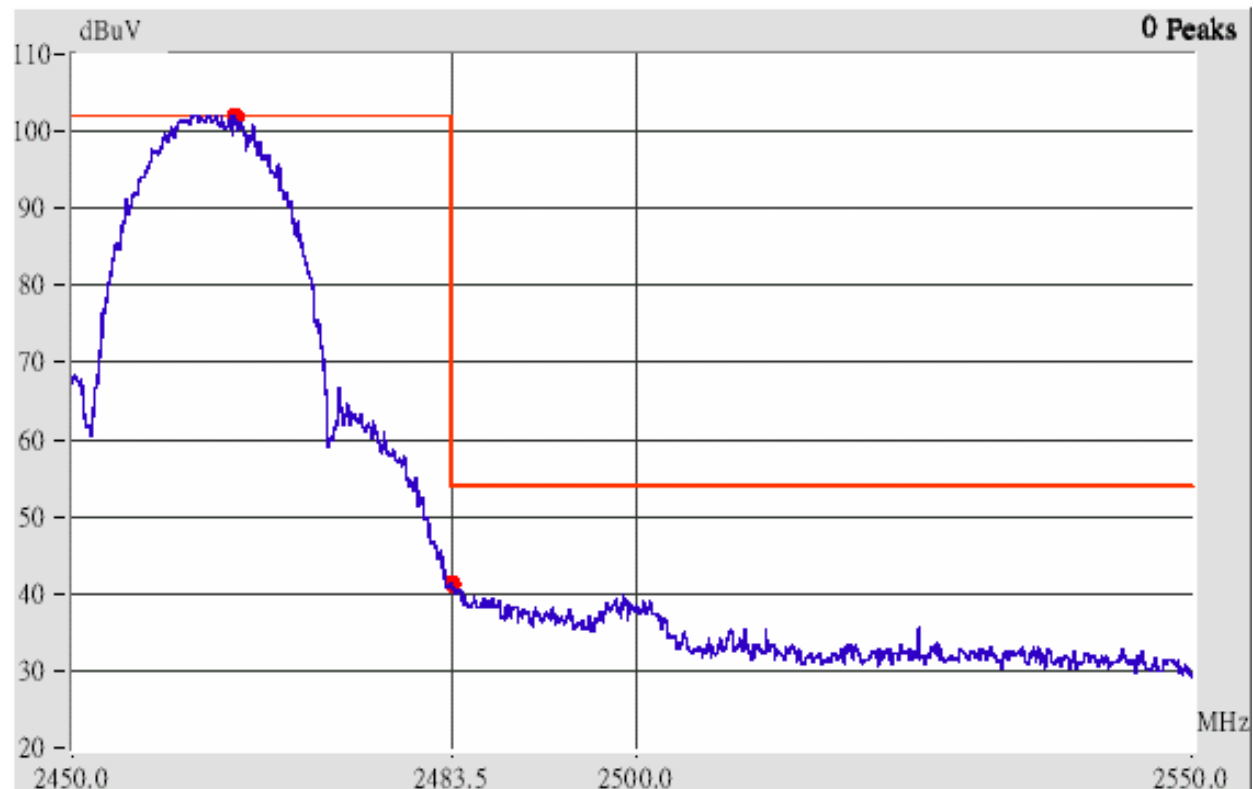


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2483.50	Hor	1.00	306	3.45	39.11	---	74.00	53.96	-14.85
2483.50	Ver	1.00	214	3.45	50.11	---	74.00	53.96	-3.85
2483.85	Ver	1.00	18	3.45	51.95	---	74.00	53.96	-2.01
2500.01	Ver	1.00	200	3.50	47.83	---	74.00	53.96	-6.13
2500.24	Ver	1.00	329	3.50	49.00	---	74.00	53.96	-4.96

Detachable antenna, Channel 1

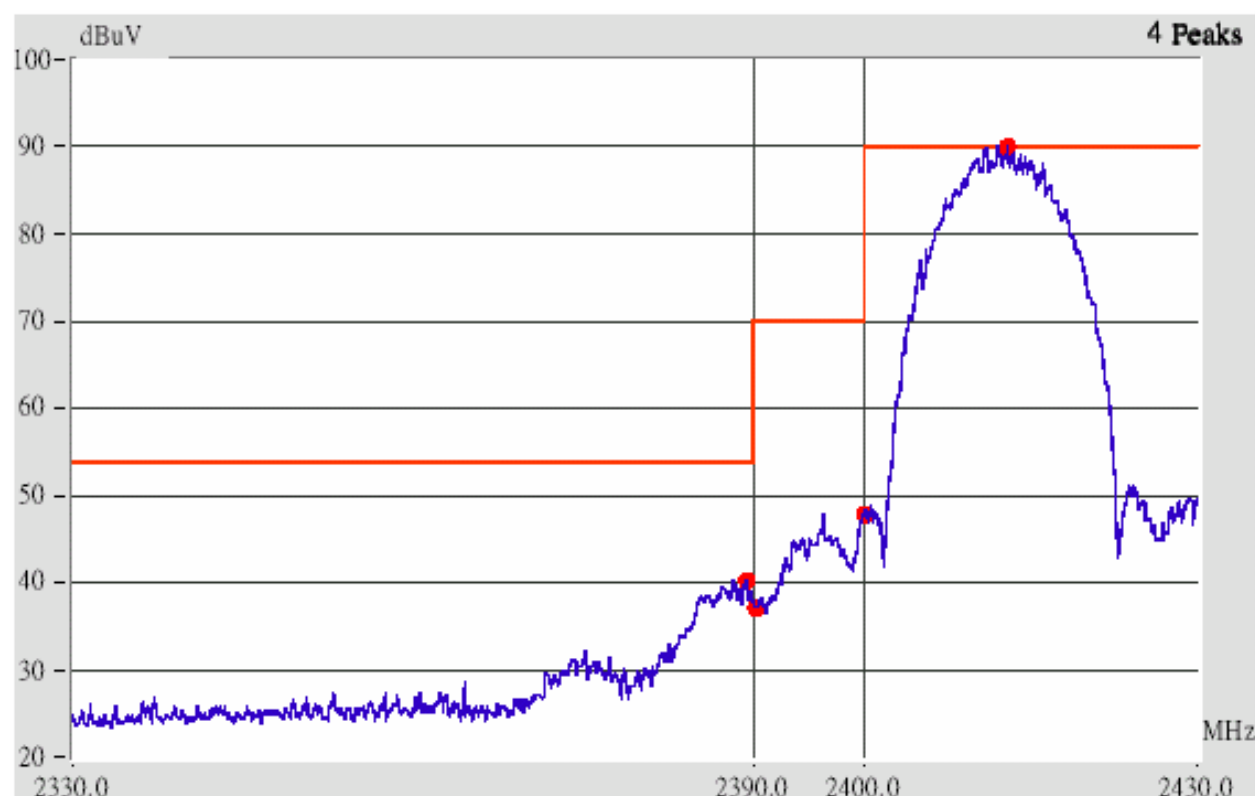


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2389.53	Hor	1.00	289	3.13	38.47	---	74.00	53.96	-15.49
2390.07	Hor	1.00	15	3.14	37.14	---	74.00	53.96	-16.82
2388.66	Ver	1.00	108	3.13	49.80	---	74.00	53.96	-4.16
2390.07	Ver	1.00	105	3.14	47.14	---	74.00	53.96	-6.82

Detachable antenna, Channel 11

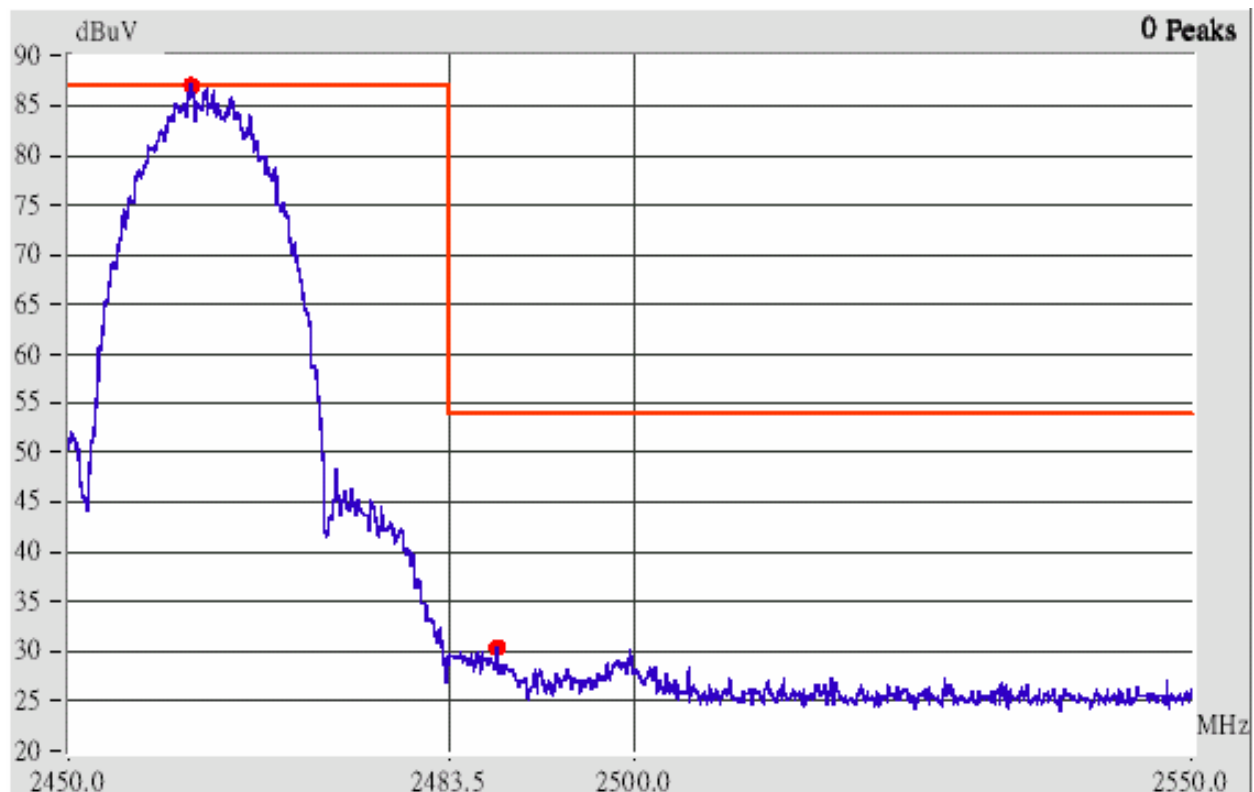

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBuV/m)</i>		<i>Limit (dBuV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2483.50	Hor	1.00	3	3.45	35.45	---	74.00	53.96	-18.51
2504.97	Hor	1.00	120	3.51	37.17	---	74.00	53.96	-16.79
2483.50	Vor	1.00	208	3.45	39.11	---	74.00	53.96	-14.85
2485.25	Ver	1.00	195	3.45	40.45	---	74.00	53.96	-13.51

IX. Section 15.247(d): Power Spectral Density

9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

9.2 Test Instruments Configuration

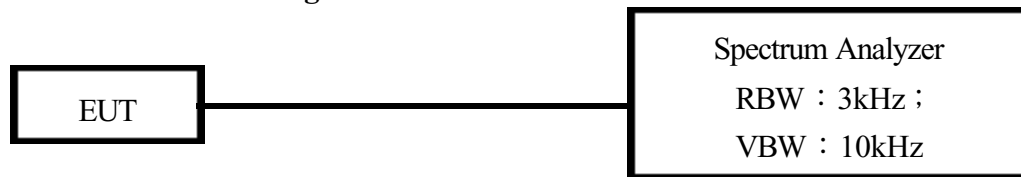

P.S.: Notebook computer to control the EUT at maximal power output and channel Number and set antenna kit

9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/11/02	09/11/03

9.4 Test Result of Power spectral density


The following table shows a summary of the test results of the Power Spectral Density.

<i>Channel</i>	<i>Frequency (GHz)</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	2.412	3.46	0.50	3.96	8.00	-4.04
CH 06	2.437	2.45	0.50	2.95	8.00	-5.05
CH 11	2.462	1.83	0.50	2.33	8.00	-5.67


Note:

- The following pages show the results of spectrum reading.
- Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
- $Ppq = Ppr + |Cable Loss|$

Channel 01

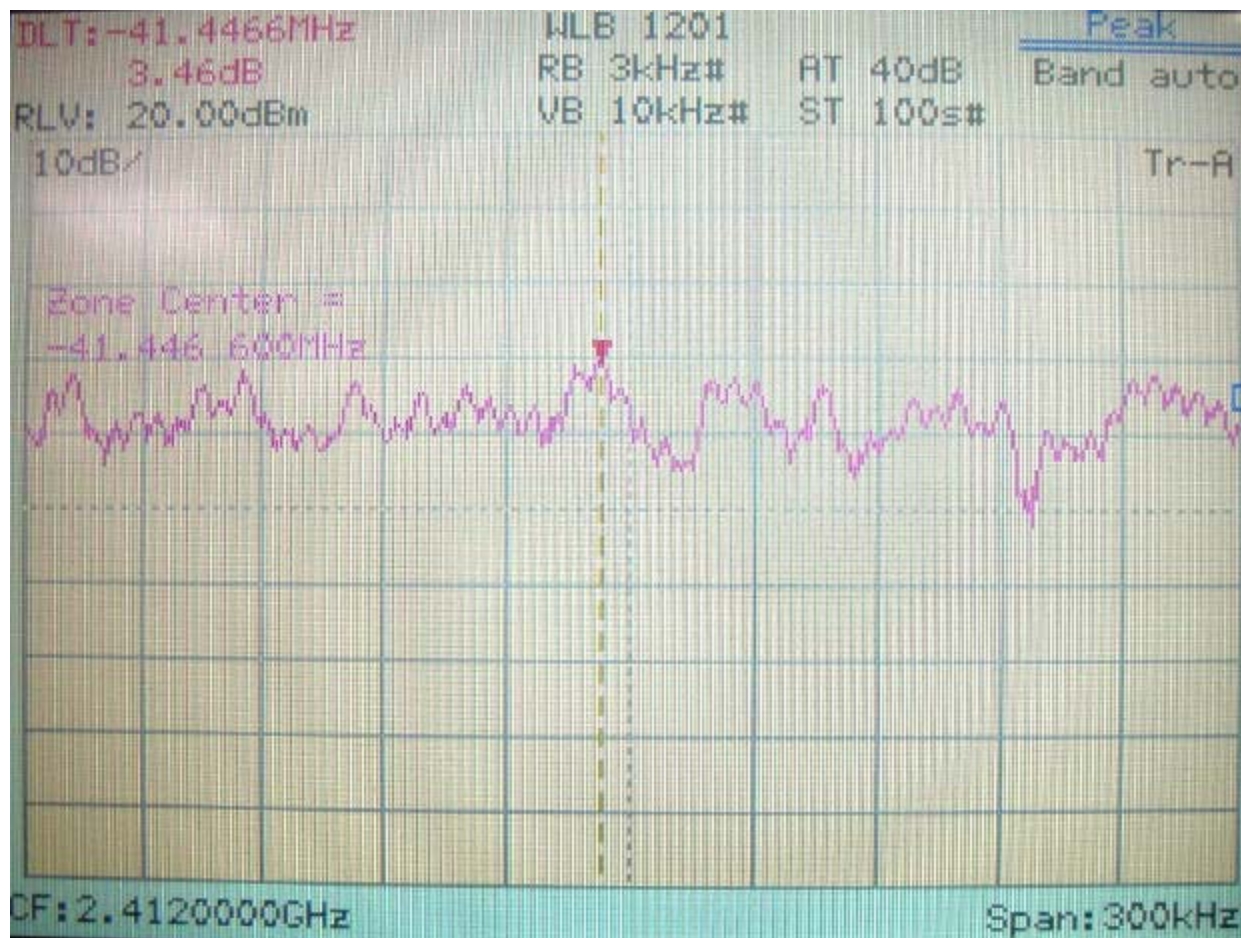

Channel 06

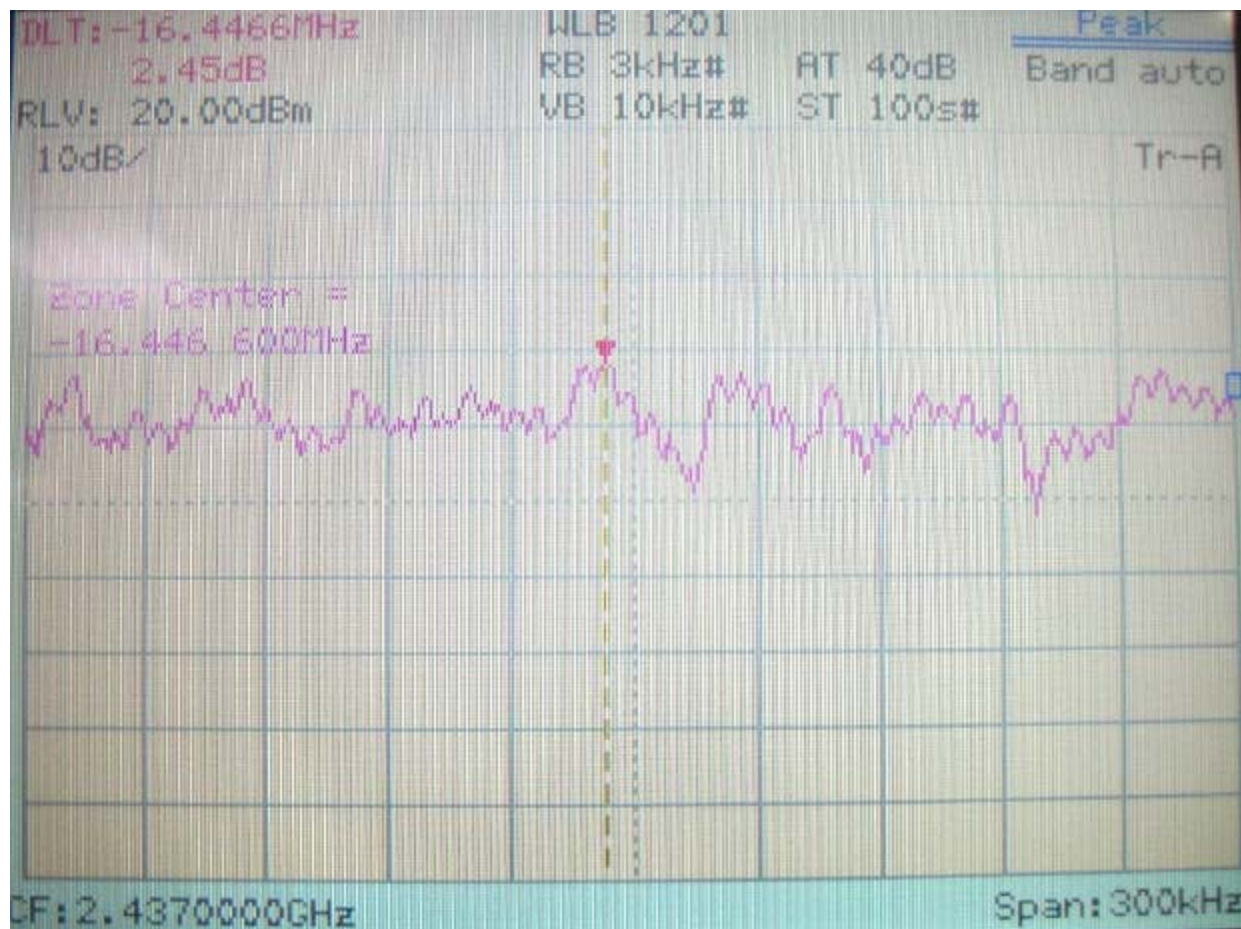

Channel 11



Appendix A

Brand Name and Model Name List:

Brand Name:

Model Name:

CAMEO Communications, Inc.

WLB-1200 ; WLB-1201

Trendware

TEW-228PI

SVEC

FD1814 ; FD1814-A

ALLNET

ALL0181 ; S21191

KEY System Corp.

GW-7100PCI