



Test Report

AIR-CAP1532I-A-K9

Cisco Aironet 802.11n Dual Band Mesh Access Points

FCC ID: LDK102090P

IC: 2461B-102090P

Also covers:

AIR-CAP1532I -N-K9

AIR- CAP1532I -T-K9

AIR- CAP1532I -Z-K9

5470-5725 MHz

Against the following Specifications:

CFR47 Part 15.247

RSS210

LP0002

Cisco Systems

170 West Tasman Drive

San Jose, CA 95134



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
1.1 TEST SUMMARY	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1 GENERAL	4
2.2 DATE OF TESTING.....	5
2.3 REPORT ISSUE DATE	5
2.4 TESTING FACILITIES	5
2.5 EQUIPMENT ASSESSED (EUT).....	5
2.6 EUT DESCRIPTION	6
SECTION 4: SAMPLE DETAILS.....	7
APPENDIX A: EMISSION TEST RESULTS.....	8
TARGET MAXIMUM CHANNEL POWER	8
99% AND 26DB BANDWIDTH.....	9
PEAK OUTPUT POWER	16
POWER SPECTRAL DENSITY	16
PEAK EXCURSION	35
CONDUCTED SPURIOUS EMISSIONS	42
CONDUCTED BANDEDGE	70
20dB BANDWIDTH	81
APPENDIX B: EMISSION TEST RESULTS.....	87
RADIATED SPURIOUS EMISSIONS.....	87
CONDUCTED EMISSIONS.....	953
RADIATED EMISSIONS	95
MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....	97
APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST	99

Section 1: Overview

1.1 Test Summary

samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.407 RSS210	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)
220V 50 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.



2.2 Date of testing

7/12/2013

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

Test Engineers

James Nicholson, Bud Chiller

2.5 Equipment Assessed (EUT)

AIR-CAP1532I-A-K9 Cisco Aironet 802.11n Mesh Access Point



2.6 EUT Description

The 1532 Series Cisco Aironet 802.11n Radio Modules support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Non HT/VHT-20, One Antenna, 6 to 54 Mbps
Non HT/VHT-20, Two Antennas, 6 to 54 Mbps

HT/VHT-20, One Antenna, M0 to M7
HT/VHT-20, Two Antennas, M0 to M15

HT/VHT-20 STBC, Two Antennas, M0 to M7
HT/VHT-20 STBC, Three Antennas, M0 to M7

Non HT/VHT-40 Duplicate, One Antenna, 6-54 Mbps
Non HT/VHT-40 Duplicate, Two Antennas, 6-54 Mbps

HT/VHT-40, One Antenna, M0 to M7
HT/VHT-40, Two Antennas, M0 to M15

HT/VHT-40 STBC, Two Antennas, M0 to M7

The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
2.4 / 5 GHz	Internal	Dual-resonant Omni	3 / 5



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the "Justification for worst Case test Configuration" section of this report for further details on the selection of EUT samples.

4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-CAP1532I-A-K9		Cisco Systems	NA	NA	NA	
S02	PoE supply	9501GO	Microsemi	NA	NA	NA	

4.2 System Details

System #	Description	Samples
1	EUT	S01, S02

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting

**Appendix A: Emission Test Results****Testing Laboratory:** Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA**Target Maximum Channel Power**

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	5500	5560	5700
Non HT-20, 6 to 54 Mbps	21	21	21
HT-20, M0 to M15	22	21	21
HT-20 STBC, M0 to M7	21	21	21
	5510	5550	
Non HT-40 Duplicate, 6 to 54 Mbps	18	23	
HT-40, M0 to M15	19	23	
HT-40 STBC, M0 to M7	19	23	



99% and 26dB Bandwidth

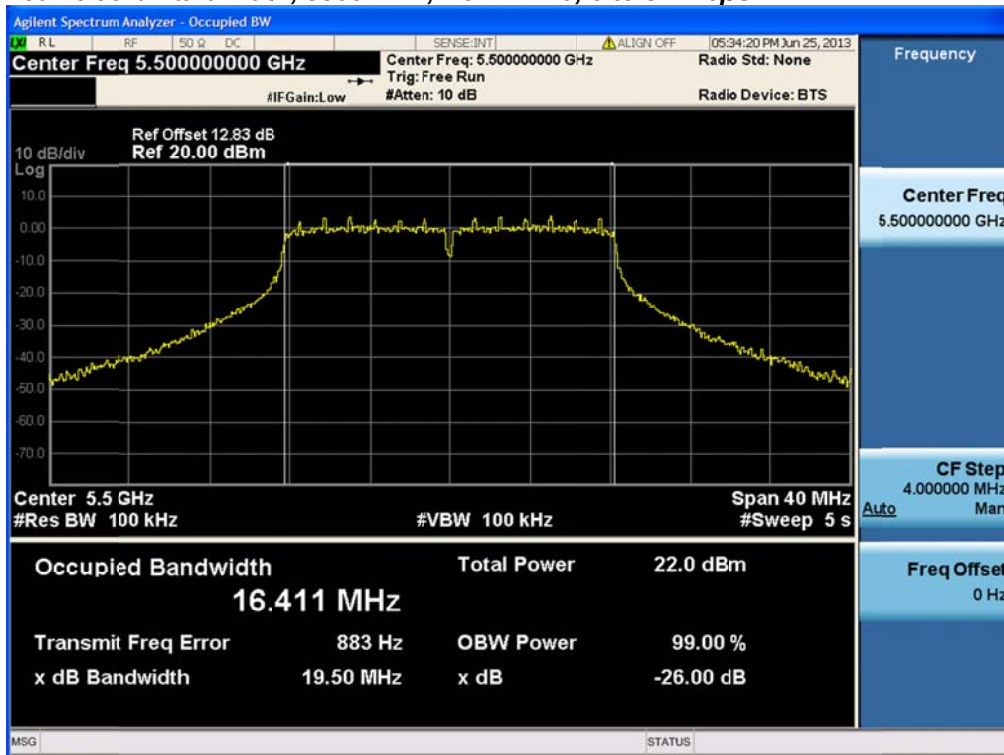
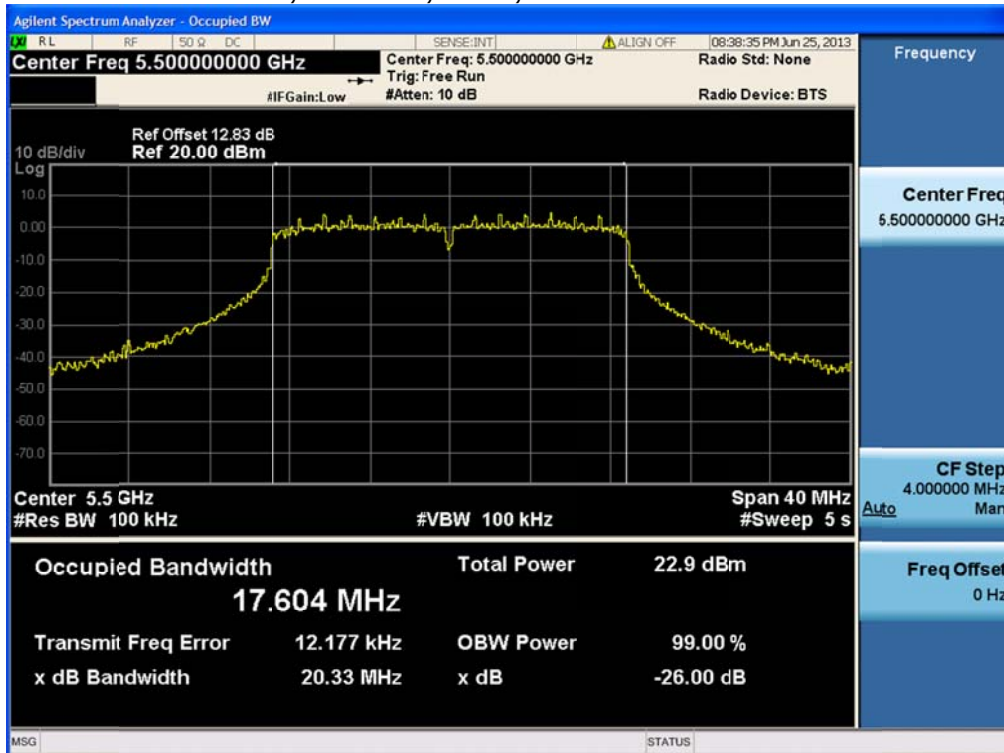
Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

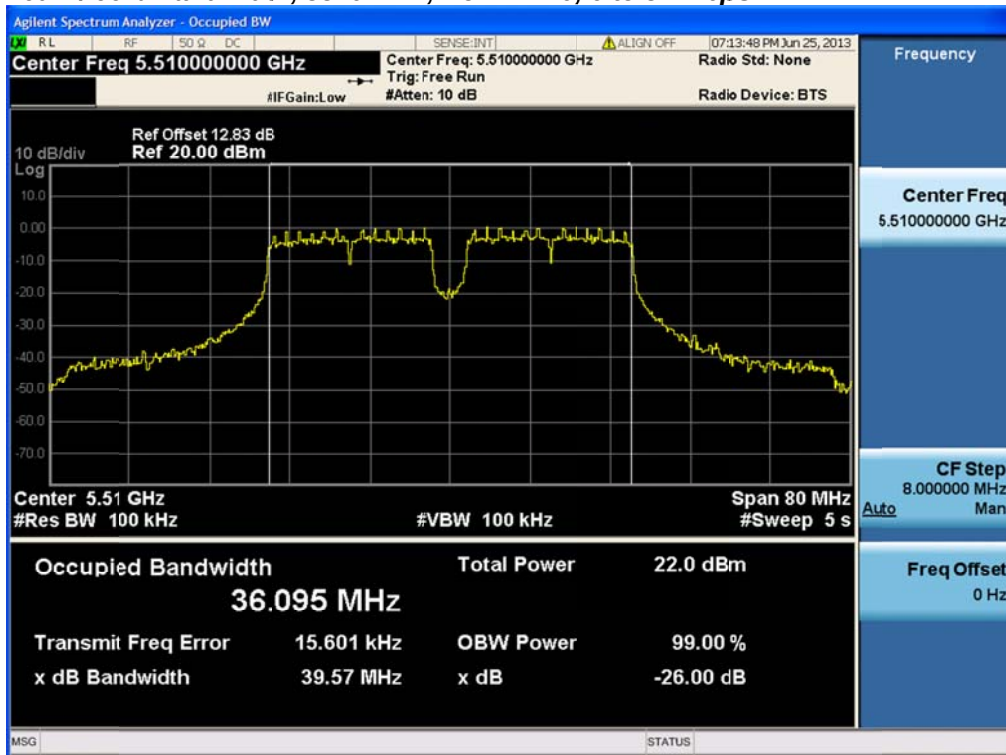
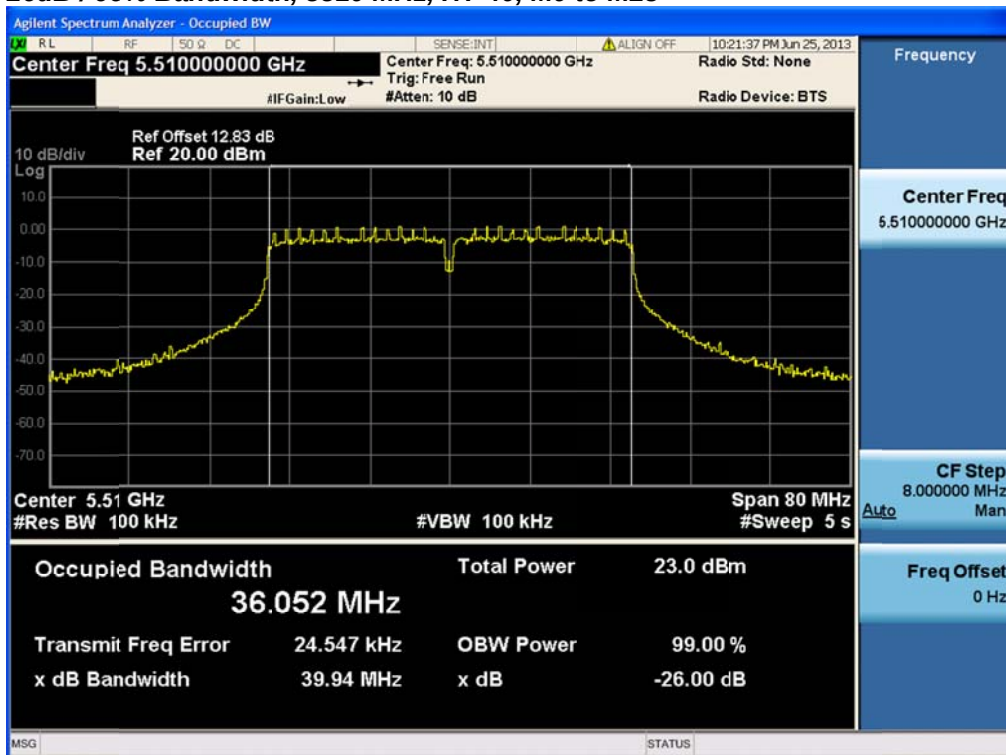
Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	1%-3% of 26 dB Bandwidth
Video Bandwidth:	≥Resolution Bandwidth
X dB Bandwidth:	26 dB
Detector:	Peak
Trace:	Single

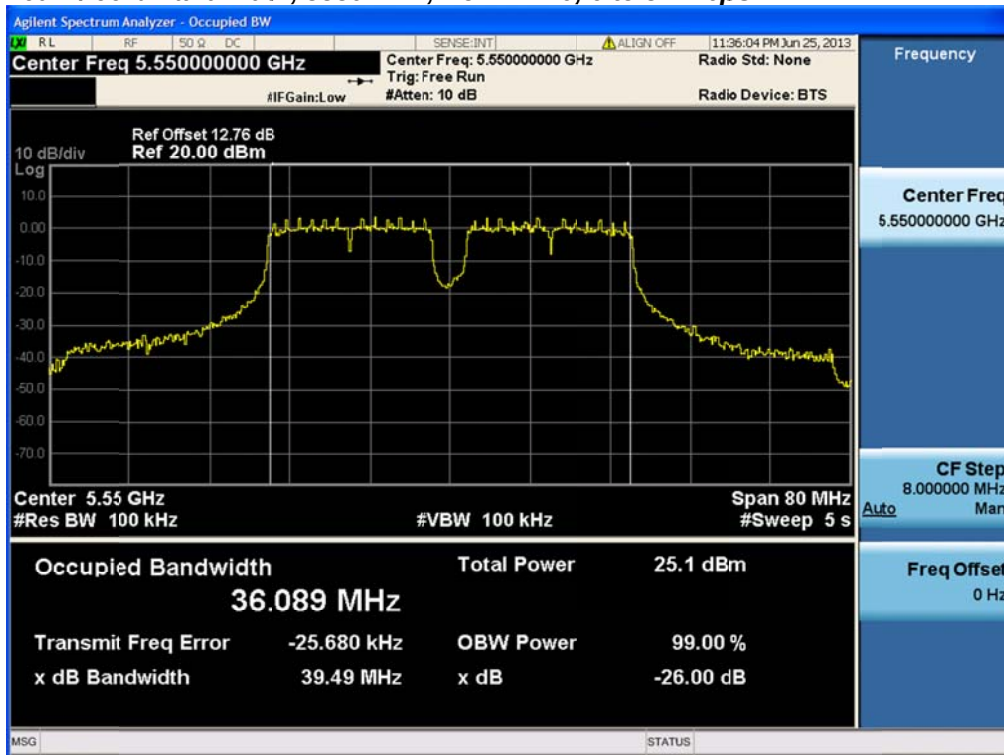
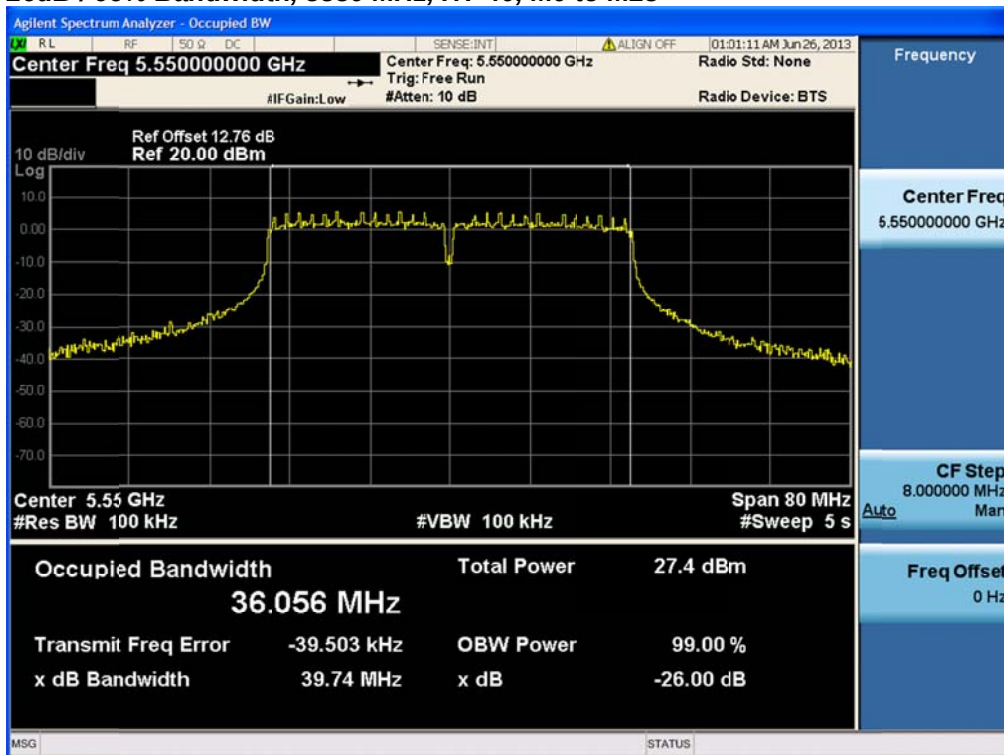
Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:

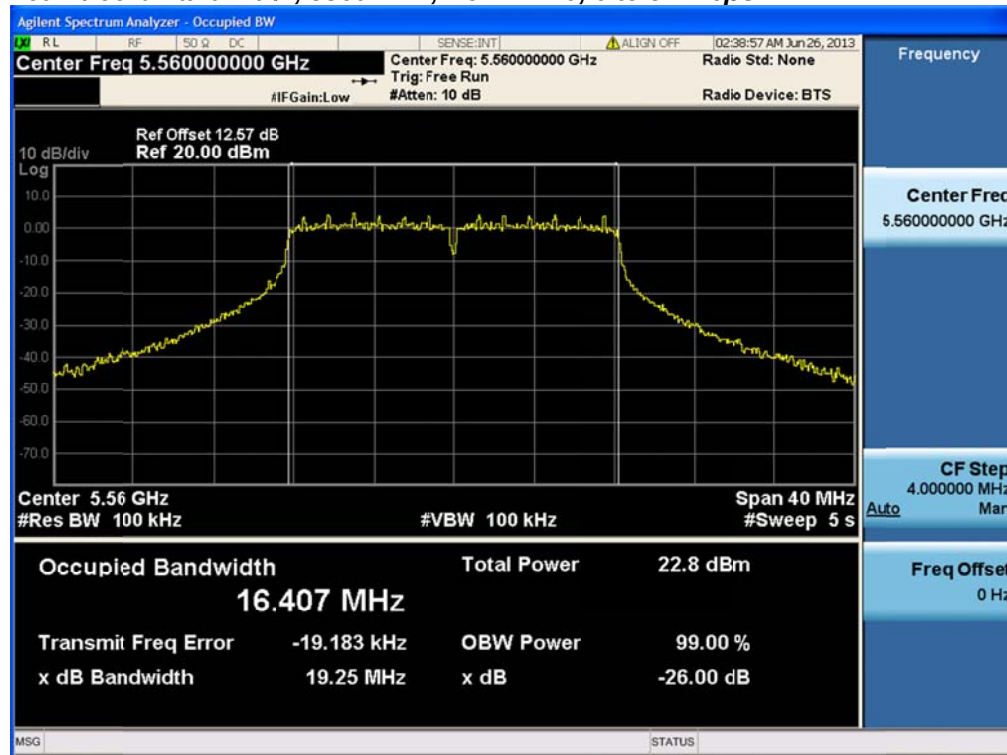
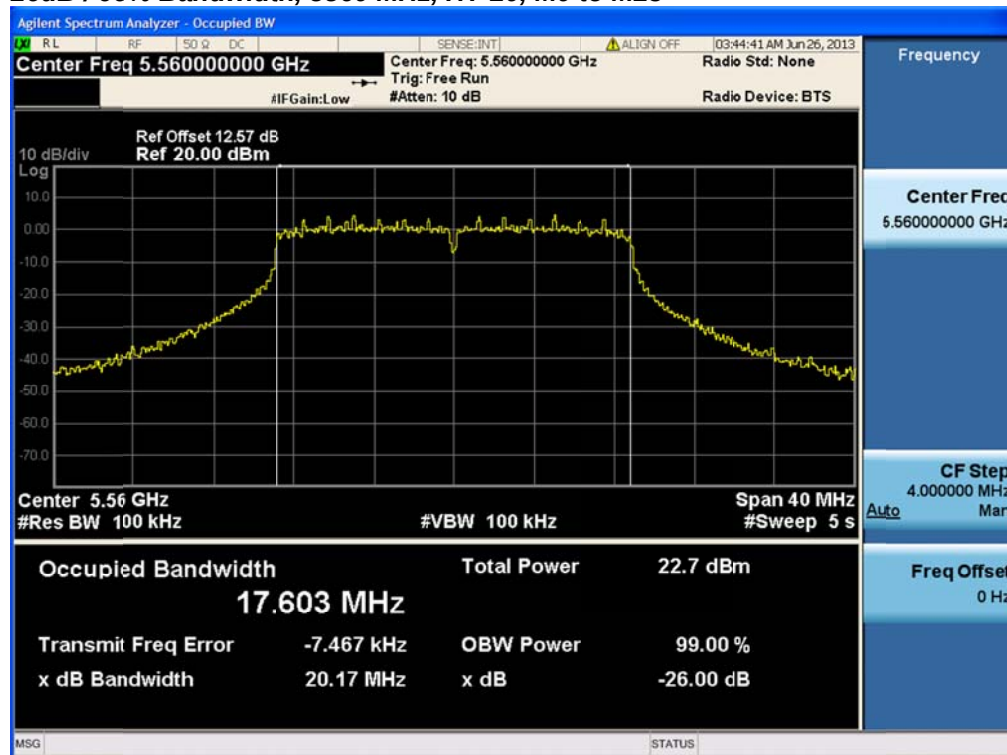


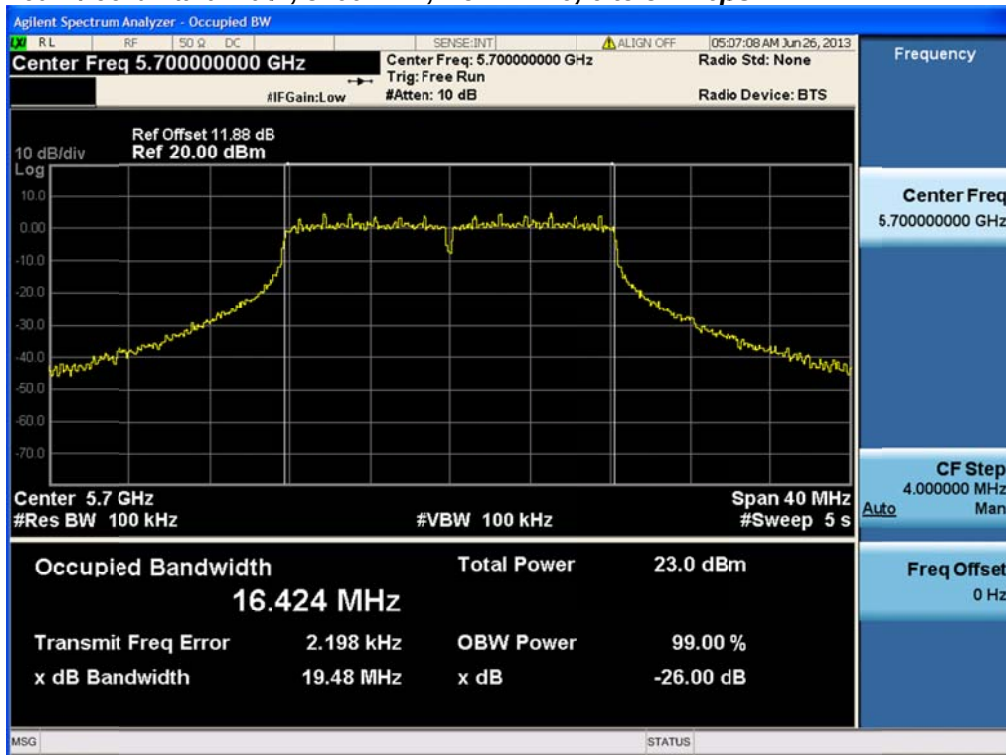
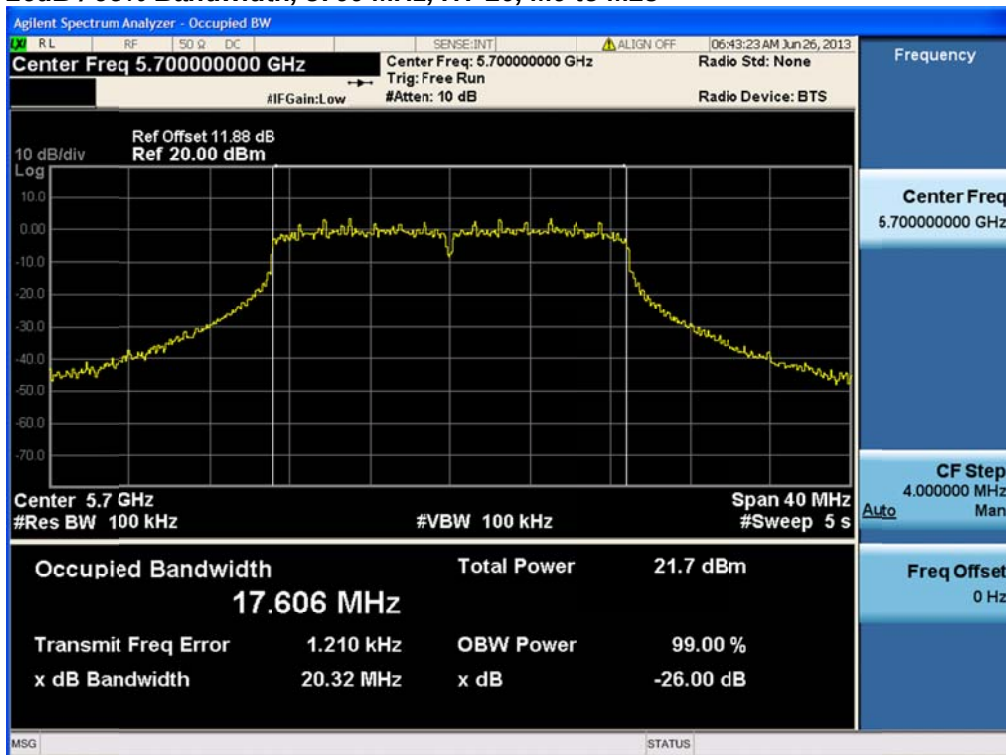
Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5500	Non HT-20, 6 to 54 Mbps	6	19.5	16.4
	HT-20, M0 to M23	m0	20.3	17.6
5510	Non HT-40, 6 to 54 Mbps	6	39.6	36.1
	HT-40, M0 to M23	m0	39.9	36.1
5550	Non HT-40, 6 to 54 Mbps	6	39.5	36.1
	HT-40, M0 to M23	m0	39.7	36
5560	Non HT-20, 6 to 54 Mbps	6	19.3	16.4
	HT-20, M0 to M23	m0	20.2	17.6
5700	Non HT-20, 6 to 54 Mbps	6	19.5	16.4
	HT-20, M0 to M23	m0	20.3	17.6

26dB / 99% Bandwidth, 5500 MHz, Non HT-20, 6 to 54 Mbps**26dB / 99% Bandwidth, 5500 MHz, HT-20, M0 to M23**

26dB / 99% Bandwidth, 5510 MHz, Non HT-40, 6 to 54 Mbps**26dB / 99% Bandwidth, 5510 MHz, HT-40, M0 to M23**

26dB / 99% Bandwidth, 5550 MHz, Non HT-40, 6 to 54 Mbps**26dB / 99% Bandwidth, 5550 MHz, HT-40, M0 to M23**

26dB / 99% Bandwidth, 5560 MHz, Non HT-20, 6 to 54 Mbps**26dB / 99% Bandwidth, 5560 MHz, HT-20, M0 to M23**

26dB / 99% Bandwidth, 5700 MHz, Non HT-20, 6 to 54 Mbps**26dB / 99% Bandwidth, 5700 MHz, HT-20, M0 to M23**



Peak Output Power

15.407: For the bands 5.25-5.35 and 5.47-5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The smallest 26dB bandwidth for all channels is 20.4 MHz. The maximum conducted output power is calculated as $11\text{dBm} + 10 \cdot \log(20.4\text{MHz}) = 24\text{dBm}$

The maximum supported antenna gain for all bands is 5dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

Power Spectral Density

15.407: For the bands 5.25-5.35 and 5.47-5.725 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 5dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.



The "Measure and add 10 log(N) dB technique", where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity 10 log(4) (or 6dB) is added to the worst case spectrum value before comparing to the emission limit.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode.

Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer	
Center Frequency:	Frequency from table below
Span:	20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	100ms, Single sweep
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Sample
Trace:	Trace Average 100 traces in Power Averaging Mode
Integration BW:	=99% BW from 99% Bandwidth Data

After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power. Perform a Marker Peak Search function, and record this value as the Power Spectral Density.



Peak Power Table

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5500	Non HT-20, 6 to 54 Mbps	1	5	20.7		20.7	24	3.3
	Non HT-20, 6 to 54 Mbps	2	5	15.6	16.0	18.8	24	5.2
	HT-20, M0 to M7	1	5	21.6		21.6	24	2.4
	HT-20, M0 to M7	2	5	16.2	17.0	19.6	24	4.4
	HT-20, M8 to M15	2	5	17.8	18.8	21.3	24	2.7
	HT-20 STBC, M0 to M7	2	5	17.8	18.8	21.3	24	2.7
5510	Non HT-40, 6 to 54 Mbps	1	5	16.3		16.3	24	7.7
	Non HT-40, 6 to 54 Mbps	2	5	15.3	15.4	18.4	24	5.6
	HT-40, M0 to M7	1	5	15.9		15.9	24	8.1
	HT-40, M0 to M7	2	5	15.9	16.3	19.1	24	4.9
	HT-40, M8 to M15	2	5	15.9	16.3	19.1	24	4.9
	HT-40 STBC, M0 to M7	2	5	15.9	16.3	19.1	24	4.9
5550	Non HT-40, 6 to 54 Mbps	1	5	23.1		23.1	24	0.9
	Non HT-40, 6 to 54 Mbps	2	5	18.3	19.1	21.7	24	2.3
	HT-40, M0 to M7	1	5	22.7		22.7	24	1.3
	HT-40, M0 to M7	2	5	18.8	19.6	22.2	24	1.8
	HT-40, M8 to M15	2	5	19.7	20.5	23.1	24	0.9
	HT-40 STBC, M0 to M7	2	5	19.7	20.5	23.1	24	0.9
5560	Non HT-20, 6 to 54 Mbps	1	5	21.3		21.3	24	2.7
	Non HT-20, 6 to 54 Mbps	2	5	16.2	16.2	19.2	24	4.8
	HT-20, M0 to M7	1	5	21.0		21.0	24	3.0
	HT-20, M0 to M7	2	5	15.9	15.9	18.9	24	5.1
	HT-20, M8 to M15	2	5	18.1	18.8	21.5	24	2.5
	HT-20 STBC, M0 to M7	2	5	18.1	18.8	21.5	24	2.5
5700	Non HT-20, 6 to 54 Mbps	1	5	20.7		20.7	24	3.3
	Non HT-20, 6 to 54 Mbps	2	5	15.0	16.7	18.9	24	5.1
	HT-20, M0 to M7	1	5	18.7		18.7	24	5.3
	HT-20, M0 to M7	2	5	15.0	16.5	18.8	24	5.2
	HT-20, M8 to M15	2	5	16.8	18.6	20.8	24	3.2
	HT-20 STBC, M0 to M7	2	5	16.8	18.6	20.8	24	3.2



PSD Table

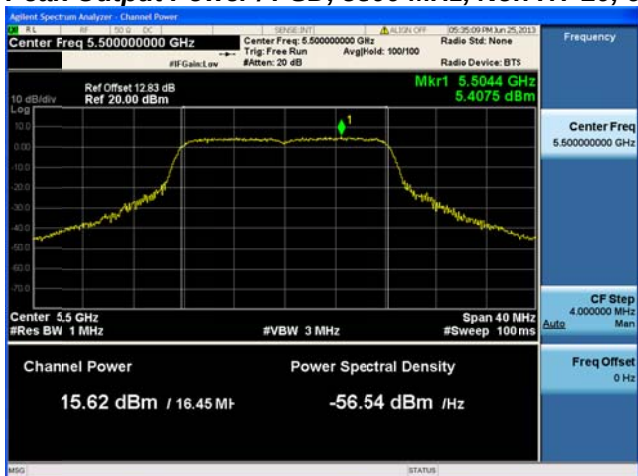
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5500	Non HT-20, 6 to 54 Mbps	1	5	10.1		10.1	11.0	0.9
	Non HT-20, 6 to 54 Mbps	2	8	5.4	5.7	8.6	9.0	0.4
	HT-20, M0 to M7	1	5	10.7		10.7	11.0	0.3
	HT-20, M0 to M7	2	8	5.4	6.2	8.8	9.0	0.2
	HT-20, M8 to M15	2	5	7.0	8.1	10.6	11.0	0.4
	HT-20 STBC, M0 to M7	2	5	7.0	8.1	10.6	11.0	0.4
5510	Non HT-40, 6 to 54 Mbps	1	5	9.7		9.7	11.0	1.3
	Non HT-40, 6 to 54 Mbps	2	8	5.1	6.0	8.6	9.0	0.4
	HT-40, M0 to M7	1	5	9.2		9.2	11.0	1.8
	HT-40, M0 to M7	2	8	5.2	6.4	8.9	9.0	0.1
	HT-40, M8 to M15	2	5	6.3	7.1	9.7	11.0	1.3
	HT-40 STBC, M0 to M7	2	5	6.3	7.1	9.7	11.0	1.3
5550	Non HT-40, 6 to 54 Mbps	1	5	9.3		9.3	11.0	1.7
	Non HT-40, 6 to 54 Mbps	2	8	4.8	5.9	8.4	9.0	0.6
	HT-40, M0 to M7	1	5	8.8		8.8	11.0	2.2
	HT-40, M0 to M7	2	8	4.9	5.8	8.4	9.0	0.6
	HT-40, M8 to M15	2	5	5.7	6.6	9.2	11.0	1.8
	HT-40 STBC, M0 to M7	2	5	5.7	6.6	9.2	11.0	1.8
5560	Non HT-20, 6 to 54 Mbps	1	5	10.9		10.9	11.0	0.1
	Non HT-20, 6 to 54 Mbps	2	8	5.7	5.6	8.7	9.0	0.3
	HT-20, M0 to M7	1	5	10.4		10.4	11.0	0.6
	HT-20, M0 to M7	2	8	5.3	5.7	8.5	9.0	0.5
	HT-20, M8 to M15	2	5	7.7	8.2	11.0	11.0	0.0
	HT-20 STBC, M0 to M7	2	5	7.7	8.2	11.0	11.0	0.0
5700	Non HT-20, 6 to 54 Mbps	1	5	10.0		10.0	11.0	1.0
	Non HT-20, 6 to 54 Mbps	2	8	4.7	5.9	8.4	9.0	0.6
	HT-20, M0 to M7	1	5	10.2		10.2	11.0	0.8
	HT-20, M0 to M7	2	8	4.4	6.1	8.3	9.0	0.6
	HT-20, M8 to M15	2	5	6.2	7.9	10.1	11.0	0.9
	HT-20 STBC, M0 to M7	2	5	6.2	7.9	10.1	11.0	0.9

Peak Output Power / PSD, 5500 MHz, Non HT-20, 6 to 54 Mbps

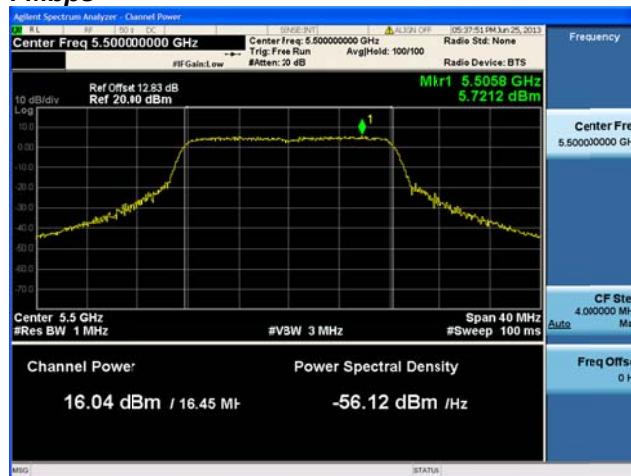
Antenna A



Peak Output Power / PSD, 5500 MHz, Non HT-20, 6 to 54 Mbps



Antenna A



Antenna B

Peak Output Power / PSD, 5500 MHz, HT-20, M0 to M7**Antenna A****Peak Output Power / PSD, 5500 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

Peak Output Power / PSD, 5500 MHz, HT-20, M8 to M15



Antenna A



Antenna B

Peak Output Power / PSD, 5500 MHz, HT-20 STBC, M0 to M7



Antenna A

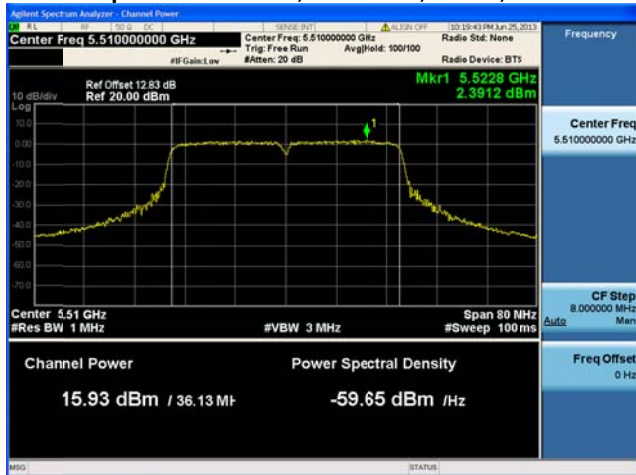


Antenna B

Peak Output Power / PSD, 5510 MHz, Non HT-40, 6 to 54 Mbps**Antenna A****Peak Output Power / PSD, 5510 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**

Peak Output Power / PSD, 5510 MHz, HT-40, M0 to M7**Antenna A****Peak Output Power / PSD, 5510 MHz, HT-40, M0 to M7****Antenna A****Antenna B**

Peak Output Power / PSD, 5510 MHz, HT-40, M8 to M15

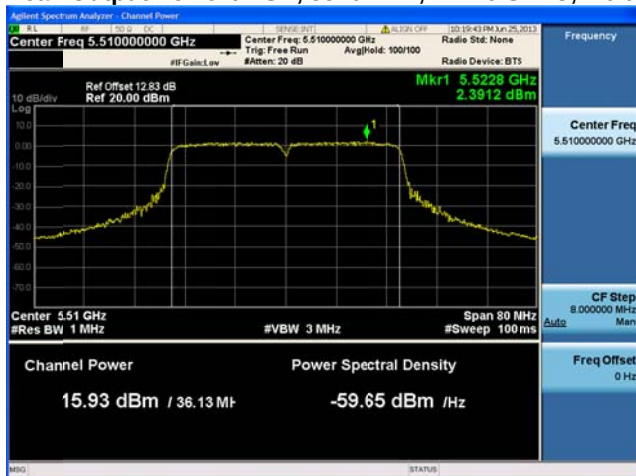


Antenna A

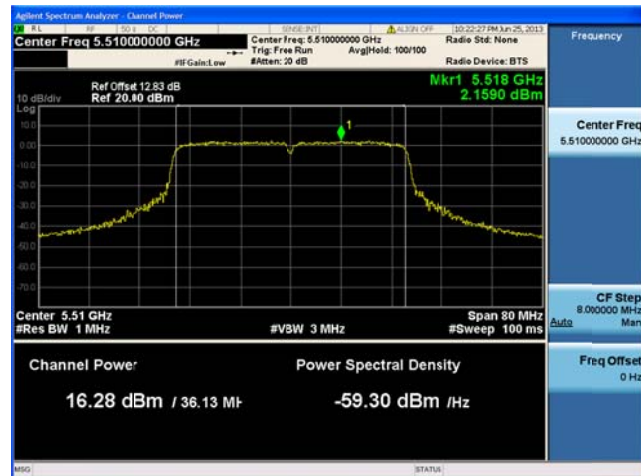


Antenna B

Peak Output Power / PSD, 5510 MHz, HT-40 STBC, M0 to M7



Antenna A



Antenna B

Peak Output Power / PSD, 5550 MHz, Non HT-40, 6 to 54 Mbps**Antenna A****Peak Output Power / PSD, 5550 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**

Peak Output Power / PSD, 5550 MHz, HT-40, M0 to M7**Antenna A****Peak Output Power / PSD, 5550 MHz, HT-40, M0 to M7****Antenna A****Antenna B**



Peak Output Power / PSD, 5550 MHz, HT-40, M8 to M15



Antenna A



Antenna B

Peak Output Power / PSD, 5550 MHz, HT-40 STBC, M0 to M7



Antenna A



Antenna B

Peak Output Power / PSD, 5560 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Peak Output Power / PSD, 5560 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

Peak Output Power / PSD, 5560 MHz, HT-20, M0 to M7**Antenna A****Peak Output Power / PSD, 5560 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

Peak Output Power / PSD, 5560 MHz, HT-20, M8 to M15



Antenna A



Antenna B

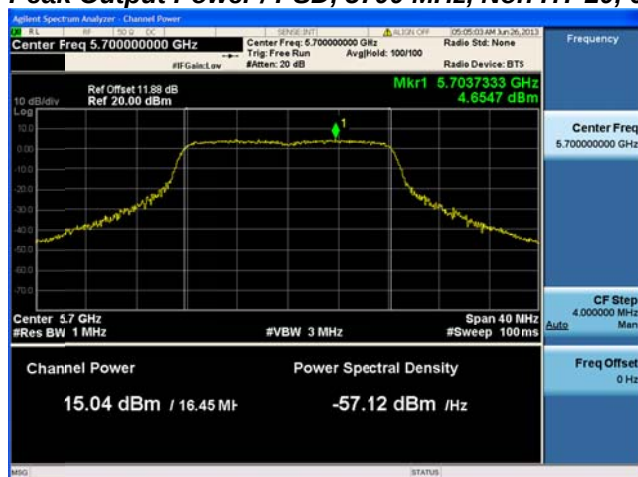
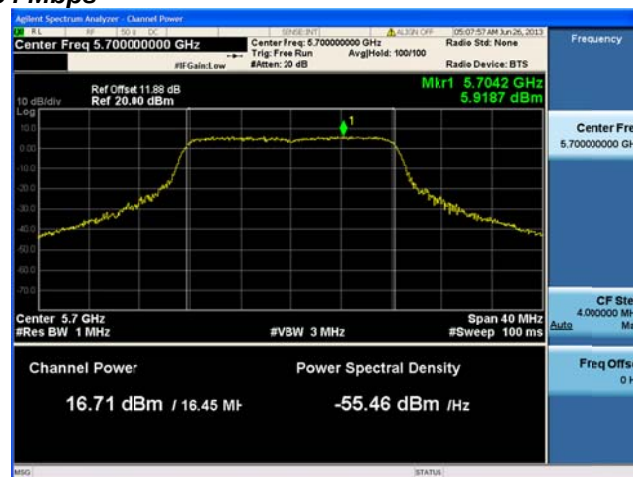
Peak Output Power / PSD, 5560 MHz, HT-20 STBC, M0 to M7



Antenna A



Antenna B

Peak Output Power / PSD, 5700 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Peak Output Power / PSD, 5700 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

Peak Output Power / PSD, 5700 MHz, HT-20, M0 to M7**Antenna A****Peak Output Power / PSD, 5700 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

Peak Output Power / PSD, 5700 MHz, HT-20, M8 to M15



Antenna A



Antenna B

Peak Output Power / PSD, 5700 MHz, HT-20 STBC, M0 to M7



Antenna A



Antenna B



Peak Excursion

15.407: The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Set the spectrum analyzer span to view the entire emission bandwidth. The largest difference between the following two traces must be ≤ 13 dB for all frequencies across the emission bandwidth.

Set the spectrum analyzer span to view the entire emission bandwidth. The largest difference between the following two traces must be ≤ 13 dB for all frequencies across the emission bandwidth.

1st Trace: (Peak)

Set Span to encompass the entire emission bandwidth of the signal.

RBW = 1 MHz, VBW = 3 MHz

Detector = Peak

Sweep = Auto

Trace 1 = Max-hold

Ref Level Offset = correct for attenuator and cable loss

Ref Level = 20dBm

Atten = 10dBm

2nd Trace: (Average)

Trace 2 = clear right

Detector = Sample

Avg/VBW type = Pwr(RMS)

Average = 100

Sweep = single

Set marker Deltas

Trace 1 & Peak search

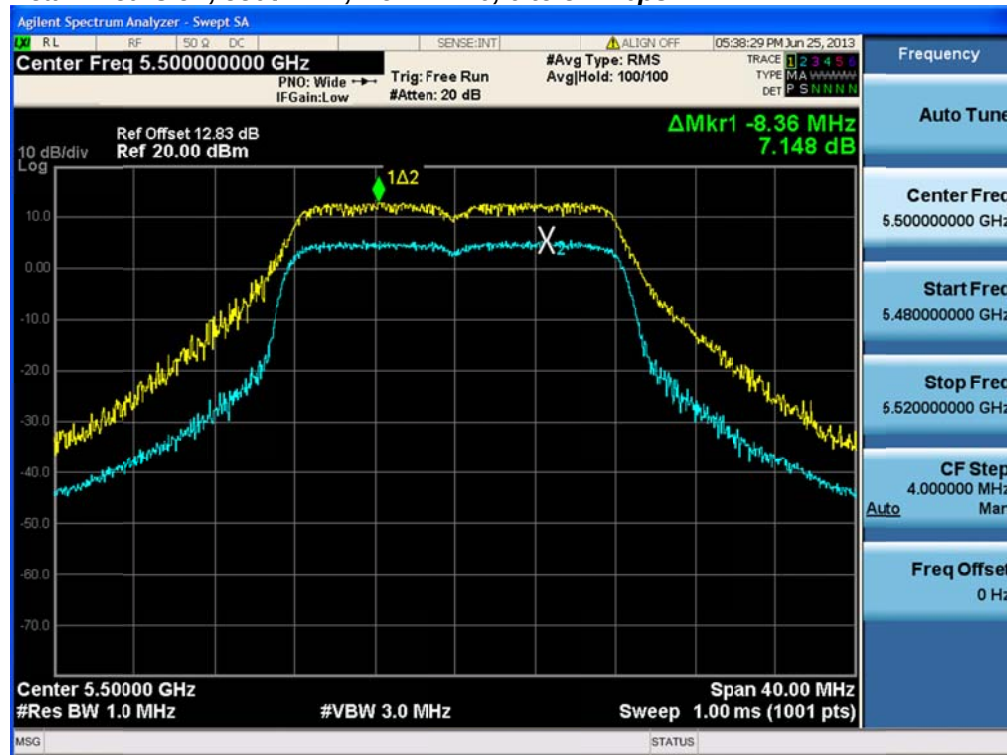
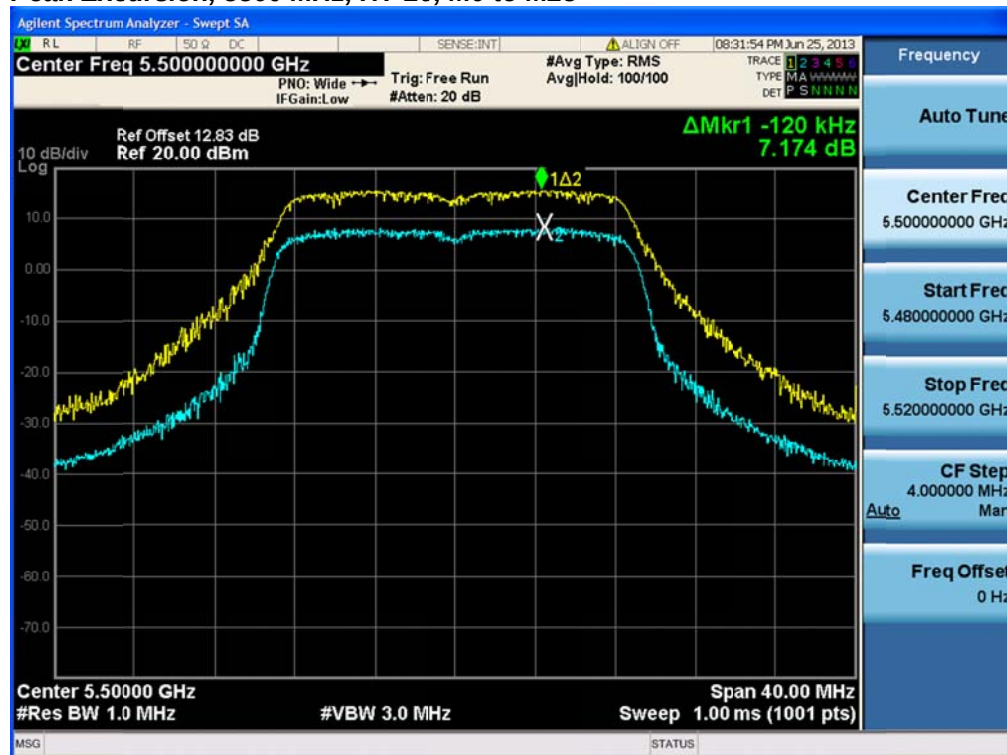
Marker Delta

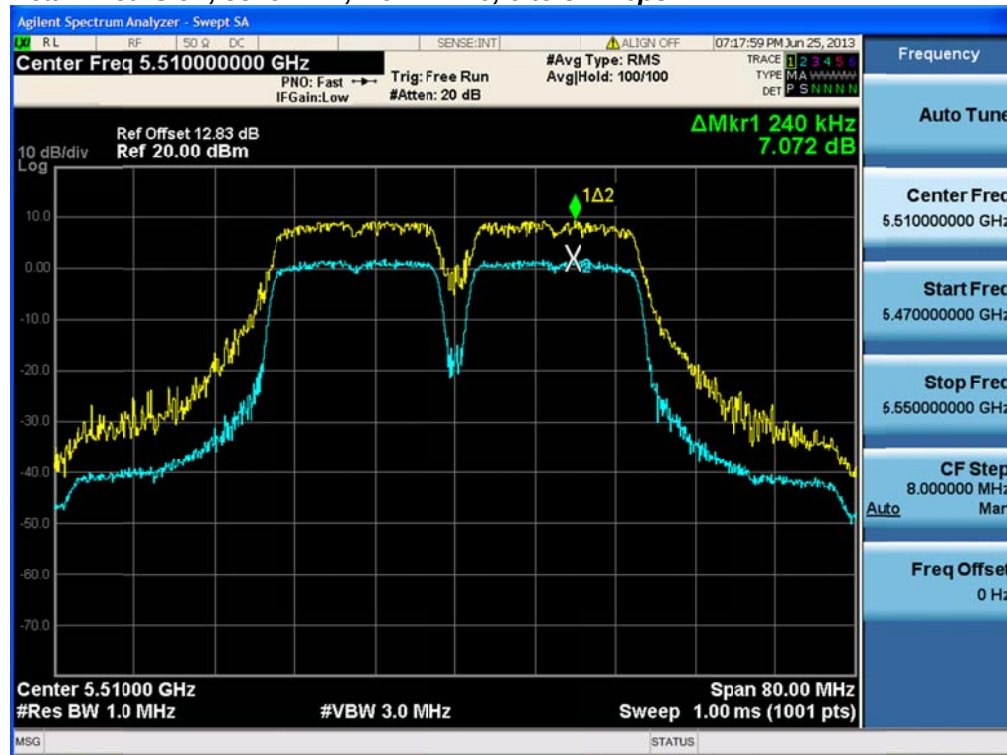
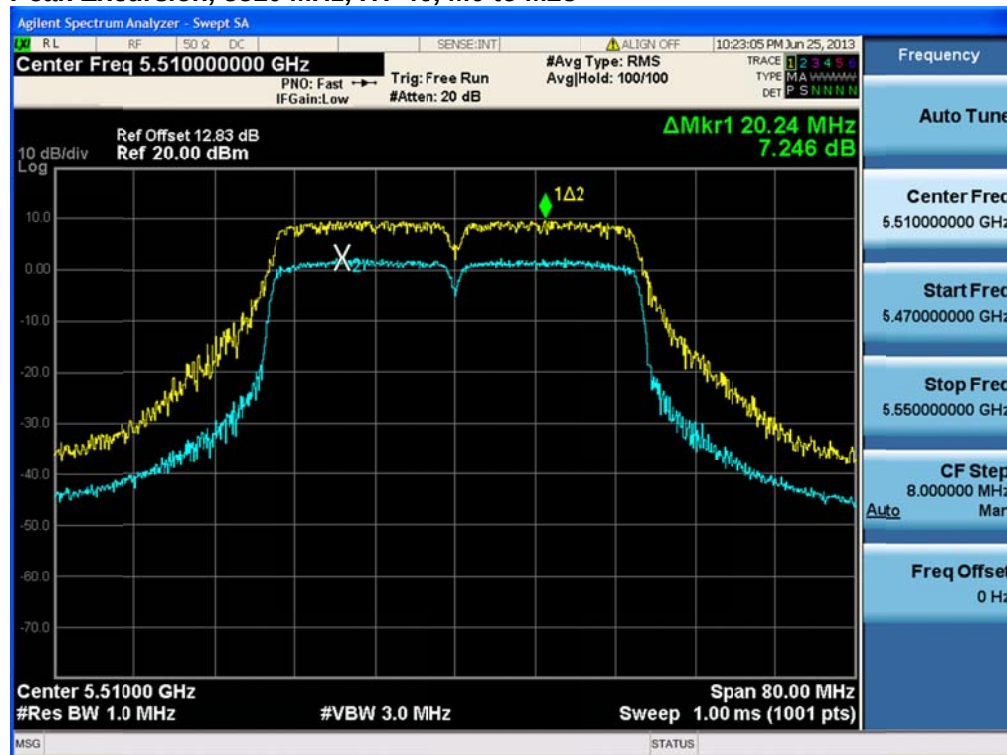
Trace 2 & Peak search

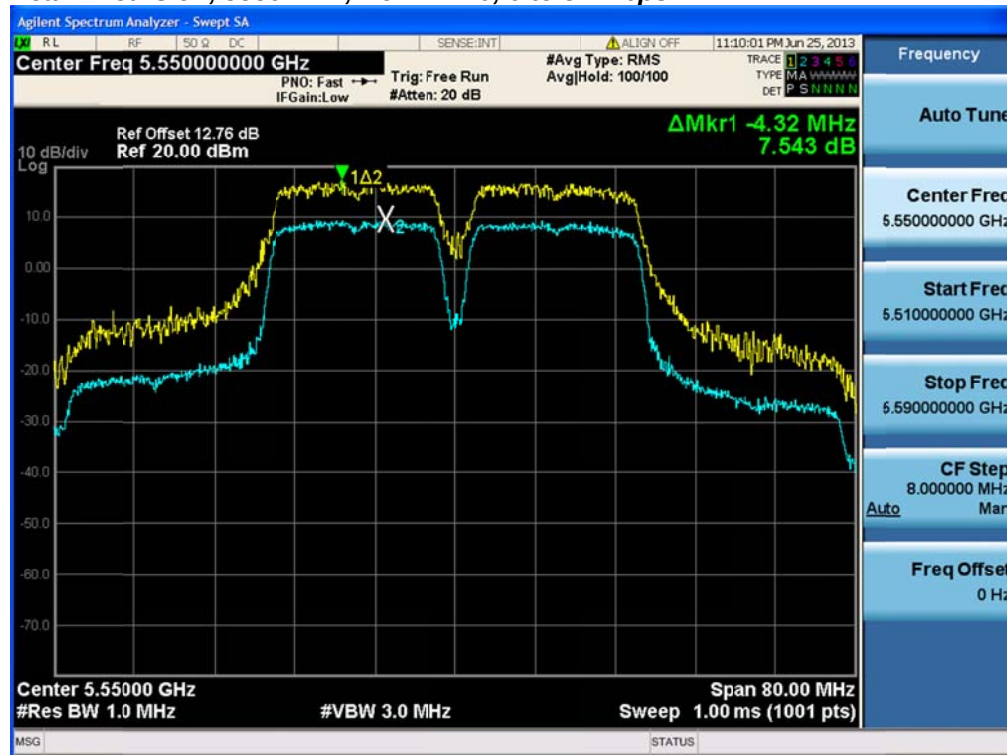
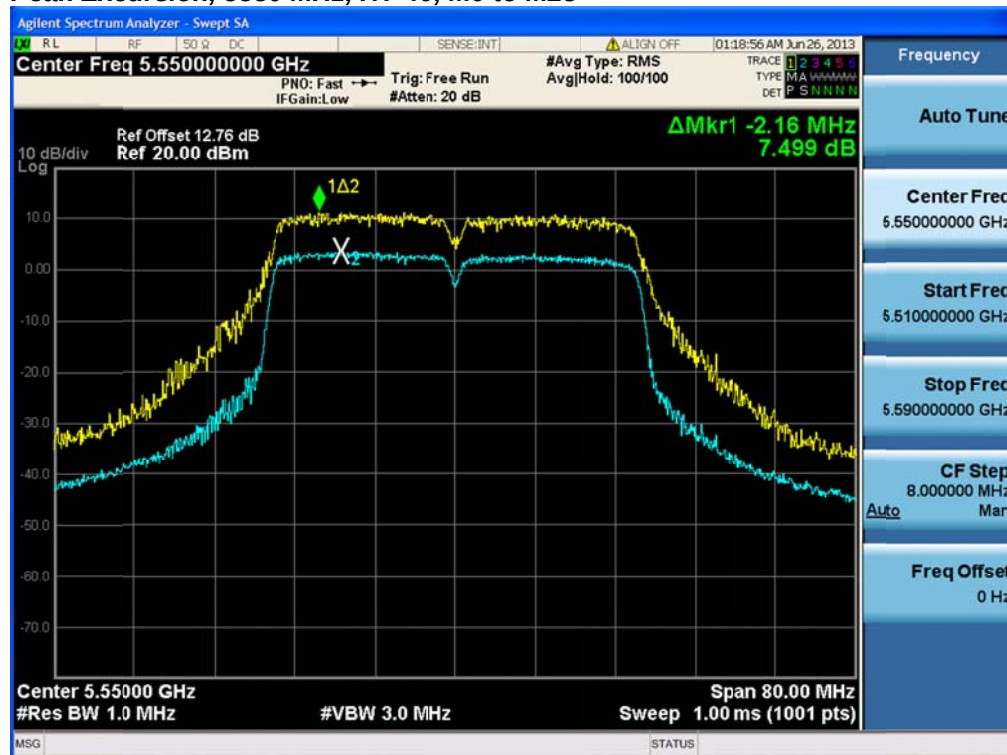
Record the difference between the Peak and Average Markers

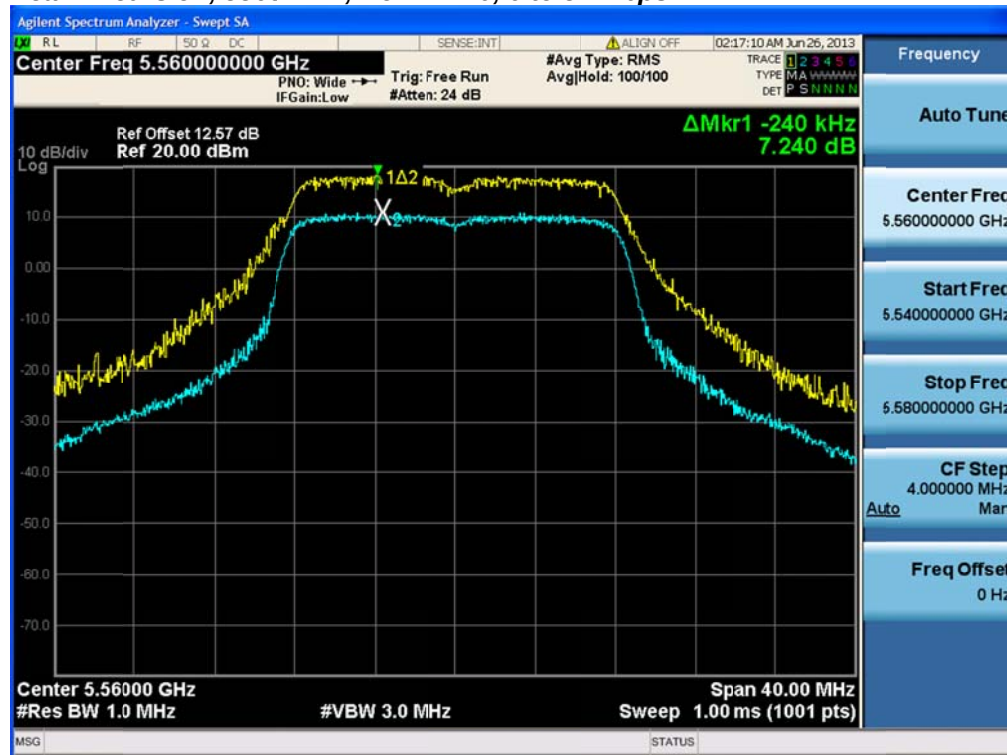
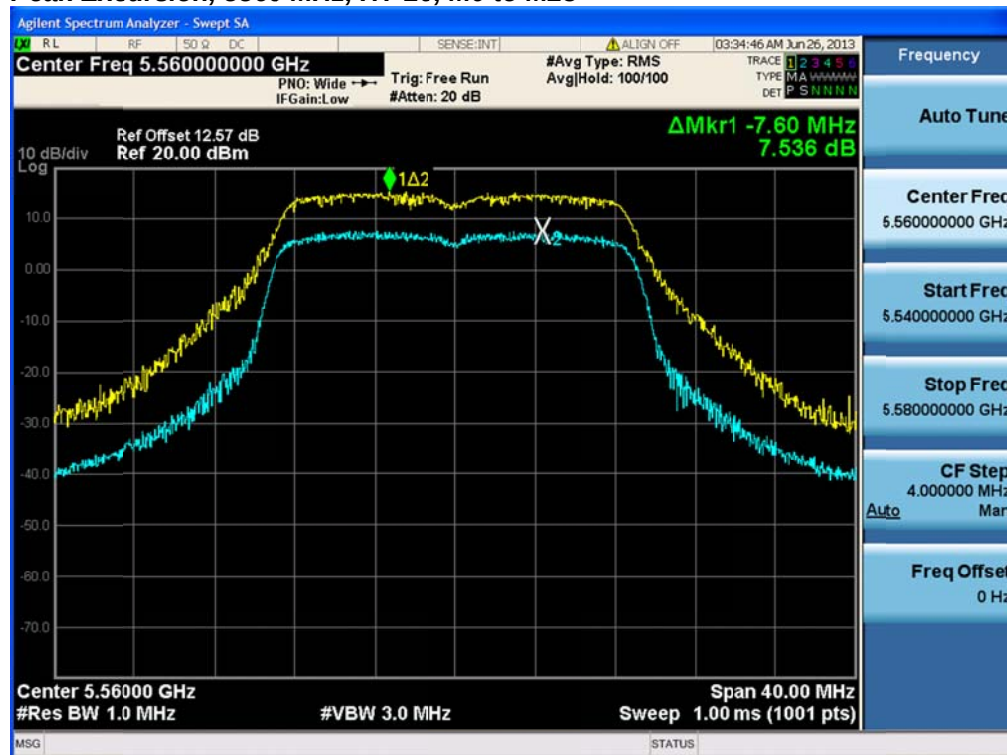


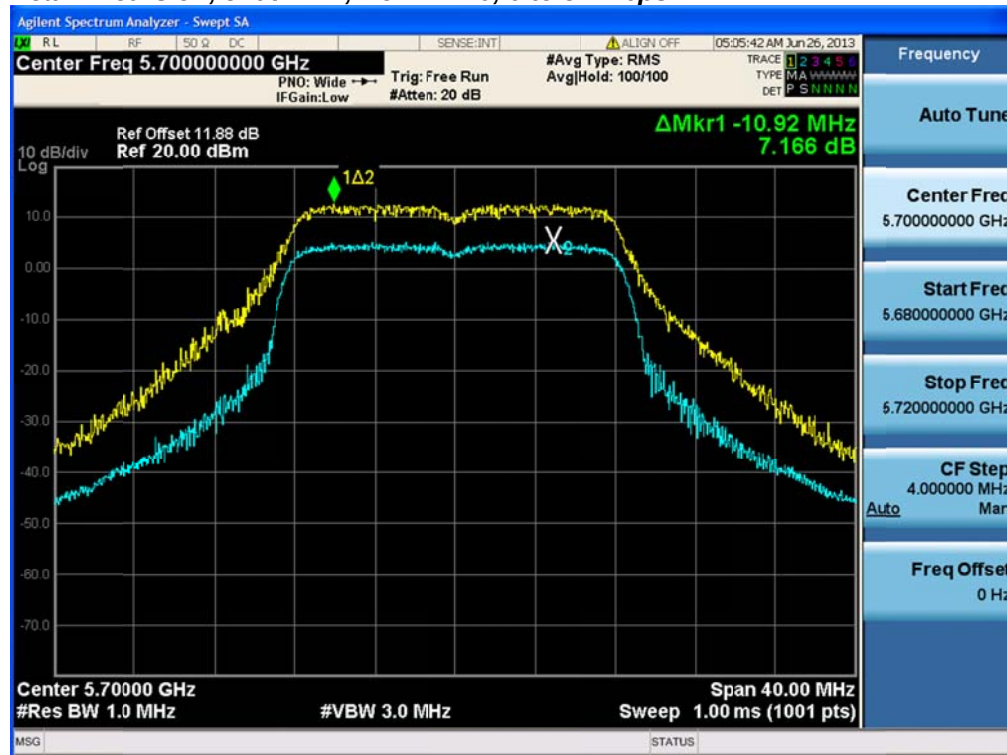
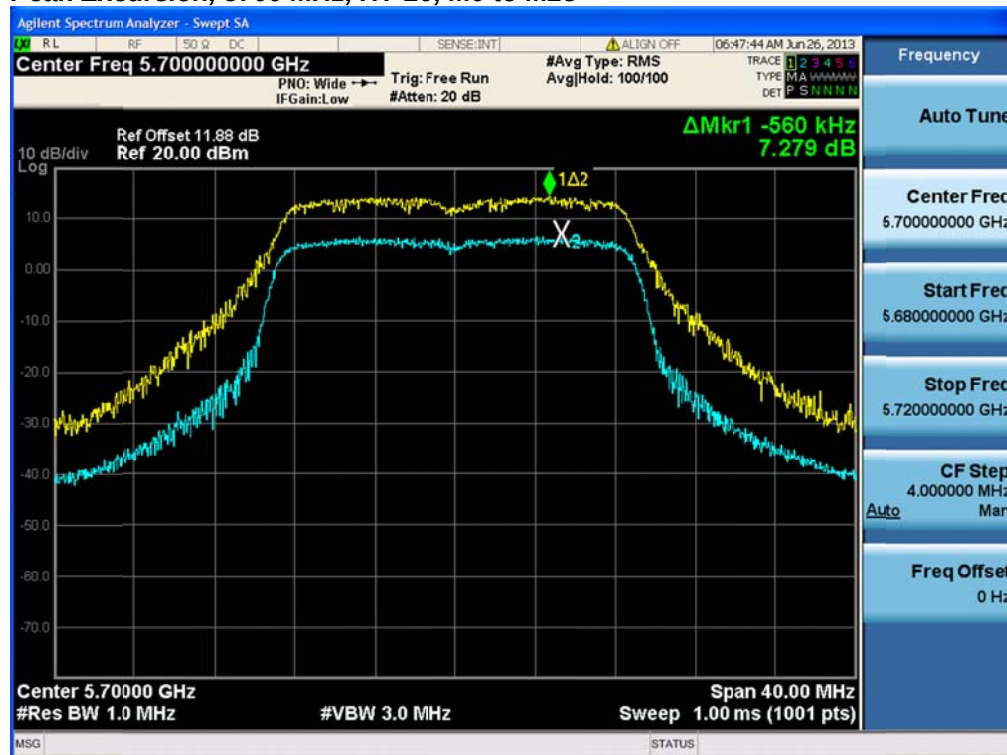
Frequency (MHz)	Mode	Data Rate (Mbps)	Peak Excursion (dB)	Limit (dBm/MHz)	Margin (dB)
5500	Non HT-20, 6 to 54 Mbps	6	7.1	13	5.9
	HT-20, M0 to M23	m0	7.2	13	5.8
5510	Non HT-40, 6 to 54 Mbps	6	7.1	13	5.9
	HT-40, M0 to M23	m0	7.2	13	5.8
5550	Non HT-40, 6 to 54 Mbps	6	7.5	13	5.5
	HT-40, M0 to M23	m0	7.5	13	5.5
5560	Non HT-20, 6 to 54 Mbps	6	7.2	13	5.8
	HT-20, M0 to M23	m0	7.5	13	5.5
5700	Non HT-20, 6 to 54 Mbps	6	7.2	13	5.8
	HT-20, M0 to M23	m0	7.3	13	5.7

Peak Excursion, 5500 MHz, Non HT-20, 6 to 54 Mbps**Peak Excursion, 5500 MHz, HT-20, M0 to M23**

Peak Excursion, 5510 MHz, Non HT-40, 6 to 54 Mbps**Peak Excursion, 5510 MHz, HT-40, M0 to M23**

Peak Excursion, 5550 MHz, Non HT-40, 6 to 54 Mbps**Peak Excursion, 5550 MHz, HT-40, M0 to M23**

Peak Excursion, 5560 MHz, Non HT-20, 6 to 54 Mbps**Peak Excursion, 5560 MHz, HT-20, M0 to M23**

Peak Excursion, 5700 MHz, Non HT-20, 6 to 54 Mbps**Peak Excursion, 5700 MHz, HT-20, M0 to M23**



Conducted Spurious Emissions

15.407: For transmitters operating in the 5.25-5.35 and 5.47-5.725 GHz band: all emissions outside of the 5.25-5.35 and 5.47-5.725 GHz bands shall not exceed an EIRP of -27dBm/MHz.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

Span:	30 MHz-40 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	10 s
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Peak
Trace:	Single
Marker:	Peak

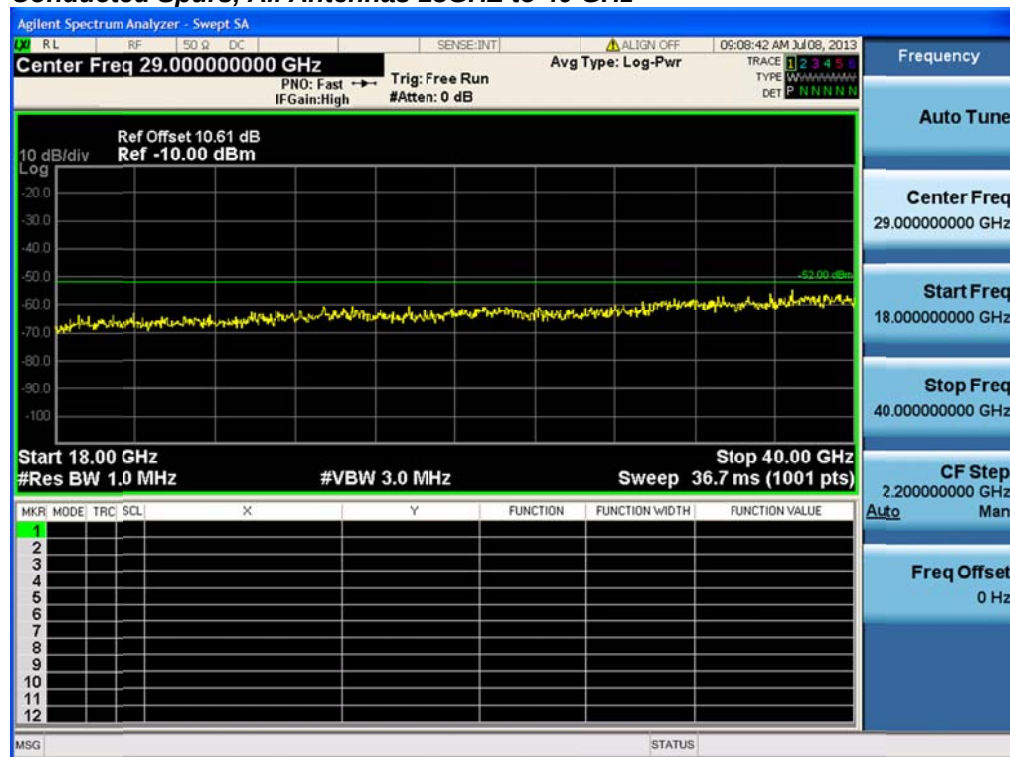
Record the marker waveform peak to spur difference

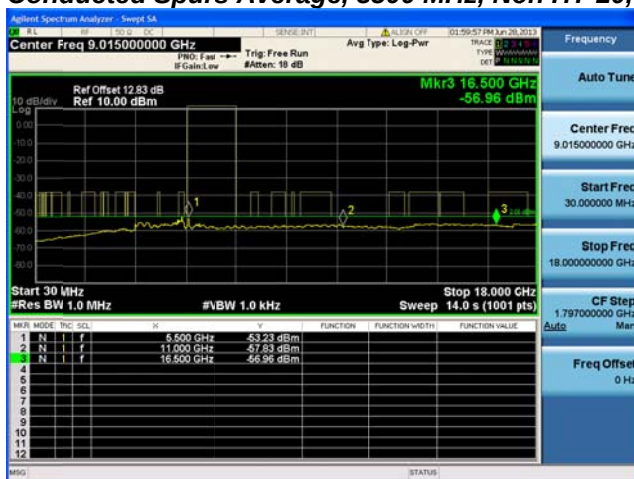
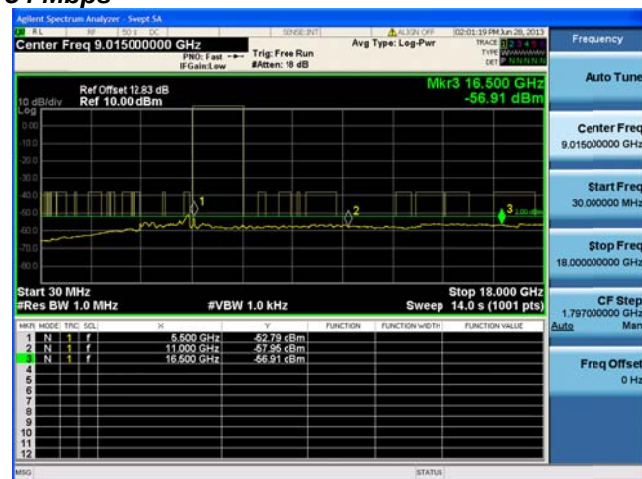


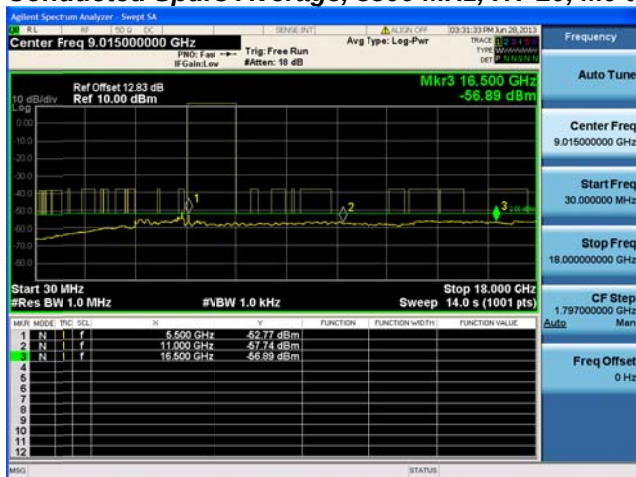
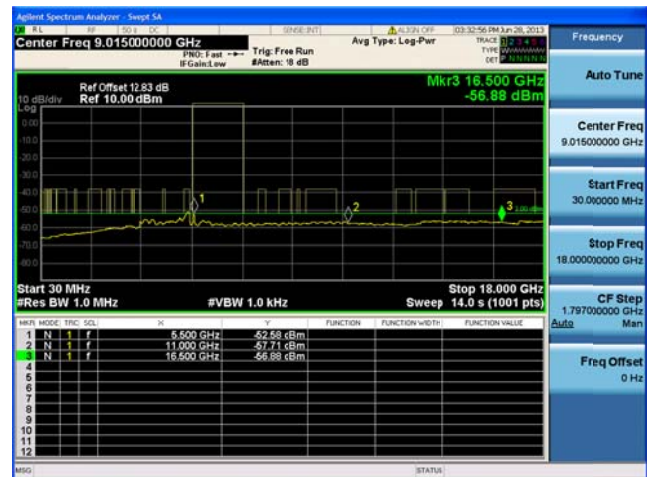
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5500	Non HT-20, 6 to 54 Mbps	1	5	-57.1		-57.1	-41.25	15.9
	Non HT-20, 6 to 54 Mbps	2	5	-57.0	-56.9	-53.9	-41.25	12.7
	HT-20, M0 to M7	1	5	-57.0		-57.0	-41.25	15.8
	HT-20, M0 to M7	2	5	-56.9	-56.9	-53.9	-41.25	12.6
	HT-20, M8 to M15	2	5	-57.0	-56.9	-53.9	-41.25	12.7
	HT-20 STBC, M0 to M7	2	5	-57.0	-56.9	-53.9	-41.25	12.7
5510	Non HT-40, 6 to 54 Mbps	1	5	-57.0		-57.0	-41.25	15.8
	Non HT-40, 6 to 54 Mbps	2	5	-56.9	-56.9	-53.9	-41.25	12.6
	HT-40, M0 to M7	1	5	-57.0		-57.0	-41.25	15.8
	HT-40, M0 to M7	2	5	-57.0	-56.8	-53.9	-41.25	12.6
	HT-40, M8 to M15	2	5	-57.0	-56.8	-53.9	-41.25	12.6
	HT-40 STBC, M0 to M7	2	5	-57.0	-56.8	-53.9	-41.25	12.6
5550	Non HT-40, 6 to 54 Mbps	1	5	-57.3		-57.3	-41.25	16.1
	Non HT-40, 6 to 54 Mbps	2	5	-57.2	-57.2	-54.2	-41.25	12.9
	HT-40, M0 to M7	1	5	-56.9		-56.9	-41.25	15.7
	HT-40, M0 to M7	2	5	-57.2	-57.2	-54.2	-41.25	12.9
	HT-40, M8 to M15	2	5	-57.1	-57.1	-54.1	-41.25	12.8
	HT-40 STBC, M0 to M7	2	5	-57.1	-57.1	-54.1	-41.25	12.8
5700	Non HT-20, 6 to 54 Mbps	1	5	-57.6		-57.6	-41.25	16.4
	Non HT-20, 6 to 54 Mbps	2	5	-57.6	-57.7	-54.6	-41.25	13.4
	HT-20, M0 to M7	1	5	-57.5		-57.5	-41.25	16.3
	HT-20, M0 to M7	2	5	-57.6	-57.6	-54.6	-41.25	13.3
	HT-20, M8 to M15	2	5	-57.4	-57.7	-54.5	-41.25	13.3
	HT-20 STBC, M0 to M7	2	5	-57.4	-57.7	-54.5	-41.25	13.3



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5500	Non HT-20, 6 to 54 Mbps	1	5	-47.9		-47.9	-27	20.9
	Non HT-20, 6 to 54 Mbps	2	5	-48.0	-48.9	-45.4	-27	18.4
	HT-20, M0 to M7	1	5	-48.6		-48.6	-27	21.6
	HT-20, M0 to M7	2	5	-46.7	-47.5	-44.1	-27	17.1
	HT-20, M8 to M15	2	5	-49.5	-47.5	-45.4	-27	18.4
	HT-20 STBC, M0 to M7	2	5	-49.5	-47.5	-45.4	-27	18.4
5510	Non HT-40, 6 to 54 Mbps	1	5	-49.5		-49.5	-27	22.5
	Non HT-40, 6 to 54 Mbps	2	5	-49.7	-49.3	-46.5	-27	19.5
	HT-40, M0 to M7	1	5	-48.0		-48.0	-27	21.0
	HT-40, M0 to M7	2	5	-48.0	-48.1	-45.0	-27	18.0
	HT-40, M8 to M15	2	5	-48.0	-48.1	-45.0	-27	18.0
	HT-40 STBC, M0 to M7	2	5	-48.0	-48.1	-45.0	-27	18.0
5550	Non HT-40, 6 to 54 Mbps	1	5	-48.7		-48.7	-27	21.7
	Non HT-40, 6 to 54 Mbps	2	5	-45.7	-46.1	-42.9	-27	15.9
	HT-40, M0 to M7	1	5	-47.2		-47.2	-27	20.2
	HT-40, M0 to M7	2	5	-49.5	-48.7	-46.1	-27	19.1
	HT-40, M8 to M15	2	5	-48.1	-48.9	-45.5	-27	18.5
	HT-40 STBC, M0 to M7	2	5	-48.1	-48.9	-45.5	-27	18.5
5700	Non HT-20, 6 to 54 Mbps	1	5	-49.7		-49.7	-27	22.7
	Non HT-20, 6 to 54 Mbps	2	5	-48.9	-49.1	-46.0	-27	19.0
	HT-20, M0 to M7	1	5	-47.9		-47.9	-27	20.9
	HT-20, M0 to M7	2	5	-50.3	-51.0	-47.6	-27	20.6
	HT-20, M8 to M15	2	5	-49.1	-50.5	-46.7	-27	19.7
	HT-20 STBC, M0 to M7	2	5	-49.1	-50.5	-46.7	-27	19.7

**Conducted Spurs, All Antennas 18GHz to 40 GHz**

**Conducted Spurs Average, 5500 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Conducted Spurs Average, 5500 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

Conducted Spurs Average, 5500 MHz, HT-20, M0 to M7**Antenna A****Conducted Spurs Average, 5500 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

[illegible][illegible]

The screenshot displays a Vector Signal Analyzer (VSA) interface. The main plot shows a spectrum with a yellow trace. A green marker is placed at 16.500 GHz, indicating a measurement point. The plot includes a reference level of 12.83 dB and a resolution bandwidth (RBW) of 1.0 kHz. The frequency range is from 30 MHz to 18.000 GHz. The plot also shows a sweep rate of 14.0 s (1001 pts).

Below the plot, a table provides measurement data:

MEAS MODE	TRC	COL	Hz	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f	8.500 GHz	-51.4 dBm			
2	N	f	11.000 GHz	-57.4 dBm			
3	N	f	16.500 GHz	-57.04 dBm			

The right side of the interface shows a list of measurement parameters and their values:

- Frequency: 9.015000000 GHz
- Auto Tune
- Center Freq: 9.015000000 GHz
- Start Freq: 30.000000 MHz
- Stop Freq: 18.000000000 GHz
- CF Step: 1.797000000 GHz
- Freq Offset: 0 Hz

Agilent Spectrum Analyzer - Sept 24, 2013

Center Freq 9.015000000 GHz Avg Type: Log-Pwr

Ref Offset 12.83 dB Ref 10.00dBm

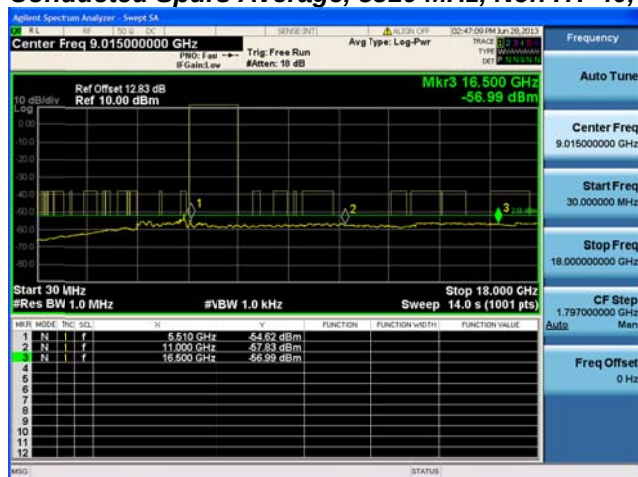
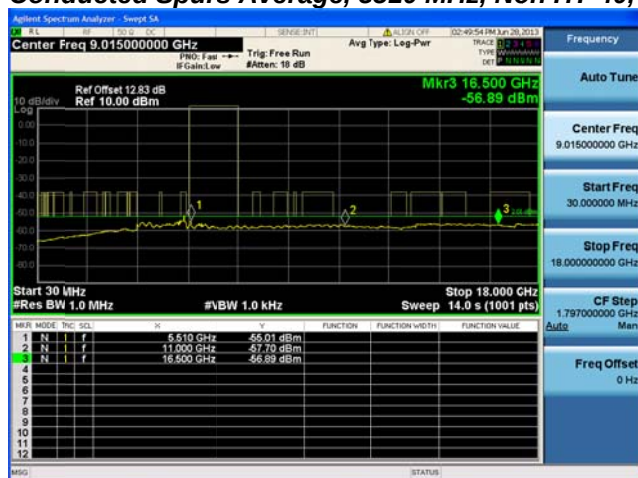
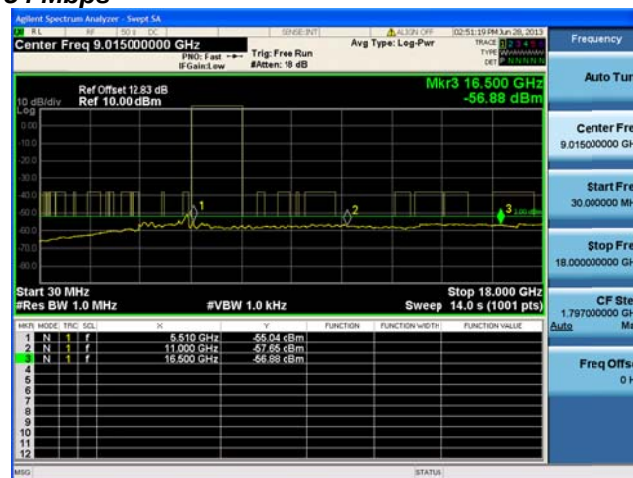
Mkr3 16.500 GHz -56.94 dBm

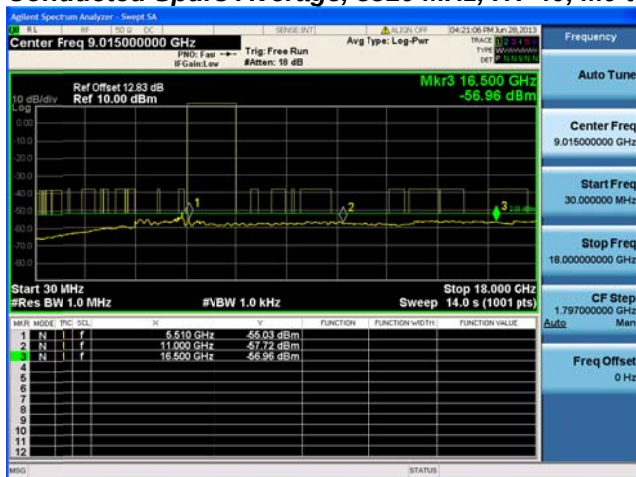
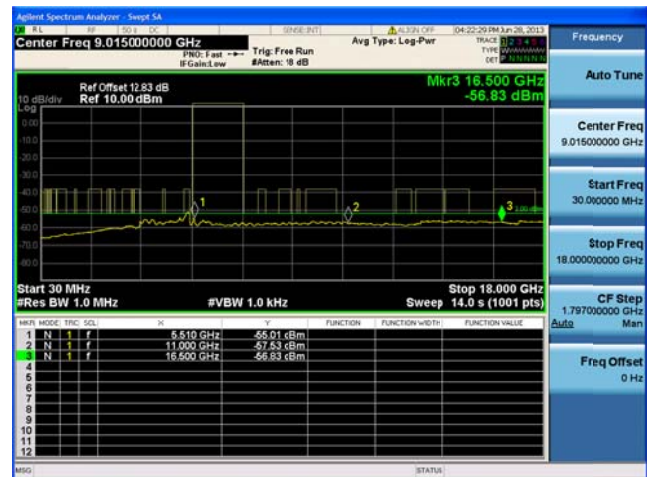
Start 30 MHz Stop 18.000 GHz

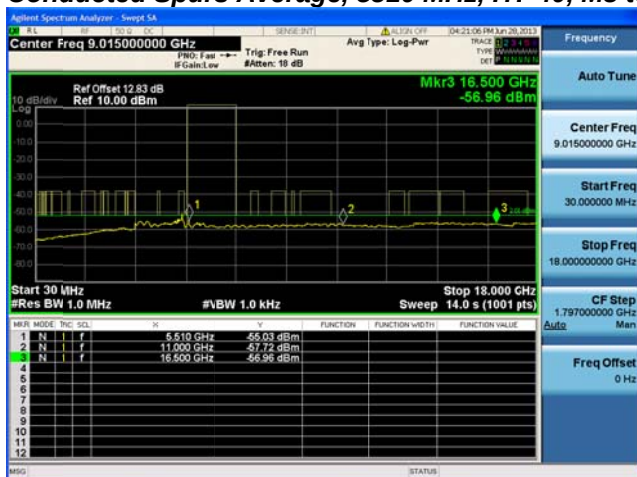
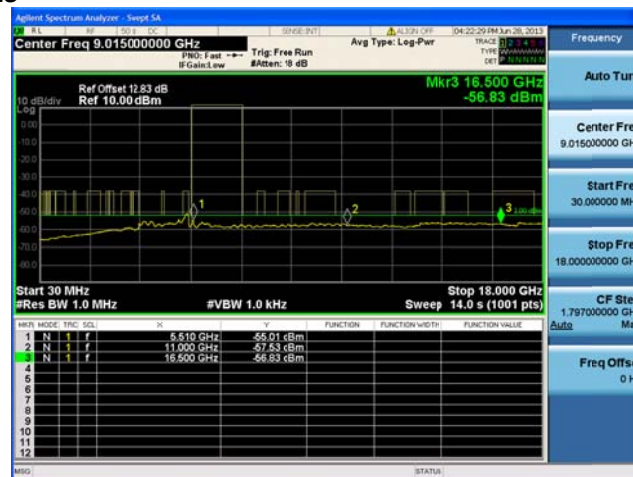
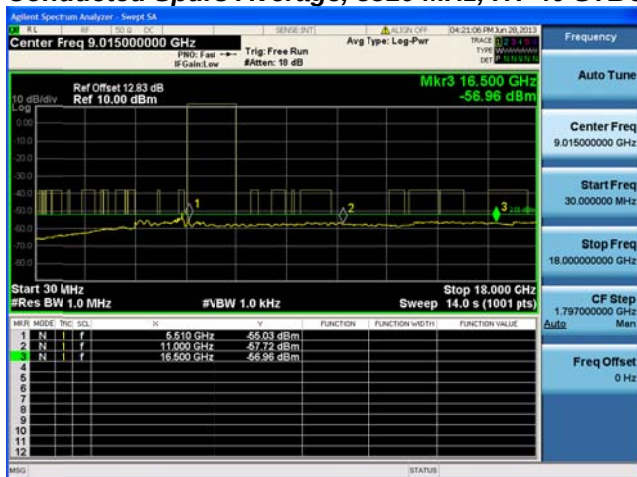
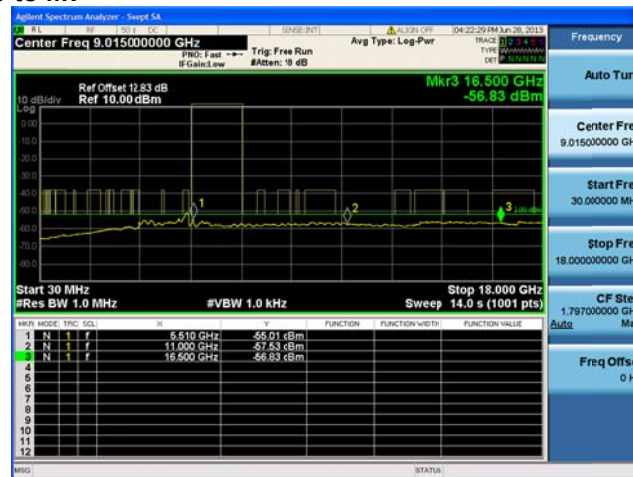
#Res BW 1.0 MHz #VBW 1.0 kHz Sweep 14.0 s (1001 pts)

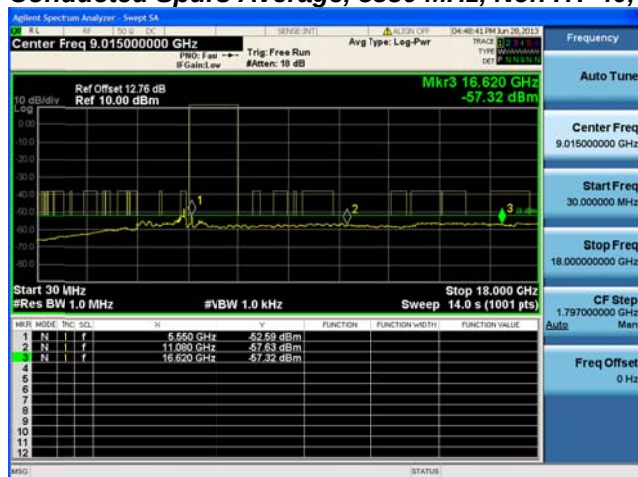
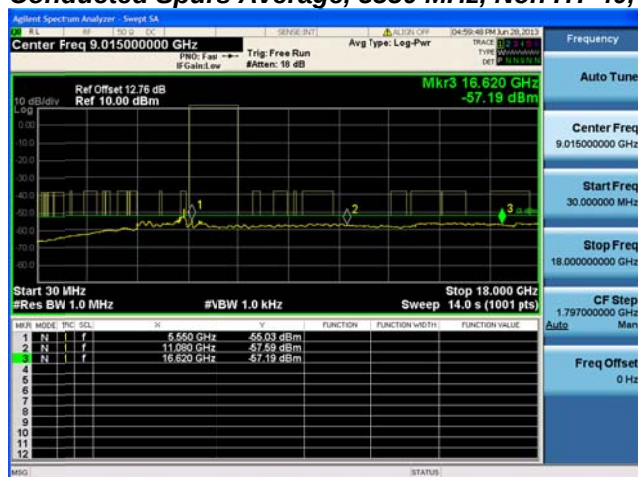
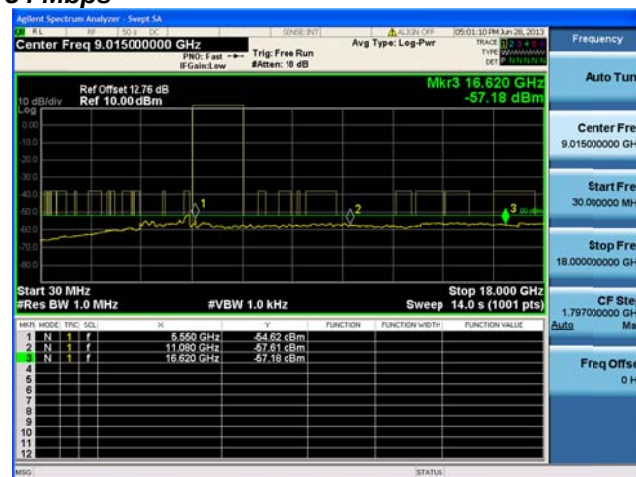
MNR	MODE	FREQ	SQL	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	5.500 GHz	53.47 dBm		
2	N	1	f	11.000 GHz	57.95 dBm		
3	N	1	f	16.500 GHz	-56.94 dBm		
4							
5							
6							
7							
8							
9							
10							
11							
12							

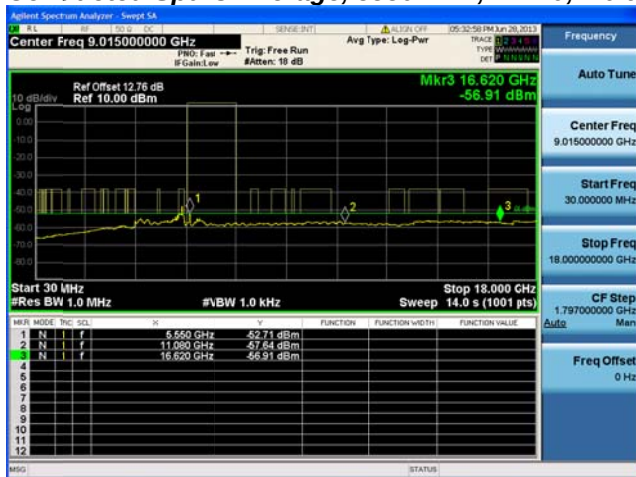
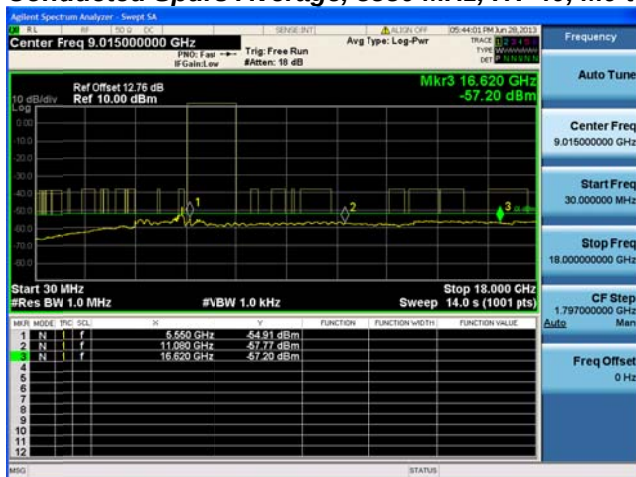
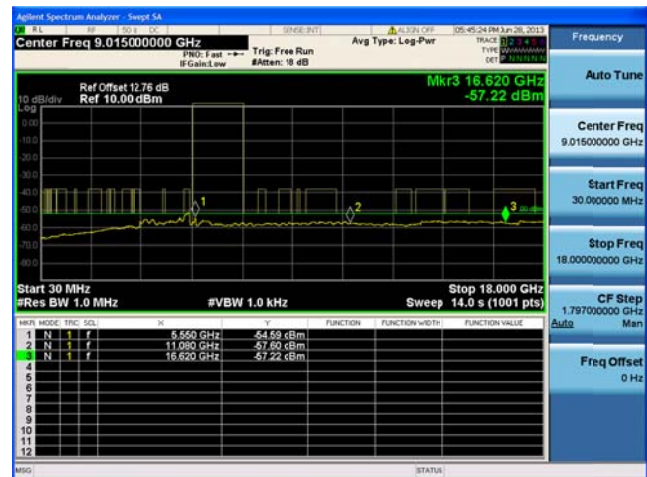
This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Average, 5510 MHz, Non HT-40, 6 to 54 Mbps**Antenna A****Conducted Spurs Average, 5510 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**

Conducted Spurs Average, 5510 MHz, HT-40, M0 to M7**Antenna A****Conducted Spurs Average, 5510 MHz, HT-40, M0 to M7****Antenna A****Antenna B**

Conducted Spurs Average, 5510 MHz, HT-40, M8 to M15**Antenna A****Antenna B****Conducted Spurs Average, 5510 MHz, HT-40 STBC, M0 to M7****Antenna A****Antenna B**

Conducted Spurs Average, 5550 MHz, Non HT-40, 6 to 54 Mbps**Antenna A****Conducted Spurs Average, 5550 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**

Conducted Spurs Average, 5550 MHz, HT-40, M0 to M7**Antenna A****Conducted Spurs Average, 5550 MHz, HT-40, M0 to M7****Antenna A****Antenna B**

[illegible][illegible]

Vector Spectrum Analyzer - Sweep CA

Center Freq 9.015000000 GHz

Ref Offset 12.76 dB
Ref 10.00 dBm

Mkr3 16.620 GHz
-57.08 dBm

Start 30 MHz
#Res BW 1.0 MHz

#BW 1.0 kHz

Stop 18,000 GHz
Sweep 14.0 (1001 pts)

MARK	MODE	PRC	QCL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	I	f	8.550 GHz	-54.93 dBm			
2	N	I	f	11.880 GHz	-57.72 dBm			
3	N	I	f	16.620 GHz	-57.08 dBm			

MSG (STATUS)

Spectrum Analyzer - SmpL 54

Center Freq 9.015000000 GHz Avg Type: Log-Pwr Ref Offset 12.76 dB Ref 10.00 dBm

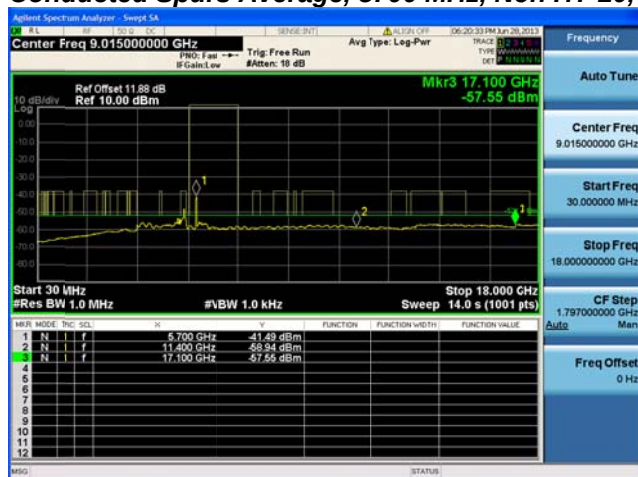
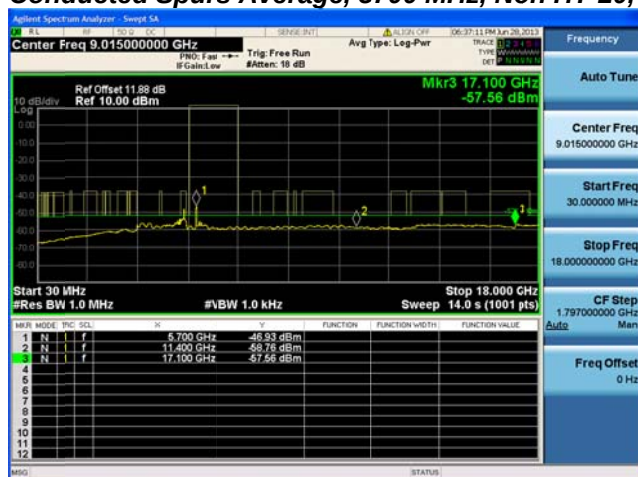
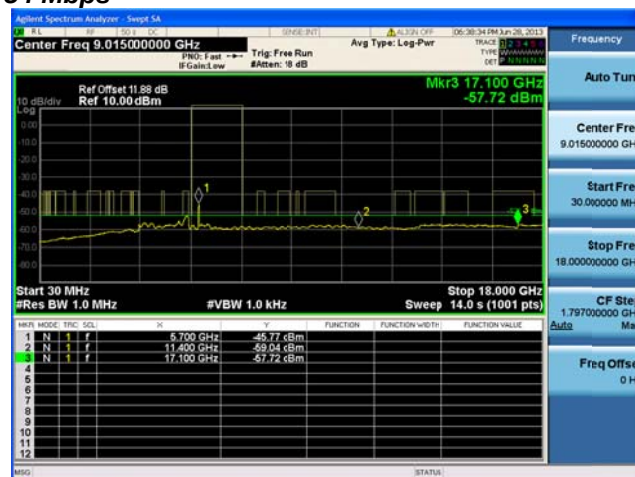
PBW: Fast → Trig: Free Run #Span: 9 dB

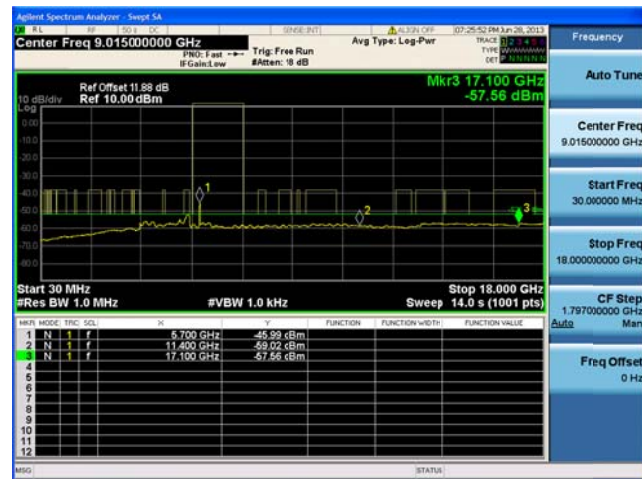
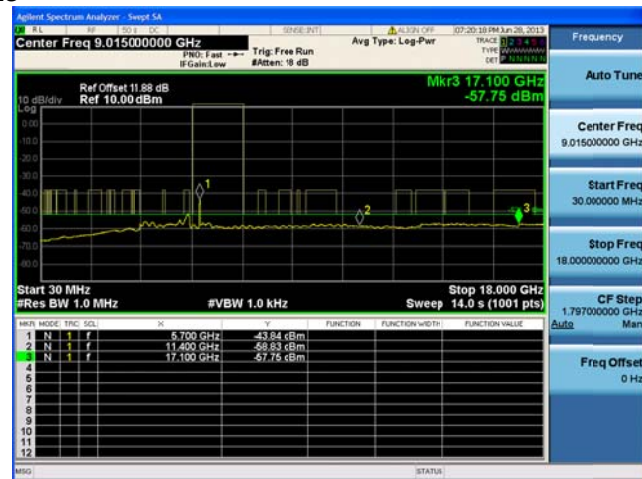
Start 30 MHz Stop 18.000 GHz
#Res BW 1.0 MHz Sweep 14.0 s (1001 pts)

MNR	MODE	FREQ	DCL	N	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f	f	5.550	GHz	-54.21	dBm	
2	N	f	f	11.080	GHz	-57.61	cBm	
3	N	f	f	16.620	GHz	-57.09	cBm	

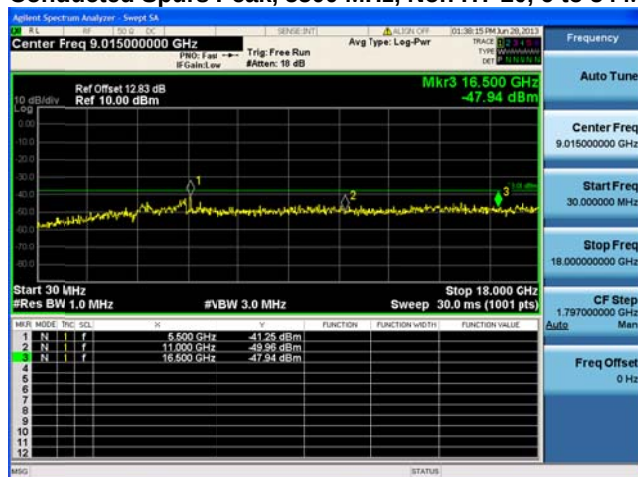
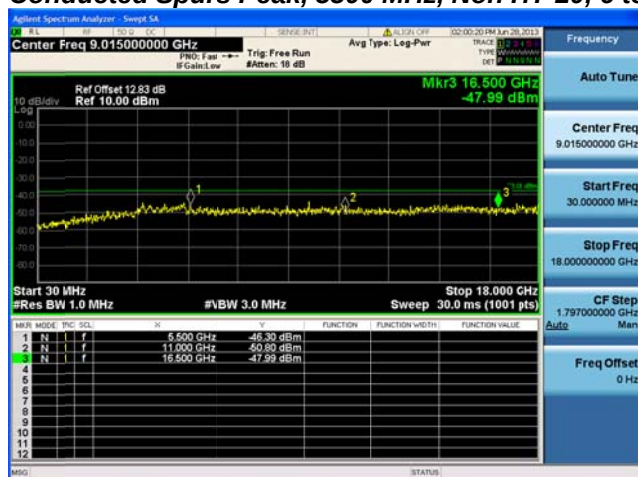
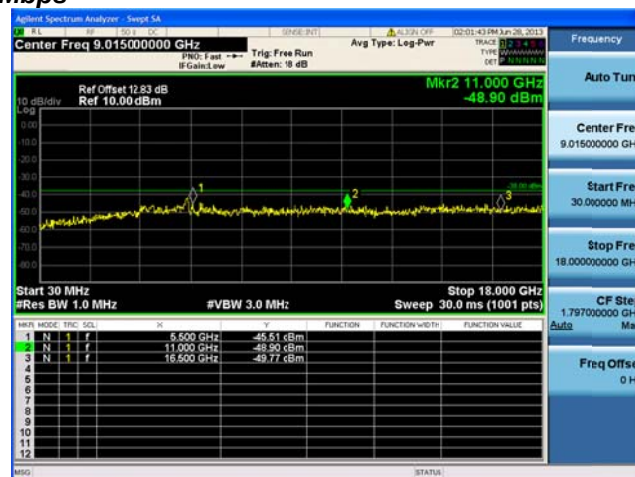
MSG [STATUS]

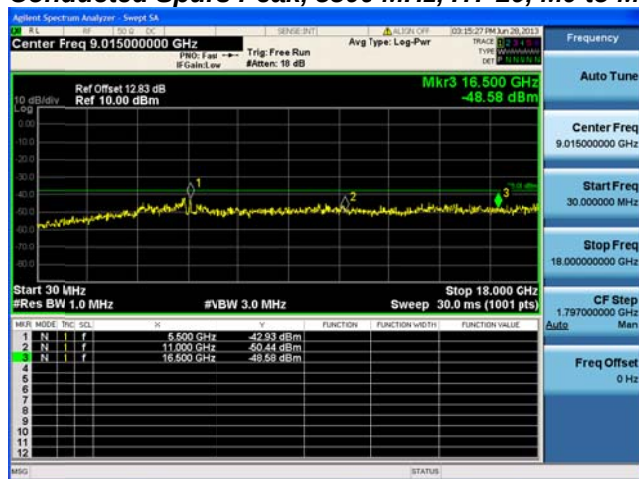
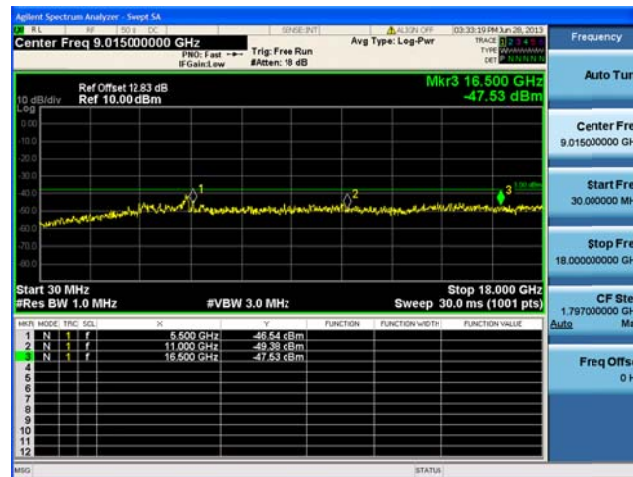
This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

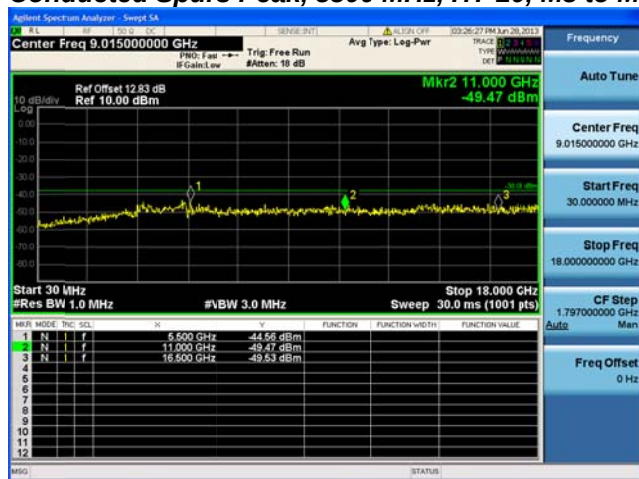
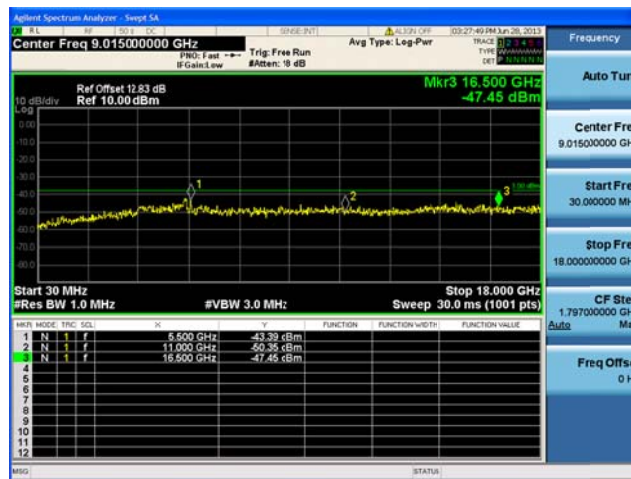
Conducted Spurs Average, 5700 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Conducted Spurs Average, 5700 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

Conducted Spurs Average, 5700 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Conducted Spurs Average, 5700 MHz, HT-20, M8 to M15****Antenna A****Antenna B**

Conducted Spurs Average, 5700 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B**

Conducted Spurs Peak, 5500 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Conducted Spurs Peak, 5500 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

Conducted Spurs Peak, 5500 MHz, HT-20, M0 to M7**Antenna A****Conducted Spurs Peak, 5500 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

Conducted Spurs Peak, 5500 MHz, HT-20, M8 to M15**Antenna A****Antenna B**