

DOKE COMMUNICATION (HK) LIMITED

TEST REPORT

SCOPE OF WORK

FCC TESTING—BV6200 Plus

REPORT NUMBER

250219088SZN-008

ISSUE DATE

21 April 2025

[REVISED DATE]

[-----]

PAGES

17

DOCUMENT CONTROL NUMBER

FCC SDoC_a

© 2017 INTERTEK



LABORATORY MEASUREMENTS**Supplier's Declaration of Conformity Report**

Applicant / Company: DOKE COMMUNICATION (HK) LIMITED
19H MAXGRAND PLAZA NO 3 TAI YAU STREET SAN PO KONG KL

Manufacturer: Shenzhen DOKE Electronic Co., Ltd
801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road,
Guangming District, Shenzhen, China.

Equipment Under Test (EUT):

Product Description: Smart phone

FCC ID: 2A7DX-BV6200PLUS

Model: BV6200 Plus

Brand Name: Blackview

Equipment Type: Class B Device

Sample Receipt Date: 19 February 2025

Test Conducted Date: 19 February 2025 to 25 March 2025

Issue Date: 21 April 2025

Test Site and Location: Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing
Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R.
China

Standard(s): FCC 47 CFR Part 15: 2023 Radio Frequency Devices

Method: ANSI C63.4-2014

Prepared and Checked by:

Tony Tang
Engineer**Approved by:**

Johnny Wang
Project Engineer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

TABLE OF CONTENTS

1	General Information	3
1.1	Client Information.....	3
1.2	General Description	3
1.3	Details of EUT	3
2	Test Summary.....	4
3	Test Specifications	5
3.1	Standards.....	5
3.2	Definition of Device Classification.....	5
3.3	EUT Operation Condition.....	5
3.4	Test software	5
4	Conducted Emission Measurements	6
4.1	Operating Environment.....	6
4.2	Test Setup and Procedure.....	6
4.3	Test Equipment	7
4.4	Conducted Emission Limits	7
4.5	Uncertainty of Conducted Emission	7
4.6	Conducted Emission Data	7
5	Radiated Emission Measurements	10
5.1	Operating Environment.....	10
5.2	Test Setup and Procedure.....	10
5.3	Test Equipment	12
5.4	Radiated Emission Limits	12
5.5	Uncertainty of Radiated Emission.....	12
5.6	Radiated Emission Test Data	12
	Appendix A1: External Photo of EUT	17
	Appendix A2: Internal Photo of EUT	17
	Appendix B1: Conducted Emission Test Set-up	17
	Appendix B2: Radiated Emission Test Set-up.....	17

1. GENERAL INFORMATION**1.1 Client Information**

Applicant: DOKE COMMUNICATION (HK) LIMITED

1.2 General Description of EUT

Product Description: Smart phone
Model No.: BV6200 Plus
Serial No.: Not Labelled

1.3 Details of EUT

Rated Voltage: 5.0V=3.0A, 9.0V=2.0A, 12.0V=1.5A by adapter

Battery Voltage: DC 3.85V from battery

Support Equipment: Laptop (Dell 5420)
(Provided by Intertek)

Cables: Shielded, Length: 100cm
(Provided by Applicant)

Adaptor: Model: QZ-0180AAA00
Input: 100-240V~, 50/60Hz, 0.5A
Output: 5.0V=3.0A, 9.0V=2.0A, 12.0V=1.5A
(Provided by Applicant)

For more detail features, please refer to user's Manual.

2. TEST SUMMARY

Test	Standard	Class	Result
Conducted Emission	FCC 47 CFR Part 15 Section 15.107	Class B	Pass
Radiated Emission	FCC 47 CFR Part 15 Section 15.109	Class B	Pass

Remark:

Enclosed please find the FCC Labelling and Instruction Manual Requirements.

3. TEST SPECIFICATIONS

3.1 Standards

Both conducted and radiated emission tests were performed according to the procedures in ANSI C63.4: 2014. Test results are in compliance with the requirements of FCC 47 CFR Part 15: 2023.

The EUT setup configuration please refers to the photo of test configuration in item.

3.2 Definition of Device Classification

Unintentional radiator:

A device which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment.

Class B Digital Device:

A digital device which is marketed for use by the general public or in a residential environment.

Note:

A manufacturer may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

3.3 EUT Operation Condition

The EUT was powered by DC 3.85V from battery and was running in accordance with the manufacturer's operation manual.

3.4 Test software

Description	Manufacturer	Model No.
EMI Test Software	R&S	EMC32-ME+


4. CONDUCTED EMISSION MEASUREMENTS (FCC 15.107)

4.1 Operating Environment

Temperature: 21.9°C

Test Voltage: 100-240V~, 50/60Hz

4.2 Test Setup and Procedure

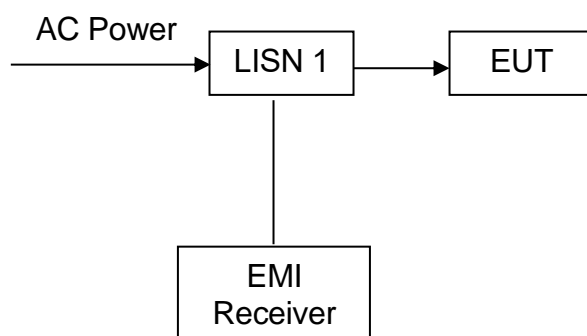

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

The EUT setup configuration please refers to the photo of test configuration in Appendix B1.

4.3 Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-02	EMI Receiver	R & S	ESCI	2024-07-09	2025-07-09
SZ187-02	Two-Line V-Network	R & S	ENV216	2024-04-23	2025-04-23
SZ188-03	Shielding Room	ETS	RFD-100	2022-12-20	2025-12-20

4.4 Conducted Emission Limits

Freq. (MHz)	Maximum RF Line Voltage			
	Class A (dBμV)		Class B (dBμV)	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56	56~46
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

4.5 Uncertainty of Conducted Emission

When determining the test conclusion, the Measurement Uncertainty of test has been considered. The measurement uncertainty is ± 3.2 dB at a level of confidence of 95%.

4.6 Conducted Emission Data

The graphic and data table consisting of the worst-case testing result were attached in the following pages.

Applicant: DOKE COMMUNICATION (HK) LIMITED

Worst Case Operating Mode: Video Playing


Worst Case Test Voltage: AC 120V, 60Hz

Model: BV6200 Plus

Phase: Live

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.107: Emissions Requirement

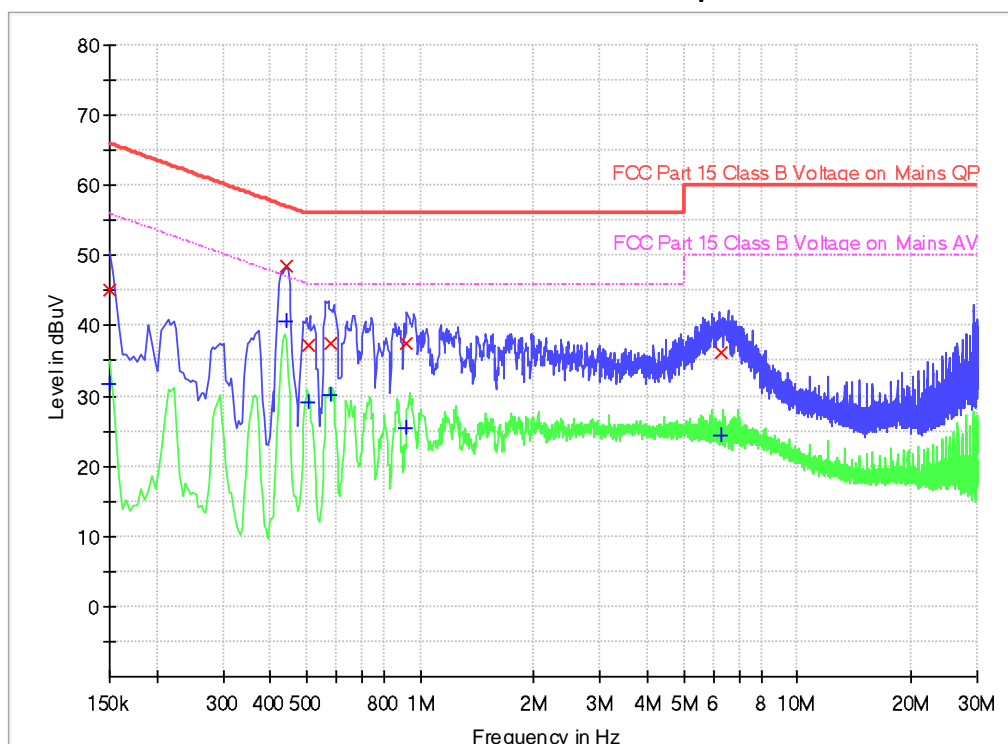

Limit and Margin QP

Frequency (MHz)	Quasi Peak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	45.1	9.000	L1	9.6	20.9	66.0
0.442000	48.6	9.000	L1	9.5	8.4	57.0
0.506000	37.1	9.000	L1	9.5	18.9	56.0
0.578000	37.6	9.000	L1	9.5	18.4	56.0
0.918000	37.5	9.000	L1	9.4	18.5	56.0
6.294000	36.2	9.000	L1	9.5	23.8	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	31.8	9.000	L1	9.6	24.2	56.0
0.442000	40.7	9.000	L1	9.5	6.3	47.0
0.506000	29.2	9.000	L1	9.5	16.8	46.0
0.578000	30.2	9.000	L1	9.5	15.8	46.0
0.918000	25.4	9.000	L1	9.4	20.6	46.0
6.294000	24.4	9.000	L1	9.5	25.6	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBμV) – Quasi Peak/Average (dBμV)

Applicant: DOKE COMMUNICATION (HK) LIMITED

Worst Case Operating Mode: Video Playing


Worst Case Test Voltage: AC 120V, 60Hz

Model: BV6200 Plus

Phase: Neutral

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.107: Emissions Requirement

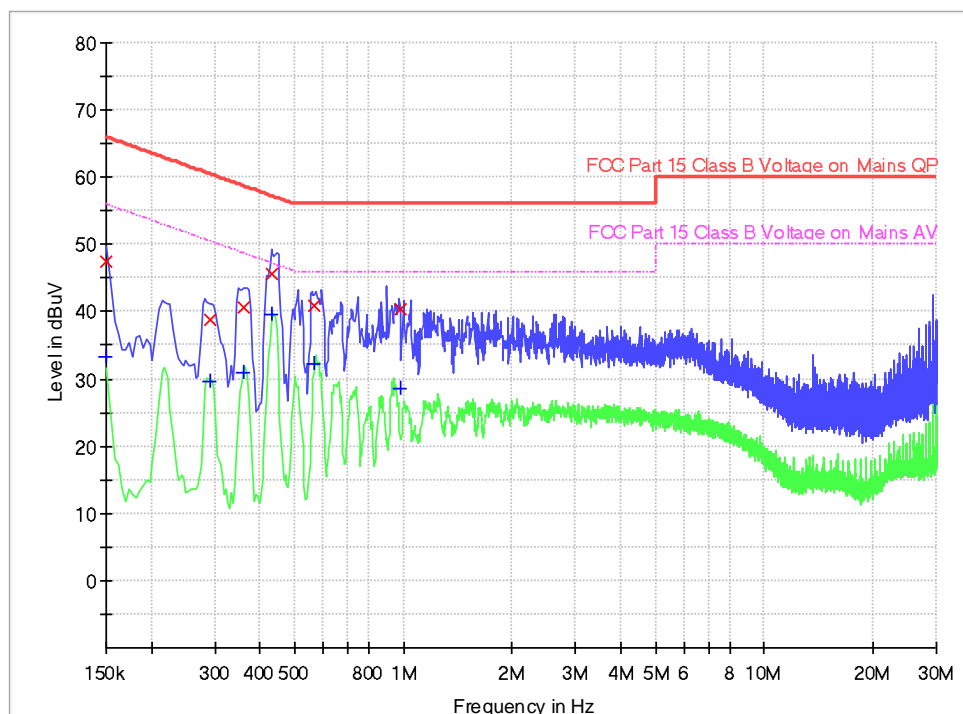

Limit and Margin QP

Frequency (MHz)	Quasi Peak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	47.3	9.000	N	9.6	18.7	66.0
0.290000	38.7	9.000	N	9.6	21.8	60.5
0.362000	40.7	9.000	N	9.6	18.0	58.7
0.434000	45.6	9.000	N	9.6	11.6	57.2
0.566000	41.0	9.000	N	9.6	15.0	56.0
0.978000	40.3	9.000	N	9.5	15.7	56.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	33.3	9.000	N	9.6	22.7	56.0
0.290000	29.7	9.000	N	9.6	20.8	50.5
0.362000	31.0	9.000	N	9.6	17.7	48.7
0.434000	39.6	9.000	N	9.6	7.6	47.2
0.566000	32.2	9.000	N	9.6	13.8	46.0
0.978000	28.6	9.000	N	9.5	17.4	46.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBμV) – Quasi Peak/Average (dBμV)

5. RADIATED EMISSION MEASUREMENTS (FCC 15.109)

5.1 Operating Environment


Temperature: 21.9°C

Test Voltage: 100-240V~, 50/60Hz


5.2 Test Setup and Procedure

The figure below shows the test setup, which is utilized to make these measurements.

The frequency spectrum from 30MHz to 29500MHz was investigated.

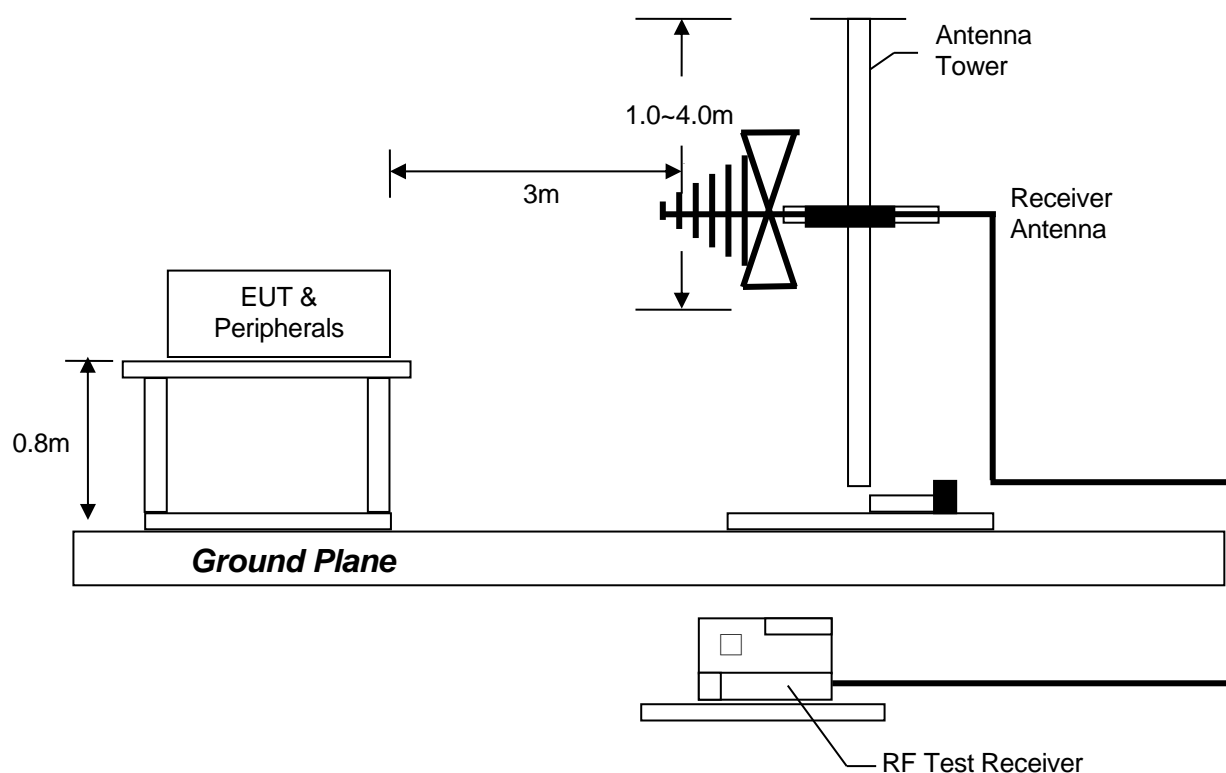

(Radiated Emission Measurements Test Setup for 30MHz to 1GHz)

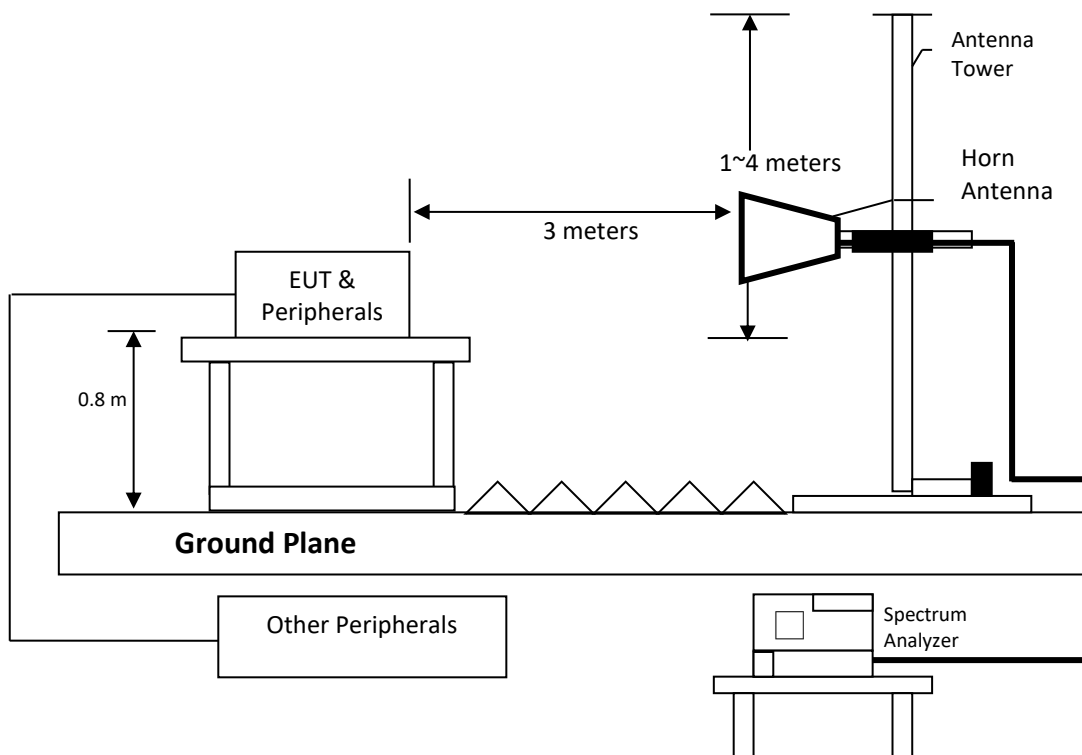

(Radiated Emission Measurements Test Setup for above 1GHz)

For tabletop equipment, the equipment under test was placed on the top of rotation table 0.8 meter above ground plane. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material.

The table was 360 degrees to determine the position of the highest radiation.

EUT is set 3 meters from the EMI receiving antenna, which is mounted on a variable height mast. The antenna height is varied between one meter and four meters above ground to find the maximum value of the field strength. Both horizontal polarization and vertical polarization of the antenna are set to make the measurement. The bandwidth was setting on the EMI meter 120 kHz for 30MHz to 1GHz. The bandwidth was setting on the Spectrum Analyzer 1MHz for above 1GHz.

The levels are quasi peak value readings. The frequency spectrum from 30MHz to 1000MHz was investigated.

The levels are peak value readings. The frequency spectrum from 1000MHz to 29500MHz was investigated.

The EUT setup configuration please refers to the photo of test configuration in Appendix B2.

5.3 Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-03	EMI Receiver	R&S	ESR7	2024-04-23	2025-04-23
SZ056-06	Signal Analyzer	R&S	FSV40	2024-12-06	2025-12-06
SZ061-13	Biconilog Antenna	ETS	3142E	2022-07-13	2025-07-13
SZ061-08	Horn Antenna	ETS	3115	2024-09-13	2027-09-13
SZ181-08	Microwave System Amplifier	keysight	83017A	2024-07-29	2025-07-29
SZ188-05	Anechoic Chamber	ETS	FACT 3-2.0	2021-05-25	2026-05-25

5.4 Radiated Emission Limits

According to FCC 15.109, except for Class A digital device, the field strength of radiated emission from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Class B Radiated Emission Limits:

Frequency MHz	Class A Quasi-peak (dBμV/m)	Class B Quasi-peak (dBμV/m)
30-88	49.5	40.0
88-216	54.0	43.5
216-960	56.9	46.0
Above 960	60.0	54.0

5.5 Uncertainty of Radiated Emission

When determining the test conclusion, the Measurement Uncertainty of test has been considered. The measurement uncertainty is ± 4.8 dB at a level of confidence of 95%.

5.6 Radiated Emission Test Data

The graphic and data table consisting of the worst-case testing result were attached in the following pages.

Applicant: DOKE COMMUNICATION (HK) LIMITED

Model: BV6200 Plus

Worst Case Operating Mode: Charging


Worst Case Testing Voltage: AC 120V, 60Hz

Graphic / Data Table

Radiated Scan

Pursuant to FCC 15.109: Emissions Requirement 30MHz-1000MHz

Horizontal

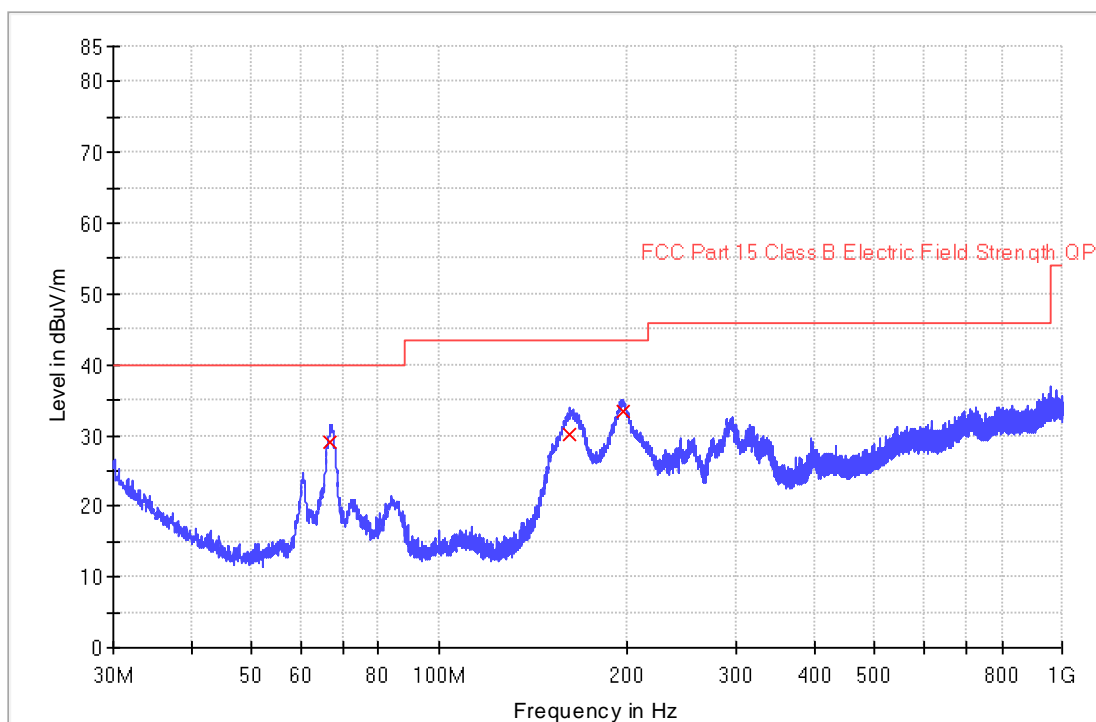

Limit and Margin

Frequency (MHz)	Quasi Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
66.989333	29.0	1000.0	120.000	H	14.0	11.0	40.0
162.372667	30.2	1000.0	120.000	H	17.0	13.3	43.5
198.004000	33.4	1000.0	120.000	H	17.2	10.1	43.5

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. Quasi Peak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit QPK (dBμV/m) – Quasi Peak (dBμV/m)

Applicant: DOKE COMMUNICATION (HK) LIMITED

Model: BV6200 Plus

Worst Case Operating Mode: Charging


Worst Case Testing Voltage: AC 120V, 60Hz

Graphic / Data Table

Radiated Scan

Pursuant to FCC 15.109: Emissions Requirement

Vertical

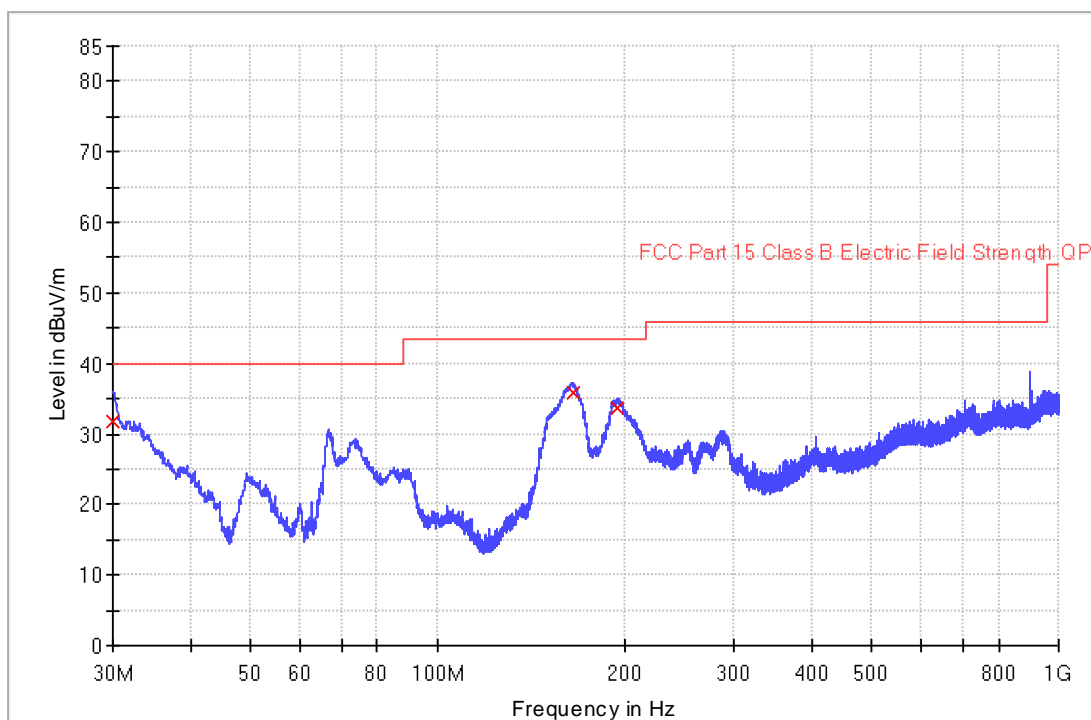

Limit and Margin

Frequency (MHz)	Quasi Peak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
30.032333	31.9	1000.0	120.000	V	23.5	8.1	40.0
165.379667	35.9	1000.0	120.000	V	16.8	7.6	43.5
194.673667	33.7	1000.0	120.000	V	17.0	9.8	43.5

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. Quasi Peak (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Limit QPK (dBuV/m) – Quasi Peak (dBuV/m)

Applicant: DOKE COMMUNICATION (HK) LIMITED

Model: BV6200 Plus

Worst Case Operating Mode: Charging


Worst Case Testing Voltage: AC 120V, 60Hz

Graphic / Data Table

Radiated Scan

Pursuant to FCC 15.109: Emissions Requirement 1GHz-29.5GHz

Horizontal

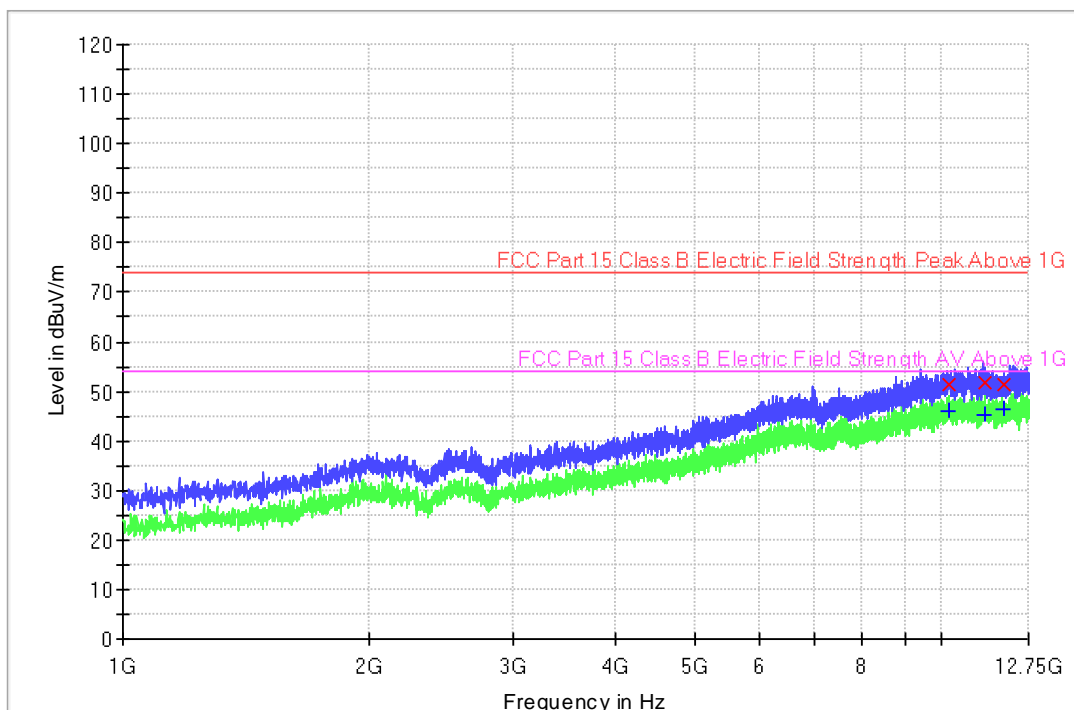

Limit and Margin PK

Frequency (MHz)	Max Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
10182.625000	51.3	1000.0	1000.000	H	20.5	22.7	74.0
11272.437500	51.9	1000.0	1000.000	H	20.2	22.1	74.0
11868.750000	51.5	1000.0	1000.000	H	20.0	22.5	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
10182.625000	46.0	1000.0	1000.000	H	20.5	8.0	54.0
11272.437500	45.1	1000.0	1000.000	H	20.2	8.9	54.0
11868.750000	46.2	1000.0	1000.000	H	20.0	7.8	54.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amp. Gain (dB)
2. Max peak/Average (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit (dBμV/m) - Max peak/Average (dBμV/m)
4. The emissions were very low against the limit in the frequency range 12.75 GHz ~ 29.5GHz.

Applicant: DOKE COMMUNICATION (HK) LIMITED

Model: BV6200 Plus

Worst Case Operating Mode: Charging


Worst Case Testing Voltage: AC 120V, 60Hz

Graphic / Data Table

Radiated Scan

Pursuant to FCC 15.109: Emissions Requirement 1GHz-29.5GHz

Vertical

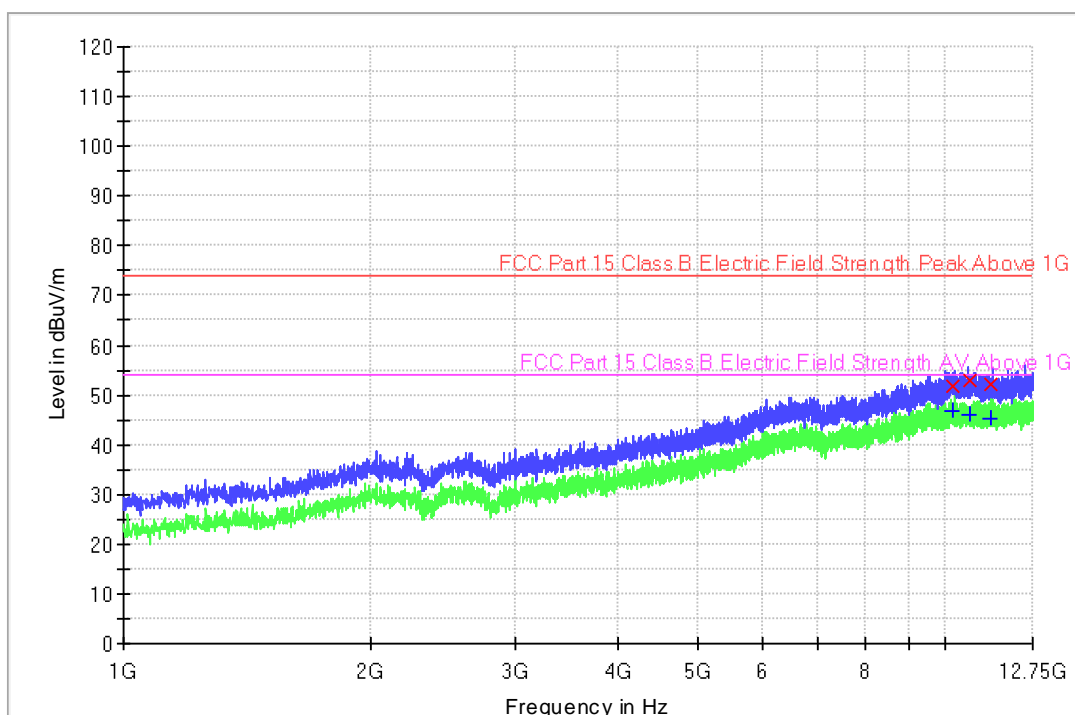

Limit and Margin PK

Frequency (MHz)	Max Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
10176.750000	51.9	1000.0	1000.000	V	20.5	22.1	74.0
10687.875000	53.0	1000.0	1000.000	V	20.5	21.0	74.0
11357.625000	52.2	1000.0	1000.000	V	20.2	21.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
10176.750000	46.8	1000.0	1000.000	V	20.5	7.2	54.0
10687.875000	46.0	1000.0	1000.000	V	20.5	8.0	54.0
11357.625000	45.3	1000.0	1000.000	V	20.2	8.7	54.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amp. Gain (dB)
2. Max peak/Average (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit (dBμV/m) - Max peak/Average (dBμV/m)
4. The emissions were very low against the limit in the frequency range 12.75 GHz ~ 29.5GHz.

APPENDIX A1: EXTERNAL PHOTO OF EUT

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf.pdf.

APPENDIX A2: INTERNAL PHOTO OF EUT

For electronic filing, the photographs of the tested EUT are saved with filename: internal photos.pdf.

APPENDIX B1: CONDUCTED EMISSION TEST SET-UP

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

APPENDIX B2: RADIATED EMISSION TEST SET-UP

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

***** End of Report*****

Supplier's Declaration of Conformity Procedure Instruction Manual Requirements

The user's manual or instruction manual shall include the following statement in a prominent location in the text of the manual:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- **Reorient or relocate the receiving antenna.**
- **Increase the separation between the equipment and receiver.**
- **Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- **Consult the dealer or an experienced radio/ TV technician for help.**

And the following additional information shall be contained in the user or instruction manual:

1) The Responsible (located within the United States) party information: Name, Address, Telephone Number or Internet contact information

2) The name and model number of the product

Notes: For systems incorporating several digital devices, the above statement needs to be contained only in the user manual for the main control unit.

If shielded cables or other specialized accessories are necessary for the unit to achieve compliance, a statement similar to the following should be added:

Shielded cables must be used with this unit to ensure compliance with the Class B FCC limits.

The compliance information statement shall be included in the user's manual or as a separate sheet. In cases where the manual is provided only in a form other than paper, such as on a computer disk or over the Internet, the information required by this section may be included in the manual in that alternative form, provided the user can reasonably be expected to have the capability to access information in that form

Supplier's Declaration of Conformity Labelling Requirements

The product identification (labelling) and compliance information requirements for a device subject to SDoC (Sections 2.1074 and 2.1077, respectively) requires that each device be uniquely identified (for example, using a label listing a trade name and type or model number). The label can be affixed at any space external to the product except the battery door or detachable parts. The product identification should be as follows:

The name and type or model number of the product

Compliance information should be as follows:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC logo on a voluntary basis as a visual indication that the product complies with the applicable FCC requirements

Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under Sections 2.1074 and 2.1077 are required to be affixed only to the main control unit.

When the device is so small or for such use that it is impracticable to label it with the statement specified under Sections 2.1074 and 2.1077 in a font that is four-point or larger, and the device does not have a display that can show electronic labelling, then the information required by this paragraph shall be placed in the user manual and must also either be placed on the device packaging or on a removable label attached to the device.

The label shall not be a stick-on paper label. The label on these products shall be permanently affixed to the product and shall be readily visible to the purchaser at the time of purchase. "Permanently affixed" means that the label is etched, engraved, stamped, silkscreened, indelibly printed, or otherwise permanently marked on a permanently attached part of the equipment or on a nameplate of metal, plastic, or other material fastened to the equipment by welding, riveting, or a permanent adhesive. The label must be designed to last the expected lifetime of the equipment in the environment in which the equipment may be operated and must not be readily detachable.