



FCC RF Co-location Test Report

APPLICANT : Texas Instruments Incorporated
EQUIPMENT : WiFi and Bluetooth Module
MODEL NAME : WL18MODGI
BRAND NAME : Texas Instruments
FCC ID : Z64-WL18DBMOD
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

This is a variant report. The product was received on Apr. 13, 2017 and testing was completed on Feb. 13, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : Z64-WL18DBMOD

Page Number : 1 of 16

Report Issued Date : Mar. 23, 2018

Report Version : Rev. 01

Report Template No.: BU5-FR15EWL AC MA Version 2.0



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Applicable Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode	7
2.3 Connection Diagram of Test System	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	8
3 TEST RESULT	9
3.1 Unwanted Emissions Measurement	9
3.2 Antenna Requirements	14
4 LIST OF MEASURING EQUIPMENT	15
5 UNCERTAINTY OF EVALUATION	16
APPENDIX A. CONDUCTED SPURIOUS EMISSION	
APPENDIX B. CONDUCTED SPURIOUS EMISSION PLOTS	
APPENDIX C. CABINET RADIATION DATA	
APPENDIX D. CABINET RADIATION PLOTS	
APPENDIX E. DUTY CYCLE PLOTS	
APPENDIX F. SETUP PHOTOGRAPHS	
APPENDIX G. ORIGINAL REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR741330	Rev. 01	Initial issue of report	Mar. 23, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.407(b)	Unwanted Emissions	$\leq -17, -27$ dBm (depend on band)&15.209(a)	Pass	Under limit 5.30 dB at 4804.000 MHz
3.2	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Texas Instruments Incorporated
12500 TI BLVD., Dallas Texas, 75243

1.2 Manufacturer

Texas Instruments Incorporated
12500 TI BLVD., Dallas Texas, 75243

1.3 Product Feature of Equipment Under Test

Bluetooth BR, EDR, LE v4.2, WLAN 802.11 b/g/n, 802.11 a/n

Antenna information					
	Brand	Antenna Type	Model	2.4GHz ~2.5GHz Gain	4.9GHz ~5.8GHz Gain
1	Ethertronics	PCB	1000423	-0.6dBi	4.5dBi
2	LSR	Rubber Whip / Dipole	001-0012	2dBi	2dBi
3			080-0013	2dBi	2dBi
4			080-0014	2dBi	2dBi
5		PIFA	001-0016	2.5dBi	3dBi
6			001-0021	2.5dBi	3dBi
7	Laird	PCB	CAF94504	2dBi	4dBi
8			CAF94505	2dBi	4dBi
9	Pulse	Chip	W3006	3.2dBi	4.2dBi
10	TDK	CHIP	ANT016008	2.4dBi	3.96dBi

Remark:

1. This is a variant report by updating test standards. Since the test result is not affected by the changes, all the test cases were performed on original report which can be referred to Sporton Report Number FR4O0971D as appendix G.
2. The EUT used a dual band CHIP antenna (Brand: Pulse)

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

2.1 Carrier Frequency and Channel

2400-2483.5 MHz Bluetooth		2400-2483.5 MHz Bluetooth LE	
Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	00	2402

5500-5700 MHz Band 3 (U-NII-2C)	
Channel	Freq. (MHz)
116	5580


2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

<Co-Location>

Modulation	Data Rate
Bluetooth + 802.11a	1 Mbps + 6 Mbps
Bluetooth LE + 802.11a	1 Mbps + 6 Mbps

2.3 Connection Diagram of Test System

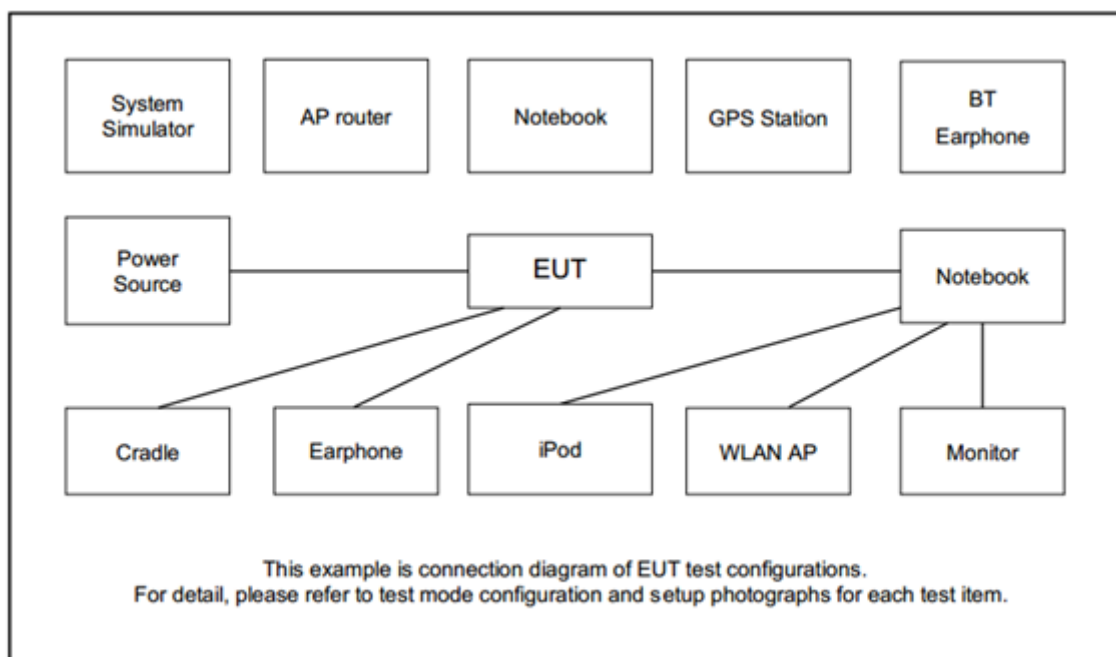

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	TP00034A	FCC DoC/ Contains FCC ID:QDS-BRCM1058	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility “HCITester” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to contact with base station to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

The RF test items, utility “RTTT” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Unwanted Emissions Measurement

3.1.1 Limit of Unwanted Emissions

(1) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(2) KDB789033 D02 v02r01 G)2)c)

- (i) Sections 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold



(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz


- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
 3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
 4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
 5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
 6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
 7. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
 8. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
 9. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.1.4 Test Setup


For Conducted Measurement:

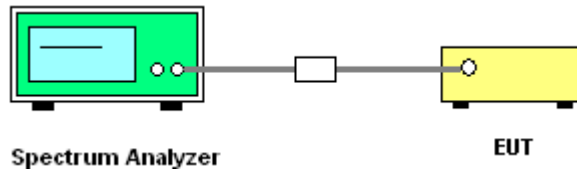


For radiated emissions below 30MHz

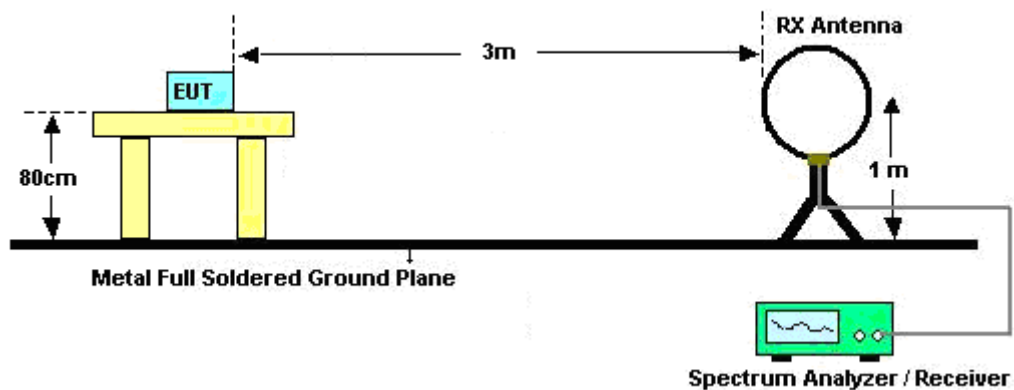

For radiated emissions from 30MHz to 1GHz

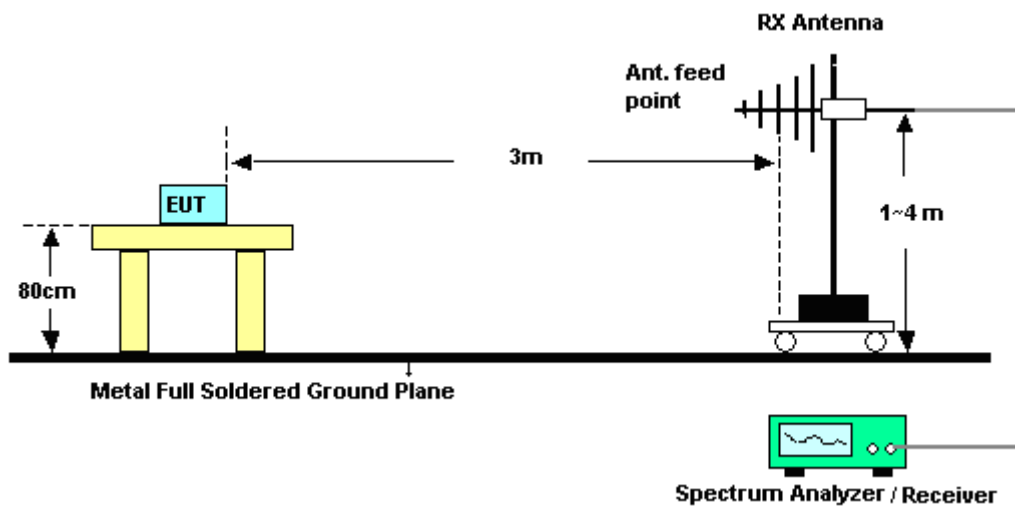

For radiated emissions above 1GHz

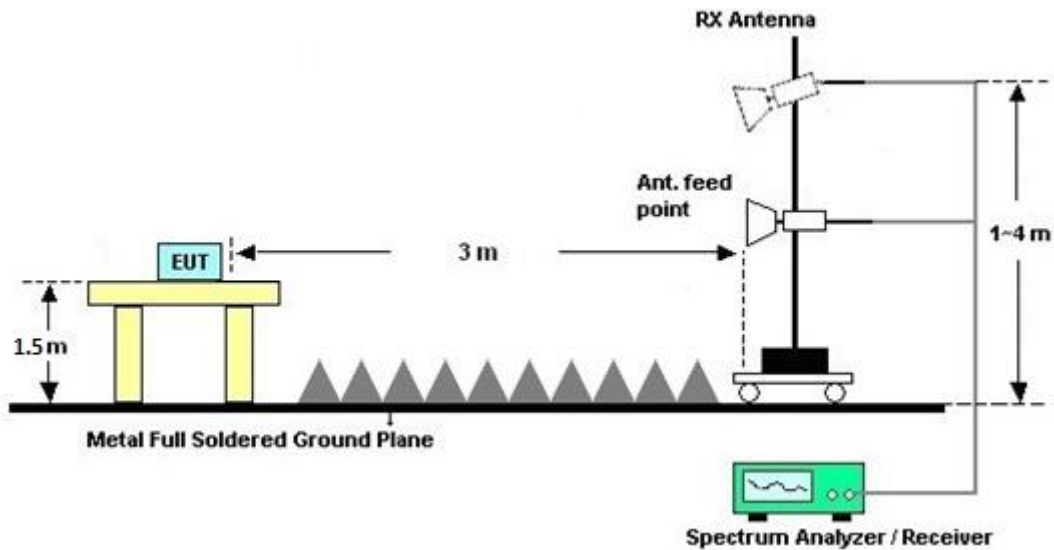

3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.1.6 Test Result of Conducted Spurious at Band Edges in the Restricted Band

Please refer to Appendix A and B.

3.1.7 Test Result of Conducted Spurious Emission in the Restricted Band

Please refer to Appendix A and B.

3.1.8 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.1.9 Duty Cycle

Please refer to Appendix E.



3.2 Antenna Requirements

3.2.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Antenna Anti-Placement Construction

An embedded-in antenna design is used.

3.2.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Agilent	N9010A	MY534701 18	10Hz~44GHz	Apr. 17, 2017	Feb. 13, 2018	Apr. 16, 2018	CSE (TH05-HY)
BT Base Station	Rohde & Schwarz	CBT	101136	BT3.0	Sep. 20, 2017	Feb. 13, 2018	Sep. 19, 2018	CSE (TH05-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Jan. 04, 2018	Feb. 06, 2018	Jan. 03, 2019	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Feb. 06, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 23, 2017	Feb. 06, 2018	Aug. 22, 2018	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Nov. 10, 2017	Feb. 06, 2018	Nov. 09, 2019	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 25, 2017	Feb. 06, 2018	Apr. 24, 2018	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	Mar. 14, 2017	Feb. 06, 2018	Mar. 13, 2018	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1GHz~ 26.5GHz	Oct. 30, 2017	Feb. 06, 2018	Oct. 29, 2018	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY534701 18	10Hz~44GHz	Apr. 17, 2017	Feb. 06, 2018	Apr. 16, 2018	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Feb. 06, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Feb. 06, 2018	N/A	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Feb. 06, 2018	Jul. 17, 2018	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	18GHz- 40GHz	Nov. 10, 2017	Feb. 06, 2018	Nov. 09, 2018	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.70
--	------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.50
--	------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20
--	------



Appendix A. Conducted Spurious Emission

Test Engineer :	Rebecca Li	Temperature :	21~23°C
		Relative Humidity :	47~49%

Co-existence

Emission above 1GHz (Harmonic @ Conducted)

Ant. 1	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Gain (dBi)	Path Loss (dB)	MIMO Factor (dB)	Groun ding Factor (dB)	Peak Avg. (P/A)
11a CH116 + BT(1Mbps) Ch00		4804	-33.45	-12.25	-21.2	-44.92	3.2	8.27	0	0	P
		4804	-58.18	-16.98	-41.2	-69.65	3.2	8.27	0	0	A
		11160	-63.22	-42.02	-21.2	-79.76	4.5	12.04	0	0	P
		16740	-56.16	-34.96	-21.2	-76.52	4.5	15.86	0	0	P
11a CH116 + BLE Ch00		4804	-42.98	-21.78	-21.2	-50.54	3.2	4.36	0	0	P
		4804	-46.5	-5.3	-41.2	-54.06	3.2	4.36	0	0	A
		11160	-68.55	-47.35	-21.2	-80.4	4.5	7.35	0	0	P
		16740	-65.07	-43.87	-21.2	-80.08	4.5	10.51	0	0	P
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										

Co-existence
Emission below 1GHz (LF @ Conducted)

	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Factor	Avg.
1		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
11a CH116 + BT(1Mbps) Ch00		32.16	-80.25	-25.05	-55.2	-93.29	4.5	3.84	0	4.7	P
		187.68	-80.21	-28.51	-51.7	-93.89	4.5	4.48	0	4.7	P
		295.95	-79.93	-30.73	-49.2	-93.7	4.5	4.57	0	4.7	P
		513.5	-78.51	-29.31	-49.2	-92.67	4.5	4.96	0	4.7	P
		800.5	-59.56	-10.36	-49.2	-74.04	4.5	5.28	0	4.7	P
		990.9	-78.42	-37.22	-41.2	-93.2	4.5	5.58	0	4.7	P
11a CH116 + BLE Ch00		42.42	-84.37	-29.17	-55.2	-93.91	4.5	0.34	0	4.7	P
		158.79	-83.94	-32.24	-51.7	-93.87	4.5	0.73	0	4.7	P
		226.29	-83.98	-34.78	-49.2	-94.02	4.5	0.84	0	4.7	P
		395.9	-83.41	-34.21	-49.2	-93.64	4.5	1.03	0	4.7	P
		800.5	-68.2	-19	-49.2	-78.97	4.5	1.57	0	4.7	P
		874	-81.26	-32.06	-49.2	-92.09	4.5	1.63	0	4.7	P
Remark	1. No other spurious found.										
	2. All results are PASS against Peak and Average limit line.										



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Groun ding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Factor	Avg.
1		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
802.11b		2386.545	-39.03	-17.83	-21.2	-44.06	2	3.03	0	0	P
CH 01											
2412MHz		2386.125	-48.1	-6.9	-41.2	-53.13	2	3.03	0	0	A

1. Level(dBm) =

Antenna Gain(dBi) + Path Loss(dB) + Read Level(dBm) + MIMO Factor(dB) + Grounding Factor(dB)

2. Over Limit(dB) = Level(dBm) – Limit Line(dBm)

For Peak Limit @ 2386.545MHz:

1. Level(dBm)

= Antenna Gain(dBi) + Path Loss(dB) + Read Level(dBm) + MIMO Factor(dB) + Grounding Factor(dB)

= 2(dB) + 3.03(dB) – 44.06(dBm)

= -39.03(dBm)

2. Over Limit(dB)

= Level(dBm) – Limit Line(dBm)

= -39.03(dBm) + 21.2(dBm)

= -17.83(dB)

For Average Limit @ 2386.125MHz:

1. Level(dBm)

= Antenna Gain(dBi) + Path Loss(dB) + Read Level(dBm) + MIMO Factor(dB) + Grounding Factor(dB)

= 2(dBi) + 3.03(dB) – 53.13(dBm)

= -48.1(dBm)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -6.9(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.





Appendix B. Conducted Spurious Emission Plots

Test Engineer :	Rebecca Li	Temperature :	21~23°C
		Relative Humidity :	47~49%

Co-existence


Emission above 1GHz

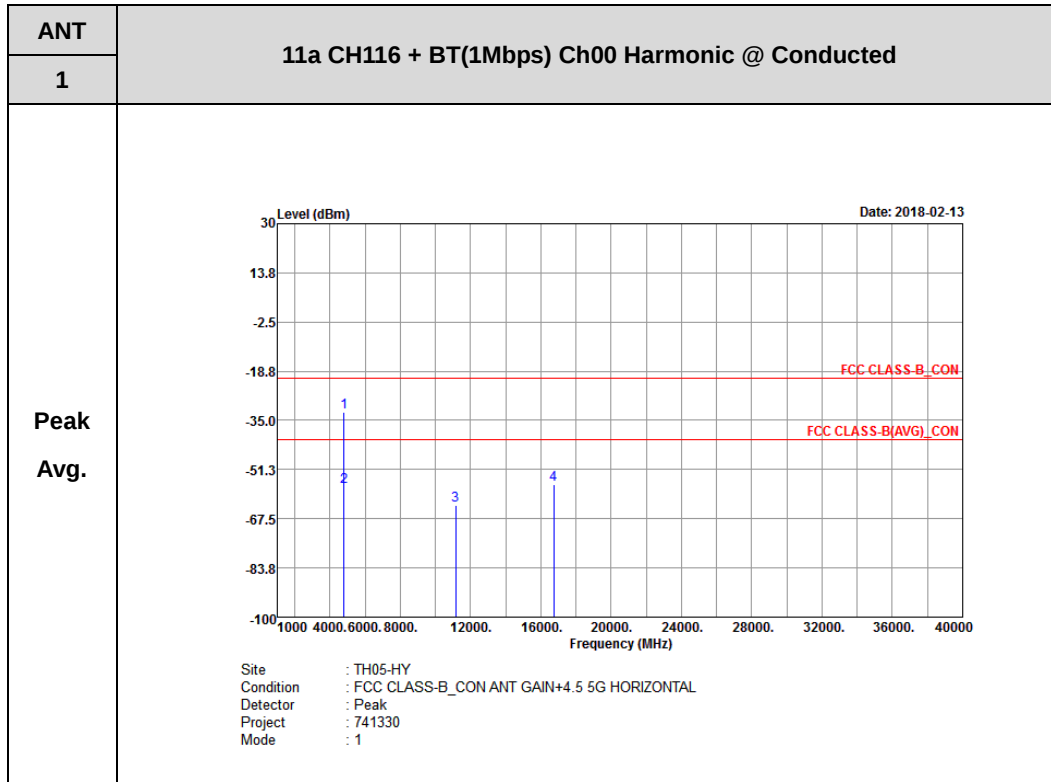


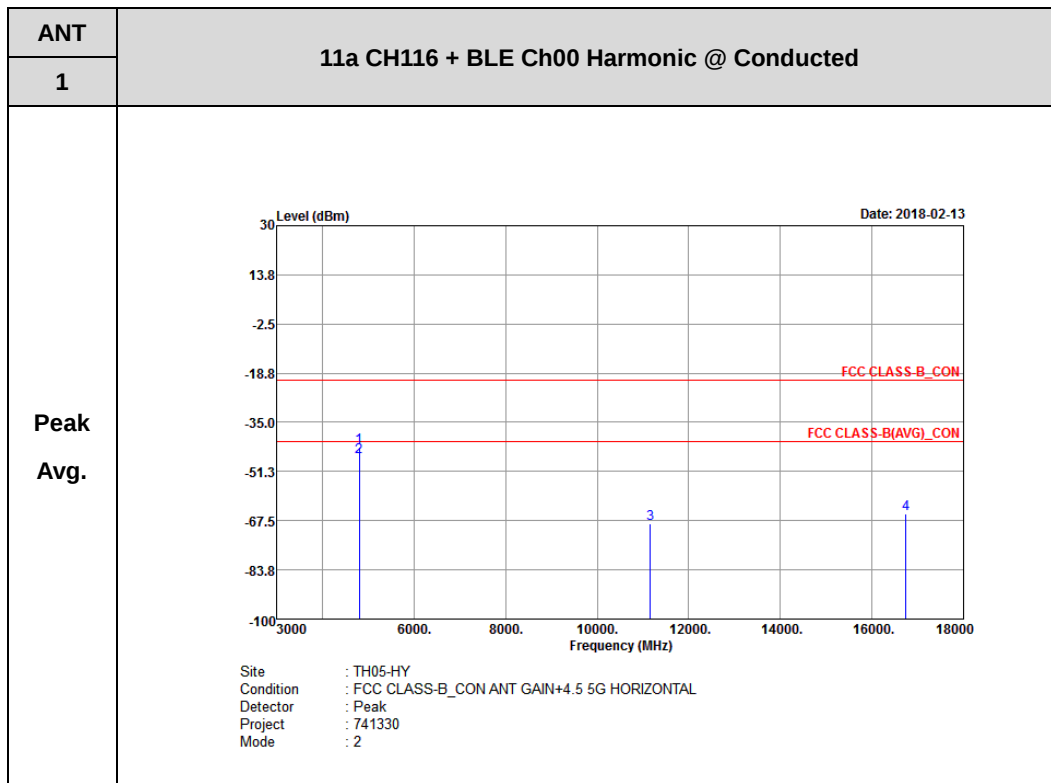

Co-existence

Emission below 1GHz

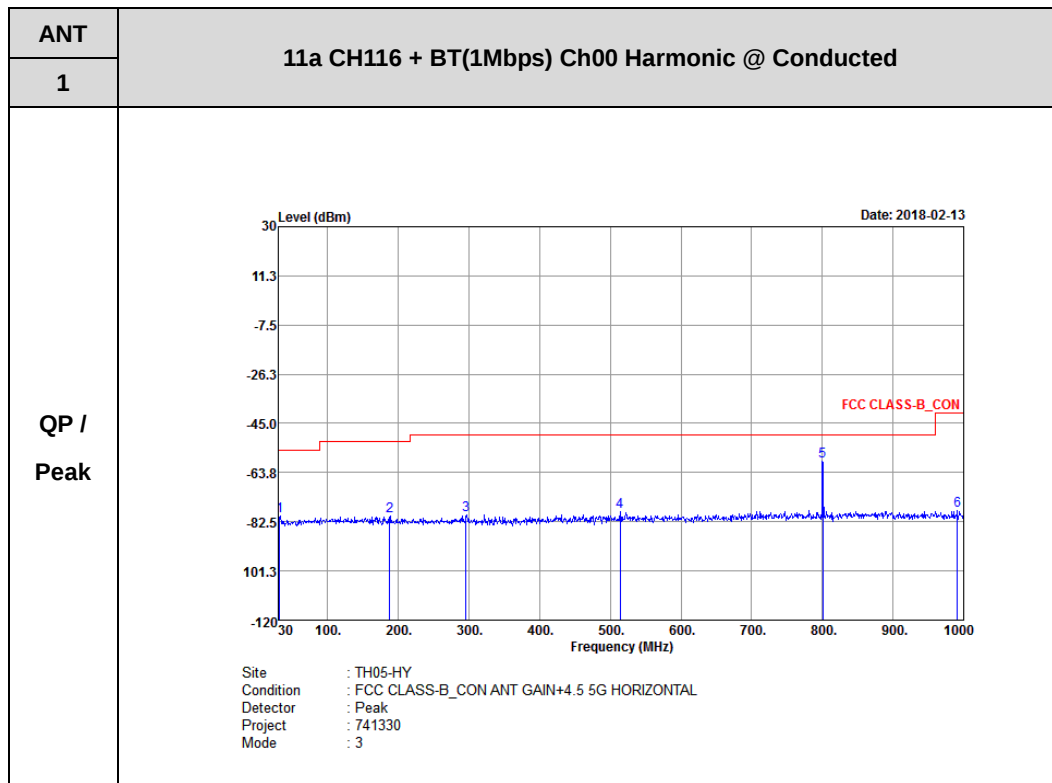

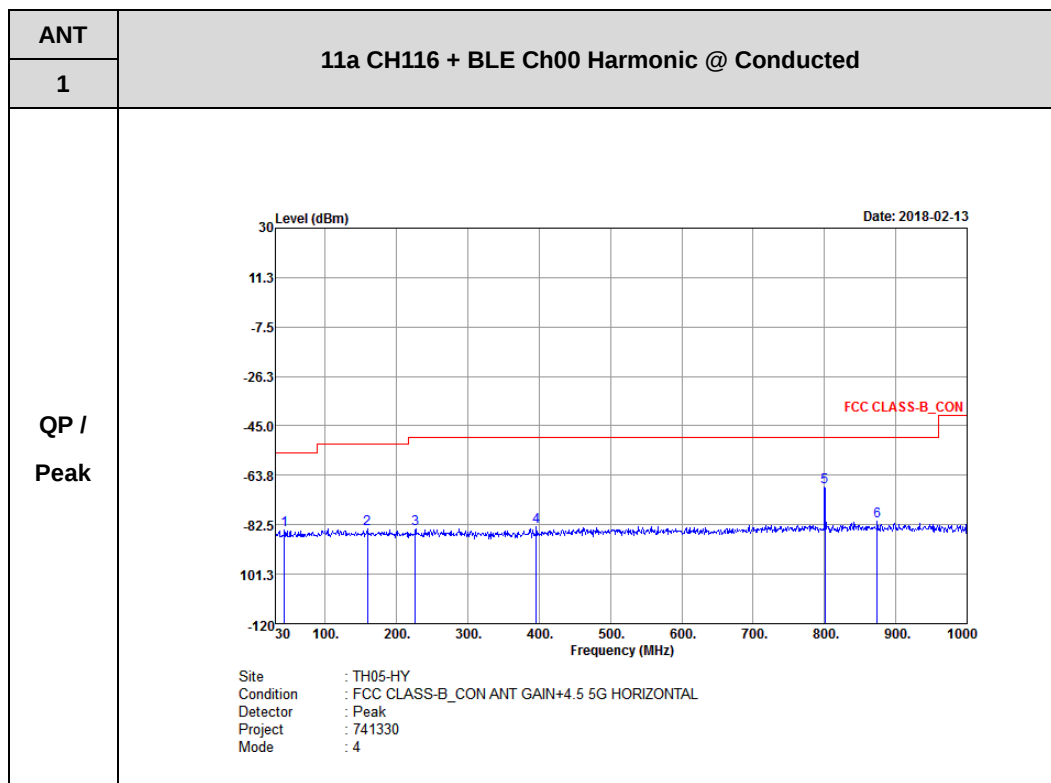



Appendix C. Radiated Spurious Emission

Test Engineer :	Stan Hsieh	Temperature :	21~23°C
		Relative Humidity :	47~49%



Co-existence

Emission above 1GHz (Harmonic @ 3m)

	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
11a CH116 + BT(1Mbps) Ch00		4804	54.06	-19.94	74	43.03	34.24	11.96	35.17	100	0	P	H
		4804	29.33	-24.67	54	18.3	34.24	11.96	35.17	100	0	A	H
		11160	45.53	-28.47	74	46.49	38.07	18.58	58.17	100	0	P	H
		16740	47.84	-26.16	74	38.51	41.94	23.07	55.96	100	0	P	H
													H
													H
		4804	54.05	-19.95	74	43.02	34.24	11.96	35.17	100	0	P	V
		4804	29.32	-24.68	54	18.29	34.24	11.96	35.17	100	0	A	V
		11160	46.68	-27.32	74	47.64	38.07	18.58	58.17	100	0	P	V
		16740	48	-26	74	38.67	41.94	23.07	55.96	100	0	P	V
													V
													V
11a CH116 + BLE Ch00		4804	50.83	-23.17	74	39.8	34.24	11.96	35.17	100	0	P	H
		11160	45.23	-28.77	74	46.19	38.07	18.58	58.17	100	0	P	H
		16740	47.72	-26.28	74	38.39	41.94	23.07	55.96	100	0	P	H
													H
													H
													H
		4804	50.58	-23.42	74	39.55	34.24	11.96	35.17	100	0	P	V
		11160	45.41	-28.59	74	46.37	38.07	18.58	58.17	100	0	P	V
		16740	48.37	-25.63	74	39.04	41.94	23.07	55.96	100	0	P	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Co-existence

Emission below 1GHz (LF @ 3m)

	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
11a CH116 + BT(1Mbps) Ch00		30	32.62	-7.38	40	37.66	24.6	1.71	31.35	100	0	P	H
		72.12	32.36	-7.64	40	49.21	12.5	2.11	31.59	-	-	P	H
		210.09	35.71	-7.79	43.5	49.24	15.12	2.72	31.44	-	-	P	H
		419.7	36.62	-9.38	46	41.09	22.57	3.82	31.1	-	-	P	H
		477.8	34.28	-11.72	46	37.57	23.49	4.07	31.01	-	-	P	H
		956.6	34.54	-11.46	46	28.64	30.69	5.4	30.51	-	-	P	H
													H
													H
													H
													H
													H
													H
		42.96	29.67	-10.33	40	41.68	17.76	1.71	31.52	-	-	P	V
		72.12	34.08	-5.92	40	50.93	12.5	2.11	31.59	100	0	P	V
		170.13	32.31	-11.19	43.5	45.4	15.57	2.62	31.48	-	-	P	V
		477.1	37.74	-8.26	46	41.05	23.47	4.07	31.01	-	-	P	V
		665.4	34.35	-11.65	46	33.96	26.2	4.75	30.73	-	-	P	V
		956.6	34.74	-11.26	46	28.84	30.69	5.4	30.51	-	-	P	V
													V
													V
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
11a CH116 + BLE Ch00		30.27	32.56	-7.44	40	37.6	24.6	1.71	31.35	-	-	P	H	
		42.96	31.31	-8.69	40	43.32	17.76	1.71	31.52	-	-	P	H	
		72.12	33.36	-6.64	40	50.21	12.5	2.11	31.59	100	0	P	H	
		419.7	37.62	-8.38	46	42.09	22.57	3.82	31.1	-	-	P	H	
		807.5	33.65	-12.35	46	31.14	27.89	4.98	30.58	-	-	P	H	
		959.4	35.24	-10.76	46	29.18	30.85	5.4	30.51	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
		30	28.98	-11.02	40	34.02	24.6	1.71	31.35	-	-	P	V	
		42.96	30.15	-9.85	40	42.16	17.76	1.71	31.52	-	-	P	V	
		72.12	33.3	-6.7	40	50.15	12.5	2.11	31.59	100	0	P	V	
		478.5	36.79	-9.21	46	40.08	23.49	4.07	31.01	-	-	P	V	
		666.1	34.32	-11.68	46	33.93	26.2	4.75	30.73	-	-	P	V	
		946.1	34.98	-11.02	46	29.65	30.13	5.4	30.52	-	-	P	V	
														V
														V
														V
														V
														V
													V	
Remark	3. No other spurious found.													
	4. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)



Both peak and average measured complies with the limit line, so test result is “PASS”.





Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Stan Hsieh	Temperature :	21~23°C
		Relative Humidity :	47~49%



Co-existence
Emission above 1GHz

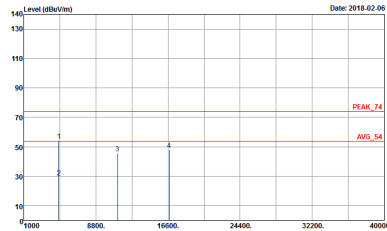
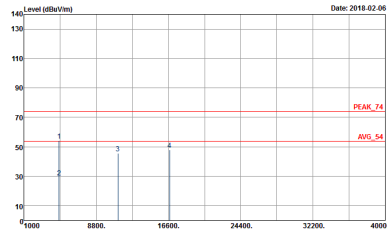
ANT	11a CH116 + BT(1Mbps) Ch00 Harmonic @ 3m	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HV Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 741330 Mode : 1	 Site : 03CH07-HV Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 741330 Mode : 1

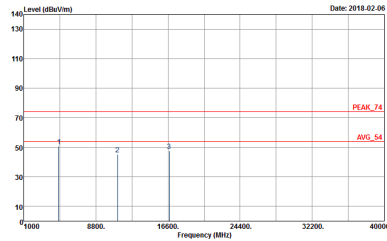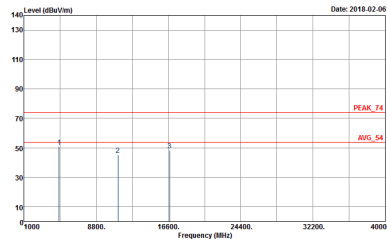



ANT	11a CH116 + BLE Ch00 Harmonic @ 3m	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HV Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 741330 Mode : 2	 Site : 03CH07-HV Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 741330 Mode : 2

Co-existence
Emission below 1GHz

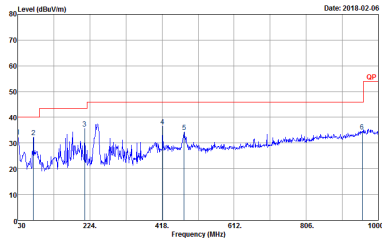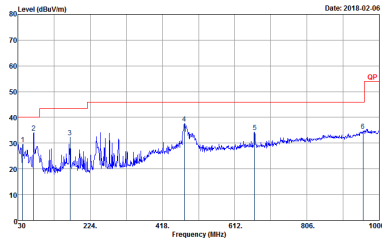ANT	11a CH116 + BT(1Mbps) Ch00 Harmonic @ 3m	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 741330 Mode : 3	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 741330 Mode : 3

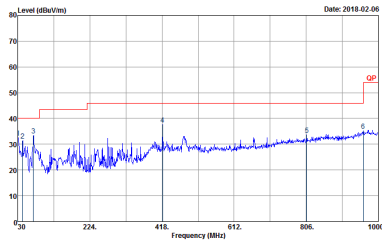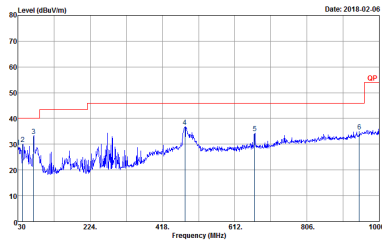ANT	11a CH116 + BLE Ch00 Harmonic @ 3m	
1	Horizontal	Vertical
QP / Peak	 Site : 03O407-HV Condition : QP 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 741330 Mode : 4	 Site : 03O407-HV Condition : QP 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 741330 Mode : 4

Appendix E. Duty Cycle Plots

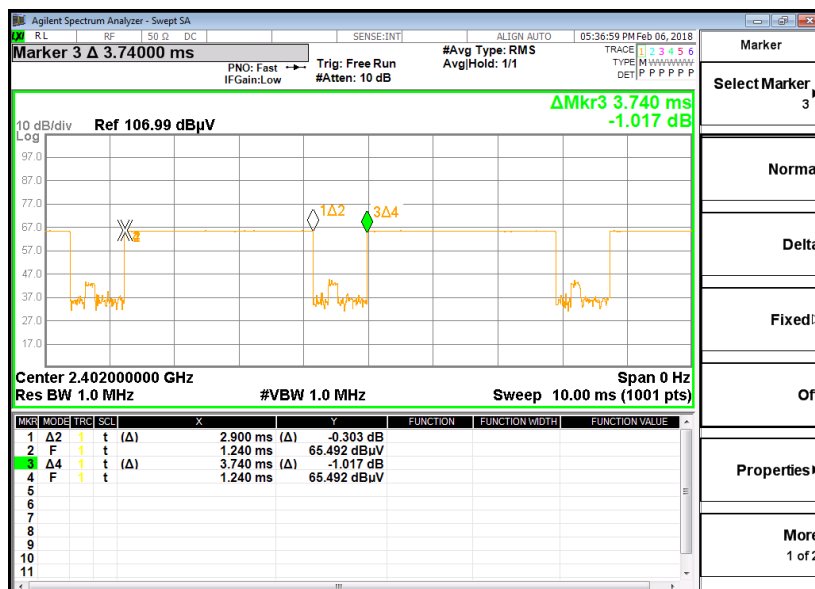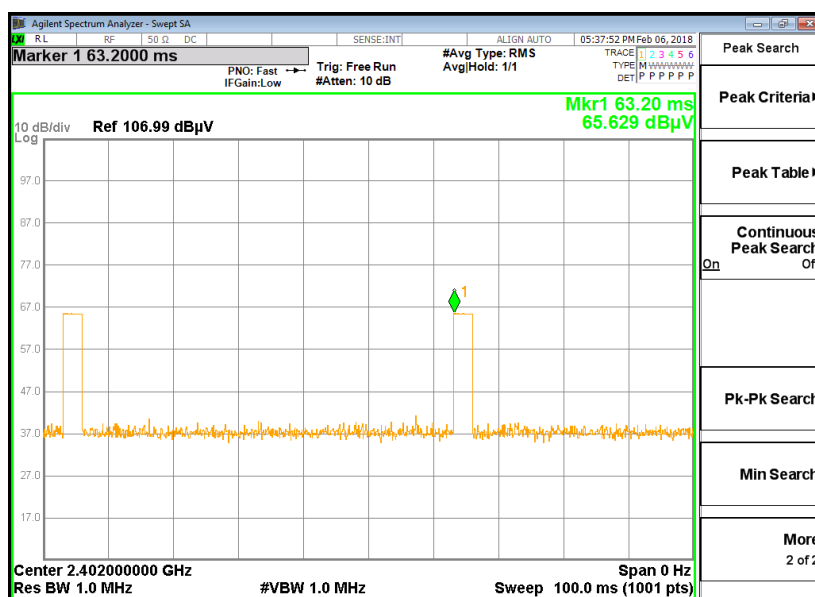DH5 on time (One Pulse) Plot on Channel 00

on time (Count Pulses) Plot on Channel 00

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.9 / 100 = 5.8 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.73 \text{ dB}$
3. **DH5** has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.9 \text{ ms} \times 20 \text{ channels} = 58 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.9 \text{ ms} \times 2 = 5.8 \text{ ms}$$


Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.8 \text{ ms}/100\text{ms}) = -24.73 \text{ dB}$$


Appendix F. Setup Photographs

<Radiated Emission>

LF

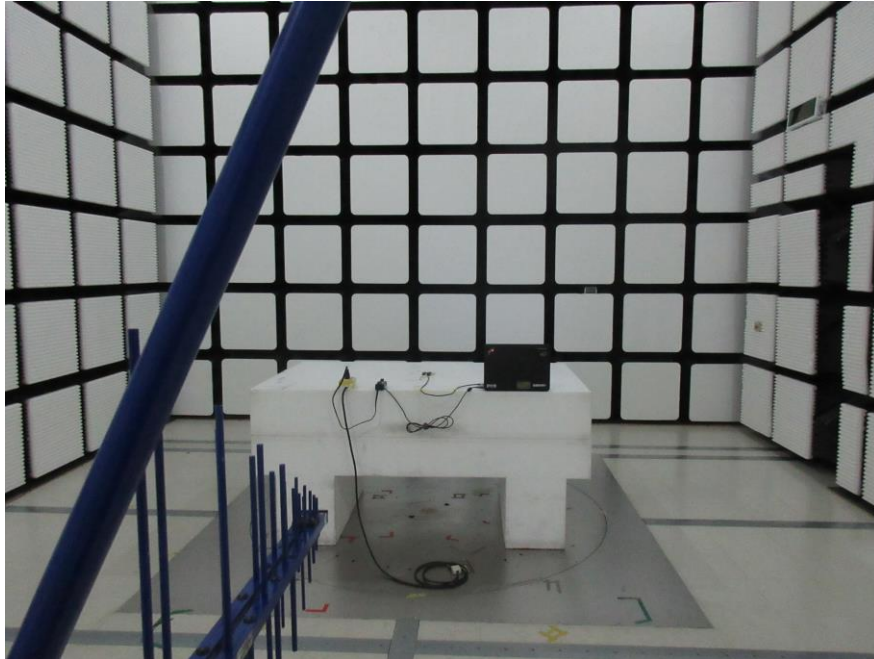

HF

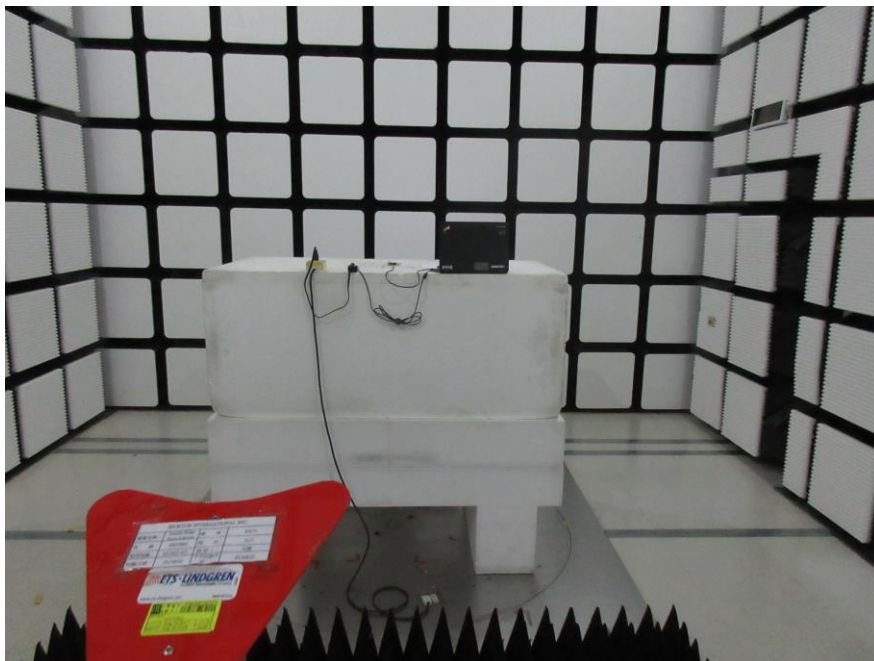



Appendix G. Original Report

Please refer to Sporton report number FR4O0971D as below.



FCC RF Test Report

APPLICANT : Texas Instruments Incorporated
EQUIPMENT : WiFi and Bluetooth Module
BRAND NAME : Texas Instruments
MODEL NAME : WL18MODGI
FCC ID : Z64-WL18DBMOD
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Oct. 09, 2014 and testing was completed on Dec. 16, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	9
2.2 Pre-Scanned RF Power	10
2.3 Test Mode	13
2.4 Connection Diagram of Test System	15
2.5 Support Unit used in test configuration and system	16
2.6 EUT Operation Test Setup	16
2.7 Measurement Results Explanation Example	16
3 TEST RESULT	17
3.1 26dB & 99% Bandwidth Measurement	17
3.2 Maximum Conducted Output Power Measurement	19
3.3 Power Spectral Density Measurement	21
3.4 Unwanted Emissions Measurement	24
3.5 AC Conducted Emission Measurement	58
3.6 Frequency Stability Measurement	62
3.7 Automatically Discontinue Transmission	63
3.8 Antenna Requirements	64
4 LIST OF MEASURING EQUIPMENT	65
5 UNCERTAINTY OF EVALUATION	66
APPENDIX A. TEST RESULT OF CONDUCTED TEST RESULTS	
APPENDIX B. TEST RESULT OF RADIATED TEST RESULTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4O0971D	Rev. 01	Initial issue of report	Dec. 19, 2014



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm (depend on band)	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm (depend on band)	Pass	-
3.4	15.407(b)	Unwanted Emissions	$\leq -17, -27$ dBm (depend on band)&15.209(a)	Pass	Under limit 0.78 dB at 5470 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.20 dB at 0.150 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Texas Instruments Incorporated

12500 TI Boulevard, M/S 8751, Dallas, TX 75243, USA

1.2 Manufacturer

Jorjin Technologies Inc

17F, No. 239, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	WiFi and Bluetooth Module
Brand Name	Texas Instruments
Model Name	WL18MODGI
FCC ID	Z64-WL18DBMOD
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 Bluetooth v4.0 EDR/LE
HW Version	WG7837-T0B
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5580 MHz 5660 MHz ~ 5700 MHz
Maximum Output Power	<Ant. 1> <5180 MHz ~ 5240 MHz> 802.11a : 15.58 dBm / 0.0361 W 802.11n HT20 : 15.71 dBm / 0.0372 W 802.11n HT40 : 16.60 dBm / 0.0457 W <5260 MHz ~ 5320 MHz> 802.11a : 13.20 dBm / 0.0209 W 802.11n HT20 : 13.27 dBm / 0.0212 W 802.11n HT40 : 16.86 dBm / 0.0485 W <5500 MHz ~ 5580 MHz and 5660 MHz ~ 5700 MHz > 802.11a : 17.50 dBm / 0.0562 W 802.11n HT20 : 17.24 dBm / 0.0530 W 802.11n HT40 : 15.78 dBm / 0.0378 W <Ant. 2> <5180 MHz ~ 5240 MHz> 802.11a : 15.82 dBm / 0.0382 W 802.11n HT20 : 15.54 dBm / 0.0358 W 802.11n HT40 : 16.98 dBm / 0.0499 W <5260 MHz ~ 5320 MHz> 802.11a : 13.48 dBm / 0.0223 W 802.11n HT20 : 13.87 dBm / 0.0244 W 802.11n HT40 : 17.20 dBm / 0.0525 W <5500 MHz ~ 5580 MHz and 5660 MHz ~ 5700 MHz > 802.11a : 18.44 dBm / 0.0698 W 802.11n HT20 : 17.52 dBm / 0.0565 W 802.11n HT40 : 16.74 dBm / 0.0472 W
99% Occupied Bandwidth	802.11a : 19.05 MHz 802.11n HT20 : 18.85 MHz 802.11n HT40 : 36.50 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

Antenna Information			
Antenna Type	Brand	2.4GHz~2.5GHz	4.9GHz~5.8GHz
PCB	Ethertronics	-0.6	4.5
Dipole	LSR	2	2
PCB	Laird	2	4
Chip	Pulse	3.2	4.2
PIFA	LSR	2	3
Chip	TDK	2.4	3.96



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH02-HY	CO05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.



2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38	5190	46	5230
	40	5200	48	5240

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54	5270	62	5310
	56	5280	64	5320

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5600 MHz and 5650-5725 MHz Band 3 (U-NII-2C)	100	5500	116	5580
	102	5510	132	5660
	104	5520	134	5670
	108	5540	136	5680
	110	5550	140	5700
	112	5560		

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

<Ant. 1>

5GHz 802.11a mode			
Data Rate (MHz)	6M bps		
Channel	36	44	48
Frequency (MHz)	5180	5220	5240
Average Power (dBm)	15.54	15.58	15.40
Channel	52	60	64
Frequency (MHz)	5260	5300	5320
Average Power (dBm)	13.20	12.94	12.98
Channel	100	116	140
Frequency (MHz)	5500	5580	5700
Average Power (dBm)	14.30	17.50	11.82

5GHz 802.11n HT20 mode			
Data Rate (MHz)	MCS0		
Channel	36	44	48
Frequency (MHz)	5180	5220	5240
Average Power (dBm)	15.71	15.35	15.28
Channel	52	60	64
Frequency (MHz)	5260	5300	5320
Average Power (dBm)	13.12	13.27	12.79
Channel	100	116	140
Frequency (MHz)	5500	5580	5700
Average Power (dBm)	14.06	17.24	11.76



5GHz 802.11n HT40 mode			
Data Rate (MHz)	MCS0		
Channel	38	46	
Frequency (MHz)	5190	5230	
Average Power (dBm)	11.48	16.60	
Channel	54	62	
Frequency (MHz)	5270	5310	
Average Power (dBm)	16.86	11.80	
Channel	102	110	134
Frequency (MHz)	5510	5550	5670
Average Power (dBm)	11.52	15.78	12.56

<Ant. 2>

5GHz 802.11a mode			
Data Rate (MHz)	6M bps		
Channel	36	44	48
Frequency (MHz)	5180	5220	5240
Average Power (dBm)	15.71	15.82	15.56
Channel	52	60	64
Frequency (MHz)	5260	5300	5320
Average Power (dBm)	13.30	13.48	13.28
Channel	100	116	140
Frequency (MHz)	5500	5580	5700
Average Power (dBm)	14.52	18.44	11.94



5GHz 802.11n HT20 mode			
Data Rate (MHz)	MCS0		
Channel	36	44	48
Frequency (MHz)	5180	5220	5240
Average Power (dBm)	15.54	15.53	15.48
Channel	52	60	64
Frequency (MHz)	5260	5300	5320
Average Power (dBm)	13.44	13.87	13.37
Channel	100	116	140
Frequency (MHz)	5500	5580	5700
Average Power (dBm)	14.93	17.52	12.19

5GHz 802.11n HT40 mode			
Data Rate (MHz)	MCS0		
Channel	38	46	
Frequency (MHz)	5190	5230	
Average Power (dBm)	11.76	16.98	
Channel	54	62	
Frequency (MHz)	5270	5310	
Average Power (dBm)	17.20	12.22	
Channel	102	110	134
Frequency (MHz)	5510	5550	5670
Average Power (dBm)	11.28	16.74	12.83

2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.

Test Cases				
Conducted TCs	Test Items	Mode	Data rate	Test Channel
	26dB and 99% BW Power Spectral Density	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0	L/M/H
		802.11n HT40	MCS0	L/M/H
	Output Power	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0	L/M/H
		802.11n HT40	MCS0	L/M/H
	Frequency Stability	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0	L/M/H
		802.11n HT40	MCS0	L/M/H
Radiated TCs	Radiated Band Edge	802.11a	6 Mbps	L/M/H
	Radiated Spurious Emission	802.11a	6 Mbps	L/M/H
AC Conducted Emission	Mode 1 : WLAN (5GHz) Link + Bluetooth Link + Adapter			




Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

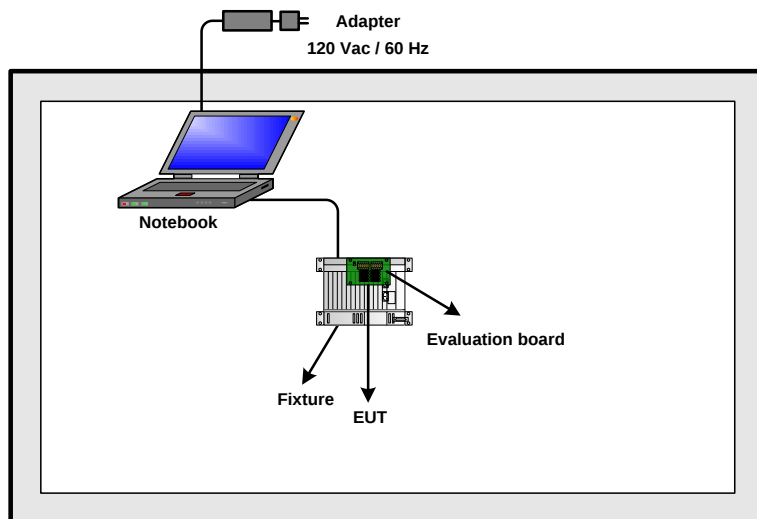

<AC Conducted Emission Mode>

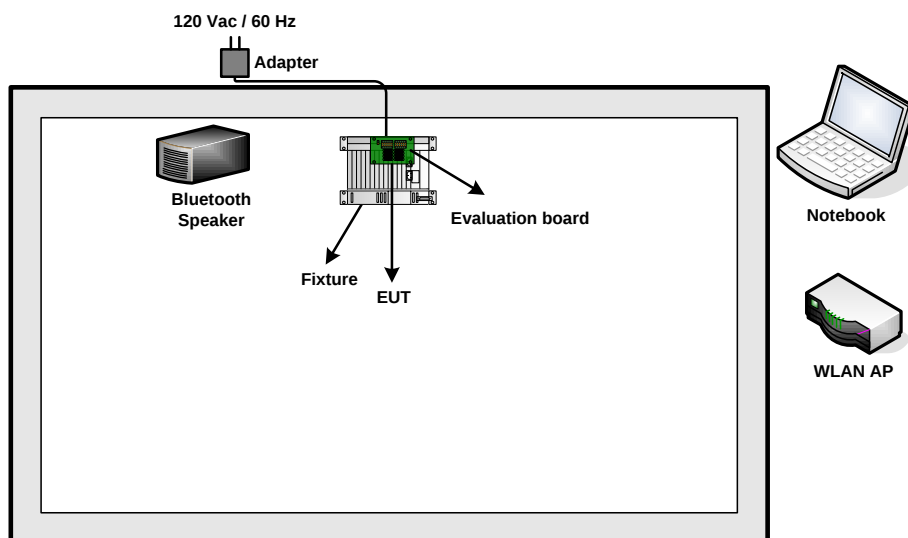

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Notebook	Lenovo	M490S	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Speaker	MI	MDZ-03-AC	N/A	N/A	N/A
5.	Fixture	N/A	N/A	N/A	N/A	N/A
6.	Evaluation board	N/A	WG1300BE00	N/A	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, programmed RF utility, "RTTT Tool" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 26dB & 99% Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.



3.1.4 Test Setup

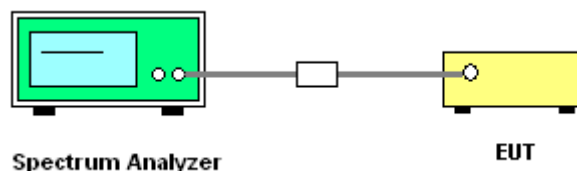



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

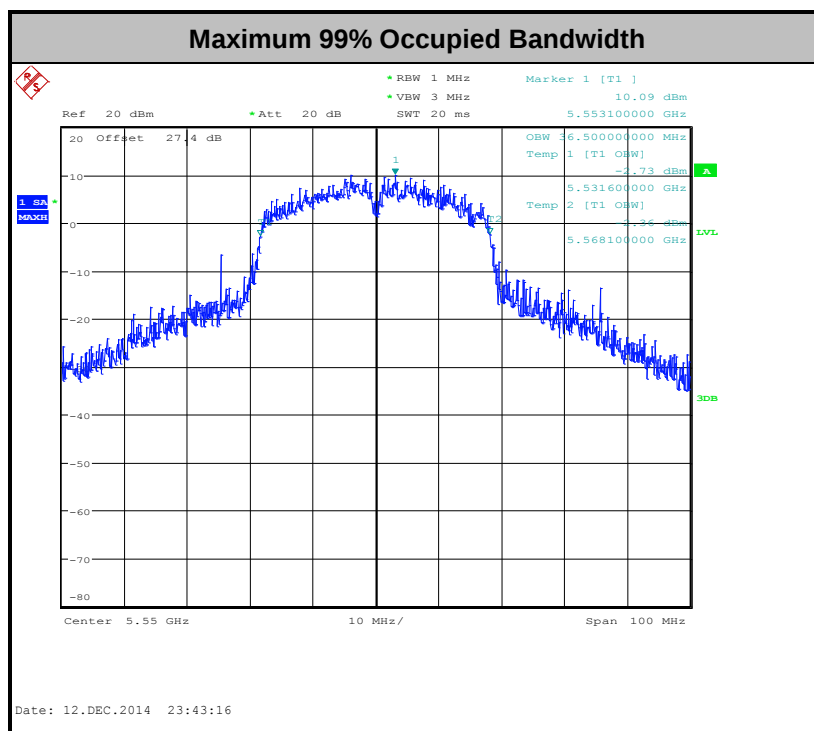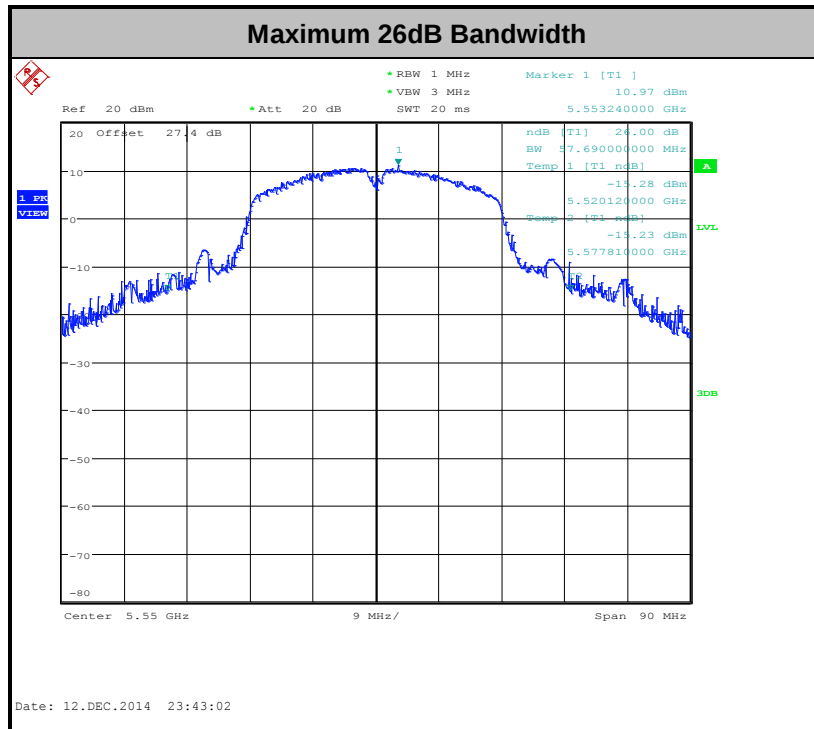



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

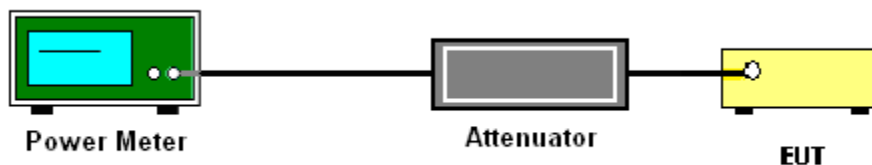

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


3.3.4 Test Setup

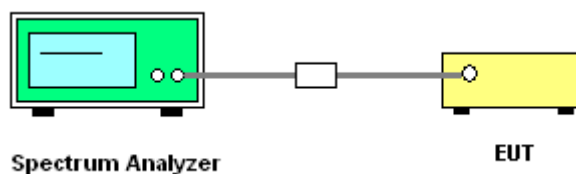



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

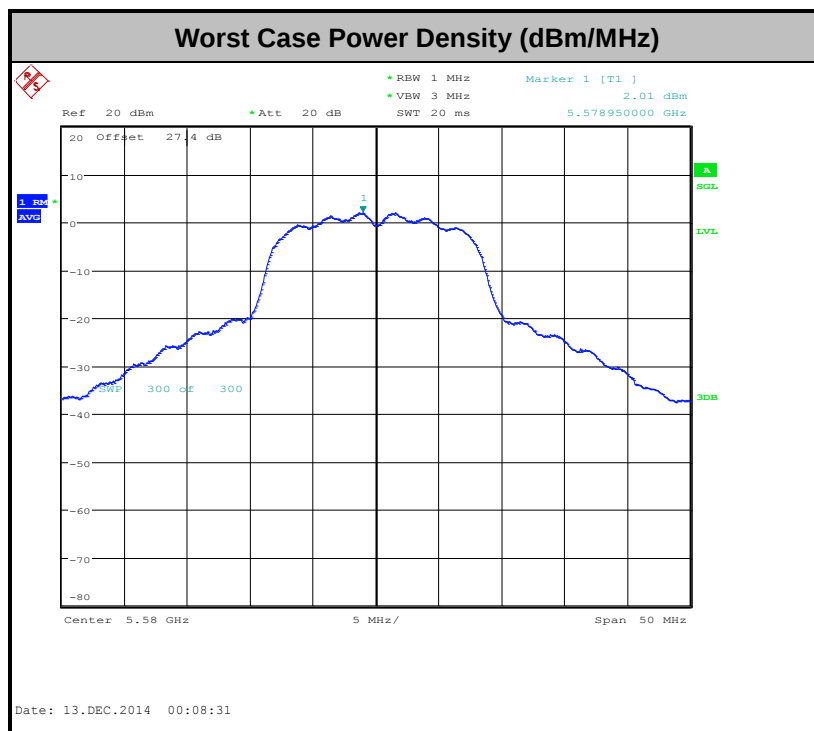

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11a	93.01	3413.46	0.29	300Hz
1	802.11an20	92.92	3157.05	0.32	1kHz
1	802.11an40	86.61	1554.49	0.64	1kHz
2	802.11a	93.42	3413.46	0.29	300Hz
2	802.11an20	93.4	3173.08	0.32	1kHz
2	802.11an40	86.1	1538.46	0.65	1kHz


2. The EUT was placed on a rotatable table top 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For Conducted Measurement Setup:

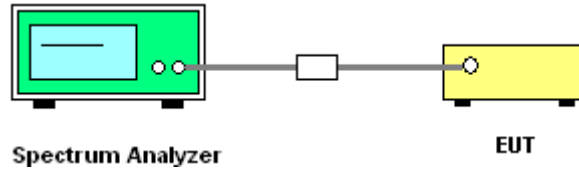


For radiated emissions below 30MHz

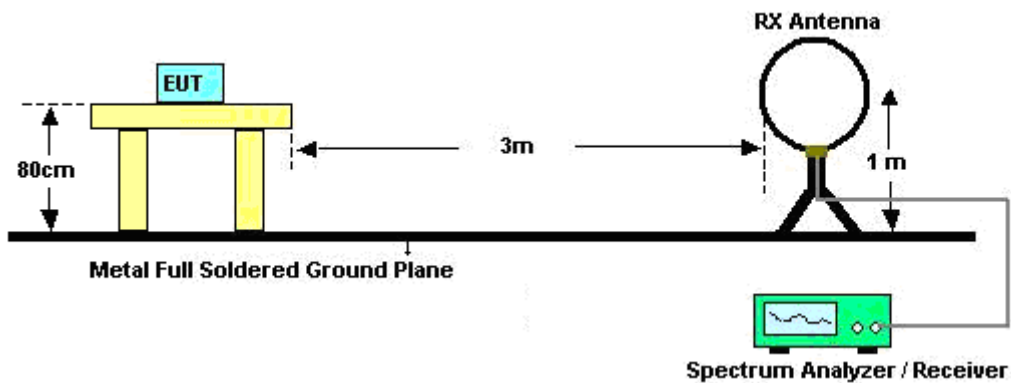

For radiated emissions from 30MHz to 1GHz

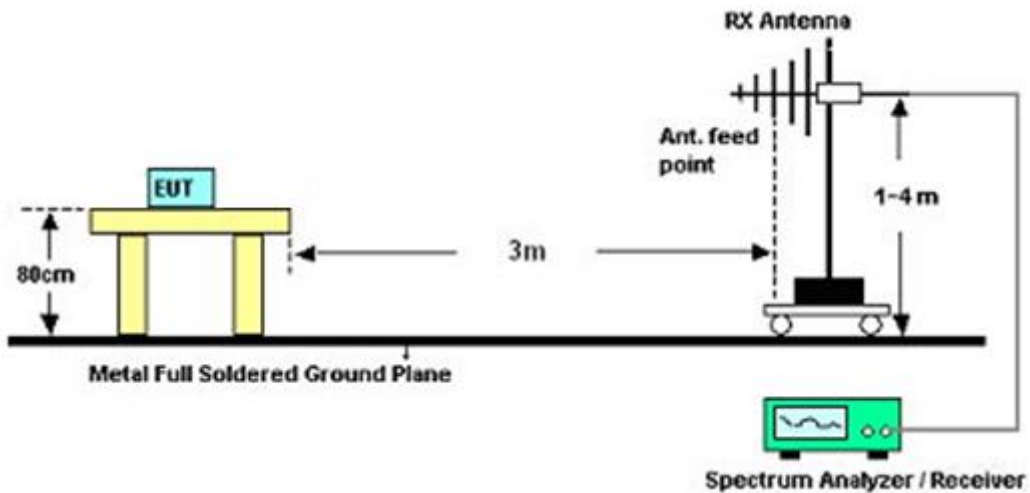

For radiated emissions above 1GHz

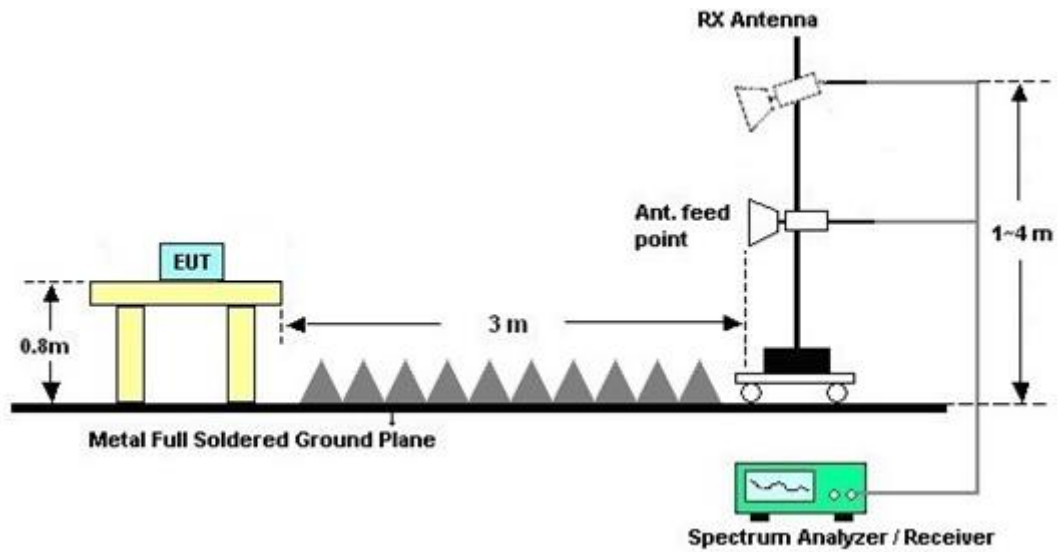

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.4.6 Test Result of Conducted Spurious at Band Edges in the Restricted Band



15E 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11a CH 36 5180MHz		5150	-22.86	-1.66	-21.2	-29.86	4.5	2.5	0	P
		5147.3	-43.02	-1.82	-41.2	-50.02	4.5	2.5	0	A
	*	5181	11.75	-	-	4.75	4.5	2.5	0	P
	*	5181	1.31	-	-	-5.69	4.5	2.5	0	A
802.11a CH 44 5220MHz		5115.2	-40.16	-18.96	-21.2	-47.16	4.5	2.5	0	P
		5117	-50.4	-9.2	-41.2	-57.4	4.5	2.5	0	A
	*	5219	16.2	-	-	9.2	4.5	2.5	0	P
	*	5219	7.74	-	-	0.74	4.5	2.5	0	A
		5367.6	-47.19	-25.99	-21.2	-54.19	4.5	2.5	0	P
		5426.67	-58.07	-16.87	-41.2	-65.07	4.5	2.5	0	A
802.11a CH 48 5240MHz		5135	-41.39	-20.19	-21.2	-48.39	4.5	2.5	0	P
		5135.3	-50.69	-9.49	-41.2	-57.69	4.5	2.5	0	A
	*	5239	16.5	-	-	9.5	4.5	2.5	0	P
	*	5239	7.4	-	-	0.4	4.5	2.5	0	A
2										
802.11a CH 36 5180MHz		5150	-30.54	-9.34	-21.2	-37.54	4.5	2.5	0	P
		5148.2	-48.68	-7.48	-41.2	-55.68	4.5	2.5	0	A
	*	5178	16.18	-	-	9.18	4.5	2.5	0	P
	*	5178	7.44	-	-	0.44	4.5	2.5	0	A
802.11a CH 44 5220MHz		5114.9	-41.27	-20.07	-21.2	-48.27	4.5	2.5	0	P
		5114.9	-51.08	-9.88	-41.2	-58.08	4.5	2.5	0	A
	*	5222	15.99	-	-	8.99	4.5	2.5	0	P
	*	5222	7.87	-	-	0.87	4.5	2.5	0	A
		5425.46	-46.6	-25.4	-21.2	-53.6	4.5	2.5	0	P
		5426.67	-58.48	-17.28	-41.2	-65.48	4.5	2.5	0	A
802.11a CH 48 5240MHz		5134.85	-40.72	-19.52	-21.2	-47.72	4.5	2.5	0	P
		5134.4	-50.49	-9.29	-41.2	-57.49	4.5	2.5	0	A
	*	5241	16.46	-	-	9.46	4.5	2.5	0	P
	*	5241	7.62	-	-	0.62	4.5	2.5	0	A



15E 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n		5143.55	-26.36	-5.16	-21.2	-33.36	4.5	2.5	0	P
HT20		5150	-48.08	-6.88	-41.2	-55.08	4.5	2.5	0	A
CH 36	*	5181	16.16	-	-	9.16	4.5	2.5	0	P
5180MHz	*	5181	7.16	-	-	0.16	4.5	2.5	0	A
802.11n		5147.9	-39.59	-18.39	-21.2	-46.59	4.5	2.5	0	P
HT20		5116.85	-50.58	-9.38	-41.2	-57.58	4.5	2.5	0	A
CH 44	*	5221	15.81	-	-	8.81	4.5	2.5	0	P
5220MHz	*	5221	7.35	-	-	0.35	4.5	2.5	0	A
802.11n		5134.4	-40.46	-19.26	-21.2	-47.46	4.5	2.5	0	P
HT20		5136.95	-50.71	-9.51	-41.2	-57.71	4.5	2.5	0	A
CH 48	*	5241	16.5	-	-	9.5	4.5	2.5	0	P
5240MHz	*	5241	7.44	-	-	0.44	4.5	2.5	0	A
2										
802.11n		5147.45	-30.13	-8.93	-21.2	-37.13	4.5	2.5	0	P
HT20		5149.55	-48.75	-7.55	-41.2	-55.75	4.5	2.5	0	A
CH 36	*	5178	16.22	-	-	9.22	4.5	2.5	0	P
5180MHz	*	5178	7.58	-	-	0.58	4.5	2.5	0	A
802.11n		5112.95	-39.83	-18.63	-21.2	-46.83	4.5	2.5	0	P
HT20		5114.75	-50.85	-9.65	-41.2	-57.85	4.5	2.5	0	A
CH 44	*	5218	15.39	-	-	8.39	4.5	2.5	0	P
5220MHz	*	5218	7.71	-	-	0.71	4.5	2.5	0	A
802.11n		5379.37	-46.82	-25.62	-21.2	-53.82	4.5	2.5	0	P
HT20		5431.07	-57.97	-16.77	-41.2	-64.97	4.5	2.5	0	A
CH 48	*	5242	16.74	-	-	9.74	4.5	2.5	0	P
5240MHz	*	5242	7.82	-	-	0.82	4.5	2.5	0	A



15E 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT40 CH 38 5190MHz		5149.7	-32.02	-10.82	-21.2	-39.02	4.5	2.5	0	P
		5149.85	-48.54	-7.34	-41.2	-55.54	4.5	2.5	0	A
	*	5193	7.77	-	-	0.77	4.5	2.5	0	P
	*	5193	-0.82	-	-	-7.82	4.5	2.5	0	A
		5400.05	-48.6	-27.4	-21.2	-55.6	4.5	2.5	0	P
		5395.65	-60.13	-18.93	-41.2	-67.13	4.5	2.5	0	A
802.11n HT40 CH 46 5230MHz		5136.8	-31.73	-10.53	-21.2	-38.73	4.5	2.5	0	P
		5137.4	-50.33	-9.13	-41.2	-57.33	4.5	2.5	0	A
	*	5232	14.33	-	-	7.33	4.5	2.5	0	P
	*	5232	5.35	-	-	-1.65	4.5	2.5	0	A
		5352.53	-43.77	-22.57	-21.2	-50.77	4.5	2.5	0	P
		5350.11	-55.65	-14.45	-41.2	-62.65	4.5	2.5	0	A
2										
802.11n HT40 CH 38 5190MHz		5149.1	-34.44	-13.24	-21.2	-41.44	4.5	2.5	0	P
		5149.55	-47.7	-6.5	-41.2	-54.7	4.5	2.5	0	A
	*	5191	8.14	-	-	1.14	4.5	2.5	0	P
	*	5191	-0.32	-	-	-7.32	4.5	2.5	0	A
		5353.08	-48.72	-27.52	-21.2	-55.72	4.5	2.5	0	P
		5396.75	-59.64	-18.44	-41.2	-66.64	4.5	2.5	0	A
802.11n HT40 CH 46 5230MHz		5136.8	-33.07	-11.87	-21.2	-40.07	4.5	2.5	0	P
		5137.4	-50.8	-9.6	-41.2	-57.8	4.5	2.5	0	A
	*	5232	14.63	-	-	7.63	4.5	2.5	0	P
	*	5232	5.68	-	-	-1.32	4.5	2.5	0	A
		5354.07	-41.9	-20.7	-21.2	-48.9	4.5	2.5	0	P
		5350	-55.13	-13.93	-41.2	-62.13	4.5	2.5	0	A



15E 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11a CH 52 5260MHz	*	5261	12.79	-	-	5.79	4.5	2.5	0	P
	*	5261	4.31	-	-	-2.69	4.5	2.5	0	A
		5367.16	-40.55	-19.35	-21.2	-47.55	4.5	2.5	0	P
		5364.85	-51.46	-10.26	-41.2	-58.46	4.5	2.5	0	A
802.11a CH 60 5300MHz		5029.1	-45.84	-24.64	-21.2	-52.84	4.5	2.5	0	P
		5028.05	-56.18	-14.98	-41.2	-63.18	4.5	2.5	0	A
	*	5302	13.13	-	-	6.13	4.5	2.5	0	P
	*	5302	4.51	-	-	-2.49	4.5	2.5	0	A
		5405.11	-42.31	-21.11	-21.2	-49.31	4.5	2.5	0	P
		5405.99	-52.71	-11.51	-41.2	-59.71	4.5	2.5	0	A
802.11a CH 64 5320MHz	*	5322	13.27	-	-	6.27	4.5	2.5	0	P
	*	5322	4.81	-	-	-2.19	4.5	2.5	0	A
		5354.07	-38.38	-17.18	-21.2	-45.38	4.5	2.5	0	P
		5350.99	-50.78	-9.58	-41.2	-57.78	4.5	2.5	0	A
2										
802.11a CH 52 5260MHz	*	5262	13.78	-	-	6.78	4.5	2.5	0	P
	*	5262	4.91	-	-	-2.09	4.5	2.5	0	A
		5363.31	-40.8	-19.6	-21.2	-47.8	4.5	2.5	0	P
		5366.06	-50.79	-9.59	-41.2	-57.79	4.5	2.5	0	A
802.11a CH 60 5300MHz		5028.5	-45.21	-24.01	-21.2	-52.21	4.5	2.5	0	P
		5029.4	-56.38	-15.18	-41.2	-63.38	4.5	2.5	0	A
	*	5298	14.32	-	-	7.32	4.5	2.5	0	P
	*	5298	5	-	-	-2	4.5	2.5	0	A
		5406.1	-41.62	-20.42	-21.2	-48.62	4.5	2.5	0	P
		5405.44	-51.65	-10.45	-41.2	-58.65	4.5	2.5	0	A
802.11a CH 64 5320MHz	*	5319	13.74	-	-	6.74	4.5	2.5	0	P
	*	5319	5.21	-	-	-1.79	4.5	2.5	0	A
		5352.09	-37.08	-15.88	-21.2	-44.08	4.5	2.5	0	P
		5424.69	-51.35	-10.15	-41.2	-58.35	4.5	2.5	0	A



15E 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT20 CH 52 5260MHz	*	5260	12.64	-	-	5.64	4.5	2.5	0	P
	*	5260	4.3	-	-	-2.7	4.5	2.5	0	A
		5365.84	-41.27	-20.07	-21.2	-48.27	4.5	2.5	0	P
		5365.62	-51.45	-10.25	-41.2	-58.45	4.5	2.5	0	A
802.11n HT20 CH 60 5300MHz		5029.55	-46.21	-25.01	-21.2	-53.21	4.5	2.5	0	P
		5027.75	-56.31	-15.11	-41.2	-63.31	4.5	2.5	0	A
	*	5301	12.7	-	-	5.7	4.5	2.5	0	P
	*	5301	4.61	-	-	-2.39	4.5	2.5	0	A
		5400.71	-41.54	-20.34	-21.2	-48.54	4.5	2.5	0	P
		5403.13	-52.6	-11.4	-41.2	-59.6	4.5	2.5	0	A
802.11n HT20 CH 64 5320MHz	*	5318	12.92	-	-	5.92	4.5	2.5	0	P
	*	5318	4.5	-	-	-2.5	4.5	2.5	0	A
		5354.51	-38.1	-16.9	-21.2	-45.1	4.5	2.5	0	P
		5427.22	-51.76	-10.56	-41.2	-58.76	4.5	2.5	0	A
2										
802.11n HT20 CH 52 5260MHz	*	5258	13.95	-	-	6.95	4.5	2.5	0	P
	*	5258	4.87	-	-	-2.13	4.5	2.5	0	A
		5364.96	-40.57	-19.37	-21.2	-47.57	4.5	2.5	0	P
		5363.2	-51.21	-10.01	-41.2	-58.21	4.5	2.5	0	A
802.11n HT20 CH 60 5300MHz		5030	-45.97	-24.77	-21.2	-52.97	4.5	2.5	0	P
		5027.15	-55.98	-14.78	-41.2	-62.98	4.5	2.5	0	A
	*	5298	13.53	-	-	6.53	4.5	2.5	0	P
	*	5298	5.02	-	-	-1.98	4.5	2.5	0	A
		5355.28	-40.18	-18.98	-21.2	-47.18	4.5	2.5	0	P
		5405.44	-52	-10.8	-41.2	-59	4.5	2.5	0	A
802.11n HT20 CH 64 5320MHz	*	5322	13.41	-	-	6.41	4.5	2.5	0	P
	*	5322	4.96	-	-	-2.04	4.5	2.5	0	A
		5352.31	-34.37	-13.17	-21.2	-41.37	4.5	2.5	0	P
		5425.57	-51.28	-10.08	-41.2	-58.28	4.5	2.5	0	A



15E 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT40 CH 54 5270MHz		5146.4	-43.55	-22.35	-21.2	-50.55	4.5	2.5	0	P
		5150	-55.16	-13.96	-41.2	-62.16	4.5	2.5	0	A
	*	5268	14.02	-	-	7.02	4.5	2.5	0	P
	*	5268	5.29	-	-	-1.71	4.5	2.5	0	A
		5350.66	-33.26	-12.06	-21.2	-40.26	4.5	2.5	0	P
		5365.29	-50.67	-9.47	-41.2	-57.67	4.5	2.5	0	A
802.11n HT40 CH 62 5310MHz		5114.15	-49.55	-28.35	-21.2	-56.55	4.5	2.5	0	P
		5042.3	-60.8	-19.6	-41.2	-67.8	4.5	2.5	0	A
	*	5308	8.17	-	-	1.17	4.5	2.5	0	P
	*	5308	-0.25	-	-	-7.25	4.5	2.5	0	A
		5350.88	-30.5	-9.3	-21.2	-37.5	4.5	2.5	0	P
		5350	-47.44	-6.24	-41.2	-54.44	4.5	2.5	0	A
2										
802.11n HT40 CH 54 5270MHz		5150	-43.58	-22.38	-21.2	-50.58	4.5	2.5	0	P
		5149.85	-55.39	-14.19	-41.2	-62.39	4.5	2.5	0	A
	*	5272	15.32	-	-	8.32	4.5	2.5	0	P
	*	5272	5.84	-	-	-1.16	4.5	2.5	0	A
		5350.77	-32.84	-11.64	-21.2	-39.84	4.5	2.5	0	P
		5376.18	-50.18	-8.98	-41.2	-57.18	4.5	2.5	0	A
802.11n HT40 CH 62 5310MHz		5126.6	-50.05	-28.85	-21.2	-57.05	4.5	2.5	0	P
		5134.85	-60.88	-19.68	-41.2	-67.88	4.5	2.5	0	A
	*	5312	8.64	-	-	1.64	4.5	2.5	0	P
	*	5312	0.28	-	-	-6.72	4.5	2.5	0	A
		5350.99	-29.84	-8.64	-21.2	-36.84	4.5	2.5	0	P
		5351.1	-45.6	-4.4	-41.2	-52.6	4.5	2.5	0	A



15E 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11a CH 100 5500MHz		5466.64	-32.17	-10.97	-21.2	-39.17	4.5	2.5	0	P
		5469.84	-48.39	-7.19	-41.2	-55.39	4.5	2.5	0	A
	*	5499	14.06	-	-	7.06	4.5	2.5	0	P
	*	5499	5.62	-	-	-1.38	4.5	2.5	0	A
802.11a CH 116 5580MHz		5467.76	-36.47	-15.27	-21.2	-43.47	4.5	2.5	0	P
		5469.84	-50.69	-9.49	-41.2	-57.69	4.5	2.5	0	A
	*	5579	17.2	-	-	10.2	4.5	2.5	0	P
	*	5579	9.81	-	-	2.81	4.5	2.5	0	A
		5726.84	-45.71	-24.51	-21.2	-52.71	4.5	2.5	0	P
		5726.68	-58.82	-17.62	-41.2	-65.82	4.5	2.5	0	A
802.11a CH 140 5700MHz	*	5699	12.59	-	-	5.59	4.5	2.5	0	P
	*	5699	3.87	-	-	-3.13	4.5	2.5	0	A
		5725.32	-32.89	-11.69	-21.2	-39.89	4.5	2.5	0	P
		5725.08	-49.8	-8.6	-41.2	-56.8	4.5	2.5	0	A
2										
802.11a CH 100 5500MHz		5469.52	-30.55	-9.35	-21.2	-37.55	4.5	2.5	0	P
		5470	-48.08	-6.88	-41.2	-55.08	4.5	2.5	0	A
	*	5499	14.68	-	-	7.68	4.5	2.5	0	P
	*	5499	6.49	-	-	-0.51	4.5	2.5	0	A
802.11a CH 116 5580MHz		5469.36	-39.51	-18.31	-21.2	-46.51	4.5	2.5	0	P
		5469.68	-49.17	-7.97	-41.2	-56.17	4.5	2.5	0	A
	*	5581	18.61	-	-	11.61	4.5	2.5	0	P
	*	5581	10.2	-	-	3.2	4.5	2.5	0	A
		5731.24	-46.36	-25.16	-21.2	-53.36	4.5	2.5	0	P
		5729.8	-59.1	-17.9	-41.2	-66.1	4.5	2.5	0	A
802.11a CH 140 5700MHz	*	5701	13.56	-	-	6.56	4.5	2.5	0	P
	*	5701	3.81	-	-	-3.19	4.5	2.5	0	A
		5726.92	-31.34	-10.14	-21.2	-38.34	4.5	2.5	0	P
		5725.24	-50.02	-8.82	-41.2	-57.02	4.5	2.5	0	A



15E 5470~5725MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT20 CH 100 5500MHz		5468.88	-29.82	-8.62	-21.2	-36.82	4.5	2.5	0	P
		5470	-49.06	-7.86	-41.2	-56.06	4.5	2.5	0	A
	*	5499	13.85	-	-	6.85	4.5	2.5	0	P
	*	5499	5.15	-	-	-1.85	4.5	2.5	0	A
802.11n HT20 CH 116 5580MHz		5469.2	-40.57	-19.37	-21.2	-47.57	4.5	2.5	0	P
		5470	-50.78	-9.58	-41.2	-57.78	4.5	2.5	0	A
	*	5581	17.57	-	-	10.57	4.5	2.5	0	P
	*	5581	9.1	-	-	2.1	4.5	2.5	0	A
		5725.64	-45.13	-23.93	-21.2	-52.13	4.5	2.5	0	P
		5730.12	-58.78	-17.58	-41.2	-65.78	4.5	2.5	0	A
802.11n HT20 CH 140 5700MHz	*	5699	12.03	-	-	5.03	4.5	2.5	0	P
	*	5699	3.59	-	-	-3.41	4.5	2.5	0	A
		5727.32	-31.92	-10.72	-21.2	-38.92	4.5	2.5	0	P
		5725.08	-49.41	-8.21	-41.2	-56.41	4.5	2.5	0	A
2										
802.11n HT20 CH 100 5500MHz		5469.84	-28.85	-7.65	-21.2	-35.85	4.5	2.5	0	P
		5469.84	-46.83	-5.63	-41.2	-53.83	4.5	2.5	0	A
	*	5502	14.73	-	-	7.73	4.5	2.5	0	P
	*	5502	6.39	-	-	-0.61	4.5	2.5	0	A
802.11n HT20 CH 116 5580MHz		5470	-40.38	-19.18	-21.2	-47.38	4.5	2.5	0	P
		5469.04	-49.95	-8.75	-41.2	-56.95	4.5	2.5	0	A
	*	5578	17.98	-	-	10.98	4.5	2.5	0	P
	*	5578	9.78	-	-	2.78	4.5	2.5	0	A
		5730.76	-45.81	-24.61	-21.2	-52.81	4.5	2.5	0	P
		5728.36	-58.89	-17.69	-41.2	-65.89	4.5	2.5	0	A
802.11n HT20 CH 140 5700MHz	*	5698	12.82	-	-	5.82	4.5	2.5	0	P
	*	5698	4.13	-	-	-2.87	4.5	2.5	0	A
		5729.96	-32.75	-11.55	-21.2	-39.75	4.5	2.5	0	P
		5725.16	-49.56	-8.36	-41.2	-56.56	4.5	2.5	0	A



15E 5470~5725MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n		5469.82	-24.71	-3.51	-21.2	-31.71	4.5	2.5	0	P
HT40		5470	-44.25	-3.05	-41.2	-51.25	4.5	2.5	0	A
CH 102	*	5512	6.92	-	-	-0.08	4.5	2.5	0	P
5510MHz	*	5512	-1.57	-	-	-8.57	4.5	2.5	0	A
802.11n		5467.44	-26.45	-5.25	-21.2	-33.45	4.5	2.5	0	P
HT40		5469.84	-43.86	-2.66	-41.2	-50.86	4.5	2.5	0	A
CH 110	*	5552	13.6	-	-	6.6	4.5	2.5	0	P
5550MHz	*	5552	4.72	-	-	-2.28	4.5	2.5	0	A
802.11n		5727.8	-46.65	-25.45	-21.2	-53.65	4.5	2.5	0	P
HT40		5751.08	-58.79	-17.59	-41.2	-65.79	4.5	2.5	0	A
CH 134	*	5675	9.84	-	-	2.84	4.5	2.5	0	P
5670MHz	*	5675	1.33	-	-	-5.67	4.5	2.5	0	A
802.11n		5733.08	-36.55	-15.35	-21.2	-43.55	4.5	2.5	0	P
HT40		5746.12	-53.04	-11.84	-41.2	-60.04	4.5	2.5	0	A
2										
802.11n		5469.82	-22.81	-1.61	-21.2	-29.81	4.5	2.5	0	P
HT40		5470	-41.98	-0.78	-41.2	-48.98	4.5	2.5	0	A
CH 102	*	5512	8.22	-	-	1.22	4.5	2.5	0	P
5510MHz	*	5512	-0.54	-	-	-7.54	4.5	2.5	0	A
802.11n		5469.68	-26.14	-4.94	-21.2	-33.14	4.5	2.5	0	P
HT40		5470	-45.08	-3.88	-41.2	-52.08	4.5	2.5	0	A
CH 110	*	5548	13.9	-	-	6.9	4.5	2.5	0	P
5550MHz	*	5548	5.53	-	-	-1.47	4.5	2.5	0	A
802.11n		5729.8	-47.74	-26.54	-21.2	-54.74	4.5	2.5	0	P
HT40		5753.48	-58.88	-17.68	-41.2	-65.88	4.5	2.5	0	A
CH 134	*	5668	10.56	-	-	3.56	4.5	2.5	0	P
5670MHz	*	5668	1.36	-	-	-5.64	4.5	2.5	0	A
802.11n		5733.08	-32.66	-11.46	-21.2	-39.66	4.5	2.5	0	P
HT40		5751.24	-52.43	-11.23	-41.2	-59.43	4.5	2.5	0	A



3.4.7 Test Result of Conducted Spurious Emission in the Restricted Band

15E 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11a CH 36 5180MHz		120.45	-60.63	-8.93	-51.7	-72.33	4.5	2.5	4.7	P
		161.76	-60.39	-8.69	-51.7	-72.09	4.5	2.5	4.7	P
		220.08	-60.65	-11.45	-49.2	-72.35	4.5	2.5	4.7	P
		533.1	-60.47	-11.27	-49.2	-72.17	4.5	2.5	4.7	P
		694.1	-59.79	-10.59	-49.2	-71.49	4.5	2.5	4.7	P
		839.7	-59.66	-10.46	-49.2	-71.36	4.5	2.5	4.7	P
		10360	-66.68	-45.48	-21.2	-73.68	4.5	2.5	0	P
		15540	-54.34	-33.14	-21.2	-61.34	4.5	2.5	0	P
802.11a CH 44 5220MHz		113.7	-59.25	-7.55	-51.7	-70.95	4.5	2.5	4.7	P
		180.39	-60.99	-9.29	-51.7	-72.69	4.5	2.5	4.7	P
		232.23	-60.84	-11.64	-49.2	-72.54	4.5	2.5	4.7	P
		419	-60.73	-11.53	-49.2	-72.43	4.5	2.5	4.7	P
		602.4	-59.93	-10.73	-49.2	-71.63	4.5	2.5	4.7	P
		794.9	-60.29	-11.09	-49.2	-71.99	4.5	2.5	4.7	P
		10440	-64.26	-43.06	-21.2	-71.26	4.5	2.5	0	P
		15660	-55.17	-33.97	-21.2	-62.17	4.5	2.5	0	P
802.11a CH 48 5240MHz		91.02	-59.55	-7.85	-51.7	-71.25	4.5	2.5	4.7	P
		209.28	-60.95	-9.25	-51.7	-72.65	4.5	2.5	4.7	P
		255.45	-60.02	-10.82	-49.2	-71.72	4.5	2.5	4.7	P
		435.1	-60.7	-11.5	-49.2	-72.4	4.5	2.5	4.7	P
		630.4	-61.43	-12.23	-49.2	-73.13	4.5	2.5	4.7	P
		853.7	-60.57	-11.37	-49.2	-72.27	4.5	2.5	4.7	P
		10480	-63.69	-42.49	-21.2	-70.69	4.5	2.5	0	P
		15720	-54.96	-33.76	-21.2	-61.96	4.5	2.5	0	P



15E 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11a CH 36 5180MHz		67.8	-60.37	-5.17	-55.2	-72.07	4.5	2.5	4.7	P
		163.92	-60.63	-8.93	-51.7	-72.33	4.5	2.5	4.7	P
		262.2	-61.25	-12.05	-49.2	-72.95	4.5	2.5	4.7	P
		442.8	-60.32	-11.12	-49.2	-72.02	4.5	2.5	4.7	P
		554.8	-60.2	-11	-49.2	-71.9	4.5	2.5	4.7	P
		829.2	-60.51	-11.31	-49.2	-72.21	4.5	2.5	4.7	P
		10360	-66.19	-44.99	-21.2	-73.19	4.5	2.5	0	P
		15540	-53.86	-32.66	-21.2	-60.86	4.5	2.5	0	P
802.11a CH 44 5220MHz		140.7	-60.37	-8.67	-51.7	-72.07	4.5	2.5	4.7	P
		196.32	-60.91	-9.21	-51.7	-72.61	4.5	2.5	4.7	P
		251.94	-60.54	-11.34	-49.2	-72.24	4.5	2.5	4.7	P
		603.8	-60.39	-11.19	-49.2	-72.09	4.5	2.5	4.7	P
		706.7	-60.43	-11.23	-49.2	-72.13	4.5	2.5	4.7	P
		947.5	-59.42	-10.22	-49.2	-71.12	4.5	2.5	4.7	P
		10440	-64.85	-43.65	-21.2	-71.85	4.5	2.5	0	P
		15660	-53.5	-32.3	-21.2	-60.5	4.5	2.5	0	P
802.11a CH 48 5240MHz		100.47	-60.97	-9.27	-51.7	-72.67	4.5	2.5	4.7	P
		154.47	-61.78	-10.08	-51.7	-73.48	4.5	2.5	4.7	P
		255.99	-61.39	-12.19	-49.2	-73.09	4.5	2.5	4.7	P
		419.7	-60.3	-11.1	-49.2	-72	4.5	2.5	4.7	P
		601.7	-59.58	-10.38	-49.2	-71.28	4.5	2.5	4.7	P
		879.6	-60.57	-11.37	-49.2	-72.27	4.5	2.5	4.7	P
		10480	-64.44	-43.24	-21.2	-71.44	4.5	2.5	0	P
		15720	-55.75	-34.55	-21.2	-62.75	4.5	2.5	0	P



15E 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT20 CH 36 5180MHz		57.54	-62.05	-6.85	-55.2	-73.75	4.5	2.5	4.7	P
		147.18	-62.36	-10.66	-51.7	-74.06	4.5	2.5	4.7	P
		238.44	-63.2	-14	-49.2	-74.9	4.5	2.5	4.7	P
		518.4	-61.66	-12.46	-49.2	-73.36	4.5	2.5	4.7	P
		700.4	-60.64	-11.44	-49.2	-72.34	4.5	2.5	4.7	P
		839	-61.98	-12.78	-49.2	-73.68	4.5	2.5	4.7	P
		10360	-66.26	-45.06	-21.2	-73.26	4.5	2.5	0	P
		15540	-54.03	-32.83	-21.2	-61.03	4.5	2.5	0	P
802.11n HT20 CH 44 5220MHz		97.5	-60.87	-9.17	-51.7	-72.57	4.5	2.5	4.7	P
		162.3	-60.7	-9	-51.7	-72.4	4.5	2.5	4.7	P
		227.64	-60.75	-11.55	-49.2	-72.45	4.5	2.5	4.7	P
		435.1	-61.06	-11.86	-49.2	-72.76	4.5	2.5	4.7	P
		654.9	-60.74	-11.54	-49.2	-72.44	4.5	2.5	4.7	P
		750.1	-60.79	-11.59	-49.2	-72.49	4.5	2.5	4.7	P
		10440	-63.84	-42.64	-21.2	-70.84	4.5	2.5	0	P
		15660	-54.57	-33.37	-21.2	-61.57	4.5	2.5	0	P
802.11n HT20 CH 48 5240MHz		110.46	-61	-9.3	-51.7	-72.7	4.5	2.5	4.7	P
		176.61	-61.14	-9.44	-51.7	-72.84	4.5	2.5	4.7	P
		225.75	-60.81	-11.61	-49.2	-72.51	4.5	2.5	4.7	P
		471.5	-59.69	-10.49	-49.2	-71.39	4.5	2.5	4.7	P
		675.2	-58.89	-9.69	-49.2	-70.59	4.5	2.5	4.7	P
		947.5	-59.23	-10.03	-49.2	-70.93	4.5	2.5	4.7	P
		10480	-63.84	-42.64	-21.2	-70.84	4.5	2.5	0	P
		15720	-54.92	-33.72	-21.2	-61.92	4.5	2.5	0	P



15E 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT20 CH 36 5180MHz		91.02	-60.37	-8.67	-51.7	-72.07	4.5	2.5	4.7	P
		168.78	-60.78	-9.08	-51.7	-72.48	4.5	2.5	4.7	P
		248.97	-61.02	-11.82	-49.2	-72.72	4.5	2.5	4.7	P
		430.9	-60.7	-11.5	-49.2	-72.4	4.5	2.5	4.7	P
		638.8	-60.74	-11.54	-49.2	-72.44	4.5	2.5	4.7	P
		869.1	-59.35	-10.15	-49.2	-71.05	4.5	2.5	4.7	P
		10360	-66.27	-45.07	-21.2	-73.27	4.5	2.5	0	P
		15540	-54.46	-33.26	-21.2	-61.46	4.5	2.5	0	P
802.11n HT20 CH 44 5220MHz		121.26	-60.99	-9.29	-51.7	-72.69	4.5	2.5	4.7	P
		159.6	-60.63	-8.93	-51.7	-72.33	4.5	2.5	4.7	P
		259.77	-61.36	-12.16	-49.2	-73.06	4.5	2.5	4.7	P
		668.2	-60.96	-11.76	-49.2	-72.66	4.5	2.5	4.7	P
		724.9	-59.05	-9.85	-49.2	-70.75	4.5	2.5	4.7	P
		773.2	-63.36	-14.16	-49.2	-75.06	4.5	2.5	4.7	P
		10440	-64.49	-43.29	-21.2	-71.49	4.5	2.5	0	P
		15660	-54.85	-33.65	-21.2	-61.85	4.5	2.5	0	P
802.11n HT20 CH 48 5240MHz		140.7	-60.83	-9.13	-51.7	-72.53	4.5	2.5	4.7	P
		237.9	-60.03	-10.83	-49.2	-71.73	4.5	2.5	4.7	P
		265.44	-59.73	-10.53	-49.2	-71.43	4.5	2.5	4.7	P
		595.4	-60.61	-11.41	-49.2	-72.31	4.5	2.5	4.7	P
		673.1	-60.19	-10.99	-49.2	-71.89	4.5	2.5	4.7	P
		874	-58.81	-9.61	-49.2	-70.51	4.5	2.5	4.7	P
		10480	-64.29	-43.09	-21.2	-71.29	4.5	2.5	0	P
		15720	-55.71	-34.51	-21.2	-62.71	4.5	2.5	0	P



15E 5150~5250MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT40 CH 38 5190MHz		153.66	-60.92	-9.22	-51.7	-72.62	4.5	2.5	4.7	P
		177.42	-60.76	-9.06	-51.7	-72.46	4.5	2.5	4.7	P
		238.17	-60.55	-11.35	-49.2	-72.25	4.5	2.5	4.7	P
		487.6	-58.92	-9.72	-49.2	-70.62	4.5	2.5	4.7	P
		679.4	-60.39	-11.19	-49.2	-72.09	4.5	2.5	4.7	P
		904.8	-59.98	-10.78	-49.2	-71.68	4.5	2.5	4.7	P
		10380	-64.74	-43.54	-21.2	-71.74	4.5	2.5	0	P
		15570	-53.64	-32.44	-21.2	-60.64	4.5	2.5	0	P
802.11n HT40 CH 46 5230MHz		85.89	-60.24	-5.04	-55.2	-71.94	4.5	2.5	4.7	P
		121.26	-60.58	-8.88	-51.7	-72.28	4.5	2.5	4.7	P
		176.88	-60.02	-8.32	-51.7	-71.72	4.5	2.5	4.7	P
		414.1	-60.76	-11.56	-49.2	-72.46	4.5	2.5	4.7	P
		540.8	-60.71	-11.51	-49.2	-72.41	4.5	2.5	4.7	P
		649.3	-60.93	-11.73	-49.2	-72.63	4.5	2.5	4.7	P
		10460	-64.48	-43.28	-21.2	-71.48	4.5	2.5	0	P
		15690	-53.7	-32.5	-21.2	-60.7	4.5	2.5	0	P



15E 5150~5250MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT40 CH 38 5190MHz		85.89	-60.24	-5.04	-55.2	-71.94	4.5	2.5	4.7	P
		121.26	-60.58	-8.88	-51.7	-72.28	4.5	2.5	4.7	P
		176.88	-60.02	-8.32	-51.7	-71.72	4.5	2.5	4.7	P
		414.1	-60.76	-11.56	-49.2	-72.46	4.5	2.5	4.7	P
		540.8	-60.71	-11.51	-49.2	-72.41	4.5	2.5	4.7	P
		649.3	-60.93	-11.73	-49.2	-72.63	4.5	2.5	4.7	P
		10460	-64.48	-43.28	-21.2	-71.48	4.5	2.5	0	P
		15690	-53.7	-32.5	-21.2	-60.7	4.5	2.5	0	P
802.11n HT40 CH 46 5230MHz		78.33	-59.69	-4.49	-55.2	-71.39	4.5	2.5	4.7	P
		163.11	-60.6	-8.9	-51.7	-72.3	4.5	2.5	4.7	P
		209.82	-60.92	-9.22	-51.7	-72.62	4.5	2.5	4.7	P
		410.6	-60.47	-11.27	-49.2	-72.17	4.5	2.5	4.7	P
		640.2	-63.01	-13.81	-49.2	-74.71	4.5	2.5	4.7	P
		869.1	-59.79	-10.59	-49.2	-71.49	4.5	2.5	4.7	P
		10460	-64.47	-43.27	-21.2	-71.47	4.5	2.5	0	P
		15690	-54.72	-33.52	-21.2	-61.72	4.5	2.5	0	P



15E 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11a CH 52 5260MHz		71.85	-60.23	-5.03	-55.2	-71.93	4.5	2.5	4.7	P
		136.65	-61.03	-9.33	-51.7	-72.73	4.5	2.5	4.7	P
		230.61	-60.11	-10.91	-49.2	-71.81	4.5	2.5	4.7	P
		510	-60.23	-11.03	-49.2	-71.93	4.5	2.5	4.7	P
		664	-60.88	-11.68	-49.2	-72.58	4.5	2.5	4.7	P
		825	-60.41	-11.21	-49.2	-72.11	4.5	2.5	4.7	P
		10520	-64.74	-43.54	-21.2	-71.74	4.5	2.5	0	P
		15780	-55.92	-34.72	-21.2	-62.92	4.5	2.5	0	P
802.11a CH 60 5300MHz		72.12	-60.57	-5.37	-55.2	-72.27	4.5	2.5	4.7	P
		123.42	-60.4	-8.7	-51.7	-72.1	4.5	2.5	4.7	P
		230.88	-60.67	-11.47	-49.2	-72.37	4.5	2.5	4.7	P
		365.8	-60.19	-10.99	-49.2	-71.89	4.5	2.5	4.7	P
		600.3	-60.93	-11.73	-49.2	-72.63	4.5	2.5	4.7	P
		755.7	-59.75	-10.55	-49.2	-71.45	4.5	2.5	4.7	P
		10600	-63.46	-42.26	-21.2	-70.46	4.5	2.5	0	P
		15900	-56.75	-35.55	-21.2	-63.75	4.5	2.5	0	P
802.11a CH 64 5320MHz		94.53	-60.12	-8.42	-51.7	-71.82	4.5	2.5	4.7	P
		146.64	-60.97	-9.27	-51.7	-72.67	4.5	2.5	4.7	P
		267.06	-60.4	-11.2	-49.2	-72.1	4.5	2.5	4.7	P
		479.9	-60.51	-11.31	-49.2	-72.21	4.5	2.5	4.7	P
		658.4	-60.2	-11	-49.2	-71.9	4.5	2.5	4.7	P
		896.4	-60.51	-11.31	-49.2	-72.21	4.5	2.5	4.7	P
		10640	-63.81	-42.61	-21.2	-70.81	4.5	2.5	0	P
		15960	-55.04	-33.84	-21.2	-62.04	4.5	2.5	0	P



15E 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11a CH 52 5260MHz		145.02	-61.02	-9.32	-51.7	-72.72	4.5	2.5	4.7	P
		176.88	-59.5	-7.8	-51.7	-71.2	4.5	2.5	4.7	P
		234.93	-60.58	-11.38	-49.2	-72.28	4.5	2.5	4.7	P
		510.7	-60.44	-11.24	-49.2	-72.14	4.5	2.5	4.7	P
		722.8	-59.03	-9.83	-49.2	-70.73	4.5	2.5	4.7	P
		912.5	-59.98	-10.78	-49.2	-71.68	4.5	2.5	4.7	P
		10520	-63.62	-42.42	-21.2	-70.62	4.5	2.5	0	P
		15780	-55.5	-34.3	-21.2	-62.5	4.5	2.5	0	P
802.11a CH 60 5300MHz		142.86	-60.1	-8.4	-51.7	-71.8	4.5	2.5	4.7	P
		198.75	-60.73	-9.03	-51.7	-72.43	4.5	2.5	4.7	P
		253.83	-61.06	-11.86	-49.2	-72.76	4.5	2.5	4.7	P
		398.7	-61.27	-12.07	-49.2	-72.97	4.5	2.5	4.7	P
		603.1	-60.67	-11.47	-49.2	-72.37	4.5	2.5	4.7	P
		776.7	-60.45	-11.25	-49.2	-72.15	4.5	2.5	4.7	P
		10600	-64.29	-43.09	-21.2	-71.29	4.5	2.5	0	P
		15900	-56.6	-35.4	-21.2	-63.6	4.5	2.5	0	P
802.11a CH 64 5320MHz		86.7	-60.28	-5.08	-55.2	-71.98	4.5	2.5	4.7	P
		160.68	-60.75	-9.05	-51.7	-72.45	4.5	2.5	4.7	P
		214.95	-60.23	-8.53	-51.7	-71.93	4.5	2.5	4.7	P
		482.7	-60.57	-11.37	-49.2	-72.27	4.5	2.5	4.7	P
		679.4	-60.61	-11.41	-49.2	-72.31	4.5	2.5	4.7	P
		791.4	-60.73	-11.53	-49.2	-72.43	4.5	2.5	4.7	P
		10640	-64.86	-43.66	-21.2	-71.86	4.5	2.5	0	P
		15960	-55.33	-34.13	-21.2	-62.33	4.5	2.5	0	P



15E 5250~5350MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT20 CH 52 5260MHz		144.48	-60.13	-8.43	-51.7	-71.83	4.5	2.5	4.7	P
		186.33	-60.27	-8.57	-51.7	-71.97	4.5	2.5	4.7	P
		295.68	-60.41	-11.21	-49.2	-72.11	4.5	2.5	4.7	P
		571.6	-60.85	-11.65	-49.2	-72.55	4.5	2.5	4.7	P
		810.3	-59.54	-10.34	-49.2	-71.24	4.5	2.5	4.7	P
		988.8	-60.45	-19.25	-41.2	-72.15	4.5	2.5	4.7	P
		10520	-63.53	-42.33	-21.2	-70.53	4.5	2.5	0	P
		15780	-55.7	-34.5	-21.2	-62.7	4.5	2.5	0	P
802.11n HT20 CH 60 5300MHz		116.94	-60.39	-8.69	-51.7	-72.09	4.5	2.5	4.7	P
		174.18	-60.24	-8.54	-51.7	-71.94	4.5	2.5	4.7	P
		261.66	-59.48	-10.28	-49.2	-71.18	4.5	2.5	4.7	P
		432.3	-59.57	-10.37	-49.2	-71.27	4.5	2.5	4.7	P
		497.4	-60.47	-11.27	-49.2	-72.17	4.5	2.5	4.7	P
		690.6	-59.57	-10.37	-49.2	-71.27	4.5	2.5	4.7	P
		10600	-65.42	-44.22	-21.2	-72.42	4.5	2.5	0	P
		15900	-56.36	-35.16	-21.2	-63.36	4.5	2.5	0	P
802.11n HT20 CH 64 5320MHz		151.5	-60.57	-8.87	-51.7	-72.27	4.5	2.5	4.7	P
		193.08	-60.3	-8.6	-51.7	-72	4.5	2.5	4.7	P
		277.32	-59.95	-10.75	-49.2	-71.65	4.5	2.5	4.7	P
		426.7	-60.91	-11.71	-49.2	-72.61	4.5	2.5	4.7	P
		731.2	-60.53	-11.33	-49.2	-72.23	4.5	2.5	4.7	P
		951	-60.39	-11.19	-49.2	-72.09	4.5	2.5	4.7	P
		10640	-64.94	-43.74	-21.2	-71.94	4.5	2.5	0	P
		15960	-55.48	-34.28	-21.2	-62.48	4.5	2.5	0	P



15E 5250~5350MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT20 CH 52 5260MHz		88.05	-61.56	-9.86	-51.7	-73.26	4.5	2.5	4.7	P
		162.03	-61.14	-9.44	-51.7	-72.84	4.5	2.5	4.7	P
		203.61	-60.84	-9.14	-51.7	-72.54	4.5	2.5	4.7	P
		399.4	-61.14	-11.94	-49.2	-72.84	4.5	2.5	4.7	P
		533.1	-60.88	-11.68	-49.2	-72.58	4.5	2.5	4.7	P
		766.9	-60.19	-10.99	-49.2	-71.89	4.5	2.5	4.7	P
		10520	-65.87	-44.67	-21.2	-72.87	4.5	2.5	0	P
		15780	-56.99	-35.79	-21.2	-63.99	4.5	2.5	0	P
802.11n HT20 CH 60 5300MHz		113.7	-60.37	-8.67	-51.7	-72.07	4.5	2.5	4.7	P
		184.17	-60.3	-8.6	-51.7	-72	4.5	2.5	4.7	P
		263.82	-61.1	-11.9	-49.2	-72.8	4.5	2.5	4.7	P
		521.9	-60.57	-11.37	-49.2	-72.27	4.5	2.5	4.7	P
		603.8	-60.73	-11.53	-49.2	-72.43	4.5	2.5	4.7	P
		854.4	-60.65	-11.45	-49.2	-72.35	4.5	2.5	4.7	P
		10600	-65.6	-44.4	-21.2	-72.6	4.5	2.5	0	P
		15900	-55.59	-34.39	-21.2	-62.59	4.5	2.5	0	P
802.11n HT20 CH 64 5320MHz		140.7	-60.41	-8.71	-51.7	-72.11	4.5	2.5	4.7	P
		179.31	-60.4	-8.7	-51.7	-72.1	4.5	2.5	4.7	P
		262.2	-60.67	-11.47	-49.2	-72.37	4.5	2.5	4.7	P
		488.3	-60.76	-11.56	-49.2	-72.46	4.5	2.5	4.7	P
		685.7	-60.54	-11.34	-49.2	-72.24	4.5	2.5	4.7	P
		792.1	-60.17	-10.97	-49.2	-71.87	4.5	2.5	4.7	P
		10640	-63.82	-42.62	-21.2	-70.82	4.5	2.5	0	P
		15960	-54.74	-33.54	-21.2	-61.74	4.5	2.5	0	P



15E 5250~5350MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT40 CH 54 5270MHz		80.76	-60.46	-5.26	-55.2	-72.16	4.5	2.5	4.7	P
		156.9	-60.52	-8.82	-51.7	-72.22	4.5	2.5	4.7	P
		268.14	-60.33	-11.13	-49.2	-72.03	4.5	2.5	4.7	P
		490.4	-60.77	-11.57	-49.2	-72.47	4.5	2.5	4.7	P
		779.5	-60.53	-11.33	-49.2	-72.23	4.5	2.5	4.7	P
		902	-60.54	-11.34	-49.2	-72.24	4.5	2.5	4.7	P
		10540	-64.45	-43.25	-21.2	-71.45	4.5	2.5	0	P
		15810	-54.88	-33.68	-21.2	-61.88	4.5	2.5	0	P
802.11n HT40 CH 62 5310MHz		64.56	-60.05	-4.85	-55.2	-71.75	4.5	2.5	4.7	P
		129.09	-60.7	-9	-51.7	-72.4	4.5	2.5	4.7	P
		187.14	-59.69	-7.99	-51.7	-71.39	4.5	2.5	4.7	P
		420.4	-60.74	-11.54	-49.2	-72.44	4.5	2.5	4.7	P
		555.5	-60.53	-11.33	-49.2	-72.23	4.5	2.5	4.7	P
		745.9	-59.25	-10.05	-49.2	-70.95	4.5	2.5	4.7	P
		10620	-63.05	-41.85	-21.2	-70.05	4.5	2.5	0	P
		15930	-54.7	-33.5	-21.2	-61.7	4.5	2.5	0	P

**15E 5250~5350MHz****WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT40 CH 54 5270MHz		131.25	-59.29	-7.59	-51.7	-70.99	4.5	2.5	4.7	P
		168.78	-60.57	-8.87	-51.7	-72.27	4.5	2.5	4.7	P
		244.65	-60.83	-11.63	-49.2	-72.53	4.5	2.5	4.7	P
		565.3	-60.5	-11.3	-49.2	-72.2	4.5	2.5	4.7	P
		694.8	-60.98	-11.78	-49.2	-72.68	4.5	2.5	4.7	P
		909	-60.48	-11.28	-49.2	-72.18	4.5	2.5	4.7	P
		10540	-65.06	-43.86	-21.2	-72.06	4.5	2.5	0	P
		15810	-56.86	-35.66	-21.2	-63.86	4.5	2.5	0	P
802.11n HT40 CH 62 5310MHz		96.15	-60.64	-8.94	-51.7	-72.34	4.5	2.5	4.7	P
		186.06	-60.24	-8.54	-51.7	-71.94	4.5	2.5	4.7	P
		268.14	-60.46	-11.26	-49.2	-72.16	4.5	2.5	4.7	P
		471.5	-59.96	-10.76	-49.2	-71.66	4.5	2.5	4.7	P
		638.8	-60.61	-11.41	-49.2	-72.31	4.5	2.5	4.7	P
		919.5	-60.01	-10.81	-49.2	-71.71	4.5	2.5	4.7	P
		10620	-65	-43.8	-21.2	-72	4.5	2.5	0	P
		15930	-54.53	-33.33	-21.2	-61.53	4.5	2.5	0	P



15E 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11a CH 100 5500MHz		54.84	-61.34	-6.14	-55.2	-73.04	4.5	2.5	4.7	P
		142.05	-60.87	-9.17	-51.7	-72.57	4.5	2.5	4.7	P
		233.04	-60.95	-11.75	-49.2	-72.65	4.5	2.5	4.7	P
		480.6	-60	-10.8	-49.2	-71.7	4.5	2.5	4.7	P
		623.4	-60.87	-11.67	-49.2	-72.57	4.5	2.5	4.7	P
		900.6	-60.3	-11.1	-49.2	-72	4.5	2.5	4.7	P
		11000	-64.8	-43.6	-21.2	-71.8	4.5	2.5	0	P
		16500	-55.05	-33.85	-21.2	-62.05	4.5	2.5	0	P
802.11a CH 116 5580MHz		62.67	-61.26	-6.06	-55.2	-72.96	4.5	2.5	4.7	P
		156.9	-61.13	-9.43	-51.7	-72.83	4.5	2.5	4.7	P
		216.3	-59.94	-10.74	-49.2	-71.64	4.5	2.5	4.7	P
		524.7	-60.43	-11.23	-49.2	-72.13	4.5	2.5	4.7	P
		671	-60.19	-10.99	-49.2	-71.89	4.5	2.5	4.7	P
		808.9	-60.39	-11.19	-49.2	-72.09	4.5	2.5	4.7	P
		11160	-66.01	-44.81	-21.2	-73.01	4.5	2.5	0	P
		16740	-55.37	-34.17	-21.2	-62.37	4.5	2.5	0	P
802.11a CH 140 5700MHz		85.62	-61	-5.8	-55.2	-72.7	4.5	2.5	4.7	P
		147.99	-61.25	-9.55	-51.7	-72.95	4.5	2.5	4.7	P
		226.02	-60.91	-11.71	-49.2	-72.61	4.5	2.5	4.7	P
		450.5	-60.28	-11.08	-49.2	-71.98	4.5	2.5	4.7	P
		630.4	-59.86	-10.66	-49.2	-71.56	4.5	2.5	4.7	P
		844.6	-59.46	-10.26	-49.2	-71.16	4.5	2.5	4.7	P
		11400	-64.5	-43.3	-21.2	-71.5	4.5	2.5	0	P
		17100	-54.62	-33.42	-21.2	-61.62	4.5	2.5	0	P



15E 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11a CH 100 5500MHz		51.6	-60.2	-5	-55.2	-71.9	4.5	2.5	4.7	P
		71.85	-61.06	-5.86	-55.2	-72.76	4.5	2.5	4.7	P
		82.38	-61.23	-6.03	-55.2	-72.93	4.5	2.5	4.7	P
		437.2	-60.38	-11.18	-49.2	-72.08	4.5	2.5	4.7	P
		533.1	-61.14	-11.94	-49.2	-72.84	4.5	2.5	4.7	P
		700.4	-60.76	-11.56	-49.2	-72.46	4.5	2.5	4.7	P
		11000	-65.62	-44.42	-21.2	-72.62	4.5	2.5	0	P
		16500	-54.13	-32.93	-21.2	-61.13	4.5	2.5	0	P
802.11a CH 116 5580MHz		152.85	-60.33	-8.63	-51.7	-72.03	4.5	2.5	4.7	P
		214.68	-60.44	-8.74	-51.7	-72.14	4.5	2.5	4.7	P
		247.35	-59.34	-10.14	-49.2	-71.04	4.5	2.5	4.7	P
		491.1	-60.33	-11.13	-49.2	-72.03	4.5	2.5	4.7	P
		654.9	-60.36	-11.16	-49.2	-72.06	4.5	2.5	4.7	P
		869.8	-61.29	-12.09	-49.2	-72.99	4.5	2.5	4.7	P
		11160	-61.39	-40.19	-21.2	-68.39	4.5	2.5	0	P
		16740	-54.9	-33.7	-21.2	-61.9	4.5	2.5	0	P
802.11a CH 140 5700MHz		226.56	-61.46	-12.26	-49.2	-73.16	4.5	2.5	4.7	P
		256.53	-60.67	-11.47	-49.2	-72.37	4.5	2.5	4.7	P
		296.22	-60.83	-11.63	-49.2	-72.53	4.5	2.5	4.7	P
		351.1	-62.93	-13.73	-49.2	-74.63	4.5	2.5	4.7	P
		569.5	-61.39	-12.19	-49.2	-73.09	4.5	2.5	4.7	P
		988.1	-59.9	-18.7	-41.2	-71.6	4.5	2.5	4.7	P
		11400	-66.67	-45.47	-21.2	-73.67	4.5	2.5	0	P
		17100	-54.68	-33.48	-21.2	-61.68	4.5	2.5	0	P



15E 5470~5725MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT20 CH 100 5500MHz		169.59	-61.03	-9.33	-51.7	-72.73	4.5	2.5	4.7	P
		226.29	-61.37	-12.17	-49.2	-73.07	4.5	2.5	4.7	P
		276.24	-60.58	-11.38	-49.2	-72.28	4.5	2.5	4.7	P
		437.9	-60.84	-11.64	-49.2	-72.54	4.5	2.5	4.7	P
		713	-61.01	-11.81	-49.2	-72.71	4.5	2.5	4.7	P
		902.7	-61.27	-12.07	-49.2	-72.97	4.5	2.5	4.7	P
		11000	-63.12	-41.92	-21.2	-70.12	4.5	2.5	0	P
		16500	-54.17	-32.97	-21.2	-61.17	4.5	2.5	0	P
802.11n HT20 CH 116 5580MHz		67.53	-58.85	-3.65	-55.2	-70.55	4.5	2.5	4.7	P
		150.15	-58.94	-7.24	-51.7	-70.64	4.5	2.5	4.7	P
		228.99	-60.49	-11.29	-49.2	-72.19	4.5	2.5	4.7	P
		440.7	-60.26	-11.06	-49.2	-71.96	4.5	2.5	4.7	P
		787.9	-60.5	-11.3	-49.2	-72.2	4.5	2.5	4.7	P
		948.2	-59.62	-10.42	-49.2	-71.32	4.5	2.5	4.7	P
		11160	-62.65	-41.45	-21.2	-69.65	4.5	2.5	0	P
		16740	-56.53	-35.33	-21.2	-63.53	4.5	2.5	0	P
802.11n HT20 CH 140 5700MHz		146.64	-61.43	-9.73	-51.7	-73.13	4.5	2.5	4.7	P
		193.35	-60.69	-8.99	-51.7	-72.39	4.5	2.5	4.7	P
		251.4	-61.43	-12.23	-49.2	-73.13	4.5	2.5	4.7	P
		470.8	-60.57	-11.37	-49.2	-72.27	4.5	2.5	4.7	P
		660.5	-60.17	-10.97	-49.2	-71.87	4.5	2.5	4.7	P
		871.9	-61.04	-11.84	-49.2	-72.74	4.5	2.5	4.7	P
		11400	-64.93	-43.73	-21.2	-71.93	4.5	2.5	0	P
		17100	-55.18	-33.98	-21.2	-62.18	4.5	2.5	0	P



15E 5470~5725MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT20 CH 100 5500MHz		62.67	-61.43	-6.23	-55.2	-73.13	4.5	2.5	4.7	P
		128.28	-61.36	-9.66	-51.7	-73.06	4.5	2.5	4.7	P
		209.01	-61.48	-9.78	-51.7	-73.18	4.5	2.5	4.7	P
		494.6	-61.11	-11.91	-49.2	-72.81	4.5	2.5	4.7	P
		607.3	-61.19	-11.99	-49.2	-72.89	4.5	2.5	4.7	P
		759.9	-61.11	-11.91	-49.2	-72.81	4.5	2.5	4.7	P
		11000	-62.63	-41.43	-21.2	-69.63	4.5	2.5	0	P
		16500	-54.22	-33.02	-21.2	-61.22	4.5	2.5	0	P
802.11n HT20 CH 116 5580MHz		150.42	-60.39	-8.69	-51.7	-72.09	4.5	2.5	4.7	P
		171.21	-60.91	-9.21	-51.7	-72.61	4.5	2.5	4.7	P
		261.12	-59.91	-10.71	-49.2	-71.61	4.5	2.5	4.7	P
		559.7	-60.73	-11.53	-49.2	-72.43	4.5	2.5	4.7	P
		792.1	-60.82	-11.62	-49.2	-72.52	4.5	2.5	4.7	P
		888	-61.32	-12.12	-49.2	-73.02	4.5	2.5	4.7	P
		11160	-67.21	-46.01	-21.2	-74.21	4.5	2.5	0	P
		16740	-54.8	-33.6	-21.2	-61.8	4.5	2.5	0	P
802.11n HT20 CH 140 5700MHz		40.8	-61.46	-6.26	-55.2	-73.16	4.5	2.5	4.7	P
		56.46	-61.54	-6.34	-55.2	-73.24	4.5	2.5	4.7	P
		97.77	-61.14	-9.44	-51.7	-72.84	4.5	2.5	4.7	P
		392.4	-60.51	-11.31	-49.2	-72.21	4.5	2.5	4.7	P
		617.1	-60.36	-11.16	-49.2	-72.06	4.5	2.5	4.7	P
		981.1	-61.18	-19.98	-41.2	-72.88	4.5	2.5	4.7	P
		11400	-62.43	-41.23	-21.2	-69.43	4.5	2.5	0	P
		17100	-53.64	-32.44	-21.2	-60.64	4.5	2.5	0	P



15E 5470~5725MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT40 CH 102 5510MHz		60.24	-59.91	-4.71	-55.2	-71.61	4.5	2.5	4.7	P
		165.54	-59.97	-8.27	-51.7	-71.67	4.5	2.5	4.7	P
		237.09	-61.26	-12.06	-49.2	-72.96	4.5	2.5	4.7	P
		410.6	-60.13	-10.93	-49.2	-71.83	4.5	2.5	4.7	P
		551.3	-61.16	-11.96	-49.2	-72.86	4.5	2.5	4.7	P
		825.7	-60.88	-11.68	-49.2	-72.58	4.5	2.5	4.7	P
		11020	-63.95	-42.75	-21.2	-70.95	4.5	2.5	0	P
		16530	-54	-32.8	-21.2	-61	4.5	2.5	0	P
802.11n HT40 CH 110 5550MHz		110.46	-59.87	-8.17	-51.7	-71.57	4.5	2.5	4.7	P
		217.38	-60.58	-11.38	-49.2	-72.28	4.5	2.5	4.7	P
		288.12	-60.46	-11.26	-49.2	-72.16	4.5	2.5	4.7	P
		384	-61.19	-11.99	-49.2	-72.89	4.5	2.5	4.7	P
		510	-60.61	-11.41	-49.2	-72.31	4.5	2.5	4.7	P
		731.9	-61.04	-11.84	-49.2	-72.74	4.5	2.5	4.7	P
		11100	-67.16	-45.96	-21.2	-74.16	4.5	2.5	0	P
		16650	-54.6	-33.4	-21.2	-61.6	4.5	2.5	0	P
802.11n HT40 CH 134 5670MHz		66.99	-60.24	-5.04	-55.2	-71.94	4.5	2.5	4.7	P
		185.79	-60.31	-8.61	-51.7	-72.01	4.5	2.5	4.7	P
		256.26	-61.1	-11.9	-49.2	-72.8	4.5	2.5	4.7	P
		390.3	-60.68	-11.48	-49.2	-72.38	4.5	2.5	4.7	P
		744.5	-60.76	-11.56	-49.2	-72.46	4.5	2.5	4.7	P
		949.6	-59.96	-10.76	-49.2	-71.66	4.5	2.5	4.7	P
		11340	-66.15	-44.95	-21.2	-73.15	4.5	2.5	0	P
		17010	-53.74	-32.54	-21.2	-60.74	4.5	2.5	0	P



15E 5470~5725MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Avg
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dBi)	(dB)	(dB)	(P/A)
802.11n HT40 CH 102 5510MHz		105.33	-60.89	-9.19	-51.7	-72.59	4.5	2.5	4.7	P
		145.83	-59.62	-7.92	-51.7	-71.32	4.5	2.5	4.7	P
		233.85	-62.57	-13.37	-49.2	-74.27	4.5	2.5	4.7	P
		464.5	-61.01	-11.81	-49.2	-72.71	4.5	2.5	4.7	P
		617.8	-60.76	-11.56	-49.2	-72.46	4.5	2.5	4.7	P
		701.1	-60.38	-11.18	-49.2	-72.08	4.5	2.5	4.7	P
		11020	-66.88	-45.68	-21.2	-73.88	4.5	2.5	0	P
		16530	-55.07	-33.87	-21.2	-62.07	4.5	2.5	0	P
802.11n HT40 CH 110 5550MHz		69.96	-60.13	-4.93	-55.2	-71.83	4.5	2.5	4.7	P
		179.58	-59.95	-8.25	-51.7	-71.65	4.5	2.5	4.7	P
		253.56	-60.91	-11.71	-49.2	-72.61	4.5	2.5	4.7	P
		416.9	-60.61	-11.41	-49.2	-72.31	4.5	2.5	4.7	P
		573.7	-60.21	-11.01	-49.2	-71.91	4.5	2.5	4.7	P
		764.1	-61.21	-12.01	-49.2	-72.91	4.5	2.5	4.7	P
		11100	-65.52	-44.32	-21.2	-72.52	4.5	2.5	0	P
		16650	-56.22	-35.02	-21.2	-63.22	4.5	2.5	0	P
802.11n HT40 CH 134 5670MHz		79.14	-60.23	-5.03	-55.2	-71.93	4.5	2.5	4.7	P
		149.61	-60.65	-8.95	-51.7	-72.35	4.5	2.5	4.7	P
		229.53	-60.44	-11.24	-49.2	-72.14	4.5	2.5	4.7	P
		411.3	-60.62	-11.42	-49.2	-72.32	4.5	2.5	4.7	P
		646.5	-61.09	-11.89	-49.2	-72.79	4.5	2.5	4.7	P
		883.1	-60.44	-11.24	-49.2	-72.14	4.5	2.5	4.7	P
		11340	-63.38	-42.18	-21.2	-70.38	4.5	2.5	0	P
		17010	-55.33	-34.13	-21.2	-62.33	4.5	2.5	0	P



3.4.8 Test Result of Cabinet Radiated Spurious at Band Edges

Please refer to Appendix B of this report.

3.4.9 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B of this report.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.5.4 Test Setup

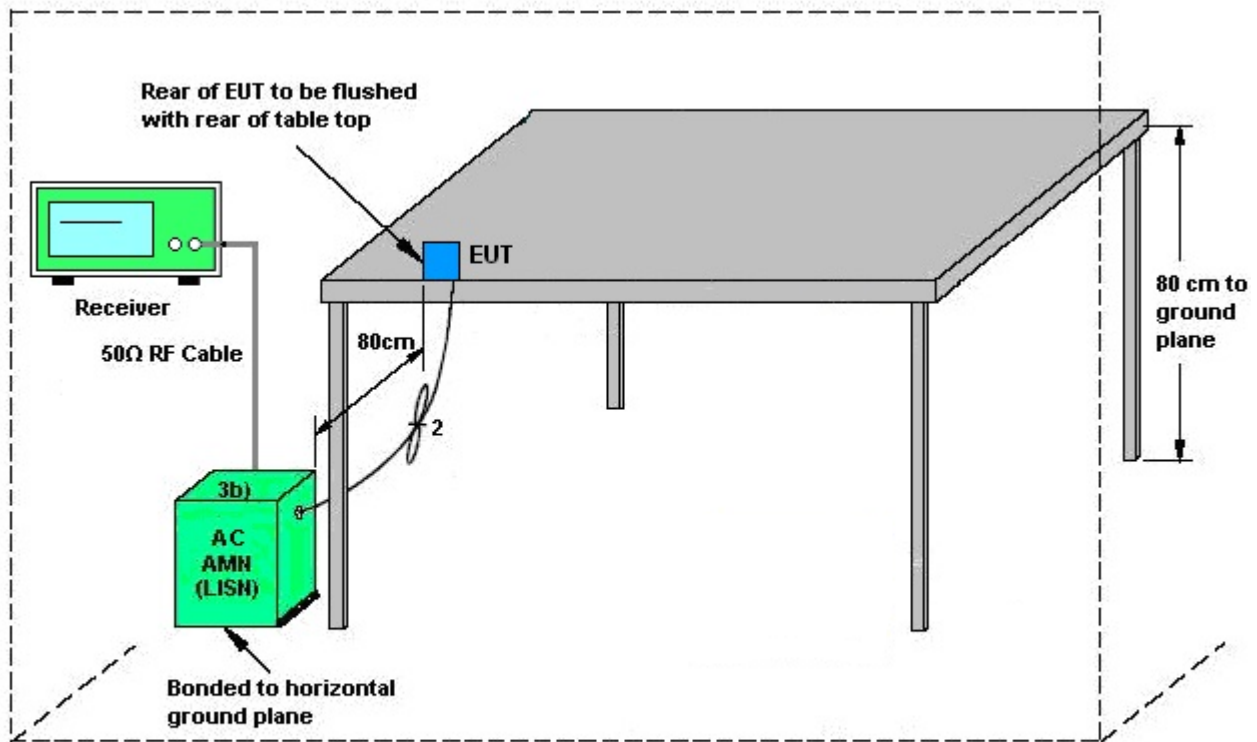

AMN = Artificial mains network (LISH)
 AE = Associated equipment
 EUT = Equipment under test
 ISN = Impedance stabilization network

3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22℃
Test Engineer :	Kai-Chun CHu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN (5GHz) Link + Bluetooth Link + Adapter		

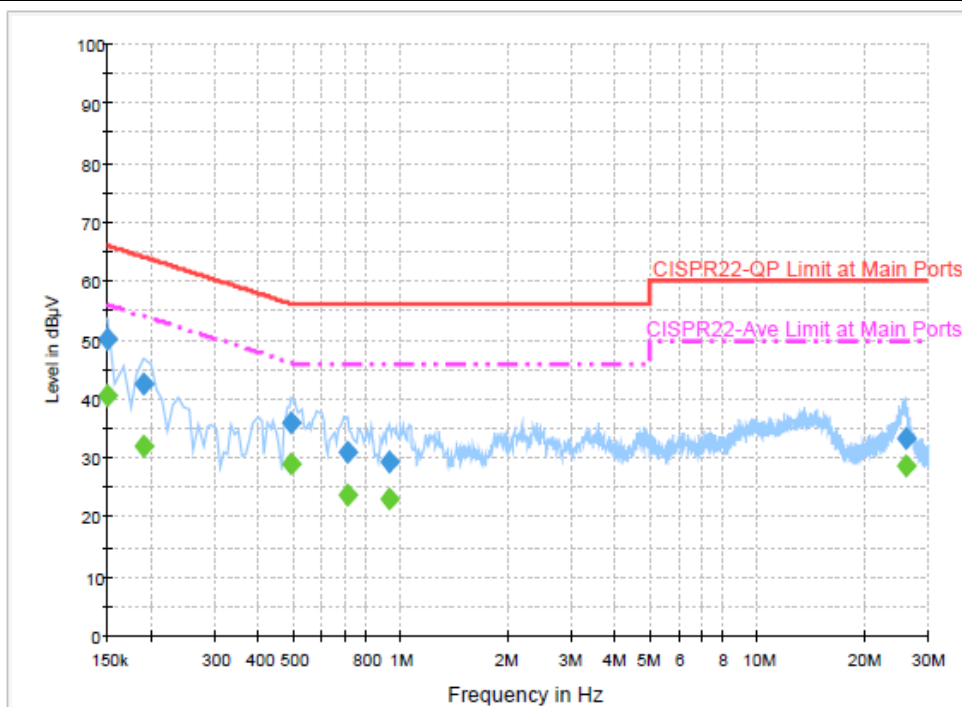


Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	50.3	Off	L1	19.5	15.7	66.0
0.190000	42.7	Off	L1	19.5	21.3	64.0
0.494000	36.0	Off	L1	19.4	20.1	56.1
0.710000	31.1	Off	L1	19.6	24.9	56.0
0.926000	29.5	Off	L1	19.5	26.5	56.0
26.030000	33.3	Off	L1	19.9	26.7	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	40.8	Off	L1	19.5	15.2	56.0
0.190000	31.9	Off	L1	19.5	22.1	54.0
0.494000	29.1	Off	L1	19.4	17.0	46.1
0.710000	23.6	Off	L1	19.6	22.4	46.0
0.926000	23.0	Off	L1	19.5	23.0	46.0
26.030000	28.8	Off	L1	19.9	21.2	50.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Kai-Chun CHu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN (5GHz) Link + Bluetooth Link + Adapter		

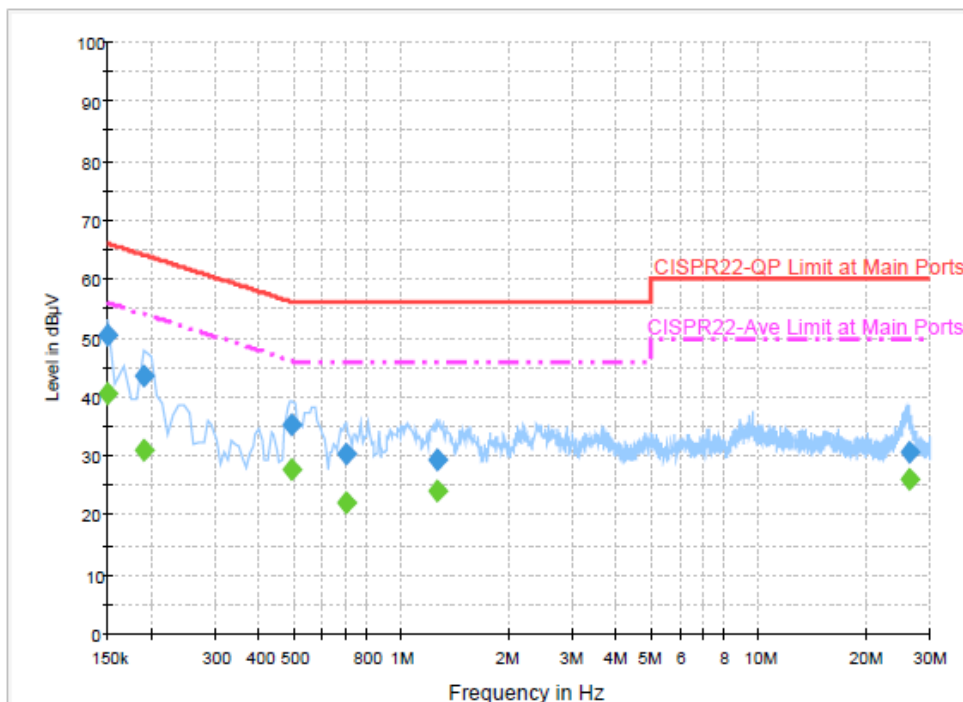
Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	50.6	Off	N	19.5	15.4	66.0
0.190000	43.7	Off	N	19.5	20.3	64.0
0.494000	35.3	Off	N	19.4	20.8	56.1
0.702000	30.4	Off	N	19.6	25.6	56.0
1.254000	29.4	Off	N	19.6	26.6	56.0
26.366000	30.6	Off	N	20.1	29.4	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	40.7	Off	N	19.5	15.3	56.0
0.190000	31.2	Off	N	19.5	22.8	54.0
0.494000	27.8	Off	N	19.4	18.3	46.1
0.702000	22.3	Off	N	19.6	23.7	46.0
1.254000	24.0	Off	N	19.6	22.0	46.0
26.366000	26.2	Off	N	20.1	23.8	50.0

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

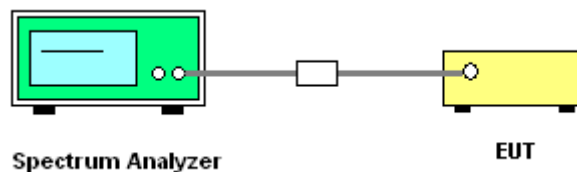

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant 1 (dBi)	Ant 2 (dBi)				
Band I	4.50	4.50	4.50	7.51	0.00	1.51
Band II	4.50	4.50	4.50	7.51	0.00	1.51
Band III	4.50	4.50	4.50	7.51	0.00	1.51

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Dec. 09, 2014 ~ Dec. 13, 2014	Jun. 08, 2015	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Aug. 09, 2014	Dec. 09, 2014 ~ Dec. 13, 2014	Aug. 08, 2015	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 09, 2014	Dec. 09, 2014 ~ Dec. 13, 2014	Aug. 08, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	Dec. 15, 2014 ~ Dec. 16, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9 kHz~7 GHz	Aug. 30, 2014	Dec. 15, 2014 ~ Dec. 16, 2014	Aug. 29, 2015	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Dec. 15, 2014 ~ Dec. 16, 2014	Jul. 27, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Dec. 15, 2014 ~ Dec. 16, 2014	Sep. 26, 2015	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 19, 2014	Dec. 15, 2014 ~ Dec. 16, 2014	Aug. 18, 2015	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Oct. 02, 2014	Dec. 15, 2014 ~ Dec. 16, 2014	Oct. 01, 2015	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	Dec. 15, 2014 ~ Dec. 16, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Oct. 21, 2014	Dec. 15, 2014 ~ Dec. 16, 2014	Oct. 20, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	DC~18 GHz	Jul. 07, 2014	Dec. 15, 2014 ~ Dec. 16, 2014	Jul. 06, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	DC~18 GHz	Apr. 21, 2014	Dec. 15, 2014 ~ Dec. 16, 2014	Apr. 20, 2015	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Dec. 15, 2014 ~ Dec. 16, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Dec. 15, 2014 ~ Dec. 16, 2014	N/A	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 12, 2014	Dec. 10, 2014	Nov. 11, 2015	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 08, 2014	Dec. 10, 2014	Dec. 07, 2015	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 02, 2014	Dec. 10, 2014	Dec. 01, 2015	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Dec. 10, 2014	N/A	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
--	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50
--	------



Appendix A. Test Result of conducted Test Results

Report Number : FR4O0971D

Test Engineer:	Alex Lee	Temperature:	21~25	°C
Test Date:	2014/12/12	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I													
Mod.	Data Rate	NTX	Channel	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180		17.80		27.65	-		22.50		
11a	6Mbps	1	44	5220		17.65		25.50	-		22.47		
11a	6Mbps	1	48	5240		18.35		28.15	-		22.64		
HT20	MCS0	1	36	5180		18.50		27.80	-		22.67		
HT20	MCS0	1	44	5220		18.45		27.90	-		22.66		
HT20	MCS0	1	48	5240		18.60		28.60	-		22.70		
HT40	MCS0	1	38	5190		36.10		45.09	-		23.01		
HT40	MCS0	1	46	5230		36.20		52.65	-		23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I														
Mod.	Data Rate	N	Tx Channel	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	4.90	4.90	15.54	15.71	-	24.00	24.00	4.50	4.50	Pass
11a	6Mbps	1	44	5220	4.90	4.90	15.58	15.82		24.00	24.00	4.50	4.50	Pass
11a	6Mbps	1	48	5240	4.90	4.90	15.40	15.56		24.00	24.00	4.50	4.50	Pass
HT20	MCS0	1	36	5180	4.77	4.77	15.71	15.54		24.00	24.00	4.50	4.50	Pass
HT20	MCS0	1	44	5220	4.77	4.77	15.35	15.53		24.00	24.00	4.50	4.50	Pass
HT20	MCS0	1	48	5240	4.77	4.77	15.28	15.48		24.00	24.00	4.50	4.50	Pass
HT40	MCS0	1	38	5190	5.17	5.17	11.48	11.76		24.00	24.00	4.50	4.50	Pass
HT40	MCS0	1	46	5230	5.17	5.17	16.60	16.98		24.00	24.00	4.50	4.50	Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I														
Mod.	Data Rate	N	Tx Channel	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	4.90	4.90		5.17	-	11.00	11.00	4.50	4.50	Pass
11a	6Mbps	1	44	5220	4.90	4.90		5.35		11.00	11.00	4.50	4.50	Pass
11a	6Mbps	1	48	5240	4.90	4.90		5.18		11.00	11.00	4.50	4.50	Pass
HT20	MCS0	1	36	5180	4.77	4.77		4.81		11.00	11.00	4.50	4.50	Pass
HT20	MCS0	1	44	5220	4.77	4.77		5.36		11.00	11.00	4.50	4.50	Pass
HT20	MCS0	1	48	5240	4.77	4.77		4.93		11.00	11.00	4.50	4.50	Pass
HT40	MCS0	1	38	5190	5.17	5.17		-3.04		11.00	11.00	4.50	4.50	Pass
HT40	MCS0	1	46	5230	5.17	5.17		3.51		11.00	11.00	4.50	4.50	Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II															
Mod.	Data Rate	Ntx	Channel	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260		17.50		25.50		23.43		29.43		23.98	
11a	6Mbps	1	60	5300		17.35		26.35		23.39		29.39		23.98	
11a	6Mbps	1	64	5320		17.40		25.50		23.41		29.41		23.98	
HT20	MCS0	1	52	5260		18.75		28.10		23.73		29.73		23.98	
HT20	MCS0	1	60	5300		18.60		27.95		23.70		29.70		23.98	
HT20	MCS0	1	64	5320		18.55		28.30		23.68		29.68		23.98	
HT40	MCS0	1	54	5270		36.50		54.81		23.98		30.00		23.98	
HT40	MCS0	1	62	5310		35.90		45.36		23.98		30.00		23.98	

TEST RESULTS DATA
Average Power Table

FCC Band II														
Mod.	Data Rate	N	Tx Channel	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	4.90	4.90	13.20	13.30	-		23.98	4.50	4.50	Pass
11a	6Mbps	1	60	5300	4.90	4.90	12.94	13.48			23.98	4.50	4.50	Pass
11a	6Mbps	1	64	5320	4.90	4.90	12.98	13.28			23.98	4.50	4.50	Pass
HT20	MCS0	1	52	5260	4.77	4.77	13.12	13.44			23.98	4.50	4.50	Pass
HT20	MCS0	1	60	5300	4.77	4.77	13.27	13.87			23.98	4.50	4.50	Pass
HT20	MCS0	1	64	5320	4.77	4.77	12.79	13.37			23.98	4.50	4.50	Pass
HT40	MCS0	1	54	5270	5.17	5.17	16.86	17.20			23.98	4.50	4.50	Pass
HT40	MCS0	1	62	5310	5.17	5.17	11.80	12.22			23.98	4.50	4.50	Pass

TEST RESULTS DATA
Power Spectral Density

Band II														
Mod.	Data Rate	Ntx	Channel	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	4.90	4.90		1.84	-	11.00	11.00	4.50	4.50	Pass
11a	6Mbps	1	60	5300	4.90	4.90		2.31		11.00	11.00	4.50	4.50	Pass
11a	6Mbps	1	64	5320	4.90	4.90		1.67		11.00	11.00	4.50	4.50	Pass
HT20	MCS0	1	52	5260	4.77	4.77		1.70		11.00	11.00	4.50	4.50	Pass
HT20	MCS0	1	60	5300	4.77	4.77		2.09		11.00	11.00	4.50	4.50	Pass
HT20	MCS0	1	64	5320	4.77	4.77		1.64		11.00	11.00	4.50	4.50	Pass
HT40	MCS0	1	54	5270	5.17	5.17		2.94		11.00	11.00	4.50	4.50	Pass
HT40	MCS0	1	62	5310	5.17	5.17		-2.54		11.00	11.00	4.50	4.50	Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III															
Mod.	Data Rate	N	Tx Channel	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	100	5500		17.50		27.05		23.43		29.43		23.98	
11a	6Mbps	1	116	5580		19.05		33.35		23.80		29.80		23.98	
11a	6Mbps	1	140	5700		17.25		25.30		23.37		29.37		23.98	
HT20	MCS0	1	100	5500		18.85		29.20		23.75		29.75		23.98	
HT20	MCS0	1	116	5580		18.75		28.60		23.73		29.73		23.98	
HT20	MCS0	1	140	5700		18.50		27.80		23.67		29.67		23.98	
HT40	MCS0	1	102	5510		36.00		44.64		23.98		30.00		23.98	
HT40	MCS0	1	110	5550		36.50		57.69		23.98		30.00		23.98	
HT40	MCS0	1	134	5670		36.10		48.15		23.98		30.00		23.98	

TEST RESULTS DATA
Average Power Table

FCC Band III														
Mod.	Data Rate	N	Tx Channel	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	100	5500	4.90	4.90	14.30	14.52	-		23.98	4.50	4.50	Pass
11a	6Mbps	1	116	5580	4.90	4.90	17.50	18.44			23.98	4.50	4.50	Pass
11a	6Mbps	1	140	5700	4.90	4.90	11.82	11.94			23.98	4.50	4.50	Pass
HT20	MCS0	1	100	5500	4.77	4.77	14.06	14.93			23.98	4.50	4.50	Pass
HT20	MCS0	1	116	5580	4.77	4.77	17.24	17.52			23.98	4.50	4.50	Pass
HT20	MCS0	1	140	5700	4.77	4.77	11.76	12.19			23.98	4.50	4.50	Pass
HT40	MCS0	1	102	5510	5.17	5.17	11.52	11.28			23.98	4.50	4.50	Pass
HT40	MCS0	1	110	5550	5.17	5.17	15.78	16.74			23.98	4.50	4.50	Pass
HT40	MCS0	1	134	5670	5.17	5.17	12.56	12.83			23.98	4.50	4.50	Pass

TEST RESULTS DATA
Power Spectral Density

Band III														
Mod.	Data Rate	Ntx	Channel	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	100	5500	4.90	4.90		3.18	-	11.00	11.00	4.50	4.50	Pass
11a	6Mbps	1	116	5580	4.90	4.90		6.91		11.00	11.00	4.50	4.50	Pass
11a	6Mbps	1	140	5700	4.90	4.90		0.06		11.00	11.00	4.50	4.50	Pass
HT20	MCS0	1	100	5500	4.77	4.77		2.86		11.00	11.00	4.50	4.50	Pass
HT20	MCS0	1	116	5580	4.77	4.77		5.95		11.00	11.00	4.50	4.50	Pass
HT20	MCS0	1	140	5700	4.77	4.77		-0.43		11.00	11.00	4.50	4.50	Pass
HT40	MCS0	1	102	5510	5.17	5.17		-0.42		11.00	11.00	4.50	4.50	Pass
HT40	MCS0	1	110	5550	5.17	5.17		2.90		11.00	11.00	4.50	4.50	Pass
HT40	MCS0	1	134	5670	5.17	5.17		-1.98		11.00	11.00	4.50	4.50	Pass

TEST RESULTS DATA
Frequency Stability

Band I										
Mod.	Data Rate	NTX	Channe	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	20	108	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	20	132	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	20	120	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	-30	120	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	50	120	

Band II										
Mod.	Data Rate	NTX	Channe	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	64	5320	5320.000	0.000	0.00	20	108	
11a	6Mbps	1	64	5320	5320.000	0.000	0.00	20	132	
11a	6Mbps	1	64	5320	5320.000	0.000	0.00	20	120	
11a	6Mbps	1	64	5320	5320.000	0.000	0.00	-30	120	
11a	6Mbps	1	64	5320	5320.000	0.000	0.00	50	120	

Band III										
Mod.	Data Rate	NTX	Channe	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	100	5500	5500.000	0.000	0.00	20	108	
11a	6Mbps	1	100	5500	5500.000	0.000	0.00	20	132	
11a	6Mbps	1	100	5500	5500.000	0.000	0.00	20	120	
11a	6Mbps	1	100	5500	5500.000	0.000	0.00	-30	120	
11a	6Mbps	1	100	5500	5500.000	0.000	0.00	50	120	



Appendix B. Radiated Spurious Emission

Test Engineer :	Nick Yu, Derreck Chen and Ken Wu	Temperature :	23~25°C
		Relative Humidity :	48~51%

15E Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5013.5	55.74	-18.26	74	42.24	34.42	11.37	32.29	100	0	P	H
		5149.7	42.34	-11.66	54	28.67	34.61	11.55	32.49	100	0	A	H
	*	5177	57.32	-	-	43.63	34.66	11.55	32.52	100	0	P	H
													H
													H
													H
		5023.55	56.51	-17.49	74	42.97	34.45	11.41	32.32	100	0	P	V
		5148.35	42.39	-11.61	54	28.72	34.61	11.55	32.49	100	0	A	V
	*	5180	56.89	-	-	43.2	34.66	11.55	32.52	100	0	P	V
													V
													V
802.11a CH 44 5220MHz		5079.8	56.61	-17.39	74	43.02	34.52	11.46	32.39	100	0	P	H
		5142.05	42.33	-11.67	54	28.62	34.61	11.55	32.45	100	0	A	H
	*	5217	60.34	-	-	46.6	34.7	11.59	32.55	100	0	P	H
		5407.64	56.6	-17.4	74	43.29	34.96	11.74	33.39	100	0	P	H
		5386.74	42.71	-11.29	54	29.31	34.94	11.74	33.28	100	0	A	H
													H
		5140.85	56.26	-17.74	74	42.55	34.61	11.55	32.45	100	0	P	V
		5145.8	42.37	-11.63	54	28.7	34.61	11.55	32.49	100	0	A	V
	*	5218	58.35	-	-	44.61	34.7	11.59	32.55	100	0	P	V
		5388.94	56.27	-17.73	74	42.87	34.94	11.74	33.28	100	0	P	V
		5380.47	42.62	-11.38	54	29.22	34.94	11.74	33.28	100	0	A	V
													V



WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 48 5240MHz		5082.3	56.55	-17.45	74	42.96	34.52	11.46	32.39	100	0	P	H
		5143.7	42.05	-11.95	54	28.34	34.61	11.55	32.45	100	0	A	H
	*	5239	64.88	-	-	51.18	34.73	11.62	32.65	100	0	P	H
		5412.26	55.96	-18.04	74	42.63	34.98	11.74	33.39	100	0	P	H
		5375.74	42.59	-11.41	54	29.25	34.91	11.71	33.28	100	0	A	H
													H
		5142.7	56.03	-17.97	74	42.32	34.61	11.55	32.45	100	0	P	V
		5144.1	42.18	-11.82	54	28.51	34.61	11.55	32.49	100	0	A	V
	*	5239	62.72	-	-	49.02	34.73	11.62	32.65	100	0	P	V
		5364.3	56.93	-17.07	74	43.49	34.91	11.71	33.18	100	0	P	V
		5399.94	42.69	-11.31	54	29.38	34.96	11.74	33.39	100	0	A	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		10359	42.4	-31.6	74	47.71	37.22	16.34	58.87	100	0	P	H
		15540	47.01	-26.99	74	43.8	40.34	20.36	57.49	100	0	P	H
													H
													H
		10359	44.03	-29.97	74	49.34	37.22	16.34	58.87	100	0	P	V
		15540	47.27	-26.73	74	44.06	40.34	20.36	57.49	100	0	P	V
													V
													V
802.11a CH 44 5220MHz		10440	42.1	-31.9	74	47.31	37.26	16.41	58.88	100	0	P	H
		15660	46.25	-27.75	74	42.7	40.49	20.41	57.35	100	0	P	H
													H
													H
		10440	43.6	-30.4	74	48.81	37.26	16.41	58.88	100	0	P	V
		15660	46.57	-27.43	74	43.02	40.49	20.41	57.35	100	0	P	V
													V
													V
802.11a CH 48 5240MHz		10479	42.55	-31.45	74	47.7	37.29	16.45	58.89	100	0	P	H
		15720	47.37	-26.63	74	43.62	40.57	20.45	57.27	100	0	P	H
													H
													H
		10479	42.69	-31.31	74	47.84	37.29	16.45	58.89	100	0	P	V
		15720	47.81	-26.19	74	44.06	40.57	20.45	57.27	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 52 5260MHz		5083.4	56.72	-17.28	74	43.13	34.52	11.46	32.39	100	0	P	H
		5149.85	42.56	-11.44	54	28.89	34.61	11.55	32.49	100	0	A	H
	*	5265	62.97	-	-	49.31	34.77	11.65	32.76	100	0	P	H
		5421.3	55.78	-18.22	74	42.39	34.98	11.8	33.39	100	0	P	H
		5379.88	42.13	-11.87	54	28.76	34.94	11.71	33.28	100	0	A	H
													H
		5079.5	56.22	-17.78	74	42.63	34.52	11.46	32.39	100	0	P	V
		5148.5	42.41	-11.59	54	28.74	34.61	11.55	32.49	100	0	A	V
	*	5262	61.69	-	-	48.03	34.77	11.65	32.76	100	0	P	V
		5371	56.71	-17.29	74	43.27	34.91	11.71	33.18	100	0	P	V
		5409.91	42.55	-11.45	54	29.24	34.96	11.74	33.39	100	0	A	V
													V
802.11a CH 60 5300MHz		5043.95	55.98	-18.02	74	42.45	34.47	11.41	32.35	100	0	P	H
		5149.4	42.4	-11.6	54	28.73	34.61	11.55	32.49	100	0	A	H
	*	5298	62.69	-	-	49.19	34.82	11.65	32.97	100	0	P	H
		5370.68	55.78	-18.22	74	42.34	34.91	11.71	33.18	100	0	P	H
		5386.41	42.71	-11.29	54	29.31	34.94	11.74	33.28	100	0	A	H
													H
		5016.05	56.07	-17.93	74	42.57	34.42	11.37	32.29	100	0	P	V
		5147.15	42.44	-11.56	54	28.77	34.61	11.55	32.49	100	0	A	V
	*	5299	61.01	-	-	47.51	34.82	11.65	32.97	100	0	P	V
		5389.38	56.38	-17.62	74	42.98	34.94	11.74	33.28	100	0	P	V
		5390.04	42.66	-11.34	54	29.26	34.94	11.74	33.28	100	0	A	V
													V



WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 64 5320MHz	*	5319	61.47	-	-	47.92	34.84	11.68	32.97	100	0	P	H
		5385.86	56.24	-17.76	74	42.84	34.94	11.74	33.28	100	0	P	H
		5387.95	42.69	-11.31	54	29.29	34.94	11.74	33.28	100	0	A	H
													H
													H
													H
	*	5320	61.5	-	-	47.95	34.84	11.68	32.97	100	0	P	V
		5414.68	56.16	-17.84	74	42.83	34.98	11.74	33.39	100	0	P	V
		5405.11	42.73	-11.27	54	29.42	34.96	11.74	33.39	100	0	A	V
													V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



15E band 2 5250~5350MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 52 5260MHz		10521	42.98	-31.02	74	48.01	37.32	16.49	58.84	100	0	P	H
		15780	47.34	-26.66	74	43.47	40.63	20.46	57.22	100	0	P	H
													H
													H
		10521	42.07	-31.93	74	47.1	37.32	16.49	58.84	100	0	P	V
		15780	47.78	-26.22	74	43.91	40.63	20.46	57.22	100	0	P	V
													V
													V
802.11a CH 60 5300MHz		10599	41.22	-32.78	74	45.85	37.42	16.56	58.61	100	0	P	H
		15900	48.28	-25.72	74	44.06	40.78	20.52	57.08	100	0	P	H
													H
													H
		10600	41.85	-32.15	74	46.48	37.42	16.56	58.61	100	0	P	V
		15900	47.25	-26.75	74	43.03	40.78	20.52	57.08	100	0	P	V
													V
													V
802.11a CH 64 5320MHz		10641	41.3	-32.7	74	45.75	37.47	16.6	58.52	100	0	P	H
		15960	46.81	-27.19	74	42.4	40.86	20.55	57	100	0	P	H
													H
													H
		10641	41.45	-32.55	74	45.9	37.47	16.6	58.52	100	0	P	V
		15960	46.92	-27.08	74	42.51	40.86	20.55	57	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5406.64	56.16	-17.84	74	42.85	34.96	11.74	33.39	100	0	P	H
		5397.84	42.67	-11.33	54	29.25	34.96	11.74	33.28	100	0	A	H
	*	5499	60.81	-	-	47.51	35.1	11.86	33.66	100	0	P	H
													H
													H
													H
		5406.48	57.42	-16.58	74	44.11	34.96	11.74	33.39	100	0	P	V
		5407.6	42.7	-11.3	54	29.39	34.96	11.74	33.39	100	0	A	V
	*	5503	58.9	-	-	45.62	35.1	11.92	33.74	100	0	P	V
													V
													V
													V
													V
802.11a CH 116 5580MHz		5444.4	55.92	-18.08	74	42.59	35.01	11.8	33.48	100	0	P	H
		5402.32	42.67	-11.33	54	29.36	34.96	11.74	33.39	100	0	A	H
	*	5579	62.5	-	-	49.39	35.14	11.98	34.01	100	0	P	H
		5762.76	56.36	-17.64	74	42.97	35.26	12.33	34.2	100	0	P	H
		5753	42.41	-11.59	54	28.99	35.26	12.33	34.17	100	0	A	H
													H
		5352.24	56.04	-17.96	74	42.62	34.89	11.71	33.18	100	0	P	V
		5388.24	42.67	-11.33	54	29.27	34.94	11.74	33.28	100	0	A	V
	*	5578	64.5	-	-	51.39	35.14	11.98	34.01	100	0	P	V
		5728.76	55.91	-18.09	74	42.57	35.23	12.26	34.15	100	0	P	V
		5762.52	42.45	-11.55	54	29.06	35.26	12.33	34.2	100	0	A	V
													V
													V



WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 140 5700MHz	*	5704	58.76	-	-	45.4	35.22	12.26	34.12	100	0	P	H
		5761.08	56.67	-17.33	74	43.28	35.26	12.33	34.2	100	0	P	H
		5757	42.37	-11.63	54	28.98	35.26	12.33	34.2	100	0	A	H
													H
													H
													H
	*	5696	58.51	-	-	45.24	35.21	12.18	34.12	100	0	P	V
		5761.32	57.04	-16.96	74	43.65	35.26	12.33	34.2	100	0	P	V
		5757.72	42.4	-11.6	54	29.01	35.26	12.33	34.2	100	0	A	V
													V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



15E band 3 - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		11001	43.94	-30.06	74	46.66	37.9	16.94	57.56	100	0	P	H
		16500	47.94	-26.06	74	41.63	41.4	20.88	55.97	100	0	P	H
													H
													H
		11000	44.24	-29.76	74	46.96	37.9	16.94	57.56	100	0	P	V
		16500	47.19	-26.81	74	40.88	41.4	20.88	55.97	100	0	P	V
													V
													V
802.11a CH 116 5580MHz		11160	44.56	-29.44	74	46.84	38	17.08	57.36	100	0	P	H
		16740	48.08	-25.92	74	41.21	41.88	21.04	56.05	100	0	P	H
													H
													H
		11160	43.98	-30.02	74	46.26	38	17.08	57.36	100	0	P	V
		16740	48.9	-25.1	74	42.03	41.88	21.04	56.05	100	0	P	V
													V
													V
802.11a CH 140 5700MHz		11400	44.09	-29.91	74	45.71	38.14	17.31	57.07	100	0	P	H
		17100	50.01	-23.99	74	42.58	42.32	21.27	56.16	100	0	P	H
													H
													H
		11400	44.97	-29.03	74	46.59	38.14	17.31	57.07	100	0	P	V
		17100	48.68	-25.32	74	41.25	42.32	21.27	56.16	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E Emission below 1GHz

WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a LF		40.53	28.36	-11.64	40	44.49	13.3	1.77	31.2			P	H
		209.28	35.78	-7.72	43.5	55	9.19	2.69	31.1	197	286	P	H
		288.39	26.65	-19.35	46	41.51	13.04	3.16	31.06			P	H
		324.5	25.96	-20.04	46	40.08	13.6	3.28	31			P	H
		493.2	26.24	-19.76	46	35.2	17.94	3.77	30.67			P	H
		948.9	28.09	-17.91	46	29.16	24.39	4.94	30.4			P	H
													H
													H
													H
													H
													H
													H
		46.47	28.67	-11.33	40	48.3	9.8	1.77	31.2	125	12	P	V
		209.28	32.11	-11.39	43.5	51.33	9.19	2.69	31.1			P	V
		275.97	27.61	-18.39	46	42.56	12.84	3.16	30.95			P	V
		344.8	29.96	-16.04	46	43.34	14.25	3.39	31.02			P	V
		620.6	32.33	-13.67	46	38.45	20.22	4.22	30.56			P	V
		897.1	32.59	-13.41	46	35.13	23.11	4.66	30.31			P	V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Setup Photographs

<Conducted Emission>



<Radiated Emission>

X Plane

LF



HF

