



Test Report

FCC Part15 Subpart C & Industry Canada RSS-247 Issue 2

Product Name : Drivewell Tag SVR

Model No. : XS-S1 VER4.0

FCC ID : 2AFGD-0003

IC : 22582-0003

Applicant : Cambridge Mobile Telematics

Address : 101 Main Street, 14th Floor, Cambridge, MA 02142, USA

Date of Receipt : Apr. 11th, 2017

Test Date : Apr. 11th, 2017~ May. 03rd, 2017

Issued Date : May. 10th, 2017

Report No. : 1742033R-RF-US-P06V01

Report Version : V1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing & Certification (Suzhou) Co., Ltd.

Test Report Certification

Issued Date : May. 10th, 2017

Report No. : 1742033R-RF-US-P06V01



Product Name : Drivewell Tag SVR
Applicant : Cambridge Mobile Telematics
Address : 101 Main Street, 14th Floor, Cambridge, MA 02142, USA
Manufacturer : Cambridge Mobile Telematics
Address : 101 Main Street, 14th Floor, Cambridge, MA 02142, USA
Model No. : XS-S1 VER4.0
FCC ID : 2AFGD-0003
IC : 22582-0003
EUT Voltage : DC 3.3V
Test Voltage : AC 120V/60Hz
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2015
ANSI C63.4:2014; ANSI C63.10:2013;
KDB 558074 D01v04
Industry Canada RSS-Gen Issue 4 / RSS-247 Issue 2
Test Result : Complied
Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,
Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: 800392; IC Lab Code: 4075B

Documented By : 
(Adm. Specialist: Kathy Feng)

Reviewed By : 
(Senior Engineer: Frank He)


Approved By : 
(Engineering Manager: Harry Zhao)

TABLE OF CONTENTS

Description	Page
1. General Information	6
1.1. EUT Description	6
1.2. Working Frequency of Each Channel:	7
1.3. Antenna information	7
1.4. Mode of Operation	8
1.5. Tested System Details	8
1.6. Configuration of Tested System	9
1.7. EUT Exercise Software	10
2. Technical Test	11
2.1. Summary of Test Result	11
2.2. Test Frequency configuration:	13
2.3. Test Environment	14
2.4. Measurement Uncertainty	14
3. AC Power Line Conducted Emission	15
3.1. Test Equipment	15
3.2. Test Setup	15
3.3. Limit	16
3.4. Test Procedure	16
3.5. Test Result	17
4. Emissions in restricted frequency bands	19
4.1. Test Equipment	19
4.2. Test Setup	20
4.3. Limit	21
4.4. Test Procedure	24
4.5. EUT test Axis definition	25
4.6. Test Result	26
5. Emissions in non-restricted frequency bands	29
5.1. Test Equipment	29
5.2. Test Setup	29
5.3. Limit	30
5.4. Test Procedure	31
5.5. EUT test Axis definition	32
5.6. Test Result	33
6. Radiated Emission Band Edge	34
6.1. Test Equipment	34
6.2. Test Setup	35
6.3. Limit	35

6.4.	Test Procedure	36
6.5.	EUT test definition	37
6.6.	Duty Cycle	38
6.7	Test Result	39
7.	Occupied Bandwidth	47
7.1.	Test Equipment.....	47
7.2.	Test Setup.....	47
7.3.	Limit.....	48
7.4.	Test Procedure	48
7.5.	EUT test definition	49
7.6.	Test Result.....	50
8.	Fundamental emission output power	51
8.1.	Test Equipment.....	51
8.2.	Test Setup.....	51
8.3.	Limit.....	52
8.4.	Test Procedure	53
8.5.	EUT test definition	54
8.6.	Test Result.....	55
9.	Power Spectral Density	56
9.1.	Test Equipment.....	56
9.2.	Test Setup.....	56
9.3.	Limit.....	56
9.4.	Test Procedure	57
9.5.	EUT test definition	58
9.6.	Test Result.....	59

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1742033R-RF-US-P06V01	V1.0	Initial Issued Report	May. 10th, 2017

1. General Information

1.1. EUT Description

Product Name	Drivewell Tag SVR
Model No.	XS-S1 VER4.0
EUT Voltage	DC 3.3V
Test Voltage	AC 120V/60Hz
Bluetooth Specification	V4.2
Frequency Range	2402- 2480 MHz
Channel Number	V4.2: 40
Channel Separation	V4.2: 2MHz
Type of Modulation	V4.2: GFSK
Data Rate	V4.2: 1Mbps(GFSK)
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

1.2. Working Frequency of Each Channel:

Bluetooth Working Frequency of Each Channel: (For V4.2)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

1.3. Antenna information

Model No.	N/A				
Antenna manufacturer	N/A				
Antenna Delivery	☒ 1*TX+1*RX	☐ 2*TX+2*RX	☐ 3*TX+3*RX		
Antenna technology	☒ SISO				
	☐ MIMO	☐ Basic			
		☐ CDD			
		☐ Sectorized			
		☐ Beam-forming			
Antenna Type	☐ External	☐ Dipole			
		☐ Sectorized			
	☒ Internal	☐ PIFA			
		☐ PCB			
		☒ Ceramic Chip Antenna			
	☐ Metal plate type F antenna				
Antenna Technology	Ant Gain (dBi)				
☒ SISO	2.2				

1.4. Mode of Operation

Test Mode
Mode 1: Transmit-1Mbps(GFSK_BLE)


1.5. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Think Pad	2526	LV-A3285	Power by adapter
A	USB cable	N/A	N/A	N/A	Shielded,0.5m
B	USB cable	N/A	N/A	N/A	Shielded,10m

1.6. Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

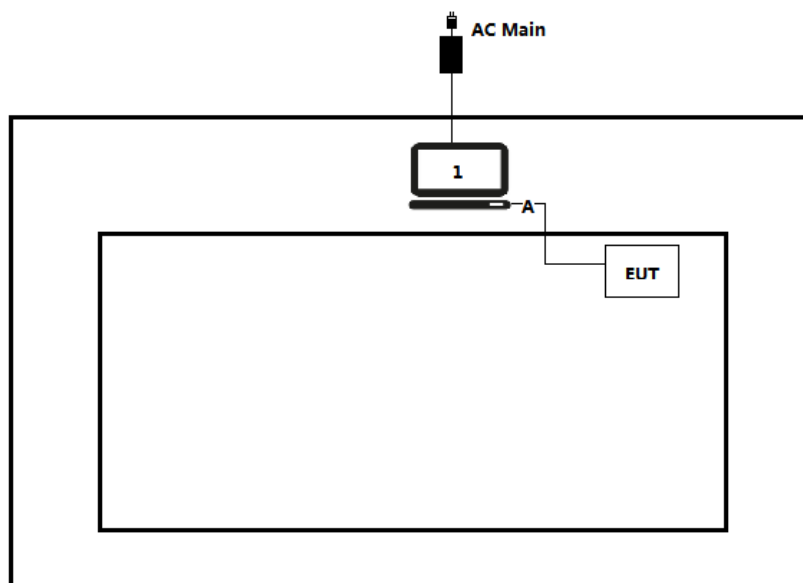

Test setup Diagram- Radiated Emission

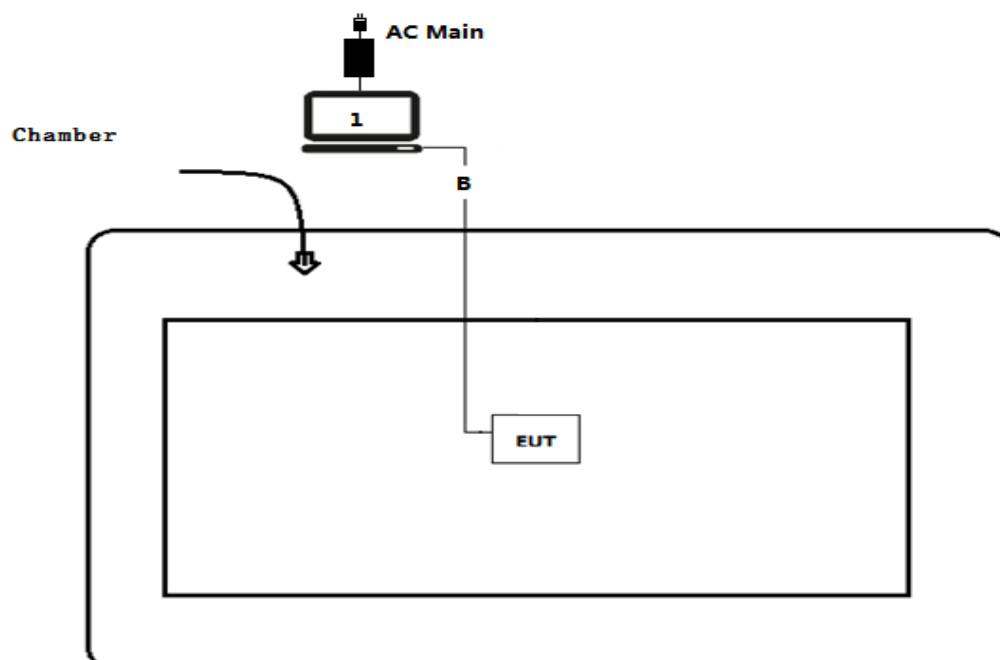

1.7. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	Run the RF software, and set the test mode and channel, then press OK to start continue receive.

2. Technical Test

2.1. Summary of Test Result

Performed Test Item	Normative References	Worst case mode	Limit	Result
AC Power Line Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	Mode 1	FCC 15.207	PASS
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	Mode 1	FCC 15.209	PASS
Emissions in non-restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(d)	Mode 1	$\geq 20\text{dBc}$	PASS
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 15.247(d)	Mode 1	FCC 15.209	PASS
Occupied Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(2)	Mode 1	$\geq 500\text{kHz}$	PASS
Fundamental emission output power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(3)	Mode 1	$\leq 30\text{dBm}$	PASS
Power Spectral Density	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(e)	Mode 1	$\leq 8\text{dBm}/3\text{kHz}$	PASS
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.203	N/A	FCC 15.203	PASS

Performed Test Item	Normative References	Worst case mode	Limit	Result
AC Power Line Conducted Emission	RSS-Gen Issue 4 Section 8.8	N/A	RSS-Gen	PASS
Emissions in restricted frequency bands	RSS-Gen Issue 4 Section 8.9	Mode 1	RSS-Gen	PASS
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	Mode 1	$\geq 20\text{dBc}$	PASS
Radiated Emission Band Edge	RSS-Gen Issue 4 Section 8.10	Mode 1	RSS-Gen	PASS
Occupied Bandwidth	RSS-Gen Issue 4 Section 6.6 RSS-247 Issue 2 Section 5.2(a)	Mode 1	$\geq 500\text{kHz}$	PASS
Fundamental emission output power	RSS-247 Issue 2 Section 5.4(d)	Mode 1	$\leq 30\text{dBm}$	PASS

Power Spectral Density	RSS-247 Issue 2 Section 5.2(b)	Mode 1	$\leq 8\text{dBm}/3\text{kHz}$	PASS
Antenna Requirement	RSS-Gen Issue 4 Section 8.3	N/A	RSS-Gen Issue 4	PASS

2.2. Test Frequency configuration:

Modulation Mode	Channel	Frequency	Channel	Frequency	Channel	Frequency
BLE	00	2402 MHz	19	2440 MHz	39	2480MHz

2.3. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

2.4. Measurement Uncertainty

Test Items	Uncertainty
AC Power Line Conducted Emission	$\pm 2.02\text{dB}$
Radiated Emission	Below 1GHz $\pm 3.8\text{ dB}$
	Above 1GHz $\pm 3.9\text{ dB}$
RF Antenna Port Conducted Emission	$\pm 1.27\text{dB}$
Radiated Emission Band Edge	$\pm 3.9\text{dB}$
Occupied Bandwidth	$\pm 1\text{kHz}$
Power Spectral Density	$\pm 1.27\text{dB}$


3. AC Power Line Conducted Emission

3.1. Test Equipment

AC Power Line Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2017.03.05	2018.03.04
Two-Line V-Network	R&S	ENV 216	101189	2016.07.16	2017.07.15
Two-Line V-Network	R&S	ENV 216	101044	2016.09.16	2017.09.15
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2016.09.16	2017.09.15
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2017.01.04	2018.01.03

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

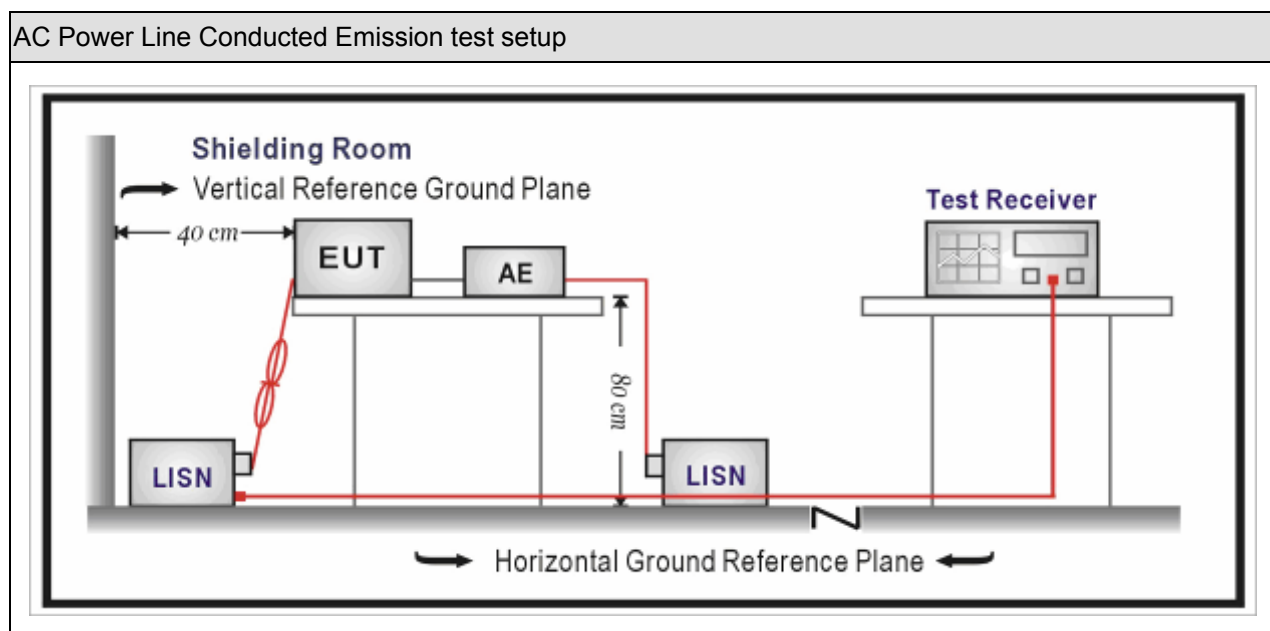

3.3. Limit


Frequency of Emission (MHz)	Conducted Limit	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Note 1: The lower limit shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

3.4. Test Procedure

Test Method			
	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices
☒	ANSI C63.4-2014	7	AC power-line conducted emission measurements


3.5. Test Result

Site: TR1	Time: 2017/04/21
Limit: FCC_Part15.107_CE_AC Power_ClassB	Margin: 0
Probe: ENV216-L1	Polarity: Line
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 2402MHz by BLE	

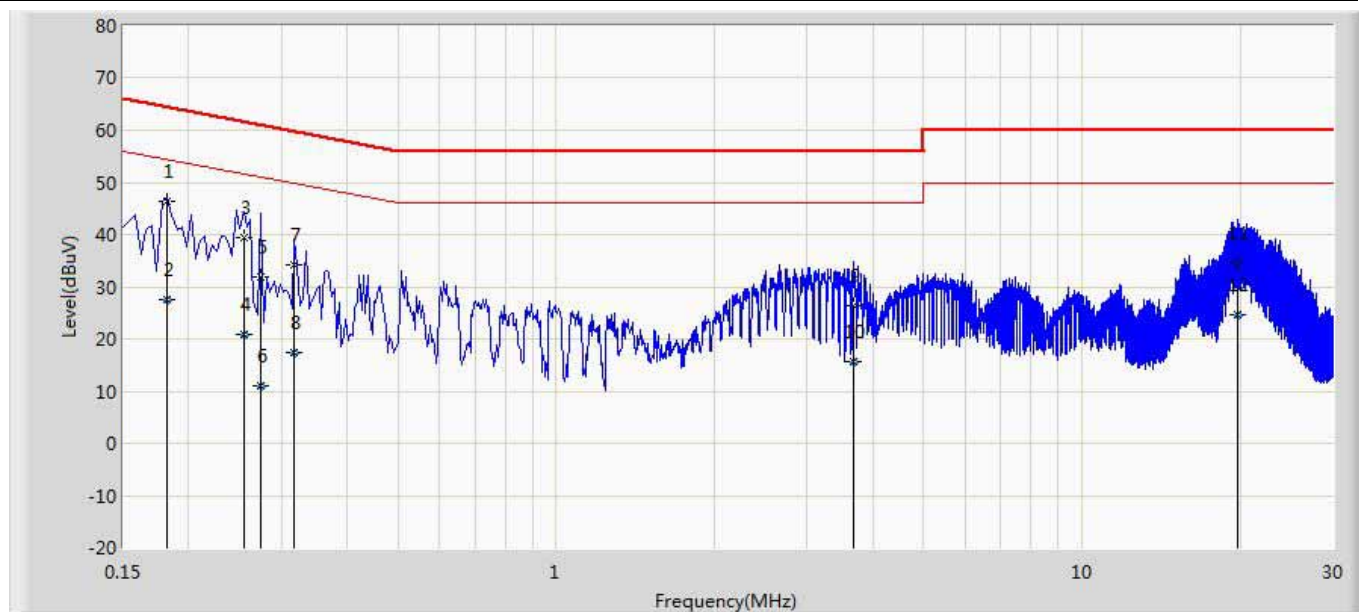

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1	*	0.182	46.313	36.598	-18.081	64.394	9.655	0.060	0.000	QP
2		0.182	27.447	17.732	-26.947	54.394	9.655	0.060	0.000	AV
3		0.254	39.359	29.651	-22.266	61.625	9.648	0.060	0.000	QP
4		0.254	20.852	11.144	-30.773	51.625	9.648	0.060	0.000	AV
5		0.274	31.760	22.058	-29.236	60.996	9.642	0.060	0.000	QP
6		0.274	11.054	1.352	-39.942	50.996	9.642	0.060	0.000	AV
7		0.318	34.152	24.452	-25.607	59.759	9.640	0.060	0.000	QP
8		0.318	17.312	7.612	-32.447	49.759	9.640	0.060	0.000	AV
9		3.666	26.272	16.482	-29.728	56.000	9.660	0.130	0.000	QP
10		3.666	15.544	5.754	-30.456	46.000	9.660	0.130	0.000	AV
11		19.782	34.351	24.151	-25.649	60.000	9.730	0.470	0.000	QP
12		19.782	24.585	14.385	-25.415	50.000	9.730	0.470	0.000	AV

Site: TR1	Time: 2017/04/21
Limit: FCC_Part15.107_CE_AC Power_ClassB	Margin: 0
Probe: ENV216-N	Polarity: Neutral
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 2402MHz by BLE	

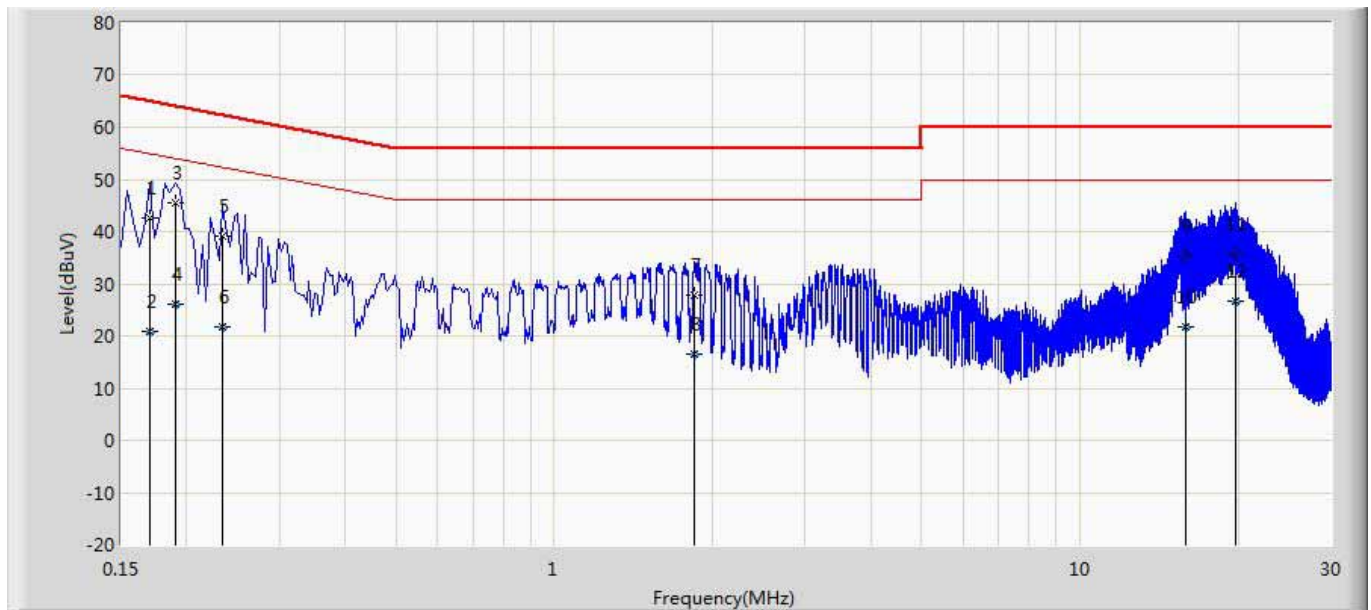

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.170	42.526	32.800	-22.434	64.960	9.666	0.060	0.000	QP
2		0.170	20.940	11.214	-34.020	54.960	9.666	0.060	0.000	AV
3	*	0.190	45.615	35.895	-18.422	64.037	9.660	0.060	0.000	QP
4		0.190	26.064	16.344	-27.973	54.037	9.660	0.060	0.000	AV
5		0.234	39.087	29.367	-23.220	62.307	9.660	0.060	0.000	QP
6		0.234	21.872	12.152	-30.435	52.307	9.660	0.060	0.000	AV
7		1.846	27.956	18.218	-28.044	56.000	9.640	0.098	0.000	QP
8		1.846	16.586	6.848	-29.414	46.000	9.640	0.098	0.000	AV
9		15.834	35.305	25.075	-24.695	60.000	9.840	0.390	0.000	QP
10		15.834	21.857	11.627	-28.143	50.000	9.840	0.390	0.000	AV
11		19.794	35.758	25.438	-24.242	60.000	9.850	0.470	0.000	QP
12		19.794	26.672	16.352	-23.328	50.000	9.850	0.470	0.000	AV

4. Emissions in restricted frequency bands


4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2017.03.29	2018.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2016.11.16	2017.11.15
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2016.10.16	2017.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2016.03.02	2018.03.01
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2017.01.03	2018.01.02
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2017.01.04	2018.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2017.05.06	2018.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2017.05.06	2018.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2017.01.22	2018.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2016.11.25	2017.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2017.03.02	2018.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2017.03.02	2018.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2017.03.02	2018.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2016.06.10	2017.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2017.01.04	2018.01.03
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

4.2. Test Setup


Below 30MHz Test Setup:

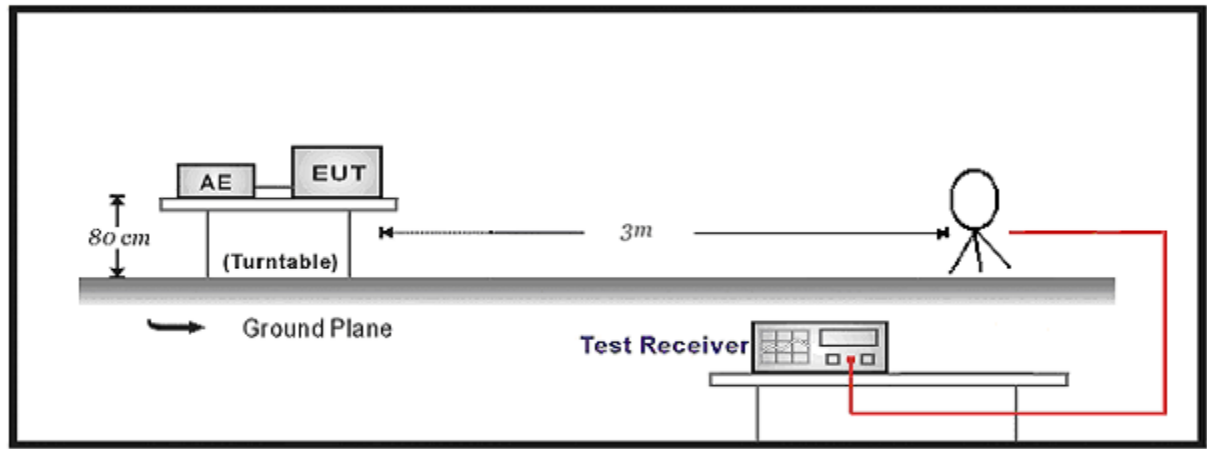

30MHz-1GHz Test Setup:

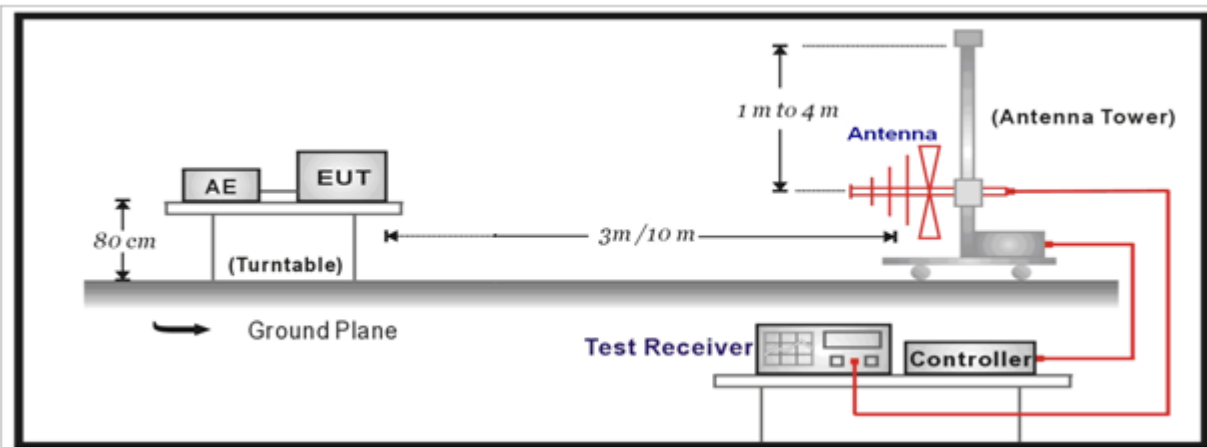

Above 1GHz Test Setup:

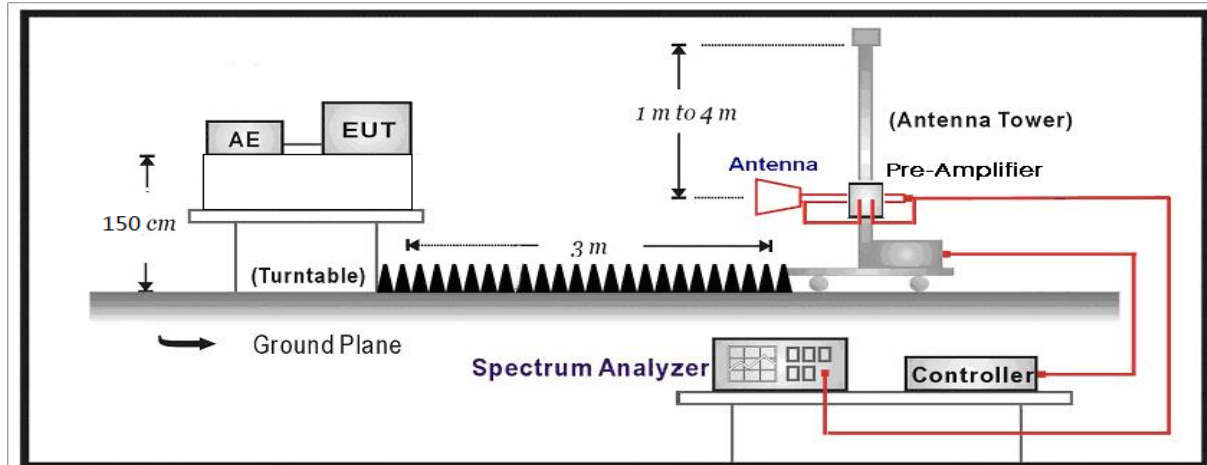

4.3. Limit

For FCC:

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

For IC:

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090-0.110	13.36-13.41	1645.5-1646.5	9.0-9.2
2.1735-2.1905	16.42-16.423	1660-1710	9.3-9.5
3.020-3.026	16.69475-16.69525	1718.8-1722.2	10.6-12.7
4.125-4.128	16.80425-16.80475	2200-2300	13.25-13.4
4.17725-4.17775	25.5-25.67	2310-2390	14.47-14.5
4.20725-4.20775	37.5-38.25	2655-2900	15.35-16.2
5.677-5.683	73-74.6	3260-3267	17.7-21.4
6.215-6.218	74.8-75.2	3332-3339	22.01-23.12
6.26775-6.26825	108-138	3345.8-3358	23.6-24.0
6.31175-6.31225	156.52475-156.52525	3500-4400	31.2-31.8
8.291-8.294	156.7-156.9	4500-5150	36.43-36.5
8.362-8.366	240-285	5350-5460	Above 38.6
8.37625-8.38675	322-335.4	7250-7750	
8.41425-8.41475	399.9-410	8025-8500	
12.29-12.293	608-614		
12.51975-12.52025	960-1427		
12.57675-12.57725	1435-1626.5		

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)






Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.4. Test Procedure

Test Method						
	References Rule		Chapter	Description		
☐	ANSI C63.10		11.11	Emissions in non-restricted frequency bands		
	☐	ANSI C63.10	11.11.2	Reference level measurement		
	☐	ANSI C63.10	11.11.3	Emission level measurement		
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands		
	☒	ANSI C63.10	11.12.1	Radiated emission measurements		
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test		
		☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz	
		☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz	
		☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz	
		☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure	
		☒	ANSI C63.10	11.12.2.4	Peak power measurement procedure	
		☒	ANSI C63.10	11.12.2.5	Average power measurement procedures	
			☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
			☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
			☒	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

4.5. EUT test Axis definition

Item	Emissions in restricted frequency bands			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐
	☐	Conducted		
	☐	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

4.6. Test Result

Product Name	:	Drivewell Tag SVR	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1	Test Site	:	AC-5
Test Date	:	2017.04.24			

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector
Ant 0	0	H	4804.000	42.799	5.835	48.634	54(Note3)	-5.366	PK
		H	7206.000	37.792	8.770	46.563	54(Note3)	-7.437	PK
		H	9608.000	37.959	10.451	48.410	54(Note3)	-5.590	PK
		V	4804.000	44.859	5.835	50.694	54(Note3)	-3.306	PK
		V	7206.000	38.265	8.770	47.036	54(Note3)	-6.964	PK
		V	9608.000	37.971	10.451	48.422	54(Note3)	-5.578	PK
	19	H	4880.000	42.344	6.113	48.456	54(Note3)	-5.544	PK
		H	7320.000	36.349	8.918	45.267	54(Note3)	-8.733	PK
		H	9760.000	35.757	10.523	46.279	54(Note3)	-7.721	PK
		V	4880.000	44.945	6.113	51.057	54(Note3)	-2.943	PK
		V	7320.000	38.304	8.918	47.222	54(Note3)	-6.778	PK
		V	9760.000	35.899	10.523	46.421	54(Note3)	-7.579	PK
	39	H	4960.000	42.199	6.108	48.307	54(Note3)	-5.693	PK
		H	7440.000	36.844	8.868	45.713	54(Note3)	-8.287	PK
		H	9920.000	34.927	10.937	45.864	54(Note3)	-8.136	PK
		V	4960.000	42.599	6.108	48.707	54(Note3)	-5.293	PK
		V	7440.000	38.480	8.868	47.349	54(Note3)	-6.651	PK
		V	9920.000	35.912	10.937	46.849	54(Note3)	-7.151	PK

Note: 1. Measure Level = Reading Level + Factor.


Note: 2. The test frequency range, 9kHz~30MHz, 18GHz~25GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.

Note: 3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Note: 4. The RBW set up, see Clause 6.6.


The worst case of Radiated Emission below 1GHz:

Site: AC2	Time: 2017/04/19
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 2402MHz by BLE	

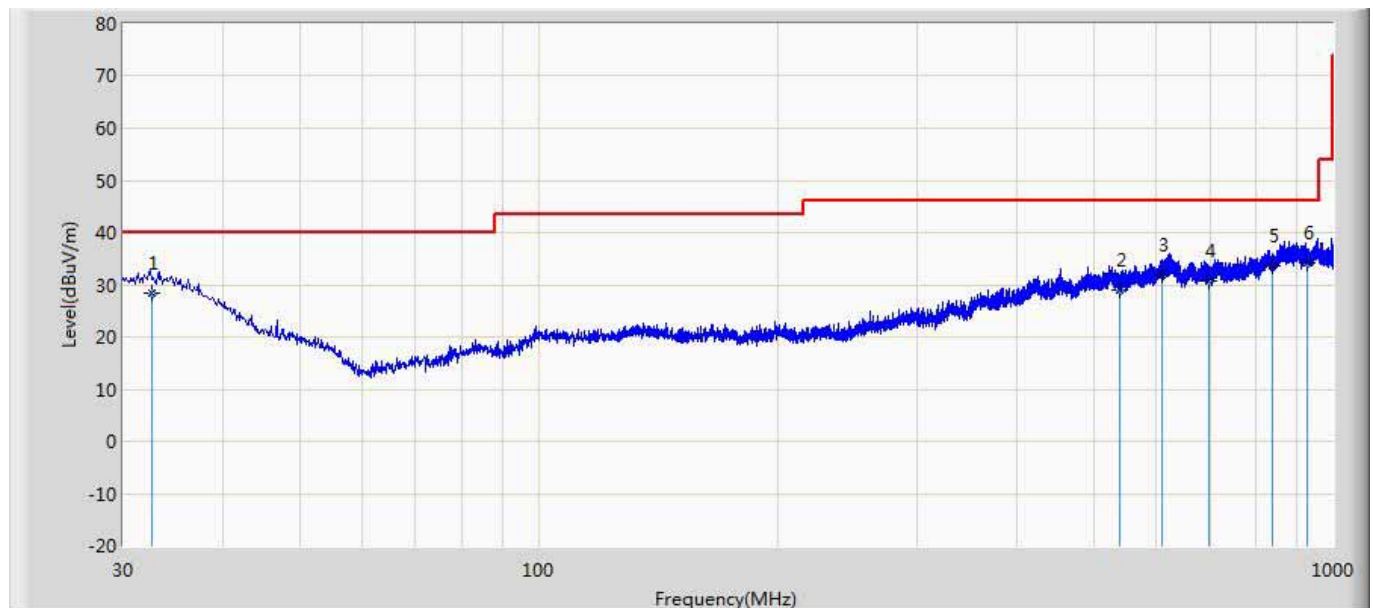

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1	*	32.546	28.275	0.900	-11.725	40.000	20.729	6.646	0.000	100	223	QP
2		539.977	29.002	1.279	-16.998	46.000	19.497	8.226	0.000	100	134	QP
3		608.605	31.818	2.313	-14.182	46.000	20.975	8.530	0.000	200	67	QP
4		698.330	30.661	1.393	-15.339	46.000	20.523	8.745	0.000	100	98	QP
5		838.616	33.499	2.245	-12.501	46.000	22.152	9.102	0.000	200	80	QP
6		928.705	34.113	1.615	-11.887	46.000	23.191	9.307	0.000	100	124	QP

Site: AC2	Time: 2017/04/19
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 2402MHz by BLE	

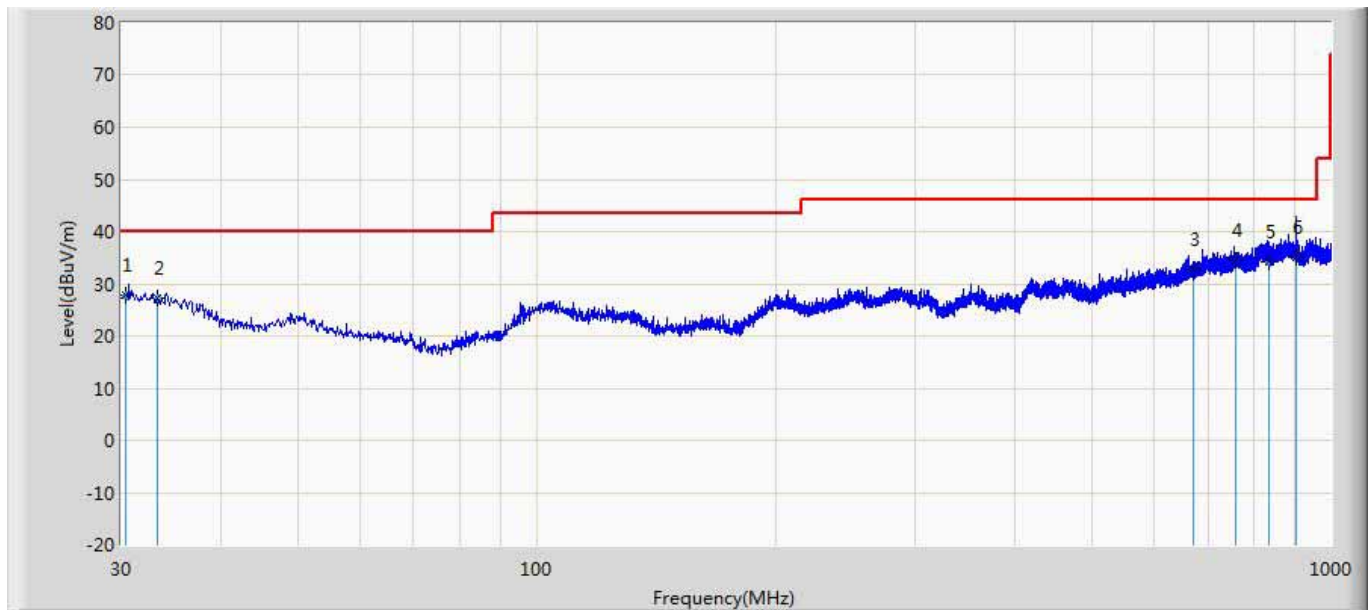


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		30.364	27.786	3.535	-12.214	40.000	17.627	6.624	0.000	100	232	QP
2		33.274	27.216	3.885	-12.784	40.000	16.677	6.654	0.000	100	60	QP
3		672.504	32.713	3.357	-13.287	46.000	20.673	8.683	0.000	200	126	QP
4		758.955	34.555	3.226	-11.445	46.000	22.427	8.902	0.000	100	266	QP
5		834.372	34.337	1.311	-11.663	46.000	23.933	9.092	0.000	200	65	QP
6	*	903.849	35.035	2.346	-10.965	46.000	23.431	9.258	0.000	100	345	QP

5. Emissions in non-restricted frequency bands

5.1. Test Equipment

Emissions in non-restricted frequency bands / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04	2018.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2017.04.09	2018.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2017.04.09	2018.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2017.04.10	2018.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

5.2. Test Setup

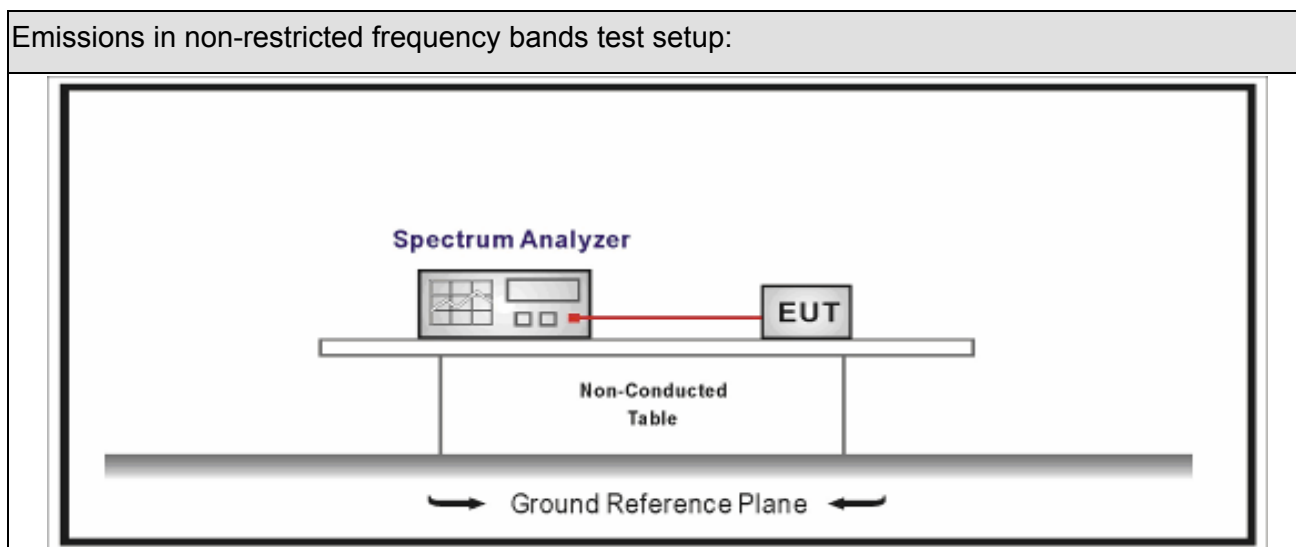




5.3. Limit

Un-Restricted Band Emissions Limit	
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30c(Note1)
RF Output power(PK detector)	20c(Note2)
Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc). Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).	

5.4. Test Procedure

Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.11	Emissions in non-restricted frequency bands
	☒	ANSI C63.10	11.11.2	Reference level measurement
	☒	ANSI C63.10	11.11.3	Emission level measurement
☐	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☐	ANSI C63.10	11.12.1	Radiated emission measurements
	☐	ANSI C63.10	11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10		6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10		6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☐	ANSI C63.10		6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☒	ANSI C63.10	11.12.2	Antenna-port conducted measurements
	☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		☒	ANSI C63.10	Peak power measurement procedure
		☐	ANSI C63.10	Average power measurement procedures
	☐	☐	ANSI C63.10	11.12.2.5.1 Trace averaging with continuous EUT transmission at full power
		☐	ANSI C63.10	11.12.2.5.2 Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		☐	ANSI C63.10	11.12.2.5.3 Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

5.5. EUT test Axis definition

Item	Emissions in non-restricted frequency bands			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				


5.6. Test Result

Product Name	: Drivewell Tag SVR	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2017.04.18		

Mode	Channel	Test Frequency (MHz)	In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	4.477	2399.885	-36.342	40.819	>20	Pass
1	39	2480	5.125	2500.00	-63.432	68.557	>20	Pass

Note: The worst case of Emissions in non-restricted frequency bands as below:

Mode 1 CH00 (2402MHz)

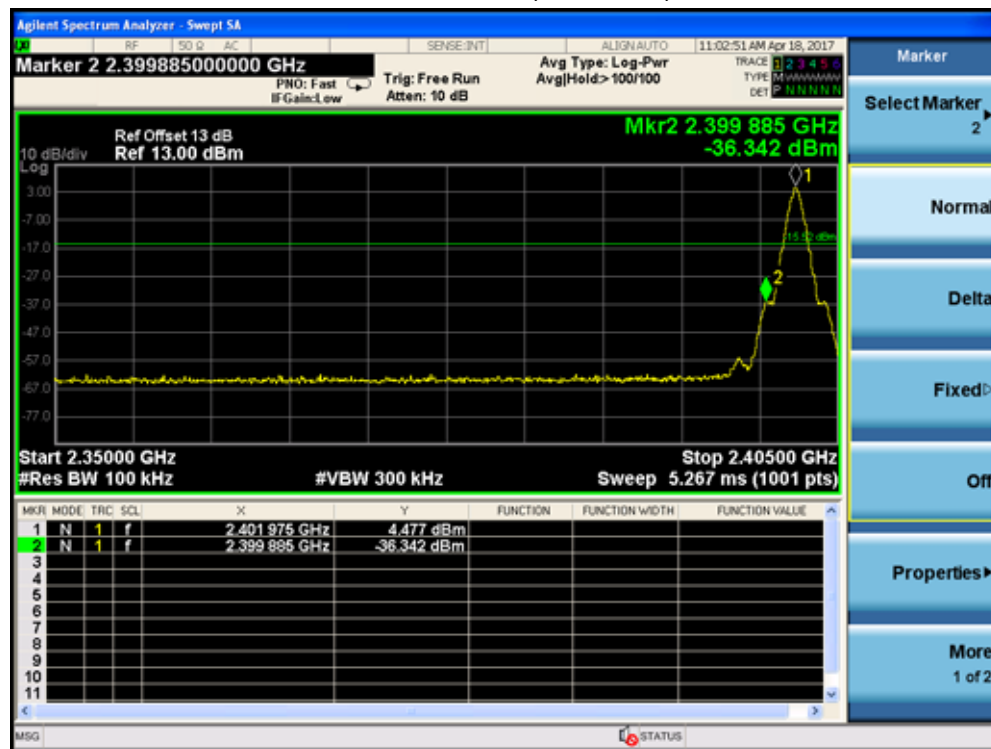


6. Radiated Emission Band Edge

6.1. Test Equipment

Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2016.07.16	2017.07.15
Pre-Amplifier	Miteq	NSP1800-25	1364185	2016.05.03	2017.05.02
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2016.07.12	2017.07.11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2016.09.18	2017.09.17
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2017.02.28	2018.02.27
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2017.02.28	2018.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2017.01.05	2018.01.04

6.2. Test Setup

Above 1GHz Test Setup:

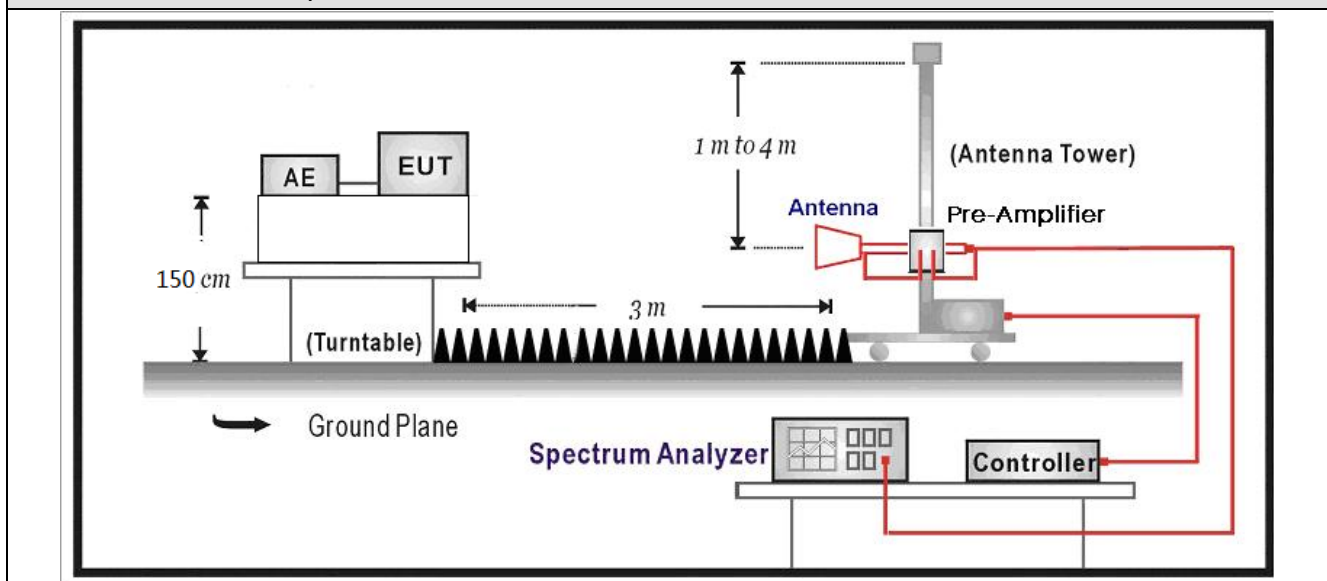

6.3. Limit

Band edge Limit




Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

6.4. Test Procedure

Test Method						
	References Rule			Chapter	Description	
☒	ANSI C63.10			6.10	Band-edge testing	
	☒	ANSI C63.10		6.10.5	Restricted-band band-edge measurements	
	☐	ANSI C63.10		6.10.6	Marker-delta method	
☒	ANSI C63.10			11.12	Emissions in restricted frequency bands	
	☒	ANSI C63.10		11.12.1	Radiated emission measurements	
	☒	ANSI C63.10		11.12.2.7	Radiated spurious emission test	
☐	ANSI C63.10			6.4	Radiated emissions from unlicensed wireless devices below 30 MHz	
☐	ANSI C63.10			6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz	
☒	ANSI C63.10			6.6	Radiated emissions from unlicensed wireless devices above 1 GHz	
		☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure	
		☒	ANSI C63.10	11.12.2.4	Peak power measurement procedure	
		☒	ANSI C63.10	11.12.2.5	Average power measurement procedures	
			☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
			☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
			☒	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


6.5. EUT test definition

Item	Radiated Emission Band Edge			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐
	☐	Conducted		
	☐	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

6.6. Duty Cycle


Test Mode	Tx On (ms)	Tx Off (ms)	Reduced VBW (kHz)	Tx On + Tx Off (ms)	Duty Cycle
BLE	N/A	N/A	10Hz	N/A	100%

BLE

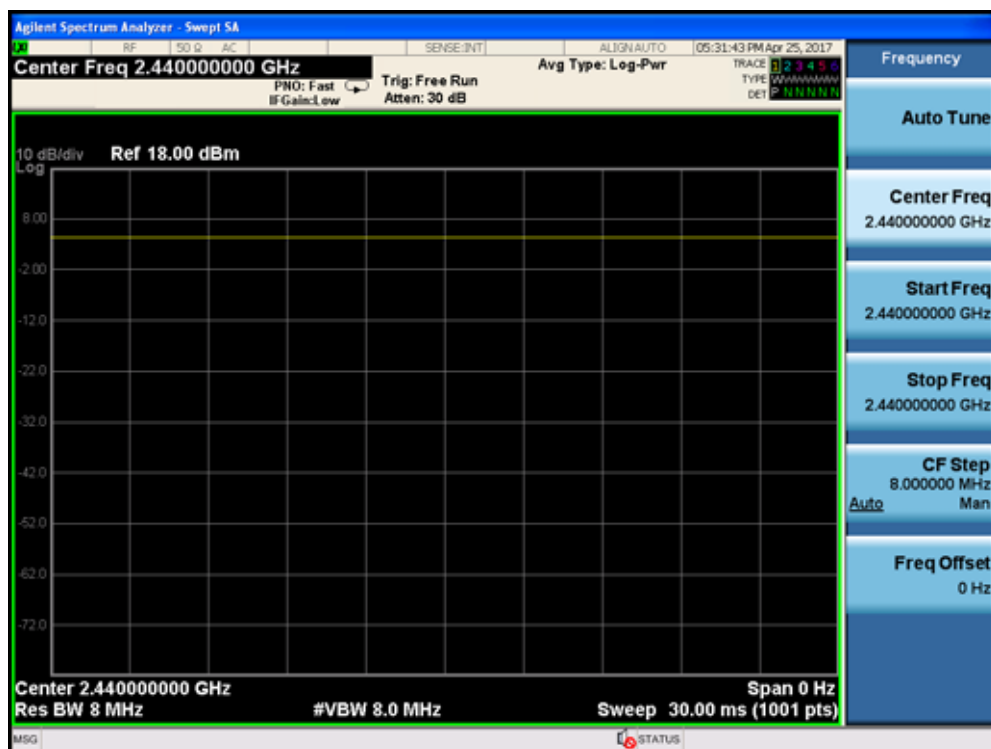


6.7 Test Result

Site: AC5	Time: 2017/04/24 - 17:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

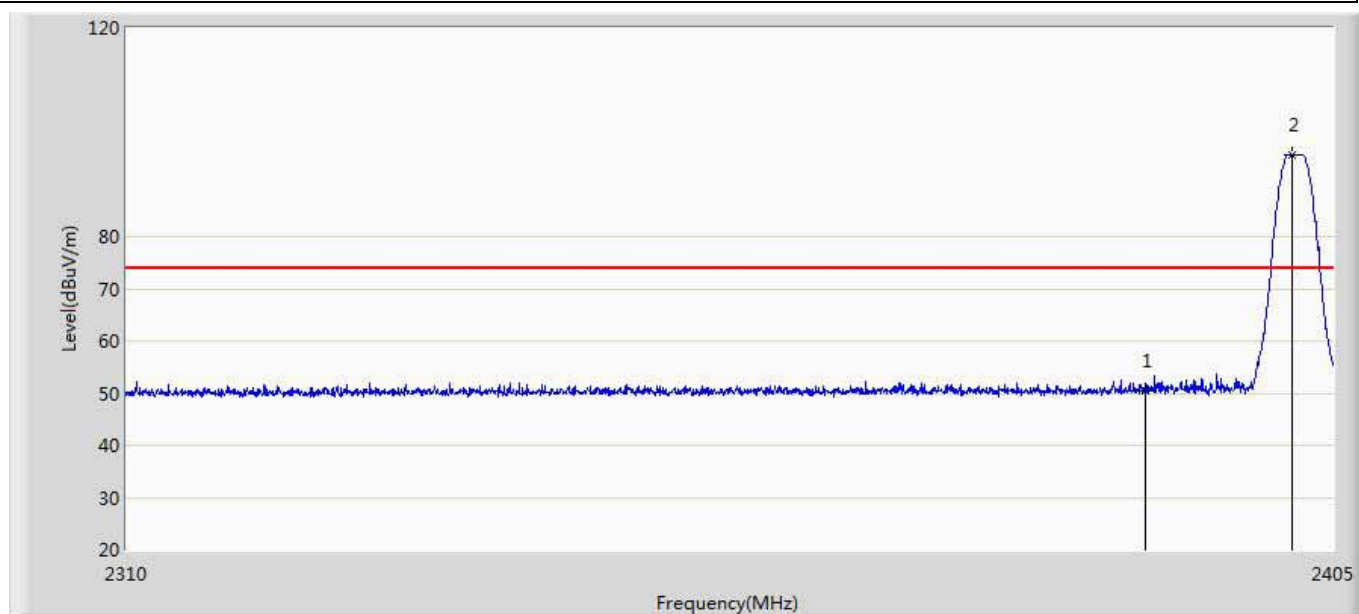


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.300	14.618	-23.700	74.000	35.682	PK
2	*	2401.770	95.662	59.950	21.662	74.000	35.712	PK

Site: AC5	Time: 2017/04/24 - 17:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

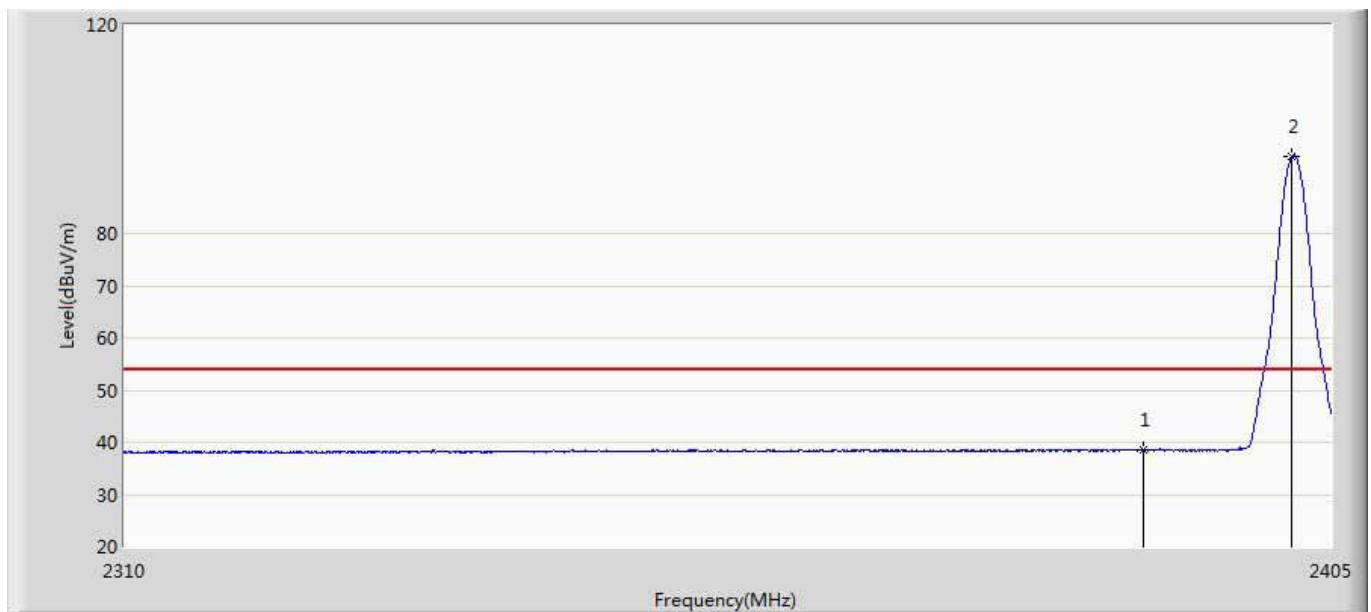


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.645	2.963	-15.355	54.000	35.682	AV
2	*	2401.865	94.749	59.037	40.749	54.000	35.712	AV

Site: AC5	Time: 2017/04/24 - 17:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

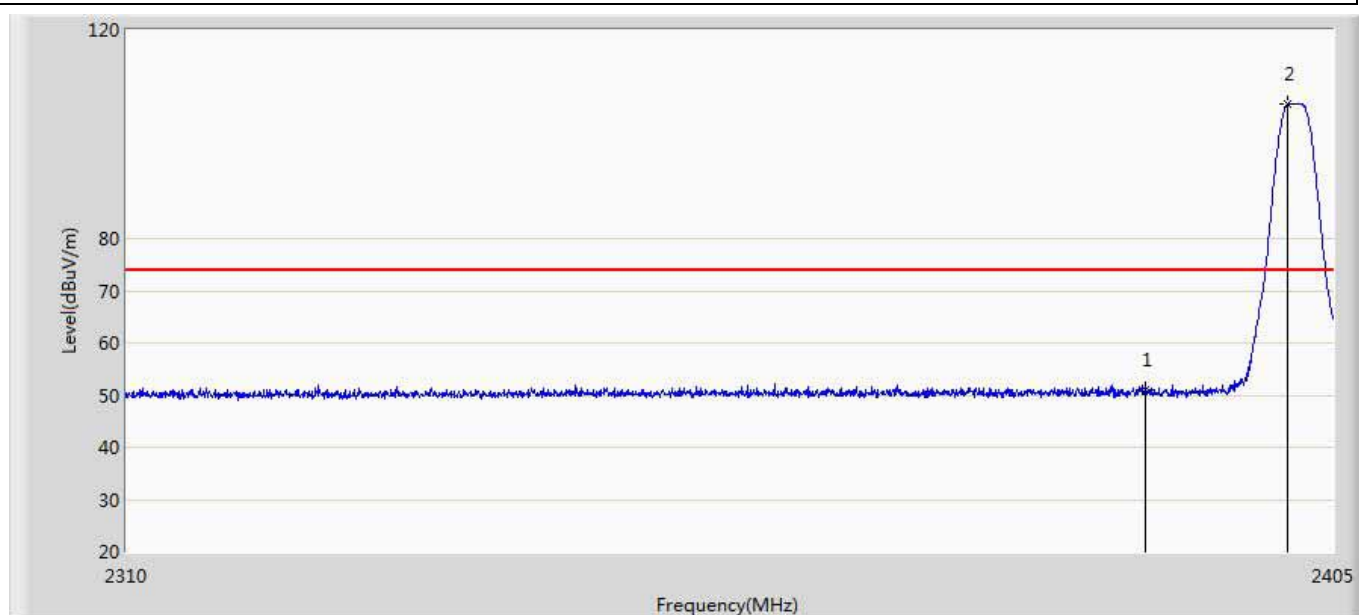


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.069	15.387	-22.931	74.000	35.682	PK
2	*	2401.343	105.721	70.010	31.721	74.000	35.711	PK

Site: AC5	Time: 2017/04/24 - 17:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

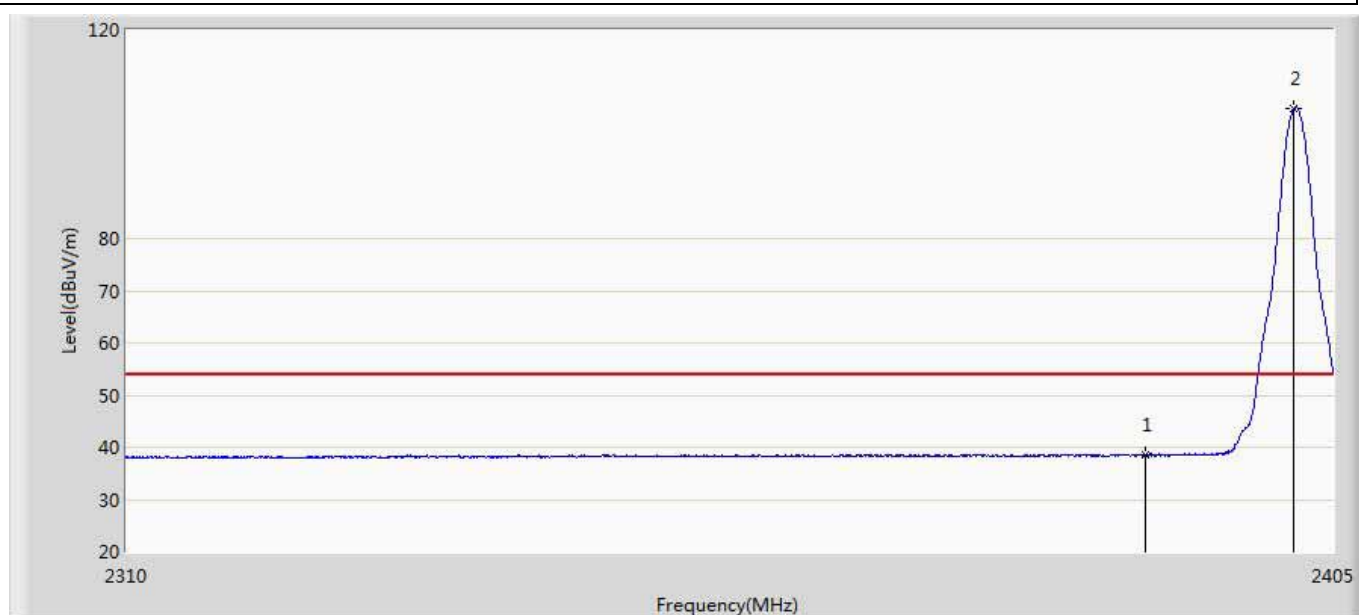


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.520	2.838	-15.480	54.000	35.682	AV
2	*	2401.865	104.946	69.234	50.946	54.000	35.712	AV

Site: AC5	Time: 2017/04/24 - 17:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

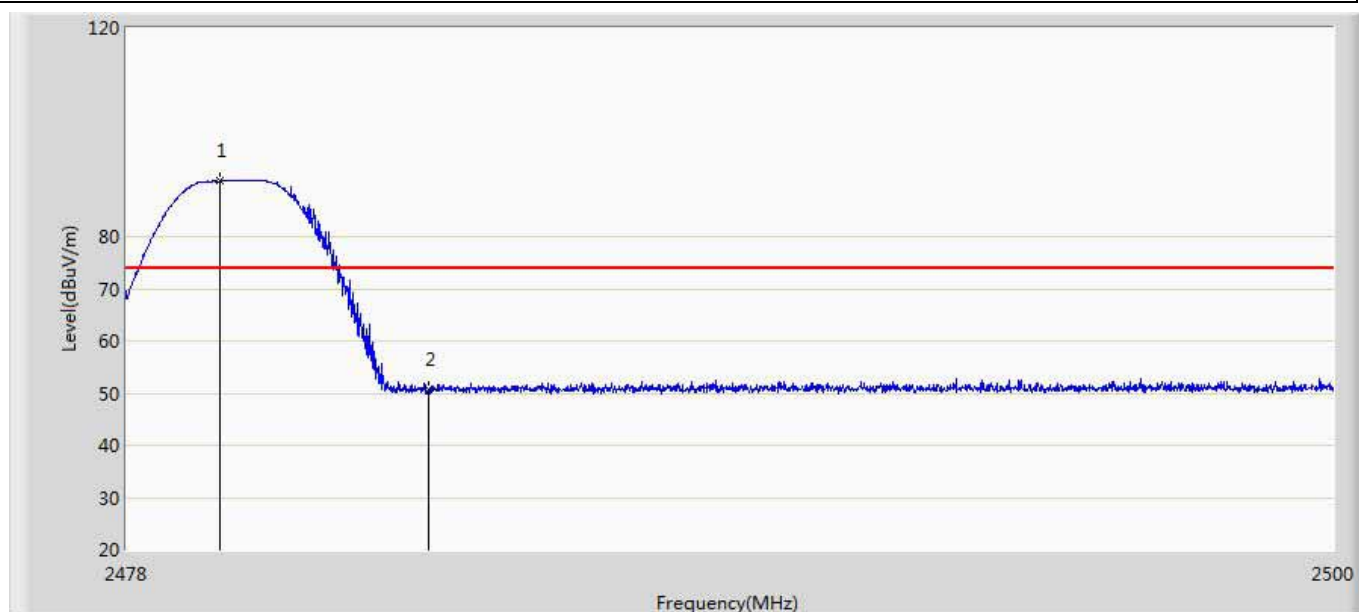


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.705	90.581	54.717	16.581	74.000	35.864	PK
2		2483.500	50.624	14.732	-23.376	74.000	35.891	PK

Site: AC5	Time: 2017/04/24 - 17:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

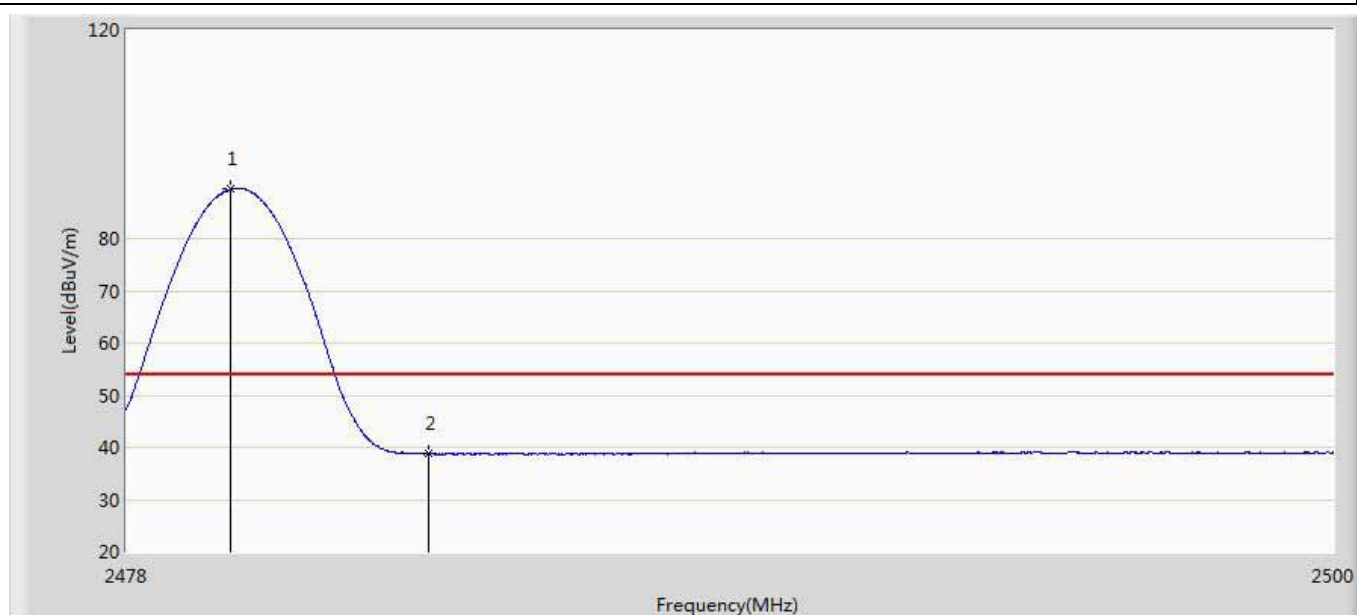


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.892	89.439	53.573	35.439	54.000	35.866	AV
2		2483.500	38.769	2.877	-15.231	54.000	35.891	AV

Site: AC5	Time: 2017/04/24 - 17:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

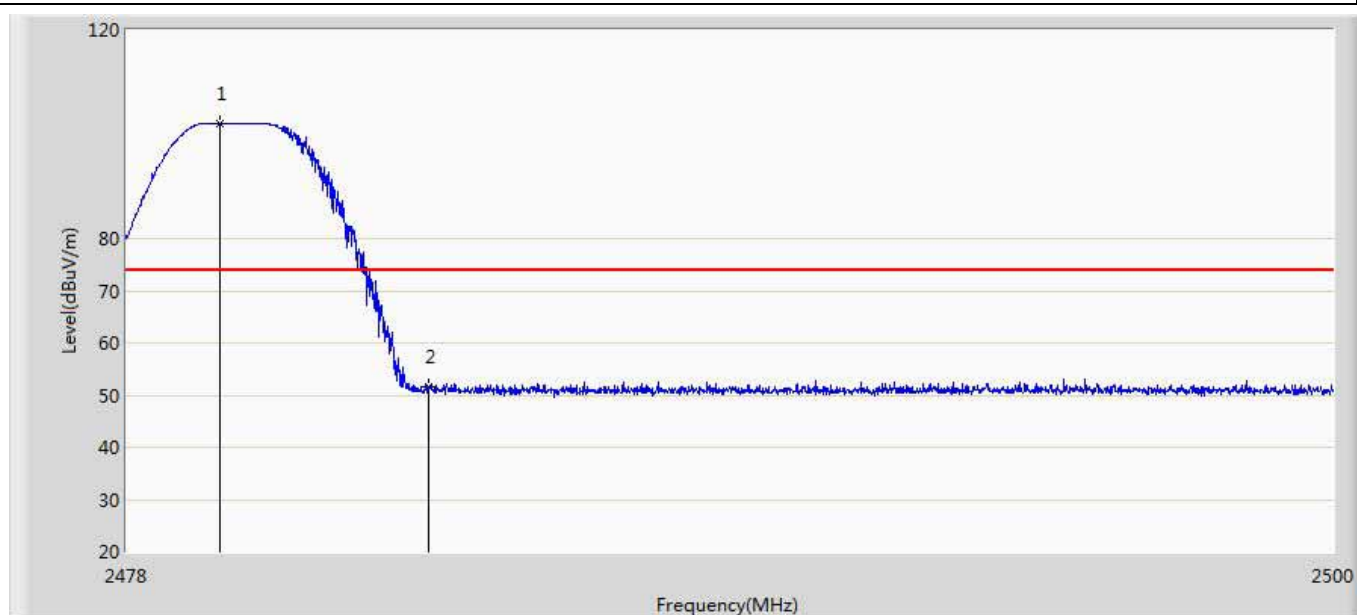

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.705	102.146	66.282	28.146	74.000	35.864	PK
2		2483.500	51.619	15.727	-22.381	74.000	35.891	PK

Site: AC5	Time: 2017/04/24 - 17:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Drivewell Tag SVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

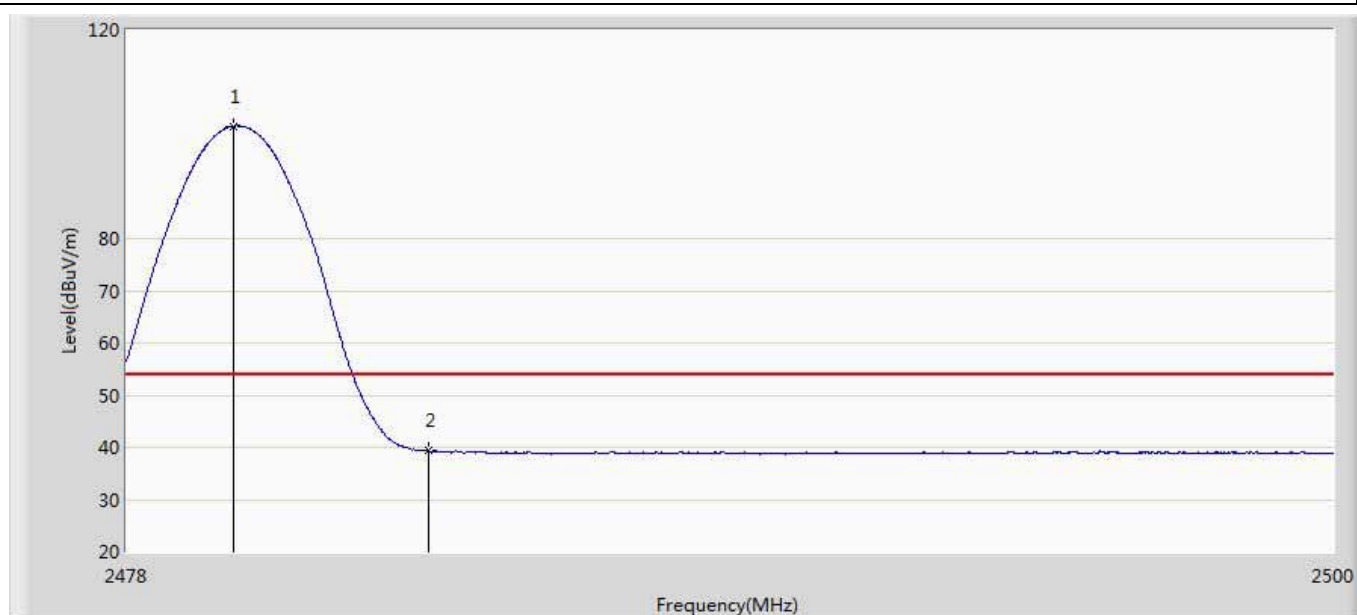


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.936	101.536	65.670	47.536	54.000	35.866	AV
2		2483.500	39.297	3.405	-14.703	54.000	35.891	AV

7. Occupied Bandwidth

7.1. Test Equipment

Occupied Bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04	2018.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2017.04.09	2018.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2017.04.09	2018.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2017.04.10	2018.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

7.2. Test Setup

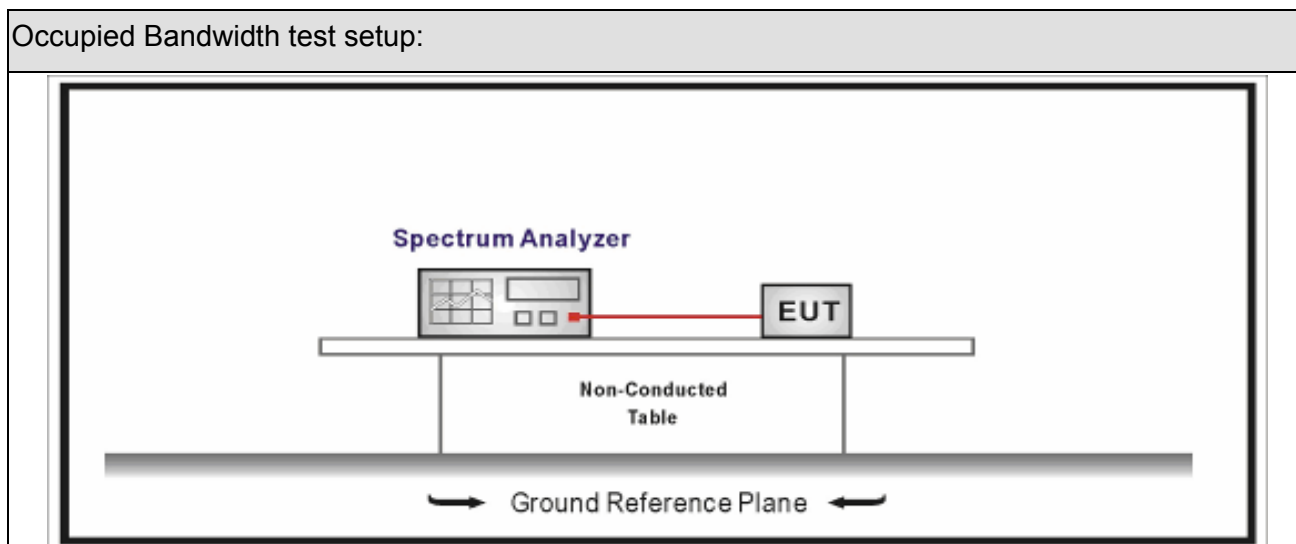

7.3. Limit





Occupied Bandwidth

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

7.4. Test Procedure

Test Method				
	Reference Rule		Chapter	Description
☒	ANSI C63.10		11.8	DTS bandwidth
	☐	ANSI C63.10	11.8.1	Option 1
	☒	ANSI C63.10	11.8.2	Option 2

7.5. EUT test definition

Item	Occupied Bandwidth			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				


7.6. Test Result

Product Name	: Drivewell Tag SVR	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2017.04.18		

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (kHz)	Limit (kHz)	Result
1	00	2402	732.7	>500	Pass
1	19	2440	788.2	>500	Pass
1	39	2480	790.2	>500	Pass

Note : The worst case of Occupied Bandwidth as below:

Mode 1 CH00 (2402MHz)

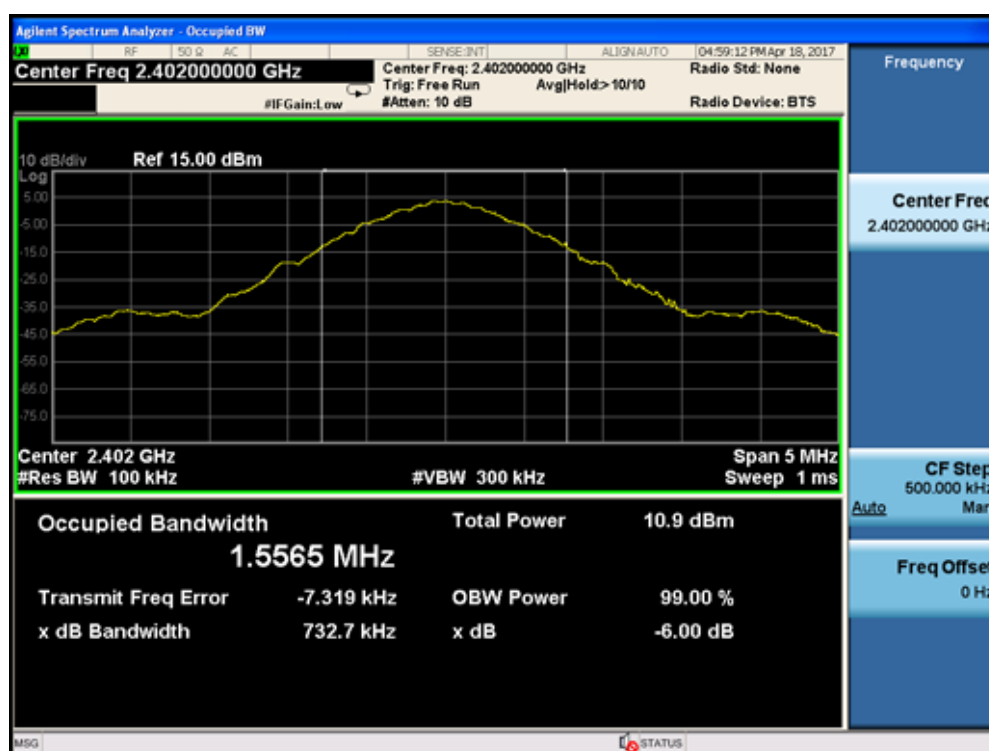


8. Fundamental emission output power

8.1. Test Equipment

Fundamental emission output power/ TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2017.01.04	2018.01.03
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.01.04	2018.01.03
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2016.10.14	2017.10.13
Power Sensor	Anritsu	MA2411B	0846014	2016.10.14	2017.10.13
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2017.04.10	2018.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

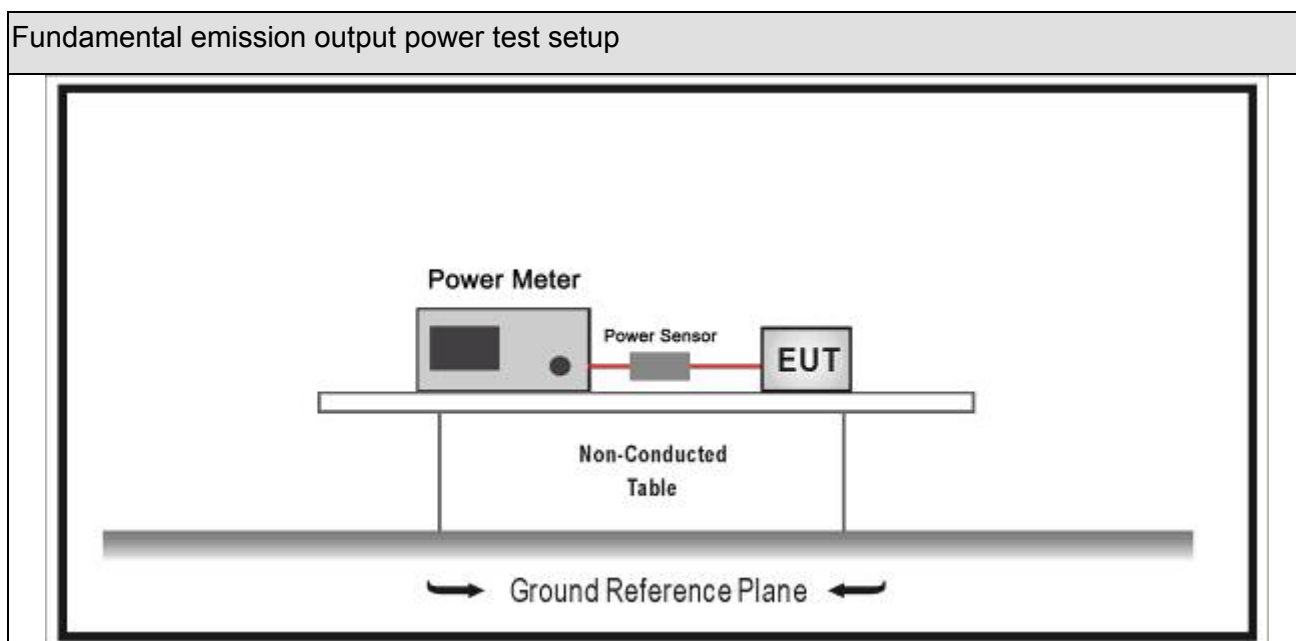




8.3. Limit

Fundamental emission output power Limit			
☒	$G_{TX} < 6\text{dBi}$		$P_{out} \leq 30\text{dBm}$
☐	$G_{TX} > 6\text{dBi}$		
	☐	Non-Fix point-point	$P_{out} \leq 30 - (G_{TX} - 6)$
	☐	Fix point-point	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	☐	Point-to-multipoint	$P_{out} \leq 30 - (G_{TX} - 6)$
	☐	Overlap Beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	☐	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	☐	single directional beam	$P_{out} \leq 30 - [(G_{TX} - 6)]/3 + 8\text{dB}$
Note 1 : G_{TX} directional gain of transmitting antennas.			
Note 2 : P_{out} is maximum peak conducted output power .			

8.4. Test Procedure

Fundamental emission output power Test Method						
	References Rule			Chapter	Description	
☒	ANSI C63.10			11.9	Fundamental emission output power	
	☒	ANSI C63.10		11.9.1	Maximum peak conducted output power	
		☐	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth	
		☐	ANSI C63.10	11.9.1.2	Integrated band power method	
		☒	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	☐	ANSI C63.10		11.9.2	Maximum conducted (average) output power	
		☐	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)
			☐	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
		☐	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
			☐	ANSI C63.10	11.9.2.3.1	Method AVGPM
			☐	ANSI C63.10	11.9.2.3.2	Method AVGPM-G

8.5. EUT test definition

Item	Fundamental emission output power			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

8.6. Test Result

Product Name	:	Drivewell Tag SVR	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1	Test Site	:	TR-8
Test Date	:	2017.04.18			


Mode	Channel	Test Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	00	2402	5.265	30	Pass
1	19	2440	5.693	30	Pass
1	39	2480	6.340	30	Pass

9. Power Spectral Density

9.1. Test Equipment

Power Spectral Density / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04	2018.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2017.04.09	2018.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2017.04.09	2018.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2017.04.10	2018.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

9.2. Test Setup

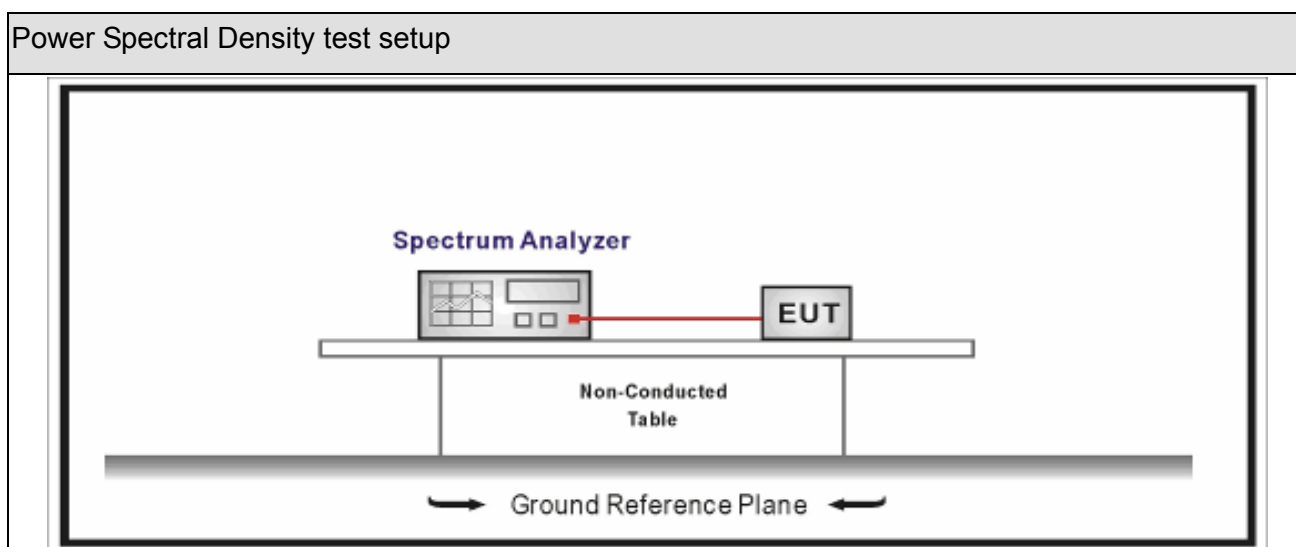




9.3. Limit

Power Spectral Density Limit
Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

9.4. Test Procedure

Power Spectral Density Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

9.5. EUT test definition

Item	Power Spectral Density Test Method			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

9.6. Test Result

Product Name	: Drivewell Tag SVR	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2017.04.18		

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
1	00	2402	-2.114	-2.114	8	Pass
1	19	2440	-1.678	-1.678	8	Pass
1	39	2480	-0.909	-0.909	8	Pass

Note : The worst case of Power Spectral Density as below:

Mode 1 CH39(2480MHz)



10. Antenna Requirement

10.1. Limit

Antenna Requirement Limit	
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	

10.2. Antenna Connector Construction

Antenna Connector Construction	
☒	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☐	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

_____ The End _____