

FCC §1.1307 (b) (3) & §2.1091- MPE-Based Exemption

Applicable Standard

According to subpart 1.1307 (b) (3) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSU26	200982	2022/07/04	2023/07/03
Keysight	MXA Signal Analyzer	N9020A	MY59362526	2022/10/07	2023/10/06
Agilent	USB wideband power sensor	U2021XA	MY54250003	2022/06/27	2023/06/26
WEINSCHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
AGILENT	Vector Signal Generator	N5182B	MY53052129	2022/11/25	2023/11/24
Keysight	Frequency Extender	N5182BX07	MY59362537	2022/11/14	2023/11/13
Mini-Circuits	Power Splitter	DC-18000MHz	SF10944151S	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

TEST EQUIPMENT LIST


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13

SUMMARY OF TEST RESULTS


FCC Rules	Description of Test	Result
FCC §1.1307 (b) (3) & §2.1091	MPE-Based Exemption	Compliant
§15.203	Antenna Requirement	Compliant
§15.407(b)(9)& §15.207(a)	Conducted Emissions	Compliant
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§15.407(a) (10)	26 dB Emission Bandwidth & 99% Occupied bandwidth	Compliant
§15.407(a) (8)	Conducted Transmitter Output Power	Compliant
§15.407 (a) (8)	Power Spectral Density	Compliant
§15.407 (b) (7)	In-Band Emissions	Compliant
§15.407 (d) (6)	Contention Based Protocol	Compliant

Block Diagram of Test Setup

For conducted emission;

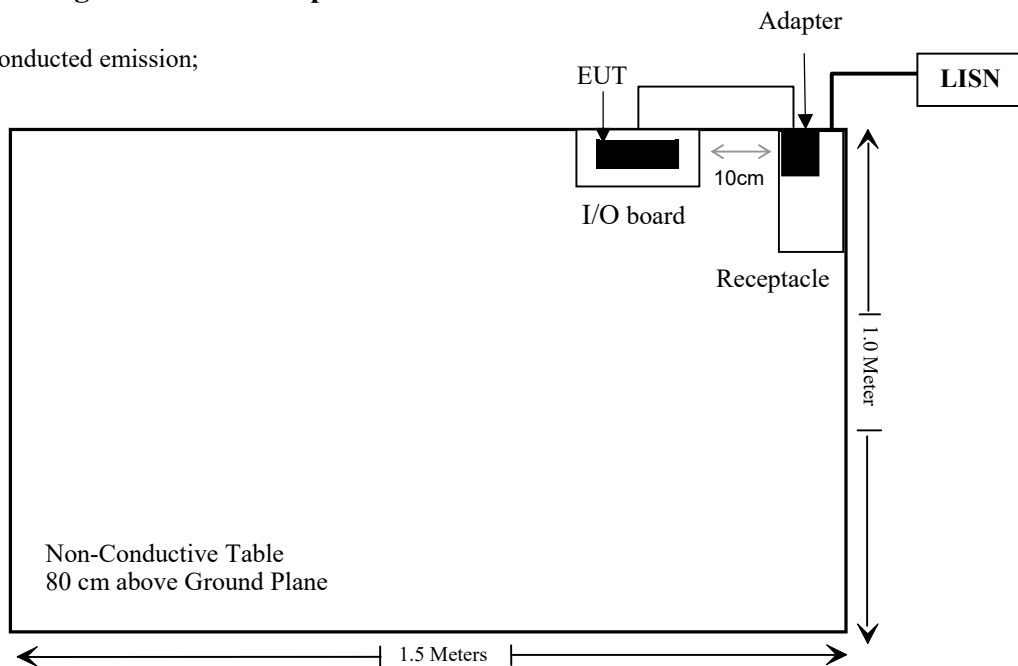

For Radiated Emissions:

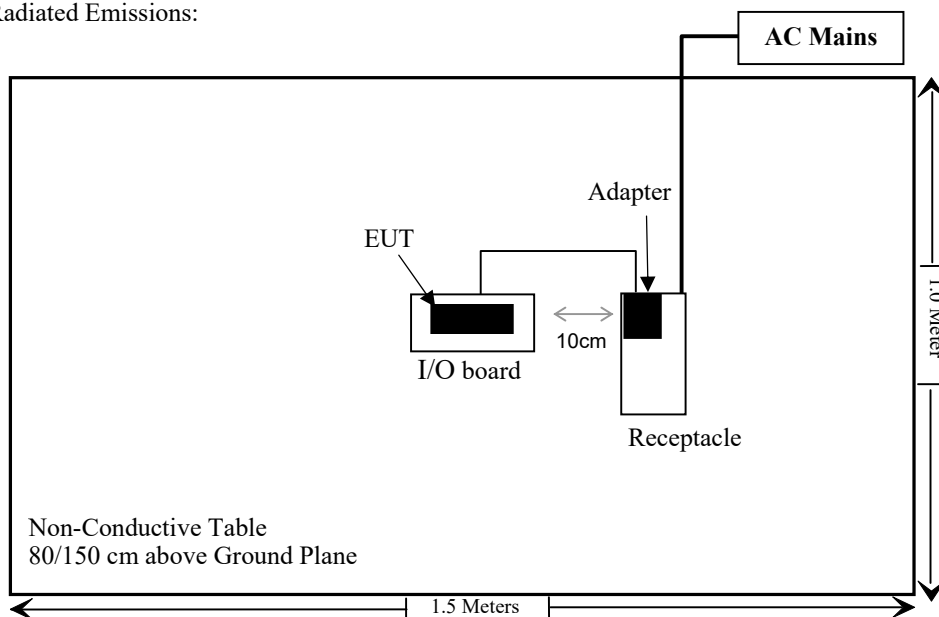

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
LIANYUNDA	Adapter	LYD120200B	Unkown
Thundercomm Technology Co., Ltd	Test jig	I/O board	Unkown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable DC Cable	1.0	EUT	Adapter

802.11AX_HE80_CH215_7025MHz

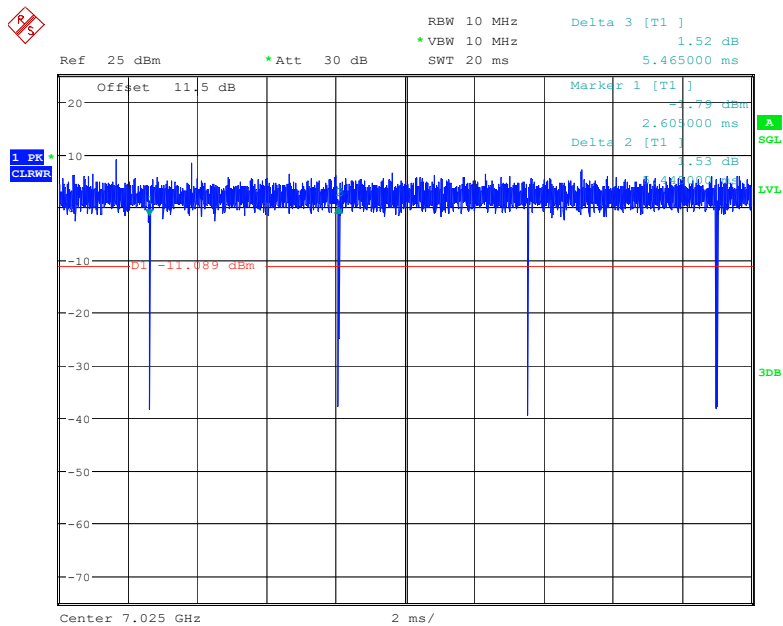


Date: 15.FEB.2023 19:11:07

802.11AX_HE160_CH207_6985MHz

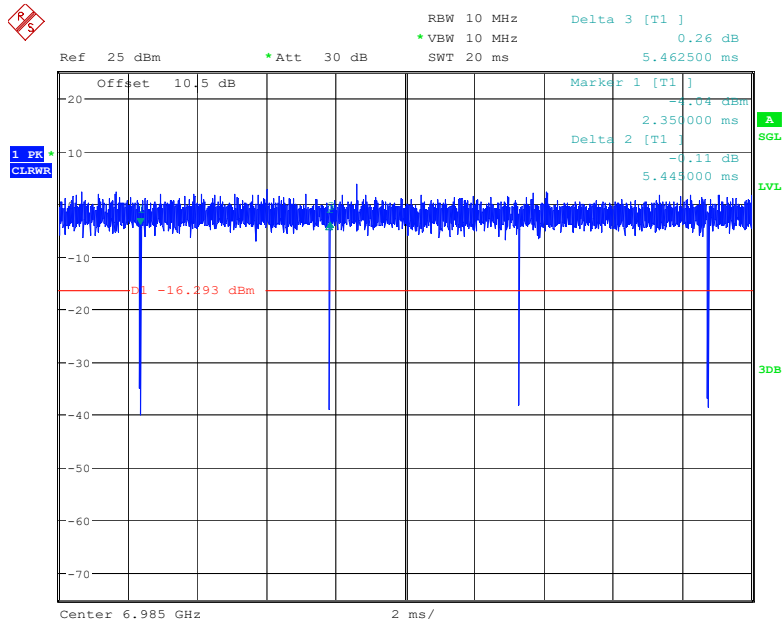


Date: 13.FEB.2023 23:34:09

802.11AX_HE20_CH189_6895MHz

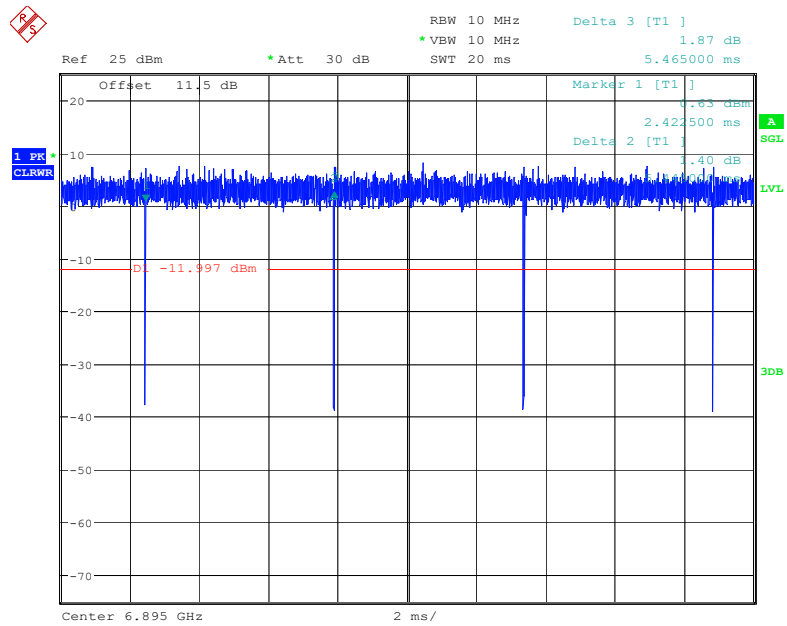


Date: 15.FEB.2023 20:09:52


802.11AX_HE40_CH203_6965MHz

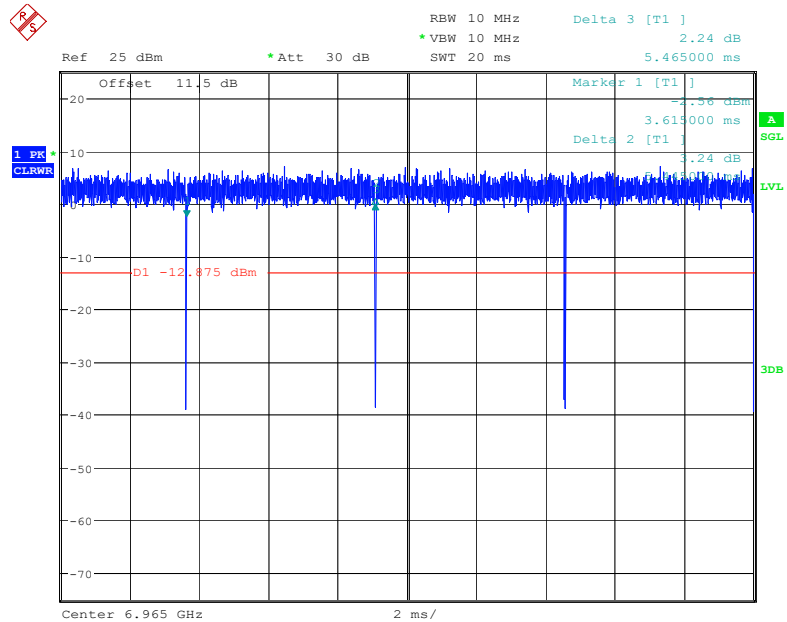

Date: 15.FEB.2023 19:29:14

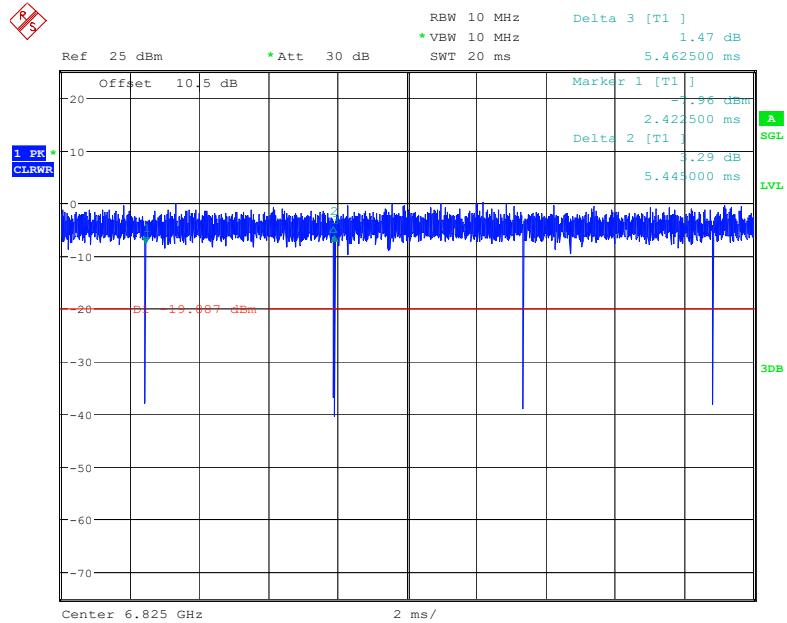
802.11AX_HE160_CH175_6825MHz

Date: 13.FEB.2023 23:37:05

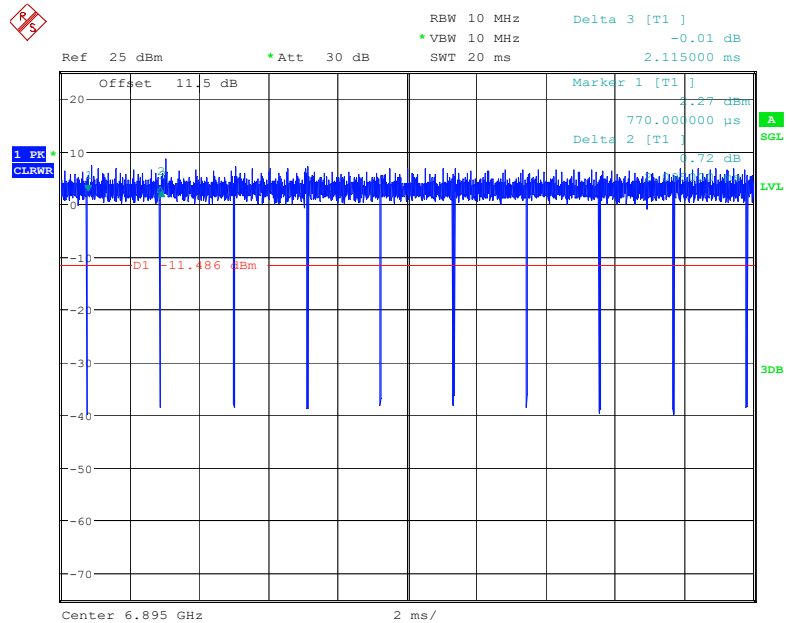6875MHz -7125 MHz:**802.11 11A_CH189_6895MHz**


Date: 15.FEB.2023 20:33:13

802.11AX_HE40_CH147_6685MHz

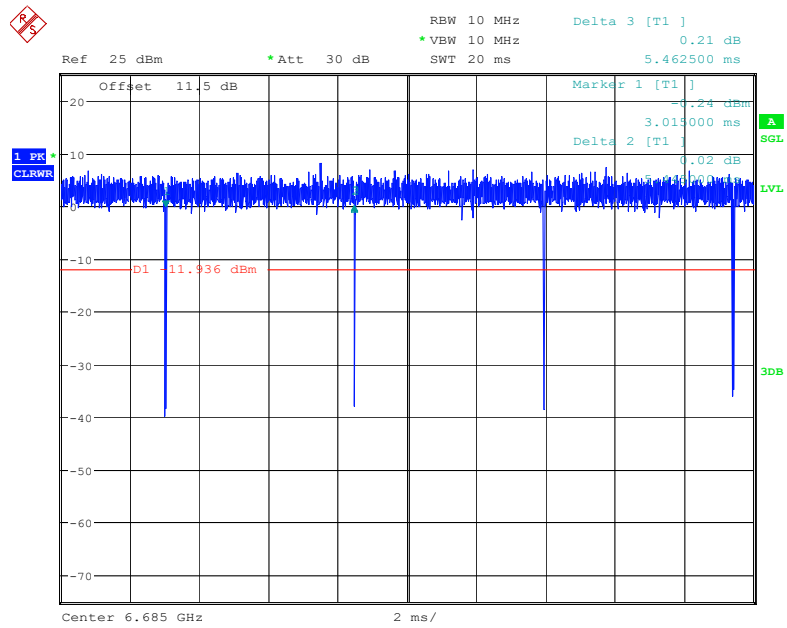

Date: 15.FEB.2023 18:30:05

802.11AX_HE80_CH167_6785MHz

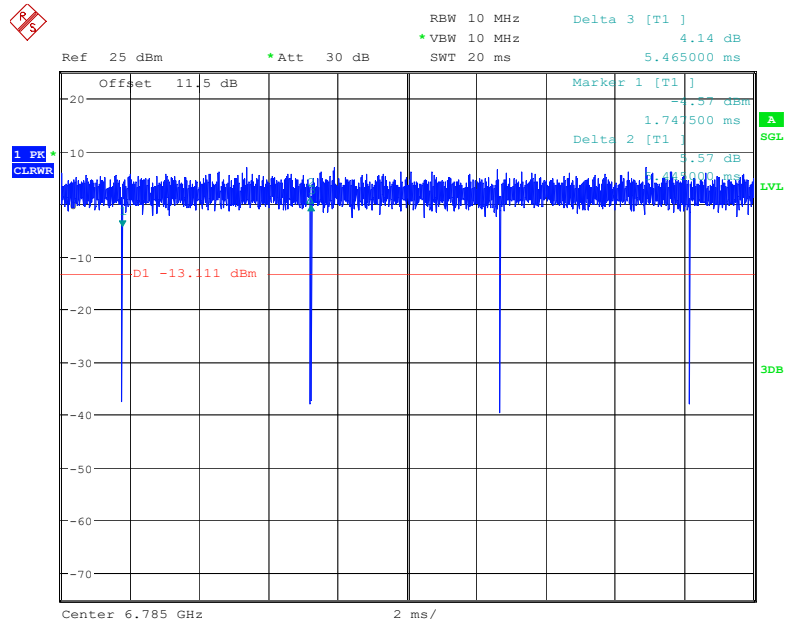

Date: 15.FEB.2023 18:56:28