



# FCC Test Report

## FCC Part 22 & 24 / RSS 132 & 133

FOR:

**Handheld Computer with GSM/GPRS**

**MODEL #: D7900LUPE, D7900LU0E,  
D7900BUPE, D7900BU0E**

**Hand Held Products, Inc.  
700 Vision Drive  
Skaneateles Falls, NY 13153  
U.S.A**

**FCC IDs: HD57900BU0E, HD57900LU0E, HD57900BUPE and HD57900LUPE  
IC ID: 1693B-79E**

**TEST REPORT #: EMC\_handh\_015\_06002\_fcc22\_24  
DATE: 7/28/2006**



Certificate # 2135.01



**TTI-P-G 081/94-A0**  
Accredited according to  
**ISO/IEC 17025**



**Bluetooth  
Qualification Test  
Facility  
(BQTF)**



**FCC listed#  
101450**

**IC recognized #  
3925**

### **CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

## **Table of Contents**

<b>1</b>	<b>ASSESSMENT .....</b>	<b>3</b>
<b>2</b>	<b>ADMINISTRATIVE DATA.....</b>	<b>4</b>
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT .....	4
2.2	IDENTIFICATION OF THE CLIENT .....	4
2.3	IDENTIFICATION OF THE MANUFACTURER .....	4
<b>3</b>	<b>EQUIPMENT UNDER TEST (EUT) .....</b>	<b>5</b>
3.1	IDENTIFICATION OF THE EQUIPMENT UNDER TEST .....	5
<b>4</b>	<b>SUBJECT OF INVESTIGATION.....</b>	<b>6</b>
<b>5</b>	<b>MEASUREMENTS.....</b>	<b>7</b>
5.1	RF POWER OUTPUT .....	7
5.1.1	<i>FCC 2.1046 Measurements required: RF power output.....</i>	<i>7</i>
5.1.2	<i>Limits: .....</i>	<i>7</i>
5.1.2.1	FCC 22.913 (a) Effective radiated power limits. ....	7
5.1.2.2	FCC 24.232 (b)(c) Power limits. ....	7
5.1.3	<i>Radiated Output Power Measurement procedure:.....</i>	<i>8</i>
5.1.4	<i>ERP Results 850 MHz band: .....</i>	<i>9</i>
5.1.5	<i>EIRP Results 1900 MHz band:.....</i>	<i>9</i>
5.2	SPURIOUS EMISSIONS RADIATED .....	16
5.2.1	<i>FCC 2.1053 Measurements required: Field strength of spurious radiation.....</i>	<i>16</i>
5.2.2	<i>Limits: .....</i>	<i>16</i>
5.2.2.1	FCC 22.917 Emission limitations for cellular equipment. ....	16
	FCC 24.238 Emission limitations for Broadband PCS equipment. ....	16
5.2.3	<i>Radiated out of band measurement procedure: .....</i>	<i>18</i>
5.3	RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 & 133 .....	39
5.3.1	<i>Receiver Spurious on EUT.....</i>	<i>40</i>
	<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS .....</b>	<b>43</b>
<b>6</b>	<b>REFERENCES .....</b>	<b>44</b>
<b>7</b>	<b>BLOCK DIAGRAMS .....</b>	<b>45</b>

## 1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 2, and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS132 and RSS133.

Company	Description	Model #
Hand Held Products Inc.	Handheld Computer with GSM/GPRS	D7900LUPE, D7900LU0E D7900BUPE, D7900BU0E



---

2006-07-28  
Michael Grings  
Deputy Test Lab Manager

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

## **2 Administrative Data**

### **2.1 Identification of the Testing Laboratory Issuing the EMC Test Report**

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Michael Grings
Date of test:	06/23/2006

### **2.2 Identification of the Client**

Applicant's Name:	Hand Held Products, Inc.
Street Address:	700 Vision Drive
City/Zip Code	Skaneateles Falls, NY 13153
Countr	U S A
Contact Person:	Naveen Velagapudi
Phone No.	+1 315 685 2931
Fax:	+1 315 685 1210
e-mail:	<a href="mailto:velagapudin@hhp.com">velagapudin@hhp.com</a>

### **2.3 Identification of the Manufacturer**

Manufacturer's Name:	Hand Held Products, Inc.
Manufacturers Address:	700 Vision Drive
City/Zip Code	Skaneateles Falls, NY 13153
Country	U S A

### **3 Equipment under Test (EUT)**

#### **3.1 Identification of the Equipment under Test**

Marketing Name:	<b>Dolphin 7900</b>
Description:	<b>Dolphin 7900 is a ruggedized handheld computer which can read barcodes and other auto ID codes. It contains three different transmitters (BT, WLAN and GSM) to send and receive data.</b>
Model No:	<b>D7900LUPE, D7900LU0E, D7900BUPE, D7900BU0E</b>
FCC ID:	<b>HD57900LUPE, HD57900LU0E, HD57900BUPE, HD57900BU0E</b>
IC ID:	<b>1693B-79E</b>
Frequency Range:	<b>824.2 MHz – 848.8 MHz 1850.2 MHz – 1909.8 MHz</b>
Type(s) of Modulation:	<b>GMSK</b>
Number of Channels:	<b>124 for 850 band 298 for 1900 band</b>
Antenna Type:	<b>INTERNAL</b>
Output Power:	<b>26.84 dBm (0.483W) ERP for 850 band 27.35 dBm (0.543 W) EIRP for 1900 band</b>



#### **4 Subject of Investigation**

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS132 and RSS133.

The Hand Held Products Inc. incorporates a pre approved GSM module therefore this report only contains results fro radiated measurements. For the conducted results refer to the module report.

## **5 Measurements**

### **5.1 RF Power Output**

#### **5.1.1 FCC 2.1046 Measurements required: RF power output.**

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

#### **5.1.2 Limits:**

##### **5.1.2.1 FCC 22.913 (a) Effective radiated power limits.**

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

##### **5.1.2.2 FCC 24.232 (b)(c) Power limits.**


(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

### 5.1.3 Radiated Output Power Measurement procedure:

Based on TIA-603C 2004

#### 2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

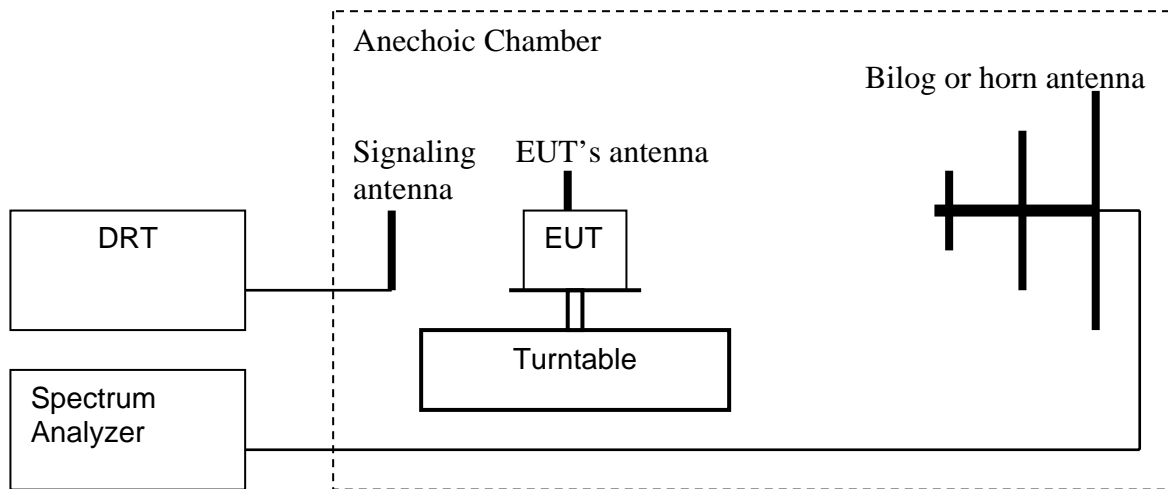

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
  2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
  3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
  4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
  5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
  6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
  7. Determine the ERP using the following equation:  
**ERP (dBm) = LVL (dBm) + LOSS (dB)**
  8. Determine the EIRP using the following equation:  
**EIRP (dBm) = ERP (dBm) + 2.15 (dB)**
  9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
- (note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)

#### Spectrum analyzer settings:

Res B/W: 3 MHz

Vid B/W: 3 MHz



**5.1.4 ERP Results 850 MHz band:**

<b>Frequency (MHz)</b>	<b>Effective Radiated Power (dBm)</b>
<b>824.2</b>	<b>23.90</b>
<b>836.6</b>	<b>24.97</b>
<b>848.8</b>	<b>26.84</b>

**5.1.5 EIRP Results 1900 MHz band:**

<b>Frequency (MHz)</b>	<b>Effective Isotropic Radiated Power (dBm)</b>
<b>1850.2</b>	<b>25.98</b>
<b>1880.0</b>	<b>27.35</b>
<b>1909.8</b>	<b>27.18</b>



**EIRP (GSM 850)  
CHANNEL 128**


**§22.913(a)**

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH128, TABLE 0°, Ant ht 130cm  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: EIRP 850 CH 128 V

**SWEEP TABLE: "EIRP 850 CH 128 V"**

Start Frequency	Stop Frequency	Detector MaxPeak	Meas. Time Coupled	IF Bandw. 3 MHz	Transducer DUMMY-DBM
819.2 MHz	829.2 MHz	MaxPeak			

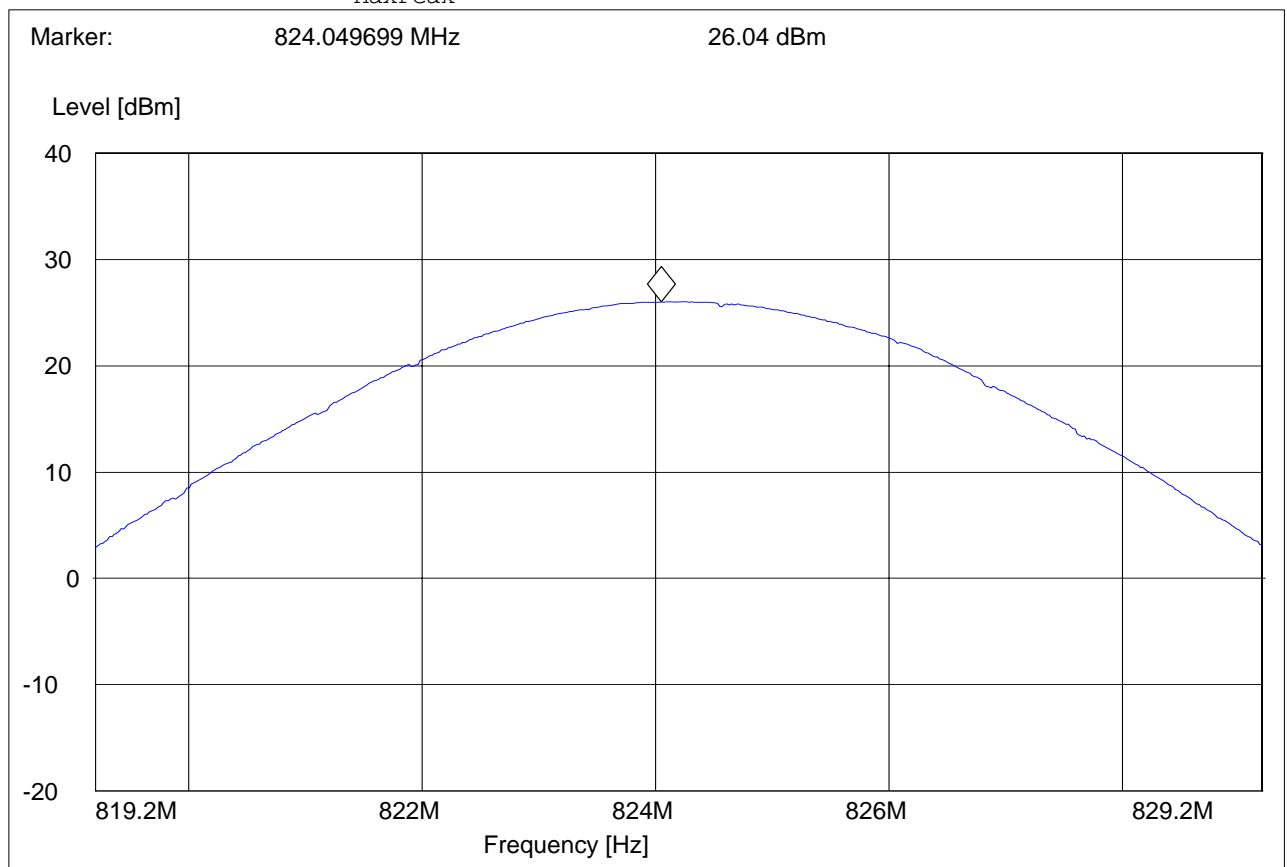



**EIRP (GSM 850)**  
**CHANNEL 190**


**§22.913(a)**

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH190, TABLE 0°, Ant ht 130cm  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: EIRP 850 CH 190 V

**SWEEP TABLE: "EIRP 850 CH 190 V"**

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
831.6 MHz	841.6 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

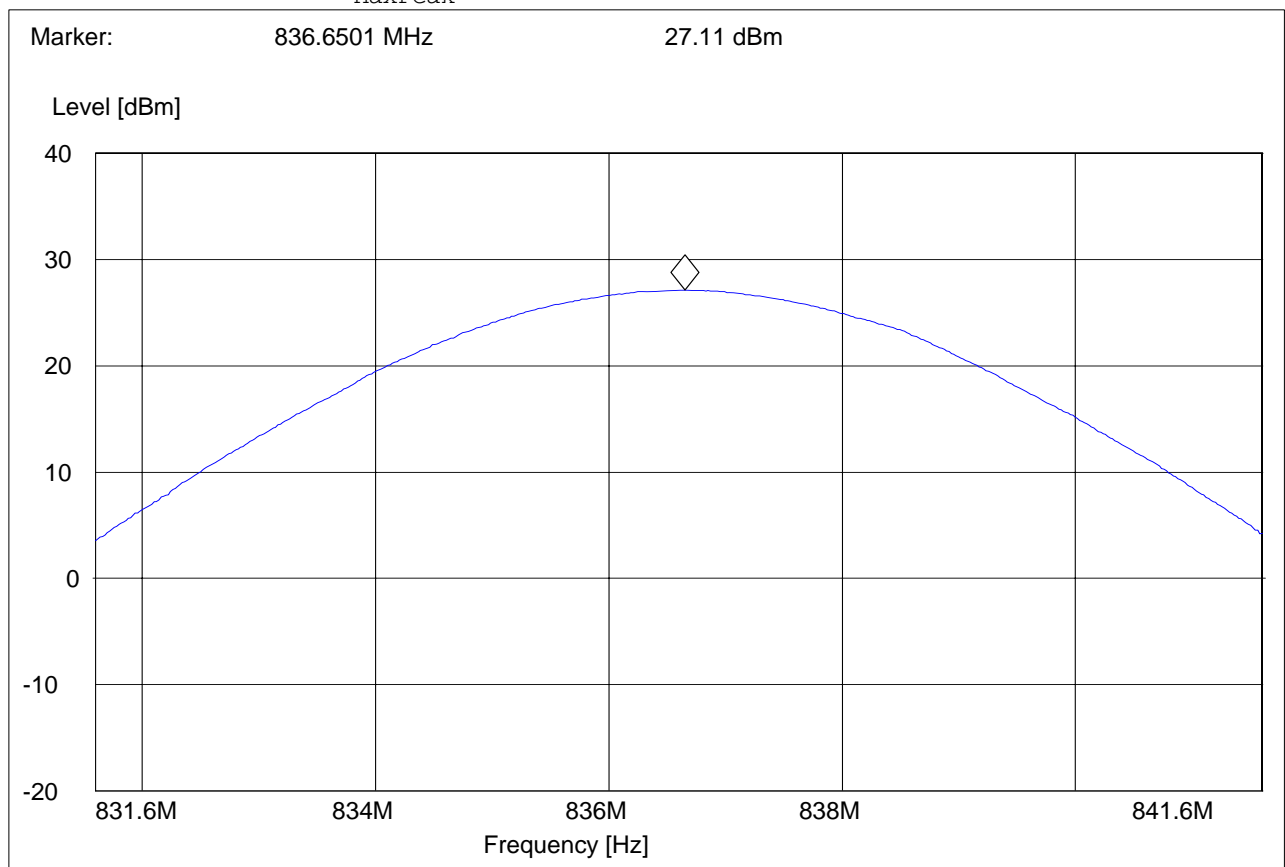



**EIRP (GSM 850)  
CHANNEL 251**

**§22.913(a)**


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH251, TABLE 0°, Ant ht 130cm  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: EIRP 850 CH 251 V

**SWEEP TABLE: "EIRP 850 CH 251 V"**

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 848.990381 MHz 28.98 dBm

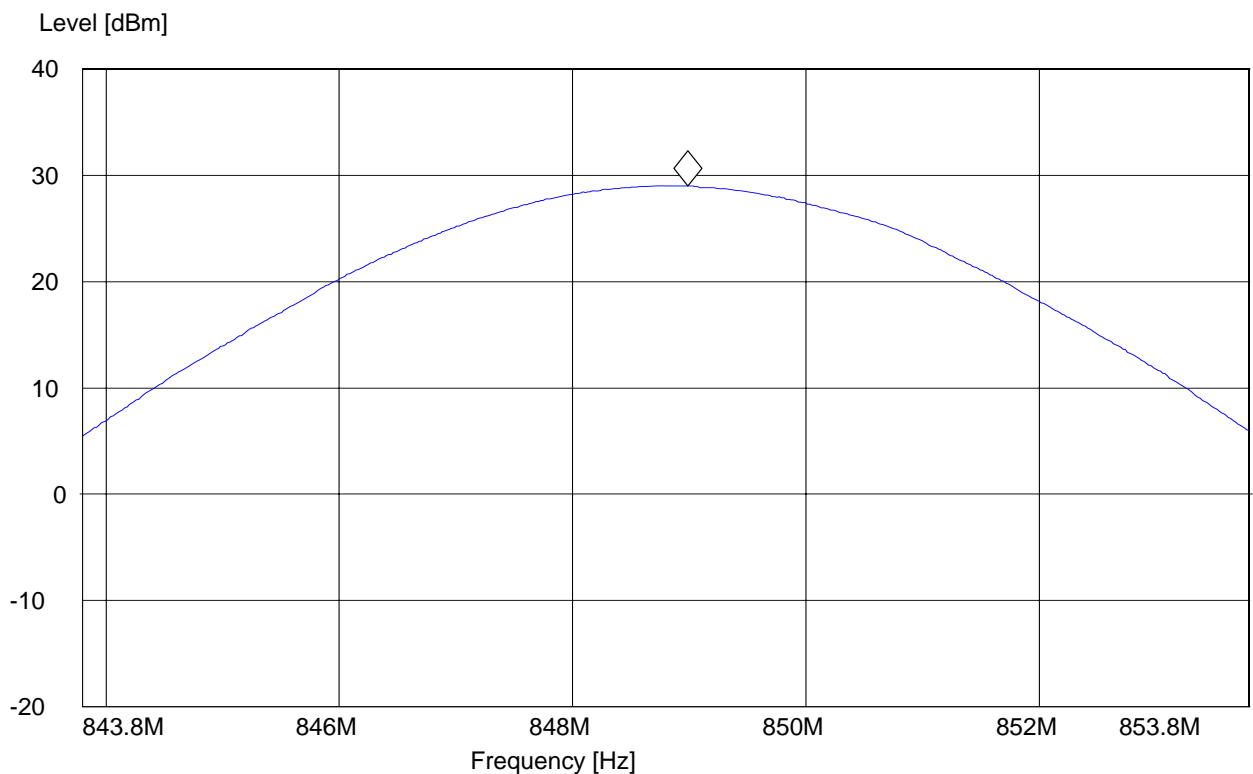



**EIRP (PCS-1900)  
CHANNEL 512**


§24.232(b)

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH512, TABLE 250°  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: EIRP 1900 CH512

**SWEEP TABLE: "EIRP 1900 CH512"**

Short Description:		EIRP PCS 1900 for channel-512			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.8 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

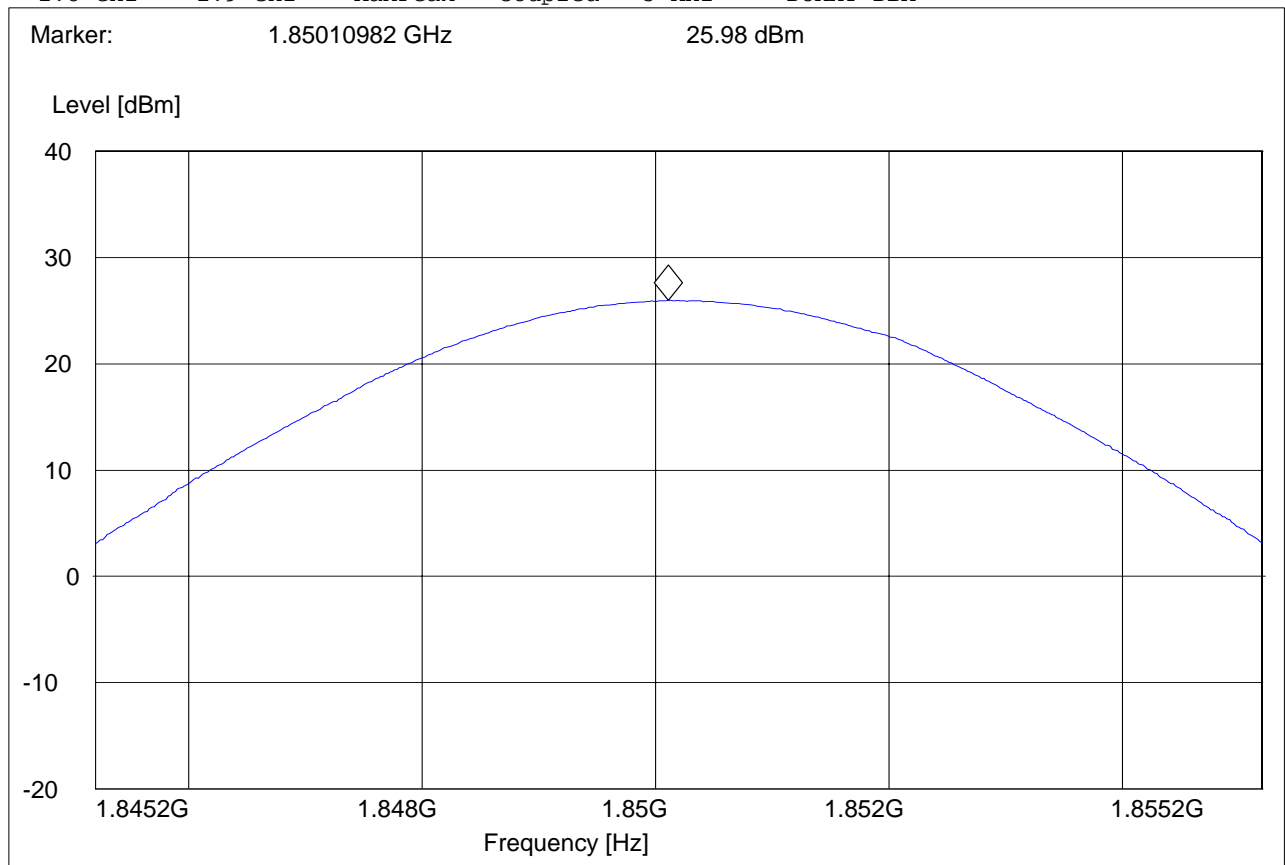



**EIRP (PCS-1900)  
CHANNEL 661**


§24.232(b)

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH661, TABLE 250°  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: EIRP 1900 CH661

**SWEEP TABLE: "EIRP 1900 CH661"**

Short Description:		EIRP PCS 1900 for channel-661			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

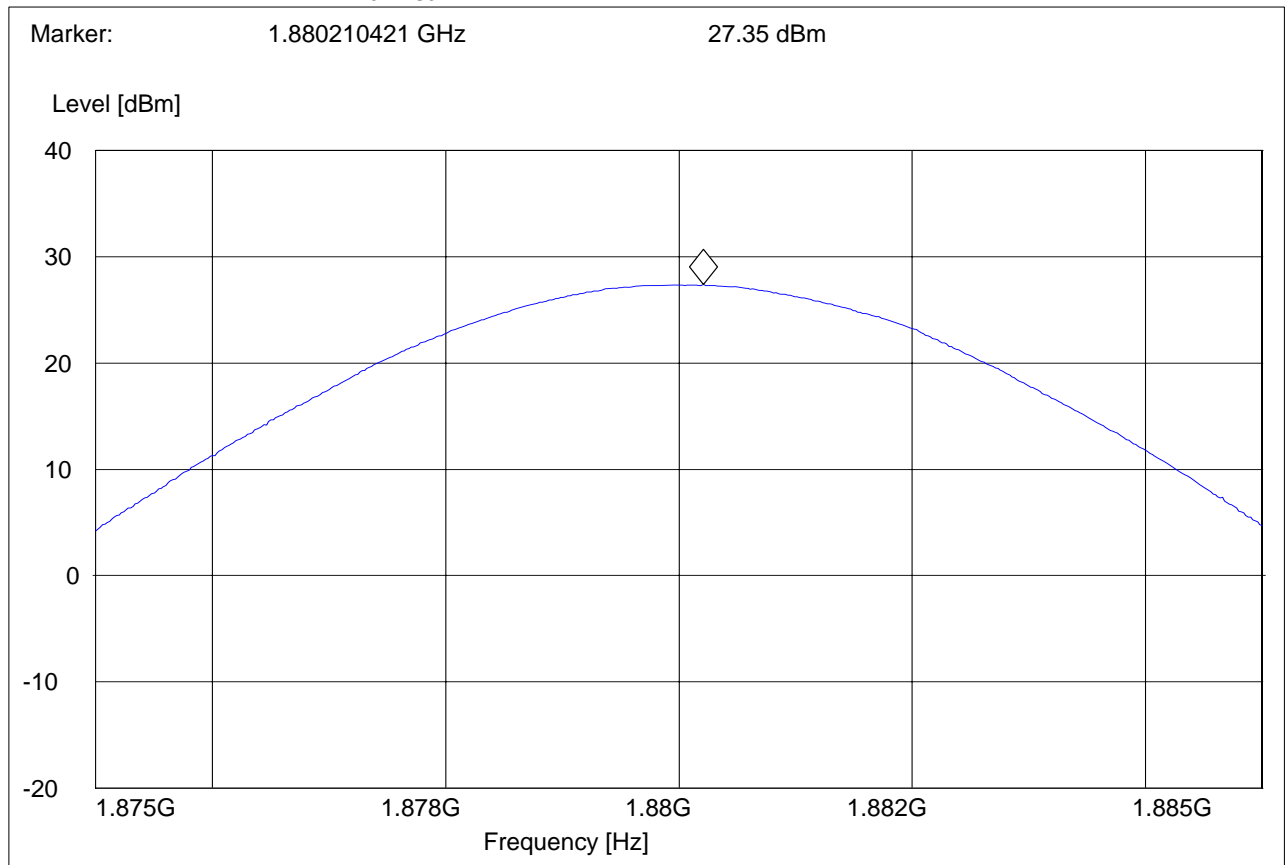



**EIRP (PCS-1900)  
CHANNEL 810**


§24.232(b)

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH810, TABLE 250°  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: EIRP 1900 CH810

**SWEEP TABLE: "EIRP 1900 CH810"**

Short Description:		EIRP PCS 1900 for channel-810			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

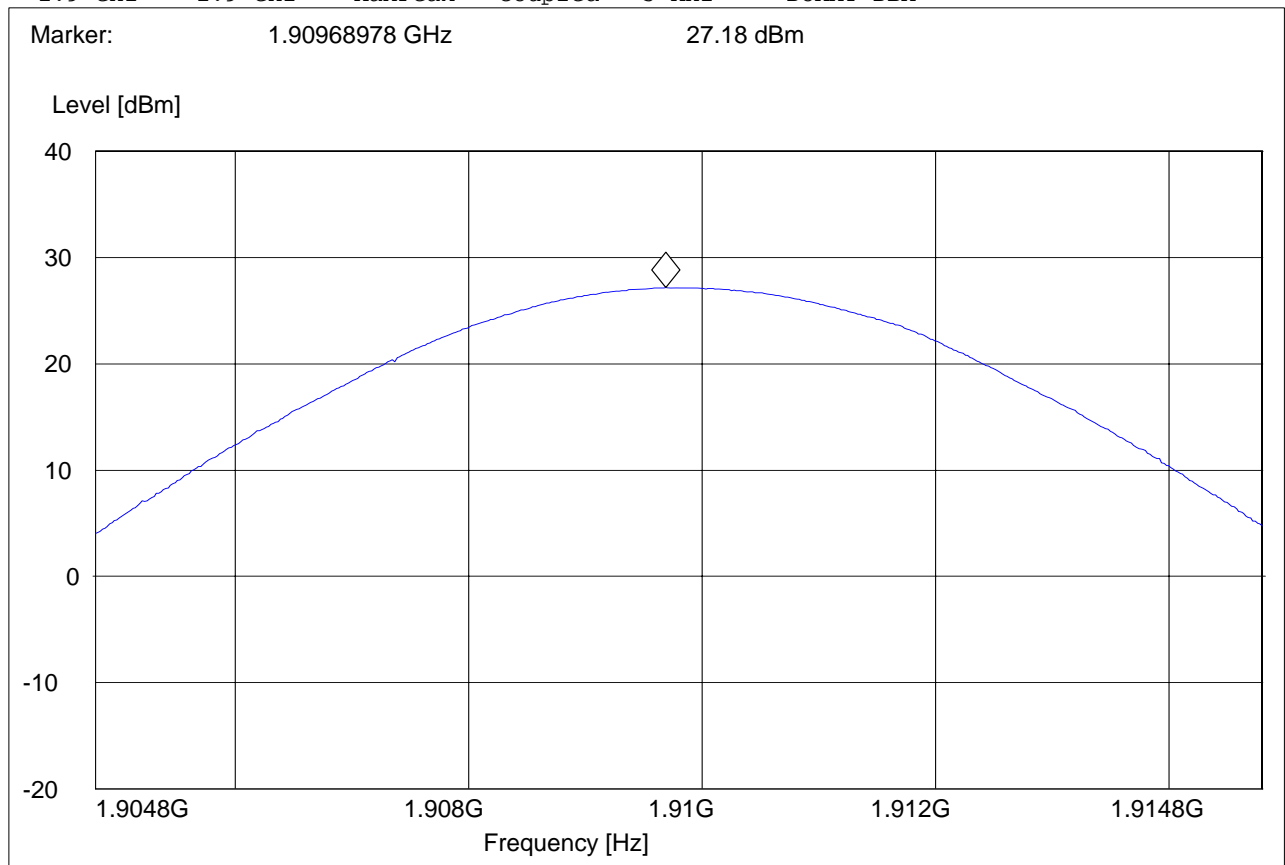

## 5.2 Spurious Emissions Radiated

### 5.2.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

### 5.2.2 Limits:

#### 5.2.2.1 **FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

- (b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### **FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

- (b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required






measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 5.2.3 Radiated out of band measurement procedure:

Based on TIA-603C 2004

#### 2.2.12 Unwanted emissions: Radiated Spurious

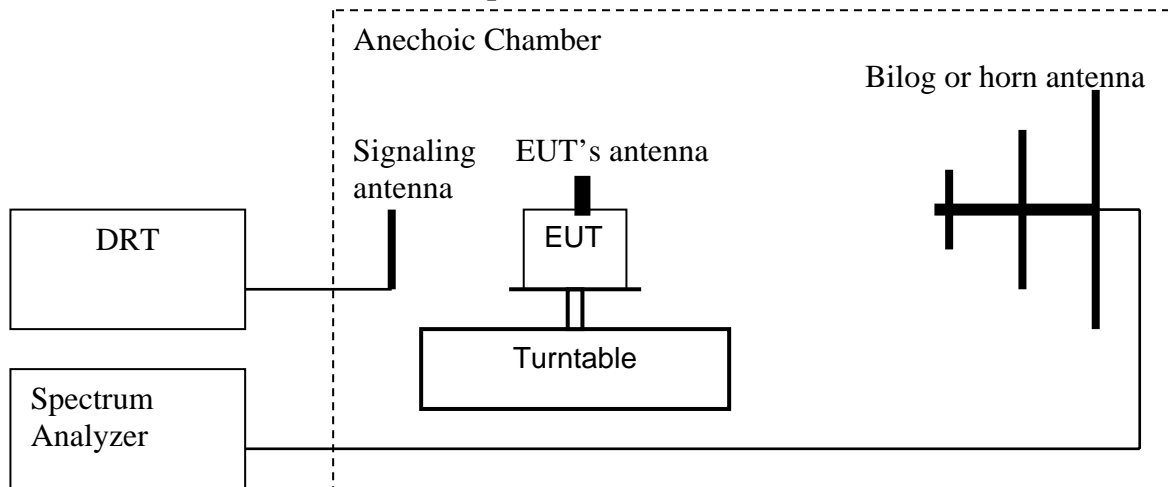

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (**LVL**) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:  
**Spurious** (dBm) = **LVL** (dBm) + **LOSS** (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:  
**Spurious** (dBm) = **LVL** (dBm) + **LOSS** (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

#### Spectrum analyzer settings:

Res B/W: 1 MHz

Vid B/W: 1 MHz

### Measurement Survey:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

### RESULTS OF RADIATED TESTS GSM-850:

Harmonics	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
2	1648.4	NF	1673.2	NF	1697.6	NF
3	2472.6	NF	2509.8	NF	2546.4	NF
4	3296.8	NF	3346.4	NF	3395.2	NF
5	4121	NF	4183	NF	4244	NF
6	4945.2	NF	5019.6	NF	5092.8	NF
7	5769.4	NF	5856.2	NF	5941.6	NF
8	6593.6	NF	6692.8	NF	6790.4	NF
9	7417.8	NF	7529.4	NF	7639.2	NF
10	8242	NF	8366	NF	8488	NF
NF = NOISE FLOOR						



## RADIATED SPURIOUS EMISSIONS (GSM-850)

**TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical**

**Note: 1.The peak above the limit line is the carrier freq.**


**2.This plot is valid for low, mid & high channels (worst-case plot)**

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH190, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: FCC 24 Spur 30M-1G\_V

### ***SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"***

Short Description:		FCC 24 30MHz-1GHz				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency	Time	Bandw.			
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM	

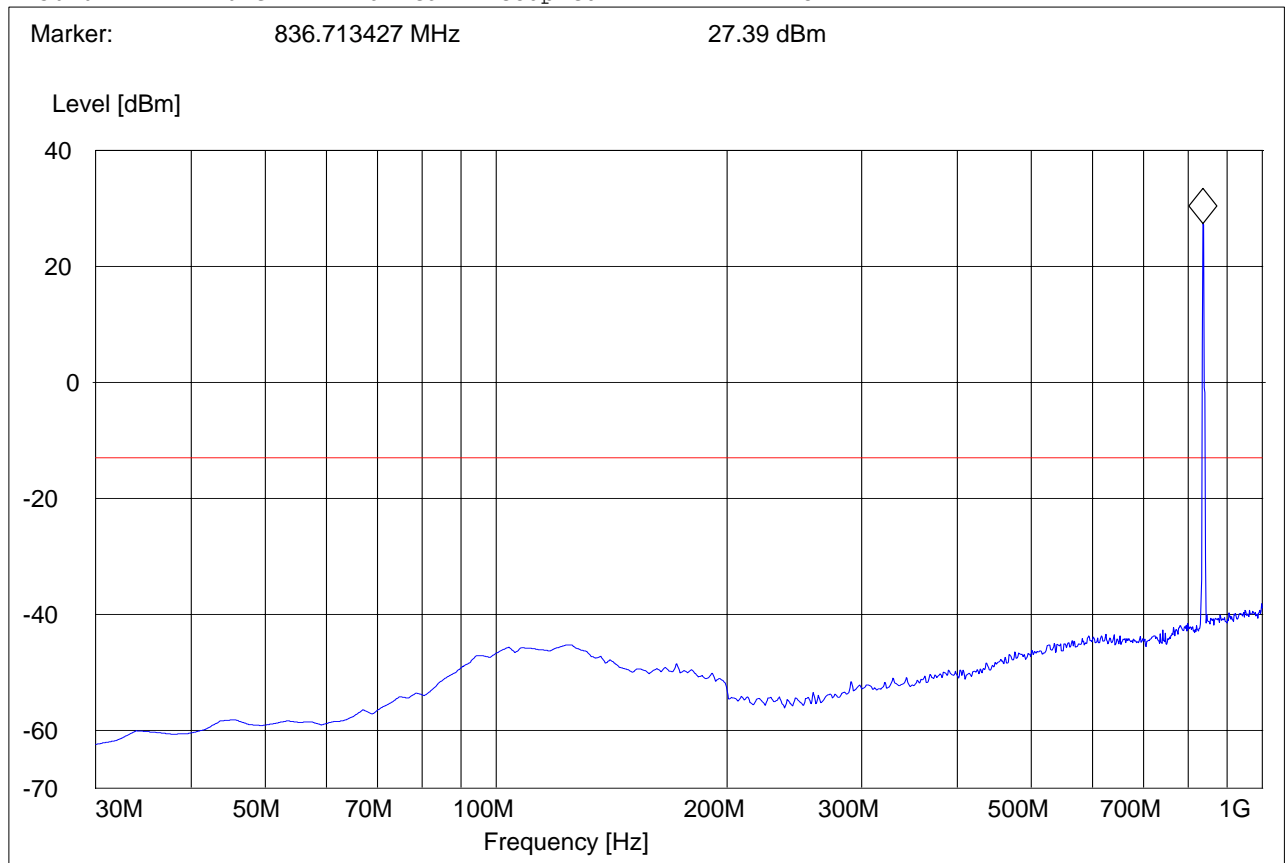



# **RADIATED SPURIOUS EMISSIONS (GSM-850)**

**Tx @ 824.2MHz: 1GHz – 1.58GHz**


Spurious emission limit –13dBm

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH128, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: FCC 22 Spur 1-1.58G

## ***SWEEP TABLE: "FCC 22Spuri 1-1.58G"***

Short Description:		FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency		Time	Bandw.		
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM	

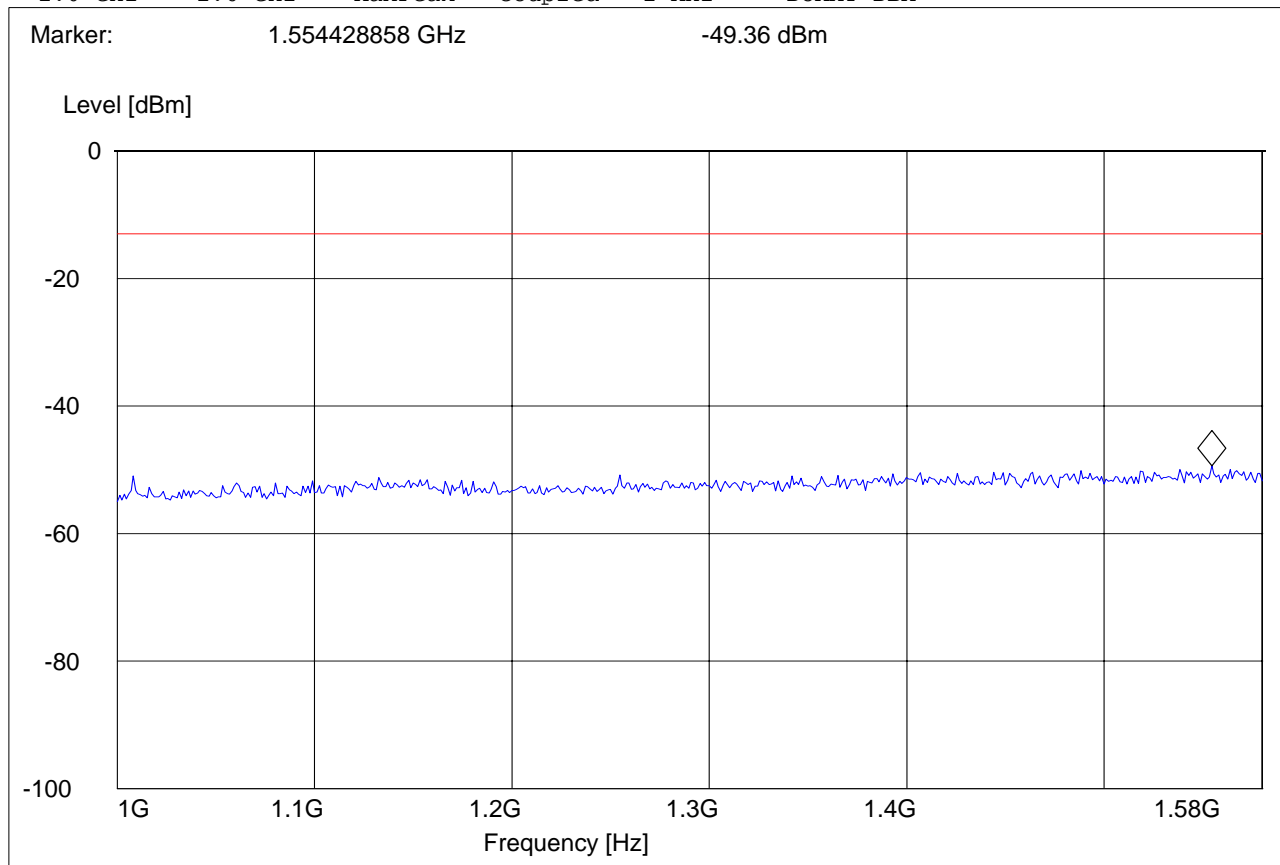



## RADIATED SPURIOUS EMISSIONS (GSM-850)

**Tx @ 824.2MHz: 1.58GHz – 3GHz**

Spurious emission limit –13dBm


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH128, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: FCC 22 Spur 1.58–3G

### ***SWEEP TABLE: "FCC 22Spuri 1.58-3G"***

Short Description:		FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency	Time	Bandw.			
1.6 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM	

Marker: 1.588537074 GHz -25.86 dBm

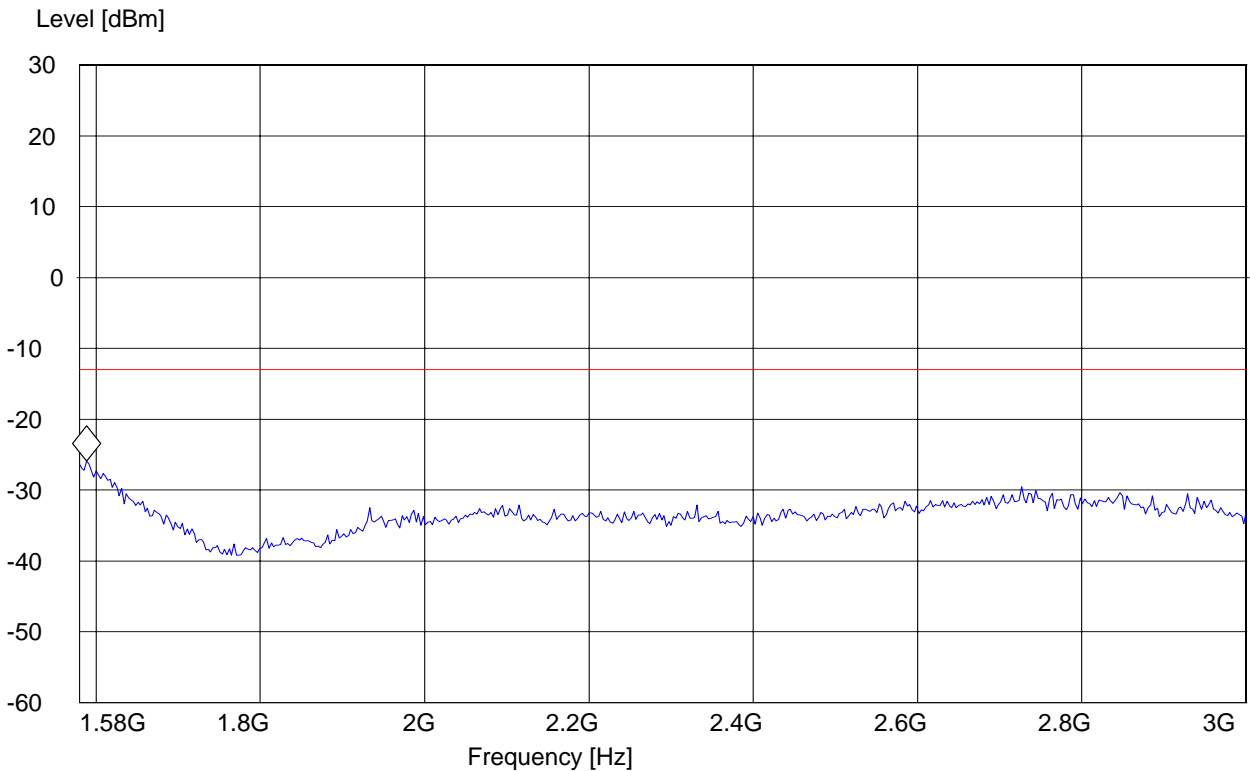



## RADIATED SPURIOUS EMISSIONS (GSM-850)

**Tx @ 824.2MHz: 3GHz – 9GHz**


Spurious emission limit –13dBm

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH128, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: FCC 22 Spur 3-9G

### ***SWEEP TABLE: "FCC 22Spuri 3-9G"***

Short Description:		FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency	Time	Bandw.			
3.0 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM	

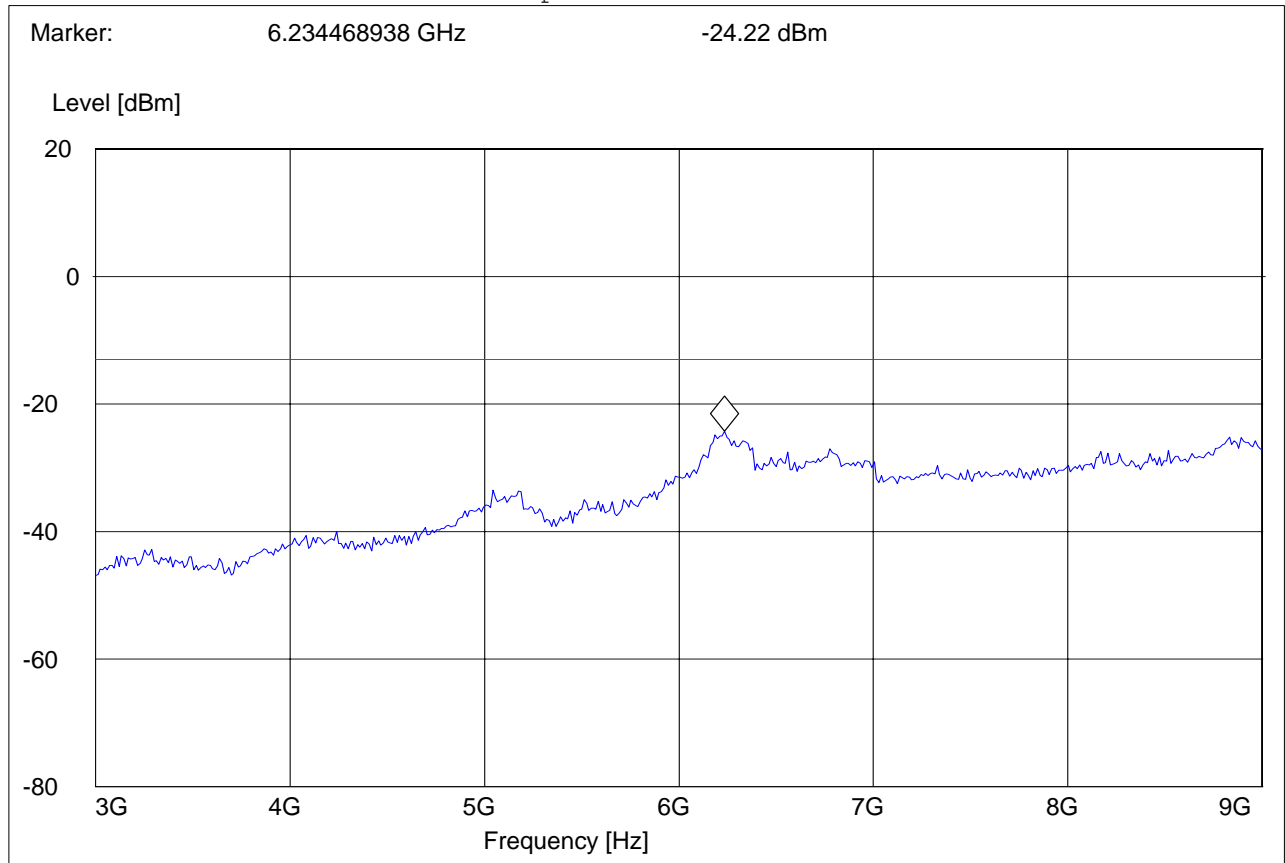



## RADIATED SPURIOUS EMISSIONS (GSM-850)

**Tx @ 836.6MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**


EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH190, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: FCC 22 Spur 1-1.58G

### ***SWEEP TABLE: "FCC 22Spuri 1-1.58G"***

Short Description:		FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency	Time	Bandw.			
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM	

Marker: 1.58537074 GHz -25.86 dBm

Level [dBm]

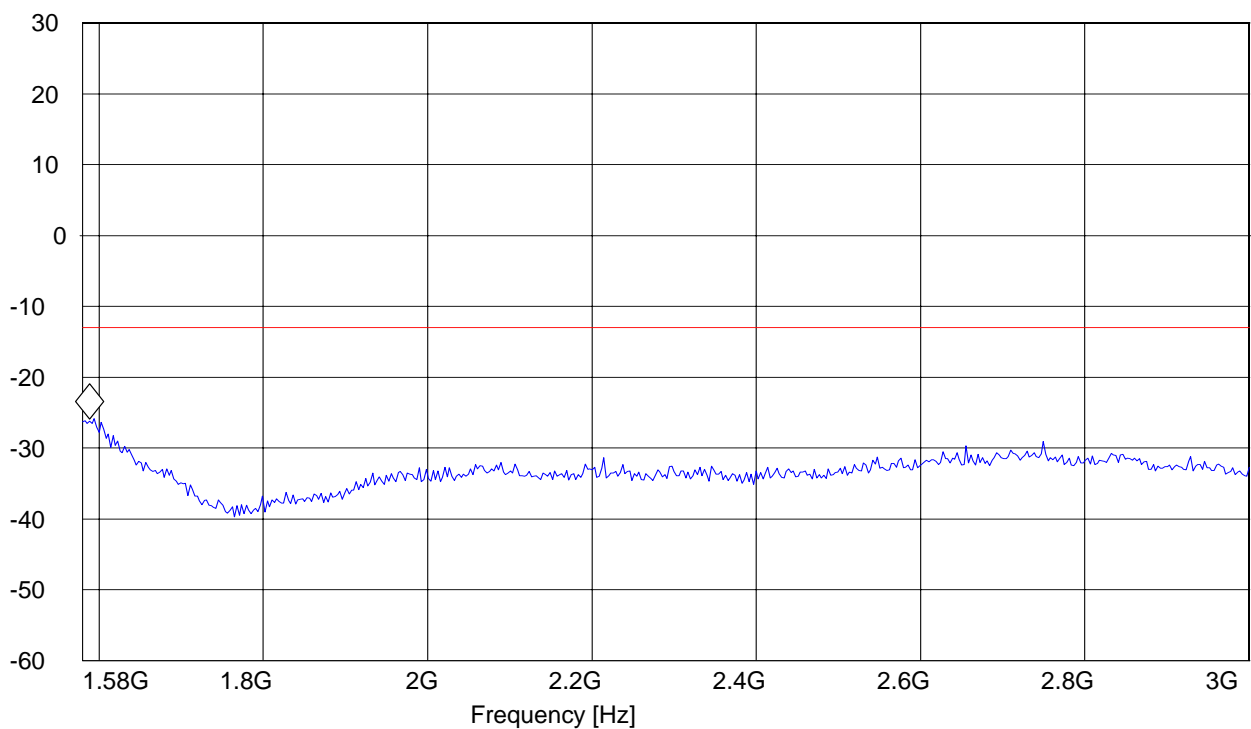





## RADIATED SPURIOUS EMISSIONS (GSM-850)

**Tx @ 836.6MHz: 1.58GHz – 3GHz**

Spurious emission limit –13dBm


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH190, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: FCC 22 Spur 1.58-3G

### **SWEEP TABLE: "FCC 22Spuri 1.58-3G"**

Short Description:	FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency	Time	Bandw.		
1.6 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.673907816 GHz -26.66 dBm

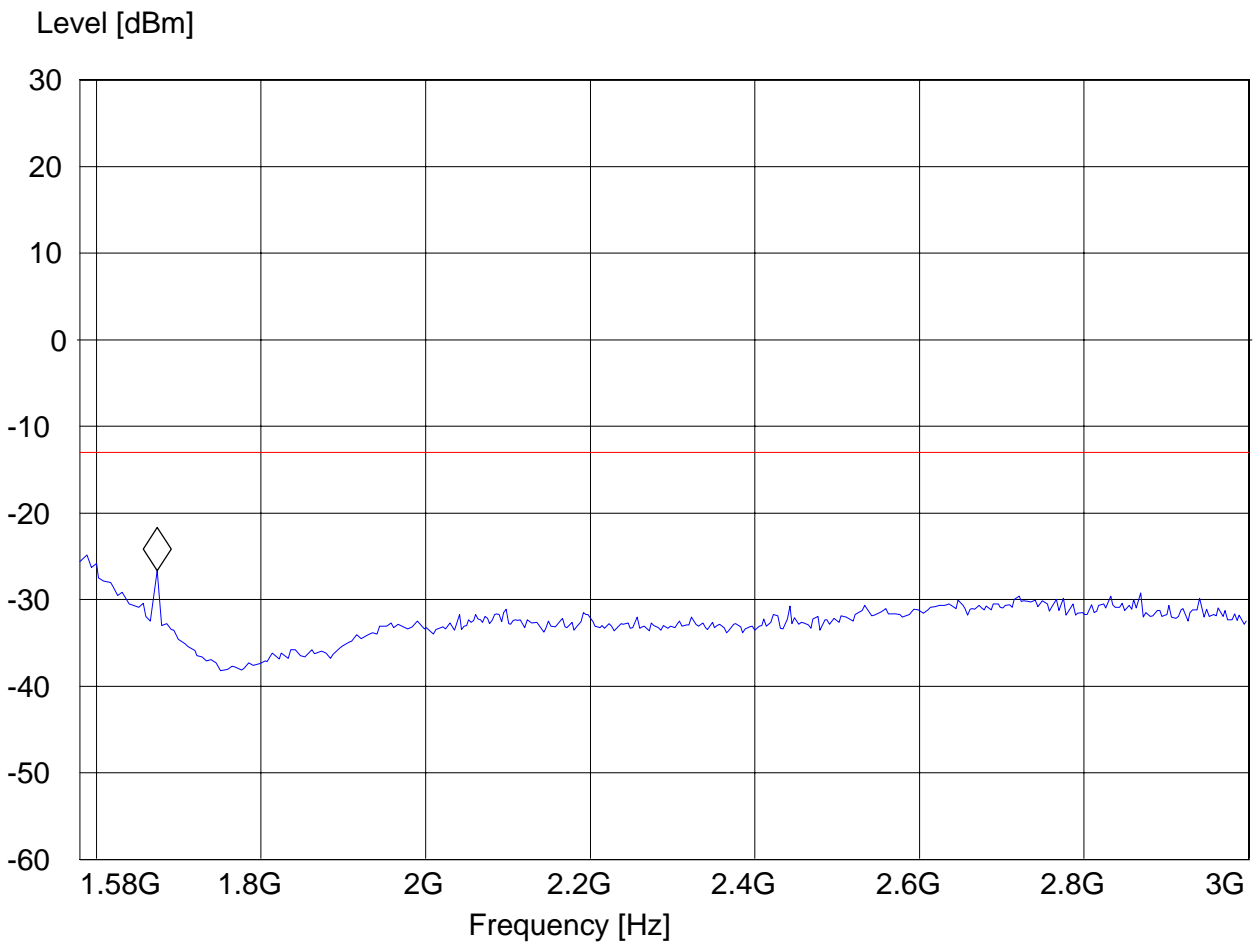



## RADIATED SPURIOUS EMISSIONS (GSM-850)

**Tx @ 836.6MHz: 3GHz – 9GHz**


Spurious emission limit –13dBm

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH190, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: FCC 22 Spur 3-9G

### ***SWEEP TABLE: "FCC 22Spuri 3-9G"***

Short Description:		FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency		Time	Bandw.		
3.0 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM	

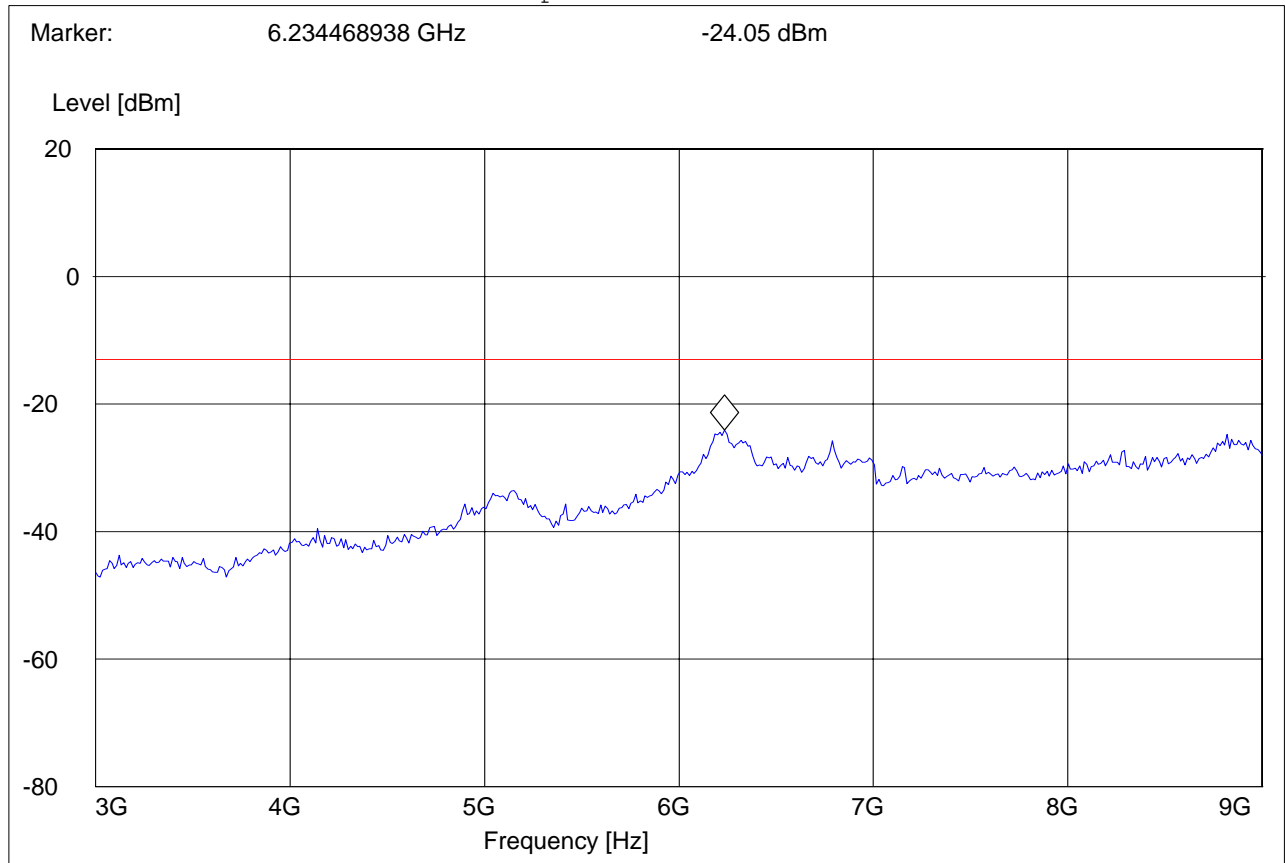



## RADIATED SPURIOUS EMISSIONS (GSM-850)

**Tx @ 848.8MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH251, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: FCC 22 Spur 1-1.58G

### ***SWEEP TABLE: "FCC 22Spuri 1-1.58G"***

Short Description:		FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency		Time	Bandw.		
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM	

Marker: 1.008136273 GHz -49.97 dBm

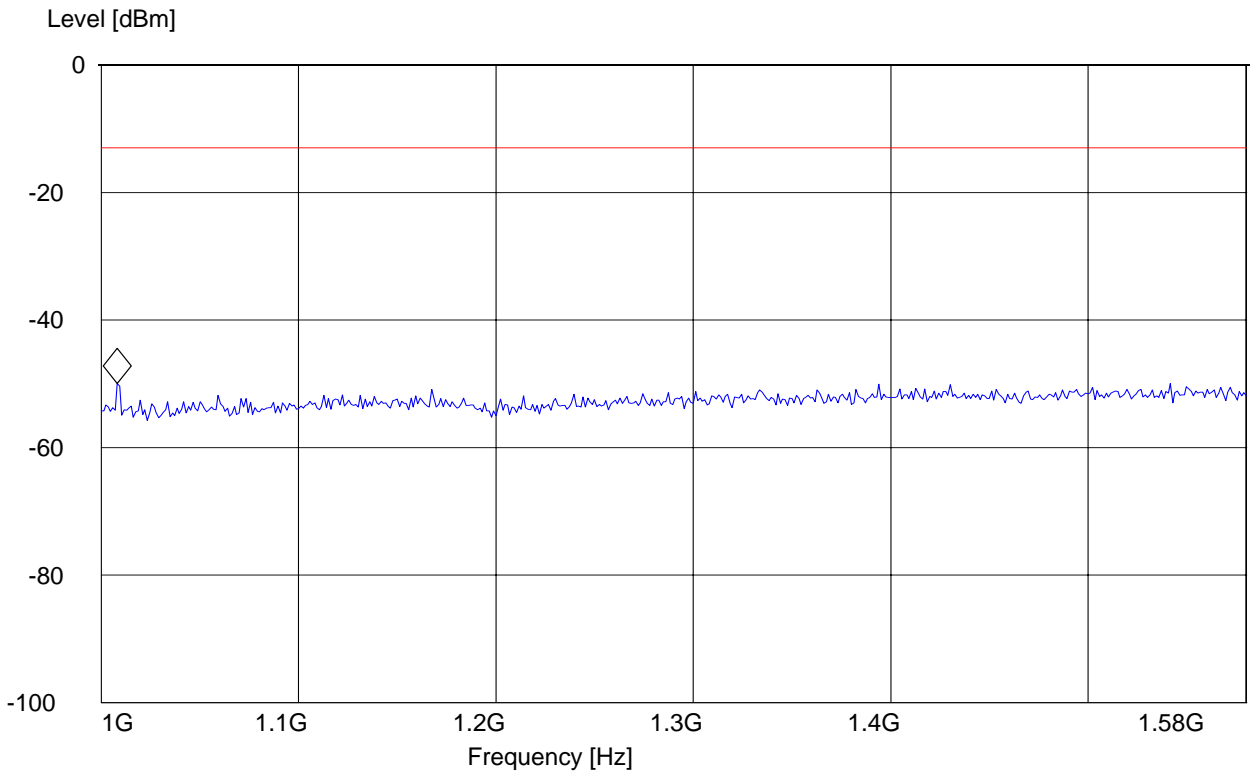



## RADIATED SPURIOUS EMISSIONS (GSM-850)

**Tx @ 848.8MHz: 1.58GHz – 3GHz**


Spurious emission limit –13dBm

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH251, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: FCC 22 Spur 1.58–3G

### ***SWEEP TABLE: "FCC 22Spuri 1.58-3G"***

Short Description:		FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency	Time	Bandw.			
1.6 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM	

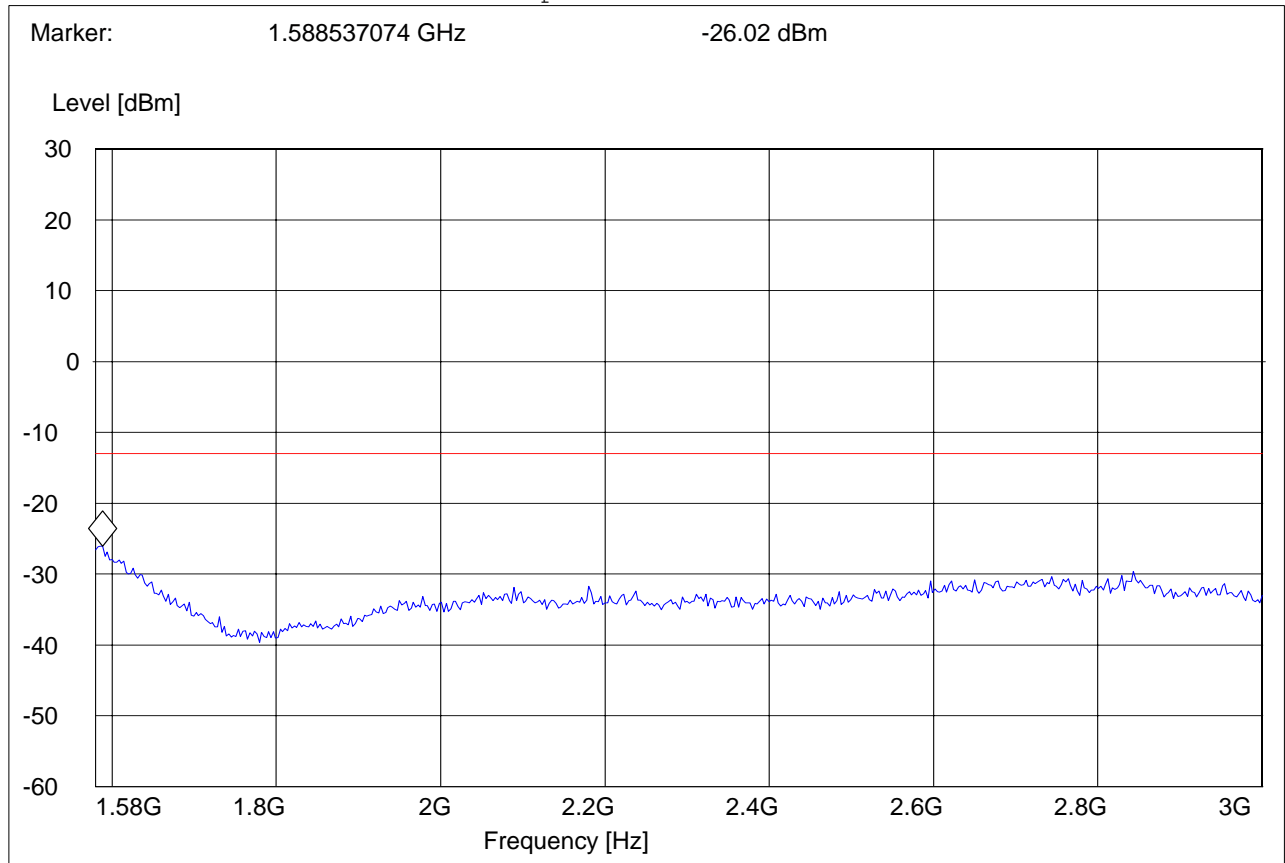



## RADIATED SPURIOUS EMISSIONS (GSM-850)

**Tx @ 848.8MHz: 3GHz – 9GHz**


Spurious emission limit –13dBm

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH251, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: Ed  
Voltage: AC ADAPTOR  
Sweep: FCC 22 Spur 3-9G

### ***SWEEP TABLE: "FCC 22Spuri 3-9G"***

Short Description:		FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency		Time	Bandw.		
3.0 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM	

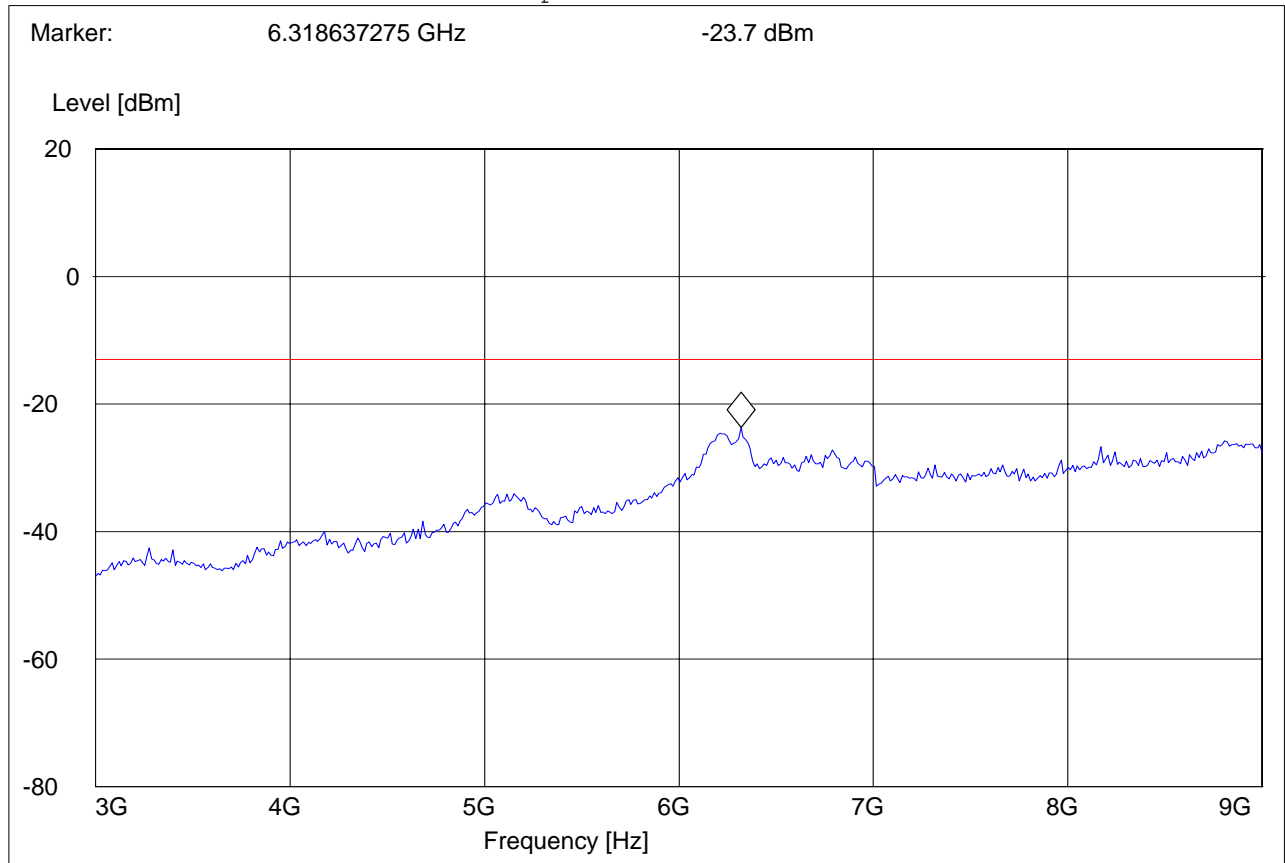

**RESULTS OF RADIATED TESTS PCS-1900:**

<b>Harmonic</b>	<b>Tx ch-512 Freq.(MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-661 Freq. (MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-810 Freq. (MHz)</b>	<b>Level (dBm)</b>
<b>2</b>	<b>3700.4</b>	NF	<b>3760</b>	NF	<b>3819.6</b>	NF
<b>3</b>	<b>5550.6</b>	NF	<b>5640</b>	NF	<b>5729.4</b>	NF
<b>4</b>	<b>7400.8</b>	NF	<b>7520</b>	NF	<b>7639.2</b>	NF
<b>5</b>	<b>9251</b>	NF	<b>9400</b>	NF	<b>9549</b>	NF
<b>6</b>	<b>11101.2</b>	NF	<b>11280</b>	NF	<b>11458.8</b>	NF
<b>7</b>	<b>12951.4</b>	NF	<b>13160</b>	NF	<b>13368.6</b>	NF
<b>8</b>	<b>14801.6</b>	NF	<b>15040</b>	NF	<b>15278.4</b>	NF
<b>9</b>	<b>16651.8</b>	NF	<b>16920</b>	NF	<b>17188.2</b>	NF
<b>10</b>	<b>18502</b>	NF	<b>18800</b>	NF	<b>19098</b>	NF
NF = NOISE FLOOR						



## RADIATED SPURIOUS EMISSIONS(PCS 1900)

**TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical**


**Note: This plot is valid for low, mid & high channels (worst-case plot)**

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH810, TABLE 250°  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: FCC24 SPURI 30M-1G\_V

### **SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"**

Short Description:		FCC 24 30MHz-1GHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency	Time	Bandw.		
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

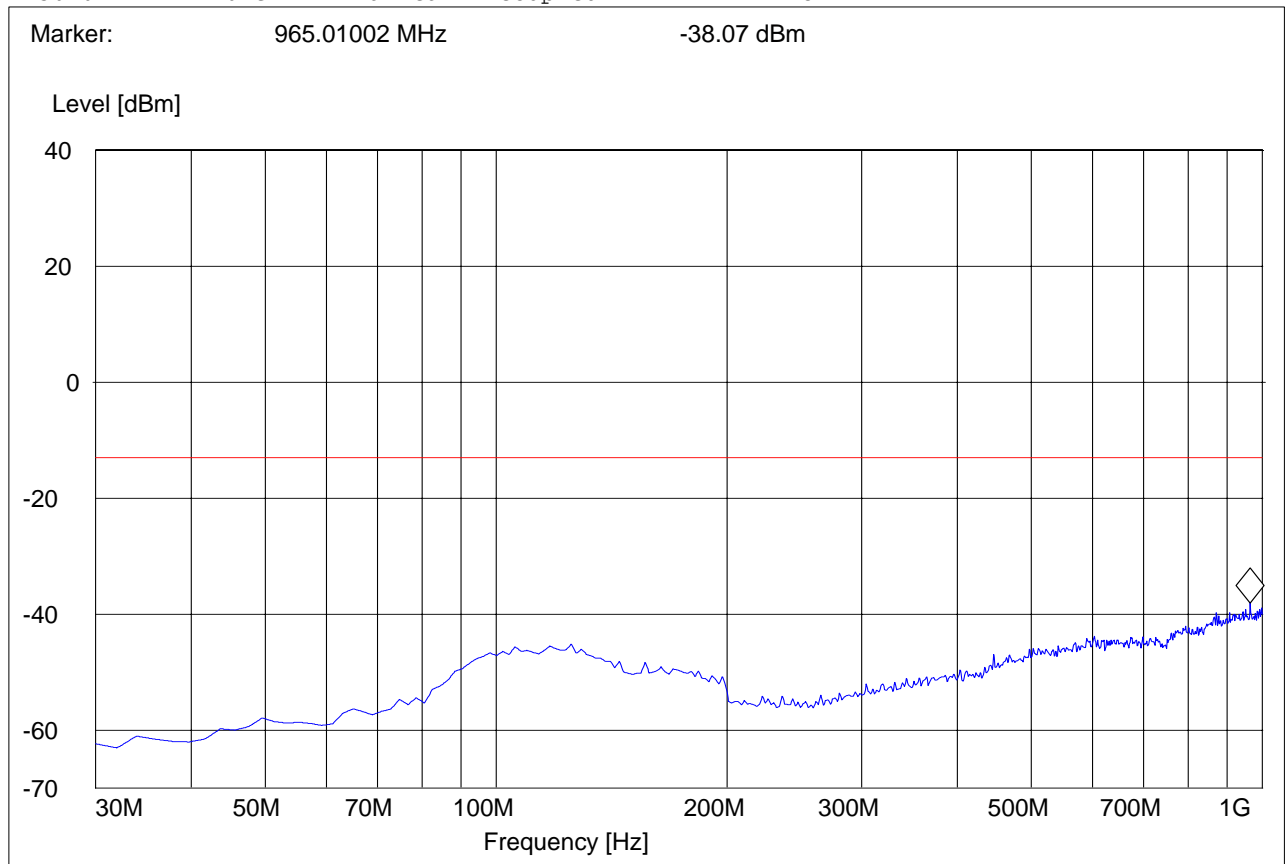



# **RADIATED SPURIOUS EMISSIONS(PCS 1900)**

**Tx @ 1850.2MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm


**Note: The peak above the limit line is the carrier freq. at ch-512.**

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH512, TABLE 250°, PEAK IS BS  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: FCC24 SPURI 1-3G

## **SWEEP TABLE: "FCC 24Spuri 1-3G"**

Short Description:	FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency	Time	Bandw.		
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

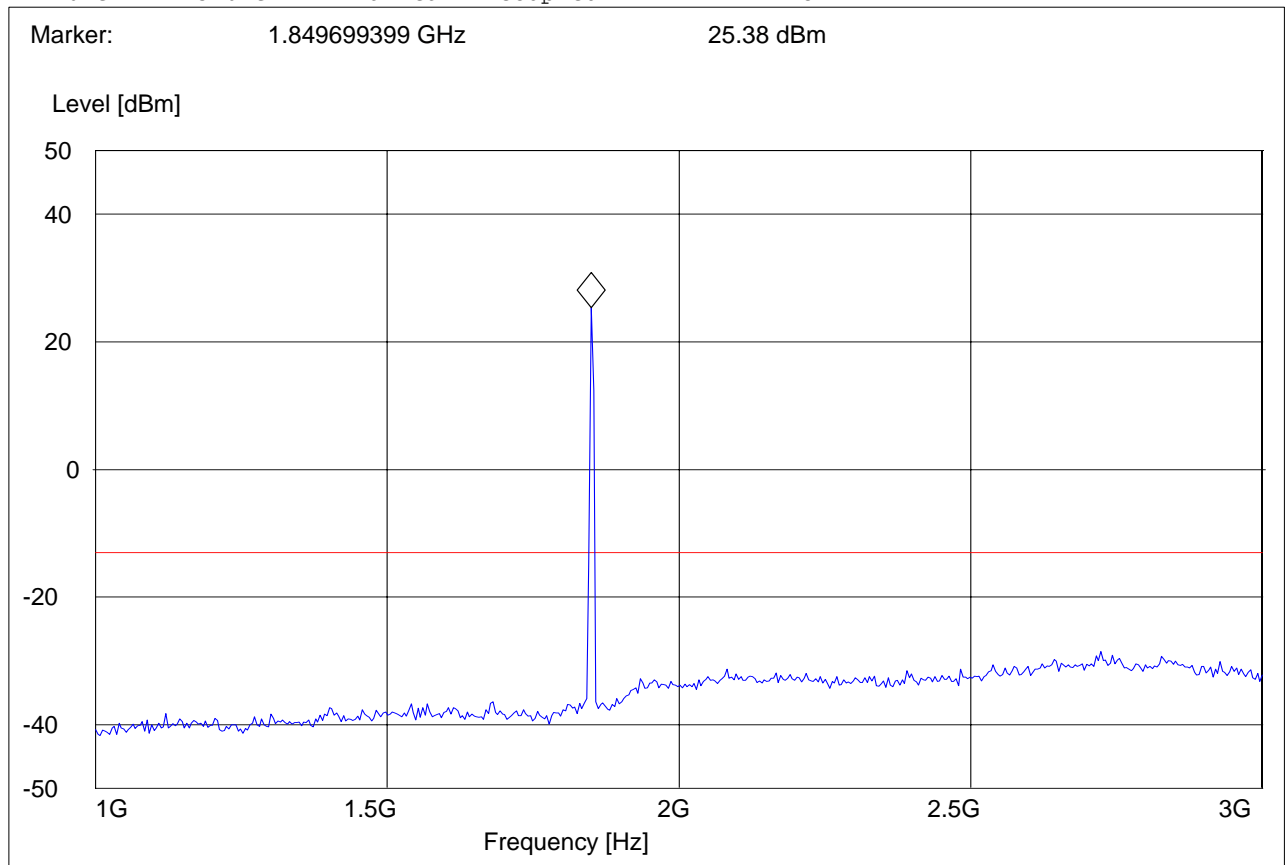





**RADIATED SPURIOUS EMISSIONS(PCS 1900)**

**Tx @ 1850.2MHz: 3GHz – 18GHz**

Spurious emission limit -13dBm


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH512, TABLE 250°, PEAK IS BS  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: FCC24 SPURI 3-18G

**SWEEP TABLE: "FCC 24Spuri 3-18G"**

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 3 GHz -58.78 dBm

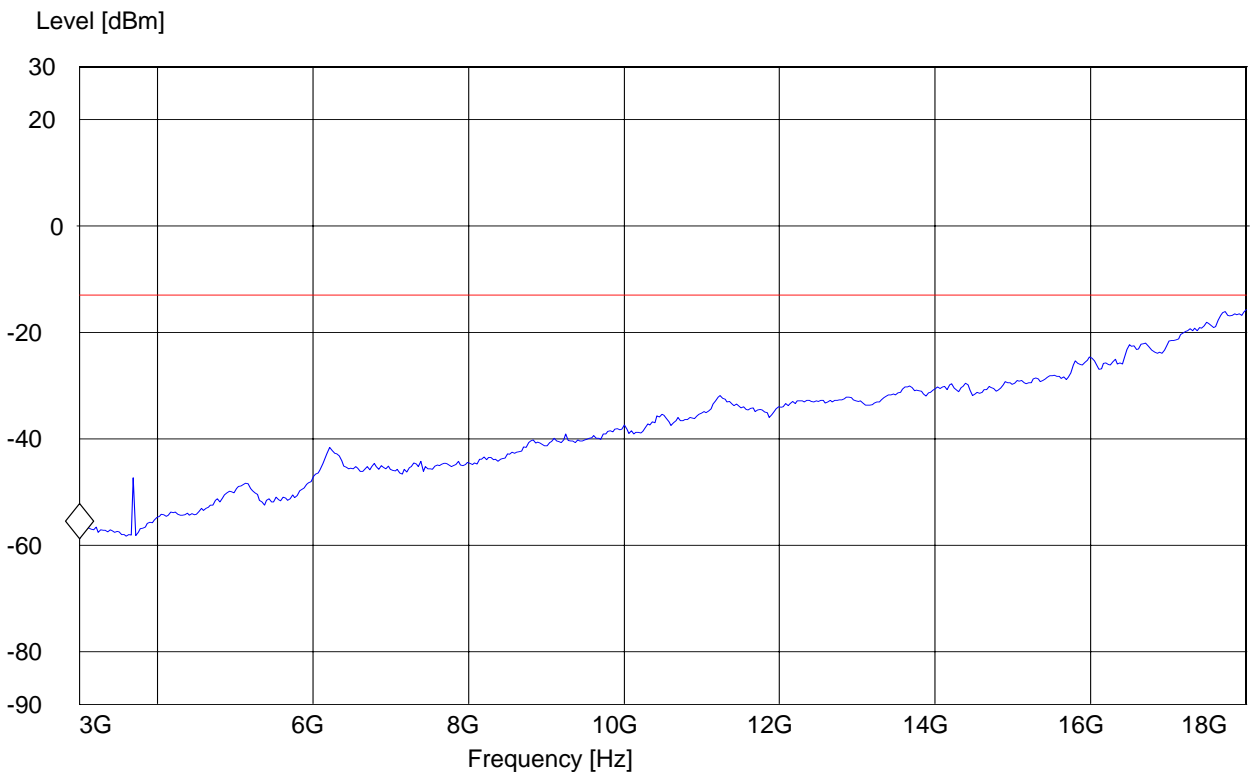



# **RADIATED SPURIOUS EMISSIONS(PCS 1900)**

**Tx @ 1880.0MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm

**Note: The peak above the limit line is the carrier freq. at ch-661.**


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH661, TABLE 250°, PEAK IS BS  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: FCC24 SPURI 1-3G

## **SWEEP TABLE: "FCC 24Spuri 1-3G"**

Short Description:	FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency	Time	Bandw.		
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.881763527 GHz -17 dBm

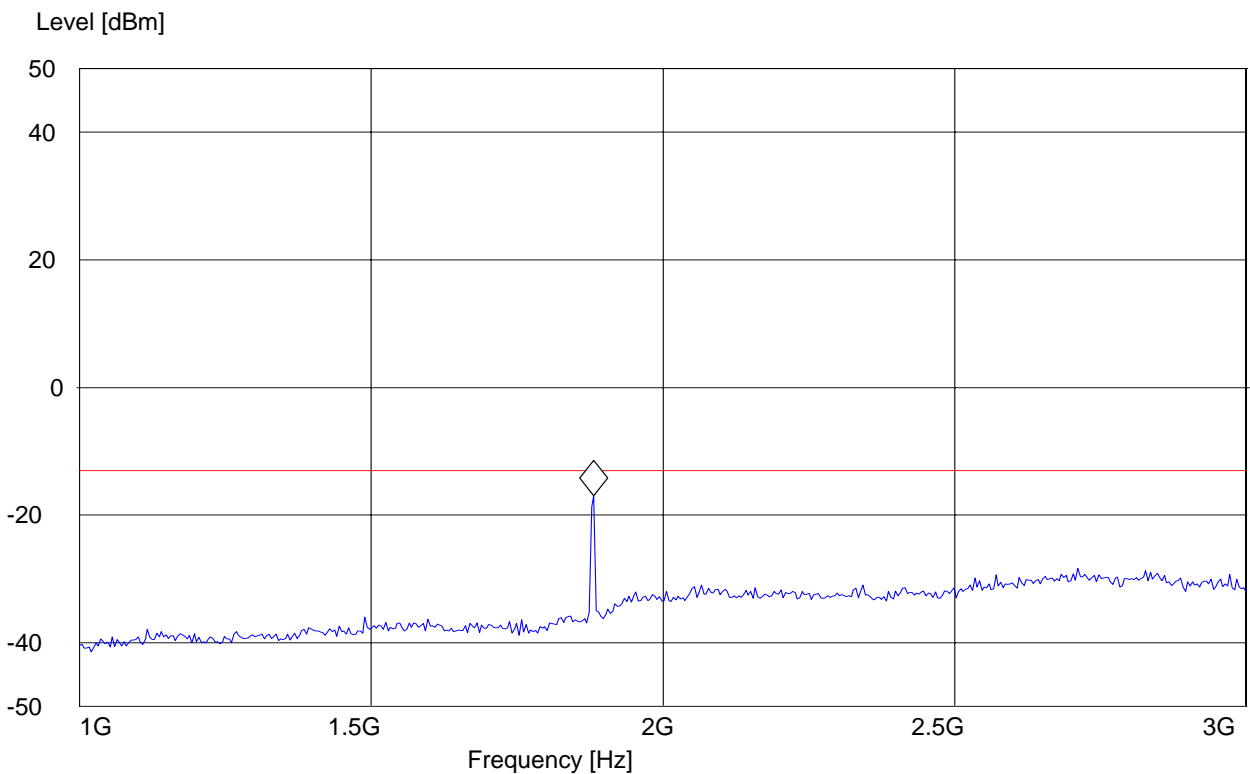



**RADIATED SPURIOUS EMISSIONS(PCS 1900)**

**Tx @ 1880.0MHz: 3GHz – 18GHz**

Spurious emission limit –13dBm


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH661, TABLE 250°  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: FCC24 SPURI 3-18G

**SWEEP TABLE: "FCC 24Spuri 3-18G"**

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 18 GHz -15.94 dBm

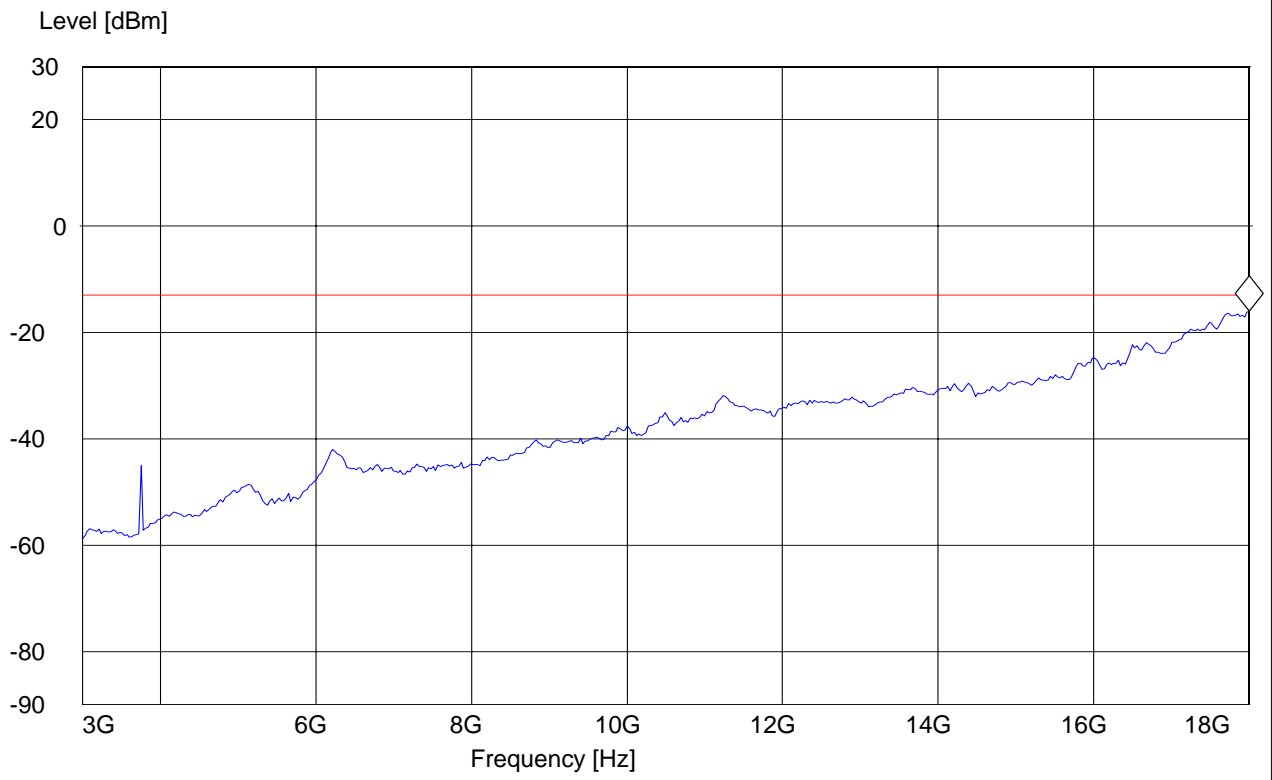



# **RADIATED SPURIOUS EMISSIONS(PCS 1900)**

**Tx @ 1909.8MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm


**Note: The peak above the limit line is the carrier freq. at ch-810.**

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH810, TABLE 250°, PEAK IS BS  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: FCC24 SPURI 1-3G

## **SWEEP TABLE: "FCC 24Spuri 1-3G"**

Short Description:	FCC 24 1GHz-8GHz				
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency	Time	Bandw.		
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

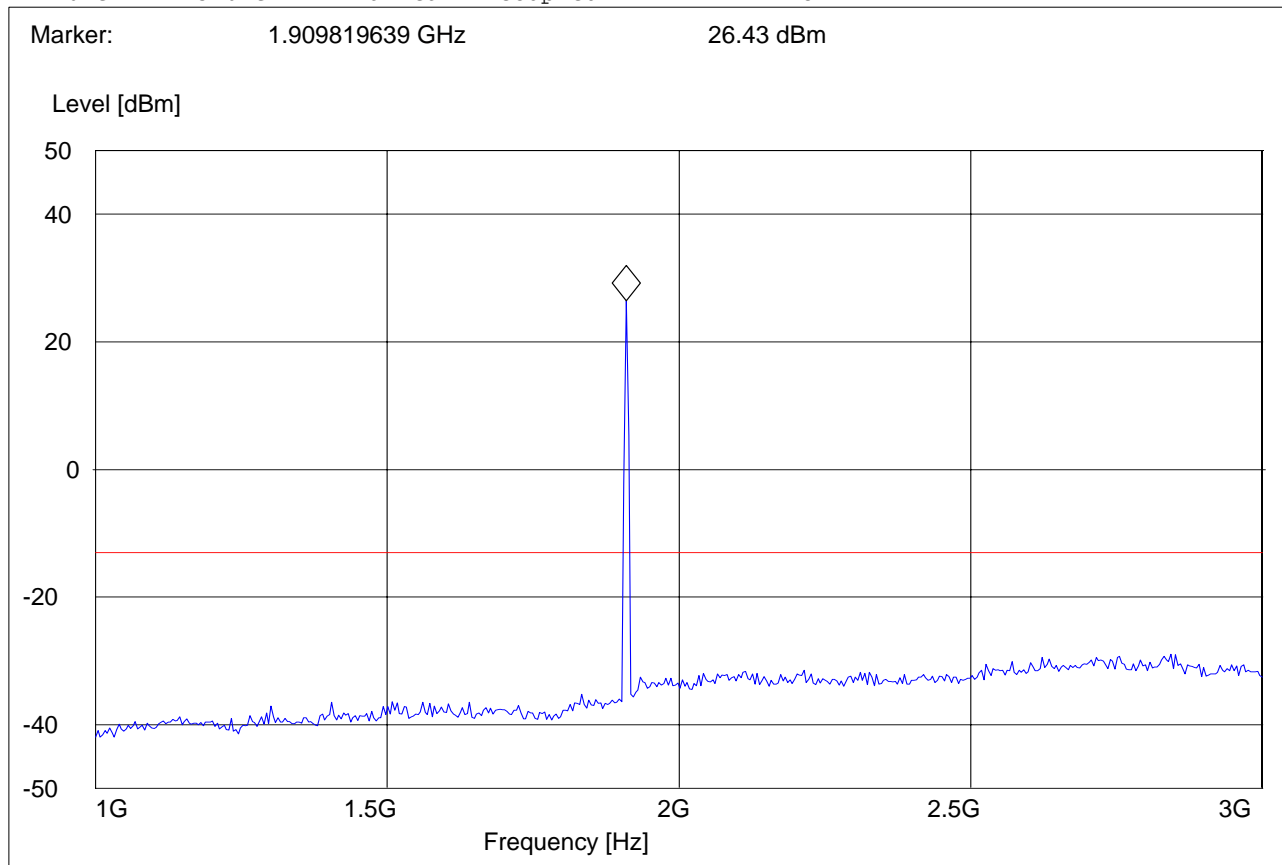



# **RADIATED SPURIOUS EMISSIONS(PCS 1900)**

**Tx @ 1909.8MHz: 3GHz – 18GHz**

Spurious emission limit –13dBm


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH810, TABLE 250°  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: FCC24 SPURI 3-18G

## **SWEEP TABLE: "FCC 24Spuri 3-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 18 GHz -15.94 dBm

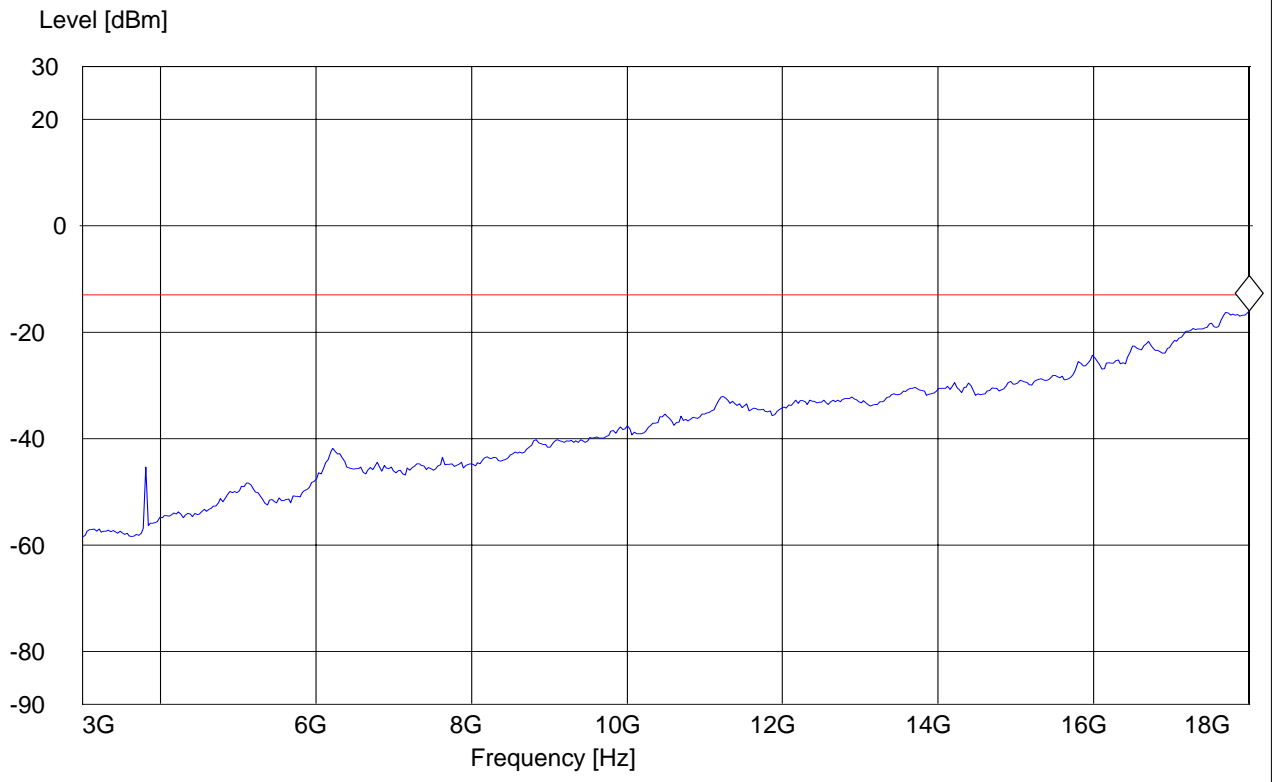



## RADIATED SPURIOUS EMISSIONS(PCS 1900)

18GHz – 19.1GHz

Spurious emission limit –13dBm


**Note: This plot is valid for low, mid & high channels (worst-case plot)**

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: TX CH810, TABLE 250°  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: FCC24 SPURI 18-19.1G

### ***SWEEP TABLE: "FCC 24spuri 18-19.1G"***

Short Description:		FCC 24 18GHz-19.1GHz				
Start	Stop	Detector	Meas.	IF	Transducer	
Frequency	Frequency		Time	Bandw.		
18.0 GHz	19.1 GHz	Average	Coupled	1 MHz	DUMMY-DBM	

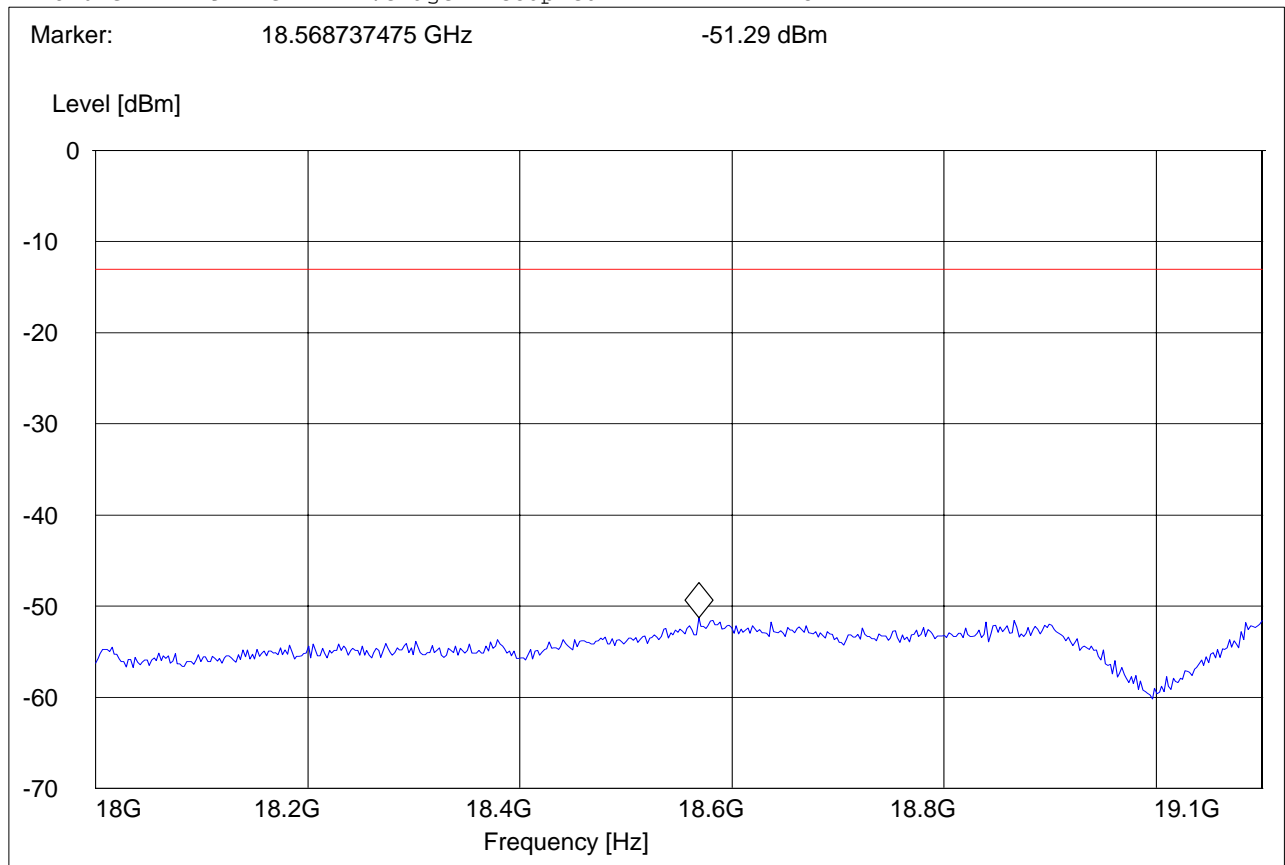

### 5.3 RECEIVER RADIATED EMISSIONS

§ 2.1053 / RSS-132 & 133

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.
2. Receiver emissions were measured to at least 3 time the fundamental emission.
3. Receiver emissions were measured with device receiving on a channel in both the 850 and 1900 MHz bands. Emission levels were identical for the two bands. Only one set of emission measurements is shown below.

**Limits**

**SUBCLAUSE § RSS-133**

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3



### 5.3.1 Receiver Spurious on EUT

#### RECEIVER RADIATED EMISSIONS

30MHz – 1GHz

Antenna: vertical


Note: Peak Reading Vs. Quasi-Peak Limit.

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: GSM850 IDLE MODE, NO ABSORBERS, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: CANADA RE 30-1G\_V

#### ***SWEEP TABLE: "CANADA RE\_30M-1G\_Ver"***

Unit: dB $\mu$ V/m  
Detector: Mode:  
Curve 1: MaxPeak MaxHold

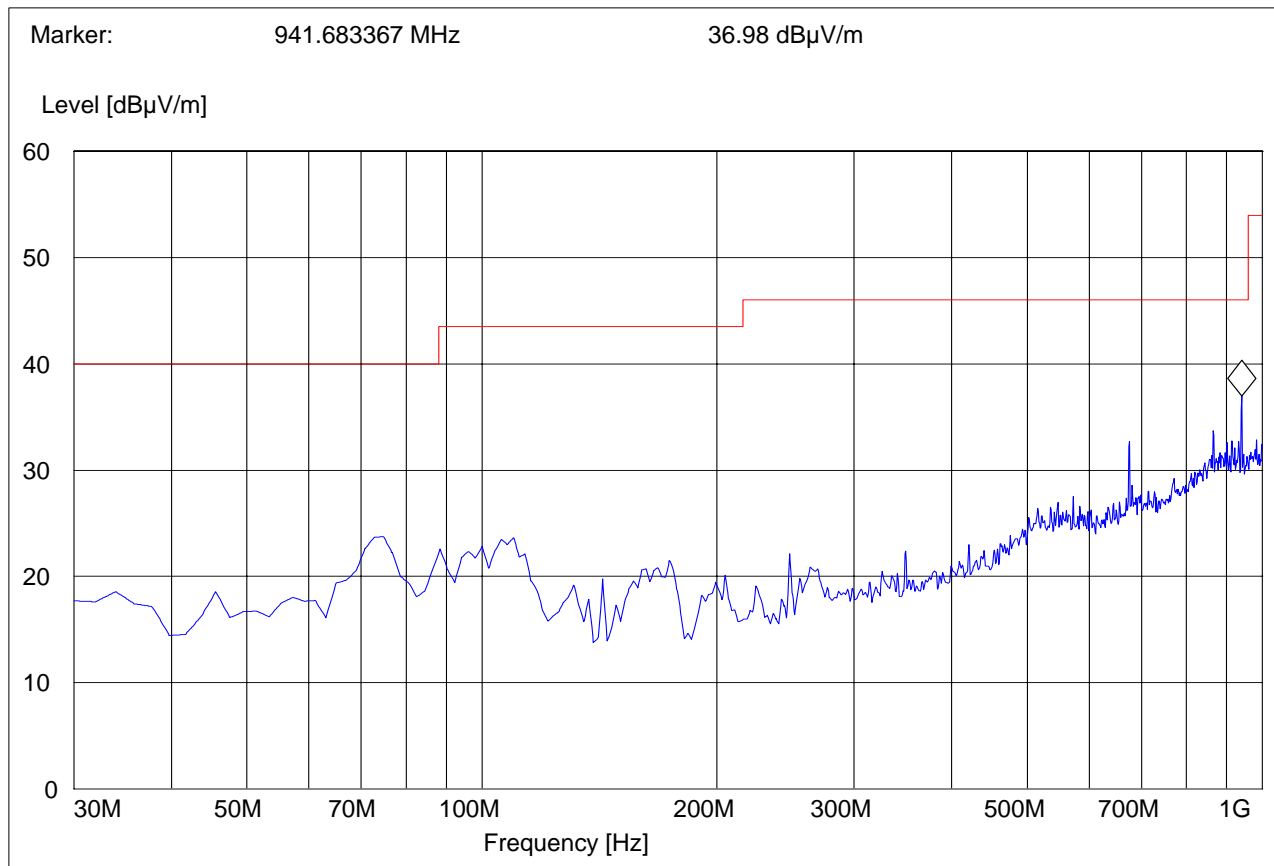





## RECEIVER RADIATED EMISSIONS

1GHz – 3GHz

Note: Peak Reading Vs. Average Limit.


**CETECOM Inc.**

**411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: GSM850 IDLE MODE, NO ABSORBERS, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: CANADA RE 1-3G

### ***SWEEP TABLE: "CANADA RE\_1-3G"***

Unit: dBμV/m  
Detector: Mode:  
Curve 1: MaxPeak MaxHold

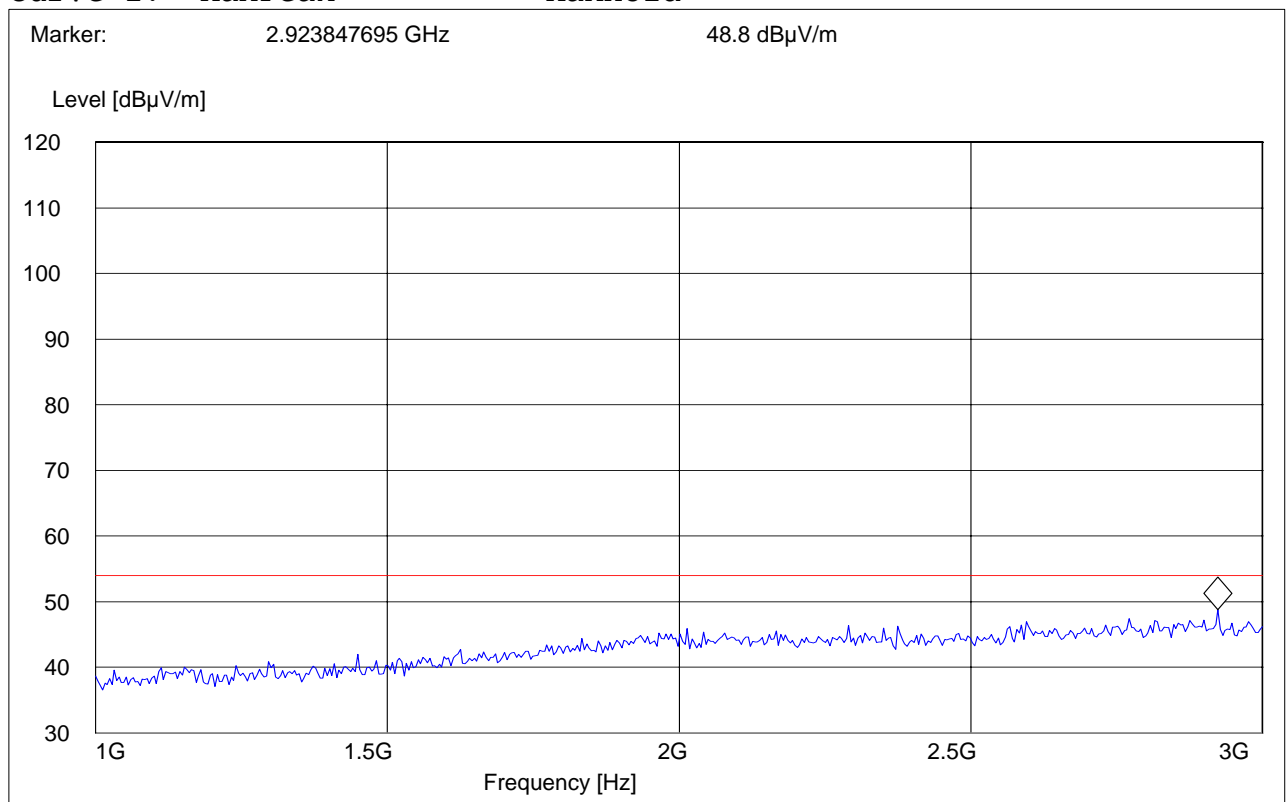



## RECEIVER RADIATED EMISSIONS

3GHz – 18GHz


Note: Peak Reading Vs. Average Limit.

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: D7900/mc75 UNIT 2  
Customer: HHP  
Operating Mode: GSM850 IDLE MODE, NO ABSORBERS, TABLE 0°  
Antenna: V  
EUT: V  
Test Engineer: PETER  
Voltage: AC ADAPTOR  
Sweep: CANADA RE 3-18G

### ***SWEEP TABLE: "CANADA RE\_3-18G"***

Unit: dBμV/m  
Detector: Mode:  
Curve 1: MaxPeak MaxHold

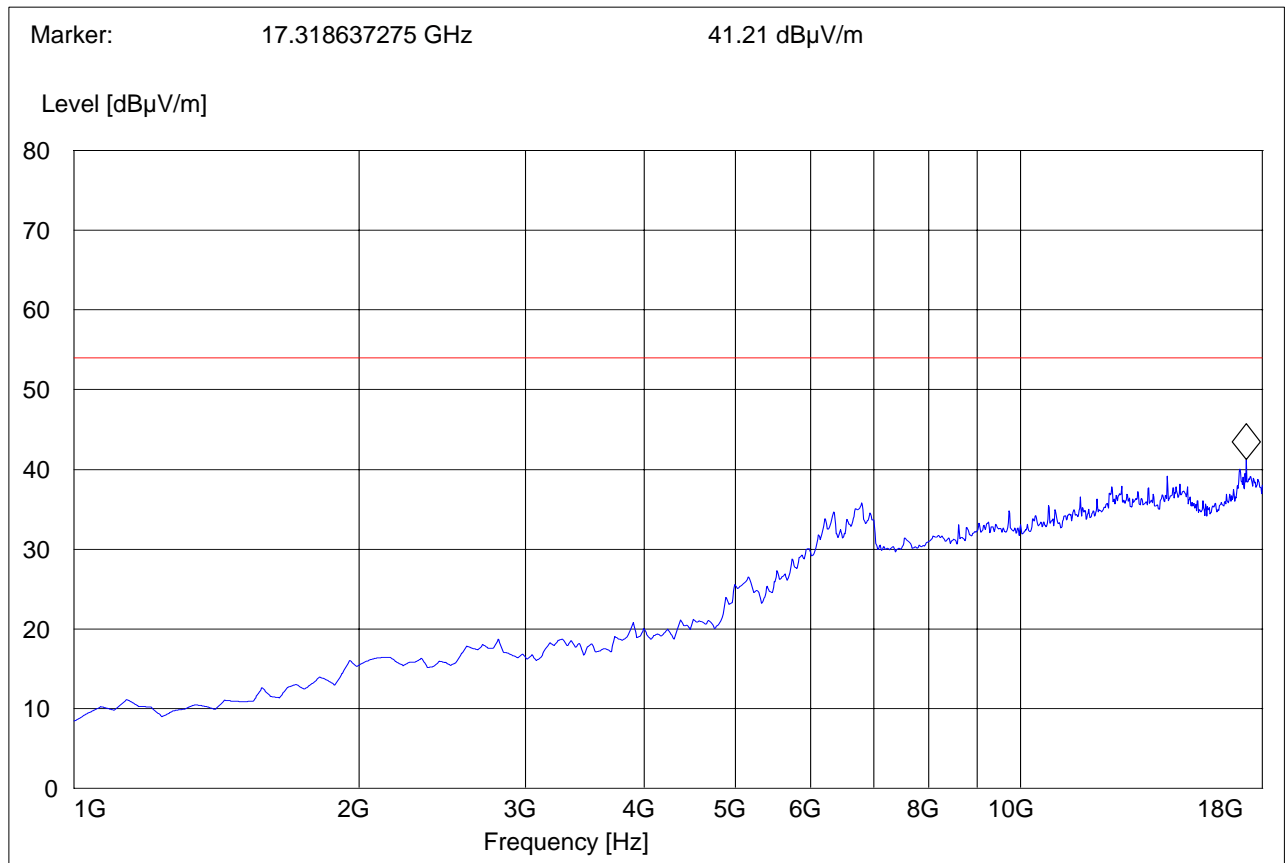

## **TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

<b>No</b>	<b>Instrument/Ancillary</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Serial No.</b>	<b>Cal Due</b>	<b>Interval</b>
<b>01</b>	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2007	1 year
<b>02</b>	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2007	1 year
<b>03</b>	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2007	1 year
<b>04</b>	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2007	1 year
<b>05</b>	Biconilog Antenna	3141	EMCO	0005-1186	June 2007	1 year
<b>06</b>	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2007	1 year
<b>07</b>	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2007	1 year
<b>08</b>	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
<b>09</b>	Climatic Chamber	VT4004	Voltsch	G1115	May 2007	1 year
<b>10</b>	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
<b>11</b>	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
<b>12</b>	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2007	1 year
<b>13</b>	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2007	1 year
<b>14</b>	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2007	1 year
<b>15</b>	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2007	1 year
<b>16</b>	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2007	1 year
<b>17</b>	Loop Antenna	6512	EMCO	00049838	July 2007	2 years

## **6 References**

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,  
PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.


FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,  
PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-C-2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.

## **7 BLOCK DIAGRAMS**

### **Conducted Testing**

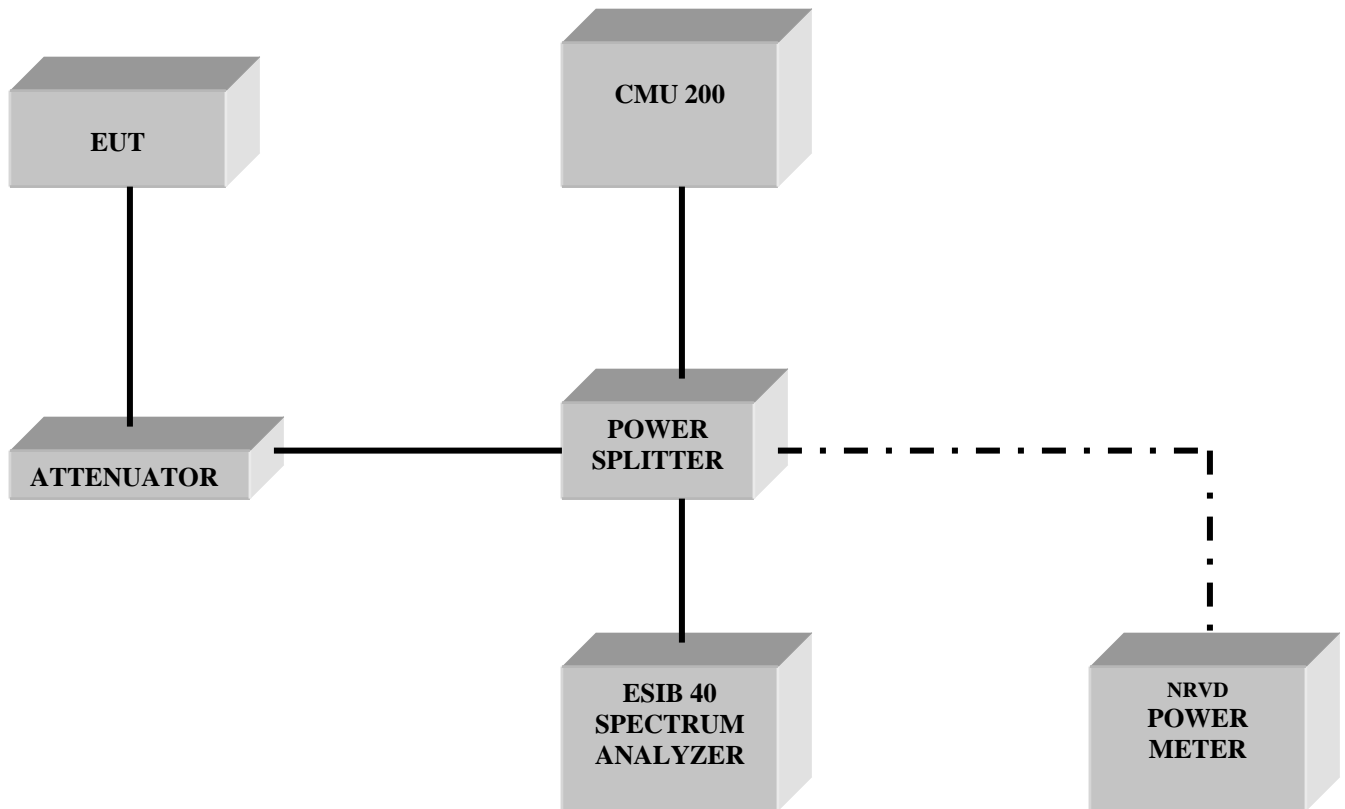

## Radiated Testing

### ANECHOIC CHAMBER

