



## **ANSI/IEEE Std. C95.1-1992**

in accordance with the requirements of  
FCC Report and Order: ET Docket 93-62



## **FCC TEST REPORT**

**For**

**802.11a/b/g/n/ac WLAN + Bluetooth PCI-E Mini Card  
(Trade Name :lenovo/ Model Number: Flex 3-1570)**

**Trade Name: Broadcom**

**Model: BCM94352Z**

**Issued to  
Broadcom Corporation  
190 Mathilda Avenue, Sunnyvale, CA 94086**

**Issued by  
Compliance Certification Services Inc.  
No.11, Wugong 6th Rd., Wugu Dist.,  
New Taipei City 24891,  
Taiwan. (R.O.C.)  
<http://www.ccsrf.com>  
[service@ccsrf.com](mailto:service@ccsrf.com)  
Issued Date: 2015/01/29**



---

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



## Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	2015/01/29	Initial Issue	ALL	Tony Liao
01	2015/03/10	1. Revise battery note. 2. Revise explained test mode. 3. Add note for Spot check testing. 4. Revise 1g SAR of Simultaneous Transmission Analysis.	6, 42, 44, 47, 48	Tony Liao
02	2015/03/19	1. Revise battery note. 2. Add Wi-Fi 2.4GHz 802.11n HT40 power. 3. Remove Antenna note 4. Add SAR measurements results for Spot check. 5. Revise note for Spot check testing.	6, 34, 42, 44	Tony Liao



## Table Of Contents

<b>1</b>	<b>Certificate of Compliance (SAR Evaluation)</b>	<b>5</b>
<b>2</b>	<b>Description of Equipment Under Test</b>	<b>6</b>
<b>3</b>	<b>Requirements for Compliance Testing Defined</b>	<b>7</b>
3.1	Requirements for Compliance Testing Defined by the FCC	7
<b>4</b>	<b>Dosimetric Assessment System</b>	<b>8</b>
4.1	Measurement System Diagram	9
4.2	System Components	10
<b>5</b>	<b>Evaluation Procedures</b>	<b>13</b>
<b>6</b>	<b>SAR Measurement Procedures</b>	<b>15</b>
6.1	Normal SAR Test Procedure	15
<b>7</b>	<b>Device Under Test</b>	<b>17</b>
7.1	Band Interface	17
7.2	Simultaneous Transmission	18
<b>8</b>	<b>Summary of SAR Test Exclusion Configurations</b>	<b>19</b>
8.1	Standalone SAR Test Exclusion Calculations	19
8.1.1	SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User	20
8.1.2	SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User	22
8.1.3	SAR test configuration	24
<b>9</b>	<b>Measurement Uncertainty</b>	<b>26</b>
<b>10</b>	<b>Exposure Limit</b>	<b>27</b>
<b>11</b>	<b>Tissue Dielectric Properties</b>	<b>28</b>
11.1	Test Liquid Confirmation	28
11.2	Typical Composition of Ingredients for Liquid Tissue Phantoms	29
11.3	Simulating Liquids Parameter Check Results	30
<b>12</b>	<b>System Performance Check</b>	<b>32</b>
12.1	System Performance Check Results	33
<b>13</b>	<b>RF Output Power Measurement</b>	<b>34</b>
13.1	Wi-Fi (2.4 GHz Band)	34
13.2	Wi-Fi (5 GHz Band)	35
13.3	Bluetooth	41
<b>14</b>	<b>SAR Measurements Results</b>	<b>42</b>
<b>15</b>	<b>Summary of Highest SAR Values</b>	<b>45</b>
<b>16</b>	<b>Simultaneous Transmission SAR Analysis</b>	<b>46</b>
16.1	Sum of the SAR for Simultaneous Transmission Analysis	47
16.1.1	Sum of the 1g SAR for Body Exposure Condition	47



16.1.2 Sum of the 1g SAR for Body Exposure Condition .....	48
<b>17 Equipment List &amp; Calibration Status .....</b>	<b>49</b>
<b>18 Facilities .....</b>	<b>50</b>
<b>19 Reference .....</b>	<b>50</b>
<b>20 Attachments.....</b>	<b>51</b>



## 1 Certificate of Compliance (SAR Evaluation)

**Applicant:** Broadcom Corporation  
190 Mathilda Avenue, Sunnyvale, CA 94086

**Equipment Under Test:** 802.11a/b/g/n/ac WLAN + Bluetooth PCI-E Mini Card  
(Trade Name :lenovo/ Model Number: Flex 3-1570)

**Trade Name:** Broadcom

**Model Number:** BCM94352Z

**Date of Test:** January 24 ~ 26, 2015

**Device Category:** PORTABLE DEVICES

**Exposure Category:** GENERAL POPULATION/UNCONTROLLED EXPOSURE

Applicable Standards	
FCC	<ul style="list-style-type: none"><li>● KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03</li><li>● KDB 447498 D01 General RF Exposure Guidance v05r02</li><li>● KDB 616217 D04 SAR for laptop and tablets v01r02</li><li>● KDB 248227 D01 SAR measurement for 802 11 a b g v01r02</li></ul>
Limit	
1.6W/kg	
Test Result	
Pass	

The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Alex Wu  
Section Manager  
Compliance Certification Services Inc.

Tested by:

Tony Liao  
SAR Engineer  
Compliance Certification Services Inc.



## 2 Description of Equipment Under Test

Product	802.11a/b/g/n/ac WLAN + Bluetooth PCI-E Mini Card		
Trade Name	Broadcom		
Model Number	BCM94352Z		
RF Module	Broadcom	Model:	BCM94352Z
Host Name	lenovo	Host Model Name	Flex 3-1570 ; Flex 3-1535
Host Model discrepancy	Market segmentation		
Transmitters	Wi-Fi & Bluetooth		
Modulation Technique	Bluetooth: GFSK for 1Mbps; $\pi/4$ -DQPSK for 2Mbps;8DPSK for 3Mbps		
	802.11a: Orthogonal Frequency Division Multiplexing (OFDM)		
	802.11b: Direct Sequence Spread Spectrum(DSSS)		
	802.11g: Orthogonal Frequency Division Multiplexing (OFDM)		
	802.11n: Orthogonal Frequency Division Multiplexing (OFDM)		
	802.11ac: Orthogonal Frequency Division Multiplexing (OFDM)		
Antenna Specification	Ant 1	Brand name	HIGH-TEK ELECTRONICS CO., LTD
		Parts Number	025.9006N.0011
			025.9006O.0011
		Type	PIFA
	Ant 2	Brand name	Wistron Neweb Corporation
		Parts Number	025.9006N.0001
			025.9006O.0001
		Type	PIFA
Rechargeable Li-polymer Battery–alternate	<p>1.Brand: LG Model: L14L3P21 Rating: 11.1 Vdc / 4050mAh, 45Wh</p> <p>2.Brand: SIMPLO Model: L14M3P21 Rating: 11.1 Vdc / 4050mAh, 45Wh</p> <p>3.Brand: LG Model: L14L2P21 Rating: 7.4 Vdc / 4050mAh, 30Wh</p> <p>4.Brand: SIMPLO Model: L14M2P21 Rating: 7.4 Vdc / 4050mAh, 30Wh</p> <p>Test is using battery No.1.There are difference rating of battery, we chooses No.1 to perform the SAR testing of maximum rating.</p>		

### Remark:

1. The sample selected for test was prototype that approximated to production product and was provided by manufacturer
2. The platform have Notebook mode, Stand mode, Tablet mode and Tent mode. But antennas are upper in the displays section of a laptop computer, we Performed SAR test in tablet mode, because the EUT can fold 360 degrees.



### **3 Requirements for Compliance Testing Defined**

#### **3.1 Requirements for Compliance Testing Defined by the FCC**

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996 [1]. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/kg for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992 [6].




## **4 Dosimetric Assessment System**

These measurements were performed with the automated near-field scanning system DASY4/DAST5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m) which positions the probes with a positional repeatability of better than  $\pm 0.02$  mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetric probe EX3DV4-SN: 3665 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated with the procedure and found to be better than  $\pm 0.25$  dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE 1528-2013.



#### 4.1 Measurement System Diagram

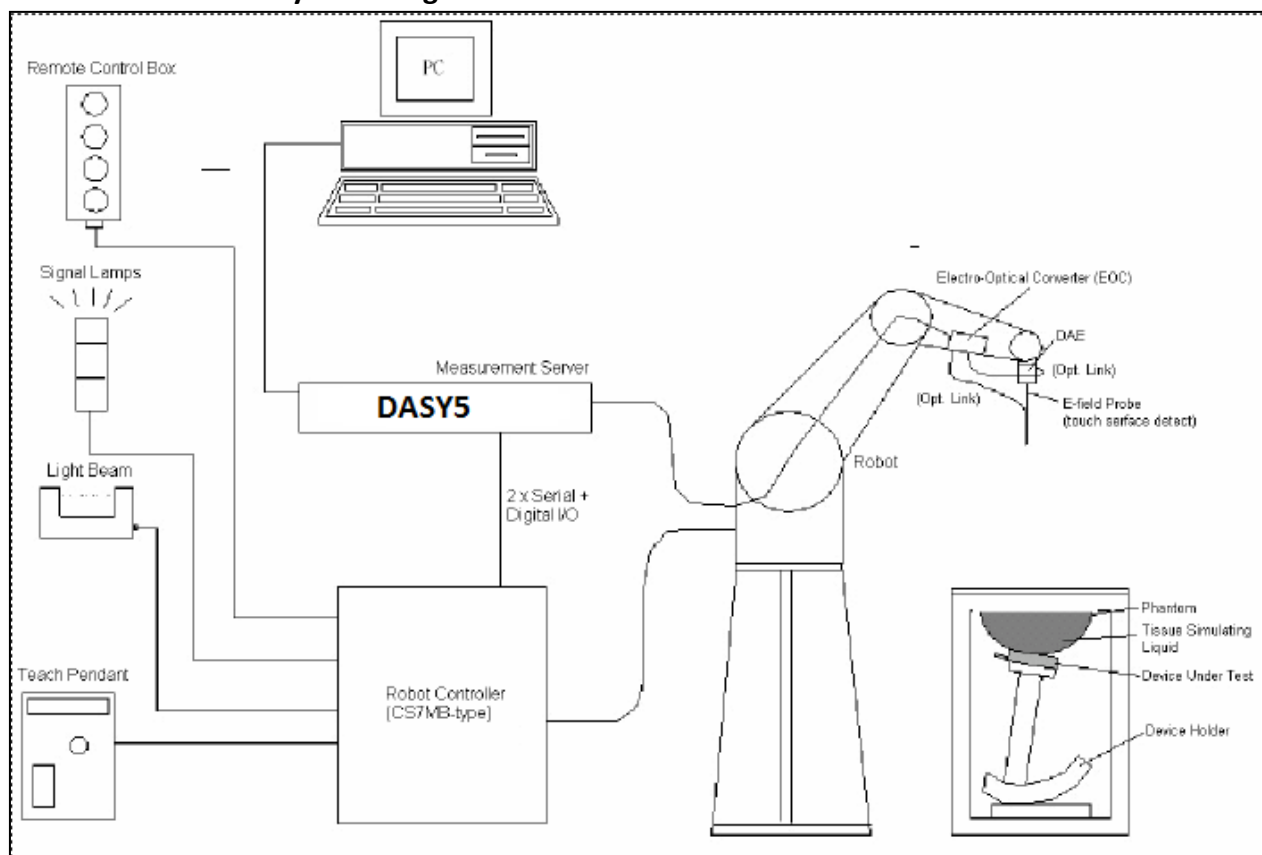

##### The DASY4/DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4/DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.



## 4.2 System Components

### DASY4/DASY5 Measurement Server



The DASY4/DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4/DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.



The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

### Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



### EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements

- Construction:** Symmetrical design with triangular core  
Built-in shielding against static charges  
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
- Calibration:** Basic Broad Band Calibration in air: 10-3000 MHz.  
Conversion Factors (CF) for HSL 900 and HSL 1800  
CF-Calibration for other liquids and frequencies upon request.
- Frequency:** 10 MHz to > 6 GHz; Linearity:  $\pm 0.2$  dB (30 MHz to 3 GHz)
- Directivity:**  $\pm 0.3$  dB in HSL (rotation around probe axis)  
 $\pm 0.5$  dB in HSL (rotation normal to probe axis)
- Dynamic Range:** 10  $\mu$ W/g to > 100 mW/g; Linearity:  $\pm 0.2$  dB  
(noise: typically < 1  $\mu$ W/g)



REV. 02



**Dimensions:** Overall length: 330 mm (Tip: 20 mm)  
Tip diameter: 2.5 mm (Body: 12 mm)  
Distance from probe tip to dipole centers: 1 mm

**Application:** High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Interior of probe


#### SAM Phantom (V4.0)

**Construction:** The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2013, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

**Shell Thickness:**  $2 \pm 0.2$  mm

**Filling Volume:** Approx. 25 liters

**Dimensions:** Height: 810mm; Length: 1000mm; Width: 500mm

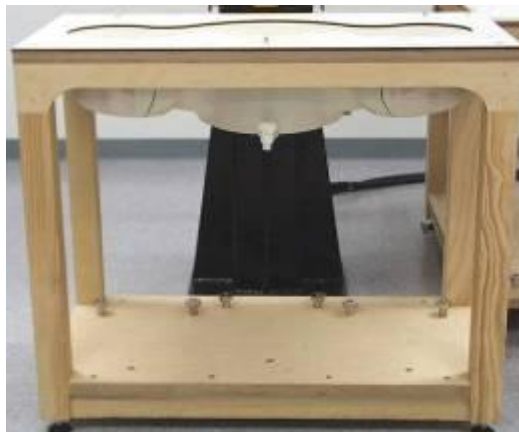

#### SAM Phantom (ELI4)

**Construction:** Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles

**Shell Thickness:**  $2.0 \pm 0.2$  mm (sagging: <1%)

**Filling Volume:** Approx. 25 liters

**Dimensions:** Major ellipse axis: 600 mm

Minor axis: 400 mm 500mm





### Device Holder for SAM Twin Phantom

**Construction:** In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).



### System Validation Kits for SAM Phantom (V4.0)

**Construction:** Symmetrical dipole with I/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

**Frequency:** 2450, 5200, 5300, 5600, 5800 MHz

**Return loss:** > 20 dB at specified validation position

**Power capability:** > 100 W ( $f < 1\text{GHz}$ ); > 40 W ( $f > 1\text{GHz}$ )

**Dimensions:** D2450V2: dipole length: 51.5 mm; overall height: 290 mm  
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm



### System Validation Kits for ELI4 phantom

**Construction:** Symmetrical dipole with I/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

**Frequency:** 2450, 5200, 5300, 5600, 5800 MHz

**Return loss:** > 20 dB at specified validation position

**Power capability:** > 100 W ( $f < 1\text{GHz}$ ); > 40 W ( $f > 1\text{GHz}$ )

**Dimensions:** D2450V2: dipole length: 51.5 mm; overall height: 290 mm  
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm





## 5 Evaluation Procedures

### Data Evaluation

The DASY4/DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	$dcp_i$
Device parameters:	- Frequency	$f$
	- Crest factor	$cf$
Media parameters:	- Conductivity	$\sigma$
	- Density	$\rho$

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	$V_i$	= Compensated signal of channel i	(i = x, y, z)
	$U_i$	= Input signal of channel i	(i = x, y, z)
	$cf$	= Crest factor of exciting field	(DASY parameter)
	$dcp_i$	= Diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: 
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes: 
$$H_i = \sqrt{V_i} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

with	$V_i$	= Compensated signal of channel i	(i = x, y, z)
	$Norm_i$	= Sensor sensitivity of channel i	(i = x, y, z)

$\mu V/(V/m)^2$  for E0field Probes

$ConvF$	= Sensitivity enhancement in solution
$a_{ij}$	= Sensor sensitivity factors for H-field probes
$f$	= Carrier frequency (GHz)
$E_i$	= Electric field strength of channel i in V/m
$H_i$	= Magnetic field strength of channel i in A/m



The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with

$SAR$	= local specific absorption rate in W/kg
$E_{tot}$	= total field strength in V/m
$\sigma$	= conductivity in [mho/m] or [Siemens/m]
$\rho$	= equivalent tissue density in g/cm <sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{377} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with

$P_{pwe}$	= Equivalent power density of a plane wave in mW/cm <sup>2</sup>
$E_{tot}$	= total electric field strength in V/m
$H_{tot}$	= total magnetic field strength in A/m



## 6 SAR Measurement Procedures

### 6.1 Normal SAR Test Procedure

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4/DASY5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, the grid resolution has to less than 15 mm by 15 mm at frequency  $\leq 2\text{GHz}$ ; the grid resolution has to less than 12mm by 12 mm at frequency between 2GHz to 4GHz; grid resolution has to less than 10 mm by 10 mm at frequency between 4GHz to 6GHz.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

	$\leq 3\text{ GHz}$	$> 3\text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1\text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5\text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$	$\leq 2\text{ GHz}: \leq 15\text{ mm}$ $2 - 3\text{ GHz}: \leq 12\text{ mm}$	$3 - 4\text{ GHz}: \leq 12\text{ mm}$ $4 - 6\text{ GHz}: \leq 10\text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



- Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures points in accordance with the frequency can be divided into three parts. (1) The zoom scan volume was set to 5x5x7 points at frequency  $\leq 2$  GHz. (2) The zoom scan volume was set to 7x7x7 points at frequency between 2 GHz to 4 GHz (3) The zoom scan volume was set to 7x7x12 points at frequency between 4 GHz to 6 GHz. The measures points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

			$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm	3 – 4 GHz: $\leq 5$ mm 4 – 6 GHz: $\leq 4$ mm
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points losest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Maximum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	

- Power Drift Measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY4/DASY5 software stop the measurements if this limit is exceeded.

- Z-Scan**

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.





## 7 Device Under Test

### 7.1 Band Interface

Tx Frequency Bands	<ul style="list-style-type: none"><li>802.11 a/b/g/n/ac: 2412 - 2462 MHz 5180 - 5825 MHz</li><li>Bluetooth: 2402 - 2480 MHz</li></ul>
Mode	<ul style="list-style-type: none"><li>802.11 a/b/g/n HT20/HT40/ac</li><li>Bluetooth 2.1</li><li>Bluetooth 4.0 LE</li></ul>

**7.2 Simultaneous Transmission**

No.	Conditions	Body SAR	Hotspot
1	Wi-Fi 2.4GHz_Main Ant + Bluetooth	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2	Wi-Fi 2.4GHz_Aux Ant + Bluetooth	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3	Wi-Fi 5GHz_Main Ant + Bluetooth	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4	Wi-Fi 5GHz_Aux Ant + Bluetooth	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

☒: The Product can simultaneously transmit

☒: The Product can't simultaneously transmit



## **8 Summary of SAR Test Exclusion Configurations**

### **8.1 Standalone SAR Test Exclusion Calculations**

Since the Dedicated Host Approach is applied, the standalone SAR test exclusion procedure in KDB 447498 section 4.3.1 is applied in conjunction with KDB 616217 section 4.3 to determine the minimum test separation distance:

1. According to KDB 447498 Section 4.1 5) if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the rear or edge the separation distance used for the estimated SAR calculations is 0 mm.
2. When the minimum test separation distance is < 5mm, a distance of 5mm is applied to determine SAR test exclusion.
3. When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.
4. If the antenna to DUT adjacent edge or bottom separation distance >50mm the actual antenna to user separation distance is used to determine SAR exclusion and estimated SAR value.

Refer to Appendix for the specific details on the antenna-to-antenna and antenna-to-edge distances used for test exclusion calculations.

**8.1.1 SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User**

According to KDB 447498 v05 r02 in section 4.3.1, if the calculated threshold value is > 3 then SAR testing is required.

**Tablet Mode**

Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	802.11b	2412	16	40	18.8	4.0	256.0	240.0	90.0	3.3	12.4	>200mm	>200mm	>50mm
	2.4GHz	802.11g	2412	16	40	18.8	4.0	256.0	240.0	90.0	3.3	12.4	>200mm	>200mm	>50mm
	2.4GHz	802.11n HT20	2412	16	40	18.8	4.0	256.0	240.0	90.0	3.3	12.4	>200mm	>200mm	>50mm
	5.2GHz	802.11a	5180	14	25	18.8	4.0	256.0	240.0	90.0	3.0	11.4	>200mm	>200mm	>50mm
	5.3GHz		5260	14	25	18.8	4.0	256.0	240.0	90.0	3.0	11.5	>200mm	>200mm	>50mm
	5.5GHz		5500	16	40	18.8	4.0	256.0	240.0	90.0	5.0	18.8	>200mm	>200mm	>50mm
	5.8GHz		5745	18	63	18.8	4.0	256.0	240.0	90.0	8.0	30.2	>200mm	>200mm	>50mm
	5.2GHz	802.11n HT20	5200	14	25	18.8	4.0	256.0	240.0	90.0	3.0	11.4	>200mm	>200mm	>50mm
	5.3GHz		5260	14	25	18.8	4.0	256.0	240.0	90.0	3.0	11.5	>200mm	>200mm	>50mm
	5.5GHz		5520	16	40	18.8	4.0	256.0	240.0	90.0	5.0	18.8	>200mm	>200mm	>50mm
	5.8GHz		5745	18	63	18.8	4.0	256.0	240.0	90.0	8.0	30.2	>200mm	>200mm	>50mm
	5.2GHz	802.11n HT40	5230	14	25	18.8	4.0	256.0	240.0	90.0	3.0	11.4	>200mm	>200mm	>50mm
	5.3GHz		5310	14	25	18.8	4.0	256.0	240.0	90.0	3.1	11.5	>200mm	>200mm	>50mm
	5.5GHz		5500	16	40	18.8	4.0	256.0	240.0	90.0	5.0	18.8	>200mm	>200mm	>50mm
	5.8GHz		5745	18	63	18.8	4.0	256.0	240.0	90.0	8.0	30.2	>200mm	>200mm	>50mm
	5.2GHz	802.11 ac	5210	14	25	18.8	4.0	256.0	240.0	90.0	3.0	11.4	>200mm	>200mm	>50mm
	5.3GHz		5290	14	25	18.8	4.0	256.0	240.0	90.0	3.1	11.5	>200mm	>200mm	>50mm
	5.5GHz		5690	16	40	18.8	4.0	256.0	240.0	90.0	5.1	19.1	>200mm	>200mm	>50mm
	5.8GHz		5775	17.5	56	18.8	4.0	256.0	240.0	90.0	7.2	26.9	>200mm	>200mm	>50mm



Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Aux	2.4GHz	802.11b	2412	16	40	18.8	4.0	80.0	240.0	266.0	3.3	12.4	>50mm	>200mm	>200mm
	2.4GHz	802.11g	2412	16	40	18.8	4.0	80.0	240.0	266.0	3.3	12.4	>50mm	>200mm	>200mm
	2.4GHz	802.11n HT20	2412	16	40	18.8	4.0	80.0	240.0	266.0	3.3	12.4	>50mm	>200mm	>200mm
	5.2GHz	802.11a	5180	14	25	18.8	4.0	80.0	240.0	266.0	3.0	11.4	>50mm	>200mm	>200mm
	5.3GHz		5260	14	25	18.8	4.0	80.0	240.0	266.0	3.0	11.5	>50mm	>200mm	>200mm
	5.5GHz		5500	16	40	18.8	4.0	80.0	240.0	266.0	5.0	18.8	>50mm	>200mm	>200mm
	5.8GHz		5745	18	63	18.8	4.0	80.0	240.0	266.0	8.0	30.2	>50mm	>200mm	>200mm
	5.2GHz	802.11n HT20	5200	14	25	18.8	4.0	80.0	240.0	266.0	3.0	11.4	>50mm	>200mm	>200mm
	5.3GHz		5260	14	25	18.8	4.0	80.0	240.0	266.0	3.0	11.5	>50mm	>200mm	>200mm
	5.5GHz		5520	16	40	18.8	4.0	80.0	240.0	266.0	5.0	18.8	>50mm	>200mm	>200mm
	5.8GHz		5745	18	63	18.8	4.0	80.0	240.0	266.0	8.0	30.2	>50mm	>200mm	>200mm
	5.2GHz	802.11n HT40	5230	14	25	18.8	4.0	80.0	240.0	266.0	3.0	11.4	>50mm	>200mm	>200mm
	5.3GHz		5310	14	25	18.8	4.0	80.0	240.0	266.0	3.1	11.5	>50mm	>200mm	>200mm
	5.5GHz		5500	16	40	18.8	4.0	80.0	240.0	266.0	5.0	18.8	>50mm	>200mm	>200mm
	5.8GHz		5745	18	63	18.8	4.0	80.0	240.0	266.0	8.0	30.2	>50mm	>200mm	>200mm
	5.2GHz	802.11 ac	5210	14	25	18.8	4.0	80.0	240.0	266.0	3.0	11.4	>50mm	>200mm	>200mm
	5.3GHz		5290	14	25	18.8	4.0	80.0	240.0	266.0	3.1	11.5	>50mm	>200mm	>200mm
	5.5GHz		5690	16	40	18.8	4.0	80.0	240.0	266.0	5.1	19.1	>50mm	>200mm	>200mm
	5.8GHz		5775	17.5	56	18.8	4.0	80.0	240.0	266.0	7.2	26.9	>50mm	>200mm	>200mm
	Bluetooth	DH5	2402	8.5	7	18.8	4.0	80.0	240.0	266.0	0.6	2.2	>50mm	>200mm	>200mm

**8.1.2 SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User**

According to KDB 447498 v05 r02, if the calculated Power threshold is less than the output power then SAR testing is required.

**Tablet Mode**

Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	802.11b	2412	16	40	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	496.6
	2.4GHz	802.11g	2412	16	40	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	496.6
	2.4GHz	802.11n HT20	2412	16	40	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	496.6
	5.2GHz	802.11a	5180	14	25	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	465.9
	5.3GHz		5260	14	25	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	465.4
	5.5GHz		5500	16	40	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	464.0
	5.8GHz		5745	18	63	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	462.6
	5.2GHz	802.11n HT20	5200	14	25	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	465.8
	5.3GHz		5260	14	25	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	465.4
	5.5GHz		5520	16	40	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	463.8
	5.8GHz		5745	18	63	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	462.6
	5.2GHz	802.11n HT40	5230	14	25	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	465.6
	5.3GHz		5310	14	25	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	465.1
	5.5GHz		5500	16	40	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	464.0
	5.8GHz		5745	18	63	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	462.6
	5.2GHz	802.11 ac	5210	14	25	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	465.7
	5.3GHz		5290	14	25	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	465.2
	5.5GHz		5690	16	40	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	462.9
	5.8GHz		5775	17.5	56	18.8	4.0	256.0	240.0	90.0	<50mm	<50mm	>200mm	>200mm	462.4



Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Aux	2.4GHz	802.11b	2412	16	40	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	396.6	>200mm	>200mm
	2.4GHz	802.11g	2412	16	40	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	396.6	>200mm	>200mm
	2.4GHz	802.11n HT20	2412	16	40	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	396.6	>200mm	>200mm
	5.2GHz	802.11a	5180	14	25	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	365.9	>200mm	>200mm
	5.3GHz		5260	14	25	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	365.4	>200mm	>200mm
	5.5GHz		5500	16	40	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	364.0	>200mm	>200mm
	5.8GHz		5745	18	63	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	362.6	>200mm	>200mm
	5.2GHz	802.11n HT20	5200	14	25	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	365.8	>200mm	>200mm
	5.3GHz		5260	14	25	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	365.4	>200mm	>200mm
	5.5GHz		5520	16	40	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	363.8	>200mm	>200mm
	5.8GHz		5745	18	63	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	362.6	>200mm	>200mm
	5.2GHz	802.11n HT40	5230	14	25	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	365.6	>200mm	>200mm
	5.3GHz		5310	14	25	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	365.1	>200mm	>200mm
	5.5GHz		5500	16	40	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	364.0	>200mm	>200mm
	5.8GHz		5745	18	63	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	362.6	>200mm	>200mm
	5.2GHz	802.11 ac	5210	14	25	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	365.7	>200mm	>200mm
	5.3GHz		5290	14	25	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	365.2	>200mm	>200mm
	5.5GHz		5690	16	40	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	362.9	>200mm	>200mm
	5.8GHz		5775	17.5	56	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	362.4	>200mm	>200mm
	Bluetooth	DH5	2402	8.5	7	18.8	4.0	80.0	240.0	266.0	<50mm	<50mm	396.8	>200mm	>200mm

**8.1.3 SAR test configuration**

## Tablet Mode

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main 802.11 b	YES	YES	No	No	No
Wi-Fi Main 802.11 g	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.2GHz	No	YES	No	No	No
Wi-Fi Main 802.11 a_5.3GHz	No	YES	No	No	No
Wi-Fi Main 802.11 a_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 a_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.2GHz	No	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.3GHz	No	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT20_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.2GHz	No	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 n HT40_5.8GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac_5.2GHz	No	YES	No	No	No
Wi-Fi Main 802.11 ac_5.3GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac_5.5GHz	YES	YES	No	No	No
Wi-Fi Main 802.11 ac_5.8GHz	YES	YES	No	No	No

**Note(s):**

1. Yes = SAR is required.
2. No = SAR is not required.





Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Aux 802.11 b	YES	YES	No	No	No
Wi-Fi Aux 802.11 g	YES	YES	No	No	No
Wi-FiAux 802.11 n HT20	YES	YES	No	No	No
Wi-Fi Aux 802.11 a_5.2GHz	No	YES	No	No	No
Wi-Fi Aux 802.11 a_5.3GHz	No	YES	No	No	No
Wi-Fi Aux 802.11 a_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 a_5.8GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.2GHz	No	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.3GHz	No	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT20_5.8GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.2GHz	No	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 n HT40_5.8GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac_5.2GHz	No	YES	No	No	No
Wi-Fi Aux 802.11 ac_5.3GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac_5.5GHz	YES	YES	No	No	No
Wi-Fi Aux 802.11 ac_5.8GHz	YES	YES	No	No	No
Bluetooth_DH5	No	No	No	No	No

**Note(s):**

1. Yes = SAR is required.
2. No = SAR is not required.



## 9 Measurement Uncertainty

Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram

Uncertainty Component	Uncertainty	Prob.	Div.	$c_i (10g)$	Std. Unc.(1-g)	$v_i$ or $v_{eff}$
Measurement System						
Probe Calibration ( $k=1$ )	6.00	Normal	1	1	6.00	$\infty$
Probe Isotropy	7.60	Rectangular	$\sqrt{3}$	0.7	3.07	$\infty$
Boundary Effect	0.65	Rectangular	$\sqrt{3}$	1	0.38	$\infty$
Linearity	4.70	Rectangular	$\sqrt{3}$	1	2.71	$\infty$
Modulation Response	2.40	Rectangular	$\sqrt{3}$	1	1.40	$\infty$
System Detection Limit	1.00	Rectangular	$\sqrt{3}$	1	0.58	$\infty$
Readout Electronics	0.30	Normal	1	1	0.30	$\infty$
Response Time	0.80	Rectangular	$\sqrt{3}$	1	0.46	$\infty$
Integration Time	2.60	Rectangular	$\sqrt{3}$	1	1.50	$\infty$
RF Ambient Conditions	3.00	Rectangular	$\sqrt{3}$	1	1.73	$\infty$
RF Ambient Reflections	3.00	Rectangular	$\sqrt{3}$	1	1.73	$\infty$
Probe Positioner Mechanical Tolerance	0.40	Rectangular	$\sqrt{3}$	1	0.23	$\infty$
Probe Positioning with respect to Phantom Shell	2.90	Rectangular	$\sqrt{3}$	1	1.67	$\infty$
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.00	Rectangular	$\sqrt{3}$	1	1.15	$\infty$
<b>Test sample Related</b>						
Test sample Positioning	3.70	Normal	1	1	3.7	89
Device Holder Uncertainty	3.40	Normal	1	1	3.4	5
Output Power Variation - SAR drift measurement	5.00	Rectangular	$\sqrt{3}$	1	2.89	$\infty$
<b>Phantom and Tissue Parameters</b>						
Phantom Uncertainty (shape and thickness tolerances)	7.50	Rectangular	$\sqrt{3}$	1	4.33	$\infty$
Liquid Conductivity - deviation from target values	4.14	Rectangular	$\sqrt{3}$	0.64	1.53	$\infty$
Liquid Conductivity - measurement uncertainty	-2.95	Normal	1	0.64	-1.89	39
Liquid Permittivity - deviation from target values	3.92	Rectangular	$\sqrt{3}$	0.6	1.36	$\infty$
Liquid Permittivity - measurement uncertainty	-1.68	Normal	1	0.6	-1.01	39
Temp. Unc. - Conductivity	1.70	Rectangular	$\sqrt{3}$	0.78	0.77	$\infty$
Temp. Unc. - Permittivity	0.30	Rectangular	$\sqrt{3}$	0.23	0.04	$\infty$
		RSS			11.39	611
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =		$k=2$				22.77%
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =		$k=2$				1.78dB

Measurement uncertainty for 3 to 6 GHz averaged over 1 gram

Uncertainty Component	Uncertainty	Prob.	Div.	$c_i (10g)$	Std. Unc.(1-g)	$v_i$ or $v_{eff}$
Measurement System						
Probe Calibration ( $k=1$ )	6.55	Normal	1	1	6.55	$\infty$
Probe Isotropy	7.60	Rectangular	$\sqrt{3}$	0.7	3.07	$\infty$
Boundary Effect	2.00	Rectangular	$\sqrt{3}$	1	1.15	$\infty$
Linearity	4.70	Rectangular	$\sqrt{3}$	1	2.71	$\infty$
Modulation Response	2.40	Rectangular	$\sqrt{3}$	1	1.40	$\infty$
System Detection Limit	1.00	Rectangular	$\sqrt{3}$	1	0.58	$\infty$
Readout Electronics	0.30	Normal	1	1	0.30	$\infty$
Response Time	0.80	Rectangular	$\sqrt{3}$	1	0.46	$\infty$
Integration Time	2.60	Rectangular	$\sqrt{3}$	1	1.50	$\infty$
RF Ambient Conditions	3.00	Rectangular	$\sqrt{3}$	1	1.73	$\infty$
RF Ambient Reflections	3.00	Rectangular	$\sqrt{3}$	1	1.73	$\infty$
Probe Positioner Mechanical Tolerance	0.80	Rectangular	$\sqrt{3}$	1	0.46	$\infty$
Probe Positioning with respect to Phantom Shell	6.70	Rectangular	$\sqrt{3}$	1	3.87	$\infty$
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	4.00	Rectangular	$\sqrt{3}$	1	2.31	$\infty$
<b>Test sample Related</b>						
Test sample Positioning	3.70	Normal	1	1	3.7	89
Device Holder Uncertainty	3.40	Normal	1	1	3.4	5
Output Power Variation - SAR drift measurement	5.00	Rectangular	$\sqrt{3}$	1	2.89	$\infty$
<b>Phantom and Tissue Parameters</b>						
Phantom Uncertainty (shape and thickness tolerances)	7.90	Rectangular	$\sqrt{3}$	1	4.56	$\infty$
Liquid Conductivity - deviation from target values	5.00	Rectangular	$\sqrt{3}$	0.64	1.85	$\infty$
Liquid Conductivity - measurement uncertainty	-3.06	Normal	1	0.64	-1.96	39
Liquid Permittivity - deviation from target values	5.00	Rectangular	$\sqrt{3}$	0.6	1.73	$\infty$
Liquid Permittivity - measurement uncertainty	3.46	Normal	1	0.6	2.08	39
Temp. Unc. - Conductivity	1.70	Rectangular	$\sqrt{3}$	0.78	0.77	$\infty$
Temp. Unc. - Permittivity	0.30	Rectangular	$\sqrt{3}$	0.23	0.04	$\infty$
		RSS			12.73	611
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =		$k=2$				25.45%
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =		$k=2$				1.97dB



## 10 Exposure Limit

(A). Limits for Occupational/Controlled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.4	8.0	2.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

### Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

### Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**NOTE**  
**GENERAL POPULATION/UNCONTROLLED EXPOSURE**  
**PARTIAL BODY LIMIT**  
**1.6 W/kg**



## 11 Tissue Dielectric Properties

### 11.1 Test Liquid Confirmation

#### Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The relative permittivity and conductivity of the tissue material should be within  $\pm 5\%$  of the values given in the table below. 5% may not be easily achieved at certain frequencies.

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE 1528 2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 2013 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE 1528 2013

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00



### 11.2 Typical Composition of Ingredients for Liquid Tissue Phantoms

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

alt: 99<sup>+</sup>% Pure Sodium Chloride

Sugar: 98<sup>+</sup>% Pure Sucrose

Water: De-ionized, 16 MΩ<sup>+</sup> resistivity

HEC: Hydroxy thyl Cellulose

DGBE: 99<sup>+</sup>% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra-pure): Polyethylene glycol mono [4-(1, 1, 3, 3-tetramethylbutyl)phenyl]ether

#### Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2



## 11.3 Simulating Liquids Parameter Check Results

Date	Band	Freq(MHz)	Measured			Standard		$\Delta$		Limit(%)
			e' ( $\epsilon_r$ )	e''	$\sigma$	e' ( $\epsilon_r$ )	$\sigma$	e' ( $\epsilon_r$ )	$\sigma$	$\pm 5$
2015/1/24	Body 5000	5180	48.62	17.78	5.12	49.02	5.28	-0.82%	-2.99%	$\pm 5$
		5200	48.56	17.78	5.14	49.00	5.30	-0.90%	-3.06%	$\pm 5$
		5220	48.57	17.80	5.16	48.98	5.32	-0.83%	-3.06%	$\pm 5$
		5240	48.61	17.86	5.20	48.96	5.35	-0.72%	-2.77%	$\pm 5$
		5260	48.61	17.92	5.24	48.94	5.37	-0.66%	-2.51%	$\pm 5$
		5280	48.56	17.92	5.26	48.92	5.40	-0.73%	-2.59%	$\pm 5$
		5300	48.46	17.87	5.26	48.90	5.42	-0.89%	-2.93%	$\pm 5$
		5320	48.39	17.84	5.27	48.86	5.44	-0.95%	-3.10%	$\pm 5$
		5500	48.23	18.13	5.54	48.60	5.65	-0.77%	-1.96%	$\pm 5$
		5520	48.20	18.06	5.54	48.58	5.67	-0.78%	-2.38%	$\pm 5$
		5540	48.13	17.99	5.54	48.56	5.70	-0.89%	-2.80%	$\pm 5$
		5560	48.03	18.02	5.57	48.54	5.72	-1.05%	-2.73%	$\pm 5$
		5580	47.99	18.13	5.62	48.52	5.75	-1.09%	-2.18%	$\pm 5$
		5600	48.01	18.20	5.66	48.50	5.77	-1.02%	-1.84%	$\pm 5$
		5620	48.03	18.18	5.68	48.46	5.79	-0.89%	-1.99%	$\pm 5$
		5640	48.01	18.13	5.68	48.42	5.81	-0.85%	-2.31%	$\pm 5$
		5660	47.94	18.09	5.69	48.38	5.84	-0.90%	-2.53%	$\pm 5$
		5680	47.86	18.16	5.73	48.34	5.86	-0.99%	-2.17%	$\pm 5$
		5700	47.83	18.25	5.78	48.30	5.88	-0.98%	-1.70%	$\pm 5$
		5745	47.84	18.22	5.81	48.26	5.93	-0.86%	-2.02%	$\pm 5$
		5765	47.81	18.19	5.83	48.24	5.96	-0.88%	-2.23%	$\pm 5$
		5785	47.75	18.25	5.86	48.22	5.98	-0.97%	-1.96%	$\pm 5$
		5805	47.71	18.32	5.91	48.19	6.01	-1.01%	-1.63%	$\pm 5$
		5825	47.67	18.32	5.93	48.15	6.03	-0.99%	-1.69%	$\pm 5$
2015/1/25	Body 5000	5180	50.40	18.29	5.26	49.02	5.28	2.82%	-0.24%	$\pm 5$
		5200	50.57	18.30	5.29	49.00	5.30	3.19%	-0.24%	$\pm 5$
		5220	50.67	18.19	5.27	48.98	5.32	3.46%	-0.94%	$\pm 5$
		5240	50.59	18.12	5.28	48.96	5.35	3.33%	-1.35%	$\pm 5$
		5260	50.34	18.18	5.31	48.94	5.37	2.85%	-1.09%	$\pm 5$
		5280	50.18	18.30	5.37	48.92	5.40	2.58%	-0.54%	$\pm 5$
		5300	50.24	18.43	5.43	48.90	5.42	2.73%	0.13%	$\pm 5$
		5320	50.42	18.40	5.44	48.86	5.44	3.20%	-0.08%	$\pm 5$
		5500	49.88	18.41	5.62	48.60	5.65	2.63%	-0.46%	$\pm 5$
		5520	49.81	18.52	5.68	48.58	5.67	2.53%	0.10%	$\pm 5$
		5540	49.90	18.59	5.72	48.56	5.70	2.76%	0.43%	$\pm 5$
		5560	50.03	18.55	5.73	48.54	5.72	3.08%	0.13%	$\pm 5$
		5580	50.07	18.46	5.72	48.52	5.75	3.20%	-0.40%	$\pm 5$
		5600	49.89	18.46	5.74	48.50	5.77	2.87%	-0.49%	$\pm 5$
		5620	49.71	18.53	5.78	48.46	5.79	2.57%	-0.14%	$\pm 5$
		5640	49.65	18.62	5.83	48.42	5.81	2.54%	0.34%	$\pm 5$
		5660	49.74	18.68	5.87	48.38	5.84	2.81%	0.63%	$\pm 5$
		5680	49.86	18.60	5.87	48.34	5.86	3.15%	0.19%	$\pm 5$
		5700	49.80	18.55	5.87	48.30	5.88	3.10%	-0.10%	$\pm 5$
		5745	49.45	18.65	5.95	48.26	5.93	2.48%	0.29%	$\pm 5$
		5765	49.47	18.73	6.00	48.24	5.96	2.56%	0.70%	$\pm 5$
		5785	49.60	18.73	6.02	48.22	5.98	2.87%	0.62%	$\pm 5$
		5805	49.64	18.67	6.02	48.19	6.01	3.02%	0.27%	$\pm 5$
		5825	49.55	18.65	6.03	48.15	6.03	2.90%	0.07%	$\pm 5$



Date	Band	Freq(MHz)	Measured			Standard		$\Delta$		Limit(%)
			e' ( $\epsilon_r$ )	e''	$\sigma$	e' ( $\epsilon_r$ )	$\sigma$	e' ( $\epsilon_r$ )	$\sigma$	$\pm 5$
2015/1/26	Body 2450	2412	51.95	13.86	1.86	52.75	1.91	-1.52%	-2.95%	$\pm 5$
		2437	51.87	13.98	1.89	52.72	1.94	-1.61%	-2.32%	$\pm 5$
		2442	51.86	14.00	1.90	52.71	1.94	-1.62%	-2.25%	$\pm 5$
		2462	51.80	14.08	1.93	52.68	1.97	-1.68%	-2.11%	$\pm 5$
		2472	51.76	14.12	1.94	52.67	1.98	-1.73%	-2.14%	$\pm 5$
2015/3/19	Body 5000	5180	48.42	18.26	5.25	49.02	5.28	-1.22%	-0.41%	$\pm 5$
		5200	48.37	18.27	5.28	49.00	5.30	-1.28%	-0.40%	$\pm 5$
		5220	48.35	18.30	5.31	48.98	5.32	-1.29%	-0.30%	$\pm 5$
		5240	48.32	18.32	5.33	48.96	5.35	-1.30%	-0.30%	$\pm 5$
		5260	48.29	18.34	5.36	48.94	5.37	-1.33%	-0.26%	$\pm 5$
		5280	48.25	18.34	5.38	48.92	5.40	-1.37%	-0.28%	$\pm 5$
		5300	48.21	18.33	5.40	48.90	5.42	-1.41%	-0.40%	$\pm 5$
		5320	48.17	18.38	5.43	48.86	5.44	-1.41%	-0.20%	$\pm 5$
		5500	47.92	18.51	5.65	48.60	5.65	-1.41%	0.09%	$\pm 5$
		5520	47.86	18.49	5.67	48.58	5.67	-1.49%	-0.05%	$\pm 5$
		5540	47.81	18.52	5.70	48.56	5.70	-1.54%	0.04%	$\pm 5$
		5560	47.79	18.54	5.73	48.54	5.72	-1.55%	0.08%	$\pm 5$
		5580	47.77	18.58	5.76	48.52	5.75	-1.55%	0.23%	$\pm 5$
		5600	47.75	18.60	5.79	48.50	5.77	-1.54%	0.31%	$\pm 5$
		5620	47.73	18.58	5.80	48.46	5.79	-1.51%	0.15%	$\pm 5$
		5640	47.66	18.59	5.83	48.42	5.81	-1.56%	0.19%	$\pm 5$
		5660	47.63	18.61	5.85	48.38	5.84	-1.55%	0.26%	$\pm 5$
		5680	47.60	18.63	5.88	48.34	5.86	-1.53%	0.37%	$\pm 5$
		5700	47.58	18.68	5.92	48.30	5.88	-1.48%	0.61%	$\pm 5$
		5745	47.51	18.67	5.96	48.26	5.93	-1.54%	0.41%	$\pm 5$
		5765	47.47	18.68	5.98	48.24	5.96	-1.58%	0.43%	$\pm 5$
		5785	47.43	18.70	6.01	48.22	5.98	-1.63%	0.46%	$\pm 5$
		5805	47.41	18.75	6.05	48.19	6.01	-1.62%	0.66%	$\pm 5$
		5825	47.41	18.77	6.07	48.15	6.03	-1.54%	0.71%	$\pm 5$



## 12 System Performance Check

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications. The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

### System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4/DASY5 system with an E-filed probe EX3DV4 SN: 3665 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration ( $dx=dy=5\text{ mm}$ ,  $dz=5\text{ mm}$ ).
- Distance between probe sensors and phantom surface was set to 3.0 mm.
- The dipole input power (forward power) was  $100\text{ mW}\pm 3\%$ .
- The results are normalized to 1 W input power.

### Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D2450V2	728	2014/5/20	2450	1g	52.6	50.2
				10g	24.5	23.4
D5GHzV2	1004	2014/11/20	5200	1g	80.5	74.7
				10g	22.9	20.7
D5GHzV2	1004	2014/11/20	5300	1g	85.7	77.7
				10g	24.4	21.6
D5GHzV2	1004	2014/11/20	5600	1g	84.1	81.2
				10g	23.9	22.4
D5GHzV2	1004	2014/11/20	5800	1g	80.3	74.2
				10g	22.8	20.3



**12.1 System Performance Check Results**

Date	System Dipole			Parameters	Target	Measured	Deviation[%]	Limited[%]
	Type	Serial No.	Liquid					
2015/1/24	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	74.7	74.0	-0.94	± 5
				10g SAR:	20.7	21.4	3.38	± 5
2015/1/24	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.7	75.1	-3.35	± 5
				10g SAR:	21.6	21.9	1.39	± 5
2015/1/24	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.2	81.3	0.12	± 5
				10g SAR:	22.4	23.2	3.57	± 5
2015/1/24	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	74.2	72.9	-1.75	± 5
				10g SAR:	20.3	21.0	3.45	± 5
2015/1/25	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	74.7	75.0	0.40	± 5
				10g SAR:	20.7	21.6	4.35	± 5
2015/1/25	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.7	77.5	-0.26	± 5
				10g SAR:	21.6	22.6	4.63	± 5
2015/1/25	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.2	82.4	1.48	± 5
				10g SAR:	22.4	23.5	4.91	± 5
2015/1/25	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	74.2	74.3	0.13	± 5
				10g SAR:	20.3	21.1	3.94	± 5
2015/1/26	D2450V2	728	Body	1g SAR:	50.2	48.3	-3.78	± 5
				10g SAR:	23.4	22.5	-3.85	± 5
2015/3/19	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	74.7	71.9	-3.75	± 5
				10g SAR:	20.7	20.6	-0.48	± 5
2015/3/19	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.7	74.9	-3.60	± 5
				10g SAR:	21.6	21.4	-0.93	± 5
2015/3/19	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.2	80.2	-1.23	± 5
				10g SAR:	22.4	22.8	1.79	± 5
2015/3/19	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	74.2	73.1	-1.48	± 5
				10g SAR:	20.3	20.8	2.46	± 5



## 13 RF Output Power Measurement

### 13.1 Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band (GHz)	Freq. (MHz)	Ch #	Default Test Channels	
				802.11b	802.11g
802.11 b/g	2.4	2412	1 <sup>#</sup>	✓	▽
		2437	6	✓	▽
		2462	11 <sup>#</sup>	✓	▽

#### Notes

✓ = "default test channels"

▽ = possible 802.11g channels with maximum average output ¼ dB the "default test channels"

<sup>#</sup> = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements

the highest output channels closest to each of these channels should be tested.

The indicated Wi-Fi target powers in the following table are absolute maximums.

#### Output power table

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
2.4	802.11b	1	1	2412	14.5			±1.5	16.0	15.9		
			6	2437	14.5			±1.5	16.0	16.0		
			11	2462	14.5			±1.5	16.0	15.9		
			1	2412		14.5		±1.5	16.0		15.9	
			6	2437		14.5		±1.5	16.0		16.0	
			11	2462		14.5		±1.5	16.0		15.8	
	802.11g	6	1	2412	14.5			±1.5	16.0	15.8		
			6	2437	14.5			±1.5	16.0	16.0		
			11	2462	14.5			±1.5	16.0	15.9		
			1	2412		14.5		±1.5	16.0		15.9	
			6	2437		14.5		±1.5	16.0		16.0	
			11	2462		14.5		±1.5	16.0		15.9	
	802.11n HT20	MCS0	1	2412	14.5			±1.5	16.0	15.8		
			6	2437	14.5			±1.5	16.0	16.0		
			11	2462	14.5			±1.5	16.0	15.9		
			1	2412		14.5		±1.5	16.0		15.8	
			6	2437		14.5		±1.5	16.0		16.0	
			11	2462		14.5		±1.5	16.0		15.9	
		MCS8	1	2412	13.5	13.5	16.5	±1.5	18.0	14.8	15.0	17.9
			6	2437	14.5	14.5	17.5	±1.5	19.0	15.9	16.0	19.0
			11	2462	13.0	13.0	16.0	±1.5	17.5	14.5	14.3	17.4
	802.11n HT40	MCS0	3	2412	12.0			±1.5	13.5	13.3		
			6	2437	14.5			±1.5	16.0	15.9		
			9	2462	10.5			±1.5	12.0	11.9		
			3	2412		12.0		±1.5	13.5		13.4	
			6	2437		14.5		±1.5	16.0		15.8	
			9	2462		10.5		±1.5	12.0		11.9	
		MCS8	3	2412	8.5	8.5	11.5	±1.5	13.0	9.7	10.0	12.9
			6	2437	14.5	14.5	17.5	±1.5	19.0	15.2	16.0	18.6
			9	2462	9.5	9.5	12.5	±1.5	14.0	10.0	11.0	13.5



### 13.2 Wi-Fi (5 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band (GHz)	Freq. (MHz)	Ch #	Default Test Channels			
				§15.247		UNII	
802.11a	UNII	5180	36			✓	
		5200	40				*
		5220	44				*
		5240	48			✓	
		5260	52			✓	
		5280	56				*
		5300	60				*
		5320	64			✓	
		5500	100				*
		5520	104			✓	
		5540	108				*
		5560	112				*
		5580	116			✓	
		5600	120				*
		5620	124			✓	
		5640	128				*
		5660	132				*
		5680	136			✓	
		5700	140				*
	UNII or §15.247	5745	149	✓		✓	
		5765	153		*		*
		5785	157	✓			*
		5805	161		*	✓	
	§15.247	5825	165	✓			

**Notes**

✓ = "default test channels"

\* = possible 802.11a channels with maximum average output > the "default test channels"

The indicated Wi-Fi target powers in the following table are absolute maximums



## Wi-Fi 5.2GHz Band:

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.2	802.11a	6	36	5180	12.5			±1.5	14.0	13.9		
			40	5200	12.5			±1.5	14.0	14.0		
			44	5220	12.5			±1.5	14.0	14.0		
			48	5240	12.5			±1.5	14.0	13.9		
			36	5180		12.5		±1.5	14.0		13.9	
			40	5200		12.5		±1.5	14.0		14.0	
			44	5220		12.5		±1.5	14.0		14.0	
			48	5240		12.5		±1.5	14.0		14.0	
	802.11n (HT20)	MCS0	36	5180	12.5			±1.5	14.0	13.8		
			40	5200	12.5			±1.5	14.0	13.9		
			44	5220	12.5			±1.5	14.0	13.9		
			48	5240	12.5			±1.5	14.0	13.8		
			36	5180		12.5		±1.5	14.0		13.9	
			40	5200		12.5		±1.5	14.0		13.9	
			44	5220		12.5		±1.5	14.0		13.8	
			48	5240		12.5		±1.5	14.0		14.0	
		MCS8	36	5180	11.0	11.0	14.0	±1.5	15.5	12.0	12.5	15.3
			40	5200	11.0	11.0	14.0	±1.5	15.5	12.4	12.5	15.5
			44	5220	11.0	11.0	14.0	±1.5	15.5	12.0	12.5	15.3
			48	5240	11.0	11.0	14.0	±1.5	15.5	12.0	12.5	15.3
		MCS0	38	5190	12.5			±1.5	14.0	14.0		
			46	5230	12.5			±1.5	14.0	13.9		
			38	5190		12.5		±1.5	14.0		13.9	
			46	5230		12.5		±1.5	14.0		14.0	
		MCS8	38	5190	12.0	12.0	15.0	±1.5	16.5	13.0	13.5	16.3
			46	5230	12.0	12.0	15.0	±1.5	16.5	12.9	13.5	16.2
	802.11ac	VTH0	42	5210	12.5			±1.5	14.0	14.0		
			42	5210		12.5		±1.5	14.0		13.9	
		VTH8	42	5210	12.0	12.0	15.0	±1.5	16.5	13.2	13.5	16.4

## Note(s):

SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a channels per KDB 248227 D01



Wi-Fi 5.3GHz Band:

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.3	802.11a	6	52	5260	12.5			±1.5	14.0	14.0		
			56	5280	12.5			±1.5	14.0	13.9		
			60	5300	12.5			±1.5	14.0	13.9		
			64	5320	12.5			±1.5	14.0	13.9		
			52	5260		12.5		±1.5	14.0		13.9	
			56	5280		12.5		±1.5	14.0		14.0	
			60	5300		12.5		±1.5	14.0		13.9	
			64	5320		12.5		±1.5	14.0		13.9	
	802.11n (HT20)	MCS0	52	5260	12.5			±1.5	14.0	13.9		
			56	5280	12.5			±1.5	14.0	13.8		
			60	5300	12.5			±1.5	14.0	13.8		
			64	5320	12.5			±1.5	14.0	13.8		
			52	5260		12.5		±1.5	14.0		13.8	
			56	5280		12.5		±1.5	14.0		13.9	
			60	5300		12.5		±1.5	14.0		13.8	
			64	5320		12.5		±1.5	14.0		13.8	
		MCS8	52	5260	12.5	12.5	15.5	±1.5	17.0	13.7	14.0	16.9
			56	5280	12.5	12.5	15.5	±1.5	17.0	13.7	14.0	16.9
			60	5300	12.5	12.5	15.5	±1.5	17.0	13.6	14.0	16.8
			64	5320	12.5	12.5	15.5	±1.5	17.0	13.7	14.0	16.9
		802.11n (HT40)	54	5270	12.5			±1.5	14.0	13.9		
			62	5310	12.5			±1.5	14.0	14.0		
			54	5270		12.5		±1.5	14.0		14.0	
			62	5310		12.5		±1.5	14.0		14.0	
		MCS8	54	5270	12.5	12.5	15.5	±1.5	17.0	13.6	14.0	16.8
			62	5310	12.5	12.5	15.5	±1.5	17.0	13.5	14.0	16.8
	802.11ac	VTH0	58	5290	12.5			±1.5	14.0	14.0		
			58	5290		12.5		±1.5	14.0		14.0	
		VTH8	58	5290	12.0	12.0	15.0	±1.5	16.5	13.2	13.5	16.4

Note(s):

SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a channels per KDB 248227 D01



## Wi-Fi 5.5GHz Band:

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.5	802.11a	6	100	5500	14.5			±1.5	16.0	15.9		
			104	5520	14.5			±1.5	16.0	15.9		
			108	5540	14.5			±1.5	16.0	15.8		
			112	5560	14.5			±1.5	16.0	15.7		
			116	5580	14.5			±1.5	16.0	15.9		
			120	5600	14.5			±1.5	16.0	16.0		
			124	5620	14.5			±1.5	16.0	16.0		
			128	5640	14.5			±1.5	16.0	16.0		
			132	5660	14.5			±1.5	16.0	16.0		
			136	5680	14.5			±1.5	16.0	16.0		
			140	5700	14.5			±1.5	16.0	16.0		
			100	5500		14.5		±1.5	16.0		15.8	
			104	5520		14.5		±1.5	16.0		15.9	
			108	5540		14.5		±1.5	16.0		15.8	
			112	5560		14.5		±1.5	16.0		15.7	
			116	5580		14.5		±1.5	16.0		15.9	
			120	5600		14.5		±1.5	16.0		16.0	
			124	5620		14.5		±1.5	16.0		16.0	
			128	5640		14.5		±1.5	16.0		16.0	
			132	5660		14.5		±1.5	16.0		15.9	
			136	5680		14.5		±1.5	16.0		15.9	
			140	5700		14.5		±1.5	16.0		16.0	
	802.11n (HT20)	MCS0	100	5500	14.5			±1.5	16.0	15.8		
			104	5520	14.5			±1.5	16.0	15.9		
			108	5540	14.5			±1.5	16.0	15.7		
			112	5560	14.5			±1.5	16.0	15.9		
			116	5580	14.5			±1.5	16.0	16.0		
			120	5600	14.5			±1.5	16.0	16.0		
			124	5620	14.5			±1.5	16.0	16.0		
			128	5640	14.5			±1.5	16.0	16.0		
			132	5660	14.5			±1.5	16.0	15.9		
			136	5680	14.5			±1.5	16.0	15.9		
			140	5700	14.5			±1.5	16.0	15.8		
			100	5500		14.5		±1.5	16.0		15.8	
			104	5520		14.5		±1.5	16.0		15.9	
			108	5540		14.5		±1.5	16.0		15.9	
			112	5560		14.5		±1.5	16.0		15.9	
			116	5580		14.5		±1.5	16.0		15.8	
			120	5600		14.5		±1.5	16.0		15.8	
			124	5620		14.5		±1.5	16.0		15.9	
			128	5640		14.5		±1.5	16.0		15.9	
			132	5660		14.5		±1.5	16.0		15.9	
			136	5680		14.5		±1.5	16.0		15.8	
			140	5700		14.5		±1.5	16.0		15.8	



Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.5	802.11n (HT20)	MCS8	100	5500	14.5	14.5	17.5	±1.5	19.0	15.9	16.0	19.0
			104	5520	14.5	14.5	17.5	±1.5	19.0	15.9	16.0	19.0
			108	5540	14.5	14.5	17.5	±1.5	19.0	15.8	16.0	18.9
			112	5560	14.5	14.5	17.5	±1.5	19.0	15.7	16.0	18.9
			116	5580	14.5	14.5	17.5	±1.5	19.0	15.7	16.0	18.9
			120	5600	14.5	14.5	17.5	±1.5	19.0	15.3	16.0	18.7
			124	5620	14.5	14.5	17.5	±1.5	19.0	15.5	16.0	18.8
			128	5640	14.5	14.5	17.5	±1.5	19.0	15.6	16.0	18.8
			132	5660	14.5	14.5	17.5	±1.5	19.0	15.7	16.0	18.9
			136	5680	14.5	14.5	17.5	±1.5	19.0	15.6	16.0	18.8
			140	5700	14.0	14.0	17.0	±1.5	18.5	15.5	15.4	18.5
	802.11n (HT40)	MCS0	102	5510	13.5			±1.5	15.0	14.8		
			110	5550	14.5			±1.5	16.0	16.0		
			118	5550	14.5			±1.5	16.0	15.9		
			126	5630	14.5			±1.5	16.0	15.8		
			134	5670	14.5			±1.5	16.0	15.8		
			142	5710	14.5			±1.5	16.0	15.9		
			102	5510		13.5		±1.5	15.0		15.0	
			110	5550		14.5		±1.5	16.0		15.8	
			118	5550		14.5		±1.5	16.0		15.7	
			126	5630		14.5		±1.5	16.0		15.9	
			134	5670		14.5		±1.5	16.0		15.9	
			142	5710		14.5		±1.5	16.0		15.9	
	802.11n (HT40)	MCS8	102	5510	12.5	12.5	15.5	±1.5	17.0	13.5	14.0	16.8
			110	5550	14.5	14.5	17.5	±1.5	19.0	15.8	16.0	18.9
			118	5550	14.5	14.5	17.5	±1.5	19.0	15.6	16.0	18.8
			126	5630	14.5	14.5	17.5	±1.5	19.0	15.5	16.0	18.8
			134	5670	14.5	14.5	17.5	±1.5	19.0	15.4	16.0	18.7
			142	5710	14.5	14.5	17.5	±1.5	19.0	15.8	16.0	18.9
	802.11ac	VTH0	106	5530	13.5			±1.5	15.0	14.8		
			122	5610	13.5			±1.5	15.0	14.9		
			138	5690	14.5			±1.5	16.0	15.9		
			106	5530		13.5		±1.5	15.0		15.0	
		VTH8	122	5610		13.5		±1.5	15.0		15.0	
			138	5690		14.5		±1.5	16.0		16.0	
			106	5530	12.0	12.0	15.0	±1.5	16.5	12.9	13.5	16.2
			122	5610	12.0	12.0	15.0	±1.5	16.5	13.0	13.5	16.3
			138	5690	14.5	14.5	17.5	±1.5	19.0	15.6	16.0	18.8

## Note(s):

SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a channels per KDB 248227 D01



## Wi-Fi 5.8GHz Band:

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.8	802.11a	6	149	5745	16.5			±1.5	18.0	18.0		
			153	5765	16.5			±1.5	18.0	17.8		
			157	5785	16.5			±1.5	18.0	17.9		
			161	5805	16.5			±1.5	18.0	17.9		
			165	5825	16.5			±1.5	18.0	17.8		
			149	5745		16.5		±1.5	18.0		17.9	
			153	5765		16.5		±1.5	18.0		17.9	
			157	5785		16.5		±1.5	18.0		18.0	
			161	5805		16.5		±1.5	18.0		17.9	
			165	5825		16.5		±1.5	18.0		17.8	
	802.11n (HT20)	MCS0	149	5745	16.5			±1.5	18.0	17.8		
			153	5765	16.5			±1.5	18.0	17.7		
			157	5785	16.5			±1.5	18.0	17.9		
			161	5805	16.5			±1.5	18.0	17.8		
			165	5825	16.5			±1.5	18.0	17.7		
			149	5745		16.5		±1.5	18.0		17.9	
			153	5765		16.5		±1.5	18.0		18.0	
			157	5785		16.5		±1.5	18.0		17.9	
			161	5805		16.5		±1.5	18.0		17.8	
			165	5825		16.5		±1.5	18.0		17.7	
		MCS8	149	5745	16.5	16.5	19.5	±1.5	21.0	17.3	18.0	20.7
			153	5765	16.5	16.5	19.5	±1.5	21.0	17.5	18.0	20.8
			157	5785	16.5	16.5	19.5	±1.5	21.0	17.4	18.0	20.7
			161	5805	16.5	16.5	19.5	±1.5	21.0	17.4	17.9	20.7
			165	5825	16.5	16.5	19.5	±1.5	21.0	17.9	18.0	21.0
	802.11n (HT40)	MCS0	151	5755	16.5			±1.5	18.0	18.0		
			159	5795	16.5			±1.5	18.0	17.9		
			151	5755		16.5		±1.5	18.0		17.8	
			159	5795		16.5		±1.5	18.0		18.0	
		MCS8	151	5755	12.5	12.5	15.5	±1.5	17.0	13.6	14.0	16.8
			159	5795	16.5	16.5	19.5	±1.5	21.0	17.0	18.0	20.5
	802.11ac	VTH0	155	5775	16.0			±1.5	17.5	17.5		
			155	5775		16.0		±1.5	17.5		17.4	
		VTH8	155	5775	12.0	12.0	15.0	±1.5	16.5	13.2	13.5	16.4

Note(s):

SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a channels per KDB 248227 D01





### 13.3 Bluetooth

#### Output power table

Band (GHz)	Mode	Ch #	Freq. (MHz)	Target Pwr (dBm)	Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Measured Avg. Pwr (dBm)
Bluetooth	DH5	0	2402	0.0	± 1.5	1.5	-2.8
		39	2441	0.0	± 1.5	1.5	-2.6
		78	2480	0.0	± 1.5	1.5	-2.5
	3DH5	0	2402	0.0	± 1.5	1.5	-2.5
		39	2441	0.0	± 1.5	1.5	-2.3
		78	2480	0.0	± 1.5	1.5	-2.1
	BLE	0	2402	-6.0	± 1.5	-4.5	-4.5
		19	2440	-6.0	± 1.5	-4.5	-4.3
		39	2480	-6.0	± 1.5	-4.5	-2.9



## 14 SAR Measurements Results

Wi-Fi (2.4GHz Band):

Test Mode	mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
Tablet Mode	802.11b	Rear	6	2437	0	0	16.0	16.0	0.047	0.047	
			6	2437	1	0	16.0	16.0	0.021	0.021	
		Edge1	6	2437	0	0	16.0	16.0	0.242	0.242	
			6	2437	1	0	16.0	16.0	0.097	0.097	
			6	2437	0	0	16.0	16.0	0.177	0.177	1
			6	2437	1	0	16.0	16.0	0.124	0.124	1

Note(s):

1. The Ant 1 & Ant 2 are the same type and antenna location. So we choose the Ant 1 to perform the all SAR test. The Ant 2 was performed the SAR test of the worst channel of Ant 1. The reported SAR don't have over the limit value ,so SAR test of the Ant 2 performed spot check can cover test result.



Wi-Fi (5GHz Band):

Test Mode	Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
Tablet Mode	802.11a	Rear	40	5200	0	0	14.0	14.0	0.051	0.051	
			52	5260	0	0	14.0	14.0	0.061	0.061	
			120	5600	0	0	16.0	16.0	0.107	0.107	
			157	5785	0	0	18.0	17.9	0.097	0.099	
			40	5200	1	0	14.0	14.0	0.033	0.033	
			56	5280	1	0	14.0	14.0	0.030	0.030	
			120	5600	1	0	16.0	16.0	0.073	0.073	
			153	5765	1	0	18.0	18.0	0.090	0.090	
		Edge 1	40	5200	0	0	14.0	14.0	0.793	0.793	
			52	5260	0	0	14.0	14.0	0.941	0.941	
			56	5280	0	0	14.0	13.9	0.911	0.932	1
			120	5600	0	0	16.0	16.0	1.280	1.280	
			124	5620	0	0	16.0	16.0	1.140	1.140	1
			104	5520	0	0	16.0	15.9	1.040	1.064	1
			136	5680	0	0	16.0	16.0	1.160	1.160	1
			116	5580	0	0	16.0	15.9	1.300	1.330	1
			157	5785	0	0	18.0	17.9	1.260	1.289	
			149	5745	0	0	18.0	18.0	1.300	1.300	1
			40	5200	1	0	14.0	14.0	0.437	0.437	
			56	5260	1	0	14.0	14.0	0.421	0.421	
			120	5600	1	0	16.0	16.0	0.701	0.701	
			157	5785	1	0	18.0	18.0	0.852	0.852	
			149	5745	1	0	18.0	17.9	0.807	0.826	1
			149	5745	0	0	18.0	18.0	1.370	1.370	2

Note(s):

- Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel.  $\geq 0.8$  W/kg and transmission band  $\leq 100$  MHz (Per KDB 447498 D01 v05r02 section 4.3.3)
- Repeated measurements are required only when the measured SAR is  $\geq 0.80$  W/kg. If the measured SAR values are  $< 1.45$  W/kg with  $\leq 20\%$  variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03)
  - Original SAR = 1.3 W/kg, therefore two times repeat SAR is required.
  - Repeat SAR = 1.37 W/kg  $< 1.45$ W/kg
  - SAR variation= 5.3 %  $< 20\%$



Tablet Mode	Test Position	Mode	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
Tablet	Edge 1	802.11ac	42	5210	0	0	14.0	14.0	0.797	0.797	
			58	5290	0	0	14.0	13.8	0.871	0.912	
			138	5690	0	0	16.0	16.0	1.180	1.180	
			122	5610	0	0	15.0	14.9	0.944	0.966	
			155	5775	0	0	17.5	17.5	1.280	1.280	
			42	5210	1	0	14.0	13.9	0.422	0.432	
			58	5290	1	0	14.0	14.0	0.414	0.414	
			138	5690	1	0	16.0	16.0	0.669	0.669	
			155	5775	1	0	17.5	17.4	0.802	0.821	
		802.11a	149	5745	0	0	18.0	18.0	1.080	1.080	Ant 2
			157	5785	0	0	18.0	17.9	0.991	1.014	1
			157	5785	1	0	18.0	18.0	1.230	1.230	Ant 2
			153	5765	1	0	18.0	17.9	1.220	1.248	1
			161	5805	1	0	18.0	17.9	1.310	1.341	1

**Note(s):**

1. Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel.  $\geq 0.8$  W/kg and transmission band  $\leq 100$  MHz (Per KDB 447498 D01 v05r02 section 4.3.3)
2. The Ant 1 & Ant 2 are the same type and antenna location. So we choose the Ant 1 to perform the all SAR test. The Ant 2 was performed the SAR test of the worst channel of Ant 1. The reported SAR don't have over the limit value ,so SAR test of the Ant 2 performed spot check can cover test result.



## 15 Summary of Highest SAR Values

Results for highest reported SAR values for each frequency band and mode

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
Wi-Fi 2.4 GHz	Tablet Mode@Edge1	802.11b	0.242
Wi-Fi 5.2 GHz	Tablet Mode@Edge1	802.11ac	0.797
Wi-Fi 5.3 GHz	Tablet Mode@Edge1	802.11a	0.941
Wi-Fi 5.5 GHz	Tablet Mode@Edge1	802.11a	1.330
Wi-Fi 5.8 GHz	Tablet Mode@Edge1	802.11a	1.370



## 16 Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

**SAR<sub>1</sub>** is the highest Reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

**SAR<sub>2</sub>** is the highest Reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

**R<sub>i</sub>** is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

A new threshold of 0.04 is also introduced in the KDB 447498 D01) 4.3.2)3). Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i < 0.04$$

**16.1 Sum of the SAR for Simultaneous Transmission Analysis****16.1.1 Sum of the 1g SAR for Body Exposure Condition****Wi-Fi 2.4GHz Band**

Test Position	Simultaneous Transmission Scenario		$\Sigma$ 1-g SAR (W/kg)	SPLSR (Yes/No)
	Wi-Fi Main	Wi-Fi Aux		
Rear	0.047	0.021	0.068	NO
Edge 1	0.242	0.097	0.339	NO

**Wi-Fi 5GHz Band**

Test Position	Simultaneous Transmission Scenario		$\Sigma$ 1-g SAR (W/kg)	SPLSR (Yes/No)
	Wi-Fi Main	Wi-Fi Aux		
Rear	0.107	0.090	0.197	NO
Edge 1	1.370	0.852	2.222	Yes

**16.1.2 Sum of the 1g SAR for Body Exposure Condition****5GHz Band**

Test Position	Simultaneous Transmission Scenario		$\Sigma$ 1-g SAR (W/kg)	Calculated distance (cm)	SPLSR	Figure
	Wi-Fi Main	Wi-Fi Aux				
Edge 1	1.370	0.852	2.222	18.95	0.02	1

**Note(s):**

The SPLSR is rounded to two decimal digits and  $\leq 0.04$





## 17 Equipment List & Calibration Status

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Cycle(year)	Calibration Due
S-Parameter Network Analyzer	Agilent	E5071C	MY46213916	1	2015/6/25
Electronic Probe kit	Hewlett Packard	85070D	N/A	N/A	N/A
Power Meter	Agilent	4416	GB41291611	1	2015/9/4
Power Sensor	Agilent	8481H	MY41091956	1	2015/9/4
Data Acquisition Electronics (DAE)	SPEAG	DAE4	877	1	2015/3/25
Data Acquisition Electronics (DAE)	SPEAG	DAE4	1305	1	2015/12/10
Dosimetric E-Field Probe	SPEAG	EX3DV4	3665	1	2015/5/21
2450 MHz System Validation Dipole	SPEAG	D2450V2	728	1	2015/5/19
5GHz System Validation Dipole	SPEAG	D5GHzV2	1004	1	2015/11/19
Robot	Staubli	RX90L	F02/5T69A1/A/01	N/A	N/A
Amplifier	Mini-Circuit	ZVE-8G	665500309	N/A	N/A
Amplifier	Mini-Circuit	ZHL-1724HLN	D072602#2	N/A	N/A



## 18 Facilities

All measurement facilities used to collect the measurement data are located at

- ☐ No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.
- ☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
- ☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

## 19 Reference

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environ-mental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commision, O\_ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-\_eld scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-\_eld probes in tissue simulating liquids at mobile communications frequencies", in ICECOM \_ 97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-\_eld probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992..Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10



## 20 Attachments

Exhibit	Content
1	System Performance Check Plots
2	SAR test plots for Wi-Fi 2.4GHz Band
3	SAR test plots for Wi-Fi 5GHz Band
4	SAR_Probe_EX3DV4_sn3665
5	SAR_DAE4_sn877
6	SAR_DAE4_sn1305
7	SAR_Dipole_D2450v2_sn728
8	SAR_Dipole_D5GHzv2_sn1004
9	T150112W02-SF PHOTOS
10	SPLSR Plots

**END OF REPORT**