



## TEST REPORT

### Nr. R24078801

### Federal Communication Commission (FCC)

<b>Report Reference No.</b> .....	R24078801
Date of issue: .....	12.09.2024
Total number pages: .....	12
<b>Customer name</b> .....	Elca S.r.l.
Address .....	Via del Commercio, 7/B – 36065 Mussolente (VI) – Italy
<b>Test specification:</b>	
Standard(s) .....	KDB 447498 D01 General RF Exposure Guidance v06
Non-standard test method .....	N/A
<b>Test Report Form No.</b> .....	15-247_HoppingDEKRA
Test Report Form(s) Originator ...	DEKRA Testing and Certification S.r.l.
Master TRF .....	2024-09
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of DEKRA Testing and Certification S.r.l.	
<b>(*) Test item description</b> .....	Receiving unit AR MAGO-FLEXI.A-915: component fixed stably to the Machine (base station) that constitutes an interface between the Radio Remote Control and the other parts of the machine
(*) Trademark .....	Elca
(*) Manufacturer .....	Elca S.r.l.
(*) Model / Type reference .....	AR MAGO-FLEXI.A-915
(*) FCC ID .....	2ABS7-ARMAFLA915
(*) Rating(s) .....	48/55/120/230 V ~ 50/60 Hz single-phase
<b>Report</b>	
Tested by (name + signature) .....	C. Panozzo 
Approved by (name + signature) .....	F. Marenda 

(\*) information provided by the customer

<b>1</b>	<b>Summary</b>	
1	Summary.....	2
2	Reference standard(s) .....	3
3	List of attachments.....	3
4	Deviation(s) from test specification .....	3
5	Testing location.....	3
6	General description of tested item and testing condition(s) .....	5
6.1	Photos of the test item.....	6
7	Verdict summary section .....	7
8	Test conditions .....	8
8.1	General .....	8
9	Test results .....	9
9.1	RF Exposure Analysis .....	9

<b>2 Reference standard(s)</b>	
KDB 447498 D01 General RF Exposure Guidance v06	RF exposure procedures and equipment authorization policies for mobile and portable devices
<b>3 List of attachments</b>	
Attachment 1: Measurement uncertainty, judgement of compliance and quality manual references	
<b>4 Deviation(s) from test specification</b>	
None	
<b>5 Testing location</b>	
DEKRA Testing and Certification S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	


<b>Revision index</b>	<b>Date</b>	<b>Change history</b>
1.0	12.09.2024	

Testing and sampling:	
Date of receipt of test item .....	07.05.2024
Testing start date .....	12.09.2024
Testing end date .....	12.09.2024
Sampling procedure .....	Sample used for testing chosen by the customer; DEKRA Testing and Certification S.r.l. cannot be considered responsible for the selection of the sample
Internal identification .....	Adhesive label with the product number P240438
General remarks:	
<p>This report shall not be reproduced, except in full, without the written approval of DEKRA Testing and Certification S.r.l.</p> <p>The test results presented in this report relate only to the object tested.</p> <p>“(see appended table)”: refers to a table appended to the report.</p> <p>Throughout this report a comma is used as the decimal separator.</p>	
Possible test case verdicts:	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object meets the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object was not evaluated for the requirement:	N/E (Not Executed)
Definition of symbols used in this test report:	
<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report. <input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report.	

**6 General description of tested item and testing condition(s)**

Description .....	Receiving unit AR MAGO-FLEXI.A-915: component fixed stably to the Machine (base station) that constitutes an interface between the Radio Remote Control and the other parts of the machine						
Model Number .....	AR MAGO-FLEXI.A-915						
FCC ID .....	2ABS7-ARMAFLA915						
Serial Number .....	--						
Brand name .....	Elca						
Frequency band .....	902 – 928 MHz						
Nominal frequencies .....	FL: 915,050 MHz		FM: 921,050 MHz		FH: 927,750 MHz		
Test power supply .....		Voltage and Frequency	Reference poles				
			N	L1	L2	L3	PE
	<input checked="" type="checkbox"/>	AC: 120 V, 60 Hz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	DC:					<input type="checkbox"/>
Type of equipment .....	<input checked="" type="checkbox"/> Transmitter unit <input checked="" type="checkbox"/> Receiver unit						
Type of station .....	<input type="checkbox"/> Portable station <input checked="" type="checkbox"/> Mobile station						
Software release .....	WM32EL 1.0.I.I						
Test arrangements of EUT .....	<i>Intended operational arrangement(s) of EUT</i>				<i>Test arrangement (see basic standard)</i>		
	<input type="checkbox"/> Table-top only				Table-top		
	<input type="checkbox"/> Floor-standing only				Floor-standing		
	<input type="checkbox"/> Can be floor-standing or table-top				Table-top		
	<input type="checkbox"/> Rack mounted				In rack or table-top		
	<input checked="" type="checkbox"/> Other, for example wall mounted, ceiling mounted, handheld, body worn				Table-top		
Operating modes .....	No.	Operating mode of test item					
	1	EUT in continuous transmission at maximum power					
Declination of responsibility .....	<p>Information relating to the description of the sample, components list, and software/hardware version (if reported) are provided by the customer. DEKRA Testing and Certification S.r.l. cannot be considered responsible for this information, for any other document sent by the customer and for any difference between the software version present in the tested sample and that present in the object intended for final sale.</p> <p>In some cases, the software in the tested sample is in a version dedicated exclusively to the test, and therefore does not represent the software installed in the final version of the product.</p>						

## 6.1 Photos of the test item

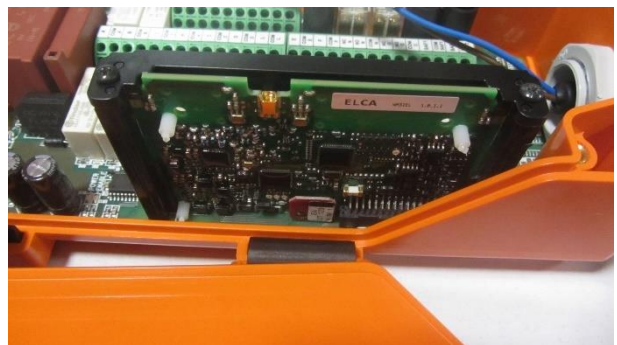

---

**7 Verdict summary section**

KDB 447498 D01 General RF Exposure Guidance v06			
Clause	Requirement – Test case	Basic standard	Verdict
7.1	RF Exposure Analysis	--	P

## 8 Test conditions

### 8.1 General

Environmental reference conditions..... :	The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.						
	The climatic conditions during the tests were within the following limits:						
	Temperature		Humidity		Atmospheric pressure		
	15 °C – 35 °C		30 % - 60 %		800 hPa – 1060 hPa		
	If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report. Environmental conditions have been monitored with the following instrument.						
	<i>Id. Number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Serial number</i>	<i>Description</i>	<i>Last calibration date</i>	<i>Calibration expiration</i>
	CMC S302	Testo	175H1	40370182610	Data Logger	May 2024	May 2025
Measurement uncertainties ..... :	Attachment 1						



## 9 Test results

### 9.1 RF Exposure Analysis

Tested by .....	C. Panozzo
Test date .....	12.09.2024
Test location (stand) .....	Laboratory
Basic standard(s) .....	KDB 447498 D01 cl. 4 ANSI C63.10
Supplementary information .....	--

#### Acceptance limits

For mobile devices operating at frequency  $f$  between 300 kHz and 1500 MHz the power density limit at 20 cm is  $f(\text{MHz})/1500 \text{ mW/cm}^2$  according to FCC Part 1.1310(e)(1) Table 1.

For mobile devices operating at frequency  $f$  between 1500 and 100000 MHz the power density limit at 20 cm is  $1 \text{ mW/cm}^2$  according to FCC Part 1.1310(e)(1) Table 1.

#### Results

Transmission channel (MHz)	Peak Output Power (dBμV/m)	Peak Output Power (mW)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Power Density Limit (mW/cm <sup>2</sup> )
915,05	93,94	8,26	0,001	0,610
921,05	93,95	8,28	0,001	0,614
927,75	93,93	8,24	0,001	0,619

$$P = (E \times d)^2 / (30 \times G) \times 1000$$

Where:

$E$  = the measured maximum fundamental field strength in V/m

$G$  = the numeric gain of the transmitting antenna: 1 (0 dBi)

$d$  = the distance in meters from which the field strength was measured (10 m)

$P$  = the power in mW

Power Density =  $(P \times G) / (4\pi R^2)$

**Remarks:** the measured levels have been derived from Test Report nr. R24078601.

## Attachment 1

### Measurement uncertainty

<i>Test</i>	<i>Test Setup</i>	<i>Expanded uncertainty</i>			<i>Note</i>
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150 MHz	PE001_01			3,6 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_01			2,9 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30 MHz	PE001_02			2,3 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30 MHz	PE001_03			2,5 dB	1
Conducted emission CISPR 16 ISN 0,15-30 MHz	PE001_04			4,7 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_05			2,9 dB	1
Radiated Emission CDNE 30-300 MHz	PE001_06			3,3 dB	1
Disturbance Power 30-300 MHz	PE002_X1			3,8 dB	1
Radiated Emission LAS 0,15-30 MHz	PE003_01			2,0 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30 MHz	PE004_X1			4,1 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300 MHz	PE004_X2			4,7 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000 MHz	PE004_X3			4,6 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18 GHz	PE004_X4			4,7 dB	1
Human Exposure to electromagnetic fields	PE005_01			14,2 %	1
Harmonics	PE006_01	10 mA	+	2,9 %	1
Flicker	PE007_01			3,40 %	1
Radiated Immunity 80 MHz - 6 GHz	PE102_XX	2,26 dB		0,89 V/m a 3V/m	1
Conducted Immunity 0,15 - 230 MHz	PE105_XX	1,26 dB		0,47 V a 3V	1
AC Magnetic field	PE106_01	1,55 %		0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,21 %		18,6 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,21 %		1,86 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,11 %		0,21 V a 10V	1

## Attachment 1

Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_X1	4,1 dB	1
Power/Spurious ERP 30-1000MHz d=10m/3m	PR001_X2+X3	4,8 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_X4+X5	4,7 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_X6	5,1 dB	1
Frequency error	PR002_01+02	< 1x10 <sup>-7</sup>	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	< 1x10 <sup>-7</sup>	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Ring Wave immunity test	PE110_01		2
Low frequency immunity test	PE111_01		2
Dumped Oscillatory immunity test	PE113_01		2
Rev_24_01 date 03/02/2024			

### Note 1:





The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%

### Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k=2

## Attachment 1

### Judgement of compliance

Case 1	Case 2	Case 3	Case 4
 <p>The sample complies with the requirements.</p> <p>The measurement results is within the specification limit when the measurement uncertainty is taken into account.</p>	 <p>The sample complies with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.</p>	 <p>The sample does not comply with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.</p>	 <p>The sample does not comply with the requirements.</p> <p>The measurement results is outside the specification limit when the measurement uncertainty is taken into account.</p>

In agreement with ILAC-G8:09/2019 cl.4.2.1 Guidelines on Decision Rules and Statements of Conformity

### Quality manual references – Internal procedure

Internal Procedure PM001 rev. 4.0 (Quality Manual) .....	Measure procedure
Internal Procedure INC_M rev. 10.0 (Quality Manual) .....	Measurement uncertainty calculation