

## TEST REPORT



BNetzA-CAB-02/21-102

Test report no.: 1-5883\_23-01-03-A

### Testing laboratory

**cetecom advanced GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://cetecomadvanced.com>

e-mail: [mail@cetecomadvanced.com](mailto:mail@cetecomadvanced.com)

**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

### Applicant

**Continental Automotive Technologies GmbH**

Heinrich-Hertz-Str. 45

78052 Villingen-Schwenningen / GERMANY

Phone: +49 7721 67 0

Contact: Tom Gollasch

e-mail: [Tom.Gollasch@continental-corporation.com](mailto:Tom.Gollasch@continental-corporation.com)

### Manufacturer

**Continental Automotive Technologies GmbH**

Heinrich-Hertz-Str. 45

78052 Villingen-Schwenningen / GERMANY

### Test standard/s

FCC - Title 47 CFR Part 15      FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 210 Issue 10 incl.      Spectrum Management and Telecommunications Radio Standards  
Amendment      Specification - Licence-Exempt Radio Apparatus: Category I Equipment


For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:**                      **Keyfob**  
**Model name:**                          **5WK47950A**  
**FCC ID:**                                  **KR55WK47950A**  
**ISED certification number:**      **7812D-5WK47950A**  
**Frequency:**                            315 MHz  
**Technology tested:**                  Proprietary  
**Antenna:**                                Integrated antenna  
**Power supply:**                        6.0V DC by Li batteries  
**Temperature range:**                  22°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:



Christoph Schneider  
Lab Manager  
Radio Labs

### Test performed:



Tobias Wittenmeier  
Testing Manager  
Radio Labs

## 1 Table of contents

1	Table of contents .....	2
2	General information .....	3
2.1	Notes and disclaimer .....	3
2.2	Application details .....	3
2.3	Test laboratories sub-contracted .....	3
3	Test standard/s, references and accreditations .....	4
4	Reporting statements of conformity – decision rule .....	5
5	Test environment .....	6
6	Test item .....	6
6.1	General description .....	6
6.2	Additional information .....	6
7	Description of the test setup .....	7
7.1	Shielded semi anechoic chamber .....	8
7.2	Shielded fully anechoic chamber .....	10
7.3	RF measurements .....	11
8	Sequence of testing .....	12
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz .....	12
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz .....	13
8.3	Sequence of testing radiated spurious 1 GHz to 18 GHz .....	14
9	Measurement uncertainty .....	15
10	Summary of measurement results .....	16
10.1	Additional comments .....	16
11	Measurement results .....	17
11.1	Timing of the transmitter .....	17
11.2	Switch off time .....	20
11.3	Emission bandwidth .....	21
11.4	Field strength of the fundamental .....	23
11.5	Field strength of the harmonics and spurious .....	24
12	Observations .....	29
13	Glossary .....	30
14	Document history .....	31

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

**This test report replaces the test report with the number 1-5883\_23-01-03 and dated 2024-01-09.**

### 2.2 Application details

Date of receipt of order: 2023-03-02

Date of receipt of test item: 2023-03-06

Start of test:\* 2023-03-06

End of test:\* 2024-03-11

Person(s) present during the test: -/-

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 10 incl. Amendment	April 2020	Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment
RSS - Gen Issue 5 incl. Amendment 1 & 2	February 2021	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus


Guidance	Version	Description
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

#### 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

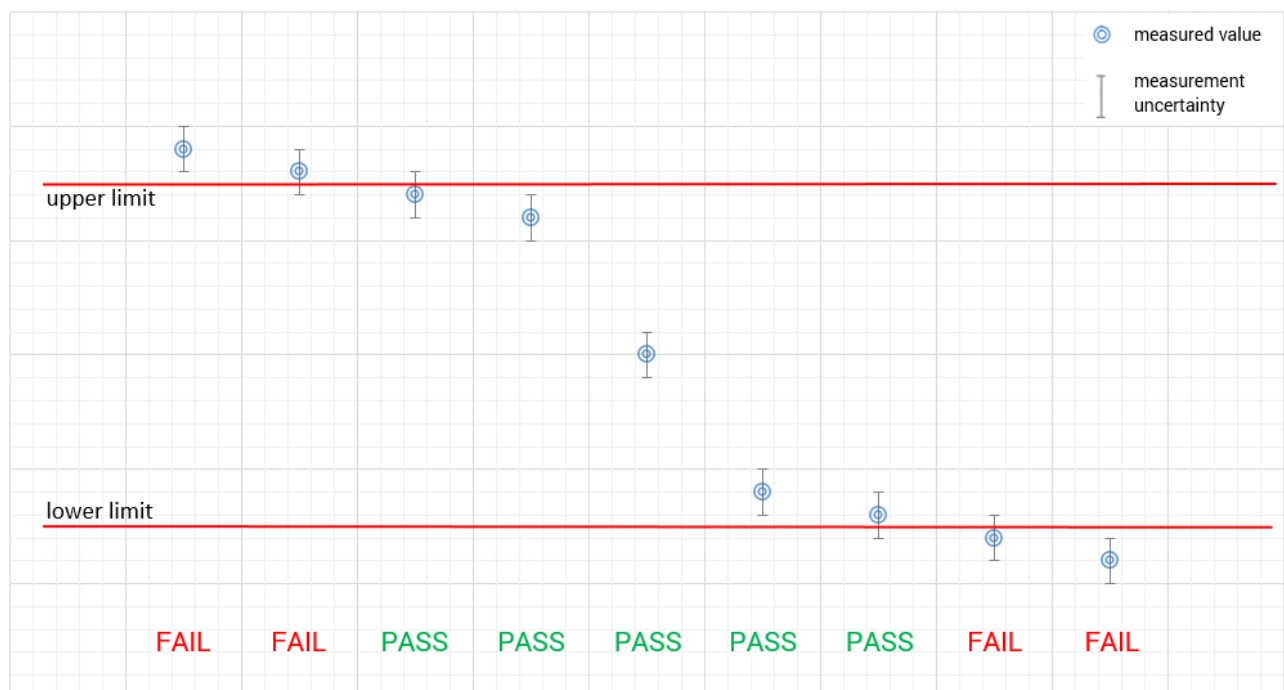

## 5 Test environment

Temperature :	T <sub>nom</sub> T <sub>max</sub> T <sub>min</sub>	+20 °C during room temperature tests No tests under extreme conditions required. No tests under extreme conditions required.
Relative humidity content :		55 %
Barometric pressure :		1021 hpa
Power supply :	V <sub>nom</sub> V <sub>max</sub> V <sub>min</sub>	6.0 V DC by Li batteries No tests under extreme conditions required. No tests under extreme conditions required.

## 6 Test item

### 6.1 General description

Kind of test item :	Keyfob
Model name :	5WK47950A
HMN :	-/-
PMN :	5WK47950A
HVIN :	5WK47950A
FVIN :	-/-
S/N serial number :	-/-
Hardware status :	-/-
Software status :	-/-
Firmware status :	-/-
Frequency band :	315 MHz
Type of radio transmission :	Modulated carrier
Use of frequency spectrum :	
Type of modulation :	FSK
Number of channels :	1
Antenna :	Integrated antenna
Power supply :	6.0V DC by Li batteries
Temperature :	22 °C

### 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-5883\_23-01-01\_AnnexA  
1-5883\_23-01-01\_AnnexB  
1-5883\_23-01-01\_AnnexD

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

### **Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

## 7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

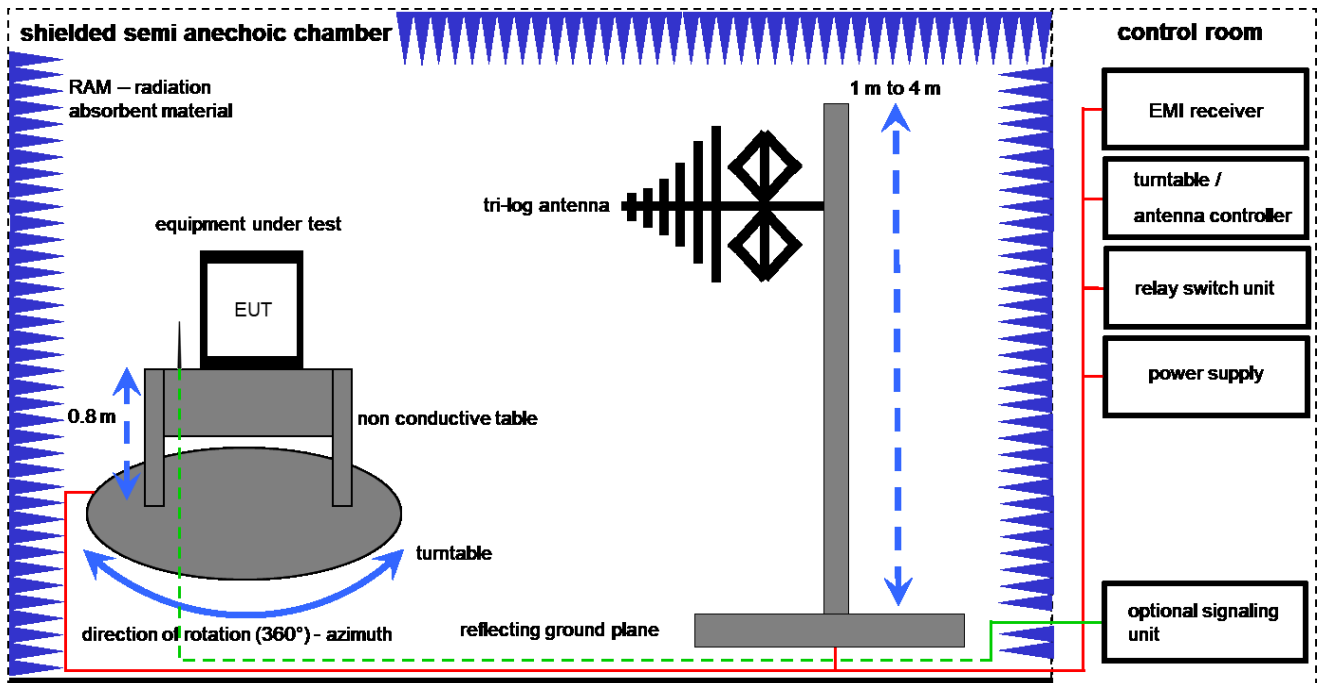

Measurement distance: tri-log antenna 10 meter

EMC32 software version: 10.59.00

FS = UR + CL + AF

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

FS [dB $\mu$ V/m] = 12.35 [dB $\mu$ V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB $\mu$ V/m] (35.69  $\mu$ V/m)

**Equipment table:**

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Semi anechoic chamber	3000023	MWB AG		300000551	ne	-/-	-/-
3	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
4	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
5	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
6	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	318	300003696	vlKI!	31.01.2024	30.01.2026
7	A	Turntable	2089-4.0	EMCO		300004394	ne	-/-	-/-
8	A	PC	TecLine	F+W		300004388	ne	-/-	-/-
9	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	06.12.2023	31.12.2024

## 7.2 Shielded fully anechoic chamber

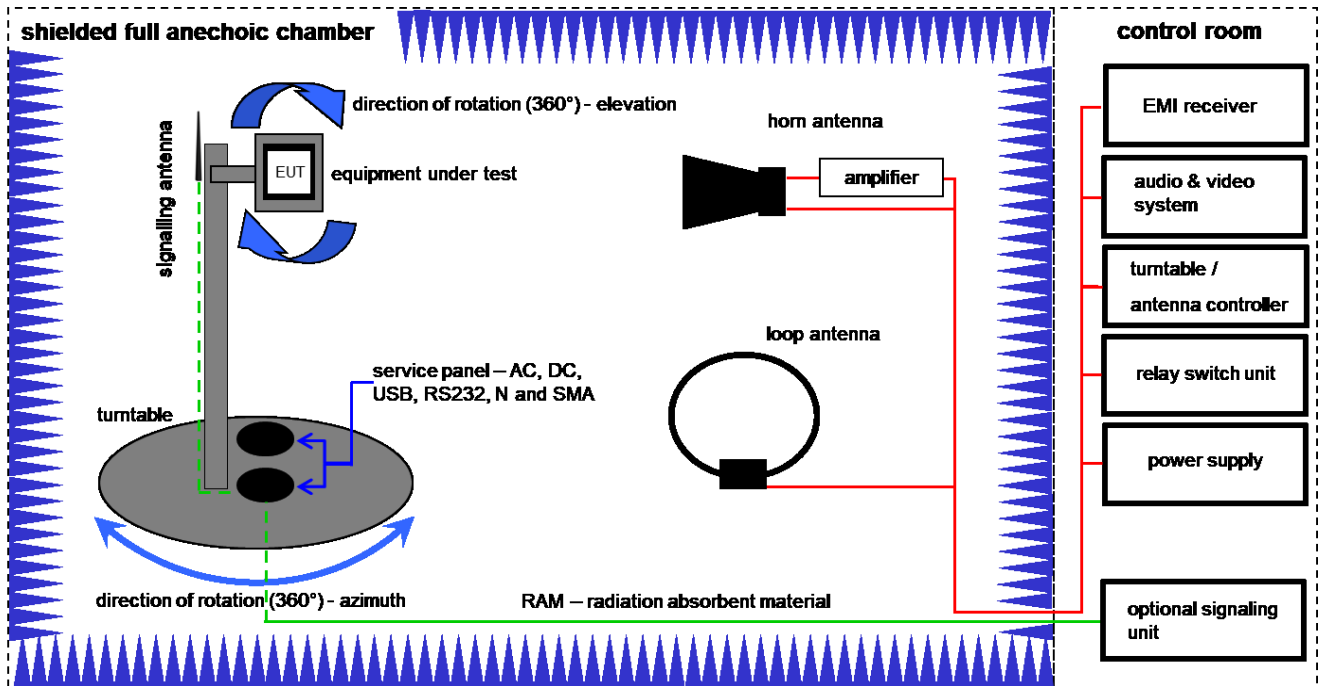

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:


FS [dBμV/m] = 40.0 [dBμV/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dBμV/m] (71.61 μV/m)

### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vKI!	02.08.2023	31.08.2025
2	A,B	Anechoic chamber		TDK		300003726	ne	-/-	-/-
3	A,B	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
4	B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3089	300000307	vKI!	11.02.2022	29.02.2024
5	A,B	EMI Test Receiver 9kHz-26,5GHz	ESR26	Rohde & Schwarz	101376	300005063	k	15.01.2024	14.01.2025
6	B	Highpass Filter	WHK1.1/15G-10SS	Wainwright	37	400000148	ne	-/-	-/-
7	B	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22050	300004482	ev	-/-	-/-
8	A,B	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
9	A,B	NEXIO EMV-Software	BAT EMC V2022.0.22.0	Nexio		300004682	ne	-/-	-/-

### 7.3 RF measurements

#### Conducted measurements normal conditions

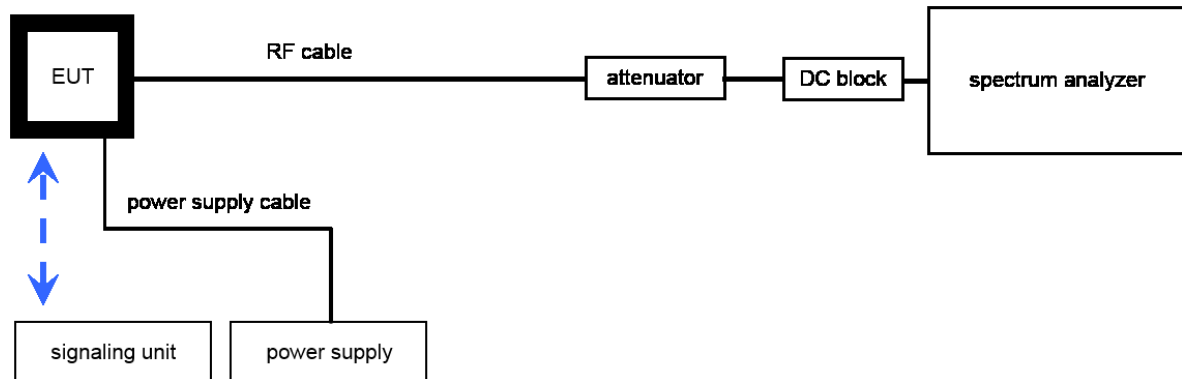

OP = AV + CA  
 (OP-output power; AV-analyzer value; CA-loss signal path)

#### Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

#### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal analyzer	FSV30	Rohde&Schwarz	104365	300005923	k	13.12.2023	31.12.2024
2	A	Loop Antenna		ZEG TS Steinfurt		400001208	ev	-/-	-/-
3	A	RF Cable BNC	RG58	Huber & Suhner		400001209	ev	-/-	-/-

## 8 Sequence of testing

### 8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

\*Note: The sequence will be repeated three times with different EUT orientations.

## 8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

### 8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 9 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Occupied bandwidth	± used RBW
Field strength of the fundamental	± 3 dB
Field strength of the harmonics and spurious	± 3 dB
Receiver spurious emissions and cabinet radiations	± 3 dB
Conducted limits	± 2.6 dB

## 10 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 10 RSS-Gen, Issue 5	See table!	2024-03-18	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	C	NC	NA	NP	Remark
§ 15.35 (c) RSS-Gen, Issue 5	Timing of the transmitter (Duty cycle correction factor)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
§ 15.231 (a) (1) RSS-210 Issue 10	Switch off time	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.231 (b) (3) (c) RSS-210 Issue 10	Emission bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.231 (b) RSS-210 Issue 10	Fieldstrength of Fundamental	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.209 RSS-210 Issue 10	Fieldstrength of harmonics and spurious	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

**Note:** C = Compliant; NC = Not compliant; NA = Not applicable; NP = Not performed

### 10.1 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

## 11 Measurement results

### 11.1 Timing of the transmitter

#### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	See plots
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	Zero
Trace-Mode:	Single sweep
Test setup	See chapter 7.3A

#### Limits:



FCC	IC
<p>(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.</p>	

#### Results:


Pulse length 1: 20.55 ms (Plot 2)  
Pulse length 2: 0.456 ms (Plot 3)

Number of pulses within 10ms after start pulse: 10 (Plot3)  
Transmit time within 100 ms = 20.55 ms + 80\*0.456 ms = 57.03 ms

The peak-to-average correction factor is calculated with  $20\log [Tx\ on/(Tx\ on + Tx\ off)]$ .  
Hereby the peak-to-average correction factor is  $20\log [57.03ms/(100ms)] = -4.88\ dB$

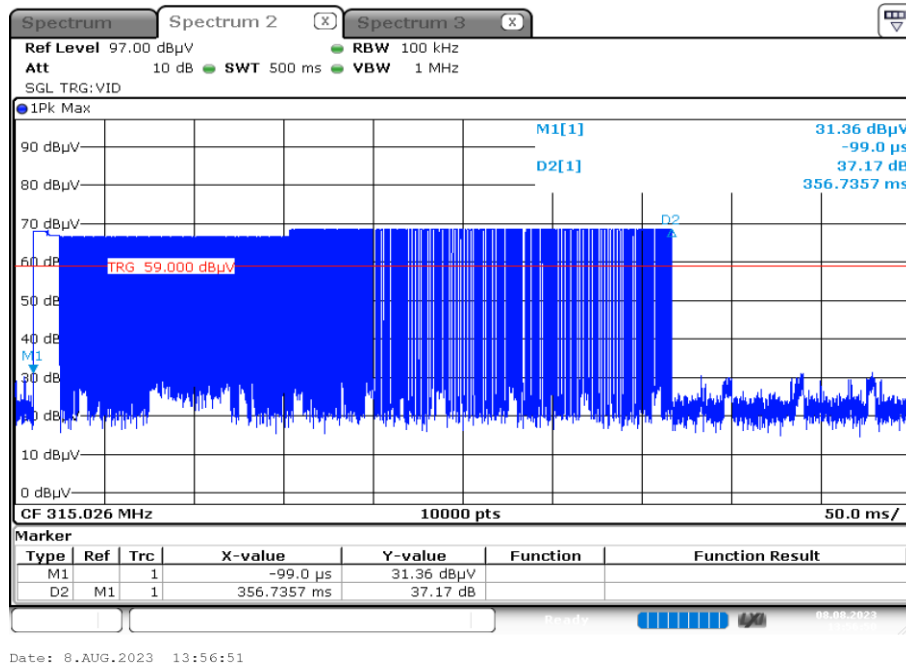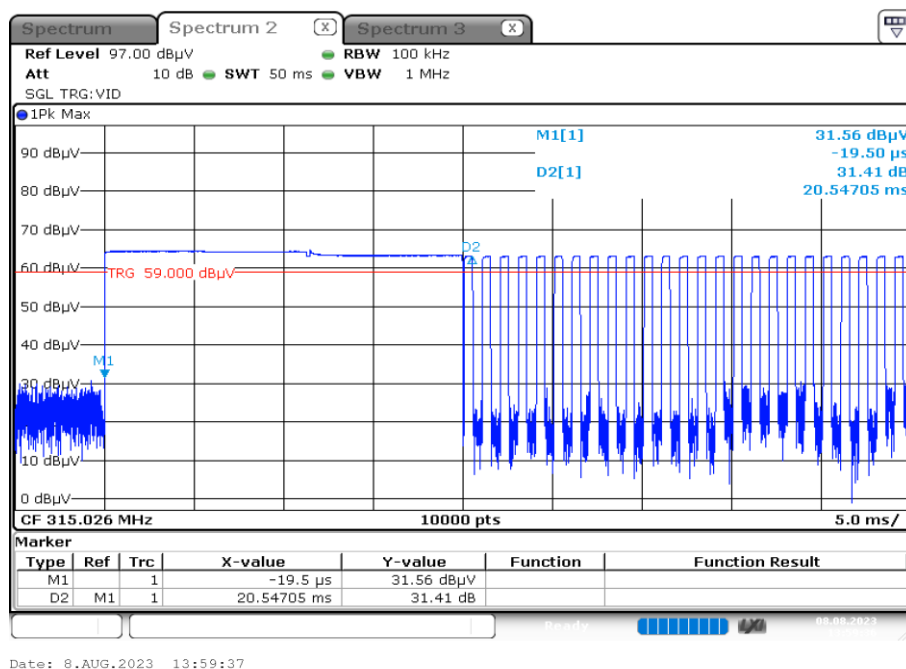**Plots:****Plot 1: Transmit burst****Plot 2: Start pulse**

Plot 3: Timing of the transmitter

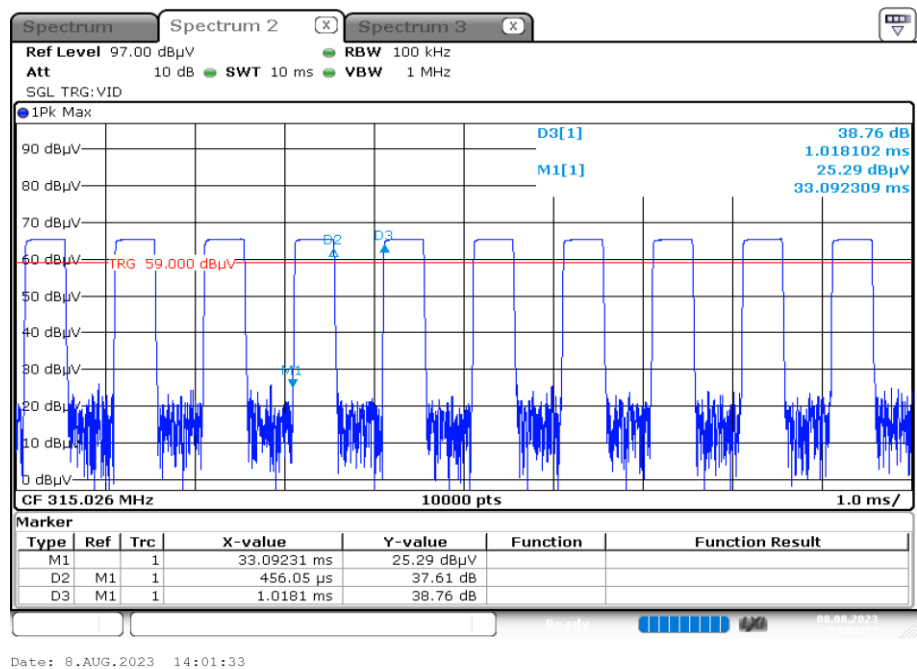

## 11.2 Switch off time

### Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	See plot
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	Zero
Trace-Mode:	Single sweep
Test setup	See chapter 7.3A
Measurement uncertainty	See chapter 9

### Limits:

FCC	IC
A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.	

### Results:

#### Plot 1: TX on time

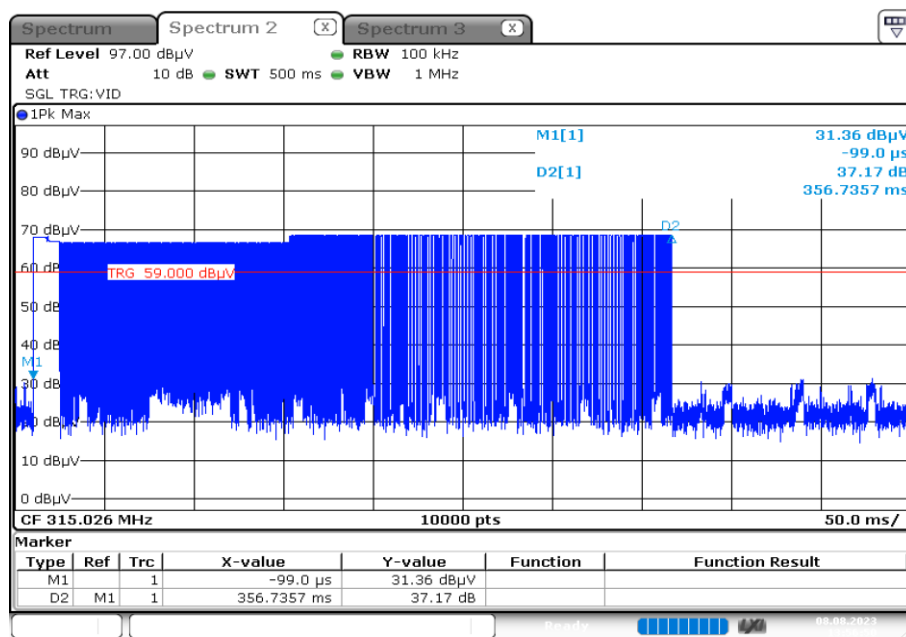

Date: 8.AUG.2023 13:56:51

The EUT automatically ceases transmission within 356.7 ms after releasing the switch.

### 11.3 Emission bandwidth

#### Measurement:

Measurement of the 99 % bandwidth of the modulated signal


Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1% to 5% of the OBW
Video bandwidth:	3 x RBW
Span:	See plot
Trace-Mode:	Max. hold
Test setup	See chapter 7.3A
Measurement uncertainty	See chapter 9

#### Limits:

FCC	IC
The OBW shall not be wider than 0.25% of the centre frequency, here maximum 787.5 kHz.	

#### Result:

99% emission bandwidth
17.09 kHz

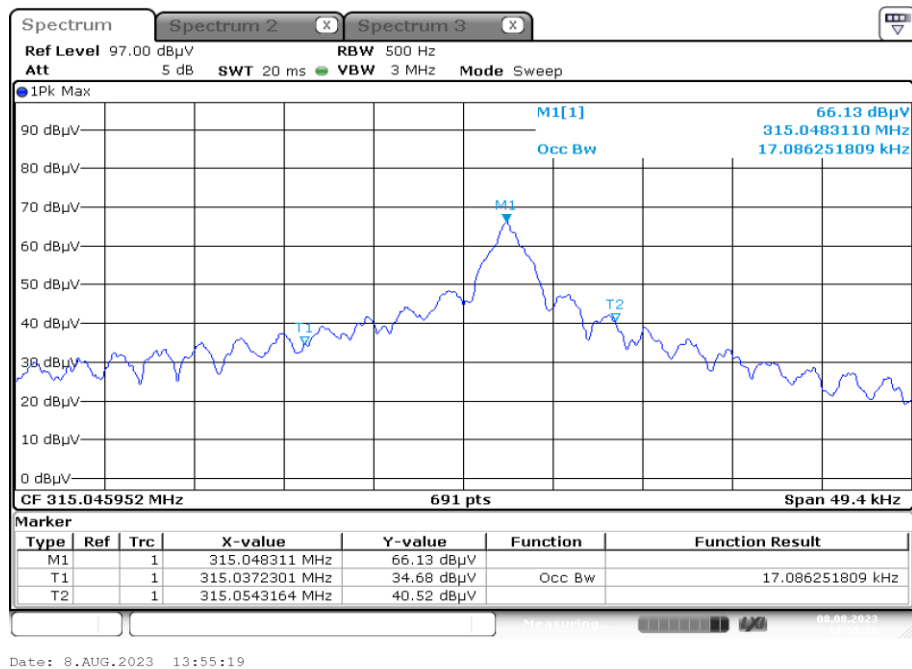**Plots:****Plot 1: Emissions bandwidth**

## 11.4 Field strength of the fundamental

### Measurement:

Measurement parameter	
Detector:	Peak / pulse averaging / quasi peak
Sweep time:	Auto
Resolution bandwidth:	120 kHz
Video bandwidth:	3 x RBW
Span:	Zero
Trace-Mode:	Max. hold
Test setup	See chapter 7.1A
Measurement uncertainty	See chapter 9

### Limits:

FCC		IC
Field strength of the fundamental.		
In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:		
Fundamental Frequency (MHz)	Field strength of Fundamental ( $\mu\text{V/m}$ )	Measurement distance (m)
40.66 – 40.70	2,250	3
70-130	1,250	3
130-174	1,250 to 3,750	3
174-260	3,750	3
260-470	3,750 to 12,500	3
Above 470	12,500	3

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

- for the band 130-174 MHz,  $\mu\text{V/m}$  at 3 meters =  $56.81818(F) - 6136.3636$ ;
- for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters =  $41.6667(F) - 7083.3333$ .

### Result:

Test conditions		Maximum power (@ 3 m)*		Limit (@ 3 m)	
Mode		Peak	Average	Peak	Average
$T_{\text{nom}}$	$V_{\text{nom}}$	73.5 dB $\mu\text{V/m}$	68.6** dB $\mu\text{V/m}$	95.6 dB $\mu\text{V/m}$	75.6 dB $\mu\text{V/m}$

\* Calculated from 10 meter to 3 meter with 10.46 dB

\*\* Value recalculated from Peak-to-Average correction factor described in 11.1

## 11.5 Field strength of the harmonics and spurious

### Measurement:

Measurement parameter	
Detector:	Peak / average / quasi peak
Sweep time:	Auto
Resolution bandwidth:	200 Hz / 9 kHz / 120 kHz
Video bandwidth:	3 x RBW
Span:	See plots
Trace-Mode:	Max. hold
Test setup	See chapter 7.1A & 7.2A,B
Measurement uncertainty	See chapter 9

### Limits: Part 15.231

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

FCC		IC
FCC Part 15.231		
Fundamental Frequency (MHz)	Field strength of spurious ( $\mu\text{V/m}$ )	Measurement distance (m)
40.66 – 40.70	225	3
70-130	125	3
130-174	125 to 375	3
174-260	375	3
260-470	375 to 1,250	3
Above 470	1,250	3

Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in Section 15.209, whichever limit permits a higher field strength.

FCC		IC
FCC Part 15.209		
Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
above 960	500	3

**Results:** Spurious emissions >1GHz


Spurious Frequency	Detector	Limit	Amplitude of emission
1260 MHz	Peak	75.6 dB $\mu$ V/m	38.94 dB $\mu$ V/m
	AVG	55.6 dB $\mu$ V/m	34.06 dB $\mu$ V/m
1575 MHz	Peak	74 dB $\mu$ V/m	48.88 dB $\mu$ V/m
	AVG	54 dB $\mu$ V/m	44.00 dB $\mu$ V/m
1890 MHz	Peak	75.6 dB $\mu$ V/m	59.31 dB $\mu$ V/m
	AVG	55.6 dB $\mu$ V/m	54.43 dB $\mu$ V/m
2205 MHz	Peak	74 dB $\mu$ V/m	51.22 dB $\mu$ V/m
	AVG	54 dB $\mu$ V/m	46.34 dB $\mu$ V/m
2520 MHz	Peak	75.6 dB $\mu$ V/m	54.75 dB $\mu$ V/m
	AVG	55.6 dB $\mu$ V/m	49.87 dB $\mu$ V/m
2835 MHz	Peak	74 dB $\mu$ V/m	46.31 dB $\mu$ V/m
	AVG	54 dB $\mu$ V/m	41.43 dB $\mu$ V/m


AVG value recalculated from Peak-to-Average correction factor described in 11.1

For emissions below 1 GHz, see table below the plots.

**Plots:**


**Plot 1: 9 kHz to 30 MHz**

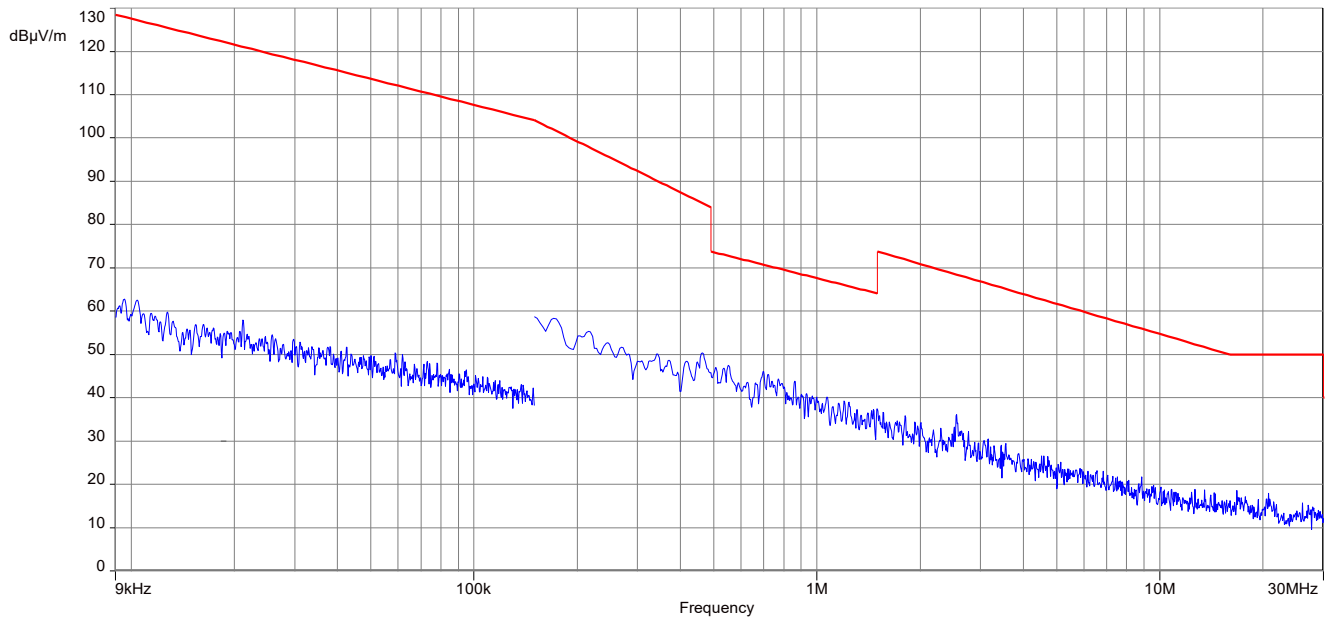

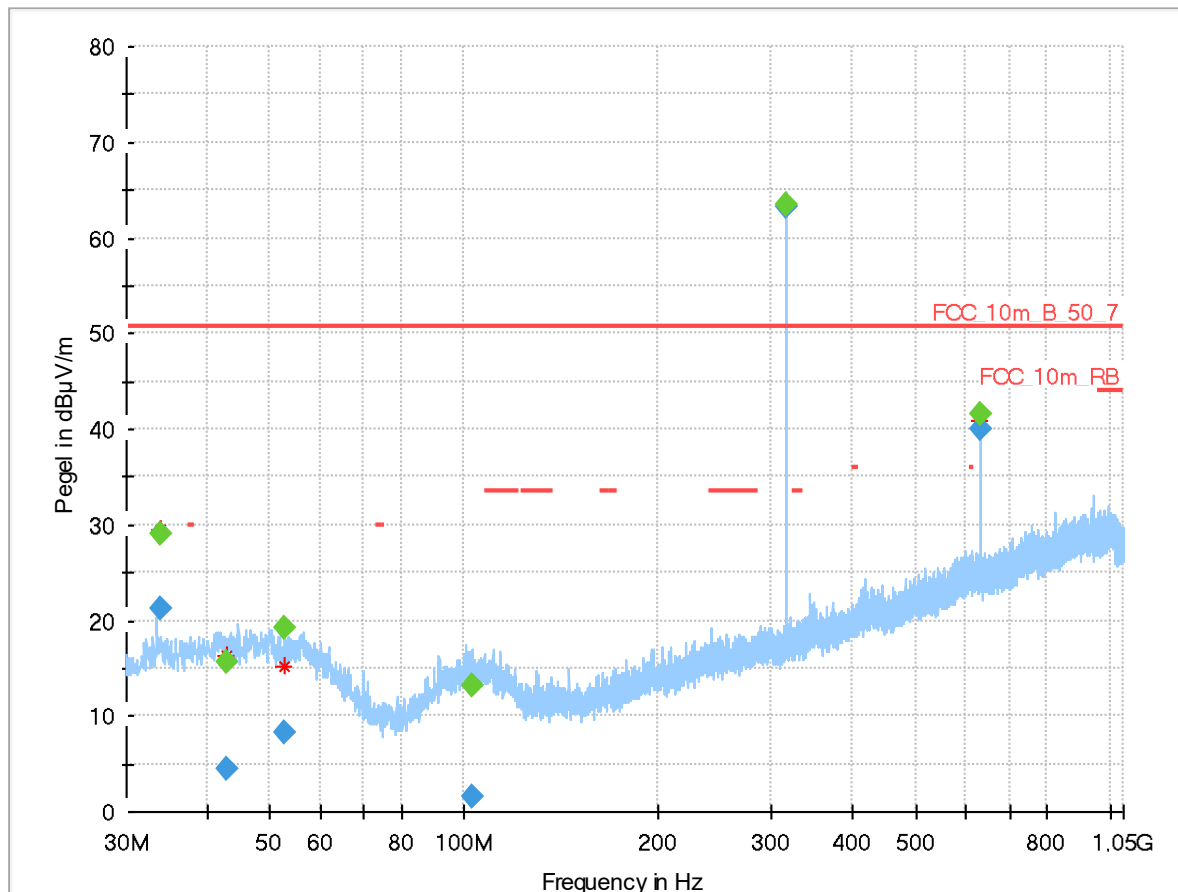**Plot 2:** 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
33.976	21.24	---	50.7	29.5	200	120.0	104.0	V
42.927	4.40	---	50.7	46.3	200	120.0	317.0	V
52.553	8.37	---	50.7	42.3	200	120.0	283.0	V
102.674	1.65	---	50.7	49.1	200	120.0	400.0	H
630.022	39.89	---	50.7	10.8	200	120.0	253.0	V

**Plot 3:** 1000 MHz to 4000 MHz, vertical & horizontal polarisation

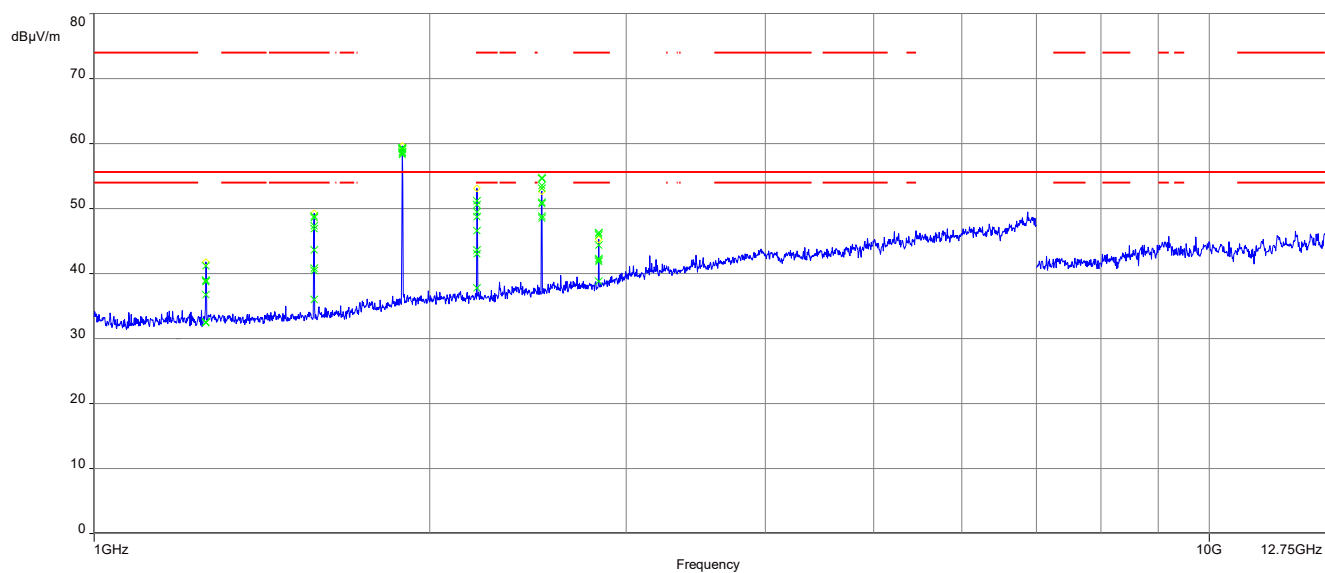

## 12 Observations

No observations except those reported with the single test cases have been made.

## 13 Glossary

<b>EUT</b>	Equipment under test
<b>DUT</b>	Device under test
<b>UUT</b>	Unit under test
<b>GUE</b>	GNSS User Equipment
<b>ETSI</b>	European Telecommunications Standards Institute
<b>EN</b>	European Standard
<b>FCC</b>	Federal Communications Commission
<b>FCC ID</b>	Company Identifier at FCC
<b>IC</b>	Industry Canada
<b>PMN</b>	Product marketing name
<b>HMN</b>	Host marketing name
<b>HVIN</b>	Hardware version identification number
<b>FVIN</b>	Firmware version identification number
<b>EMC</b>	Electromagnetic Compatibility
<b>HW</b>	Hardware
<b>SW</b>	Software
<b>Inv. No.</b>	Inventory number
<b>S/N or SN</b>	Serial number
<b>C</b>	Compliant
<b>NC</b>	Not compliant
<b>NA</b>	Not applicable
<b>NP</b>	Not performed
<b>PP</b>	Positive peak
<b>QP</b>	Quasi peak
<b>AVG</b>	Average
<b>OC</b>	Operating channel
<b>OCW</b>	Operating channel bandwidth
<b>OBW</b>	Occupied bandwidth
<b>OOB</b>	Out of band
<b>DFS</b>	Dynamic frequency selection
<b>CAC</b>	Channel availability check
<b>OP</b>	Occupancy period
<b>NOP</b>	Non occupancy period
<b>DC</b>	Duty cycle
<b>PER</b>	Packet error rate
<b>CW</b>	Clean wave
<b>MC</b>	Modulated carrier
<b>WLAN</b>	Wireless local area network
<b>RLAN</b>	Radio local area network
<b>DSSS</b>	Dynamic sequence spread spectrum
<b>OFDM</b>	Orthogonal frequency division multiplexing
<b>FHSS</b>	Frequency hopping spread spectrum
<b>GNSS</b>	Global Navigation Satellite System
<b>C/N<sub>0</sub></b>	Carrier to noise-density ratio, expressed in dB-Hz

14 Document history

Version	Applied changes	Date of release
-/-	Initial release	2024-01-09
A	Additional spurious measurements	2024-03-18

##### END OF TEST REPORT #####