

# FCC SAR TEST REPORT

FCC ID : 2AP4W-AWEAR  
Equipment : mPERS  
Brand Name : Belle W  
Model Name : Belle W  
Marketing Name : Belle W  
Applicant : Freeus, LLC  
1069 Stewart Dr, Suites 3-6 Ogden, Utah 84404, United States  
Manufacturer : WiBASE Industrial Solutions Inc.  
Bldg. G, 17F, No. 3-1, Yuan Qu St., Nan Gang Dist., Taipei  
City, 115, Taiwan.  
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Feb. 14, 2022 and testing was started from Feb. 16, 2022 and completed on Feb. 16, 2022. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

  
Approved by: Cona Huang / Deputy Manager



**Sporton International Inc. EMC & Wireless Communications Laboratory**  
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



## **Table of Contents**

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. Statement of Compliance .....</b>                     | <b>4</b>  |
| <b>2. Guidance Applied.....</b>                             | <b>4</b>  |
| <b>3. Equipment Under Test (EUT) Information.....</b>       | <b>5</b>  |
| 3.1 General Information .....                               | 5         |
| 3.2 General LTE SAR Test and Reporting Considerations ..... | 6         |
| <b>4. RF Exposure Limits.....</b>                           | <b>7</b>  |
| 4.1 Uncontrolled Environment.....                           | 7         |
| 4.2 Controlled Environment.....                             | 7         |
| <b>5. Specific Absorption Rate (SAR).....</b>               | <b>8</b>  |
| 5.1 Introduction .....                                      | 8         |
| 5.2 SAR Definition.....                                     | 8         |
| <b>6. System Description and Setup .....</b>                | <b>9</b>  |
| 6.1 Test Site Location.....                                 | 9         |
| 6.2 E-Field Probe .....                                     | 10        |
| 6.3 Data Acquisition Electronics (DAE) .....                | 10        |
| 6.4 Phantom.....                                            | 11        |
| 6.5 Device Holder.....                                      | 12        |
| <b>7. Measurement Procedures .....</b>                      | <b>13</b> |
| 7.1 Spatial Peak SAR Evaluation.....                        | 13        |
| 7.2 Power Reference Measurement.....                        | 14        |
| 7.3 Area Scan .....                                         | 14        |
| 7.4 Zoom Scan.....                                          | 15        |
| 7.5 Volume Scan Procedures.....                             | 15        |
| 7.6 Power Drift Monitoring.....                             | 15        |
| <b>8. Test Equipment List.....</b>                          | <b>16</b> |
| <b>9. System Verification.....</b>                          | <b>17</b> |
| 9.1 Tissue Verification .....                               | 17        |
| 9.2 System Performance Check Results.....                   | 17        |
| <b>10. LTE Output Power (Unit: dBm) .....</b>               | <b>18</b> |
| <b>11. 2.4GHz WiFi Output Power (Unit: dBm).....</b>        | <b>25</b> |
| <b>12. Antenna Location .....</b>                           | <b>26</b> |
| <b>13. SAR Test Results .....</b>                           | <b>27</b> |
| 13.1 Head SAR .....                                         | 27        |
| 13.2 Body Worn Accessory SAR.....                           | 28        |
| 13.3 Extremity SAR.....                                     | 29        |
| 13.4 Repeated SAR Measurement .....                         | 31        |
| <b>14. Simultaneous Transmission Analysis.....</b>          | <b>31</b> |
| 14.1 Head Exposure Conditions .....                         | 32        |
| 14.2 Body-Worn Accessory Exposure Conditions .....          | 32        |
| 14.3 Extremity Exposure Conditions .....                    | 33        |
| <b>15. Uncertainty Assessment .....</b>                     | <b>34</b> |
| <b>16. References.....</b>                                  | <b>34</b> |
| <b>Appendix A. Plots of System Performance Check</b>        |           |
| <b>Appendix B. Plots of High SAR Measurement</b>            |           |
| <b>Appendix C. DASY Calibration Certificate</b>             |           |
| <b>Appendix D. Test Setup Photos</b>                        |           |

## History of this test report

| Report No. | Version | Description             | Issued Date   |
|------------|---------|-------------------------|---------------|
| FA1D1704   | 01      | Initial issue of report | Apr. 07, 2022 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Freeus, LLC, mPERS, Belle W, are as follows.

| Equipment Class  | Frequency Band |             | Highest SAR Summary       |                               |                               | Highest Simultaneous Transmission<br>1g SAR (W/kg) | Highest Simultaneous Transmission<br>10g SAR (W/kg) |
|------------------|----------------|-------------|---------------------------|-------------------------------|-------------------------------|----------------------------------------------------|-----------------------------------------------------|
|                  |                |             | Head<br>(Separation 10mm) | Body worn<br>(Separation 0mm) | Extremity<br>(Separation 0mm) |                                                    |                                                     |
|                  |                |             | 1g SAR (W/kg)             |                               | 10g SAR (W/kg)                |                                                    |                                                     |
| Licensed         | LTE            | LTE Band 2  | 1.10                      | 0.58                          | 2.78                          | 1.13                                               | 2.84                                                |
|                  |                | LTE Band 4  | 0.49                      | 0.40                          | 2.18                          |                                                    |                                                     |
|                  |                | LTE Band 12 | 0.33                      | 0.44                          | 2.11                          |                                                    |                                                     |
| DTS              | WLAN           | 2.4GHz WLAN | 0.03                      | 0.12                          | 0.06                          |                                                    |                                                     |
| Date of Testing: |                |             | 2022/2/16                 |                               |                               |                                                    |                                                     |

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Extremity 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

**Reviewed by: Jason Wang**

**Report Producer: Carlie Tsai**

## 2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D05 SAR for LTE Devices v02r05



### **3. Equipment Under Test (EUT) Information**

#### **3.1 General Information**

| Product Feature & Specification         |                                                                                                                                                  |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment Name                          | mPERS                                                                                                                                            |
| Brand Name                              | Belle W                                                                                                                                          |
| Model Name                              | Belle W                                                                                                                                          |
| Marketing Name                          | Belle W                                                                                                                                          |
| FCC ID                                  | 2AP4W-AWEAR                                                                                                                                      |
| Wireless Technology and Frequency Range | LTE Band 2: 1850 MHz ~ 1910 MHz<br>LTE Band 4: 1710 MHz ~ 1755 MHz<br>LTE Band 12: 699 MHz ~ 716 MHz<br>WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz |
| Mode                                    | LTE: QPSK, 16QAM<br>WLAN: 802.11b/g/n HT20                                                                                                       |
| HW Version                              | DVT1                                                                                                                                             |
| SW Version                              | V1.01.211129R                                                                                                                                    |
| EUT Stage                               | Identical Prototype                                                                                                                              |

### 3.2 General LTE SAR Test and Reporting Considerations

| Summarized necessary items addressed in KDB 941225 D05 v02r05           |                   |             |                                                                                                                                                                                                        |                                                               |                 |             |                  |             |                  |             |                  |             |
|-------------------------------------------------------------------------|-------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|-----------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|
| FCC ID                                                                  |                   |             | 2AP4W-AWEAR                                                                                                                                                                                            |                                                               |                 |             |                  |             |                  |             |                  |             |
| Equipment Name                                                          |                   |             | mPERS                                                                                                                                                                                                  |                                                               |                 |             |                  |             |                  |             |                  |             |
| Operating Frequency Range of each LTE transmission band                 |                   |             | LTE Band 2: 1850 MHz ~ 1910 MHz<br>LTE Band 4: 1710 MHz ~ 1755 MHz<br>LTE Band 12: 699 MHz ~ 716 MHz                                                                                                   |                                                               |                 |             |                  |             |                  |             |                  |             |
| Channel Bandwidth                                                       |                   |             | LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz<br>LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz<br>LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz                                                      |                                                               |                 |             |                  |             |                  |             |                  |             |
| uplink modulations used                                                 |                   |             | QPSK / 16QAM                                                                                                                                                                                           |                                                               |                 |             |                  |             |                  |             |                  |             |
| LTE Voice / Data requirements                                           |                   |             | Data only                                                                                                                                                                                              |                                                               |                 |             |                  |             |                  |             |                  |             |
| LTE MPR permanently built-in by design                                  |                   |             | Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3                                                                                                                                |                                                               |                 |             |                  |             |                  |             |                  |             |
|                                                                         |                   |             | Modulation                                                                                                                                                                                             | Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> ) |                 |             |                  |             |                  | MPR (dB)    |                  |             |
|                                                                         |                   |             |                                                                                                                                                                                                        | 1.4 MHz                                                       | 3.0 MHz         | 5 MHz       | 10 MHz           | 15 MHz      | 20 MHz           |             |                  |             |
|                                                                         |                   |             | QPSK                                                                                                                                                                                                   | > 5                                                           | > 4             | > 8         | > 12             | > 16        | > 18             | ≤ 1         |                  |             |
|                                                                         |                   |             | 16 QAM                                                                                                                                                                                                 | ≤ 5                                                           | ≤ 4             | ≤ 8         | ≤ 12             | ≤ 16        | ≤ 18             | ≤ 1         |                  |             |
|                                                                         |                   |             | 16 QAM                                                                                                                                                                                                 | > 5                                                           | > 4             | > 8         | > 12             | > 16        | > 18             | ≤ 2         |                  |             |
|                                                                         |                   |             | 64 QAM                                                                                                                                                                                                 | ≤ 5                                                           | ≤ 4             | ≤ 8         | ≤ 12             | ≤ 16        | ≤ 18             | ≤ 2         |                  |             |
|                                                                         |                   |             | 64 QAM                                                                                                                                                                                                 | > 5                                                           | > 4             | > 8         | > 12             | > 16        | > 18             | ≤ 3         |                  |             |
|                                                                         |                   |             | 256 QAM                                                                                                                                                                                                |                                                               |                 |             |                  |             | ≥ 1              |             |                  | ≤ 5         |
| LTE A-MPR                                                               |                   |             | In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)          |                                                               |                 |             |                  |             |                  |             |                  |             |
| Spectrum plots for RB configuration                                     |                   |             | A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report. |                                                               |                 |             |                  |             |                  |             |                  |             |
| Transmission (H, M, L) channel numbers and frequencies in each LTE band |                   |             |                                                                                                                                                                                                        |                                                               |                 |             |                  |             |                  |             |                  |             |
| LTE Band 2                                                              |                   |             |                                                                                                                                                                                                        |                                                               |                 |             |                  |             |                  |             |                  |             |
|                                                                         | Bandwidth 1.4 MHz |             | Bandwidth 3 MHz                                                                                                                                                                                        |                                                               | Bandwidth 5 MHz |             | Bandwidth 10 MHz |             | Bandwidth 15 MHz |             | Bandwidth 20 MHz |             |
|                                                                         | Ch. #             | Freq. (MHz) | Ch. #                                                                                                                                                                                                  | Freq. (MHz)                                                   | Ch. #           | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) |
| L                                                                       | 18607             | 1850.7      | 18615                                                                                                                                                                                                  | 1851.5                                                        | 18625           | 1852.5      | 18650            | 1855        | 18675            | 1857.5      | 18700            | 1860        |
| M                                                                       | 18900             | 1880        | 18900                                                                                                                                                                                                  | 1880                                                          | 18900           | 1880        | 18900            | 1880        | 18900            | 1880        | 18900            | 1880        |
| H                                                                       | 19193             | 1909.3      | 19185                                                                                                                                                                                                  | 1908.5                                                        | 19175           | 1907.5      | 19150            | 1905        | 19125            | 1902.5      | 19100            | 1900        |
| LTE Band 4                                                              |                   |             |                                                                                                                                                                                                        |                                                               |                 |             |                  |             |                  |             |                  |             |
|                                                                         | Bandwidth 1.4 MHz |             | Bandwidth 3 MHz                                                                                                                                                                                        |                                                               | Bandwidth 5 MHz |             | Bandwidth 10 MHz |             | Bandwidth 15 MHz |             | Bandwidth 20 MHz |             |
|                                                                         | Ch. #             | Freq. (MHz) | Ch. #                                                                                                                                                                                                  | Freq. (MHz)                                                   | Ch. #           | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) |
| L                                                                       | 19957             | 1710.7      | 19965                                                                                                                                                                                                  | 1711.5                                                        | 19975           | 1712.5      | 20000            | 1715        | 20025            | 1717.5      | 20050            | 1720        |
| M                                                                       | 20175             | 1732.5      | 20175                                                                                                                                                                                                  | 1732.5                                                        | 20175           | 1732.5      | 20175            | 1732.5      | 20175            | 1732.5      | 20175            | 1732.5      |
| H                                                                       | 20393             | 1754.3      | 20385                                                                                                                                                                                                  | 1753.5                                                        | 20375           | 1752.5      | 20350            | 1750        | 20325            | 1747.5      | 20300            | 1745        |
| LTE Band 12                                                             |                   |             |                                                                                                                                                                                                        |                                                               |                 |             |                  |             |                  |             |                  |             |
|                                                                         | Bandwidth 1.4 MHz |             | Bandwidth 3 MHz                                                                                                                                                                                        |                                                               | Bandwidth 5 MHz |             | Bandwidth 10 MHz |             | Bandwidth 15 MHz |             | Bandwidth 20 MHz |             |
|                                                                         | Ch. #             | Freq. (MHz) | Ch. #                                                                                                                                                                                                  | Freq. (MHz)                                                   | Ch. #           | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) |
| L                                                                       | 23017             | 699.7       | 23025                                                                                                                                                                                                  | 700.5                                                         | 23035           | 701.5       | 23060            | 704         | 23095            | 707.5       | 23130            | 711         |
| M                                                                       | 23095             | 707.5       | 23095                                                                                                                                                                                                  | 707.5                                                         | 23095           | 707.5       | 23095            | 707.5       | 23095            | 707.5       | 23095            | 707.5       |
| H                                                                       | 23173             | 715.3       | 23165                                                                                                                                                                                                  | 714.5                                                         | 23155           | 713.5       | 23130            | 711         | 23100            | 708.5       | 23070            | 706.5       |

## **4. RF Exposure Limits**

### **4.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### **4.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.4        | 8.0          | 20.0                           |

**Limits for General Population/Uncontrolled Exposure (W/kg)**

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.08       | 1.6          | 4.0                            |

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)


$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.



## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

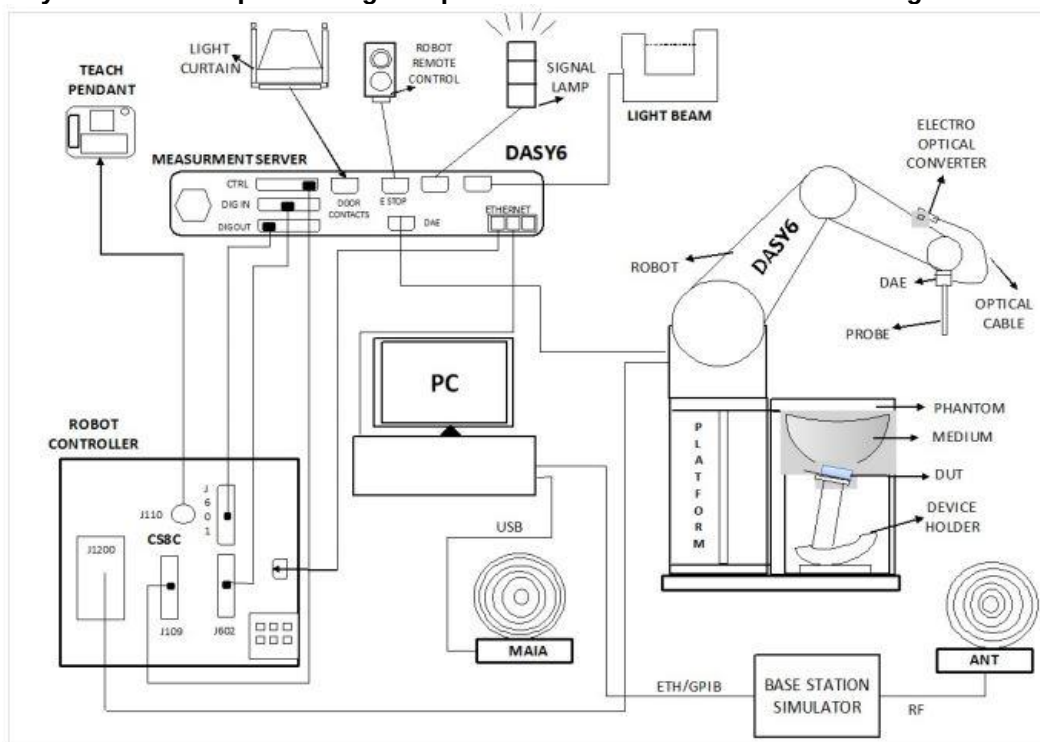

- The DASY system in DASY6/DASY5 V5.2 SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY5/DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

| Test Site          | EMC & Wireless Communications Laboratory                                |          | Wensan Laboratory                                                                              |          |          |
|--------------------|-------------------------------------------------------------------------|----------|------------------------------------------------------------------------------------------------|----------|----------|
| Test Site Location | TW1190<br>No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan |          | TW3786<br>No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan |          |          |
| Test Site No.      | SAR01-HY                                                                | SAR03-HY | SAR08-HY                                                                                       | SAR09-HY | SAR15-HY |
|                    | SAR04-HY                                                                | SAR05-HY | SAR11-HY                                                                                       | SAR12-HY |          |
|                    | SAR06-HY                                                                | SAR10-HY | SAR13-HY                                                                                       | SAR14-HY |          |

## 6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### <ES3DV3 Probe>

|                      |                                                                                                                                                                                  |                                                                                    |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetric design with triangular core<br>Interleaved sensors<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz – 4 GHz;<br>Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)                                                                                                                      |                                                                                    |
| <b>Directivity</b>   | $\pm 0.2$ dB in TSL (rotation around probe axis)<br>$\pm 0.3$ dB in TSL (rotation normal to probe axis)                                                                          |                                                                                    |
| <b>Dynamic Range</b> | 5 $\mu$ W/g – >100 mW/g;<br>Linearity: $\pm 0.2$ dB                                                                                                                              |                                                                                    |
| <b>Dimensions</b>    | Overall length: 337 mm (tip: 20 mm)<br>Tip diameter: 3.9 mm (body: 12 mm)<br>Distance from probe tip to dipole centers: 3.0 mm                                                   |                                                                                    |


### <EX3DV4 Probe>

|                      |                                                                                                                                                           |                                                                                     |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetric design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz – >6 GHz<br>Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)                                                                                               |                                                                                     |
| <b>Directivity</b>   | $\pm 0.3$ dB in TSL (rotation around probe axis)<br>$\pm 0.5$ dB in TSL (rotation normal to probe axis)                                                   |                                                                                     |
| <b>Dynamic Range</b> | 10 $\mu$ W/g – >100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)                                                                       |                                                                                     |
| <b>Dimensions</b>    | Overall length: 337 mm (tip: 20 mm)<br>Tip diameter: 2.5 mm (body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                      |                                                                                     |

## 6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

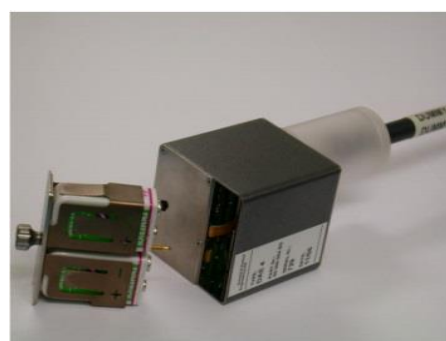

**Fig 5.1 Photo of DAE**

## 6.4 Phantom

### <SAM Twin Phantom>

|                          |                                                         |                                                                                    |
|--------------------------|---------------------------------------------------------|------------------------------------------------------------------------------------|
| <b>Shell Thickness</b>   | 2 ± 0.2 mm;<br>Center ear point: 6 ± 0.2 mm             |  |
| <b>Filling Volume</b>    | Approx. 25 liters                                       |                                                                                    |
| <b>Dimensions</b>        | Length: 1000 mm; Width: 500 mm; Height: adjustable feet |                                                                                    |
| <b>Measurement Areas</b> | Left Hand, Right Hand, Flat Phantom                     |                                                                                    |

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

### <ELI Phantom>

|                        |                                                  |                                                                                     |
|------------------------|--------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Shell Thickness</b> | 2 ± 0.2 mm (sagging: <1%)                        |  |
| <b>Filling Volume</b>  | Approx. 30 liters                                |                                                                                     |
| <b>Dimensions</b>      | Major ellipse axis: 600 mm<br>Minor axis: 400 mm |                                                                                     |

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.5 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

## **7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## **7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

|                                                                                                        | $\leq 3$ GHz                                                                                                                                                                                                                                                           | $> 3$ GHz                                              |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | $5 \pm 1$ mm                                                                                                                                                                                                                                                           | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm     |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | $30^\circ \pm 1^\circ$                                                                                                                                                                                                                                                 | $20^\circ \pm 1^\circ$                                 |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                            | $\leq 2$ GHz: $\leq 15$ mm<br>$2 - 3$ GHz: $\leq 12$ mm                                                                                                                                                                                                                | $3 - 4$ GHz: $\leq 12$ mm<br>$4 - 6$ GHz: $\leq 10$ mm |
|                                                                                                        | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                        |



## 7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

|                                                                                                                                                                                                                                                                                                             |                                           |                                                                                             | $\leq 3$ GHz                                         | $> 3$ GHz                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------|
| Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$                                                                                                                                                                                                                      |                                           |                                                                                             | $\leq 2$ GHz: $\leq 8$ mm<br>2 – 3 GHz: $\leq 5$ mm* | 3 – 4 GHz: $\leq 5$ mm*<br>4 – 6 GHz: $\leq 4$ mm*                            |
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                                                                                                                                                                             | uniform grid: $\Delta z_{\text{Zoom}}(n)$ |                                                                                             | $\leq 5$ mm                                          | 3 – 4 GHz: $\leq 4$ mm<br>4 – 5 GHz: $\leq 3$ mm<br>5 – 6 GHz: $\leq 2$ mm    |
|                                                                                                                                                                                                                                                                                                             | graded grid                               | $\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4$ mm                                          | 3 – 4 GHz: $\leq 3$ mm<br>4 – 5 GHz: $\leq 2.5$ mm<br>5 – 6 GHz: $\leq 2$ mm  |
|                                                                                                                                                                                                                                                                                                             |                                           | $\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$         |                                                                               |
| Minimum zoom scan volume                                                                                                                                                                                                                                                                                    | x, y, z                                   |                                                                                             | $\geq 30$ mm                                         | 3 – 4 GHz: $\geq 28$ mm<br>4 – 5 GHz: $\geq 25$ mm<br>5 – 6 GHz: $\geq 22$ mm |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.                                                                                                                                                           |                                           |                                                                                             |                                                      |                                                                               |
| * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                           |                                                                                             |                                                      |                                                                               |

## 7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## 7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

## 8. Test Equipment List

| Manufacturer  | Name of Equipment                            | Type/Model      | Serial Number | Calibration   |               |
|---------------|----------------------------------------------|-----------------|---------------|---------------|---------------|
|               |                                              |                 |               | Last Cal.     | Due Date      |
| SPEAG         | 750MHz System Validation Kit                 | D750V3          | 1012          | Aug. 18, 2021 | Aug. 17, 2022 |
| SPEAG         | 1750MHz System Validation Kit <sup>(2)</sup> | D1750V2         | 1112          | Mar. 07, 2019 | Mar. 04, 2022 |
| SPEAG         | 1900MHz System Validation Kit <sup>(2)</sup> | D1900V2         | 5d185         | Mar. 07, 2019 | Mar. 04, 2022 |
| SPEAG         | 2450MHz System Validation Kit <sup>(2)</sup> | D2450V2         | 929           | Nov. 21, 2019 | Nov. 18, 2022 |
| SPEAG         | Data Acquisition Electronics                 | DAE4            | 778           | May. 21, 2021 | May. 20, 2022 |
| SPEAG         | Data Acquisition Electronics                 | DAE4            | 853           | Jul. 14, 2021 | Jul. 13, 2022 |
| SPEAG         | Dosimetric E-Field Probe                     | EX3DV4          | 7350          | Dec. 20, 2021 | Dec. 19, 2022 |
| SPEAG         | Dosimetric E-Field Probe                     | EX3DV4          | 7590          | Mar. 25, 2021 | Mar. 24, 2022 |
| Testo         | Hygro meter                                  | 608-H1          | 45196600      | Oct. 22, 2021 | Oct. 21, 2022 |
| Testo         | Hygro meter                                  | 608-H1          | 45207528      | Oct. 22, 2021 | Oct. 21, 2022 |
| Anritsu       | Radio Communication Analyzer                 | MT8821C         | 6201341950    | Oct. 21, 2021 | Oct. 20, 2022 |
| SPEAG         | Device Holder                                | N/A             | N/A           | N/A           | N/A           |
| Anritsu       | Signal Generator                             | MG3710A         | 6201502524    | Oct. 24, 2021 | Oct. 23, 2022 |
| Keysight      | ENA Network Analyzer                         | E5071C          | MY46104758    | Sep. 07, 2021 | Sep. 06, 2022 |
| SPEAG         | Dielectric Probe Kit                         | DAK-3.5         | 1126          | Sep. 24, 2021 | Sep. 23, 2022 |
| LINE SEIKI    | Digital Thermometer                          | DTM3000-spezial | 2942          | Oct. 26, 2021 | Oct. 25, 2022 |
| Anritsu       | Power Meter                                  | ML2495A         | 1419002       | Aug. 18, 2021 | Aug. 17, 2022 |
| Anritsu       | Power Sensor                                 | MA2411B         | 1911176       | Aug. 18, 2021 | Aug. 17, 2022 |
| Anritsu       | Power Meter                                  | ML2495A         | 1804003       | Oct. 09, 2021 | Oct. 08, 2022 |
| Anritsu       | Power Sensor                                 | MA2411B         | 1726150       | Oct. 09, 2021 | Oct. 08, 2022 |
| Anritsu       | Spectrum Analyzer                            | MS2830A         | 6201396378    | Jul. 16, 2021 | Jul. 15, 2022 |
| Agilent       | Spectrum Analyzer                            | E4408B          | MY44211028    | Aug. 19, 2021 | Aug. 18, 2022 |
| Mini-Circuits | Power Amplifier                              | ZVE-8G+         | 6418          | Oct. 12, 2021 | Oct. 11, 2022 |
| Mini-Circuits | Power Amplifier                              | ZVE-8G+         | 479102029     | Sep. 06, 2021 | Sep. 05, 2022 |
| ATM           | Dual Directional Coupler                     | C122H-10        | P610410z-02   | Note 1        |               |
| Warison       | Directional Coupler                          | WCOU-10-50S-10  | WR889BMC4B1   | Note 1        |               |
| Woken         | Attenuator 1                                 | WK0602-XX       | N/A           | Note 1        |               |
| PE            | Attenuator 2                                 | PE7005-10       | N/A           | Note 1        |               |
| PE            | Attenuator 3                                 | PE7005- 3       | N/A           | Note 1        |               |

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.





## **10. LTE Output Power (Unit: dBm)**

### **<LTE Conducted Power>**

#### **General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



## &lt;LTE Band 2&gt;

| BW [MHz]        | Modulation | RB Size | RB Offset | Power Low<br>Ch. / Freq. | Power Middle<br>Ch. / Freq. | Power High<br>Ch. / Freq. | Tune-up limit<br>(dBm) |
|-----------------|------------|---------|-----------|--------------------------|-----------------------------|---------------------------|------------------------|
| Channel         |            |         |           | 18700                    | 18900                       | 19100                     |                        |
| Frequency (MHz) |            |         |           | 1860                     | 1880                        | 1900                      |                        |
| 20              | QPSK       | 1       | 0         | 21.80                    | 21.89                       | 21.62                     |                        |
| 20              | QPSK       | 1       | 49        | 21.64                    | 21.55                       | 21.82                     | 22                     |
| 20              | QPSK       | 1       | 99        | 21.59                    | 21.50                       | 21.77                     |                        |
| 20              | QPSK       | 50      | 0         | 20.69                    | 20.60                       | 20.87                     |                        |
| 20              | QPSK       | 50      | 24        | 20.62                    | 20.53                       | 20.87                     | 21                     |
| 20              | QPSK       | 50      | 50        | 20.53                    | 20.44                       | 20.71                     |                        |
| 20              | QPSK       | 100     | 0         | 20.67                    | 20.58                       | 20.85                     |                        |
| 20              | 16QAM      | 1       | 0         | 20.66                    | 20.57                       | 20.84                     | 21                     |
| 20              | 16QAM      | 1       | 49        | 20.59                    | 20.50                       | 20.77                     |                        |
| 20              | 16QAM      | 1       | 99        | 20.56                    | 20.47                       | 20.74                     |                        |
| 20              | 16QAM      | 12      | 0         | 20.82                    | 20.76                       | 20.62                     | 21                     |
| 20              | 16QAM      | 12      | 24        | 20.53                    | 20.61                       | 20.61                     |                        |
| 20              | 16QAM      | 12      | 50        | 20.63                    | 20.62                       | 20.50                     |                        |
| 20              | 16QAM      | 27      | 0         | 20.77                    | 20.98                       | 20.75                     | 21                     |
| Channel         |            |         |           | 18675                    | 18900                       | 19125                     | Tune-up limit<br>(dBm) |
| Frequency (MHz) |            |         |           | 1857.5                   | 1880                        | 1902.5                    |                        |
| 15              | QPSK       | 1       | 0         | 21.60                    | 21.78                       | 21.53                     |                        |
| 15              | QPSK       | 1       | 37        | 21.64                    | 21.46                       | 21.73                     | 22                     |
| 15              | QPSK       | 1       | 74        | 21.53                    | 21.36                       | 21.64                     |                        |
| 15              | QPSK       | 36      | 0         | 20.55                    | 20.41                       | 20.65                     |                        |
| 15              | QPSK       | 36      | 20        | 20.66                    | 20.56                       | 20.68                     | 21                     |
| 15              | QPSK       | 36      | 39        | 20.35                    | 20.25                       | 20.51                     |                        |
| 15              | QPSK       | 75      | 0         | 20.52                    | 20.42                       | 20.67                     |                        |
| 15              | 16QAM      | 1       | 0         | 20.48                    | 20.54                       | 20.80                     | 21                     |
| 15              | 16QAM      | 1       | 37        | 20.59                    | 20.39                       | 20.57                     |                        |
| 15              | 16QAM      | 1       | 74        | 20.55                    | 20.35                       | 20.58                     |                        |
| 15              | 16QAM      | 12      | 0         | 20.53                    | 20.60                       | 20.62                     | 21                     |
| 15              | 16QAM      | 12      | 20        | 20.44                    | 20.60                       | 20.61                     |                        |
| 15              | 16QAM      | 12      | 39        | 20.81                    | 20.75                       | 20.75                     |                        |
| 15              | 16QAM      | 27      | 0         | 20.80                    | 20.62                       | 20.65                     | 21                     |
| Channel         |            |         |           | 18650                    | 18900                       | 19150                     | Tune-up limit<br>(dBm) |
| Frequency (MHz) |            |         |           | 1855                     | 1880                        | 1905                      |                        |
| 10              | QPSK       | 1       | 0         | 21.46                    | 21.58                       | 21.39                     |                        |
| 10              | QPSK       | 1       | 25        | 21.80                    | 21.68                       | 21.87                     | 22                     |
| 10              | QPSK       | 1       | 49        | 21.64                    | 21.52                       | 21.71                     |                        |
| 10              | QPSK       | 25      | 0         | 20.65                    | 20.53                       | 20.72                     |                        |
| 10              | QPSK       | 25      | 12        | 20.67                    | 20.55                       | 20.74                     | 21                     |
| 10              | QPSK       | 25      | 25        | 20.71                    | 20.59                       | 20.78                     |                        |
| 10              | QPSK       | 50      | 0         | 20.63                    | 20.51                       | 20.70                     |                        |
| 10              | 16QAM      | 1       | 0         | 20.57                    | 20.45                       | 20.64                     | 21                     |
| 10              | 16QAM      | 1       | 25        | 20.85                    | 20.73                       | 20.90                     |                        |
| 10              | 16QAM      | 1       | 49        | 20.52                    | 20.40                       | 20.59                     |                        |
| 10              | 16QAM      | 12      | 0         | 19.68                    | 19.56                       | 19.75                     | 21                     |
| 10              | 16QAM      | 12      | 12        | 19.83                    | 19.71                       | 19.90                     |                        |
| 10              | 16QAM      | 12      | 25        | 19.75                    | 19.63                       | 19.82                     |                        |
| 10              | 16QAM      | 27      | 0         | 20.56                    | 20.57                       | 20.65                     | 21                     |
| Channel         |            |         |           | 18625                    | 18900                       | 19175                     | Tune-up limit<br>(dBm) |
| Frequency (MHz) |            |         |           | 1852.5                   | 1880                        | 1907.5                    |                        |
| 5               | QPSK       | 1       | 0         | 21.45                    | 21.39                       | 21.21                     |                        |
| 5               | QPSK       | 1       | 12        | 21.61                    | 21.59                       | 21.71                     | 22                     |
| 5               | QPSK       | 1       | 24        | 21.47                    | 21.39                       | 21.70                     |                        |



# FCC SAR TEST REPORT

Report No. : FA1D1704

|                 |       |    |    |        |       |        |                     |
|-----------------|-------|----|----|--------|-------|--------|---------------------|
| 5               | QPSK  | 12 | 0  | 20.46  | 20.37 | 20.61  | 21                  |
| 5               | QPSK  | 12 | 7  | 20.65  | 20.38 | 20.68  |                     |
| 5               | QPSK  | 12 | 13 | 20.68  | 20.42 | 20.66  |                     |
| 5               | QPSK  | 25 | 0  | 20.50  | 20.49 | 20.51  |                     |
| 5               | 16QAM | 1  | 0  | 20.43  | 20.42 | 20.50  | 21                  |
| 5               | 16QAM | 1  | 12 | 20.70  | 20.57 | 20.86  |                     |
| 5               | 16QAM | 1  | 24 | 20.35  | 20.37 | 20.51  |                     |
| 5               | 16QAM | 12 | 0  | 19.65  | 19.54 | 19.67  | 21                  |
| 5               | 16QAM | 12 | 7  | 19.67  | 19.66 | 19.83  |                     |
| 5               | 16QAM | 12 | 13 | 19.65  | 19.50 | 19.81  |                     |
| 5               | 16QAM | 25 | 0  | 19.84  | 19.91 | 19.93  |                     |
| Channel         |       |    |    | 18615  | 18900 | 19185  | Tune-up limit (dBm) |
| Frequency (MHz) |       |    |    | 1851.5 | 1880  | 1908.5 |                     |
| 3               | QPSK  | 1  | 0  | 21.36  | 21.58 | 21.25  | 22                  |
| 3               | QPSK  | 1  | 8  | 21.64  | 21.57 | 21.69  |                     |
| 3               | QPSK  | 1  | 14 | 21.57  | 21.46 | 21.65  |                     |
| 3               | QPSK  | 8  | 0  | 20.63  | 20.49 | 20.53  | 21                  |
| 3               | QPSK  | 8  | 4  | 20.65  | 20.55 | 20.54  |                     |
| 3               | QPSK  | 8  | 7  | 20.69  | 20.52 | 20.73  |                     |
| 3               | QPSK  | 15 | 0  | 20.60  | 20.45 | 20.69  |                     |
| 3               | 16QAM | 1  | 0  | 20.46  | 20.43 | 20.48  | 21                  |
| 3               | 16QAM | 1  | 8  | 20.72  | 20.68 | 20.79  |                     |
| 3               | 16QAM | 1  | 14 | 20.37  | 20.37 | 20.59  |                     |
| 3               | 16QAM | 8  | 0  | 19.55  | 19.53 | 19.67  | 21                  |
| 3               | 16QAM | 8  | 4  | 19.68  | 19.70 | 19.71  |                     |
| 3               | 16QAM | 8  | 7  | 19.67  | 19.52 | 19.62  |                     |
| 3               | 16QAM | 15 | 0  | 19.68  | 19.79 | 19.89  |                     |
| Channel         |       |    |    | 18607  | 18900 | 19193  | Tune-up limit (dBm) |
| Frequency (MHz) |       |    |    | 1850.7 | 1880  | 1909.3 |                     |
| 1.4             | QPSK  | 1  | 0  | 21.30  | 21.52 | 21.31  | 22                  |
| 1.4             | QPSK  | 1  | 3  | 21.77  | 21.65 | 21.74  |                     |
| 1.4             | QPSK  | 1  | 5  | 21.53  | 21.45 | 21.51  |                     |
| 1.4             | QPSK  | 3  | 0  | 21.43  | 21.50 | 21.32  |                     |
| 1.4             | QPSK  | 3  | 1  | 21.76  | 21.67 | 21.82  |                     |
| 1.4             | QPSK  | 3  | 3  | 21.46  | 21.38 | 21.63  |                     |
| 1.4             | QPSK  | 6  | 0  | 20.44  | 20.36 | 20.54  | 21                  |
| 1.4             | 16QAM | 1  | 0  | 20.40  | 20.40 | 20.47  | 21                  |
| 1.4             | 16QAM | 1  | 3  | 20.73  | 20.64 | 20.92  |                     |
| 1.4             | 16QAM | 1  | 5  | 20.36  | 20.24 | 20.55  |                     |
| 1.4             | 16QAM | 3  | 0  | 20.52  | 20.26 | 20.52  |                     |
| 1.4             | 16QAM | 3  | 1  | 20.67  | 20.60 | 20.83  |                     |
| 1.4             | 16QAM | 3  | 3  | 20.33  | 20.22 | 20.43  |                     |
| 1.4             | 16QAM | 6  | 0  | 19.84  | 19.51 | 19.91  | 21                  |



## &lt;LTE Band 4&gt;

| BW [MHz]        | Modulation | RB Size | RB Offset | Power Low<br>Ch. / Freq. | Power Middle<br>Ch. / Freq. | Power High<br>Ch. / Freq. | Tune-up limit<br>(dBm) |
|-----------------|------------|---------|-----------|--------------------------|-----------------------------|---------------------------|------------------------|
| Channel         |            |         |           | 20050                    | 20175                       | 20300                     |                        |
| Frequency (MHz) |            |         |           | 1720                     | 1732.5                      | 1745                      |                        |
| 20              | QPSK       | 1       | 0         | 22.51                    | 22.72                       | 22.75                     |                        |
| 20              | QPSK       | 1       | 49        | 22.47                    | 22.45                       | 22.36                     | 23                     |
| 20              | QPSK       | 1       | 99        | 22.19                    | 22.18                       | 22.06                     |                        |
| 20              | QPSK       | 50      | 0         | 21.30                    | 21.19                       | 20.96                     |                        |
| 20              | QPSK       | 50      | 24        | 21.13                    | 21.06                       | 20.92                     | 22                     |
| 20              | QPSK       | 50      | 50        | 21.11                    | 20.96                       | 20.93                     |                        |
| 20              | QPSK       | 100     | 0         | 21.08                    | 21.05                       | 21.01                     |                        |
| 20              | 16QAM      | 1       | 0         | 21.45                    | 21.28                       | 21.24                     | 22                     |
| 20              | 16QAM      | 1       | 49        | 21.22                    | 21.12                       | 20.97                     |                        |
| 20              | 16QAM      | 1       | 99        | 20.96                    | 20.91                       | 20.79                     |                        |
| 20              | 16QAM      | 12      | 0         | 21.12                    | 21.33                       | 21.33                     | 22                     |
| 20              | 16QAM      | 12      | 24        | 20.95                    | 20.76                       | 20.78                     |                        |
| 20              | 16QAM      | 12      | 50        | 20.94                    | 20.94                       | 20.82                     |                        |
| 20              | 16QAM      | 27      | 0         | 20.81                    | 20.81                       | 20.81                     | 21                     |
| Channel         |            |         |           | 20025                    | 20175                       | 20325                     | Tune-up limit<br>(dBm) |
| Frequency (MHz) |            |         |           | 1717.5                   | 1732.5                      | 1747.5                    |                        |
| 15              | QPSK       | 1       | 0         | 22.35                    | 22.66                       | 22.62                     |                        |
| 15              | QPSK       | 1       | 37        | 22.42                    | 22.33                       | 22.29                     | 23                     |
| 15              | QPSK       | 1       | 74        | 22.02                    | 22.10                       | 21.96                     |                        |
| 15              | QPSK       | 36      | 0         | 21.15                    | 21.07                       | 20.89                     |                        |
| 15              | QPSK       | 36      | 20        | 20.99                    | 20.96                       | 20.84                     | 22                     |
| 15              | QPSK       | 36      | 39        | 21.05                    | 20.83                       | 20.76                     |                        |
| 15              | QPSK       | 75      | 0         | 20.96                    | 21.00                       | 20.86                     |                        |
| 15              | 16QAM      | 1       | 0         | 21.37                    | 21.17                       | 21.08                     | 22                     |
| 15              | 16QAM      | 1       | 37        | 21.19                    | 21.06                       | 20.89                     |                        |
| 15              | 16QAM      | 1       | 74        | 20.89                    | 20.81                       | 20.72                     |                        |
| 15              | 16QAM      | 12      | 0         | 21.17                    | 21.17                       | 21.27                     | 22                     |
| 15              | 16QAM      | 12      | 20        | 20.99                    | 20.98                       | 20.98                     |                        |
| 15              | 16QAM      | 12      | 39        | 20.90                    | 20.81                       | 20.89                     |                        |
| 15              | 16QAM      | 27      | 0         | 20.89                    | 20.90                       | 20.77                     | 21                     |
| Channel         |            |         |           | 20000                    | 20175                       | 20350                     | Tune-up limit<br>(dBm) |
| Frequency (MHz) |            |         |           | 1715                     | 1732.5                      | 1750                      |                        |
| 10              | QPSK       | 1       | 0         | 22.49                    | 22.36                       | 22.59                     |                        |
| 10              | QPSK       | 1       | 25        | 22.30                    | 22.49                       | 22.24                     | 23                     |
| 10              | QPSK       | 1       | 49        | 22.19                    | 22.42                       | 22.06                     |                        |
| 10              | QPSK       | 25      | 0         | 20.97                    | 21.25                       | 20.87                     |                        |
| 10              | QPSK       | 25      | 12        | 20.91                    | 21.23                       | 20.85                     | 22                     |
| 10              | QPSK       | 25      | 25        | 20.87                    | 21.20                       | 20.85                     |                        |
| 10              | QPSK       | 50      | 0         | 21.25                    | 21.10                       | 21.19                     |                        |
| 10              | 16QAM      | 1       | 0         | 20.94                    | 21.22                       | 20.89                     | 22                     |
| 10              | 16QAM      | 1       | 25        | 21.13                    | 21.42                       | 21.01                     |                        |
| 10              | 16QAM      | 1       | 49        | 20.77                    | 21.10                       | 20.78                     |                        |
| 10              | 16QAM      | 12      | 0         | 19.85                    | 20.13                       | 19.80                     | 21                     |
| 10              | 16QAM      | 12      | 12        | 19.86                    | 20.11                       | 19.85                     |                        |
| 10              | 16QAM      | 12      | 25        | 20.06                    | 20.20                       | 19.80                     |                        |
| 10              | 16QAM      | 27      | 0         | 21.31                    | 20.98                       | 21.15                     | 21                     |
| Channel         |            |         |           | 19975                    | 20175                       | 20375                     | Tune-up limit<br>(dBm) |
| Frequency (MHz) |            |         |           | 1712.5                   | 1732.5                      | 1752.5                    |                        |
| 5               | QPSK       | 1       | 0         | 22.43                    | 22.20                       | 22.48                     |                        |
| 5               | QPSK       | 1       | 12        | 22.12                    | 22.47                       | 22.07                     | 23                     |
| 5               | QPSK       | 1       | 24        | 22.08                    | 22.41                       | 21.97                     |                        |

|                 |       |    |    |        |        |        |                        |
|-----------------|-------|----|----|--------|--------|--------|------------------------|
| 5               | QPSK  | 12 | 0  | 20.86  | 21.21  | 20.71  | 22                     |
| 5               | QPSK  | 12 | 7  | 20.71  | 21.15  | 20.74  |                        |
| 5               | QPSK  | 12 | 13 | 20.87  | 21.12  | 20.74  |                        |
| 5               | QPSK  | 25 | 0  | 21.17  | 20.97  | 21.10  |                        |
| 5               | 16QAM | 1  | 0  | 20.77  | 21.06  | 20.79  | 22                     |
| 5               | 16QAM | 1  | 12 | 21.06  | 21.38  | 20.82  |                        |
| 5               | 16QAM | 1  | 24 | 20.57  | 21.06  | 20.58  |                        |
| 5               | 16QAM | 12 | 0  | 19.75  | 20.13  | 19.60  | 21                     |
| 5               | 16QAM | 12 | 7  | 19.70  | 20.03  | 19.70  |                        |
| 5               | 16QAM | 12 | 13 | 19.93  | 20.18  | 19.71  |                        |
| 5               | 16QAM | 25 | 0  | 19.89  | 20.01  | 19.92  |                        |
| Channel         |       |    |    | 19965  | 20175  | 20385  | Tune-up limit<br>(dBm) |
| Frequency (MHz) |       |    |    | 1711.5 | 1732.5 | 1753.5 |                        |
| 3               | QPSK  | 1  | 0  | 22.28  | 22.05  | 22.44  | 23                     |
| 3               | QPSK  | 1  | 8  | 21.98  | 22.29  | 21.97  |                        |
| 3               | QPSK  | 1  | 14 | 21.95  | 22.35  | 21.85  |                        |
| 3               | QPSK  | 8  | 0  | 20.76  | 21.03  | 20.51  | 22                     |
| 3               | QPSK  | 8  | 4  | 20.57  | 21.01  | 20.58  |                        |
| 3               | QPSK  | 8  | 7  | 20.74  | 21.06  | 20.66  |                        |
| 3               | QPSK  | 15 | 0  | 21.11  | 20.89  | 20.98  |                        |
| 3               | 16QAM | 1  | 0  | 20.68  | 20.98  | 20.79  | 22                     |
| 3               | 16QAM | 1  | 8  | 20.95  | 21.37  | 20.73  |                        |
| 3               | 16QAM | 1  | 14 | 20.41  | 21.05  | 20.47  |                        |
| 3               | 16QAM | 8  | 0  | 19.60  | 20.00  | 19.54  | 21                     |
| 3               | 16QAM | 8  | 4  | 19.52  | 19.87  | 19.51  |                        |
| 3               | 16QAM | 8  | 7  | 19.88  | 20.09  | 19.68  |                        |
| 3               | 16QAM | 15 | 0  | 20.06  | 20.29  | 19.99  |                        |
| Channel         |       |    |    | 19957  | 20175  | 20393  | Tune-up limit<br>(dBm) |
| Frequency (MHz) |       |    |    | 1710.7 | 1732.5 | 1754.3 |                        |
| 1.4             | QPSK  | 1  | 0  | 22.42  | 22.10  | 22.32  | 23                     |
| 1.4             | QPSK  | 1  | 3  | 22.09  | 22.35  | 21.94  |                        |
| 1.4             | QPSK  | 1  | 5  | 22.04  | 22.37  | 21.78  |                        |
| 1.4             | QPSK  | 3  | 0  | 22.41  | 22.05  | 22.47  |                        |
| 1.4             | QPSK  | 3  | 1  | 22.06  | 22.32  | 22.02  |                        |
| 1.4             | QPSK  | 3  | 3  | 22.01  | 22.40  | 21.96  |                        |
| 1.4             | QPSK  | 6  | 0  | 21.07  | 20.86  | 20.98  | 22                     |
| 1.4             | 16QAM | 1  | 0  | 20.76  | 21.03  | 20.69  | 22                     |
| 1.4             | 16QAM | 1  | 3  | 20.88  | 20.87  | 20.66  |                        |
| 1.4             | 16QAM | 1  | 5  | 21.03  | 21.05  | 20.92  |                        |
| 1.4             | 16QAM | 3  | 0  | 20.71  | 20.89  | 20.63  |                        |
| 1.4             | 16QAM | 3  | 1  | 20.94  | 21.20  | 20.69  |                        |
| 1.4             | 16QAM | 3  | 3  | 20.40  | 20.99  | 20.47  |                        |
| 1.4             | 16QAM | 6  | 0  | 19.70  | 20.13  | 19.83  | 21                     |

**<LTE Band 12>**

| BW [MHz]        | Modulation | RB Size | RB Offset | Power Low<br>Ch. / Freq. | Power Middle<br>Ch. / Freq. | Power High<br>Ch. / Freq. | Tune-up limit<br>(dBm) |
|-----------------|------------|---------|-----------|--------------------------|-----------------------------|---------------------------|------------------------|
| Channel         |            |         |           | 23060                    | 23095                       | 23130                     |                        |
| Frequency (MHz) |            |         |           | 704                      | 707.5                       | 711                       |                        |
| 10              | QPSK       | 1       | 0         | 23.14                    | 23.08                       | 23.35                     |                        |
| 10              | QPSK       | 1       | 25        | 22.97                    | 23.14                       | 22.70                     | 24                     |
| 10              | QPSK       | 1       | 49        | 22.74                    | 22.93                       | 22.53                     |                        |
| 10              | QPSK       | 25      | 0         | 22.06                    | 22.18                       | 21.81                     |                        |
| 10              | QPSK       | 25      | 12        | 21.86                    | 22.03                       | 21.64                     | 23                     |
| 10              | QPSK       | 25      | 25        | 21.94                    | 22.12                       | 21.74                     |                        |
| 10              | QPSK       | 50      | 0         | 21.99                    | 22.20                       | 21.73                     |                        |
| 10              | 16QAM      | 1       | 0         | 21.60                    | 21.85                       | 21.48                     | 23                     |
| 10              | 16QAM      | 1       | 25        | 22.12                    | 22.32                       | 22.02                     |                        |
| 10              | 16QAM      | 1       | 49        | 21.72                    | 21.91                       | 21.56                     |                        |
| 10              | 16QAM      | 12      | 0         | 20.95                    | 21.03                       | 20.69                     | 22                     |
| 10              | 16QAM      | 12      | 12        | 20.93                    | 21.13                       | 20.85                     |                        |
| 10              | 16QAM      | 12      | 25        | 20.94                    | 21.08                       | 20.68                     |                        |
| 10              | 16QAM      | 27      | 0         | 21.42                    | 21.56                       | 21.63                     |                        |
| Channel         |            |         |           | 23035                    | 23095                       | 23155                     | Tune-up limit<br>(dBm) |
| Frequency (MHz) |            |         |           | 701.5                    | 707.5                       | 713.5                     |                        |
| 5               | QPSK       | 1       | 0         | 23.07                    | 22.91                       | 23.25                     |                        |
| 5               | QPSK       | 1       | 12        | 22.81                    | 22.94                       | 22.64                     | 24                     |
| 5               | QPSK       | 1       | 24        | 22.74                    | 22.85                       | 22.52                     |                        |
| 5               | QPSK       | 12      | 0         | 21.86                    | 21.90                       | 21.43                     |                        |
| 5               | QPSK       | 12      | 7         | 21.98                    | 22.15                       | 21.68                     | 23                     |
| 5               | QPSK       | 12      | 13        | 21.75                    | 21.92                       | 21.66                     |                        |
| 5               | QPSK       | 25      | 0         | 21.82                    | 22.17                       | 21.60                     |                        |
| 5               | 16QAM      | 1       | 0         | 21.40                    | 21.82                       | 21.31                     | 23                     |
| 5               | 16QAM      | 1       | 12        | 21.97                    | 22.25                       | 21.90                     |                        |
| 5               | 16QAM      | 1       | 24        | 21.66                    | 21.71                       | 21.44                     |                        |
| 5               | 16QAM      | 12      | 0         | 20.89                    | 20.88                       | 20.49                     | 22                     |
| 5               | 16QAM      | 12      | 7         | 20.93                    | 21.02                       | 20.66                     |                        |
| 5               | 16QAM      | 12      | 13        | 20.83                    | 21.01                       | 20.53                     |                        |
| 5               | 16QAM      | 25      | 0         | 21.02                    | 21.09                       | 20.71                     |                        |
| Channel         |            |         |           | 23025                    | 23095                       | 23165                     | Tune-up limit<br>(dBm) |
| Frequency (MHz) |            |         |           | 700.5                    | 707.5                       | 714.5                     |                        |
| 3               | QPSK       | 1       | 0         | 23.09                    | 23.03                       | 23.22                     |                        |
| 3               | QPSK       | 1       | 8         | 22.86                    | 23.06                       | 22.58                     | 24                     |
| 3               | QPSK       | 1       | 14        | 22.63                    | 22.88                       | 22.46                     |                        |
| 3               | QPSK       | 8       | 0         | 21.88                    | 22.01                       | 21.45                     |                        |
| 3               | QPSK       | 8       | 4         | 22.03                    | 22.02                       | 21.70                     | 23                     |
| 3               | QPSK       | 8       | 7         | 21.77                    | 22.11                       | 21.56                     |                        |
| 3               | QPSK       | 15      | 0         | 21.93                    | 22.16                       | 21.69                     |                        |
| 3               | 16QAM      | 1       | 0         | 21.54                    | 21.83                       | 21.41                     | 23                     |
| 3               | 16QAM      | 1       | 8         | 22.08                    | 22.16                       | 21.99                     |                        |
| 3               | 16QAM      | 1       | 14        | 21.53                    | 21.83                       | 21.39                     |                        |
| 3               | 16QAM      | 8       | 0         | 20.82                    | 21.01                       | 20.57                     | 22                     |
| 3               | 16QAM      | 8       | 4         | 20.90                    | 21.06                       | 20.81                     |                        |
| 3               | 16QAM      | 8       | 7         | 20.74                    | 20.93                       | 20.56                     |                        |
| 3               | 16QAM      | 15      | 0         | 20.95                    | 21.20                       | 20.75                     |                        |
| Channel         |            |         |           | 23017                    | 23095                       | 23173                     | Tune-up limit<br>(dBm) |
| Frequency (MHz) |            |         |           | 699.7                    | 707.5                       | 715.3                     |                        |
| 1.4             | QPSK       | 1       | 0         | 22.96                    | 22.89                       | 23.28                     |                        |
| 1.4             | QPSK       | 1       | 3         | 22.80                    | 23.01                       | 22.64                     | 24                     |
| 1.4             | QPSK       | 1       | 5         | 22.71                    | 22.91                       | 22.33                     |                        |



# FCC SAR TEST REPORT

Report No. : FA1D1704

|     |       |   |   |       |       |       |    |
|-----|-------|---|---|-------|-------|-------|----|
| 1.4 | QPSK  | 3 | 0 | 23.06 | 22.95 | 23.28 |    |
| 1.4 | QPSK  | 3 | 1 | 22.83 | 23.04 | 22.69 |    |
| 1.4 | QPSK  | 3 | 3 | 22.59 | 22.90 | 22.43 |    |
| 1.4 | QPSK  | 6 | 0 | 21.90 | 22.20 | 21.56 | 23 |
| 1.4 | 16QAM | 1 | 0 | 21.46 | 21.74 | 21.46 | 23 |
| 1.4 | 16QAM | 1 | 3 | 21.99 | 22.25 | 21.92 |    |
| 1.4 | 16QAM | 1 | 5 | 21.54 | 21.90 | 21.43 |    |
| 1.4 | 16QAM | 3 | 0 | 21.52 | 21.68 | 21.33 |    |
| 1.4 | 16QAM | 3 | 1 | 22.04 | 22.14 | 22.00 |    |
| 1.4 | 16QAM | 3 | 3 | 21.71 | 21.89 | 21.48 | 22 |
| 1.4 | 16QAM | 6 | 0 | 20.79 | 20.86 | 20.49 |    |



## **11. 2.4GHz WiFi Output Power (Unit: dBm)**


### **General Note:**

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11g/n mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

### **<2.4GHz WLAN>**

|             | Mode              | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|-------------|-------------------|---------|-----------------|---------------------|---------------|--------------|
| 2.4GHz WLAN | 802.11b 1Mbps     | 1       | 2412            | 5.80                | 6.00          | 99.00        |
|             |                   | 6       | 2437            | 5.80                | 6.00          |              |
|             |                   | 11      | 2462            | 5.90                | 6.00          |              |
|             | 802.11g 6Mbps     | 1       | 2412            | not required        | 0.00          | not required |
|             |                   | 6       | 2437            |                     | 0.00          |              |
|             |                   | 11      | 2462            |                     | 0.00          |              |
|             | 802.11n-HT20 MCS0 | 1       | 2412            |                     | 0.00          |              |
|             |                   | 6       | 2437            |                     | 0.00          |              |
|             |                   | 11      | 2462            |                     | 0.00          |              |

## 12. Antenna Location

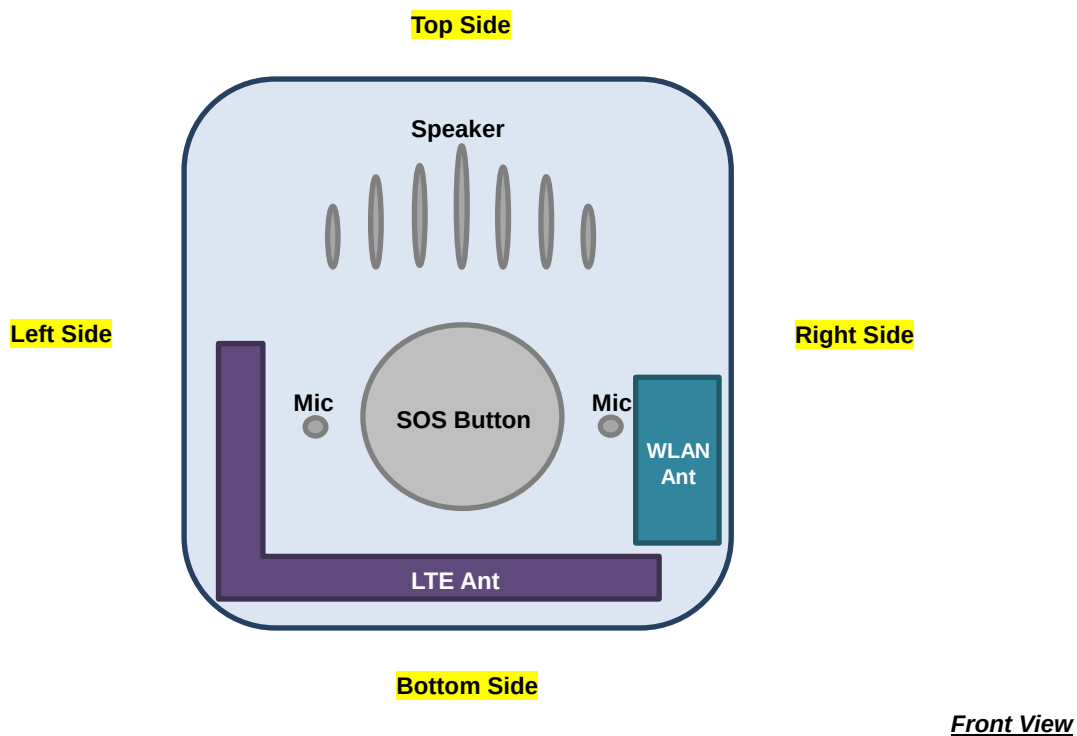

### 13. SAR Test Results

**General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN Head and Extremity condition: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WWAN Body-worn condition: Reported SAR(W/kg)= Measured SAR(W/kg) \* Tune-up Scaling Factor \* Transmission Scaling Factor
  - e. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. According to the SAR analysis exhibit, LTE B2/B4/B12 maximum tune-up power scaled down with the transmission factor is applied in body-worn reported SAR calculation.

#### 13.1 Head SAR

##### <FDD LTE SAR>

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB offset | Test Position | Gap (mm) | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|-------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| 01       | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Front         | 10mm     | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | 0.07             | 0.927                  | 0.951                  |
|          | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Front         | 10mm     | 18700 | 1860        | 21.80               | 22.00               | 1.047                  | -0.02            | 1.050                  | 1.099                  |
|          | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Front         | 10mm     | 19100 | 1900        | 21.62               | 22.00               | 1.091                  | -0.06            | 0.705                  | 0.769                  |
|          | LTE Band 2  | 20M      | QPSK       | 50      | 0         | Front         | 10mm     | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | 0.07             | 0.593                  | 0.611                  |
|          | LTE Band 2  | 20M      | QPSK       | 50      | 0         | Front         | 10mm     | 18700 | 1860        | 20.69               | 21.00               | 1.074                  | 0.08             | 0.713                  | 0.766                  |
|          | LTE Band 2  | 20M      | QPSK       | 50      | 0         | Front         | 10mm     | 18900 | 1880        | 20.60               | 21.00               | 1.096                  | 0.04             | 0.689                  | 0.755                  |
|          | LTE Band 2  | 20M      | QPSK       | 100     | 0         | Front         | 10mm     | 19100 | 1900        | 20.85               | 21.00               | 1.035                  | -0.01            | 0.590                  | 0.611                  |
|          | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Bottom Side   | 10mm     | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | -0.05            | 0.079                  | 0.081                  |
| 02       | LTE Band 2  | 20M      | QPSK       | 50      | 0         | Bottom Side   | 10mm     | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | -0.11            | 0.062                  | 0.064                  |
|          | LTE Band 4  | 20M      | QPSK       | 1       | 0         | Front         | 10mm     | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | -0.09            | 0.461                  | 0.492                  |
|          | LTE Band 4  | 20M      | QPSK       | 50      | 0         | Front         | 10mm     | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | 0.04             | 0.324                  | 0.390                  |
|          | LTE Band 4  | 20M      | QPSK       | 1       | 0         | Bottom Side   | 10mm     | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | -0.13            | 0.083                  | 0.089                  |
| 03       | LTE Band 4  | 20M      | QPSK       | 50      | 0         | Bottom Side   | 10mm     | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | 0.02             | 0.058                  | 0.070                  |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Front         | 10mm     | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | -0.16            | 0.267                  | 0.330                  |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Front         | 10mm     | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | 0.01             | 0.205                  | 0.248                  |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Bottom Side   | 10mm     | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 0.09             | 0.001                  | 0.001                  |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Bottom Side   | 10mm     | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | 0.14             | 0.001                  | 0.001                  |

##### <WLAN SAR>

| Plot No. | Band       | Mode          | Test Position | Gap (mm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|---------------|---------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| 04       | WLAN2.4GHz | 802.11b 1Mbps | Front         | 10mm     | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99.00        | 1.010                     | -0.17            | 0.029                  | 0.030                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Front         | 10mm     | 1   | 2412        | 5.80                | 6.00                | 1.047                  | 99.00        | 1.010                     | -0.14            | 0.018                  | 0.019                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Front         | 10mm     | 6   | 2437        | 5.80                | 6.00                | 1.047                  | 99.00        | 1.010                     | -0.05            | 0.021                  | 0.022                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom Side   | 10mm     | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99.00        | 1.010                     | -0.09            | 0.001                  | 0.001                  |

**13.2 Body Worn Accessory SAR****<FDD LTE SAR>**

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB offset | Test Position | Gap (mm) | Accessory | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Transmission Cycle % | Transmission Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|-----------|-------|-------------|---------------------|---------------------|------------------------|----------------------|-----------------------------|------------------|------------------------|------------------------|
|          | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | -         | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | 8.1                  | 0.081                       | 0.04             | 6.150                  | 0.511                  |
|          | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | -         | 19100 | 1900        | 21.62               | 22.00               | 1.091                  | 8.1                  | 0.081                       | 0.02             | 5.820                  | 0.515                  |
| 05       | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | -         | 18700 | 1860        | 21.80               | 22.00               | 1.047                  | 8.1                  | 0.081                       | 0.03             | 6.810                  | 0.578                  |
|          | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | Clip      | 18700 | 1860        | 21.80               | 22.00               | 1.047                  | 8.1                  | 0.081                       | 0.06             | 6.690                  | 0.567                  |
|          | LTE Band 2  | 20M      | QPSK       | 50      | 0         | Front         | 0mm      | -         | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | 8.1                  | 0.081                       | 0.03             | 4.900                  | 0.409                  |
|          | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Back          | 0mm      | -         | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | 8.1                  | 0.081                       | 0.07             | 2.440                  | 0.203                  |
|          | LTE Band 2  | 20M      | QPSK       | 50      | 0         | Back          | 0mm      | -         | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | 8.1                  | 0.081                       | -0.04            | 1.930                  | 0.161                  |
|          | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Left Side     | 0mm      | -         | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | 8.1                  | 0.081                       | -0.08            | 0.728                  | 0.060                  |
|          | LTE Band 2  | 20M      | QPSK       | 50      | 0         | Left Side     | 0mm      | -         | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | 8.1                  | 0.081                       | -0.02            | 0.576                  | 0.048                  |
|          | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Right Side    | 0mm      | -         | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | 8.1                  | 0.081                       | -0.08            | 2.300                  | 0.191                  |
|          | LTE Band 2  | 20M      | QPSK       | 50      | 0         | Right Side    | 0mm      | -         | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | 8.1                  | 0.081                       | 0.15             | 1.820                  | 0.152                  |
|          | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Top Side      | 0mm      | -         | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | 8.1                  | 0.081                       | -0.1             | 3.510                  | 0.292                  |
|          | LTE Band 2  | 20M      | QPSK       | 50      | 0         | Top Side      | 0mm      | -         | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | 8.1                  | 0.081                       | 0.03             | 2.780                  | 0.232                  |
|          | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Bottom Side   | 0mm      | -         | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | 8.1                  | 0.081                       | 0.07             | 0.288                  | 0.024                  |
|          | LTE Band 2  | 20M      | QPSK       | 50      | 0         | Bottom Side   | 0mm      | -         | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | 8.1                  | 0.081                       | -0.03            | 0.228                  | 0.019                  |
| 06       | LTE Band 4  | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | -         | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 8.1                  | 0.081                       | 0.1              | 4.600                  | 0.397                  |
|          | LTE Band 4  | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | Clip      | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 8.1                  | 0.081                       | -0.09            | 4.020                  | 0.347                  |
|          | LTE Band 4  | 20M      | QPSK       | 50      | 0         | Front         | 0mm      | -         | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | 8.1                  | 0.081                       | 0.08             | 4.050                  | 0.395                  |
|          | LTE Band 4  | 20M      | QPSK       | 1       | 0         | Back          | 0mm      | -         | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 8.1                  | 0.081                       | 0.03             | 1.230                  | 0.106                  |
|          | LTE Band 4  | 20M      | QPSK       | 50      | 0         | Back          | 0mm      | -         | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | 8.1                  | 0.081                       | -0.01            | 1.090                  | 0.106                  |
|          | LTE Band 4  | 20M      | QPSK       | 1       | 0         | Left Side     | 0mm      | -         | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 8.1                  | 0.081                       | 0.08             | 0.446                  | 0.039                  |
|          | LTE Band 4  | 20M      | QPSK       | 50      | 0         | Left Side     | 0mm      | -         | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | 8.1                  | 0.081                       | -0.03            | 0.395                  | 0.039                  |
|          | LTE Band 4  | 20M      | QPSK       | 1       | 0         | Right Side    | 0mm      | -         | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 8.1                  | 0.081                       | -0.07            | 2.920                  | 0.252                  |
|          | LTE Band 4  | 20M      | QPSK       | 50      | 0         | Right Side    | 0mm      | -         | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | 8.1                  | 0.081                       | -0.11            | 2.590                  | 0.253                  |
|          | LTE Band 4  | 20M      | QPSK       | 1       | 0         | Top Side      | 0mm      | -         | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 8.1                  | 0.081                       | 0.09             | 3.420                  | 0.295                  |
|          | LTE Band 4  | 20M      | QPSK       | 50      | 0         | Top Side      | 0mm      | -         | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | 8.1                  | 0.081                       | 0.04             | 3.030                  | 0.296                  |
|          | LTE Band 4  | 20M      | QPSK       | 1       | 0         | Bottom Side   | 0mm      | -         | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 8.1                  | 0.081                       | -0.19            | 0.274                  | 0.024                  |
|          | LTE Band 4  | 20M      | QPSK       | 50      | 0         | Bottom Side   | 0mm      | -         | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | 8.1                  | 0.081                       | 0.05             | 0.243                  | 0.024                  |
| 07       | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Front         | 0mm      | -         | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 8.1                  | 0.081                       | -0.12            | 4.370                  | 0.437                  |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Front         | 0mm      | Clip      | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 8.1                  | 0.081                       | 0.03             | 4.280                  | 0.428                  |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Front         | 0mm      | -         | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | 8.1                  | 0.081                       | 0.04             | 3.570                  | 0.349                  |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Back          | 0mm      | -         | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 8.1                  | 0.081                       | -0.14            | 0.505                  | 0.051                  |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Back          | 0mm      | -         | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | 8.1                  | 0.081                       | 0.05             | 0.412                  | 0.040                  |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Left Side     | 0mm      | -         | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 8.1                  | 0.081                       | -0.08            | 0.337                  | 0.034                  |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Left Side     | 0mm      | -         | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | 8.1                  | 0.081                       | -0.11            | 0.275                  | 0.027                  |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Right Side    | 0mm      | -         | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 8.1                  | 0.081                       | 0.08             | 2.290                  | 0.229                  |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Right Side    | 0mm      | -         | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | 8.1                  | 0.081                       | 0.01             | 1.870                  | 0.183                  |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Top Side      | 0mm      | -         | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 8.1                  | 0.081                       | -0.13            | 3.800                  | 0.380                  |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Top Side      | 0mm      | -         | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | 8.1                  | 0.081                       | 0.02             | 3.100                  | 0.303                  |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Bottom Side   | 0mm      | -         | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 8.1                  | 0.081                       | 0                | 0.233                  | 0.023                  |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Bottom Side   | 0mm      | -         | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | 8.1                  | 0.081                       | -0.03            | 0.190                  | 0.019                  |

**<WLAN SAR>**

| Plot No. | Band       | Mode          | Test Position | Gap (mm) | Accessory | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|---------------|---------------|----------|-----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
|          | WLAN2.4GHz | 802.11b 1Mbps | Front         | 0mm      | -         | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | -0.17            | 0.084                  | 0.087                  |
| 08       | WLAN2.4GHz | 802.11b 1Mbps | Front         | 0mm      | -         | 1   | 2412        | 5.80                | 6.00                | 1.047                  | 99           | 1.010                     | -0.16            | 0.115                  | 0.122                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Front         | 0mm      | Clip      | 1   | 2412        | 5.80                | 6.00                | 1.047                  | 99           | 1.010                     | 0.08             | 0.110                  | 0.116                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Front         | 0mm      | -         | 6   | 2437        | 5.80                | 6.00                | 1.047                  | 99           | 1.010                     | -0.06            | 0.068                  | 0.072                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Back          | 0mm      | -         | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | -0.07            | 0.057                  | 0.059                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Left Side     | 0mm      | -         | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | -0.01            | 0.074                  | 0.076                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Right Side    | 0mm      | -         | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | 0.11             | 0.001                  | 0.001                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Top Side      | 0mm      | -         | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | -0.07            | 0.046                  | 0.048                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom Side   | 0mm      | -         | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | -0.15            | 0.001                  | 0.001                  |

**13.3 Extremity SAR**
**<FDD LTE SAR>**

| Plot No. | Band       | BW (MHz) | Modulation | RB Size | RB offset | Test Position | Gap (mm) | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 10g SAR (W/kg) | Reported 10g SAR (W/kg) |
|----------|------------|----------|------------|---------|-----------|---------------|----------|-------|-------------|---------------------|---------------------|------------------------|------------------|-------------------------|-------------------------|
|          | LTE Band 2 | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | 0.04             | 2.380                   | 2.441                   |
| 09       | LTE Band 2 | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | 18700 | 1860        | 21.80               | 22.00               | 1.047                  | 0.03             | 2.650                   | 2.775                   |
|          | LTE Band 2 | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | 19100 | 1900        | 21.62               | 22.00               | 1.091                  | 0.02             | 2.190                   | 2.390                   |
|          | LTE Band 2 | 20M      | QPSK       | 50      | 0         | Front         | 0mm      | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | 0.08             | 1.843                   | 1.899                   |
|          | LTE Band 2 | 20M      | QPSK       | 50      | 0         | Front         | 0mm      | 18900 | 1880        | 20.60               | 21.00               | 1.096                  | -0.06            | 1.768                   | 1.939                   |
|          | LTE Band 2 | 20M      | QPSK       | 50      | 0         | Front         | 0mm      | 18700 | 1860        | 20.69               | 21.00               | 1.074                  | -0.12            | 2.052                   | 2.204                   |
|          | LTE Band 2 | 20M      | QPSK       | 100     | 0         | Front         | 0mm      | 19100 | 1900        | 20.85               | 21.00               | 1.035                  | 0.01             | 1.760                   | 1.822                   |
|          | LTE Band 2 | 20M      | QPSK       | 1       | 0         | Back          | 0mm      | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | 0.03             | 0.957                   | 0.982                   |
|          | LTE Band 2 | 20M      | QPSK       | 50      | 0         | Back          | 0mm      | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | 0.01             | 0.711                   | 0.733                   |
|          | LTE Band 2 | 20M      | QPSK       | 1       | 0         | Left Side     | 0mm      | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | -0.16            | 0.283                   | 0.290                   |
|          | LTE Band 2 | 20M      | QPSK       | 50      | 0         | Left Side     | 0mm      | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | 0.05             | 0.210                   | 0.216                   |
|          | LTE Band 2 | 20M      | QPSK       | 1       | 0         | Right Side    | 0mm      | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | -0.11            | 0.805                   | 0.826                   |
|          | LTE Band 2 | 20M      | QPSK       | 50      | 0         | Right Side    | 0mm      | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | -0.02            | 0.598                   | 0.616                   |
|          | LTE Band 2 | 20M      | QPSK       | 1       | 0         | Top Side      | 0mm      | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | -0.08            | 1.160                   | 1.190                   |
|          | LTE Band 2 | 20M      | QPSK       | 50      | 0         | Top Side      | 0mm      | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | -0.09            | 0.862                   | 0.888                   |
|          | LTE Band 2 | 20M      | QPSK       | 1       | 0         | Bottom Side   | 0mm      | 18900 | 1880        | 21.89               | 22.00               | 1.026                  | 0.09             | 0.127                   | 0.130                   |
|          | LTE Band 2 | 20M      | QPSK       | 50      | 0         | Bottom Side   | 0mm      | 19100 | 1900        | 20.87               | 21.00               | 1.030                  | 0.04             | 0.094                   | 0.097                   |
| 10       | LTE Band 4 | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 0.1              | 2.040                   | 2.176                   |
|          | LTE Band 4 | 20M      | QPSK       | 50      | 0         | Front         | 0mm      | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | -0.06            | 1.430                   | 1.723                   |
|          | LTE Band 4 | 20M      | QPSK       | 100     | 0         | Front         | 0mm      | 20175 | 1732.5      | 21.05               | 22.00               | 1.245                  | 0.04             | 1.385                   | 1.724                   |
|          | LTE Band 4 | 20M      | QPSK       | 1       | 0         | Back          | 0mm      | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 0.03             | 0.820                   | 0.875                   |
|          | LTE Band 4 | 20M      | QPSK       | 50      | 0         | Back          | 0mm      | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | -0.02            | 0.577                   | 0.695                   |
|          | LTE Band 4 | 20M      | QPSK       | 1       | 0         | Left Side     | 0mm      | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 0.11             | 0.266                   | 0.284                   |
|          | LTE Band 4 | 20M      | QPSK       | 50      | 0         | Left Side     | 0mm      | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | -0.04            | 0.187                   | 0.225                   |
|          | LTE Band 4 | 20M      | QPSK       | 1       | 0         | Right Side    | 0mm      | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 0.06             | 1.430                   | 1.525                   |
|          | LTE Band 4 | 20M      | QPSK       | 50      | 0         | Right Side    | 0mm      | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | 0.13             | 1.000                   | 1.205                   |
|          | LTE Band 4 | 20M      | QPSK       | 1       | 0         | Top Side      | 0mm      | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | -0.19            | 1.740                   | 1.856                   |
|          | LTE Band 4 | 20M      | QPSK       | 50      | 0         | Top Side      | 0mm      | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | 0.01             | 1.223                   | 1.474                   |
|          | LTE Band 4 | 20M      | QPSK       | 1       | 0         | Bottom Side   | 0mm      | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | -0.09            | 0.192                   | 0.205                   |
|          | LTE Band 4 | 20M      | QPSK       | 50      | 0         | Bottom Side   | 0mm      | 20175 | 1732.5      | 21.19               | 22.00               | 1.205                  | -0.11            | 0.135                   | 0.163                   |

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB offset | Test Position | Gap (mm) | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 10g SAR (W/kg) | Reported 10g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|-------|-------------|---------------------|---------------------|------------------------|------------------|-------------------------|-------------------------|
| 11       | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Front         | 0mm      | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | -0.12            | 1.710                   | 2.113                   |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Front         | 0mm      | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | -0.07            | 1.390                   | 1.679                   |
|          | LTE Band 12 | 10M      | QPSK       | 50      | 0         | Front         | 0mm      | 23095 | 707.5       | 22.20               | 23.00               | 1.202                  | 0.16             | 1.396                   | 1.678                   |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Back          | 0mm      | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | -0.18            | 0.239                   | 0.296                   |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Back          | 0mm      | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | 0.08             | 0.194                   | 0.234                   |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Left Side     | 0mm      | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 0.03             | 0.123                   | 0.152                   |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Left Side     | 0mm      | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | -0.02            | 0.100                   | 0.121                   |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Right Side    | 0mm      | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 0.1              | 0.701                   | 0.866                   |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Right Side    | 0mm      | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | -0.09            | 0.570                   | 0.688                   |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Top Side      | 0mm      | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 0.1              | 1.151                   | 1.423                   |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Top Side      | 0mm      | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | 0.05             | 0.936                   | 1.131                   |
|          | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Bottom Side   | 0mm      | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | -0.14            | 0.082                   | 0.102                   |
|          | LTE Band 12 | 10M      | QPSK       | 25      | 0         | Bottom Side   | 0mm      | 23095 | 707.5       | 22.18               | 23.00               | 1.208                  | 0.13             | 0.067                   | 0.081                   |

**<WLAN SAR>**

| Plot No. | Band       | Mode          | Test Position | Gap (mm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 10g SAR (W/kg) | Reported 10g SAR (W/kg) |
|----------|------------|---------------|---------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|-------------------------|-------------------------|
|          | WLAN2.4GHz | 802.11b 1Mbps | Front         | 0mm      | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | -0.1             | 0.046                   | 0.048                   |
| 12       | WLAN2.4GHz | 802.11b 1Mbps | Front         | 0mm      | 1   | 2412        | 5.80                | 6.00                | 1.047                  | 99           | 1.010                     | -0.16            | 0.060                   | 0.063                   |
|          | WLAN2.4GHz | 802.11b 1Mbps | Front         | 0mm      | 6   | 2437        | 5.80                | 6.00                | 1.047                  | 99           | 1.010                     | -0.05            | 0.058                   | 0.061                   |
|          | WLAN2.4GHz | 802.11b 1Mbps | Back          | 0mm      | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | -0.07            | 0.036                   | 0.037                   |
|          | WLAN2.4GHz | 802.11b 1Mbps | Left Side     | 0mm      | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | 0.07             | 0.024                   | 0.025                   |
|          | WLAN2.4GHz | 802.11b 1Mbps | Right Side    | 0mm      | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | 0.07             | 0.036                   | 0.037                   |
|          | WLAN2.4GHz | 802.11b 1Mbps | Top Side      | 0mm      | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | 0.03             | 0.037                   | 0.038                   |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom Side   | 0mm      | 11  | 2462        | 5.90                | 6.00                | 1.023                  | 99           | 1.010                     | -0.15            | 0.001                   | 0.001                   |

### 13.4 Repeated SAR Measurement

| No. | Band       | BW (MHz) | Modulation | RB Size | RB offset | Test Position | Gap (mm) | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Ratio | Reported 1g SAR (W/kg) |
|-----|------------|----------|------------|---------|-----------|---------------|----------|-------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|-------|------------------------|
| 1st | LTE Band 2 | 20M      | QPSK       | 1       | 0         | Front         | 10mm     | 18700 | 1860        | 21.80               | 22.00               | 1.047                  | -0.02            | 1.050                  | -     | 1.099                  |
| 2nd | LTE Band 2 | 20M      | QPSK       | 1       | 0         | Front         | 10mm     | 18700 | 1860        | 21.80               | 22.00               | 1.047                  | -0.02            | 0.995                  | 1.06  | 1.042                  |

| No. | Band        | BW (MHz) | Modulation | RB Size | RB offset | Test Position | Gap (mm) | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 10g SAR (W/kg) | Ratio | Reported 10g SAR (W/kg) |
|-----|-------------|----------|------------|---------|-----------|---------------|----------|-------|-------------|---------------------|---------------------|------------------------|------------------|-------------------------|-------|-------------------------|
| 1st | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | 18700 | 1860        | 21.80               | 22.00               | 1.047                  | 0.03             | 2.650                   | -     | 2.775                   |
| 2nd | LTE Band 2  | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | 18700 | 1860        | 21.80               | 22.00               | 1.047                  | 0.03             | 2.540                   | 1.04  | 2.660                   |
| 1st | LTE Band 4  | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 0.1              | 2.040                   | -     | 2.176                   |
| 2nd | LTE Band 4  | 20M      | QPSK       | 1       | 0         | Front         | 0mm      | 20175 | 1732.5      | 22.72               | 23.00               | 1.067                  | 0.1              | 1.940                   | 1.05  | 2.069                   |
| 1st | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Front         | 0mm      | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | -0.12            | 1.710                   | -     | 2.113                   |
| 2nd | LTE Band 12 | 10M      | QPSK       | 1       | 0         | Front         | 0mm      | 23095 | 707.5       | 23.08               | 24.00               | 1.236                  | 0.15             | 1.680                   | 1.02  | 2.076                   |

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

### 14. Simultaneous Transmission Analysis

| NO. | Simultaneous Transmission Configurations | Head | Body-worn | Extremity |
|-----|------------------------------------------|------|-----------|-----------|
| 1.  | WWAN + WLAN2.4GHz                        | Yes  | Yes       | Yes       |

**General Note:**

1. The Scaled SAR summation is calculated based on the same configuration and test position.
2. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation  $< 1.6$ W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR  $< 1.6$ W/kg.
  - v) The SPLSR calculated results please refer to section 14.2.

**14.1 Head Exposure Conditions**

| WWAN Band |             | Exposure Position | 1                | 2                | 1+2<br>Summed<br>1g SAR (W/kg) |
|-----------|-------------|-------------------|------------------|------------------|--------------------------------|
|           |             |                   | WWAN             | WLAN2.4GHz       |                                |
|           |             |                   | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) |                                |
| LTE       | LTE Band 2  | Front             | 1.099            | 0.030            | <b>1.129</b>                   |
|           |             | Bottom Side       | 0.081            | 0.001            | <b>0.082</b>                   |
|           | LTE Band 4  | Front             | 0.492            | 0.030            | <b>0.522</b>                   |
|           |             | Bottom Side       | 0.089            | 0.001            | <b>0.090</b>                   |
|           | LTE Band 12 | Front             | 0.330            | 0.030            | <b>0.360</b>                   |
|           |             | Bottom Side       | 0.001            | 0.001            | <b>0.002</b>                   |

**14.2 Body-Worn Accessory Exposure Conditions**

| WWAN Band |             | Exposure Position | 1                | 2                | 1+2<br>Summed<br>1g SAR (W/kg) |
|-----------|-------------|-------------------|------------------|------------------|--------------------------------|
|           |             |                   | WWAN             | WLAN2.4GHz       |                                |
|           |             |                   | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) |                                |
| LTE       | LTE Band 2  | Front             | 0.578            | 0.122            | <b>0.700</b>                   |
|           |             | Back              | 0.203            | 0.059            | <b>0.262</b>                   |
|           |             | Left side         | 0.060            | 0.076            | <b>0.136</b>                   |
|           |             | Right side        | 0.191            | 0.001            | <b>0.192</b>                   |
|           |             | Top side          | 0.292            | 0.048            | <b>0.340</b>                   |
|           |             | Bottom side       | 0.024            | 0.001            | <b>0.025</b>                   |
|           | LTE Band 4  | Front             | 0.397            | 0.122            | <b>0.519</b>                   |
|           |             | Back              | 0.106            | 0.059            | <b>0.165</b>                   |
|           |             | Left side         | 0.039            | 0.076            | <b>0.115</b>                   |
|           |             | Right side        | 0.253            | 0.001            | <b>0.254</b>                   |
|           |             | Top side          | 0.296            | 0.048            | <b>0.344</b>                   |
|           |             | Bottom side       | 0.024            | 0.001            | <b>0.025</b>                   |
|           | LTE Band 12 | Front             | 0.437            | 0.122            | <b>0.559</b>                   |
|           |             | Back              | 0.051            | 0.059            | <b>0.110</b>                   |
|           |             | Left side         | 0.034            | 0.076            | <b>0.110</b>                   |
|           |             | Right side        | 0.229            | 0.001            | <b>0.230</b>                   |
|           |             | Top side          | 0.380            | 0.048            | <b>0.428</b>                   |
|           |             | Bottom side       | 0.023            | 0.001            | <b>0.024</b>                   |

| WWAN Band |             | Exposure Position | 1                | 2                | 1+2<br>Summed<br>1g SAR (W/kg) |
|-----------|-------------|-------------------|------------------|------------------|--------------------------------|
|           |             |                   | WWAN             | WLAN2.4GHz       |                                |
|           |             |                   | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) |                                |
| LTE       | LTE Band 2  | Front with Clip   | 0.567            | 0.116            | <b>0.683</b>                   |
|           | LTE Band 4  | Front with Clip   | 0.347            | 0.116            | <b>0.463</b>                   |
|           | LTE Band 12 | Front with Clip   | 0.428            | 0.116            | <b>0.544</b>                   |



**14.3 Extremity Exposure Conditions**

| WWAN Band |             | Exposure Position | 1                 | 2                 | 1+2<br>Summed<br>10g SAR (W/kg) |
|-----------|-------------|-------------------|-------------------|-------------------|---------------------------------|
|           |             |                   | WWAN              | WLAN2.4GHz        |                                 |
|           |             |                   | 10g SAR<br>(W/kg) | 10g SAR<br>(W/kg) |                                 |
| LTE       | LTE Band 2  | Front             | 2.775             | 0.063             | 2.838                           |
|           |             | Back              | 0.982             | 0.037             | 1.019                           |
|           |             | Left side         | 0.290             | 0.025             | 0.315                           |
|           |             | Right side        | 0.826             | 0.037             | 0.863                           |
|           |             | Top side          | 1.190             | 0.038             | 1.228                           |
|           |             | Bottom side       | 0.130             | 0.001             | 0.131                           |
|           | LTE Band 4  | Front             | 2.176             | 0.063             | 2.239                           |
|           |             | Back              | 0.875             | 0.037             | 0.912                           |
|           |             | Left side         | 0.284             | 0.025             | 0.309                           |
|           |             | Right side        | 1.525             | 0.037             | 1.562                           |
|           |             | Top side          | 1.856             | 0.038             | 1.894                           |
|           |             | Bottom side       | 0.205             | 0.001             | 0.206                           |
|           | LTE Band 12 | Front             | 2.113             | 0.063             | 2.176                           |
|           |             | Back              | 0.296             | 0.037             | 0.333                           |
|           |             | Left side         | 0.152             | 0.025             | 0.177                           |
|           |             | Right side        | 0.866             | 0.037             | 0.903                           |
|           |             | Top side          | 1.423             | 0.038             | 1.461                           |
|           |             | Bottom side       | 0.102             | 0.001             | 0.103                           |

**Test Engineer :** Henry Chou, Rain Chiu and EN Liu

## **15. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg and the measured 10-g SAR within a frequency band is  $< 3.75$  W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

### Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## **16. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.