

# TEST REPORT

**Applicant:** Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd

Address: No.6, Yong An Road, Beijiao, Shunde, Foshan ,Guangdong,China

**FCC ID:** VG8TR923XYW

**Product Name:** Microwave Oven

**Model Number:** TR923X7ZE-SS0D00

**Standard(s):** FCC PART 18  
FCC MP-5:1986

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR230740015-00

**Date Of Issue:** 2023/9/1

**Reviewed By:** Calvin Chen

Title: RF Engineer

**Approved By:** Sun Zhong

Title: Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

|                                                              |           |
|--------------------------------------------------------------|-----------|
| TEST FACILITY .....                                          | 2         |
| DECLARATIONS .....                                           | 2         |
| <b>DOCUMENT REVISION HISTORY .....</b>                       | <b>4</b>  |
| <b>1. GENERAL INFORMATION .....</b>                          | <b>5</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... | 5         |
| 1.2 DESCRIPTION OF TEST CONFIGURATION .....                  | 6         |
| 1.2.1 EUT Operation Condition: .....                         | 6         |
| 1.2.2 Support Equipment List and Details .....               | 6         |
| 1.2.3 Support Cable List and Details .....                   | 6         |
| 1.2.4 Block Diagram of Test Setup .....                      | 7         |
| 1.3 MEASUREMENT UNCERTAINTY .....                            | 8         |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                      | <b>9</b>  |
| <b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>             | <b>10</b> |
| 3.1 AC LINE CONDUCTED EMISSIONS .....                        | 10        |
| 3.1.1 EUT Setup .....                                        | 10        |
| 3.1.2 EMI Test Receiver Setup .....                          | 10        |
| 3.1.3 Test Procedure .....                                   | 11        |
| 3.1.4 Corrected Amplitude & Margin Calculation .....         | 11        |
| 3.2 RADIATION SPURIOUS EMISSIONS .....                       | 12        |
| 3.2.1 EUT Setup .....                                        | 12        |
| 3.2.2 EMI Test Receiver Setup .....                          | 13        |
| 3.2.3 Test Procedure .....                                   | 13        |
| 3.2.4 Corrected Amplitude & Margin Calculation .....         | 13        |
| 3.3 RADIATION HAZARD MEASUREMENT .....                       | 14        |
| 3.3.1 Applicable Standard .....                              | 14        |
| 3.3.2 Test Procedure .....                                   | 14        |
| 1) Input Power .....                                         | 14        |
| 2) RF Output Power .....                                     | 14        |
| 3) Operating Frequency .....                                 | 15        |
| <b>4. TEST DATA AND RESULTS .....</b>                        | <b>16</b> |
| 4.1 AC LINE CONDUCTED EMISSIONS .....                        | 16        |
| 4.2 RADIATION SPURIOUS EMISSIONS .....                       | 19        |
| 4.3 RADIATION HAZARD MEASUREMENT .....                       | 23        |
| <b>5. RF EXPOSURE EVALUATION .....</b>                       | <b>29</b> |
| 5.1 MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....                 | 29        |
| 5.1.1 Applicable Standard .....                              | 29        |
| 5.1.2 Limits .....                                           | 29        |
| 5.1.3 Measurement .....                                      | 30        |
| <b>6. EUT PHOTOGRAPHS .....</b>                              | <b>32</b> |
| <b>7. TEST SETUP PHOTOGRAPHS .....</b>                       | <b>33</b> |

**DOCUMENT REVISION HISTORY**

| Revision Number | Report Number   | Description of Revision | Date of Revision |
|-----------------|-----------------|-------------------------|------------------|
| 1.0             | CR230740015--00 | Original Report         | 2023/9/1         |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

|                                     |                  |
|-------------------------------------|------------------|
| <b>EUT Name:</b>                    | Microwave Oven   |
| <b>Trade Name:</b>                  | Midea            |
| <b>EUT Model:</b>                   | TR923X7ZE-SS0D00 |
| <b>Highest Operation Frequency:</b> | 2450 MHz         |
| <b>Microwave Output Power:</b>      | 900W             |
| <b>Input Power:</b>                 | 1200 W           |
| <b>Serial Number:</b>               | 284A-1           |
| <b>EUT Received Date:</b>           | 2023/7/08        |
| <b>EUT Received Status:</b>         | Good             |

### Accessory Information:

| <b>Accessory Description</b> | <b>Manufacturer</b> | <b>Model</b> | <b>Parameters</b> |
|------------------------------|---------------------|--------------|-------------------|
| /                            | /                   | /            | /                 |

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

|                                 |                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT Operation Mode:</b>      | The system was configured for testing in maximum (continuous) RF output power, which was provided by the manufacturer. The loads consisted of water in a glass beaker in the amounts specified in the test procedure<br>Test Model: Operation |
| <b>Equipment Modifications:</b> | No                                                                                                                                                                                                                                            |
| <b>EUT Exercise Software:</b>   | No                                                                                                                                                                                                                                            |

### 1.2.2 Support Equipment List and Details


| Manufacturer | Description  | Model   | Serial Number |
|--------------|--------------|---------|---------------|
| Unknown      | Glass Beaker | Unknown | Unknown       |

### 1.2.3 Support Cable List and Details


| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port | To  |
|-------------------|----------------|--------------|------------|-----------|-----|
| Power Cable       | No             | No           | 1          | Socket    | EUT |

### 1.2.4 Block Diagram of Test Setup

Conducted emissions:

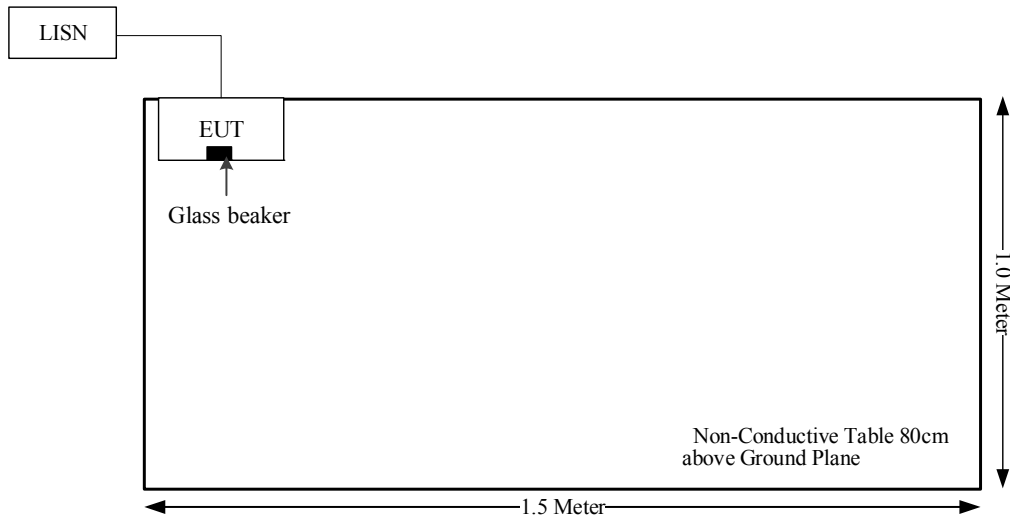

Radiated emissions:

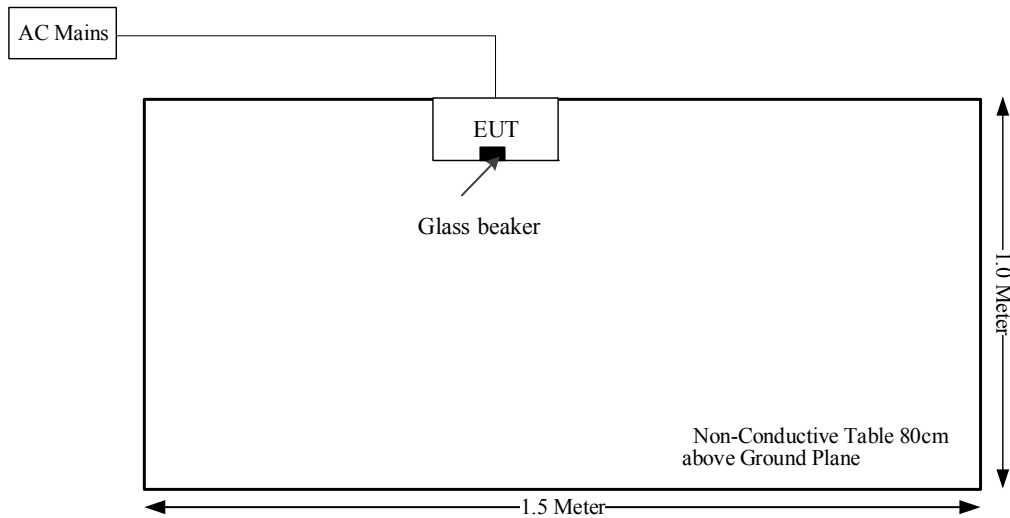

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

| Parameter                         | Measurement Uncertainty                                                                                              |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Unwanted Emissions, radiated      | 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB |
| Temperature                       | $\pm 1^{\circ}\text{C}$                                                                                              |
| Humidity                          | $\pm 5\%$                                                                                                            |
| AC Power Lines Conducted Emission | 2.8 dB (150 kHz to 30 MHz)                                                                                           |


## 2. SUMMARY OF TEST RESULTS

| Standard Clause                  | Description of Test          | Test Result |
|----------------------------------|------------------------------|-------------|
| FCC §18.307                      | Conducted emissions          | Compliant   |
| FCC §18.305, §18.309             | Radiated emissions           | Compliant   |
| FCC/OST MP-5<br>FCC §18.301      | Radiation Hazard Measurement | Compliant   |
| FCC §18.313, §1.1310,<br>§2.1091 | Maximum Permissible Exposure | Compliant   |

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 EUT Setup

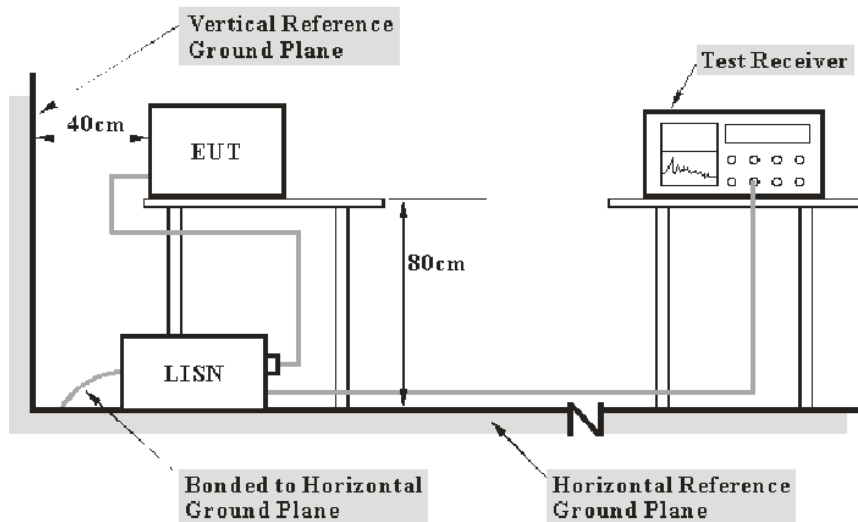

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per MP-5:1986 measurement procedure. The specification used was with the FCC Part 18.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

##### 3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### 3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

### 3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


## 3.2 Radiation Spurious Emissions

### 3.2.1 EUT Setup

Below 1GHz:

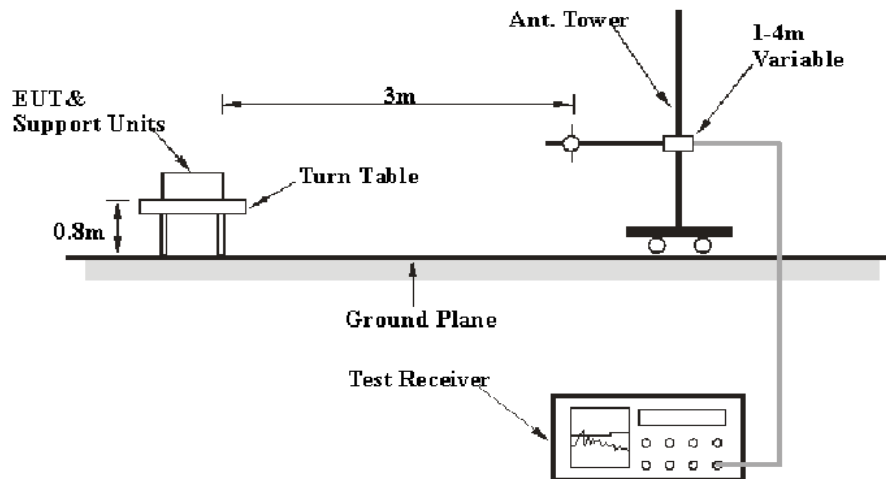

Above 1GHz:

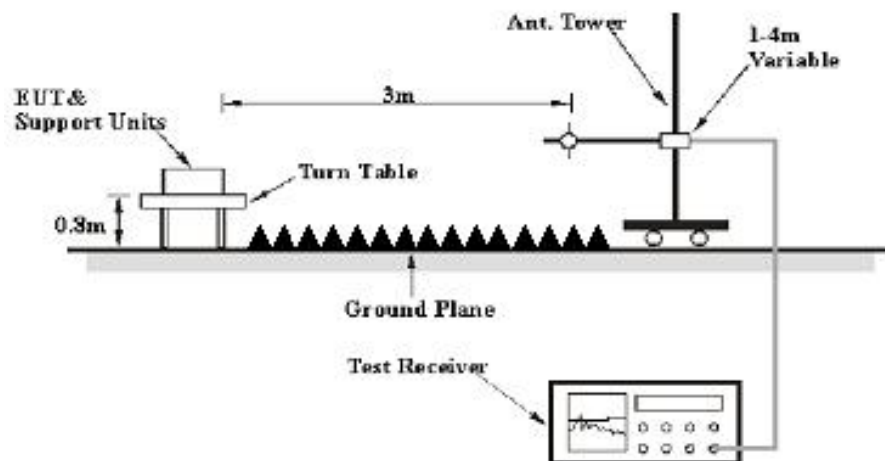

The radiated emission were performed in the 3 meters chamber test site, using the setup accordance with the FCC MP-5. The specification used was the FCC part 18 limits.

### 3.2.2 EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz   | 120 kHz | QP          |
| Above 1 GHz       | 1 MHz   | 3 MHz     | /       | Peak        |
|                   | 1 MHz   | 10Hz      | /       | AVG         |

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss - Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

### 3.3 Radiation Hazard Measurement

#### 3.3.1 Applicable Standard

FCC §18.301

#### 3.3.2 Test Procedure

##### 1) Input Power

Input power and current was measured using a power analyzer. A 1000 mL water load was placed in the center of the oven and the oven was operated at maximum output power. A 1000mL water load was chosen for its compatibility with the procedure commonly used by manufacturers to determine their input ratings.

##### Load for Microwave Ovens

For all measurements, the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tap water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000 watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000 watts output, each quantity was increased by 50% for each 500watts or fraction thereof in excess of 1000 watts. Additional beakers were used if necessary.

- Load for power output measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- Load for frequency measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.

##### 2) RF Output Power

A cylindrical container of borosilicate glass is used for the test. It has a maximum thickness of 3 mm, an external diameter of approximately 190 mm and a height of approximately 90 mm. The mass of the container is determined.

At the start of the test, the oven and the empty container are at ambient temperature. Water having an initial temperature is used for the test. The water temperature is measured immediately before it is poured into the container.

A quantity of  $1000 \text{ g} \pm 5 \text{ g}$  of water is added to the container and its actual mass obtained. The container is then immediately placed in the centre of the oven shelf, which is in its lowest normal position. The oven is operated and the time for the water temperature to attain is measured. The oven is then switched off and the final water temperature is measured within 60 s.

### **3) Operating Frequency**

#### **Variation in Operating Frequency with Time**

The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000mL water load was placed in the center of the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.

#### **Variation in Operating Frequency with Line Voltage**

The EUT was operated / warmed by at least 10 minutes of use with a 1000 mL water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.

## 4. TEST DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

|                |             |              |           |
|----------------|-------------|--------------|-----------|
| Serial Number: | 284A-1      | Test Date:   | 2023/8/29 |
| Test Site:     | CE          | Test Mode:   | Operation |
| Tester:        | David Huang | Test Result: | Pass      |

#### Environmental Conditions:


|                      |      |                              |    |                        |      |
|----------------------|------|------------------------------|----|------------------------|------|
| Temperature:<br>(°C) | 24.5 | Relative<br>Humidity:<br>(%) | 53 | ATM Pressure:<br>(kPa) | 99.7 |
|----------------------|------|------------------------------|----|------------------------|------|

#### Test Equipment List and Details:

| Manufacturer | Description       | Model   | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|---------|---------------|------------------|----------------------|
| R&S          | LISN              | ENV216  | 101134        | 2023/3/31        | 2024/3/30            |
| R&S          | EMI Test Receiver | ESR3    | 102726        | 2023/3/31        | 2024/3/30            |
| MICRO-COAX   | Coaxial Cable     | UTIFLEX | C-0200-01     | 2023/8/6         | 2024/8/5             |
| Audix        | Test Software     | E3      | 190306 (V9)   | N/A              | N/A                  |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: CR230740015-EM  
 Tester: David Huang  
 Test Mode: Operation  
 Port: Line  
 Note:

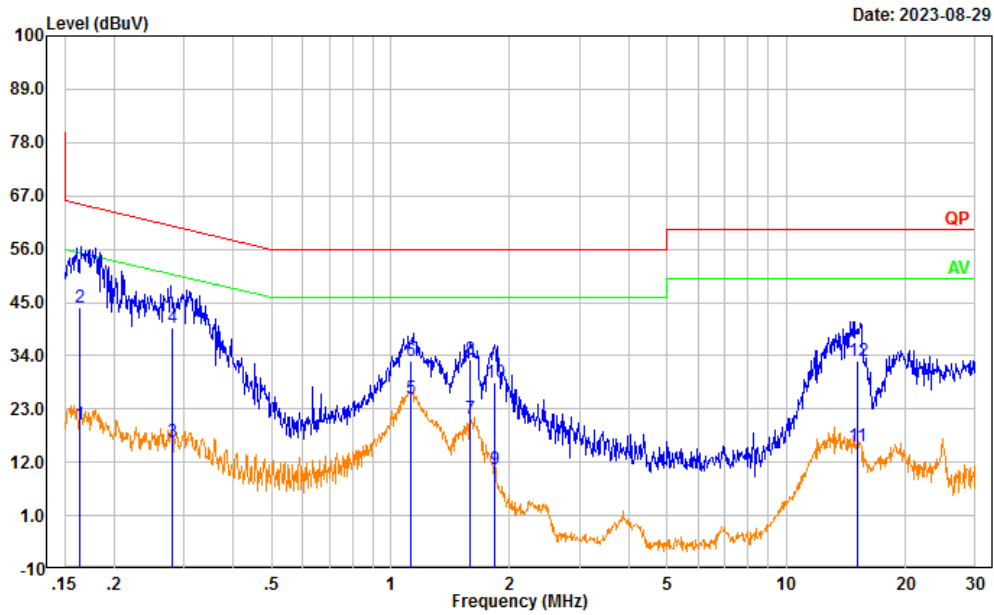

| No.   | Frequency (MHz) | Reading (dBμV) | Factor (dB) | Result (dBμV) | Limit (dBμV) | Margin (dB) | Detector |
|-------|-----------------|----------------|-------------|---------------|--------------|-------------|----------|
| <hr/> |                 |                |             |               |              |             |          |
| 1     | 0.163           | 10.33          | 9.61        | 19.94         | 55.29        | 35.35       | Average  |
| 2     | 0.163           | 34.47          | 9.61        | 44.08         | 65.29        | 21.21       | QP       |
| 3     | 0.280           | 6.74           | 9.61        | 16.35         | 50.80        | 34.45       | Average  |
| 4     | 0.280           | 30.03          | 9.61        | 39.64         | 60.80        | 21.16       | QP       |
| 5     | 1.121           | 15.63          | 9.62        | 25.25         | 46.00        | 20.75       | Average  |
| 6     | 1.121           | 23.18          | 9.62        | 32.80         | 56.00        | 23.20       | QP       |
| 7     | 1.590           | 11.41          | 9.63        | 21.04         | 46.00        | 24.96       | Average  |
| 8     | 1.590           | 23.49          | 9.63        | 33.12         | 56.00        | 22.88       | QP       |
| 9     | 1.828           | 0.89           | 9.63        | 10.52         | 46.00        | 35.48       | Average  |
| 10    | 1.828           | 18.86          | 9.63        | 28.49         | 56.00        | 27.51       | QP       |
| 11    | 15.105          | 5.68           | 9.69        | 15.37         | 50.00        | 34.63       | Average  |
| 12    | 15.105          | 23.12          | 9.69        | 32.81         | 60.00        | 27.19       | QP       |


Project No.: CR230740015-EM

Tester: David Huang

Test Mode: Operation

Port: neutral

Note:

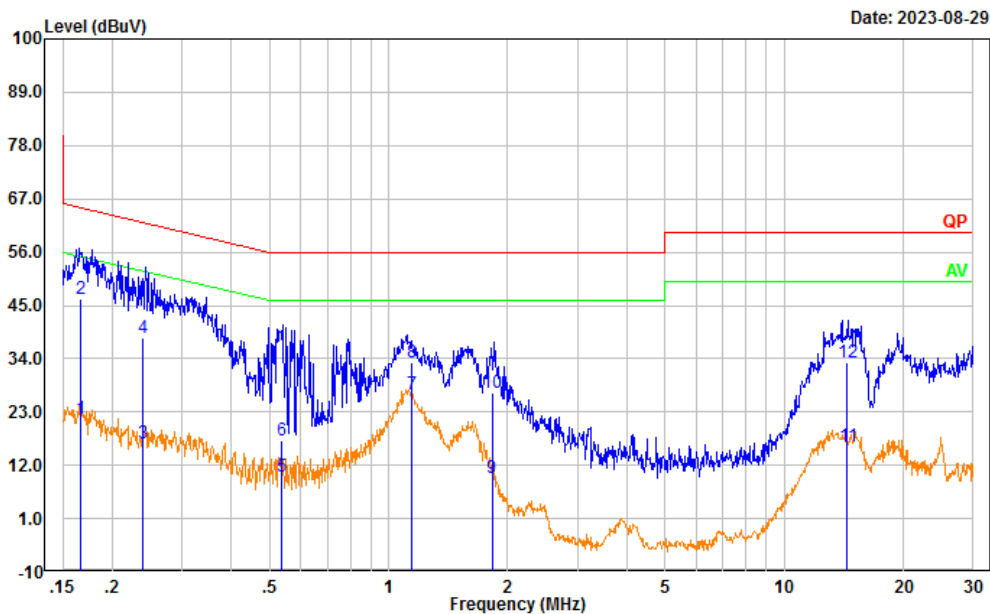

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|---------------|--------------|-------------|----------|
| 1   | 0.167           | 11.94          | 9.61        | 21.55         | 55.12        | 33.57       | Average  |
| 2   | 0.167           | 36.73          | 9.61        | 46.34         | 65.12        | 18.78       | QP       |
| 3   | 0.239           | 6.86           | 9.61        | 16.47         | 52.14        | 35.67       | Average  |
| 4   | 0.239           | 28.82          | 9.61        | 38.43         | 62.14        | 23.71       | QP       |
| 5   | 0.537           | 0.06           | 9.61        | 9.67          | 46.00        | 36.33       | Average  |
| 6   | 0.537           | 7.57           | 9.61        | 17.18         | 56.00        | 38.82       | QP       |
| 7   | 1.141           | 17.07          | 9.62        | 26.69         | 46.00        | 19.31       | Average  |
| 8   | 1.141           | 23.52          | 9.62        | 33.14         | 56.00        | 22.86       | QP       |
| 9   | 1.824           | -0.32          | 9.63        | 9.31          | 46.00        | 36.69       | Average  |
| 10  | 1.824           | 17.29          | 9.63        | 26.92         | 56.00        | 29.08       | QP       |
| 11  | 14.414          | 6.38           | 9.68        | 16.06         | 50.00        | 33.94       | Average  |
| 12  | 14.414          | 23.50          | 9.68        | 33.18         | 60.00        | 26.82       | QP       |

**4.2 Radiation Spurious Emissions**

|                |                |              |                                            |
|----------------|----------------|--------------|--------------------------------------------|
| Serial Number: | 284A-1         | Test Date:   | Above 1G: 2023/7/14<br>Below 1G: 2023/8/30 |
| Test Site:     | 966-2,966-1    | Test Mode:   | Operation                                  |
| Tester:        | Vic Du,Tao Zhu | Test Result: | Pass                                       |

**Environmental Conditions:**

|                      |         |                              |       |                        |             |
|----------------------|---------|------------------------------|-------|------------------------|-------------|
| Temperature:<br>(°C) | 25~25.3 | Relative<br>Humidity:<br>(%) | 54~61 | ATM Pressure:<br>(kPa) | 100.1~100.2 |
|----------------------|---------|------------------------------|-------|------------------------|-------------|


**Test Equipment List and Details:**

| Manufacturer    | Description           | Model                 | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------------|-----------------------|---------------|------------------|----------------------|
| Below 1GHz      |                       |                       |               |                  |                      |
| Sunol Sciences  | Antenna               | JB6                   | A082520-5     | 2020/10/19       | 2023/10/18           |
| R&S             | EMI Test Receiver     | ESR3                  | 102724        | 2023/3/31        | 2024/3/30            |
| TIMES MICROWAVE | Coaxial Cable         | LMR-600-UltraFlex     | C-0470-02     | 2023/7/16        | 2024/7/15            |
| TIMES MICROWAVE | Coaxial Cable         | LMR-600-UltraFlex     | C-0780-01     | 2023/7/16        | 2024/7/15            |
| Sonoma          | Amplifier             | 310N                  | 186165        | 2023/7/16        | 2024/7/15            |
| Audix           | Test Software         | E3                    | 201021 (V9)   | N/A              | N/A                  |
| Above 1GHz:     |                       |                       |               |                  |                      |
| ETS-Lindgren    | Horn Antenna          | 3115                  | 9912-5985     | 2020/10/13       | 2023/10/12           |
| R&S             | Spectrum Analyzer     | FSV40                 | 101591        | 2023/3/31        | 2024/3/30            |
| MICRO-COAX      | Coaxial Cable         | UFA210A-1-1200-70U300 | 217423-008    | 2022/8/7         | 2023/8/6             |
| MICRO-COAX      | Coaxial Cable         | UFA210A-1-2362-300300 | 235780-001    | 2022/8/7         | 2023/8/6             |
| Mini            | Pre-amplifier         | ZVA-183-S+            | 5969001149    | 2022/11/9        | 2023/11/8            |
| Audix           | Test Software         | E3                    | 201021 (V9)   | N/A              | N/A                  |
| PASTERNAK       | Horn Antenna          | PE9852/2F-20          | 112002        | 2021/2/5         | 2024/2/4             |
| Quinstar        | Preamplifier          | QLW-18405536-JO       | 15964001005   | 2022/9/16        | 2023/9/15            |
| MICRO-COAX      | Coaxial Cable         | UFB142A-1-2362-200200 | 235772-001    | 2022/8/7         | 2023/8/6             |
| E-Microwave     | Band Rejection Filter | 2400-2483.5MHz        | OE01902424    | 2022/8/7         | 2023/8/6             |
| Mini Circuits   | High Pass Filter      | VHF-6010+             | 31119         | 2022/8/7         | 2023/8/6             |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


## 1) 30MHz-1GHz:

Project No.: CR230740015-EM  
Tester: Vic Du  
Test Mode: Operation  
Polarization: horizontal  
Note:

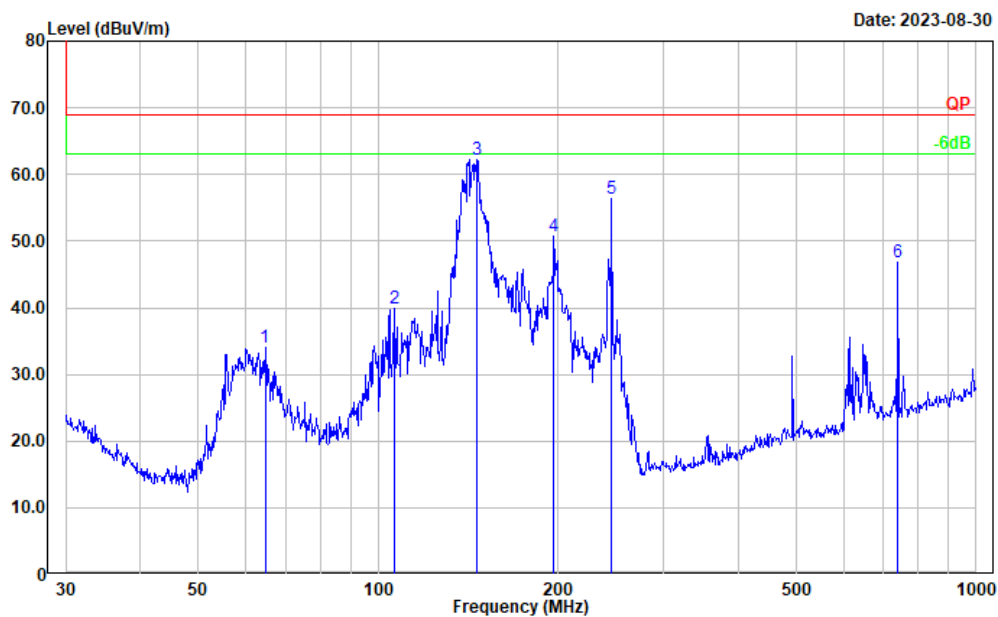

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 64.659             | 51.03             | -16.96           | 34.07              | 69.01             | 34.94          | Peak     |
| 2   | 106.385            | 52.99             | -13.07           | 39.92              | 69.01             | 29.09          | Peak     |
| 3   | 146.374            | 74.29             | -11.98           | 62.31              | 69.01             | 6.70           | Peak     |
| 4   | 196.510            | 63.37             | -12.60           | 50.77              | 69.01             | 18.24          | Peak     |
| 5   | 245.951            | 69.32             | -12.99           | 56.33              | 69.01             | 12.68          | Peak     |
| 6   | 739.661            | 49.80             | -2.94            | 46.86              | 69.01             | 22.15          | Peak     |

Project No.: CR230740015-EM  
Tester: Vic Du  
Test Mode: Operation  
Polarization: vertical  
Note:

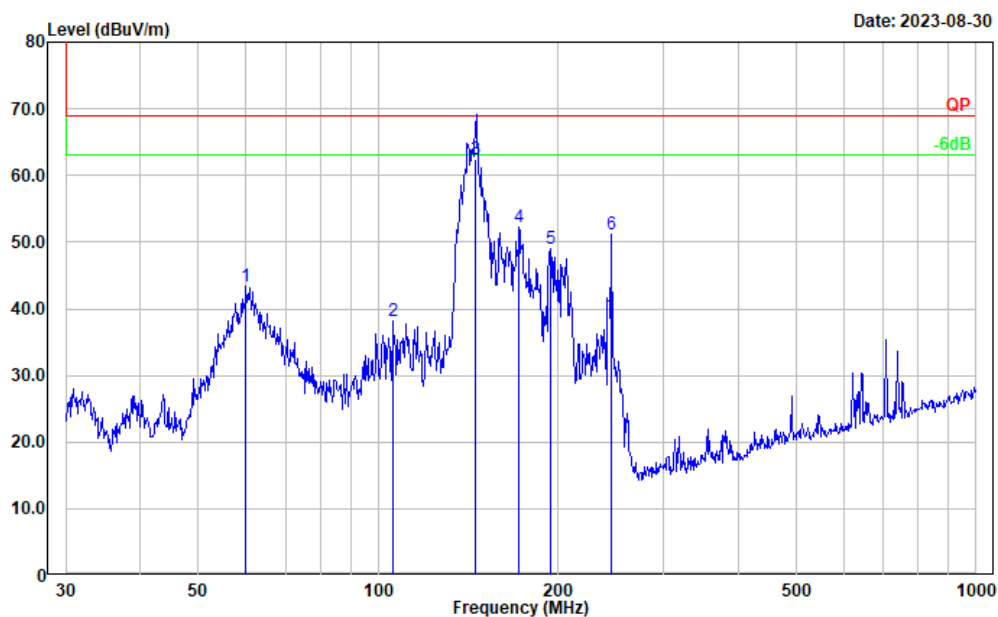

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 60.069             | 60.80             | -17.40           | 43.40              | 69.01             | 25.61          | Peak     |
| 2   | 105.642            | 51.29             | -13.23           | 38.06              | 69.01             | 30.95          | Peak     |
| 3   | 145.529            | 74.48             | -11.96           | 62.52              | 69.01             | 6.49           | QP       |
| 4   | 171.995            | 65.28             | -13.05           | 52.23              | 69.01             | 16.78          | Peak     |
| 5   | 194.453            | 61.86             | -12.87           | 48.99              | 69.01             | 20.02          | Peak     |
| 6   | 245.951            | 64.22             | -12.99           | 51.23              | 69.01             | 17.78          | Peak     |

**2) 1-25GHz:**

| Frequency<br>(MHz) | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                    | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| 1000ml water       |                   |          |                |                  |                    |                   |                |
| 2366.500           | 46.32             | AV       | H              | 3.38             | 49.70              | 69.01             | 19.31          |
| 2369.500           | 39.54             | AV       | V              | 3.39             | 42.93              | 69.01             | 26.08          |
| 2543.500           | 31.10             | AV       | H              | 3.92             | 35.02              | 69.01             | 33.99          |
| 2536.500           | 33.02             | AV       | V              | 3.87             | 36.89              | 69.01             | 32.12          |
| 4460.500           | 23.36             | AV       | H              | 9.92             | 33.28              | 69.01             | 35.73          |
| 4438.000           | 20.55             | AV       | V              | 9.89             | 30.44              | 69.01             | 38.57          |
| 700ml water        |                   |          |                |                  |                    |                   |                |
| 4930.000           | 22.72             | AV       | H              | 11.20            | 33.92              | 69.01             | 35.09          |
| 4922.500           | 23.83             | AV       | V              | 11.18            | 35.01              | 69.01             | 34.00          |
| 7402.000           | 24.11             | AV       | H              | 14.95            | 39.06              | 69.01             | 29.95          |
| 7400.500           | 23.29             | AV       | V              | 14.93            | 38.22              | 69.01             | 30.79          |
| 300ml water        |                   |          |                |                  |                    |                   |                |
| 4930.000           | 25.67             | AV       | H              | 11.20            | 36.87              | 70.70             | 32.14          |
| 4922.500           | 25.96             | AV       | V              | 11.18            | 37.14              | 70.70             | 31.87          |
| 7402.000           | 25.65             | AV       | H              | 14.95            | 40.60              | 70.70             | 28.41          |
| 7400.500           | 25.03             | AV       | V              | 14.93            | 39.96              | 70.70             | 29.05          |

**4.3 Radiation Hazard Measurement**

|                |         |              |              |
|----------------|---------|--------------|--------------|
| Serial Number: | 284A-1  | Test Date:   | 2023/7/14    |
| Test Site:     | 966-1   | Test Mode:   | Transmitting |
| Tester:        | Tao Zhu | Test Result: | Pass         |

**Environmental Conditions:**

|                      |      |                           |    |                           |       |
|----------------------|------|---------------------------|----|---------------------------|-------|
| Temperature:<br>(°C) | 26.1 | Relative Humidity:<br>(%) | 51 | ATM<br>Pressure:<br>(kPa) | 100.2 |
|----------------------|------|---------------------------|----|---------------------------|-------|

**Test Equipment List and Details:**

| Manufacturer | Description                      | Model                 | Serial Number | Calibration Date | Calibration Due Date |
|--------------|----------------------------------|-----------------------|---------------|------------------|----------------------|
| YOKOGAWA     | Digital Power Meter              | WT210                 | CR23142113    | 2022/8/7         | 2023/8/6             |
| FLLIKE       | Temperature measuring instrument | 725                   | BC-TL-504     | 2023/3/31        | 2024/3/31            |
| Dingxing     | Electronic Balance               | DSII-861              | 215219        | 2022/9/9         | 2023/9/8             |
| ETS-Lindgren | Horn Antenna                     | 3115                  | 9912-5985     | 2020/10/13       | 2023/10/12           |
| R&S          | Spectrum Analyzer                | FSV40                 | 101591        | 2023/3/31        | 2024/3/30            |
| MICRO-COAX   | Coaxial Cable                    | UFA210A-1-1200-70U300 | 217423-008    | 2022/8/7         | 2023/8/6             |
| MICRO-COAX   | Coaxial Cable                    | UFA210A-1-2362-300300 | 235780-001    | 2022/8/7         | 2023/8/6             |
| Mini         | Pre-amplifier                    | ZVA-183-S+            | 5969001149    | 2022/11/9        | 2023/11/8            |
| Audix        | Test Software                    | E3                    | 201021 (V9)   | N/A              | N/A                  |

**\* Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

**1) Input Power**

| Input Voltage<br>(V <sub>AC</sub> /Hz) | Input Current<br>(Amps) | Measured Input Power<br>(Watts) | Rated Input Power<br>(Watts) |
|----------------------------------------|-------------------------|---------------------------------|------------------------------|
| 114.8                                  | 11.34                   | 1301.832                        | 1200                         |

☒ Based on the measured input power, the EUT was found to be operating within the intended specifications.

**2) RF Output Power**

| m <sub>w</sub><br>(g) | m <sub>c</sub><br>(g) | T <sub>0</sub><br>(°C) | T <sub>1</sub><br>(°C) | T <sub>2</sub><br>(°C) | t<br>(s) |
|-----------------------|-----------------------|------------------------|------------------------|------------------------|----------|
| 1000                  | 377                   | 24                     | 13.4                   | 19.7                   | 40       |

RF Output Power =  $(4.187 \times 1000 \times (19.7 - 13.4) + 0.55 \times 377.0 \times (19.7 - 24)) / 40 = 637.162$  Watts

P is the microwave power output, in watts;

m<sub>w</sub> is the mass of the water, in grams;

m<sub>c</sub> is the mass of the container, in grams;

T<sub>0</sub> is the ambient temperature, in degrees Celsius;

T<sub>1</sub> is the initial temperature of the water, in degrees Celsius;

T<sub>2</sub> is the final temperature of the water, in degrees Celsius;

t is the heating time, in seconds, excluding the magnetron filament heating-up time.

☐ The measurement output power was found to be less than 500 watts. Therefore, in accordance with Section 18.305 of Subpart-C, the measured out-of-band emissions were compared to the limit of 25µV/meter at a 300-meter measurement distance.

☒ The measured output power was found to exceed 500 watts. Therefore, in accordance with Section 18.305 of Subpart-C, the measured out-of-band emissions were compared with the limit calculated as following:

$$LFS = 25 * \text{SQRT} (\text{Power Output} / 500)$$

$$LFS = 25 * \text{SQRT} (637.162 / 500)$$

$$LFS = 28.22$$

Where: LFS is the maximum allowable field strength for out-of-band emissions in µV/meter at a 300-meter measurement distance. Power Output is the measured output power in watts.

| LFS<br>µV/m@300m | dBµV/m@300m | dBµV/m@3m |
|------------------|-------------|-----------|
| 28.22            | 29.01       | 69.01     |

**Note:** Limit (dBµV/m@3m) = Limit (dBµV/m@300m) + 40(dB)


### 3) Operating Frequency

#### Variation in Operating Frequency with Time

| Frequency at Start time<br>(MHz) | Frequency at End time<br>(MHz) |
|----------------------------------|--------------------------------|
| 2457.81                          | 2460.85                        |


Refer to data pages for details of the variation in operating frequency with time measurement.

#### Start time:

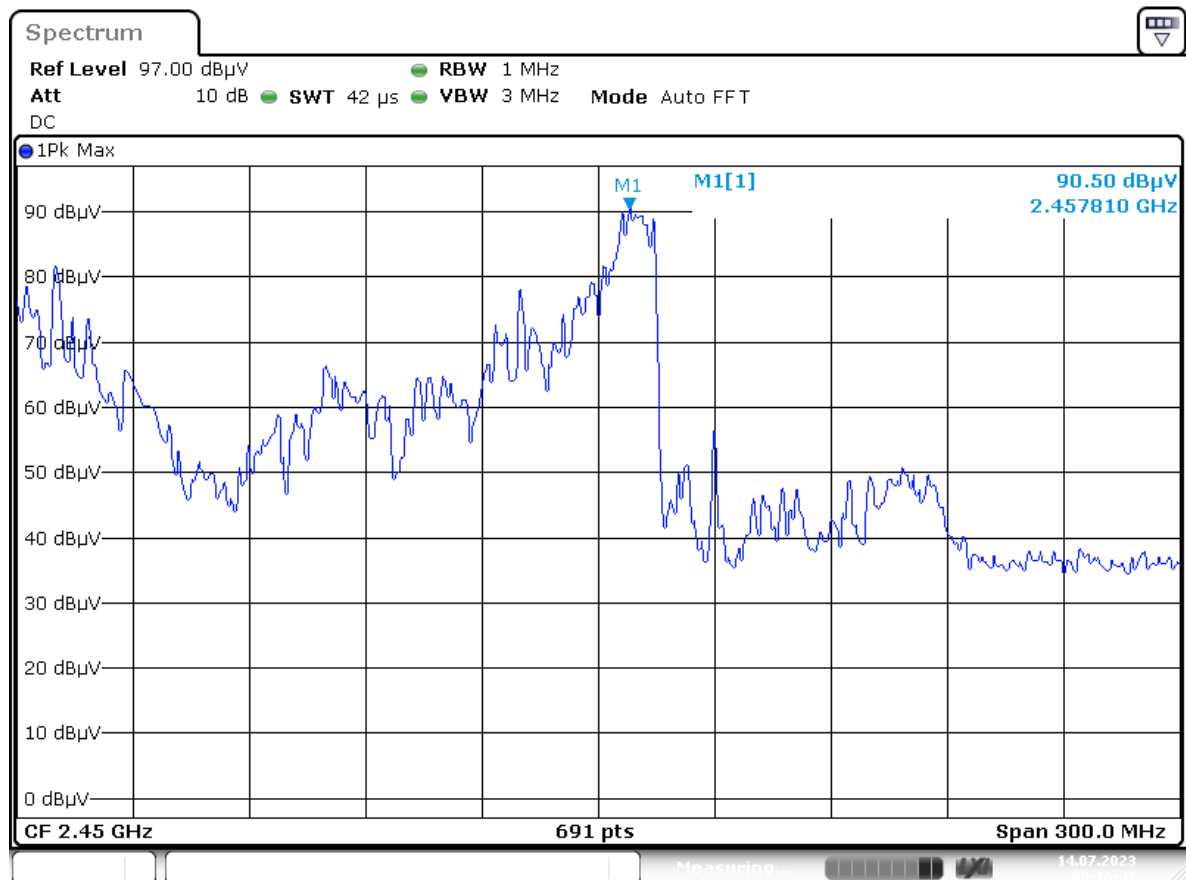

Date: 14.JUL.2023 00:10:47

End time:

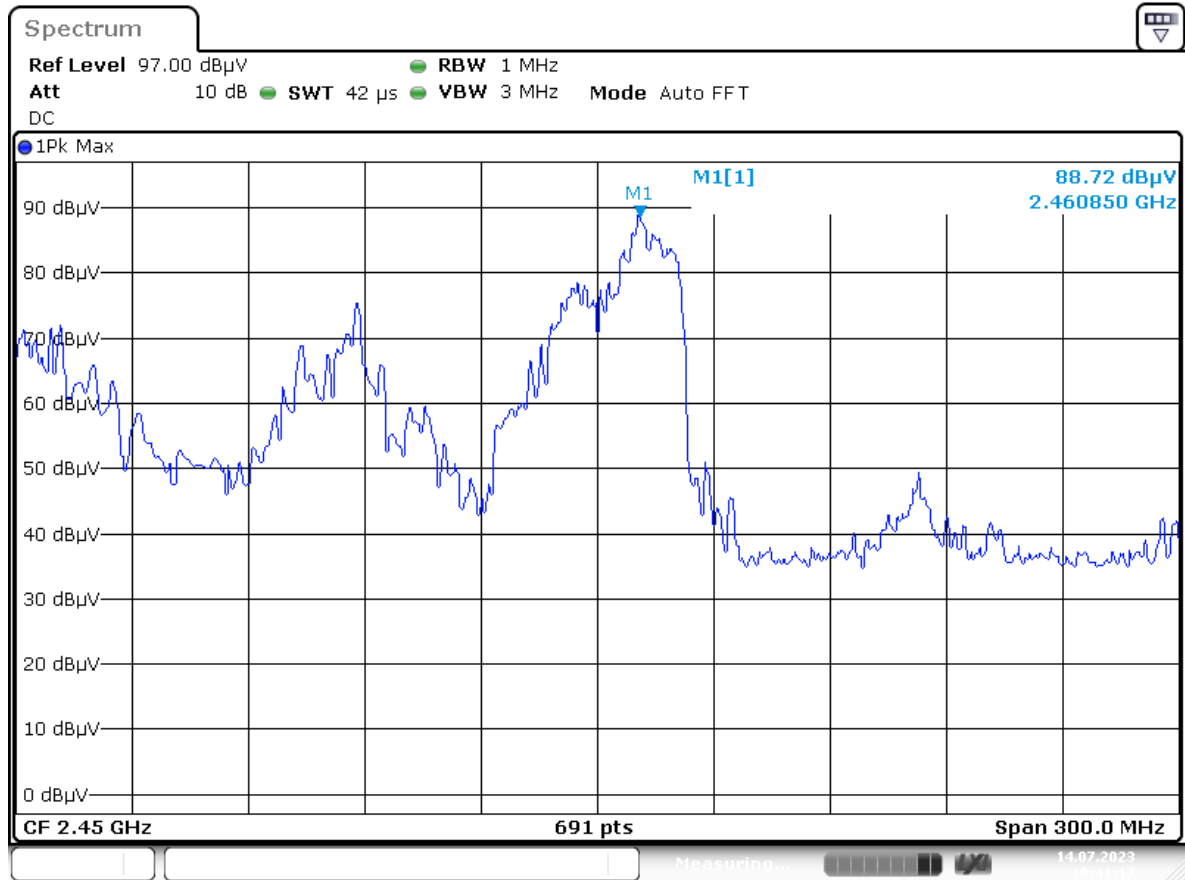


Date: 14.JUL.2023 10:41:17

**Variation in Operating Frequency with Line Voltage**


Line voltage varied from 96 V<sub>AC</sub> to 150 V<sub>AC</sub>.

| (Low voltage) Frequency (MHz) | (High voltage) Frequency (MHz) |
|-------------------------------|--------------------------------|
| 2457.81                       | 2459.12                        |

Please refer to following pages for details of the variation in operating frequency with line voltage measurement.

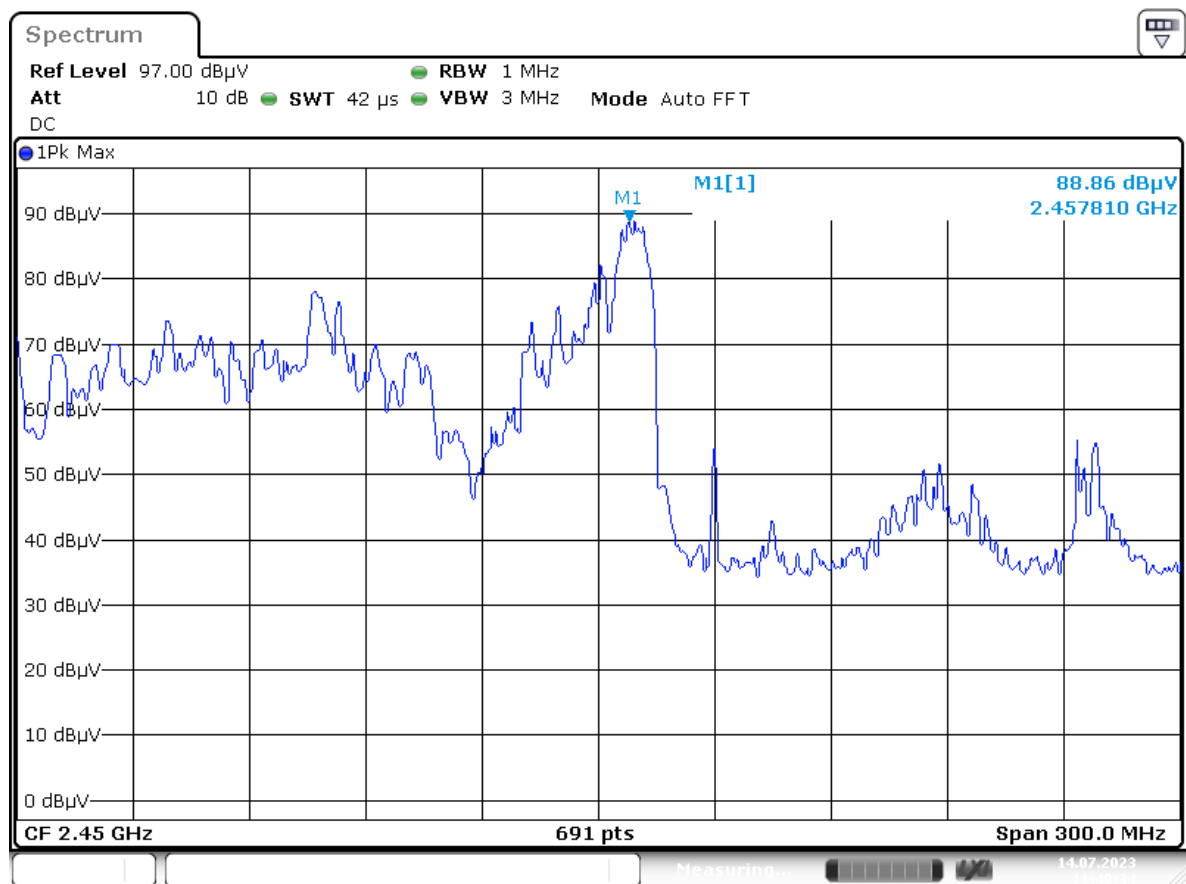**Low Voltage:**

Date: 14.JUL.2023 11:40:35

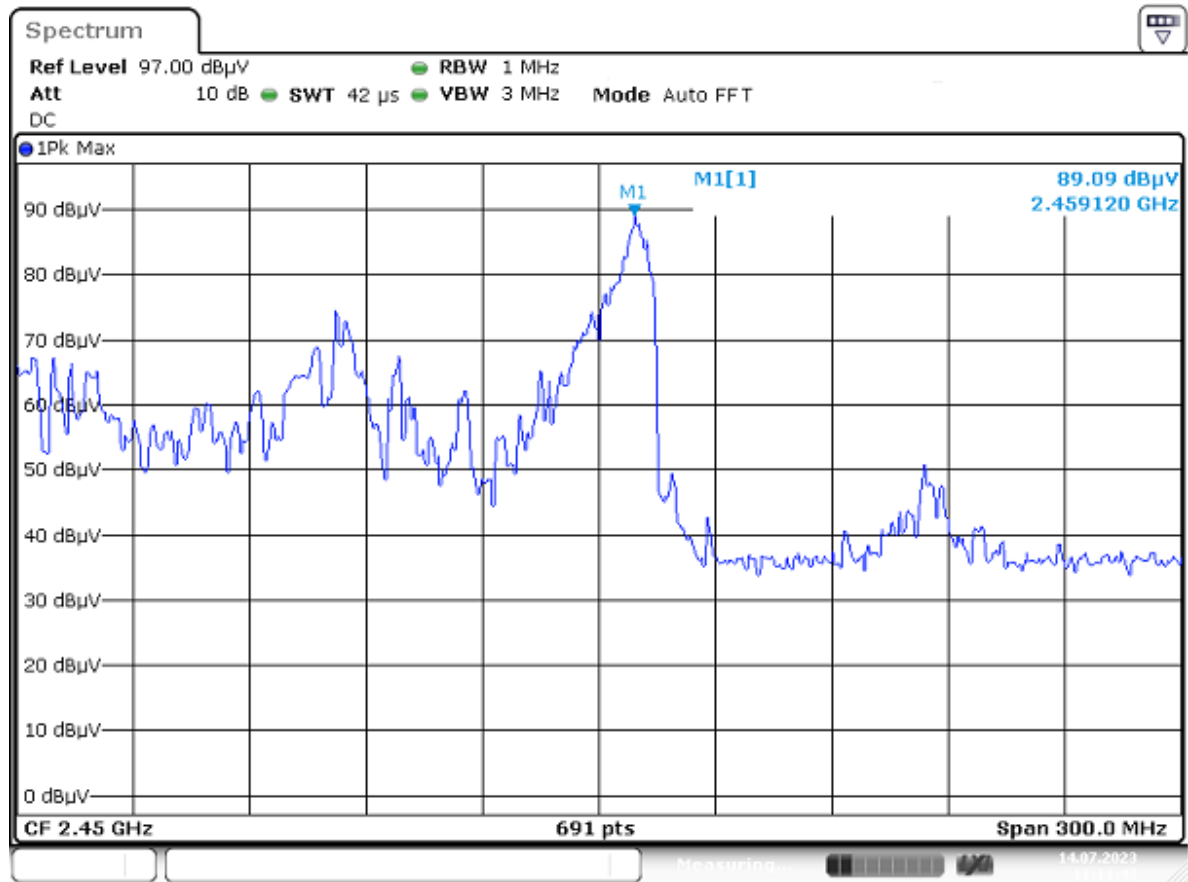**High Voltage:**

Date: 14.JUL.2023 11:11:44

## 5. RF EXPOSURE EVALUATION

### 5.1 Maximum Permissible Exposure (MPE)

#### 5.1.1 Applicable Standard

According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

#### 5.1.2 Limits

Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

| (B) Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
|---------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz)                                   | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minutes) |
| 0.3–1.34                                                | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34–30                                                 | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30–300                                                  | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300–1500                                                | /                             | /                             | f/1500                              | 30                       |
| 1500–100,000                                            | /                             | /                             | 1.0                                 | 30                       |

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

**5.1.3 Measurement**

|                |                |              |                  |
|----------------|----------------|--------------|------------------|
| Product Name:  | Microwave Oven | Model:       | TR923X7ZE-SS0D00 |
| Serial Number: | 284A-1         | Test Date:   | 2023/7/14        |
| Test Site:     | 966-1          | Test Mode:   | Operation        |
| Tester:        | Tao Zhu        | Test Result: | Pass             |

**Environmental Conditions:**

|                      |      |                           |    |                           |       |
|----------------------|------|---------------------------|----|---------------------------|-------|
| Temperature:<br>(°C) | 26.1 | Relative Humidity:<br>(%) | 51 | ATM<br>Pressure:<br>(kPa) | 100.2 |
|----------------------|------|---------------------------|----|---------------------------|-------|

**Test Equipment List and Details:**

| Manufacturer | Description             | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------------|-------|---------------|------------------|----------------------|
| ETS          | Microwave Survery Meter | 1501  | 123654        | 2023/3/17        | 2024/3/16            |

**\* Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Radiation leakage was measured in the as-received condition with the oven door closed using a microwave leakage meter.

A 275 mL water load was placed in the center of the oven and the oven was operated at maximum output power.

☒ There was no microwave leakage exceeding a power level of  $0.1\text{mW}/\text{cm}^2$  observed at any point 5 cm or more from the external surface of the oven.

A maximum of  $1.0\text{ mW}/\text{cm}^2$  is allowed in accordance with the applicable Federal Standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed.

For BT/Wi-Fi Function:

**Calculation formula:**

$$S = \frac{PG}{4\pi R^2}$$

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

| Operation Modes | Frequency (MHz) | Antenna Gain |           | Conducted output power including Tune-up Tolerance |       | Evaluation Distance | Power Density | MPE Limit |
|-----------------|-----------------|--------------|-----------|----------------------------------------------------|-------|---------------------|---------------|-----------|
|                 |                 | (dBi)        | (numeric) | (dBm)                                              | (mW)  |                     |               |           |
| BLE             | 2402-2480       | 2.00         | 1.58      | 6.7                                                | 4.68  | 20                  | 0.0015        | 1         |
| Wi-Fi           | 2412-2462       | 2.00         | 1.58      | 17.2                                               | 52.48 | 20                  | 0.0165        | 1         |

Note:

1. The device contains a certified Module, FCC ID: 2ADQOMWB-SWB01.
2. The BLE/Wi-Fi Conducted output power comes from module report.
3. The BLE/Wi-Fi and Microwave can transmit simultaneously
4. Simultaneous transmitting was considerate to be compliant to the limit, since low power density for BLE/Wi-Fi and Microwave Functions.

**Result:** The device meets FCC MPE at **20 cm** distance

---

## **6. EUT PHOTOGRAPHS**

---

Please refer to the attachment CR230740015-00-EXP EUT EXTERNAL PHOTOGRAPHS and  
CR230740015-00-INP EUT INTERNAL PHOTOGRAPHS

---

## **7. TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment CR230740015-00-TSP TEST SETUP PHOTOGRAPHS.

\*\*\*\*\*END OF REPORT\*\*\*\*\*