



FCC RF Test Report

APPLICANT : Quectel Wireless Solutions Co., Ltd.
EQUIPMENT : Smart LTE Module
BRAND NAME : Quectel
MODEL NAME : SC200E-AU
FCC ID : XMR2024SC200EAU
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Jul. 28, 2024 ~ Aug. 28, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	7
1.6 Testing Location	8
1.7 Test Software.....	8
1.8 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	13
3.2 Maximum Conducted Output Power Measurement	15
3.3 Power Spectral Density Measurement	20
3.4 Unwanted Emissions Measurement	23
3.5 AC Conducted Emission Measurement.....	28
3.6 Antenna Requirements	30
4 LIST OF MEASURING EQUIPMENT	31
5 MEASUREMENT UNCERTAINTY	32
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR480203D	Rev. 01	Initial issue of report	Nov. 29, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 0.89 dB at 7713.31 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 17.50 dB at 1.289 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.2 Manufacturer

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart LTE Module
Brand Name	Quectel
Model Name	SC200E-AU
FCC ID	XMR2024SC200EAU
IMEI /SN Code	Conducted: 866080060008526/866080060008534 Conduction: 861793070038664/861793070038672 Radiation: E1C24AO0D000067
HW Version	R1.0
SW Version	SC200EAUDAR12A01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 16.04 dBm / 0.0402 W 802.11n HT20 : 15.82 dBm / 0.0382 W 802.11n HT40 : 16.45 dBm / 0.0442 W 802.11ac VHT20: 15.85 dBm / 0.0385 W 802.11ac VHT40: 16.48 dBm / 0.0445 W 802.11ac VHT80: 13.75 dBm / 0.0237 W <5260 MHz ~ 5320 MHz> 802.11a : 16.21 dBm / 0.0418 W 802.11n HT20 : 16.01 dBm / 0.0399 W 802.11n HT40 : 17.00 dBm / 0.0501 W 802.11ac VHT20: 16.06 dBm / 0.0404 W 802.11ac VHT40: 17.02 dBm / 0.0504 W 802.11ac VHT80: 11.67 dBm / 0.0147 W <5500 MHz ~ 5720 MHz > 802.11a : 16.10 dBm / 0.0407 W 802.11n HT20 : 15.92 dBm / 0.0391 W 802.11n HT40 : 16.73 dBm / 0.0471 W 802.11ac VHT20: 15.94 dBm / 0.0393 W 802.11ac VHT40: 16.77 dBm / 0.0475 W 802.11ac VHT80: 15.19 dBm / 0.0330 W <5745 MHz ~ 5825 MHz> 802.11a : 16.42 dBm / 0.0439 W 802.11n HT20 : 16.12 dBm / 0.0409 W 802.11n HT40 : 17.02 dBm / 0.0504 W 802.11ac VHT20: 16.15 dBm / 0.0412 W 802.11ac VHT40: 17.07 dBm / 0.0509 W 802.11ac VHT80: 15.75 dBm / 0.0376 W

99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 17.219 MHz 802.11ac VHT20 : 18.343 MHz 802.11ac VHT40 : 36.571 MHz 802.11ac VHT80 : 76.114 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.219 MHz 802.11ac VHT20 : 18.324 MHz 802.11ac VHT40 : 36.610 MHz 802.11ac VHT80 : 76.190 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.257 MHz 802.11ac VHT20 : 18.343 MHz 802.11ac VHT40 : 36.610 MHz 802.11ac VHT80 : 76.419 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.257 MHz 802.11ac VHT20 : 18.343 MHz 802.11ac VHT40 : 36.610 MHz 802.11ac VHT80 : 76.190 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> Dipole Antenna type with gain -0.7 dBi <5260 MHz ~ 5320 MHz> Dipole Antenna type with gain -0.8 dBi <5500 MHz ~ 5720 MHz> Dipole Antenna type with gain -1.2 dBi <5745 MHz ~ 5825 MHz> Dipole Antenna type with gain -1.5 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11ac VHT20/ VHT40 by referring to their higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH08-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH08-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

SISO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ac VHT20 (Cover HT20)	MCS0
802.11ac VHT40 (Cover HT40)	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : WLAN 5G Link + BT Link + AC Adapter
Remark: For Radiated Test Cases, the tests were performance with test jig and adapter.	


RSE Co-location
Bluetooth LE(2 Mbps) CH39_TX + 802.11a CH157_5785 802.11a CH157_5785 + LTE Band 7 Link

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	-	-
Straddle		-	-	138	-

2.3 Connection Diagram of Test System

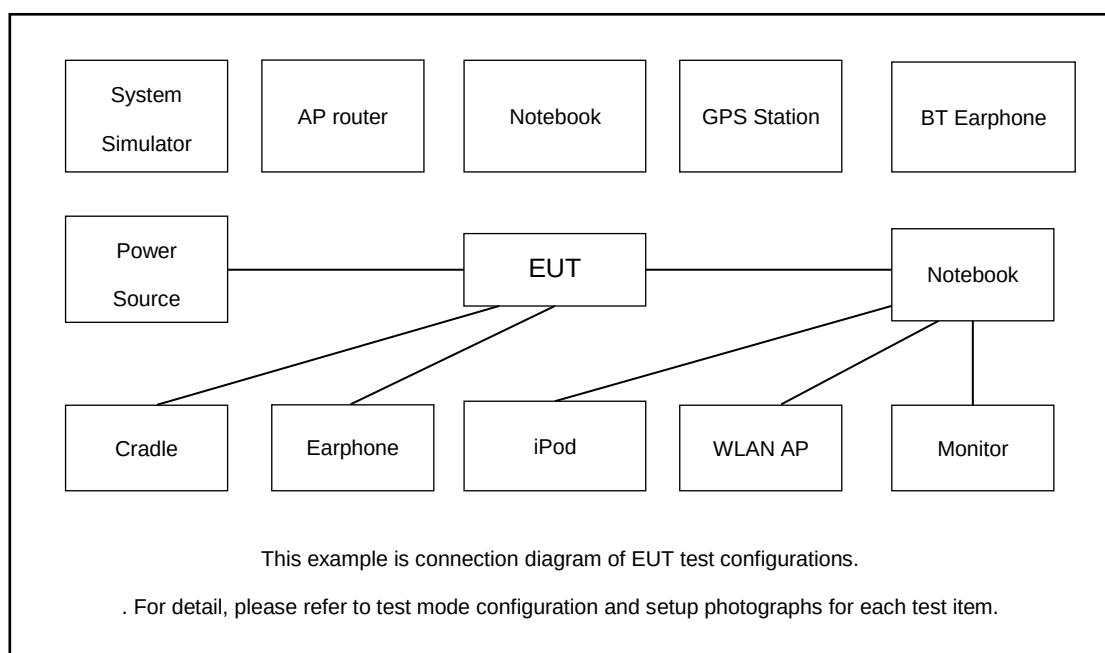

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
4.	Test Jig	N/A	N/A	N/A	N/A	N/A
5.	Antenna	N/A	N/A	N/A	N/A	N/A
6.	Adapter	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 16.25 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 16.25 + 10 = 26.25 \text{ (dB)}
 \end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 * RBW$. 7. Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	1. Set RBW = 100kHz. 2. Set the VBW $\geq 3 \times RBW$. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.

3.1.4 Test Setup

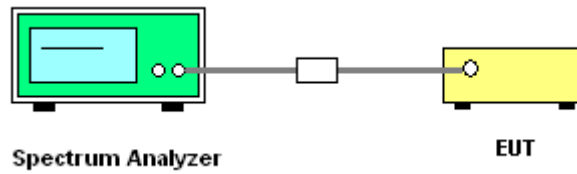

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log₁₀ B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

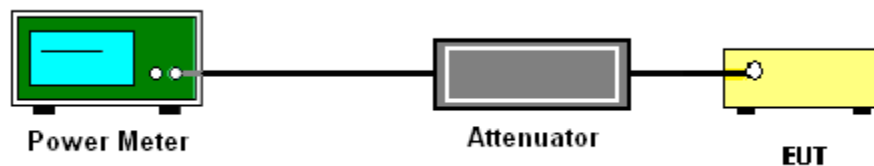



3.2.5 Test Result of Maximum Conducted Output Power

<5180 MHz ~ 5240 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Power Setting
					Ant 1	Ant 1	Ant 1	Ant 1		Ant 1
11a	6Mbps	1	36	5180	0.09	16.04	24.00	-0.70	Pass	16
11a	6Mbps	1	44	5220	0.09	15.81	24.00	-0.70	Pass	16
11a	6Mbps	1	48	5240	0.09	15.98	24.00	-0.70	Pass	16
HT20	MCS0	1	36	5180	0.08	15.82	24.00	-0.70	Pass	16
HT20	MCS0	1	44	5220	0.08	15.65	24.00	-0.70	Pass	16
HT20	MCS0	1	48	5240	0.08	15.74	24.00	-0.70	Pass	16
HT40	MCS0	1	38	5190	0.16	13.75	24.00	-0.70	Pass	12.5
HT40	MCS0	1	46	5230	0.16	16.45	24.00	-0.70	Pass	16
VHT20	MCS0	1	36	5180	0.08	15.85	24.00	-0.70	Pass	16
VHT20	MCS0	1	44	5220	0.08	15.67	24.00	-0.70	Pass	16
VHT20	MCS0	1	48	5240	0.08	15.79	24.00	-0.70	Pass	16
VHT40	MCS0	1	38	5190	0.16	13.81	24.00	-0.70	Pass	12.5
VHT40	MCS0	1	46	5230	0.16	16.48	24.00	-0.70	Pass	16
VHT80	MCS0	1	42	5210	0.33	13.75	24.00	-0.70	Pass	13

<5260 MHz ~ 5320 MHz>											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
					Ant 1	Ant 1	Ant 1	Ant 1			Ant 1
11a	6Mbps	1	52	5260	0.09	16.12	23.65	-0.80	30	Pass	16
11a	6Mbps	1	60	5300	0.09	16.16	23.65	-0.80	30	Pass	16
11a	6Mbps	1	64	5320	0.09	16.21	23.67	-0.80	30	Pass	16
HT20	MCS0	1	52	5260	0.08	15.87	23.97	-0.80	30	Pass	16
HT20	MCS0	1	60	5300	0.08	16.00	23.97	-0.80	30	Pass	16
HT20	MCS0	1	64	5320	0.08	16.01	23.98	-0.80	30	Pass	16
HT40	MCS0	1	54	5270	0.16	17.00	23.98	-0.80	30	Pass	16
HT40	MCS0	1	62	5310	0.16	14.07	23.98	-0.80	30	Pass	13
VHT20	MCS0	1	52	5260	0.08	15.90	23.97	-0.80	30	Pass	16
VHT20	MCS0	1	60	5300	0.08	16.04	23.97	-0.80	30	Pass	16
VHT20	MCS0	1	64	5320	0.08	16.06	23.98	-0.80	30	Pass	16
VHT40	MCS0	1	54	5270	0.16	17.02	23.98	-0.80	30	Pass	16
VHT40	MCS0	1	62	5310	0.16	14.12	23.98	-0.80	30	Pass	13
VHT80	MCS0	1	58	5290	0.33	11.67	23.98	-0.80	30	Pass	10.5



<5500 MHz ~ 5720 MHz											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
					Ant 1			Ant 1			Ant 1
11a	6Mbps	1	100	5500	0.09	15.68	23.70	-1.20	30	Pass	16
11a	6Mbps	1	116	5580	0.09	15.85	23.72	-1.20	30	Pass	16
11a	6Mbps	1	140	5700	0.09	16.04	23.70	-1.20	30	Pass	16
HT20	MCS0	1	100	5500	0.08	15.52	23.98	-1.20	30	Pass	16
HT20	MCS0	1	116	5580	0.08	15.60	23.94	-1.20	30	Pass	16
HT20	MCS0	1	140	5700	0.08	15.87	23.98	-1.20	30	Pass	16
HT40	MCS0	1	102	5510	0.16	15.12	23.98	-1.20	30	Pass	14.5
HT40	MCS0	1	110	5550	0.16	16.54	23.98	-1.20	30	Pass	16
HT40	MCS0	1	134	5670	0.16	16.68	23.98	-1.20	30	Pass	16
VHT20	MCS0	1	100	5500	0.08	15.55	23.98	-1.20	30	Pass	16
VHT20	MCS0	1	116	5580	0.08	15.65	23.94	-1.20	30	Pass	16
VHT20	MCS0	1	140	5700	0.08	15.91	23.98	-1.20	30	Pass	16
VHT40	MCS0	1	102	5510	0.16	15.17	23.98	-1.20	30	Pass	14.5
VHT40	MCS0	1	110	5550	0.16	16.58	23.98	-1.20	30	Pass	16
VHT40	MCS0	1	134	5670	0.16	16.71	23.98	-1.20	30	Pass	16
VHT80	MCS0	1	106	5530	0.33	13.07	23.98	-1.20	30	Pass	12.5
VHT80	MCS0	1	122	5610	0.33	15.19	23.98	-1.20	30	Pass	15

<5500 MHz ~ 5720 MHz straddle channel											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
					Ant 1			Ant 1			Ant 1
11a	6Mbps	1	144	5720	0.09	16.10	23.72	-1.20	30	Pass	16
HT20	MCS0	1	144	5720	0.08	15.92	23.98	-1.20	30	Pass	16
HT40	MCS0	1	142	5710	0.16	16.73	23.98	-1.20	30	Pass	16
VHT20	MCS0	1	144	5720	0.08	15.94	23.98	-1.20	30	Pass	16
VHT40	MCS0	1	142	5710	0.16	16.77	23.98	-1.20	30	Pass	16
VHT80	MCS0	1	138	5690	0.33	13.39	23.98	-1.20	30	Pass	13



<5745 MHz ~ 5825 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Power Setting
					Ant 1	Ant 1	Ant 1	Ant 1		Ant 1
11a	6Mbps	1	149	5745	0.09	16.42	30.00	-1.50	Pass	16
11a	6Mbps	1	157	5785	0.09	16.25	30.00	-1.50	Pass	16
11a	6Mbps	1	165	5825	0.09	16.11	30.00	-1.50	Pass	16
HT20	MCS0	1	149	5745	0.08	16.12	30.00	-1.50	Pass	16
HT20	MCS0	1	157	5785	0.08	16.06	30.00	-1.50	Pass	16
HT20	MCS0	1	165	5825	0.08	15.86	30.00	-1.50	Pass	16
HT40	MCS0	1	151	5755	0.16	17.02	30.00	-1.50	Pass	16
HT40	MCS0	1	159	5795	0.16	16.90	30.00	-1.50	Pass	16
VHT20	MCS0	1	149	5745	0.08	16.15	30.00	-1.50	Pass	16
VHT20	MCS0	1	157	5785	0.08	16.08	30.00	-1.50	Pass	16
VHT20	MCS0	1	165	5825	0.08	15.89	30.00	-1.50	Pass	16
VHT40	MCS0	1	151	5755	0.16	17.07	30.00	-1.50	Pass	16
VHT40	MCS0	1	159	5795	0.16	16.92	30.00	-1.50	Pass	16
VHT80	MCS0	1	155	5775	0.33	15.75	30.00	-1.50	Pass	15

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

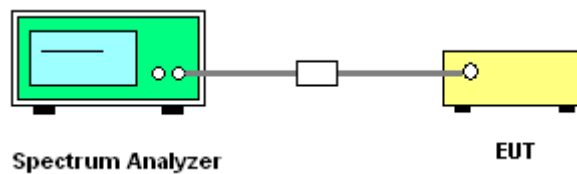

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log (d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

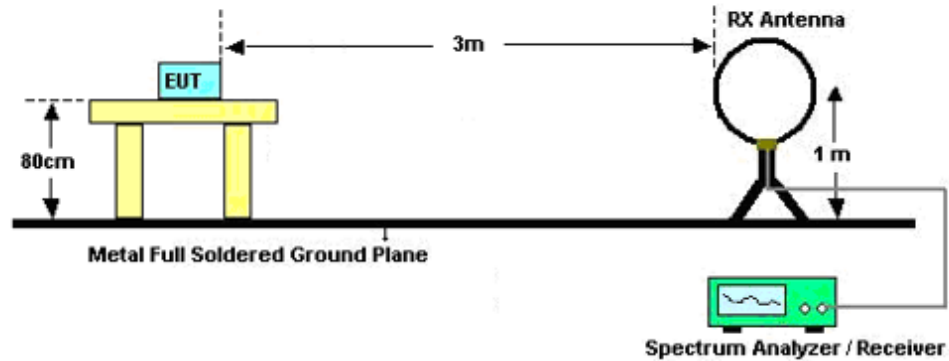

For radiated emissions from 30MHz to 1GHz

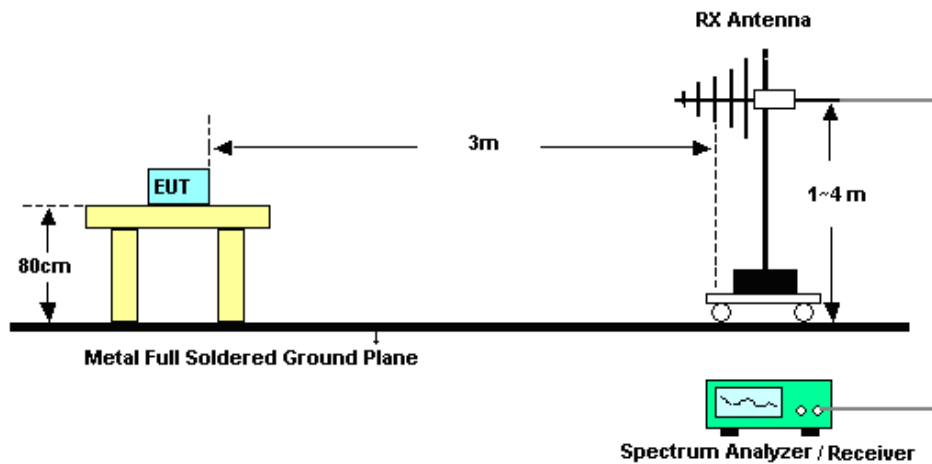

For radiated emissions above 1GHz

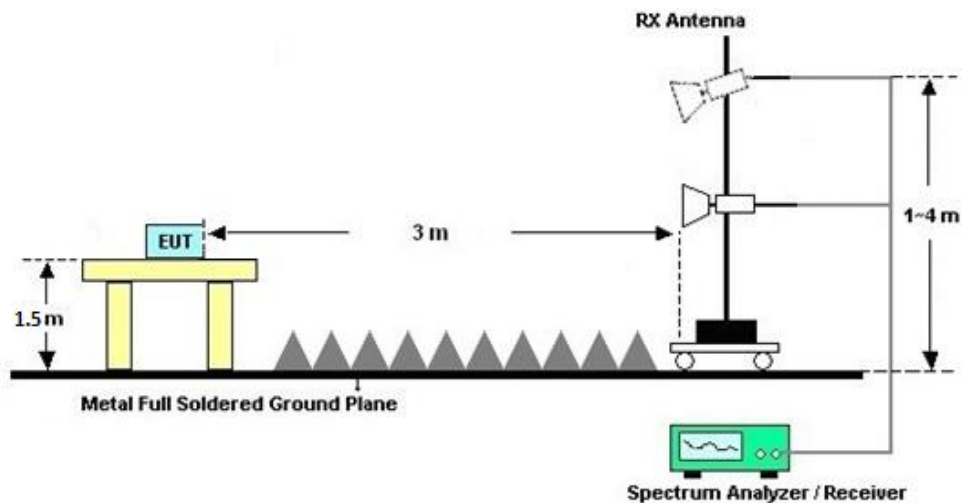

**3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

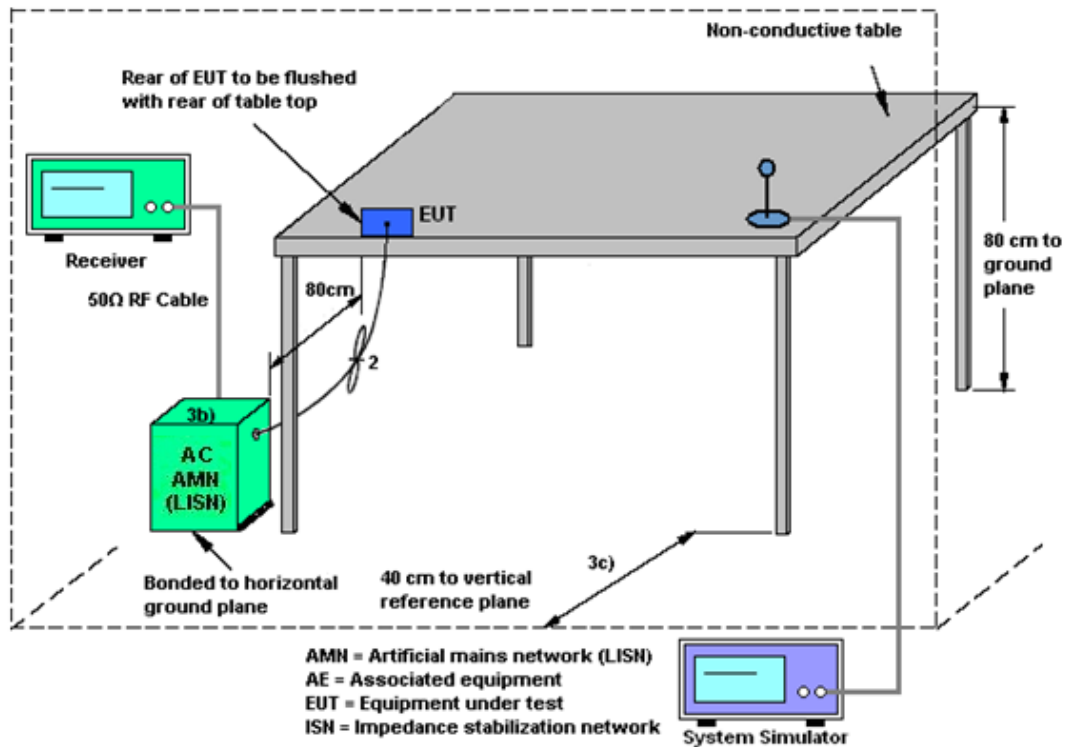

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Ma x 30dBm	Jan. 02, 2024	Aug. 05, 2024	Jan. 01, 2025	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57441079	10Hz~44GHz	Oct. 11, 2023	Aug. 05, 2024	Oct. 10, 2024	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 05, 2024	Sep. 10, 2024	Radiation (03CH08-KS)
Bilog Antenna	TESEQ	CBL 6111D	59915	30MHz~1GHz	Aug. 19, 2023	Aug. 05, 2024	Aug. 18, 2024	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Mar. 01, 2024	Aug. 05, 2024	Feb. 28, 2025	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz~18Ghz	Jan. 03, 2024	Aug. 05, 2024	Jan. 02, 2025	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Aug. 05, 2024	Jan. 26, 2025	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz~1GHz	Jan. 02, 2024	Aug. 05, 2024	Jan. 01, 2025	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270417	500MHz~26.5G Hz	Oct. 11, 2023	Aug. 05, 2024	Oct. 10, 2024	Radiation (03CH08-KS)
Amplifier	EM	EM18G40GGA	060728	18~40GHz	Jan. 02, 2024	Aug. 05, 2024	Jan. 01, 2025	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Aug. 05, 2024	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Aug. 05, 2024	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Aug. 05, 2024	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr 18, 2024	Jul. 28, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Jul. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Jul. 28, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Jul. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 08, 2024~Aug. 28, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Aug. 08, 2024~Aug. 28, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Aug. 08, 2024~Aug. 28, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 08, 2024~Aug. 28, 2024	Jul. 03, 2025	Conducted (TH01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.40 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH

According Standard: ■Part15E

Test Date: 2024/8/8~2024/8/28

Test Engineer: Jacob Zhang


Emission Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	23.39	5169.02	5192.41	---	---
		5220	23.01	5208.64	5231.65	---	---
		5240	23.30	5228.88	5252.17	---	---
		5260	23.77	5248.59	5272.36	---	---
		5300	23.44	5288.92	5312.36	---	---
		5320	24.06	5308.30	5332.36	---	---
		5500	24.01	5488.35	5512.36	---	---
		5580	23.87	5568.54	5592.41	---	---
		5700	23.87	5688.54	5712.41	---	---
		5720	23.68	5708.73	5732.41	---	---
		5745	23.77	5733.64	5757.41	---	---
		5785	24.11	5773.26	5797.36	---	---
11AC20SISO	Ant1	5825	24.30	5813.07	5837.36	---	---
		5180	24.11	5168.11	5192.22	---	---
		5220	23.63	5208.16	5231.79	---	---
		5240	23.39	5228.45	5251.84	---	---
		5260	24.34	5247.49	5271.84	---	---
		5300	24.39	5287.45	5311.84	---	---
		5320	23.30	5308.35	5331.65	---	---
		5500	24.34	5487.45	5511.79	---	---
		5580	24.34	5567.45	5591.79	---	---
		5700	24.34	5687.49	5711.84	---	---
		5720	24.30	5707.92	5732.22	---	---
		5745	24.30	5732.45	5756.74	---	---
11AC40SISO	Ant1	5785	23.87	5772.88	5796.74	---	---
		5825	23.44	5813.45	5836.89	---	---
		5190	41.83	5169.28	5211.11	---	---
		5230	42.59	5208.99	5251.58	---	---
		5270	42.21	5248.89	5291.11	---	---
		5310	42.50	5288.89	5331.39	---	---
		5510	42.78	5488.89	5531.68	---	---
		5550	41.92	5528.89	5570.82	---	---
		5670	41.92	5648.99	5690.91	---	---
		5710	42.69	5688.80	5731.49	---	---
11AC80SISO	Ant1	5755	41.73	5733.99	5775.72	---	---
		5795	42.69	5773.61	5816.30	---	---
		5210	88.42	5165.69	5254.12	---	---
		5290	88.61	5245.69	5334.31	---	---
		5530	95.09	5481.50	5576.59	---	---
		5610	93.95	5562.26	5656.21	---	---
	Ant1	5690	90.14	5645.88	5736.02	---	---
		5775	101.38	5730.31	5831.69	---	---





Test Graphs

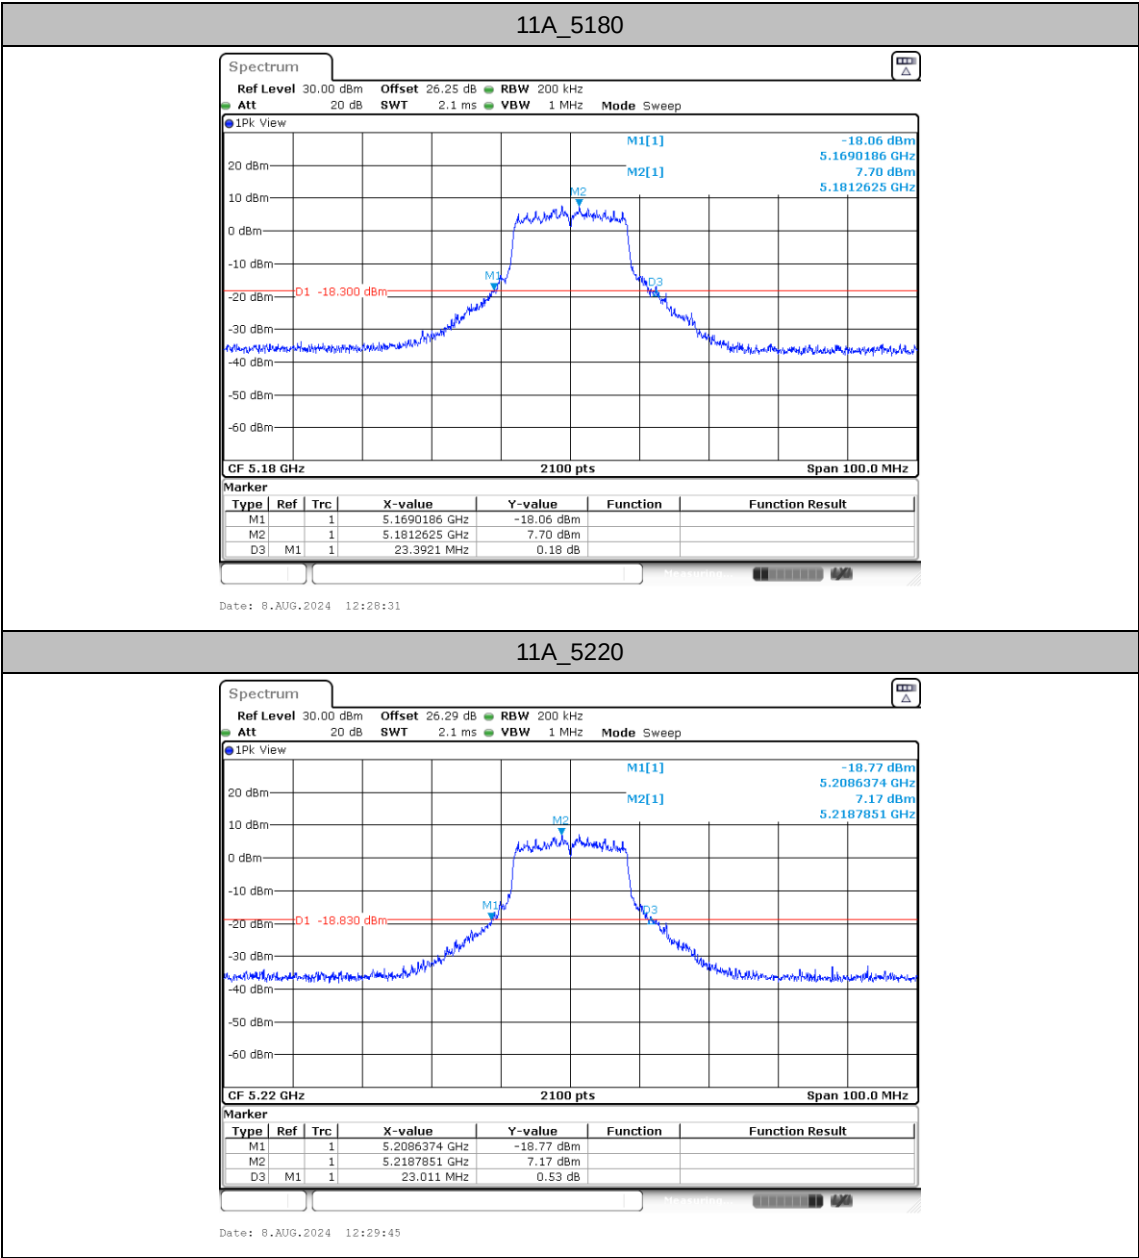


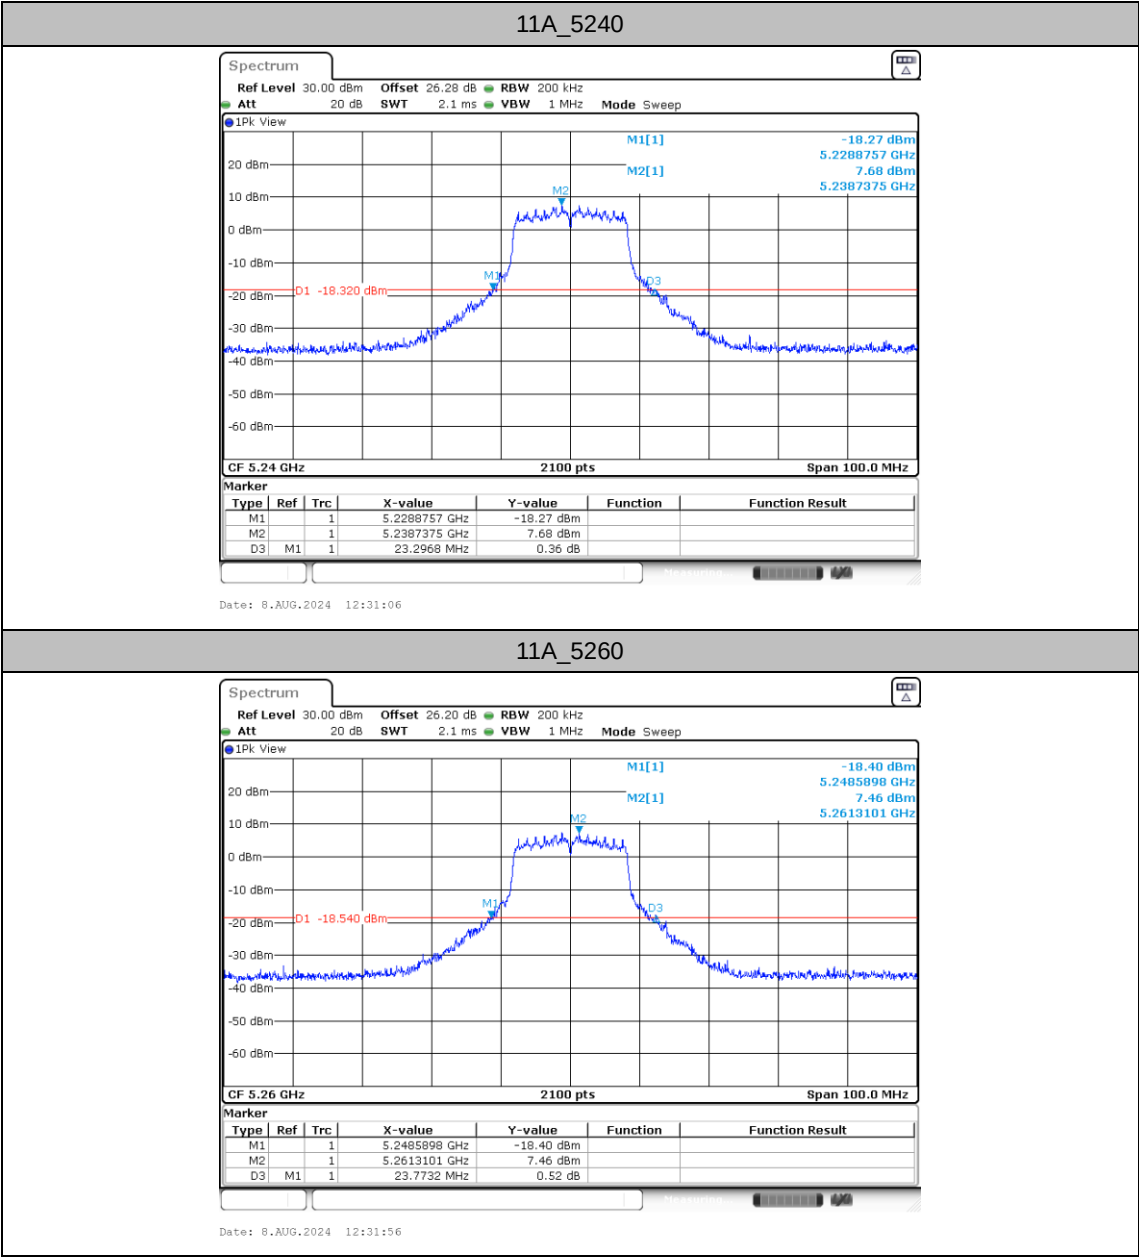


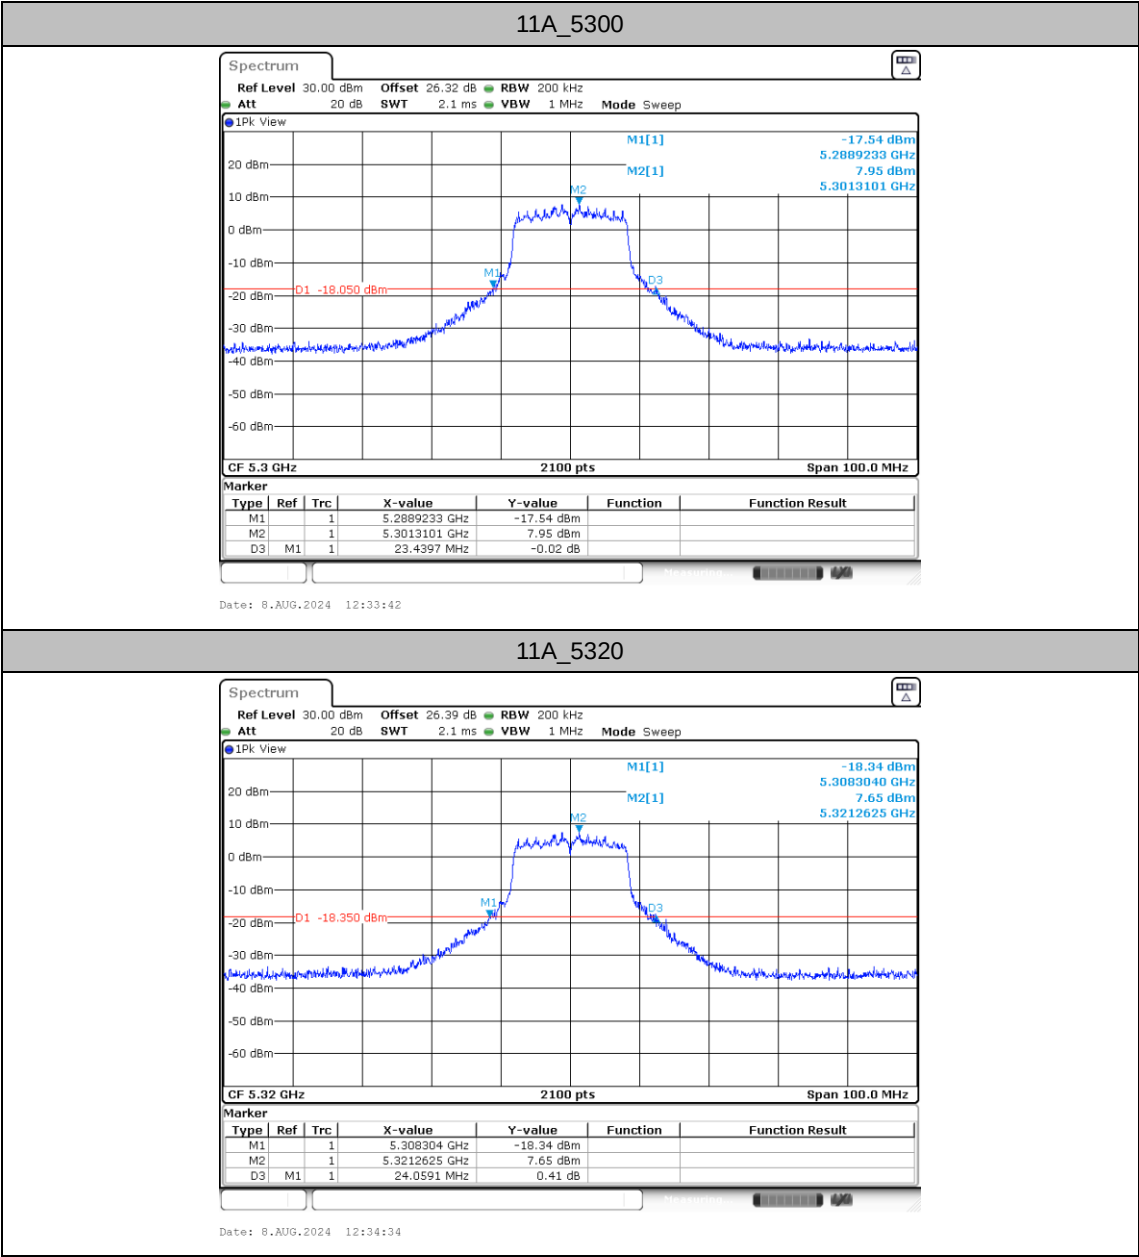


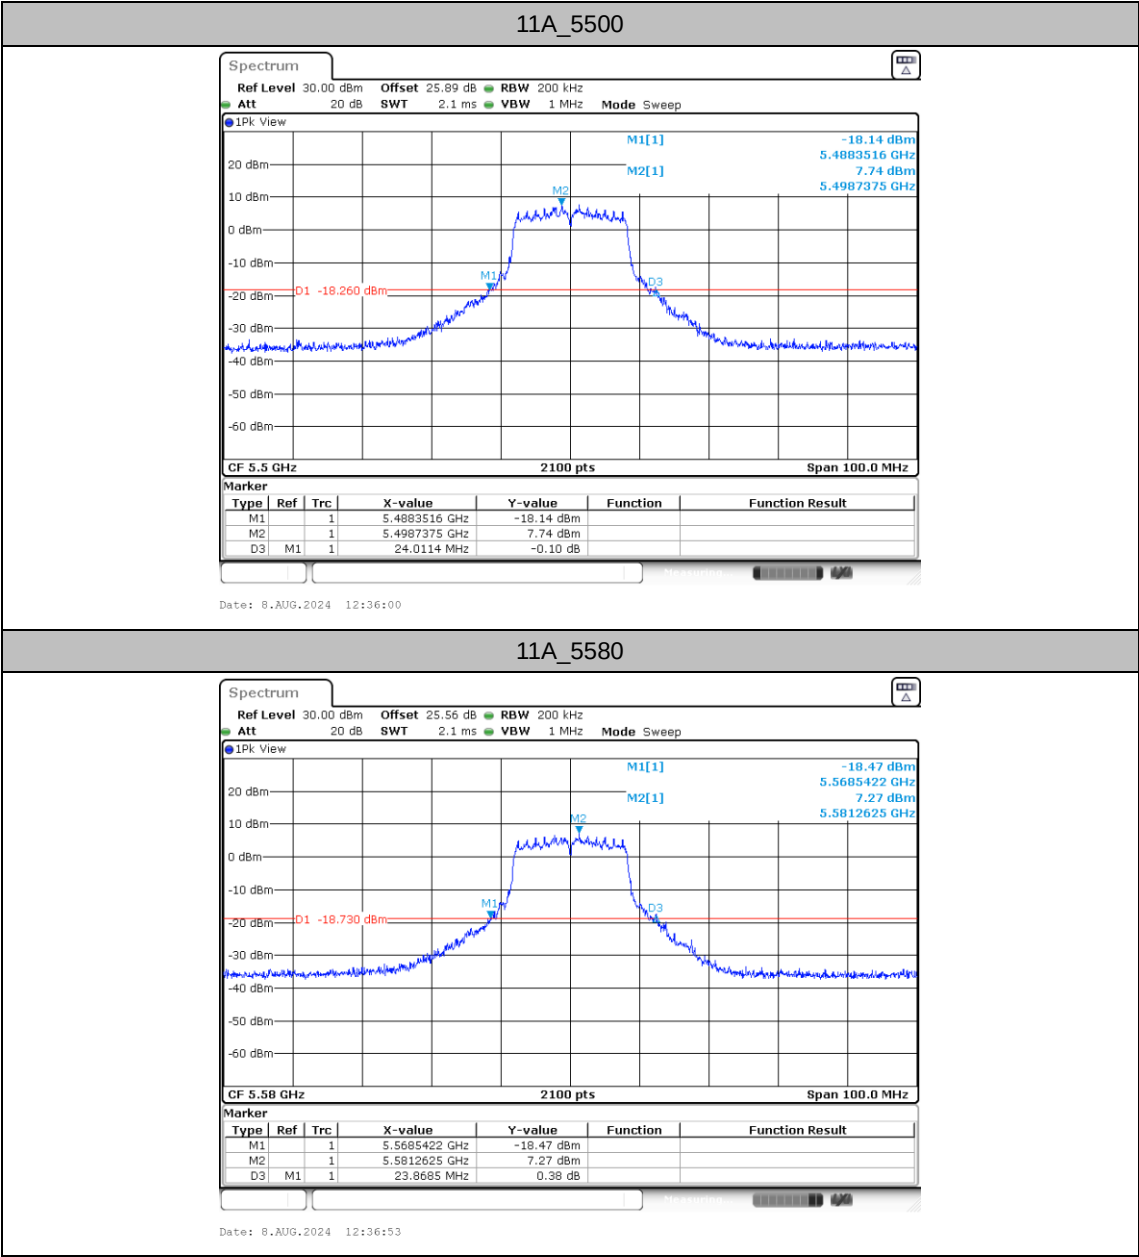


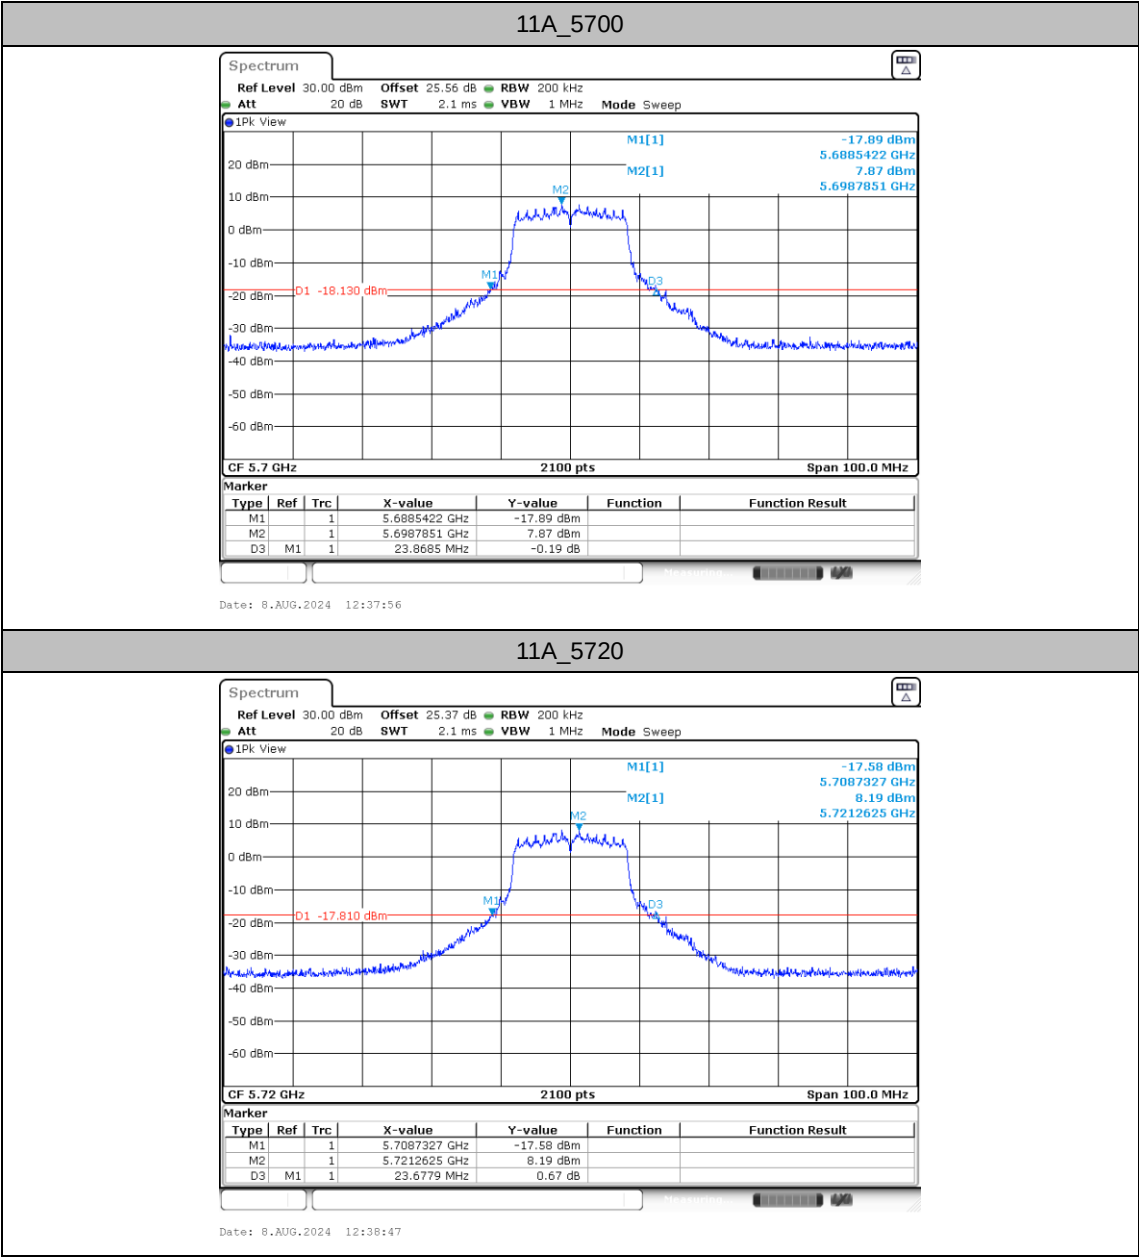


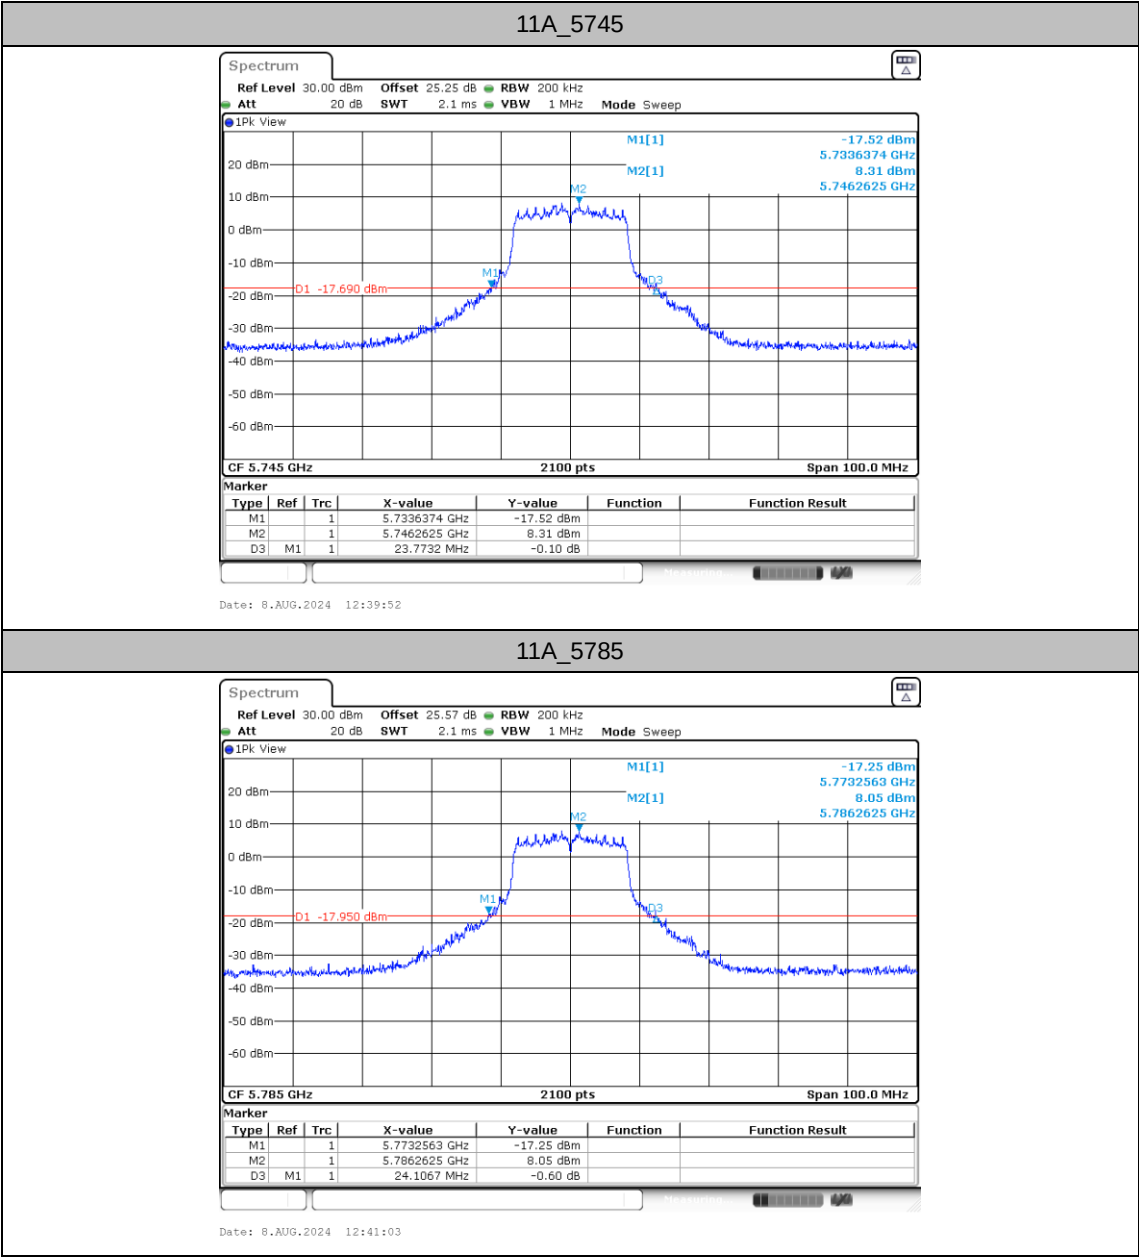


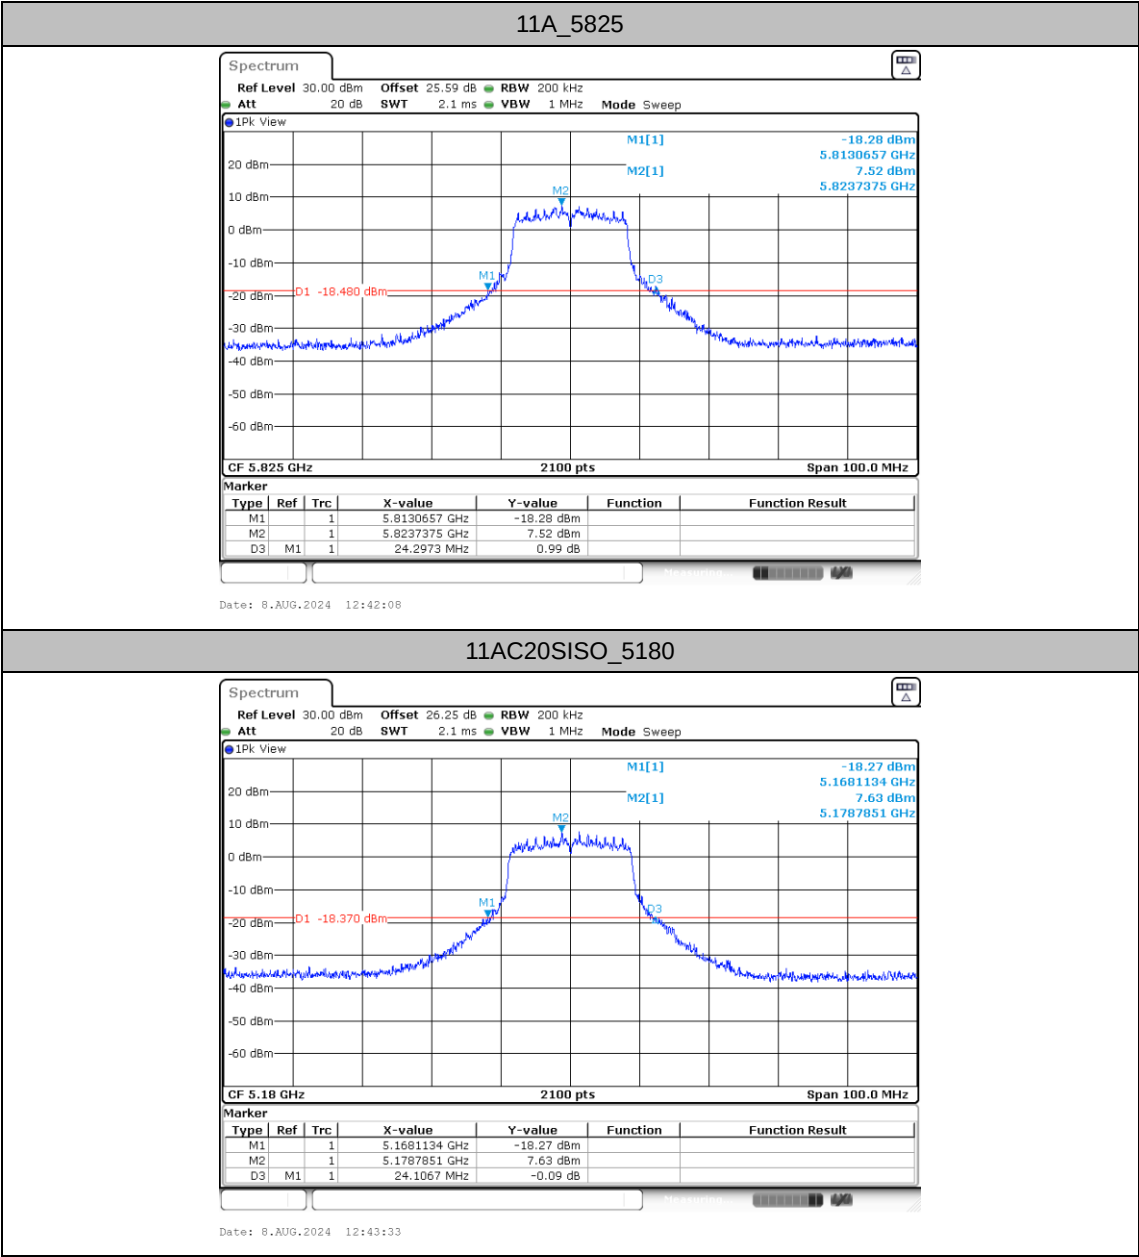


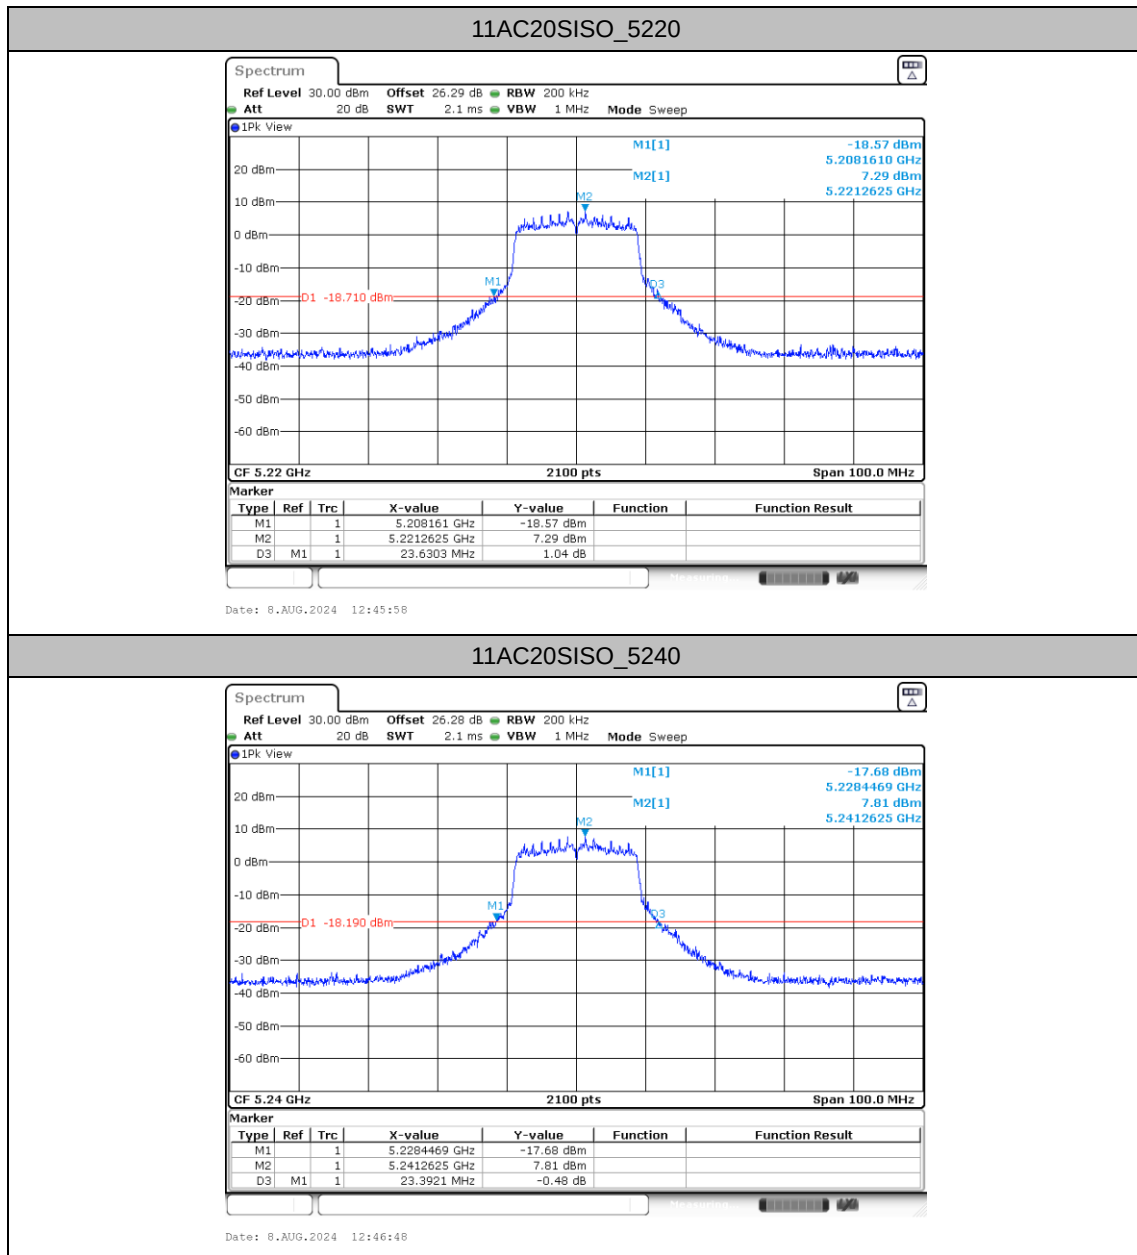


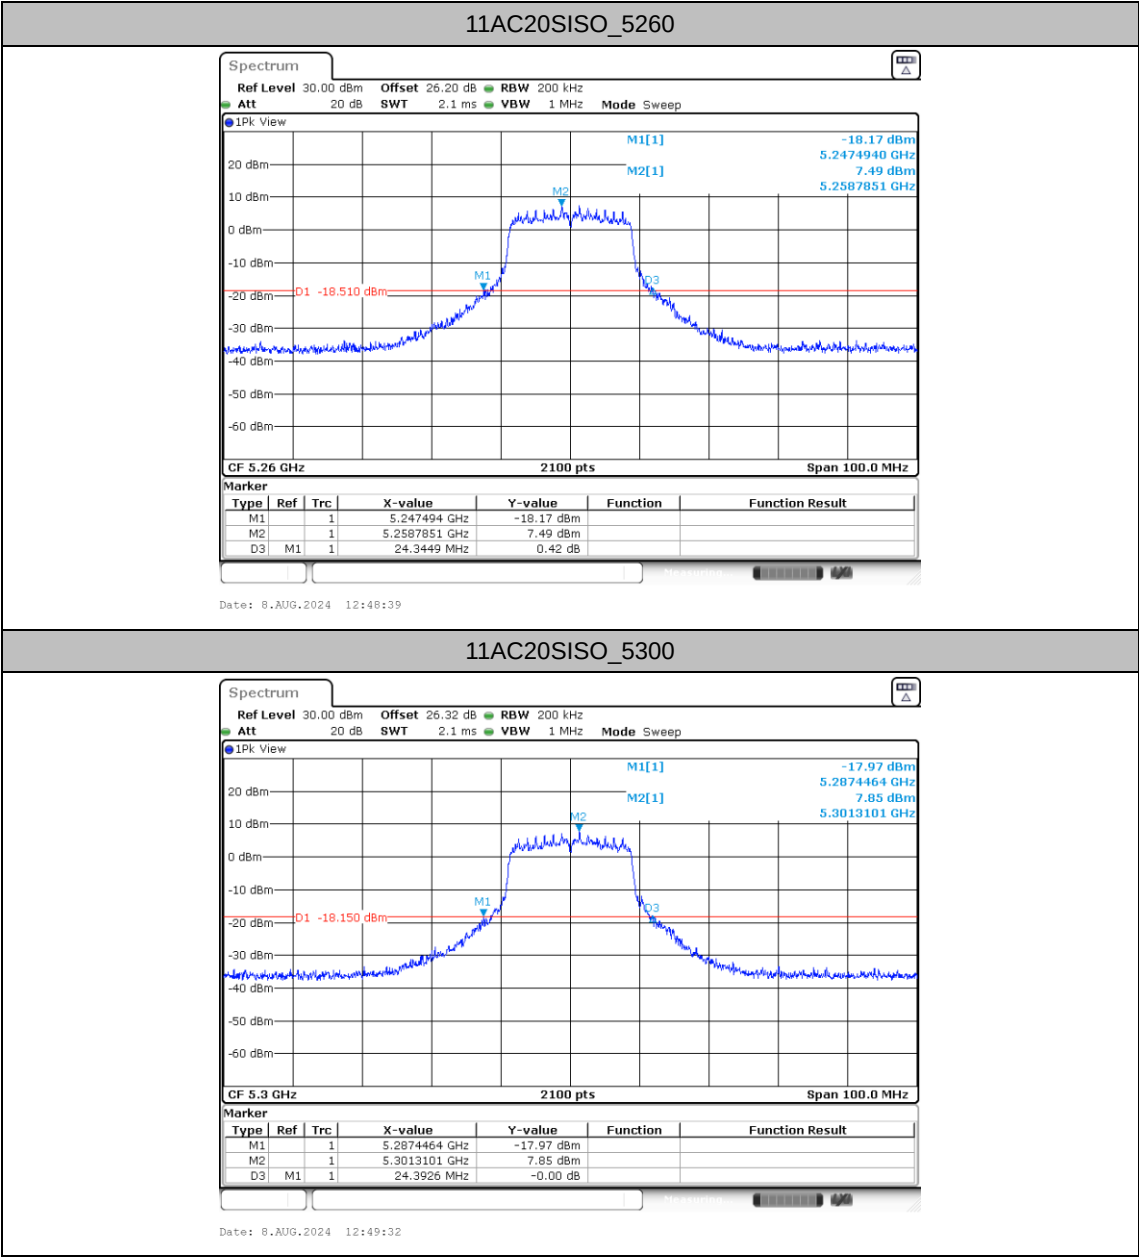


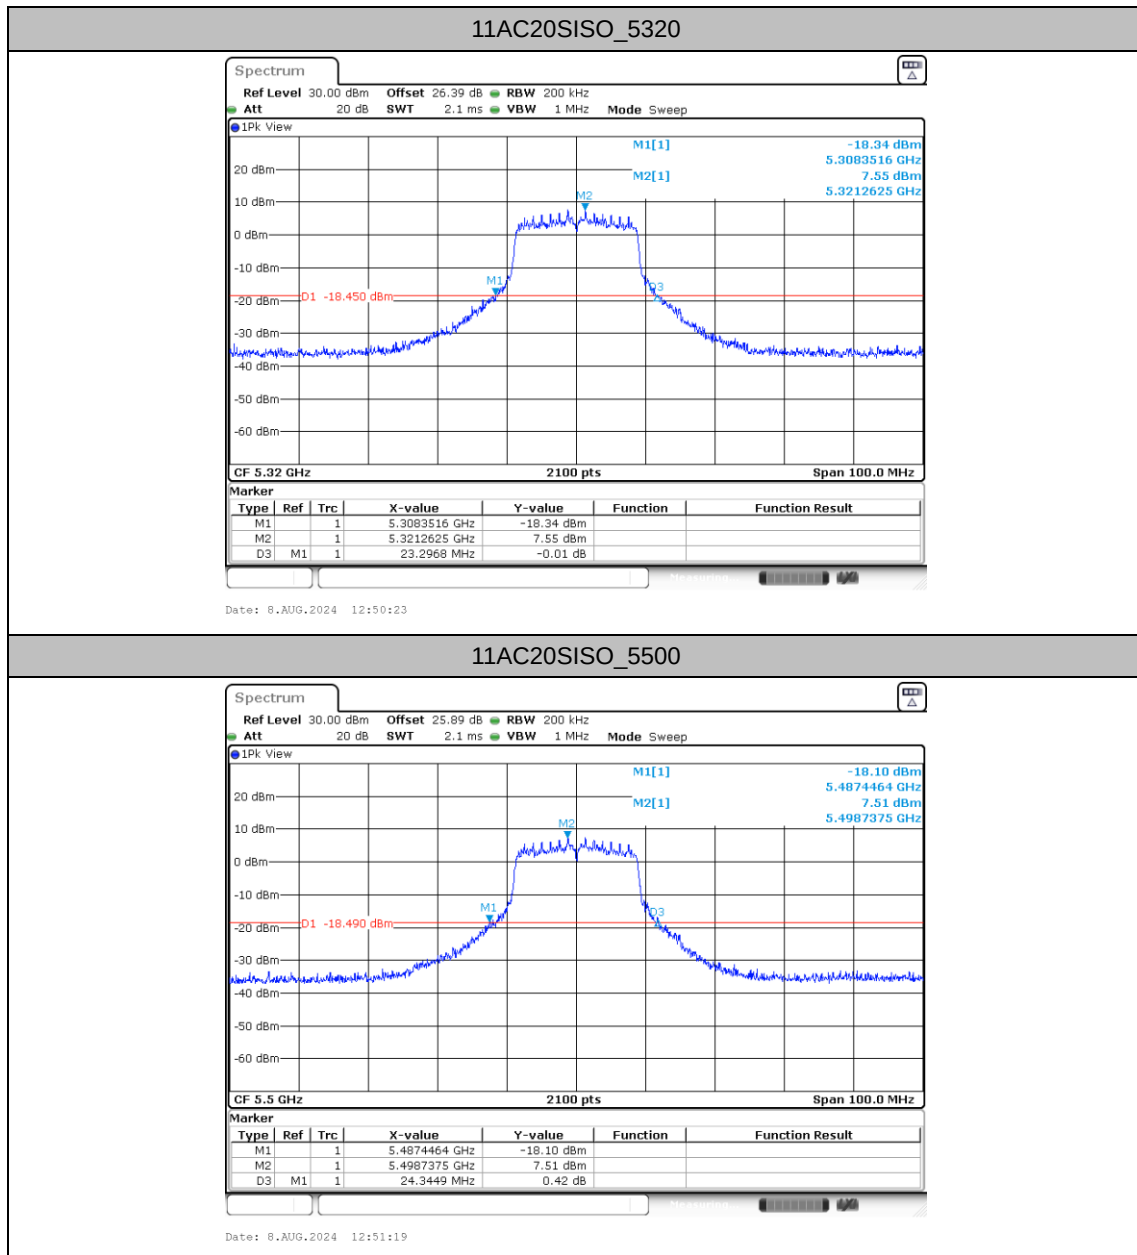


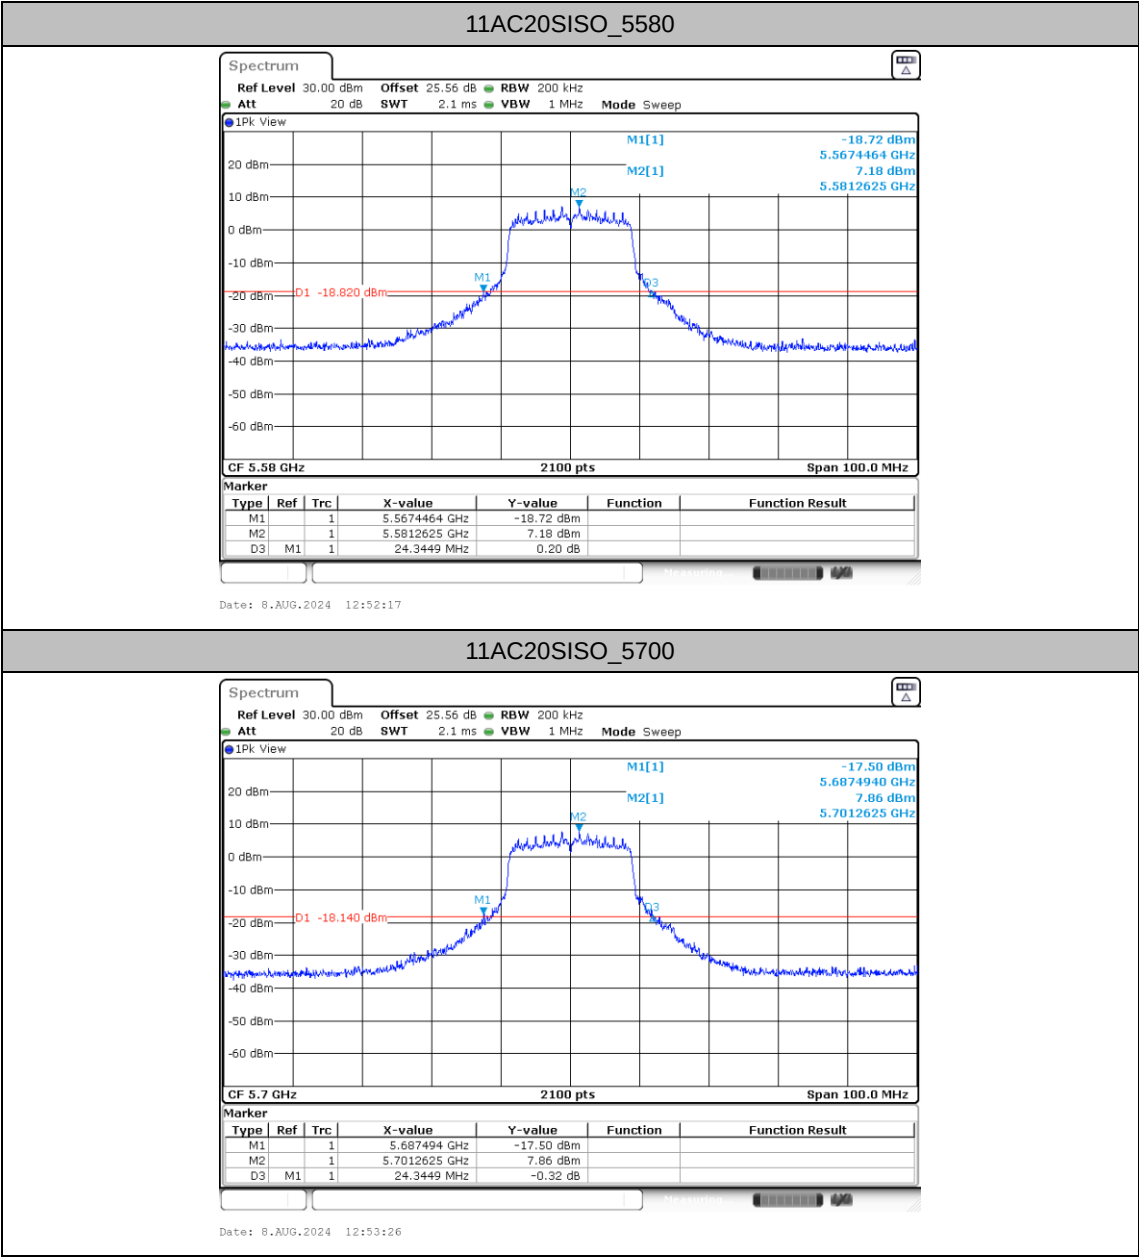


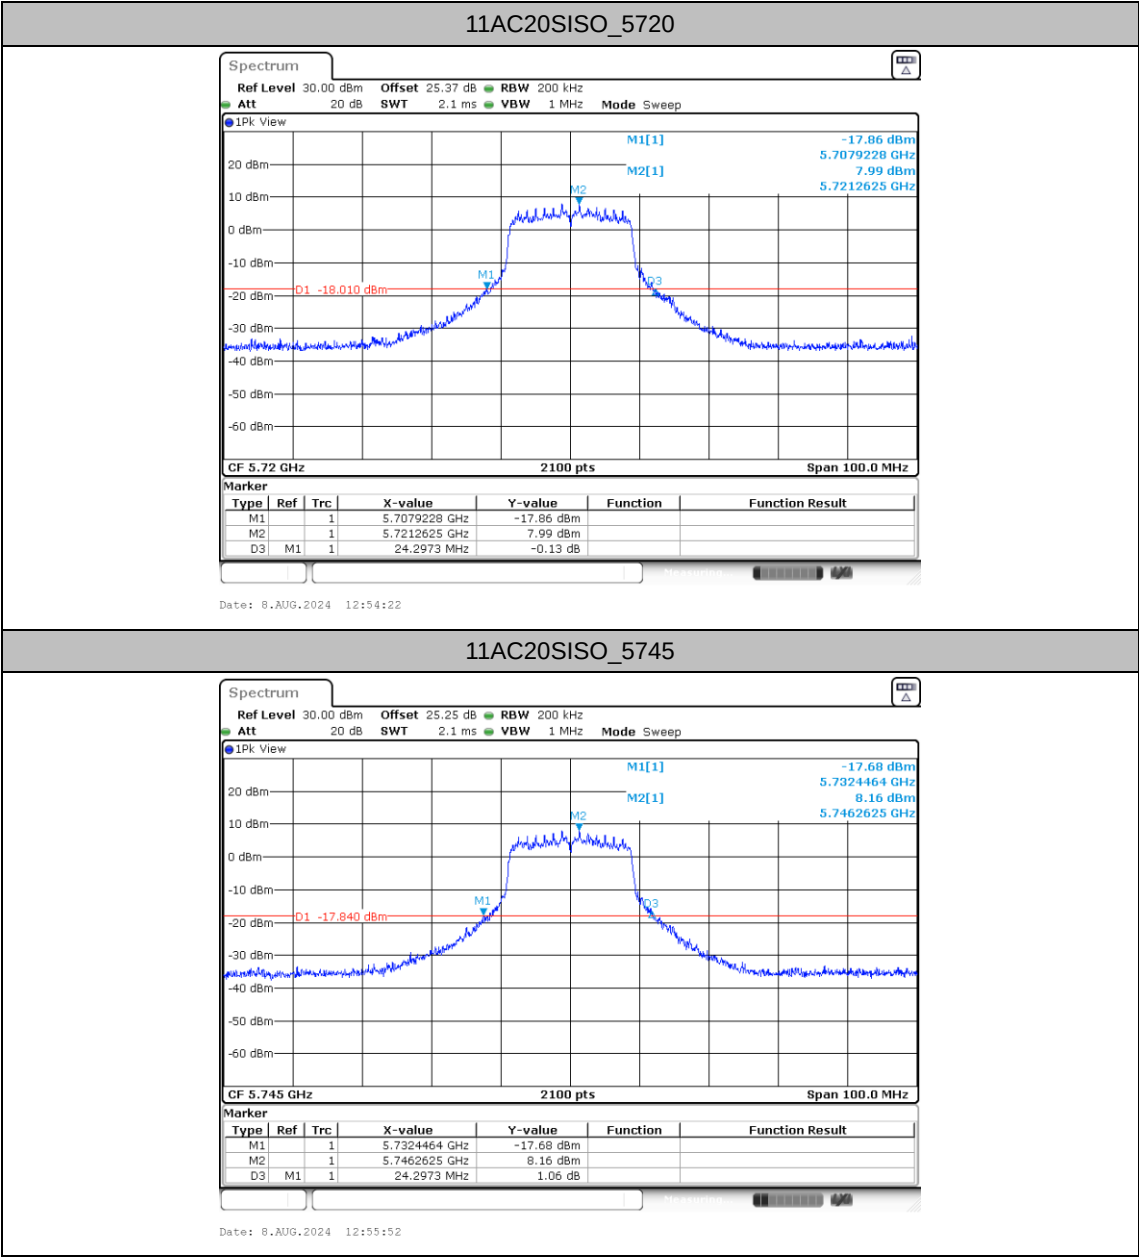


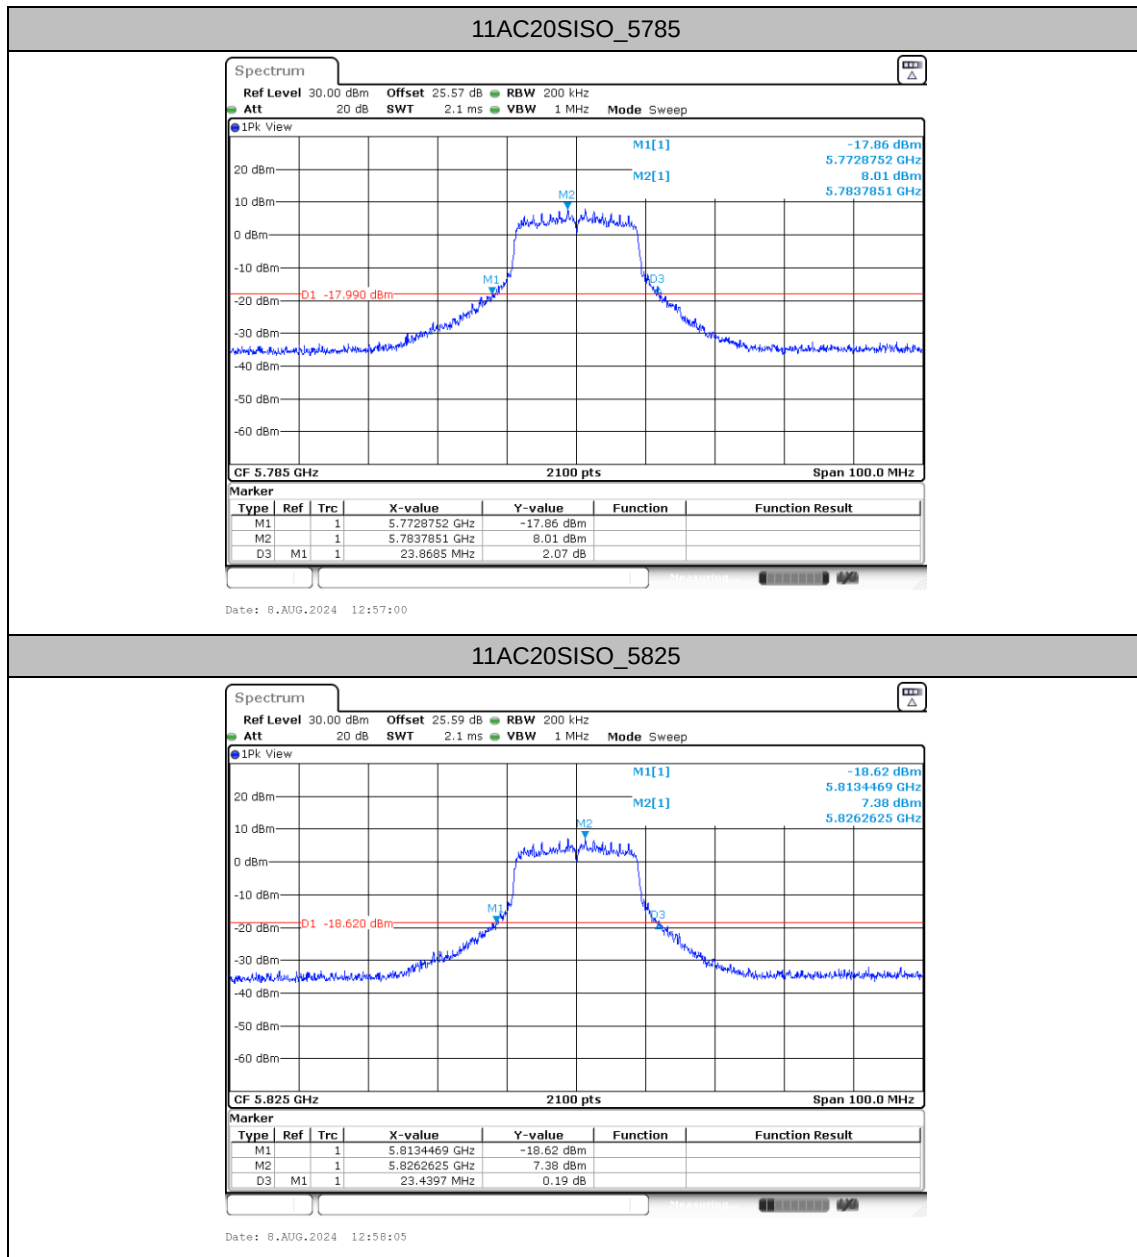


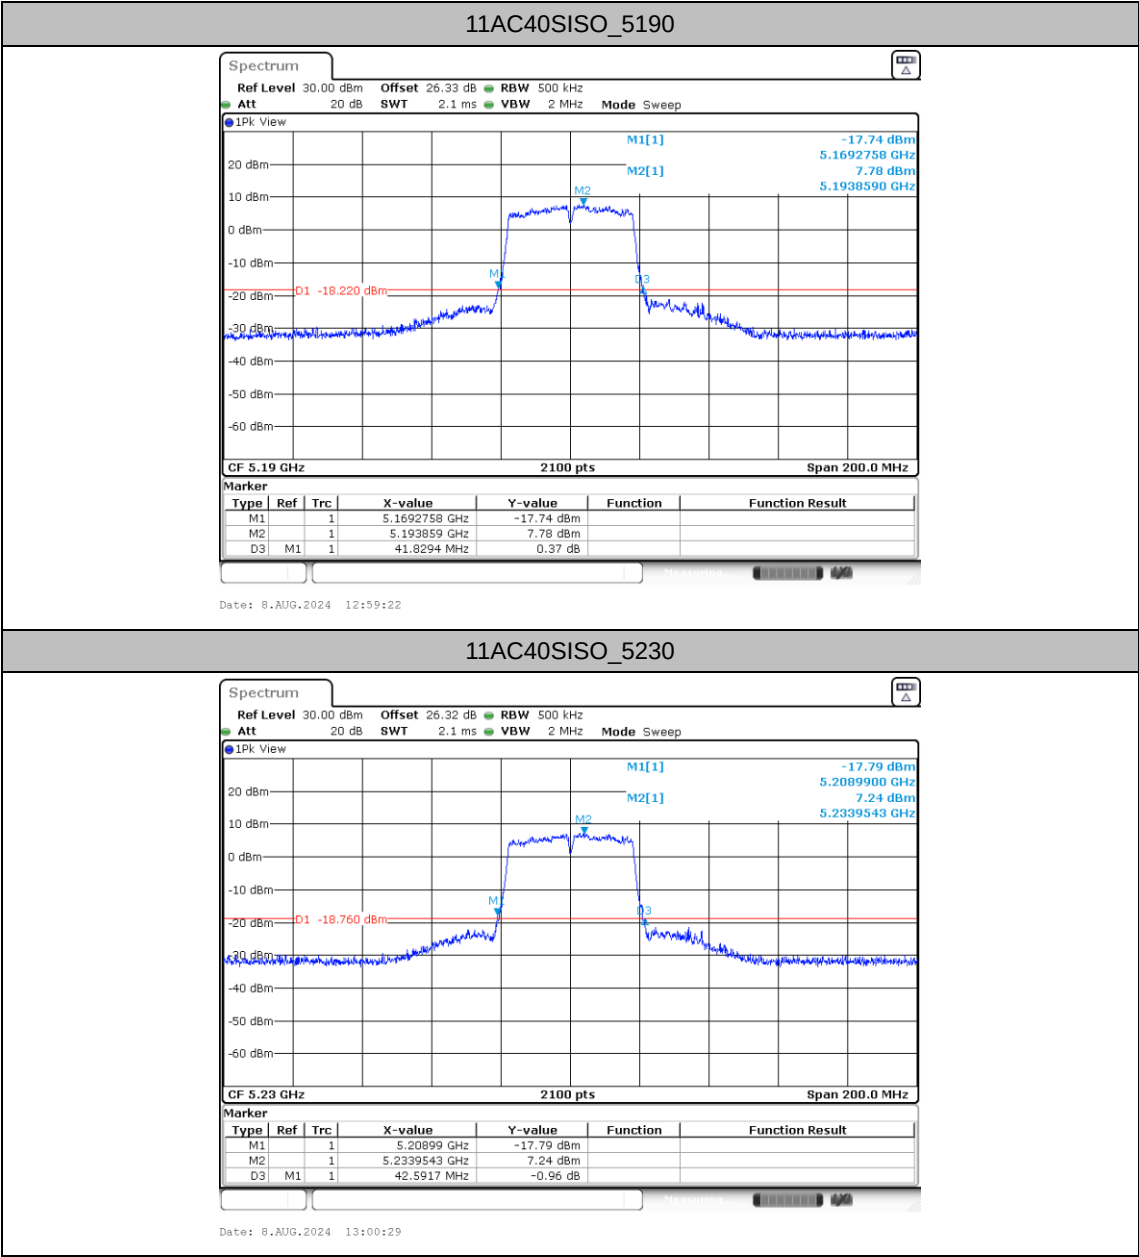


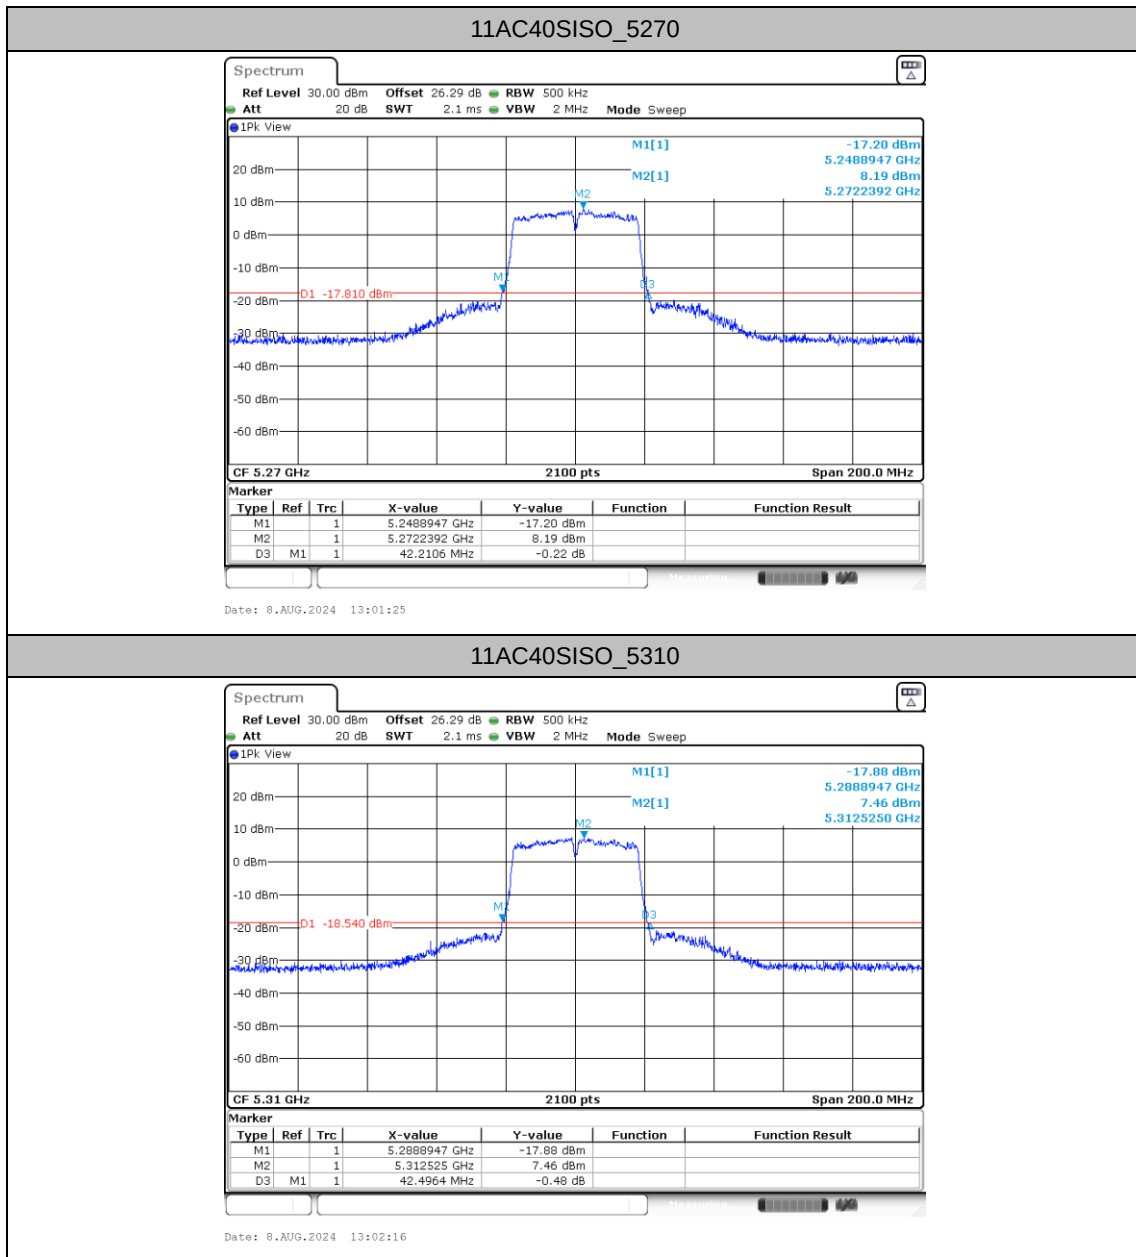


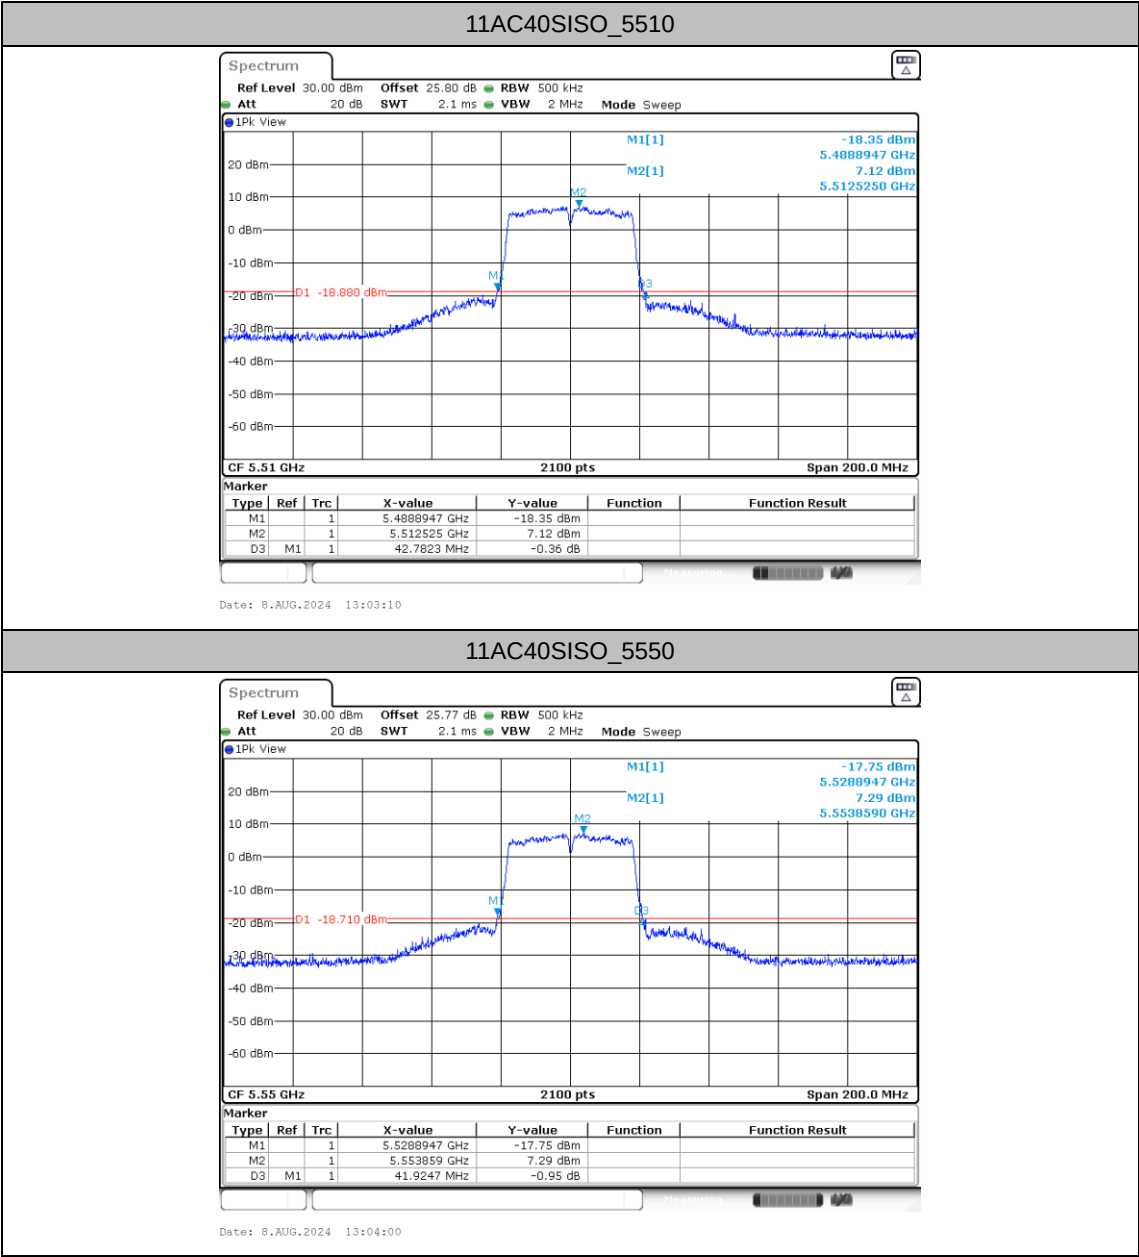

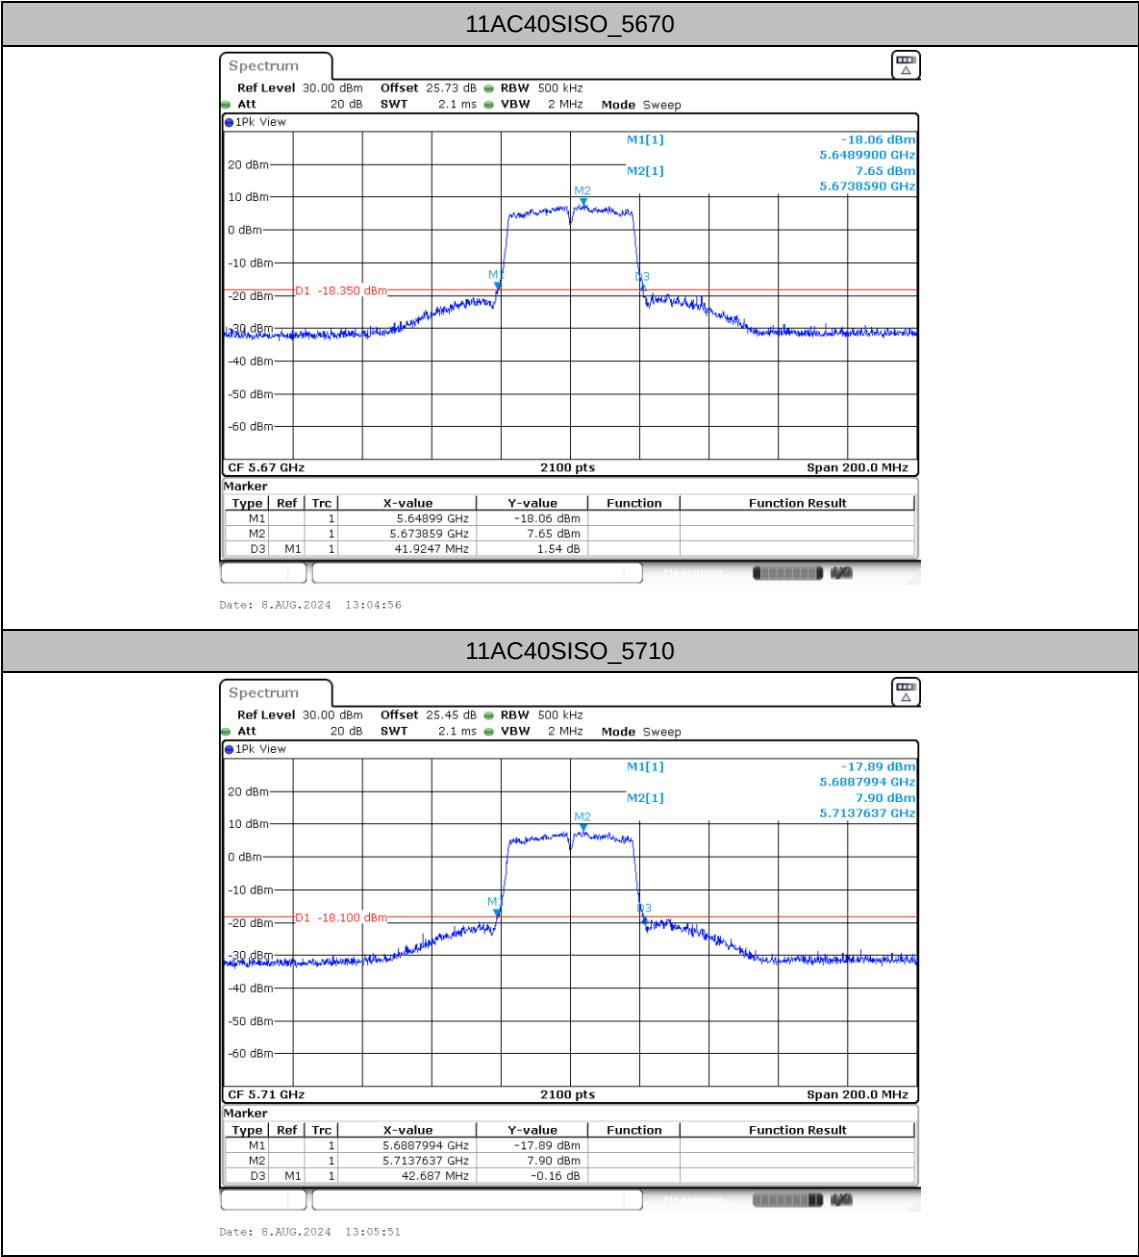

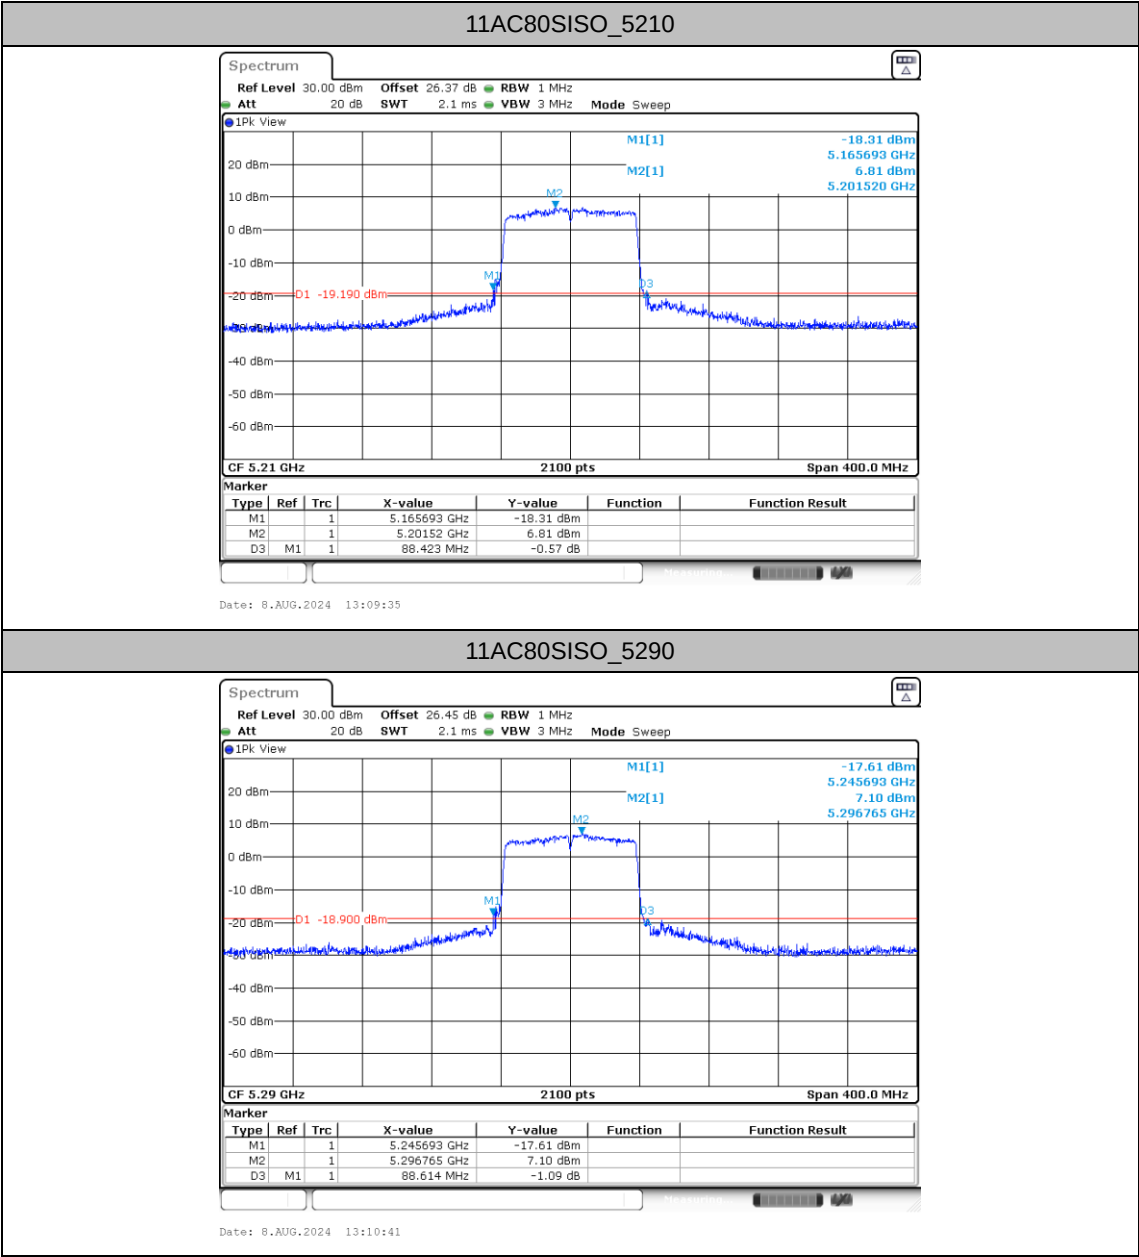

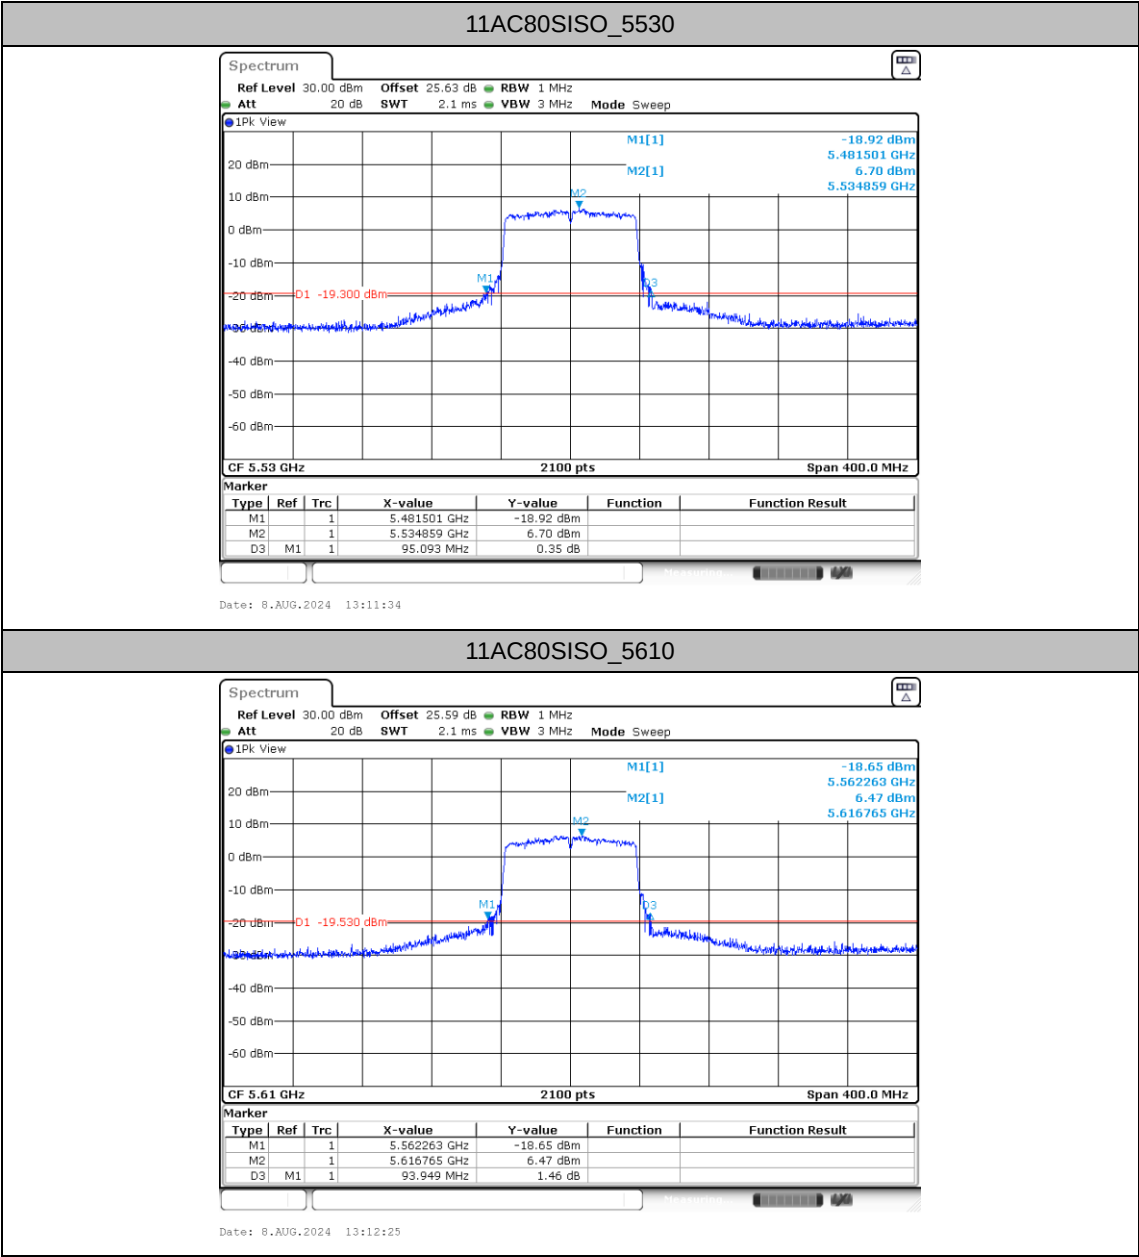

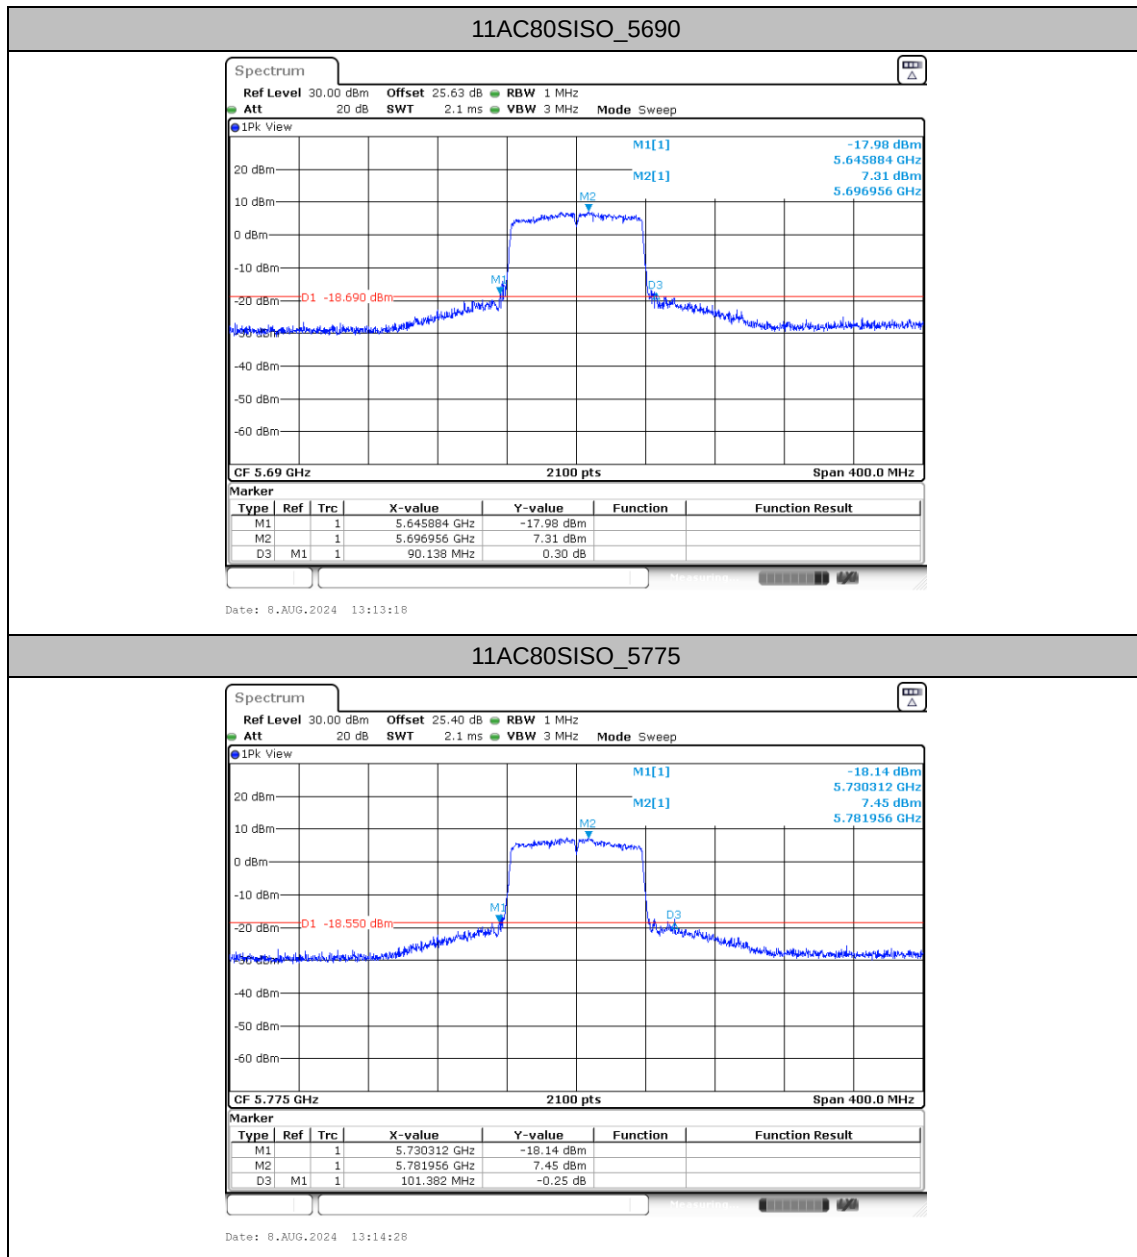



Occupied channel bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	17.181	5171.4571	5188.6381	---	---
		5220	17.219	5211.4000	5228.6190	---	---
		5240	17.162	5231.4381	5248.6000	---	---
		5260	17.2	5251.3810	5268.5810	---	---
		5300	17.143	5291.4381	5308.5810	---	---
		5320	17.219	5311.3810	5328.6000	---	---
		5500	17.2	5491.3619	5508.5619	---	---
		5580	17.162	5571.4381	5588.6000	---	---
		5700	17.257	5691.4000	5708.6571	---	---
		5720	17.219	5711.4000	5728.6190	---	---
		5745	17.238	5736.3810	5753.6190	---	---
		5785	17.257	5776.3429	5793.6000	---	---
11AC20SISO	Ant1	5825	17.219	5816.4000	5833.6190	---	---
		5180	18.343	5170.8857	5189.2286	---	---
		5220	18.343	5210.8667	5229.2095	---	---
		5240	18.286	5230.9048	5249.1905	---	---
		5260	18.324	5250.8476	5269.1714	---	---
		5300	18.267	5290.9048	5309.1714	---	---
		5320	18.324	5310.8667	5329.1905	---	---
		5500	18.305	5490.8476	5509.1524	---	---
		5580	18.305	5570.8857	5589.1905	---	---
		5700	18.343	5690.8857	5709.2286	---	---
		5720	18.324	5710.8857	5729.2095	---	---
		5745	18.324	5735.8667	5754.1905	---	---
11AC40SISO	Ant1	5785	18.343	5775.8476	5794.1905	---	---
		5825	18.324	5815.8857	5834.2095	---	---
		5190	36.533	5171.8095	5208.3429	---	---
		5230	36.571	5211.7714	5248.3429	---	---
		5270	36.61	5251.7333	5288.3429	---	---
		5310	36.533	5291.7714	5328.3048	---	---
		5510	36.533	5491.7333	5528.2667	---	---
		5550	36.533	5531.7714	5568.3048	---	---
		5670	36.571	5651.7714	5688.3429	---	---
		5710	36.61	5691.7714	5728.3810	---	---
11AC80SISO	Ant1	5755	36.61	5736.7333	5773.3429	---	---
		5795	36.571	5776.7333	5813.3048	---	---
		5210	76.114	5172.0952	5248.2095	---	---
		5290	76.19	5251.9429	5328.1333	---	---
		5530	76.419	5491.8667	5568.2857	---	---
		5610	76.19	5571.9429	5648.1333	---	---
	Ant1	5690	76.19	5652.0190	5728.2095	---	---
		5775	76.19	5736.8667	5813.0571	---	---



Test Graphs

