



**FCC CFR47 PART 15 SUBPART E**

**CLASS II PERMISSIVE CHANGE  
TEST REPORT**

**FOR**

**802.11A/B MINI PCI CARD**

**MODEL NUMBER: PA3233U-1MPC**

**FCC ID: CJ6UPA3233WL**

**REPORT NUMBER: 03U2198-2**

**ISSUE DATE: OCTOBER 21, 2003**

*Prepared for*

**TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY  
2-9 SUEHIRO-CHO, OME  
TOKYO, 198-8710, JAPAN**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>3</b>
<b>2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE.....</b>	<b>4</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>5. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
5.1. MEASURING INSTRUMENT CALIBRATION .....	6
5.2. MEASUREMENT UNCERTAINTY .....	6
5.3. TEST AND MEASUREMENT EQUIPMENT.....	7
<b>6. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>8</b>
<b>7. APPLICABLE RULES AND TEST RESULTS .....</b>	<b>10</b>
7.1. RADIATED EMISSIONS.....	10
7.1.1. TRANSMITTER SPURIOUS EMISSIONS .....	10
7.1.2. TRANSMITTER SPURIOUS EMISSIONS ABOVE 1 GHZ.....	13
7.1.3. CO-LOCATED TRANSMITTER SPURIOUS EMISSIONS .....	31
7.1.4. WORST-CASE SPURIOUS EMISSIONS BELOW 1 GHZ.....	42
7.2. POWERLINE CONDUCTED EMISSIONS.....	46
<b>8. SETUP PHOTOS.....</b>	<b>50</b>

## 1. TEST RESULT CERTIFICATION

**COMPANY NAME:** TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY  
2-9 SUEHIRO-CHO, OME  
TOKYO, 198-8710, JAPAN

**EUT DESCRIPTION:** 802.11A/B MINI PCI CARD

**MODEL:** PA3233U-1MPC

**DATE TESTED:** OCTOBER 16 - 21, 2003

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART E	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

**Note:** The 5.2 GHz band is applicable to this report; another band of operation (2.4 GHz) is documented in a separate report.

Approved & Released For CCS By:

Tested By:



MIKE HECKROTTE  
CHIEF ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

VIEN TRAN  
EMC TECHNICIAN  
COMPLIANCE CERTIFICATION SERVICES

## 2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

The Class II Permissive Change is to add portable operation in the Toshiba Tablet PC, model PPM20U-AAAA2, including co-location with the Toshiba PA3232U-1BTM Bluetooth radio card.

The 802.11a/b WLAN transmitter has a maximum peak conducted output power as follows:

Frequency Band (MHz)	Mode	Output Power (mW)	Output Power (dBm)
5180 - 5320	802.11a	50.00	16.99

The WLAN radio utilizes two identical internal dipole antennas for diversity, with a maximum gain of 4.8 dBi.

The Bluetooth radio card has a modular approval, FCC ID: CJ6UPA3232BT. The Bluetooth radio utilizes a film antenna with a maximum gain of 1.22 dBi.

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/1992, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

### 4. FACILITIES AND ACCREDITATION

The open area test sites and conducted measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST AND MEASUREMENT EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due Date
EMI Test Receiver	R & S	ESHS 20	827129/006	7/17/2004
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	9/6/2004
Spectrum Analyzer	AGILENT	E4446A	US42070220	1/13/04
Pre-amplifier	MITEQ	NSP2600-SP	924341	4/25/04
Horn Antenna	EMCO	3115	6717	2/04/04
Power Meter	AGILENT	E4416A	0841291160	11/07/04
Power Sensor	Agilent	E9327A	US40440755	11/07/04
Antenna, Biconical	Eaton	94455-1	1214	3/06/04
Antenna, Log Periodic	EMCO	3146	9107-3163	3/06/04
Preamplifier	Miteq	NSP10023988	646456	4/26/04
7.6GHz HPF	Microwave	HP7600-9SS	NA	NCR

## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Device Type	Manufacturer	Model	Serial Number	FCC ID
<b>Laptop</b>	<b>Toshiba</b>	<b>PPM20U-AAAA2</b>	<b>93010025</b>	<b>DoC</b>
<b>AC adapter</b>	<b>Toshiba</b>	<b>ADP-60RH A</b>	<b>0394336</b>	<b>DoC</b>

### I/O CABLES


Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
<b>1</b>	<b>AC</b>	<b>1</b>	<b>US115</b>	<b>Unshielded</b>	<b>1.8m</b>	<b>No</b>
<b>2</b>	<b>DC</b>	<b>1</b>	<b>DC Jack</b>	<b>Unshielded</b>	<b>1.8m</b>	<b>No</b>

### TEST SETUP

The EUT is installed in the host laptop.



**SETUP DIAGRAM**

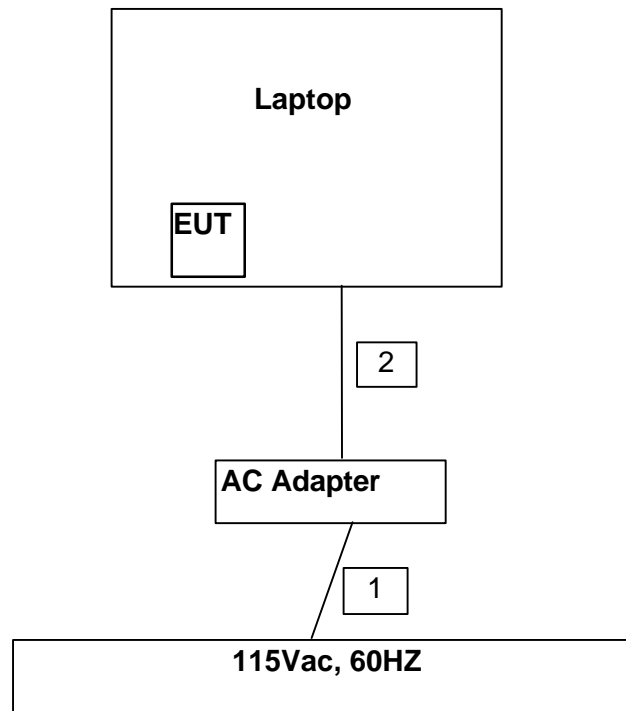

## 7. APPLICABLE RULES AND TEST RESULTS

### 7.1. RADIATED EMISSIONS

#### 7.1.1. TRANSMITTER SPURIOUS EMISSIONS

##### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


The configuration and orientation of the EUT was varied to determine the worst-case. The EUT was first configured as a typical laptop notebook PC resting on the turntable in a normal operating condition. It was then configured as a tablet PC, and evaluated in X, Y and Z orientations. The worst-case condition was observed with the EUT in the laptop configuration. Worst-case results are reported.


## **RESULTS**

No non-compliance noted:


## 7.1.2. TRANSMITTER SPURIOUS EMISSIONS ABOVE 1 GHZ


### RESTRICTED BANDEDGE (NORMAL MODE, LOW CHANNEL, HORIZONTAL)

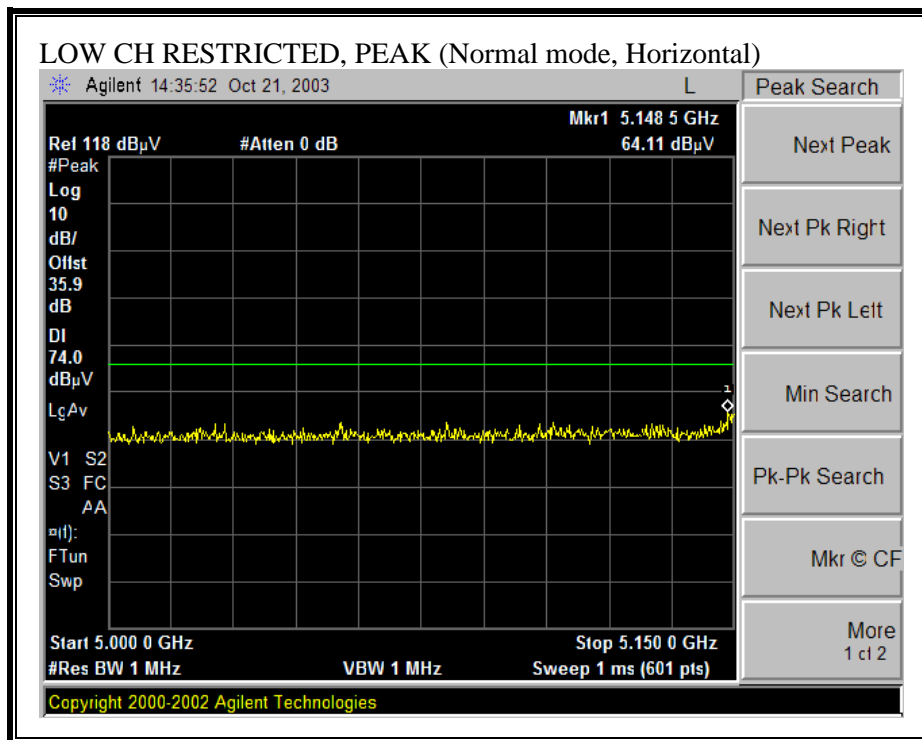

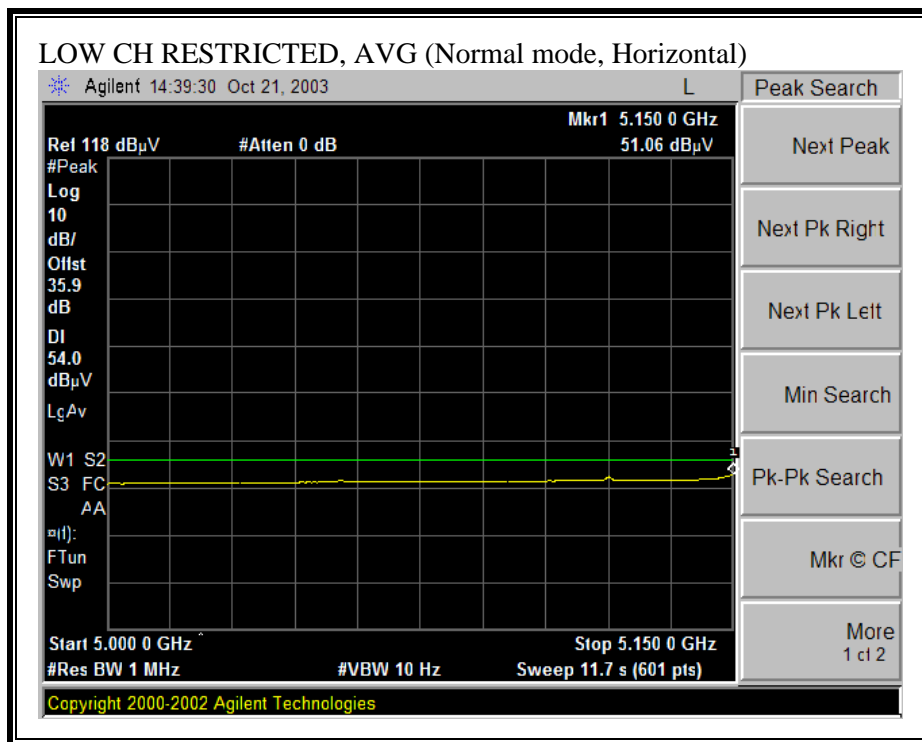


**RESTRICTED BANDEDGE (NORMAL MODE, LOW CHANNEL, VERTICAL)**

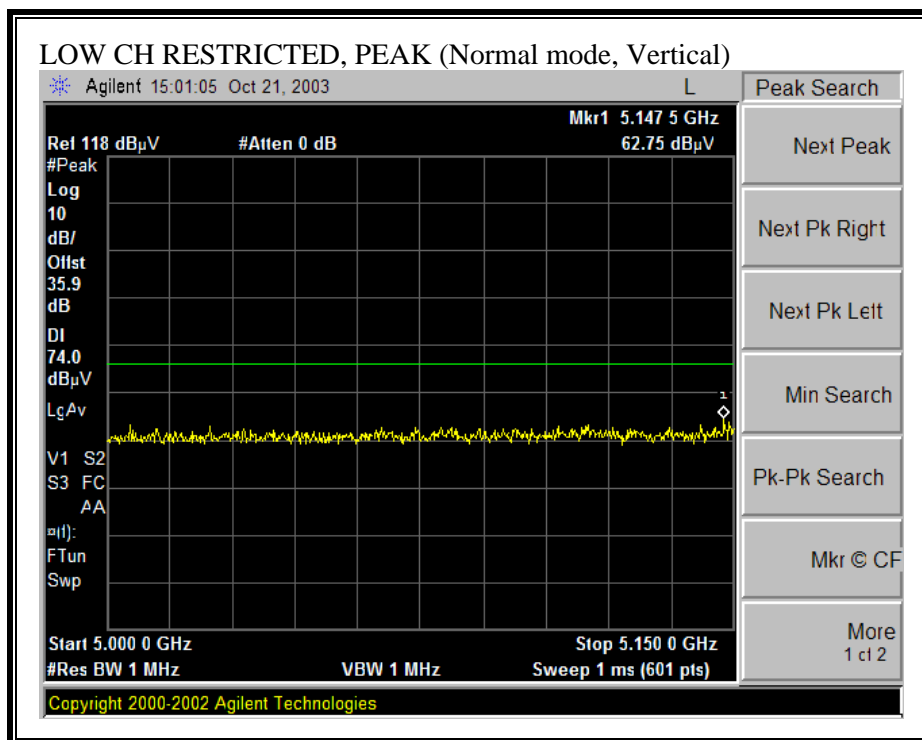


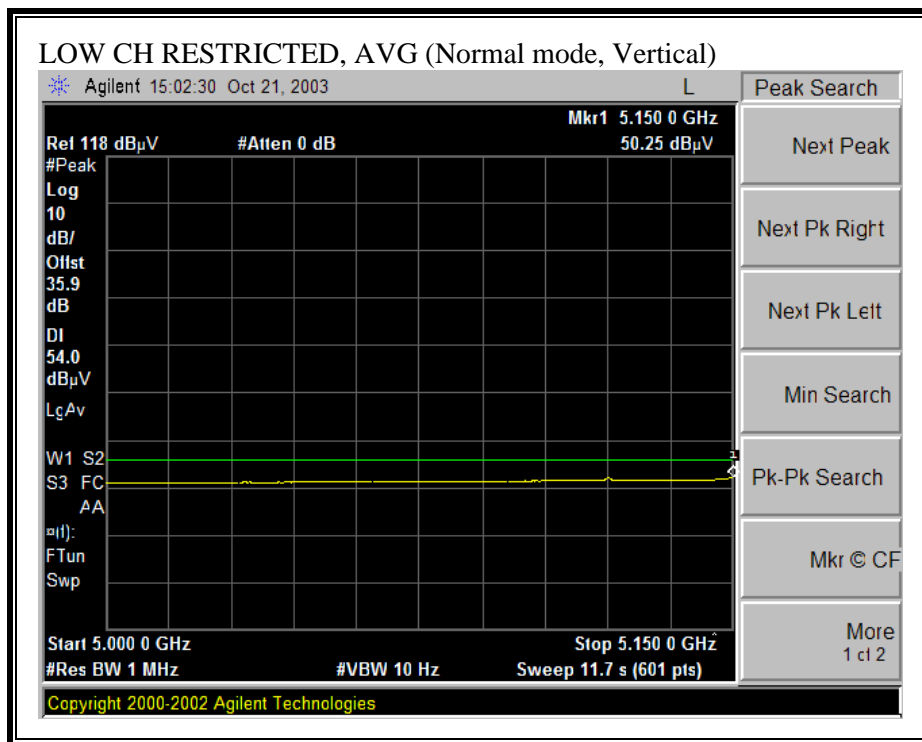





**RESTRICTED BANDEDGE (NORMAL MODE, HIGH CHANNEL, HORIZONTAL)**

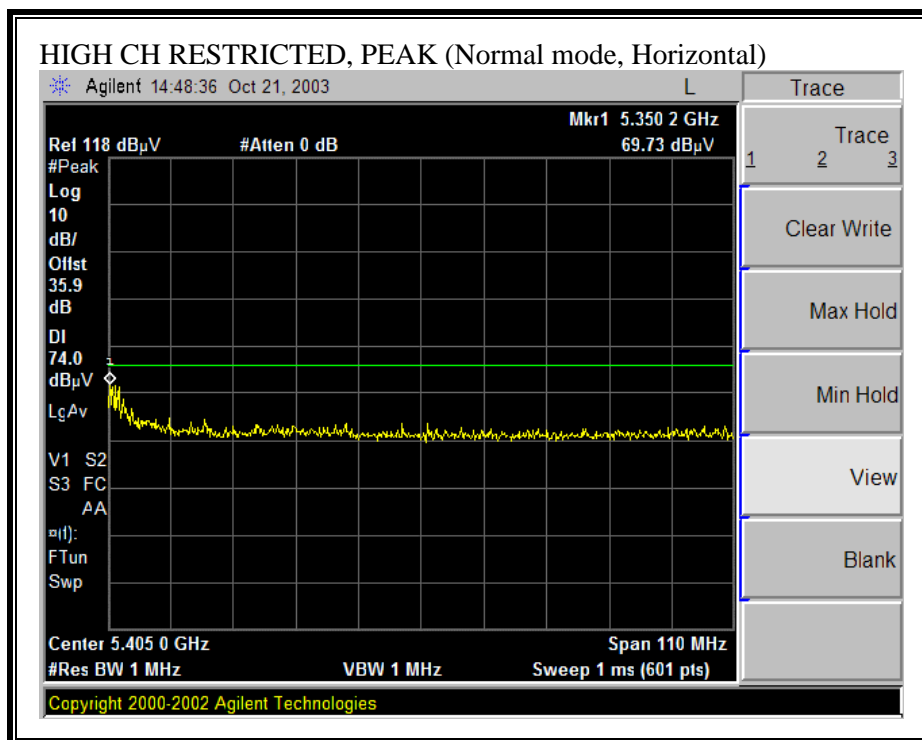

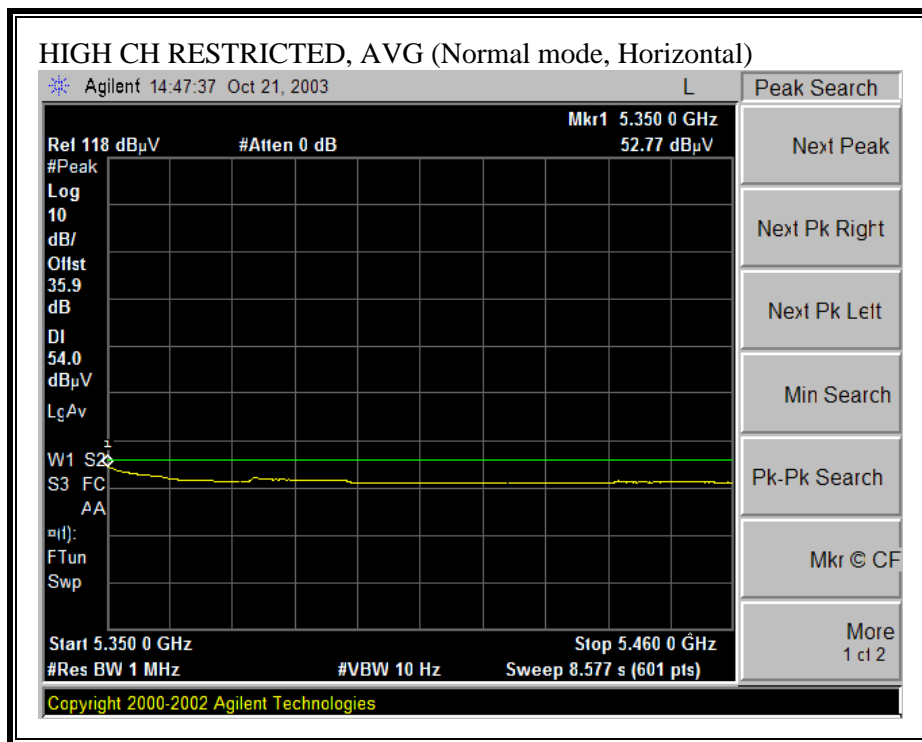

**RESTRICTED BANDEDGE (NORMAL MODE, HIGH CHANNEL, VERTICAL)**

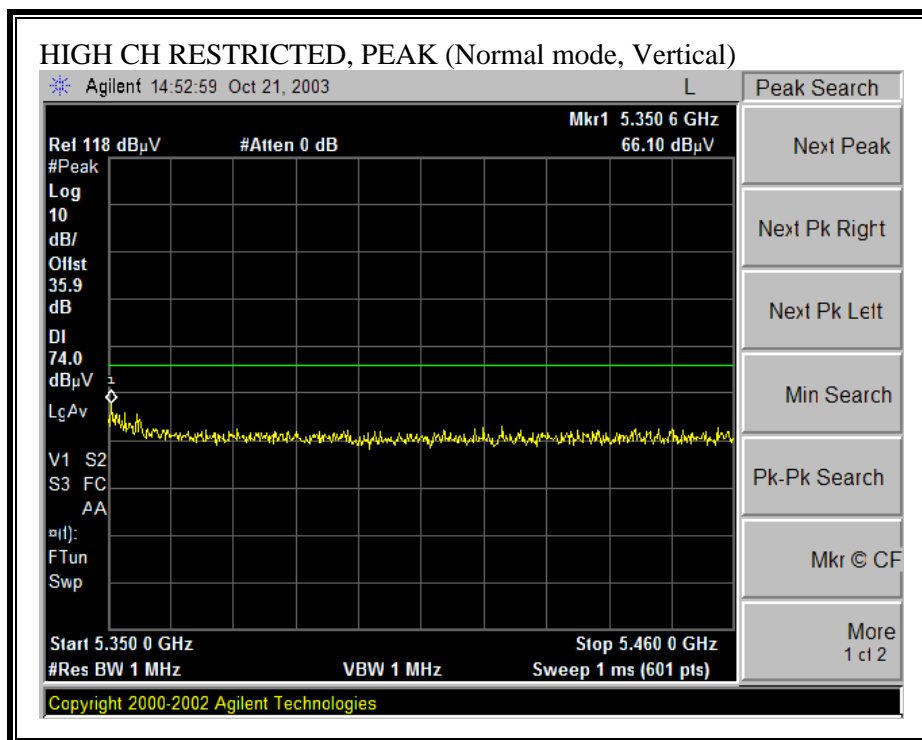


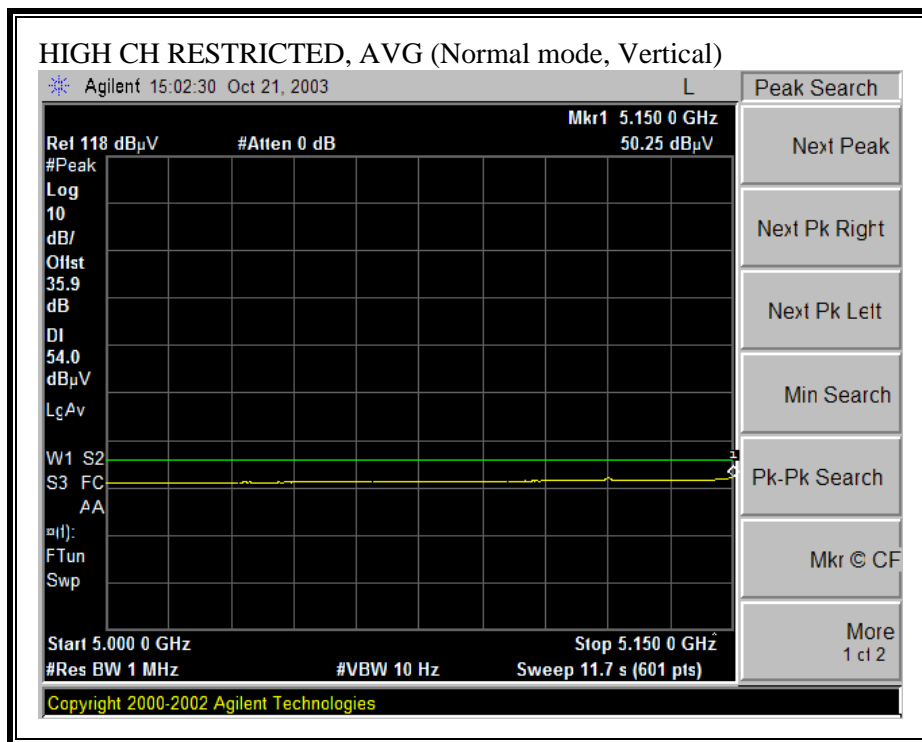


## HARMONICS AND SPURIOUS EMISSIONS (NORMAL MODE)


10/20/03 <b>High Frequency Measurement</b> Compliance Certification Services, Morgan Hill Open Field Site  Test Engr: THANH NGUYEN Project #:03U2198 Company: TOSHIBA EUT Descrip.: 802.11 a/b Combo Module EUT M/N: PA3233U-1MPC Test Target: FCC 15.205,207,209 Mode Oper: Tx L/M/H Normal. 5.2GHz Band  <u>Test Equipment:</u>  <div style="display: flex; justify-content: space-between;"> <div style="width: 20%;">             EMCO Horn 1-18GHz              T73; S/N: 6717 @3m         </div> <div style="width: 20%;">             Pre-amplifier 1-26GHz              T86 Miteq 924341         </div> <div style="width: 20%;">             Spectrum Analyzer              Agilent E4446A Analyzer         </div> <div style="width: 20%;">             Horn &gt; 18GHz              T87; ARA 18-26GHz; S/N:1049         </div> </div> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <div style="width: 30%;">             Hi Frequency Cables  <input type="checkbox"/> (2 ft)    <input checked="" type="checkbox"/> (2 ~ 3 ft)    <input type="checkbox"/> (4 ~ 6 ft)    <input checked="" type="checkbox"/> (12 ft)         </div> <div style="width: 30%;"> <u>Peak Measurements:</u>              1 MHz Resolution Bandwidth              1MHz Video Bandwidth         </div> <div style="width: 30%;"> <u>Average Measurements:</u>              1 MHz Resolution Bandwidth              10Hz Video Bandwidth         </div> </div>															
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
Tx at low channel 5180 MHz															
10.360	9.8	51.6	38.2	38.3	5.1	-44.5	0.0	1.0	51.4	38.0	74.0	54.0	-22.6	-16.0	V
No other emission was detected above the system noise floor															
Tx at MID channel 5260 MHz															
No emission was detected above the system noise floor															
Tx at High Channel 5320 MHz															
No emission was detected above the system noise floor															
<div style="display: flex; justify-content: space-between; font-size: small;"> <div>             f      Measurement Frequency              Dist   Distance to Antenna              Read   Analyzer Reading              AF      Antenna Factor              CL      Cable Loss         </div> <div>             Amp    Preamp Gain              D Corr   Distance Correct to 3 meters              Avg      Average Field Strength @ 3 m              Peak     Calculated Peak Field Strength              HPF      High Pass Filter         </div> <div>             Avg Lim   Average Field Strength Limit              Pk Lim     Peak Field Strength Limit              Avg Mar   Margin vs. Average Limit              Pk Mar     Margin vs. Peak Limit         </div> </div>															

**RESTRICTED BANDEDGE (TURBO MODE, LOW CHANNEL, HORIZONTAL)**

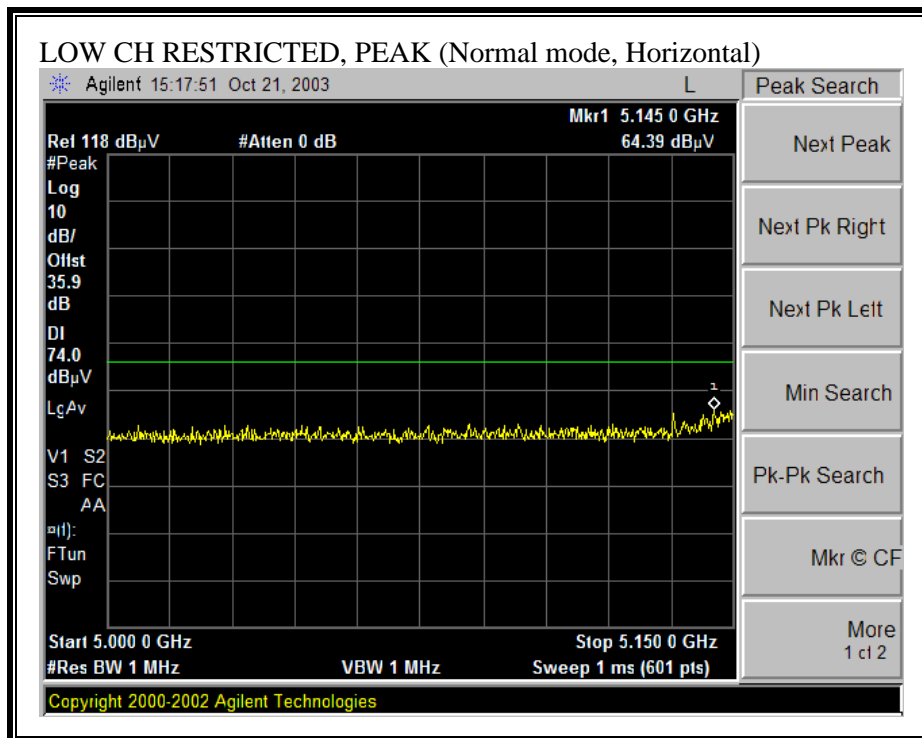


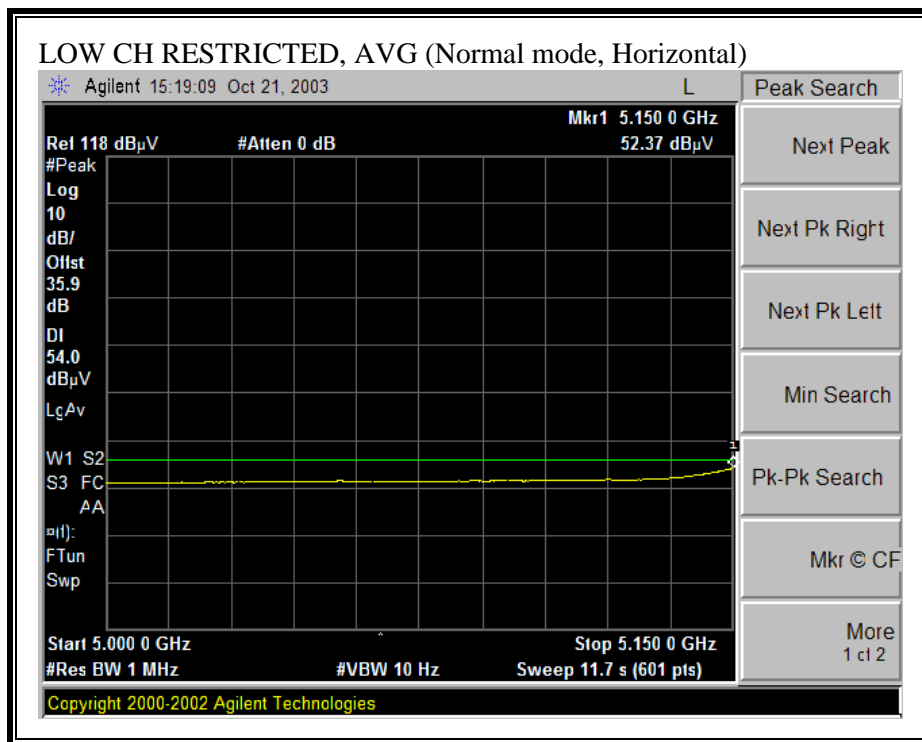


**RESTRICTED BANDEDGE (TURBO MODE, LOW CHANNEL, VERTICAL)**

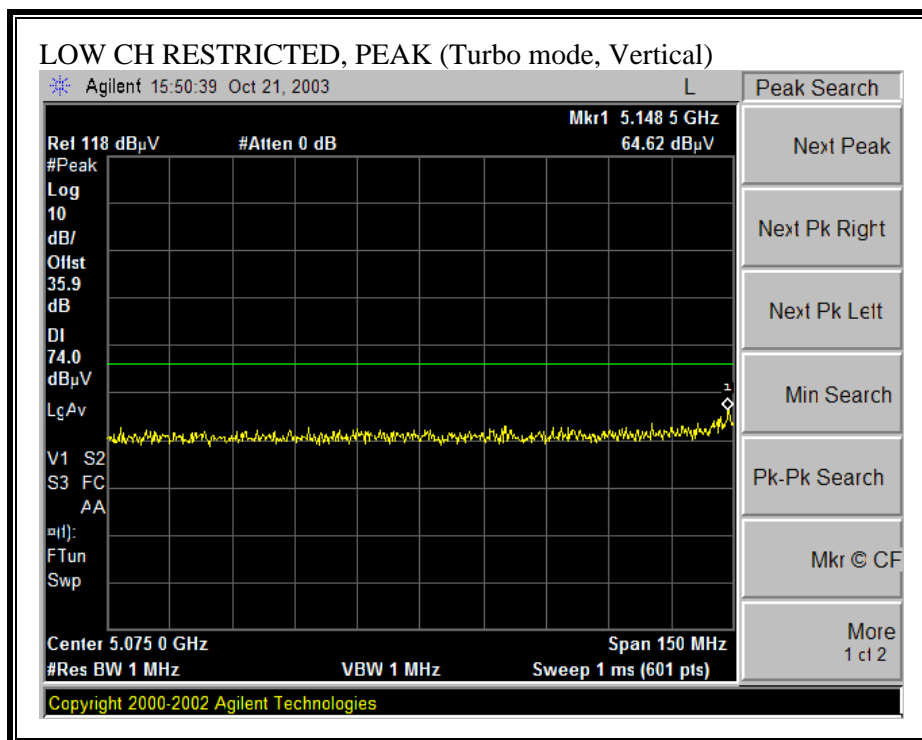




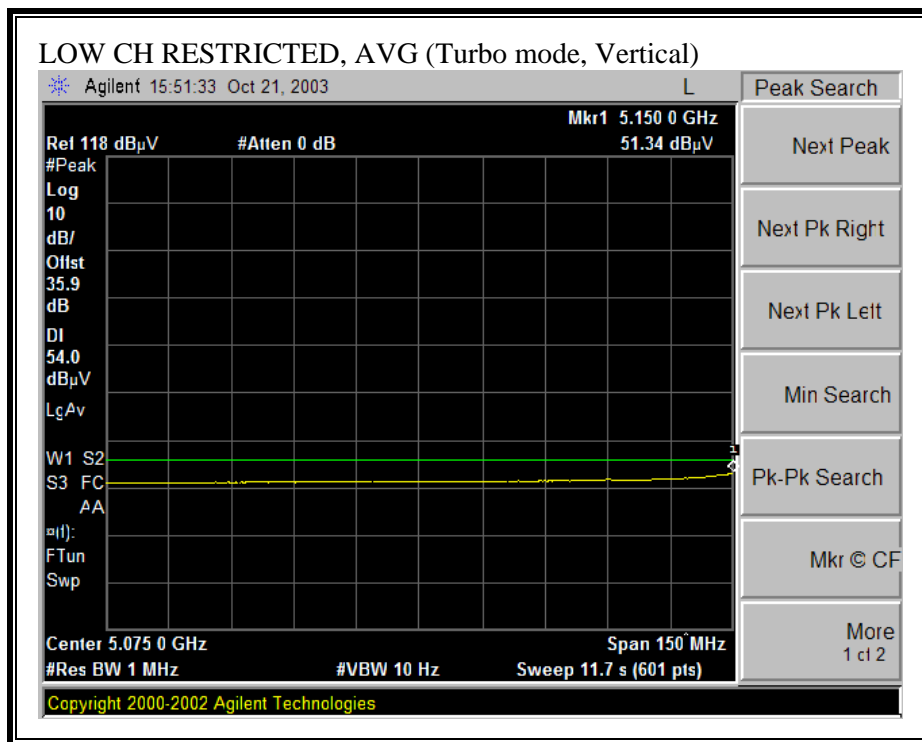



**RESTRICTED BANDEDGE (TURBO MODE, HIGH CHANNEL, HORIZONTAL)**

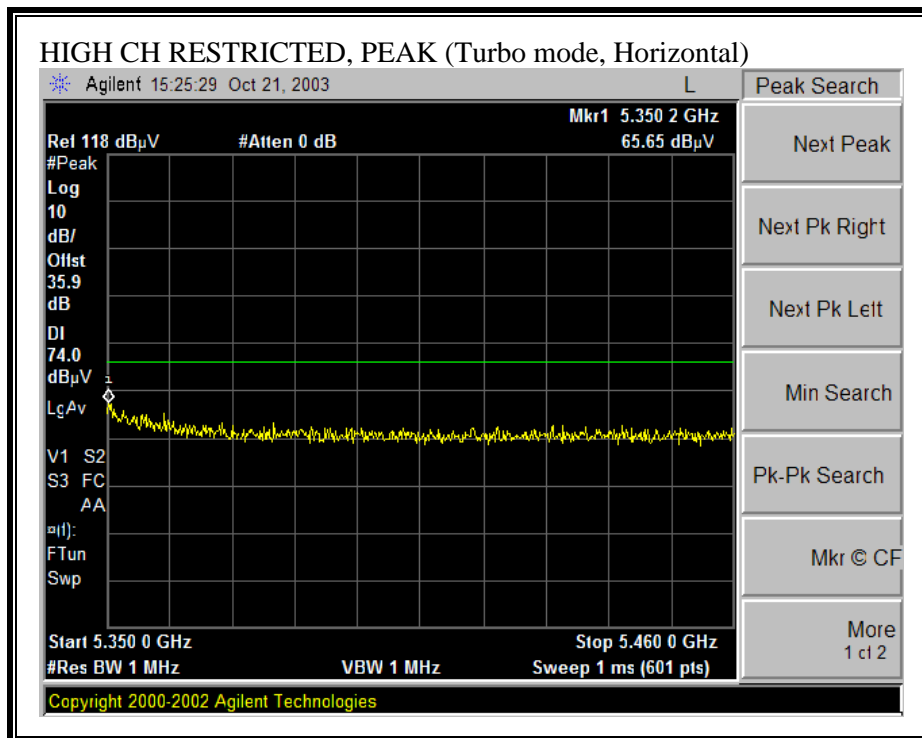

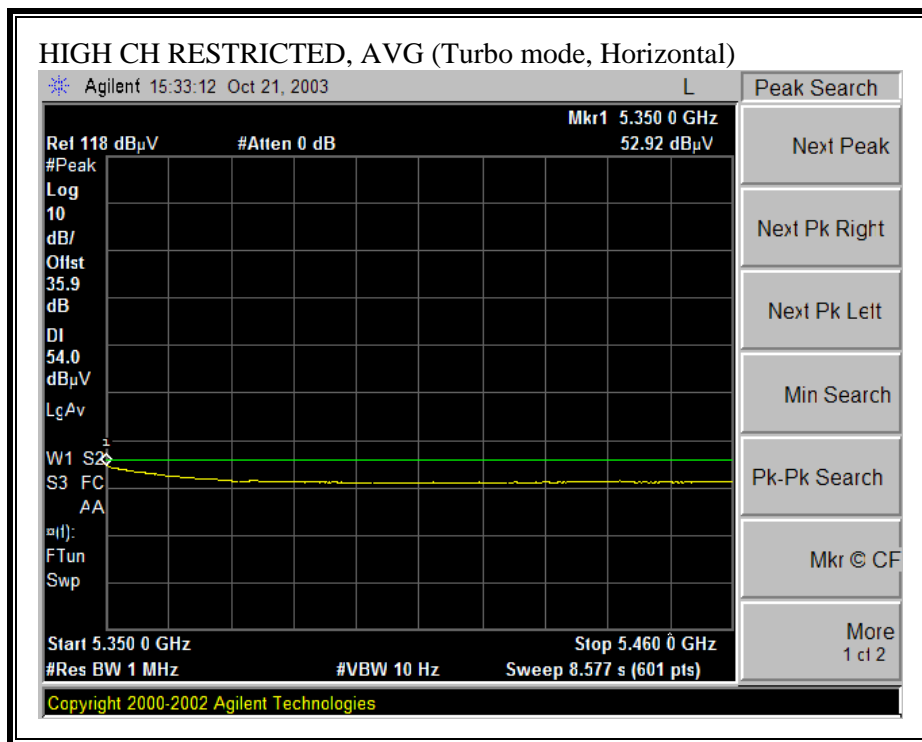

**RESTRICTED BANDEDGE (TURBO MODE, HIGH CHANNEL, VERTICAL)**

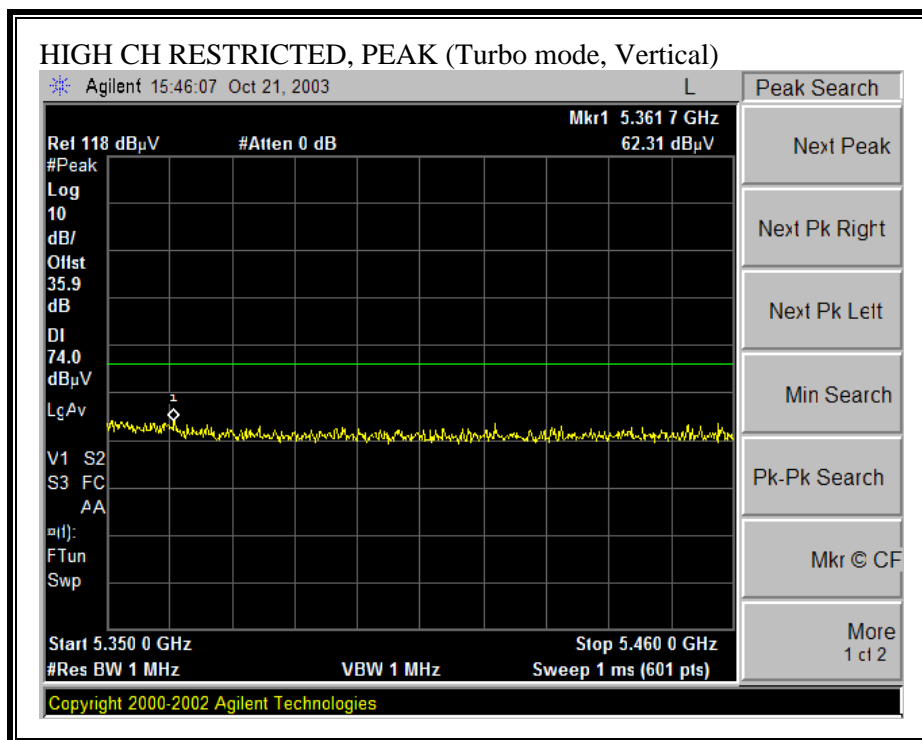

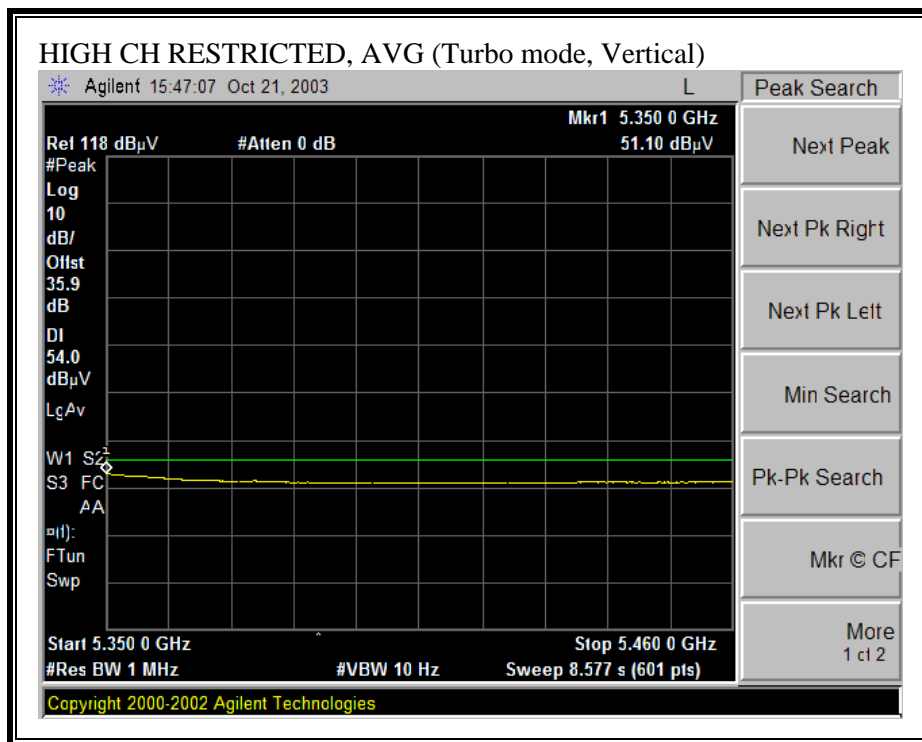

## HARMONICS AND SPURIOUS EMISSIONS (TURBO MODE)

10/20/03 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr: THANH NGUYEN Project #:03U2198 Company: TOSHIBA EUT Descrip.: 802.11 a/b Combo Module EUT M/N: PA3233U-1MPC Test Target: FCC 15.205,207,209 Mode Oper: Tx L/M/H TURBO 5.2GHz Band																
Test Equipment:																
EMCO Horn 1-18GHz T73; S/N: 6717 @3m		Pre-amplifier 1-26GHz T86 Miteq 924341		Spectrum Analyzer Agilent E4446A Analyzer		Horn > 18GHz T87; ARA 18-26GHz; S/N:1049										
Hi Frequency Cables <input type="checkbox"/> (2 ft) <input checked="" type="checkbox"/> (2 ~ 3 ft) <input type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)								Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth				Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth				
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes	
Tx at low channel 5210 MHz																
10.420	9.8	45.6	34.8	38.3	5.1	-44.4	0.0	1.0	45.5	34.7	74.0	54.0	-28.5	-19.3	V	
10.420	9.8	42.9	34.8	38.3	5.1	-44.4	0.0	1.0	42.8	34.7	74.0	54.0	-31.2	-19.3	H	
No other emission was detected above the system noise floor																
Tx at MID channel 5250 MHz																
No emission was detected above the system noise floor																
Tx at High Channel 5290MHz																
No emission was detected above the system noise floor																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

### **7.1.3. CO-LOCATED TRANSMITTER SPURIOUS EMISSIONS**

#### **SUPPLEMENTAL TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna The dominant transmitter is set to the worst case channel. The spurious emissions performance of the dominant transmitter is investigated as the settings of the non-dominant transmitter are varied. Worst case results are reported.


#### **RESULTS**

The 2.4 GHz transmitter is dominant with respect to authorized frequency bands that are adjacent to restricted bands.


The 5.8 GHz transmitter is dominant with respect to output power.

No non-compliance noted:


**WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)**

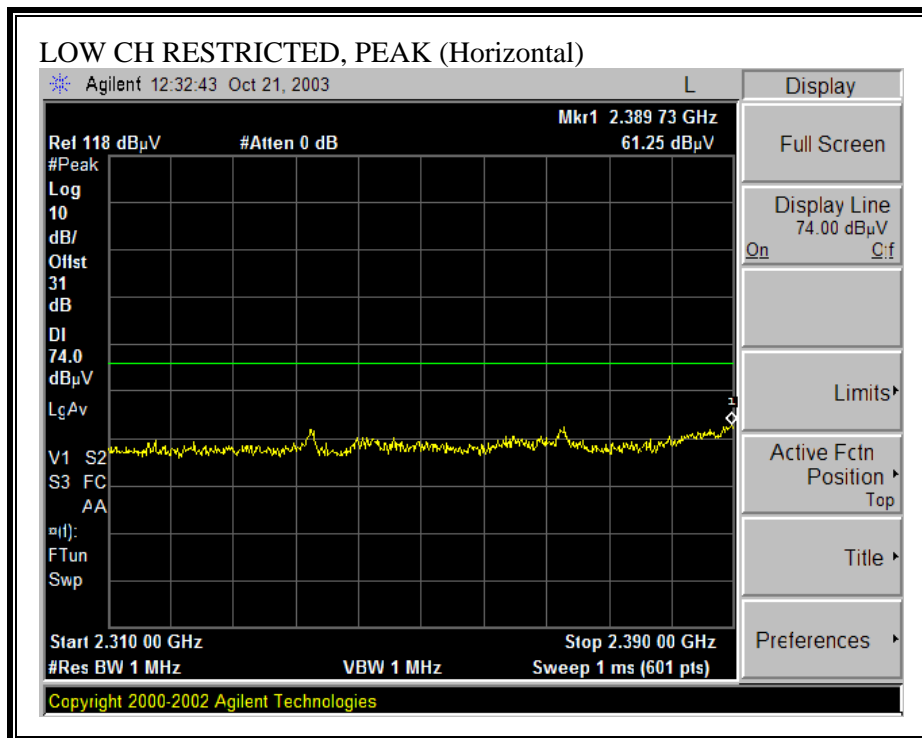




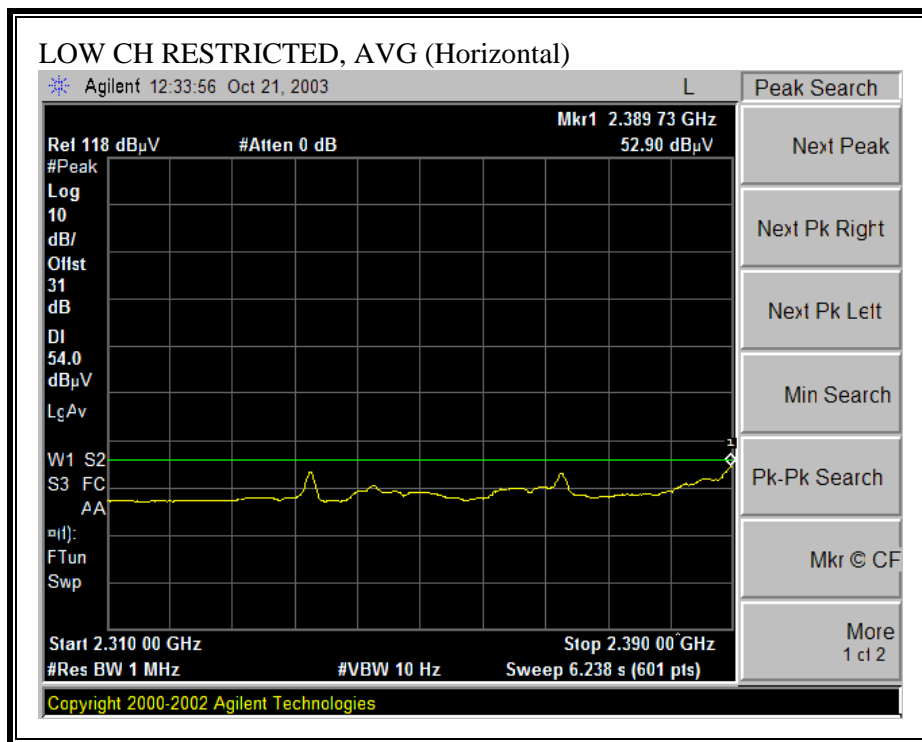



**WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

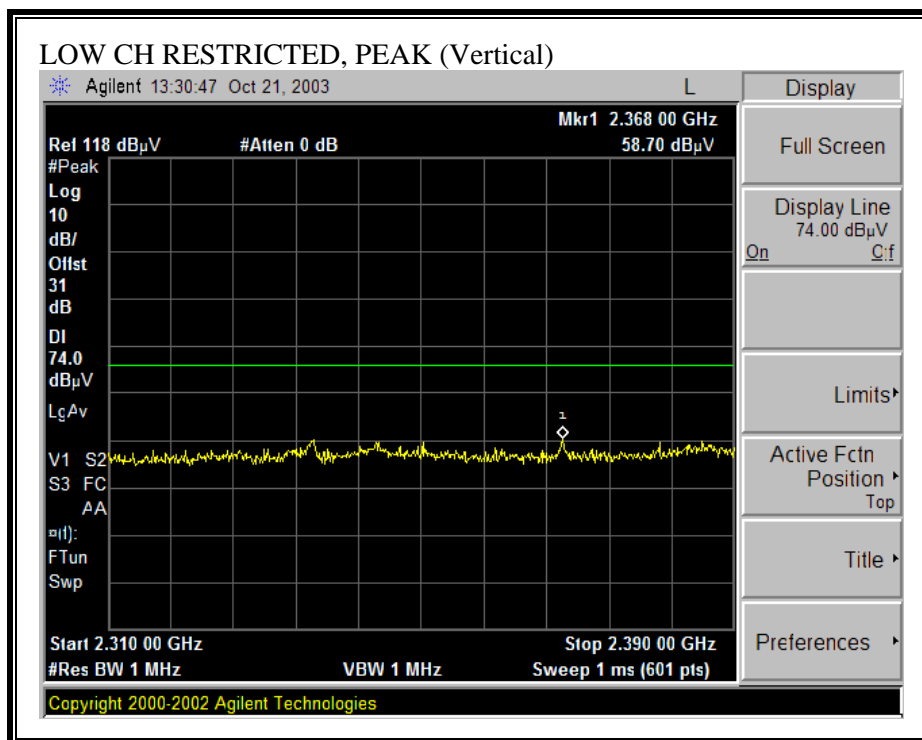

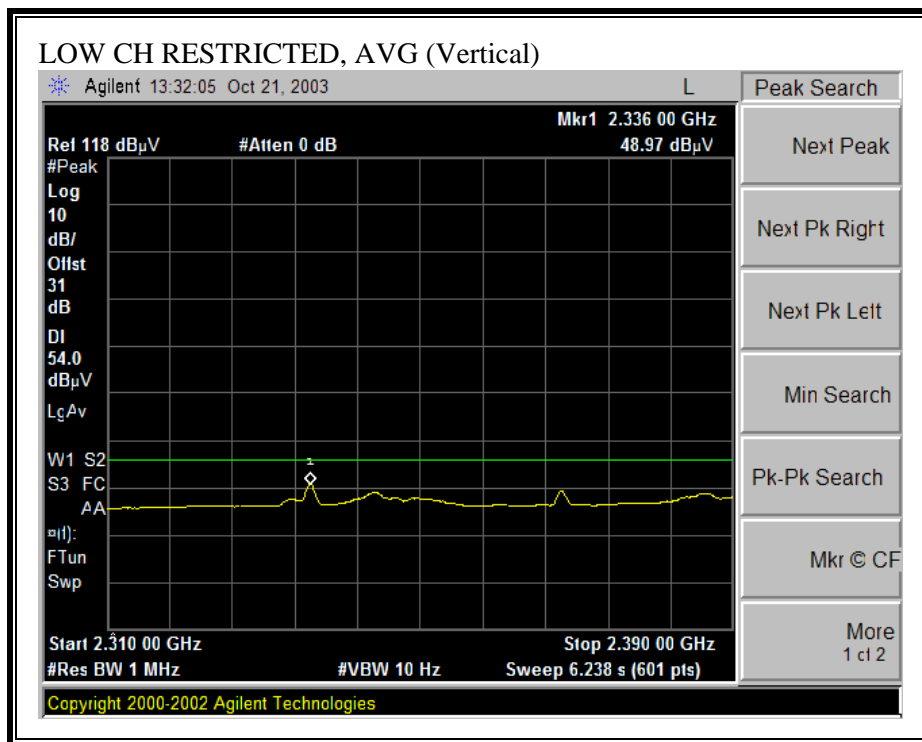



**WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

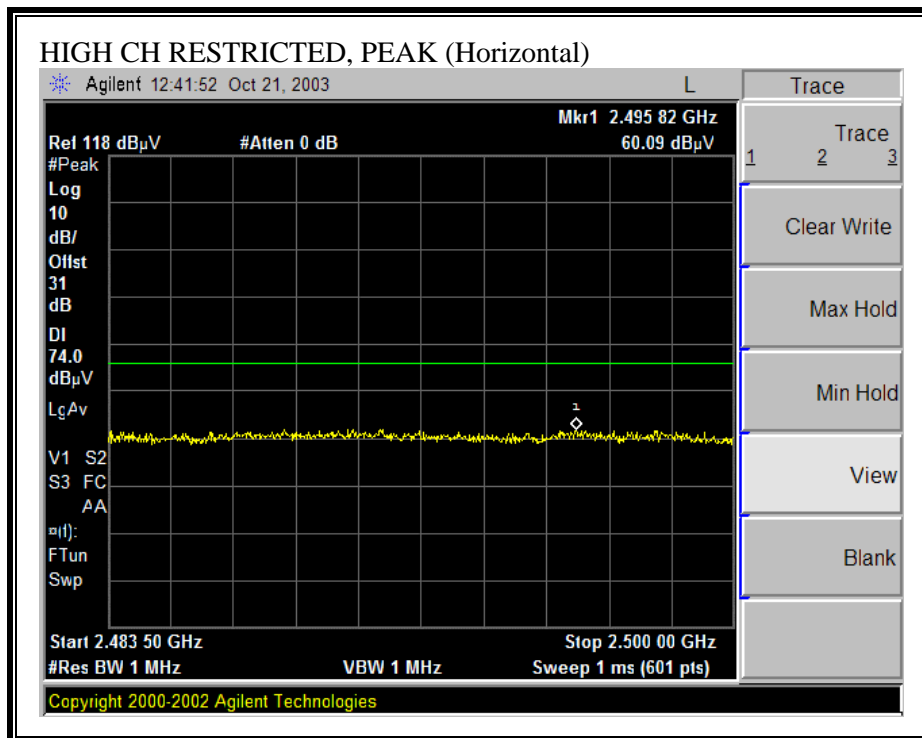

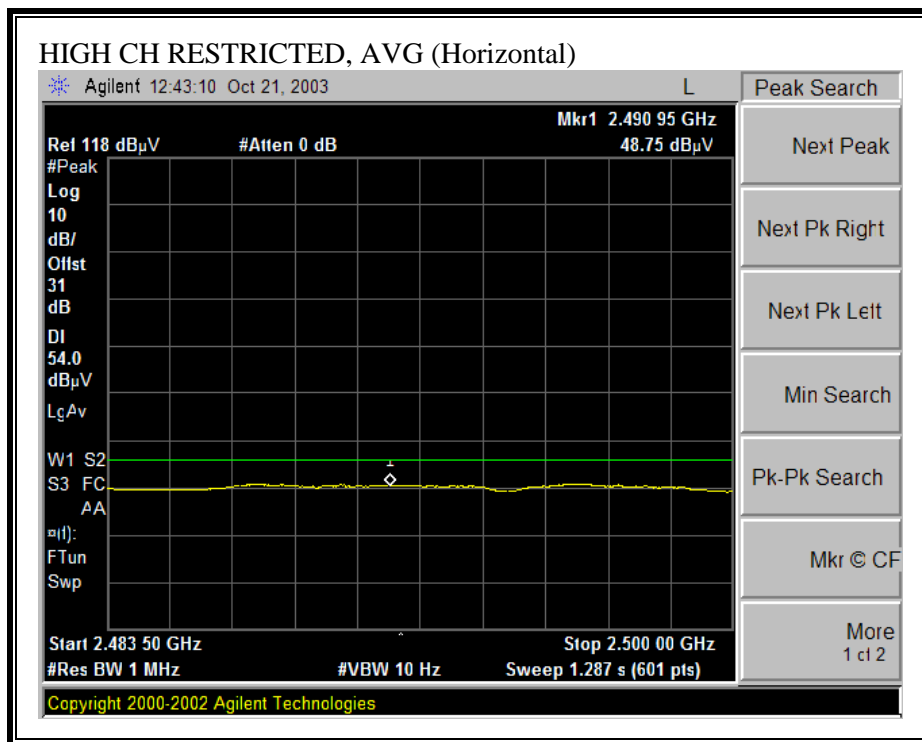

**WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

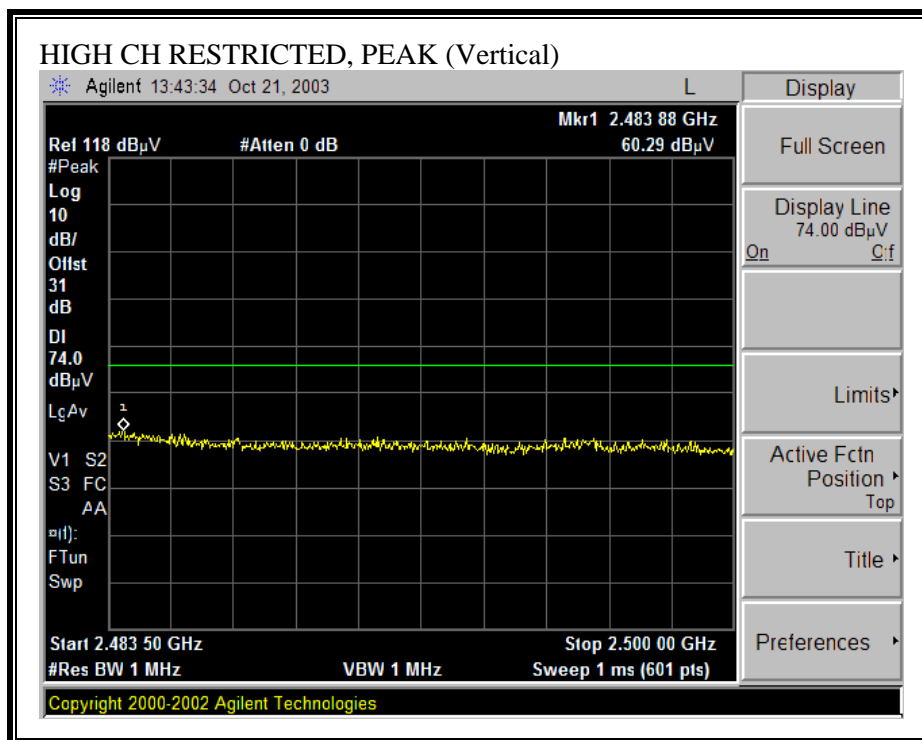

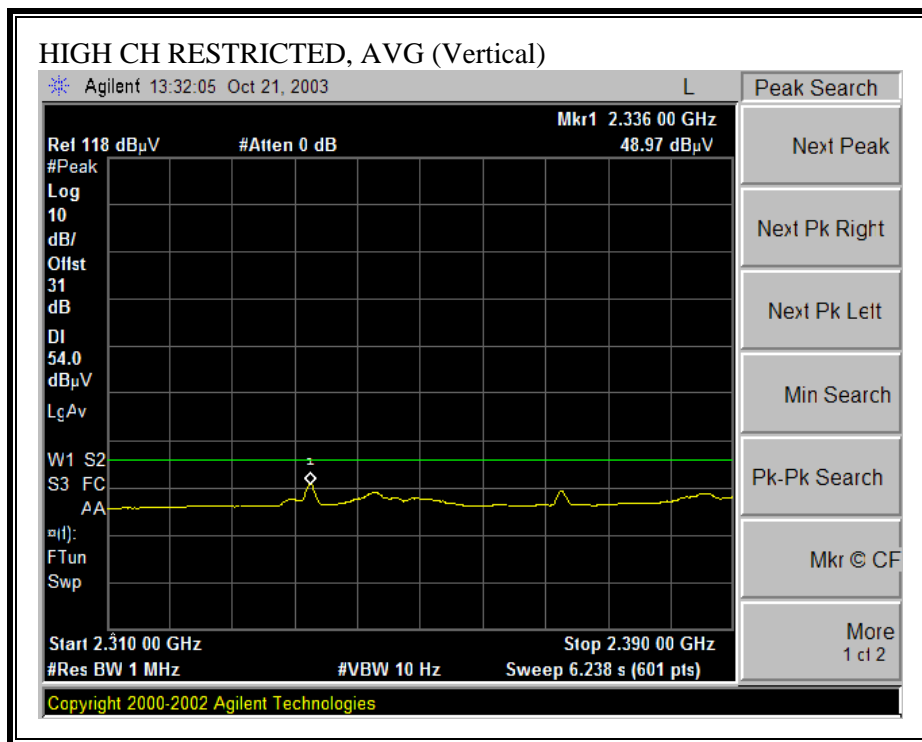

**WORST-CASE HARMONICS AND SPURIOUS EMISSIONS (2.4 GHZ BAND WLAN OPERATION)**

10/20/03 <b>High Frequency Measurement</b> Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: THANH NGUYEN Project #:03U2198 Company: TOSHIBA EUT Descr.: 802.11 a/b Combo Module EUT M/N: PA3233U-1MPC Test Target: FCC 15.247 Mode Oper: 2.4GHz. CO-LOCATED															
<b>Test Equipment:</b>															
EMCO Horn 1-18GHz T73; S/N: 6717 @3m		Pre-amplifier 1-26GHz T86 Miteq 924341		Spectrum Analyzer Agilent E4446A Analyzer		Horn > 18GHz T87; ARA 18-26GHz; S/N:1049									
<b>Hi Frequency Cables</b> <input type="checkbox"/> (2 ft) <input checked="" type="checkbox"/> (2 ~ 3 ft) <input type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)								<b>Peak Measurements:</b> 1 MHz Resolution Bandwidth 1MHz Video Bandwidth				<b>Average Measurements:</b> 1 MHz Resolution Bandwidth 10Hz Video Bandwidth			
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
Tx at 2.4GHz CO-LOCATED Harmonics and spurious Emissions.															
4.874	9.8	49.2	41.1	33.4	3.2	-45.6	0.0	1.0	41.1	33.0	74.0	54.0	-32.9	-21.0	H
7.311	9.8	48.6	40.8	35.8	4.1	-46.6	0.0	1.0	42.9	35.1	74.0	54.0	-31.1	-18.9	H
4.874	9.8	50.9	47.2	33.4	3.2	-45.6	0.0	1.0	42.8	39.1	74.0	54.0	-31.2	-14.9	V
7.311	9.8	51.9	44.7	35.8	4.1	-46.6	0.0	1.0	46.2	39.0	74.0	54.0	-27.8	-15.0	V
No other emission was detected above the system noise floor															
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								




**WORST-CASE HARMONICS AND SPURIOUS EMISSIONS (5.8 GHZ BAND WLAN OPERATION)**

10/20/03 <b>High Frequency Measurement</b> Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: THANH NGUYEN Project #:03U2198 Company: TOSHIBA EUT Descrip.: 802.11 a/b Combo Module EUT M/N: PA3233U-1MPC Test Target: FCC 15.247 Mode Oper: 5.8GHz, CO-LOCATED															
<b>Test Equipment:</b>															
EMCO Horn 1-18GHz T73; S/N: 6717 @ 3m		Pre-amplifier 1-26GHz T86 Miteq 924341		Spectrum Analyzer Agilent E4446A Analyzer		Horn > 18GHz T87; ARA 18-26GHz; S/N:1049									
<b>Hi Frequency Cables</b> <input type="checkbox"/> (2 ft) <input checked="" type="checkbox"/> (2 ~ 3 ft) <input type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)								<b>Peak Measurements:</b> 1 MHz Resolution Bandwidth 1MHz Video Bandwidth				<b>Average Measurements:</b> 1 MHz Resolution Bandwidth 10Hz Video Bandwidth			
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
Tx at 5.8CO-LOCATED Harmonics and spurious Emissions.															
No emissions were detected above the system noise floor															
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								

#### 7.1.4. WORST-CASE SPURIOUS EMISSIONS BELOW 1 GHz


##### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

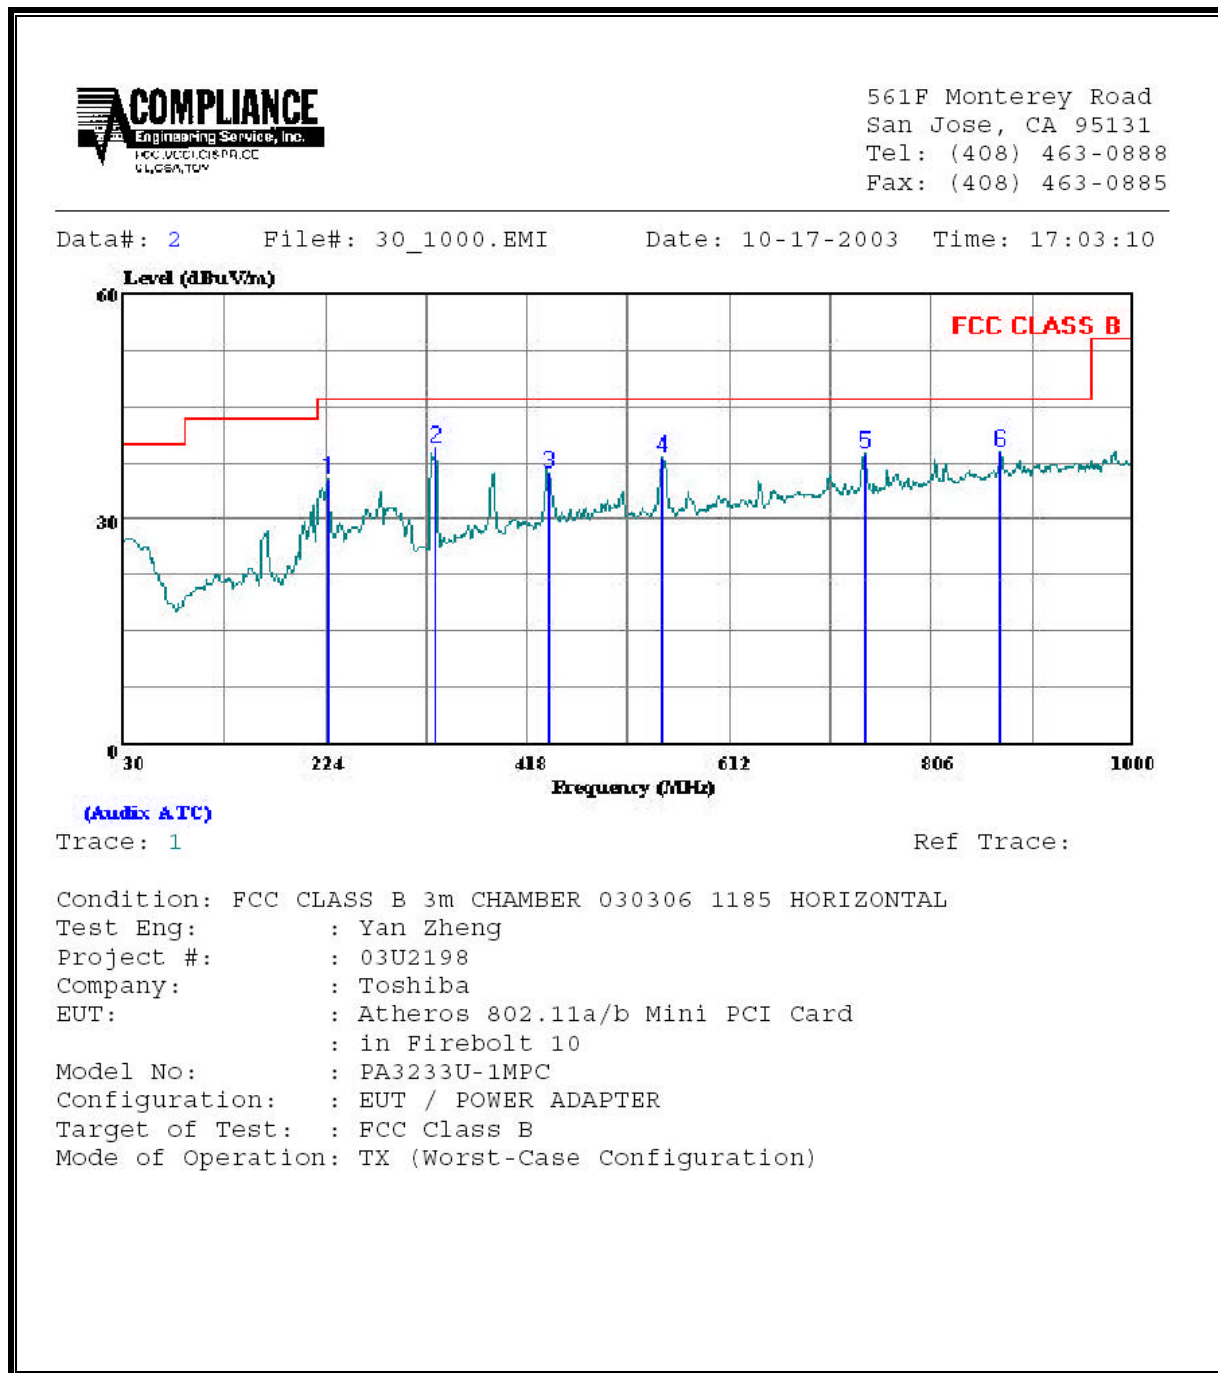

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV/m	dBuV/m	dB	
1	225.940	23.28	10.50	1.47	35.25	46.00	-10.75	Peak
2	329.730	24.92	12.85	1.83	39.60	46.00	-6.40	Peak
3	438.370	18.78	15.31	2.14	36.23	46.00	-9.77	Peak
4	547.980	18.75	17.12	2.44	38.31	46.00	-7.69	Peak
5	741.980	16.79	19.11	2.90	38.80	46.00	-7.20	Peak
6	872.930	15.45	20.38	3.15	38.98	46.00	-7.02	Peak

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

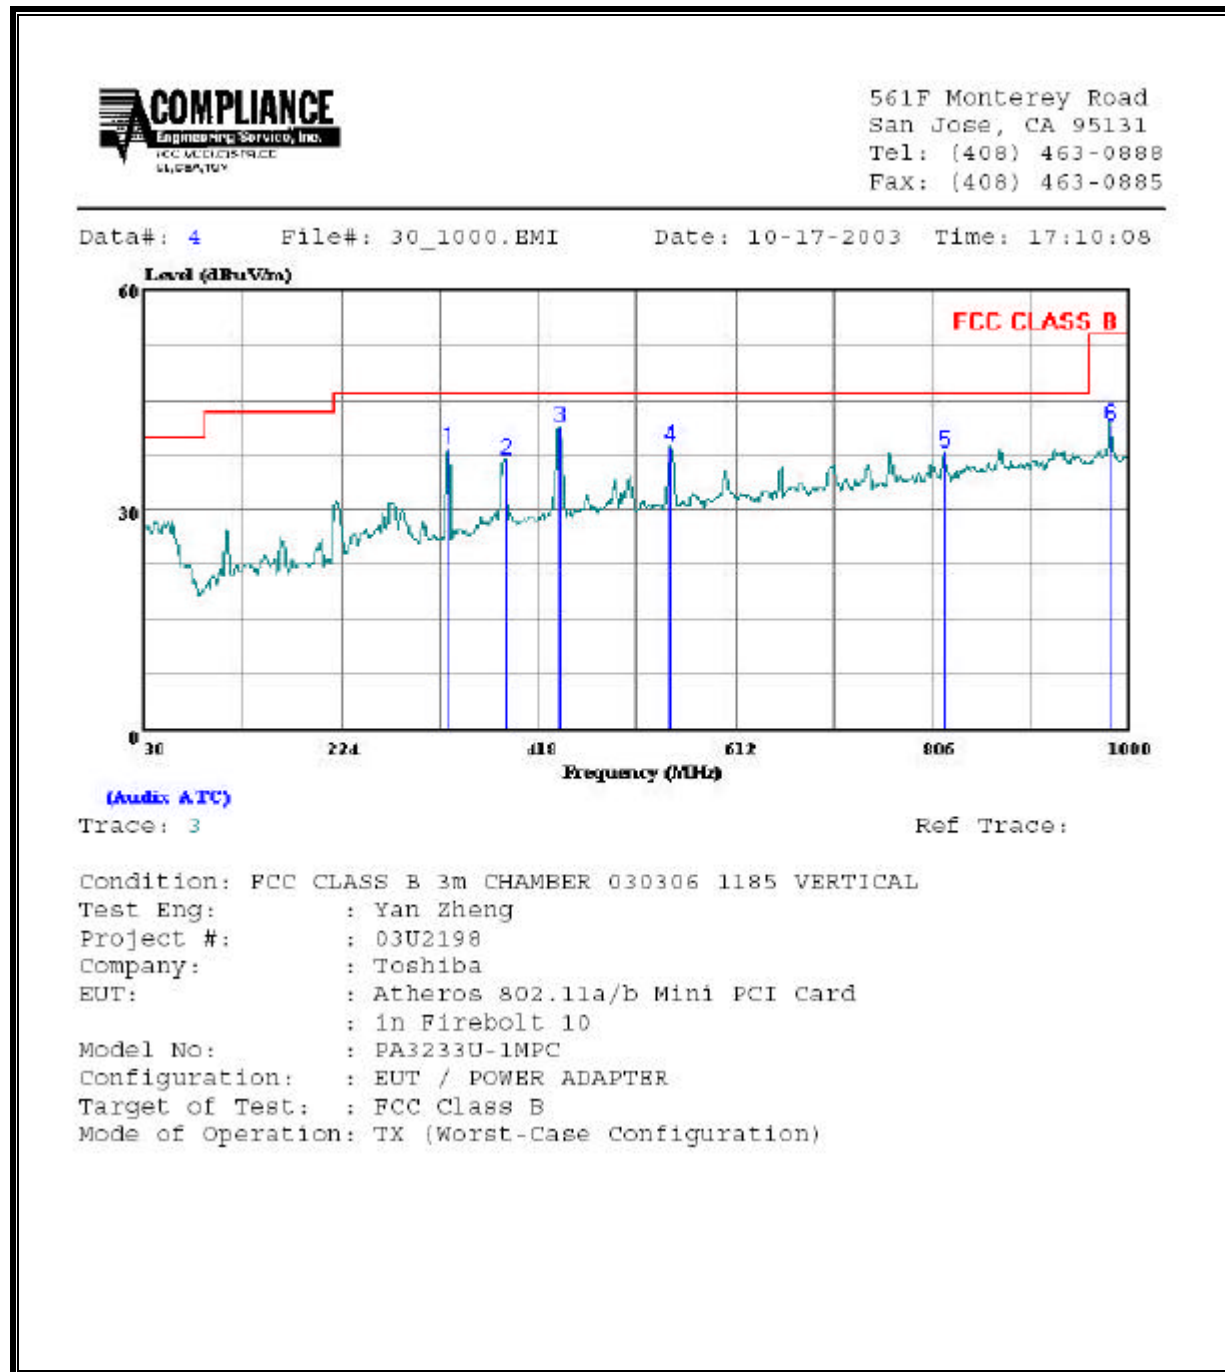

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV/m	dBuV/m	dB	
1	329.730	23.66	12.85	1.83	38.34	46.00	-7.66	Peak
2	385.990	20.72	14.16	1.99	36.87	46.00	-9.13	Peak
3	439.340	23.91	15.32	2.15	41.38	46.00	-4.62	Peak
4	547.980	19.25	17.12	2.44	38.81	46.00	-7.19	Peak
5	817.640	14.99	19.94	3.03	37.96	46.00	-8.04	Peak
6	980.600	16.98	21.09	3.39	41.46	54.00	-12.54	Peak

## 7.2. POWERLINE CONDUCTED EMISSIONS

### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


### RESULTS

No non-compliance noted:

## 6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	62.40	--	36.06	0.00	66.00	56.00	-3.60	-19.94	L1
0.23	58.86	--	31.58	0.00	63.71	53.71	-4.85	-22.13	L1
0.30	56.50	--	27.28	0.00	61.71	51.71	-5.21	-24.43	L1
0.20	46.90	--	--	0.00	64.57	54.57	-17.67	-7.67	L2
0.87	33.30	--	--	0.00	56.00	46.00	-22.70	-12.70	L2
1.58	34.26	--	--	0.00	56.00	46.00	-21.74	-11.74	L2
6 Worst Data									

**LINE 1 RESULTS**

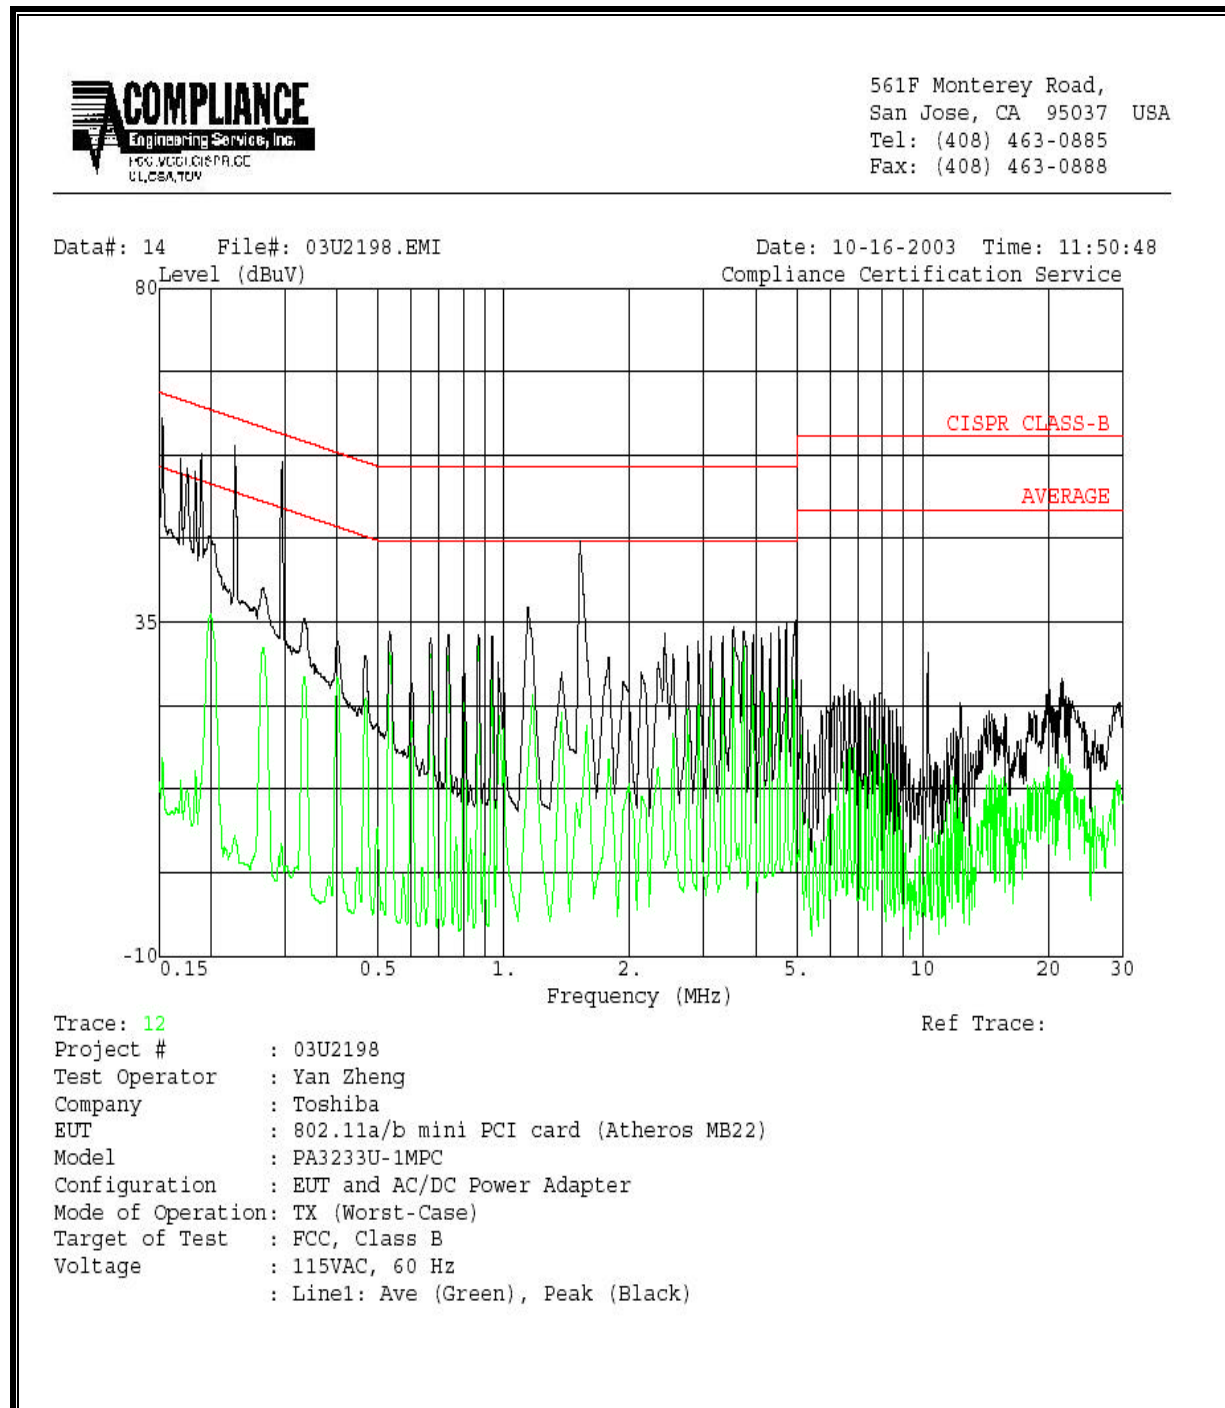




## LINE 2 RESULTS

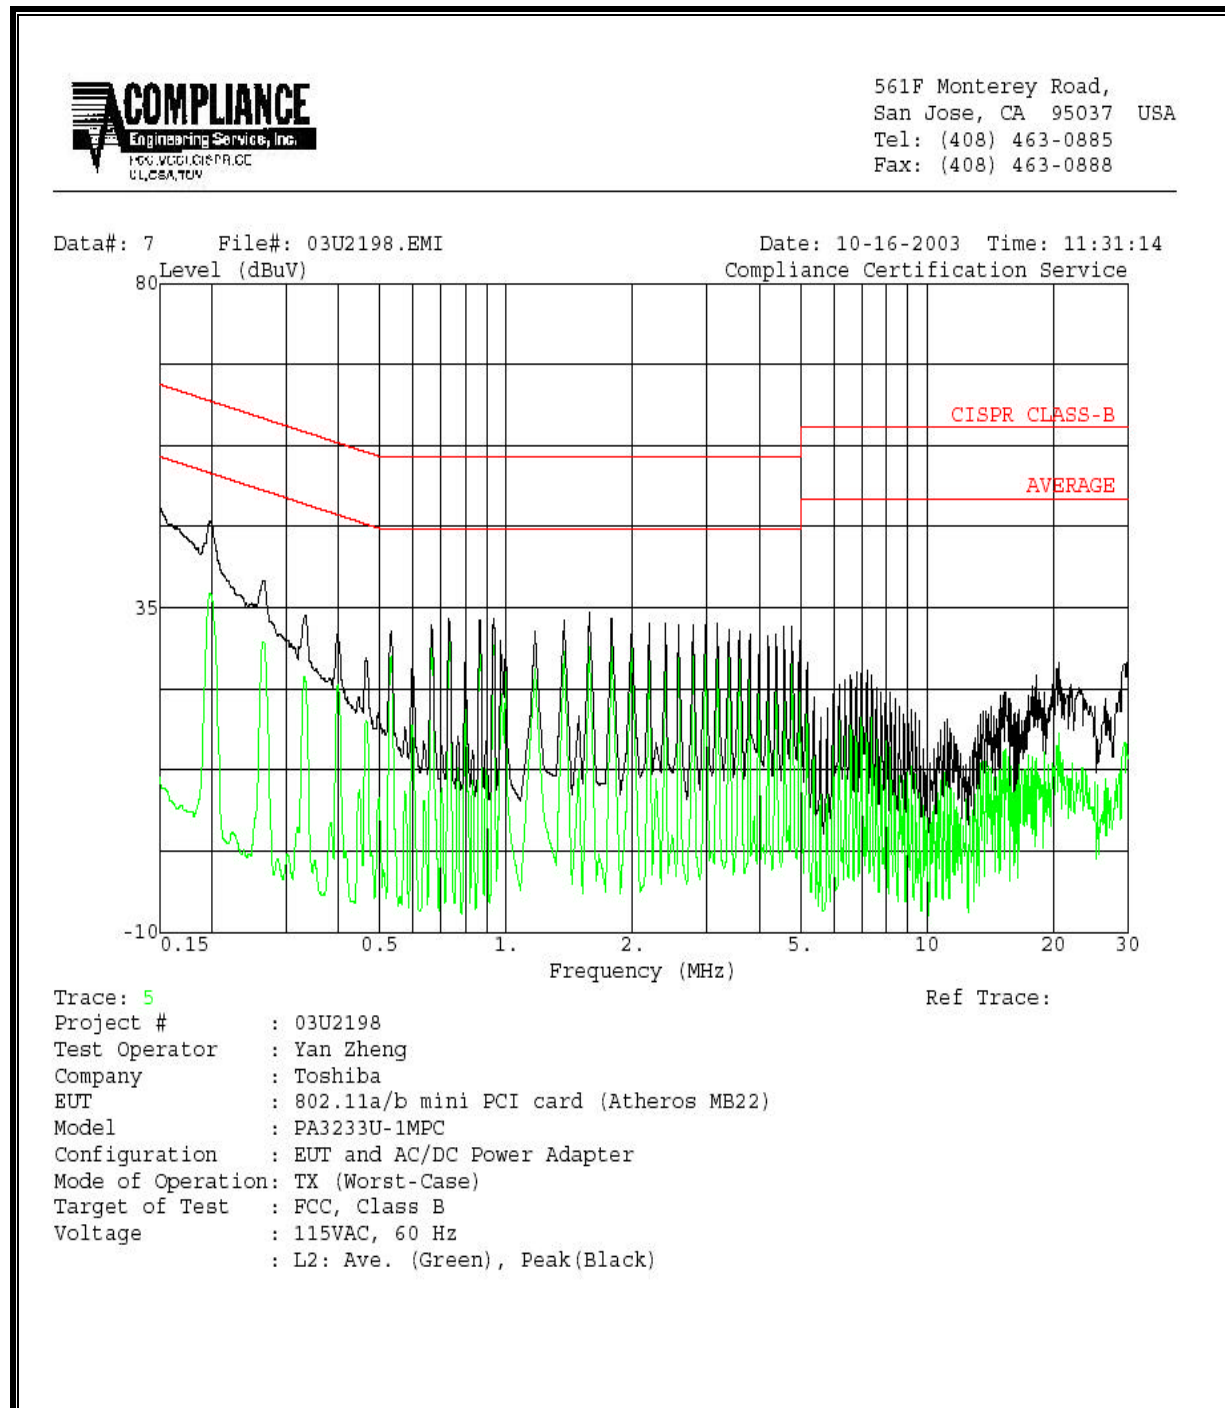

## 8. SETUP PHOTOS

### RADIATED RF MEASUREMENT SETUP

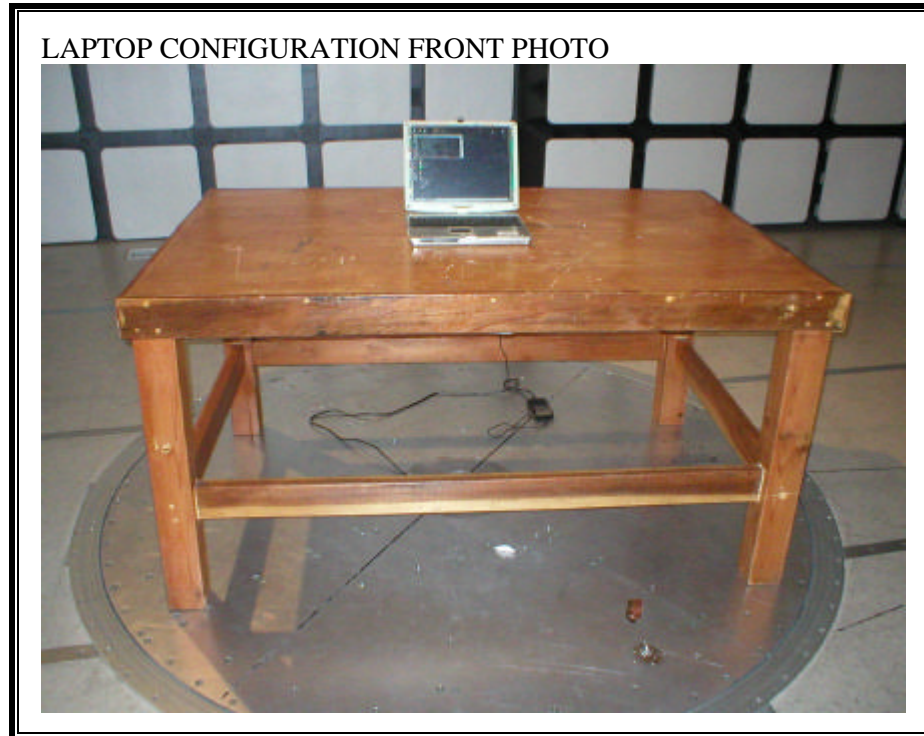

LAPTOP CONFIGURATION BACK PHOTO



TABLET CONFIGURATION X AXIS PHOTO



TABLET CONFIGURATION Y AXIS FRONT PHOTO





TABLET CONFIGURATION Y AXIS BACK PHOTO



TABLET CONFIGURATION Z AXIS FRONT PHOTO



TABLET CONFIGURATION Z AXIS BACK PHOTO





**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**



LINE CONDUCTED BACK PHOTO



**END OF REPORT**