

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.9 $\pm$ 6 %	1.85 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.9 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	$54.3 \Omega + 4.7 j\Omega$
Return Loss	- 24.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.162 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 20.07.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:853

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.96, 7.96, 7.96) @ 2450 MHz; Calibrated: 31.12.2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.05.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 116.2 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 26.6 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.29 W/kg


Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 22.2 W/kg

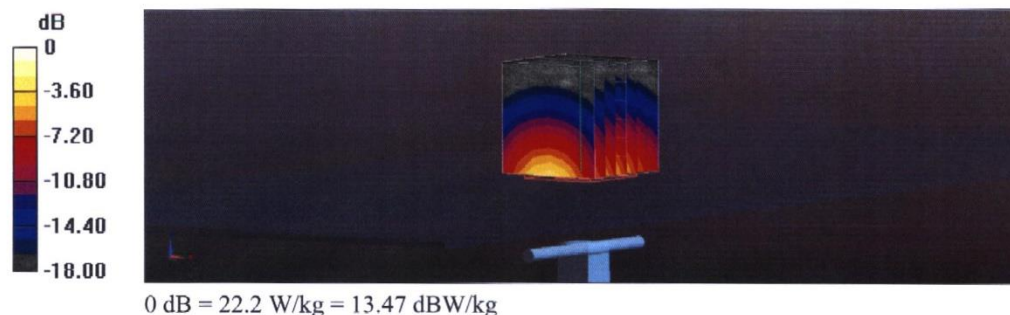

Impedance Measurement Plot for Head TSL

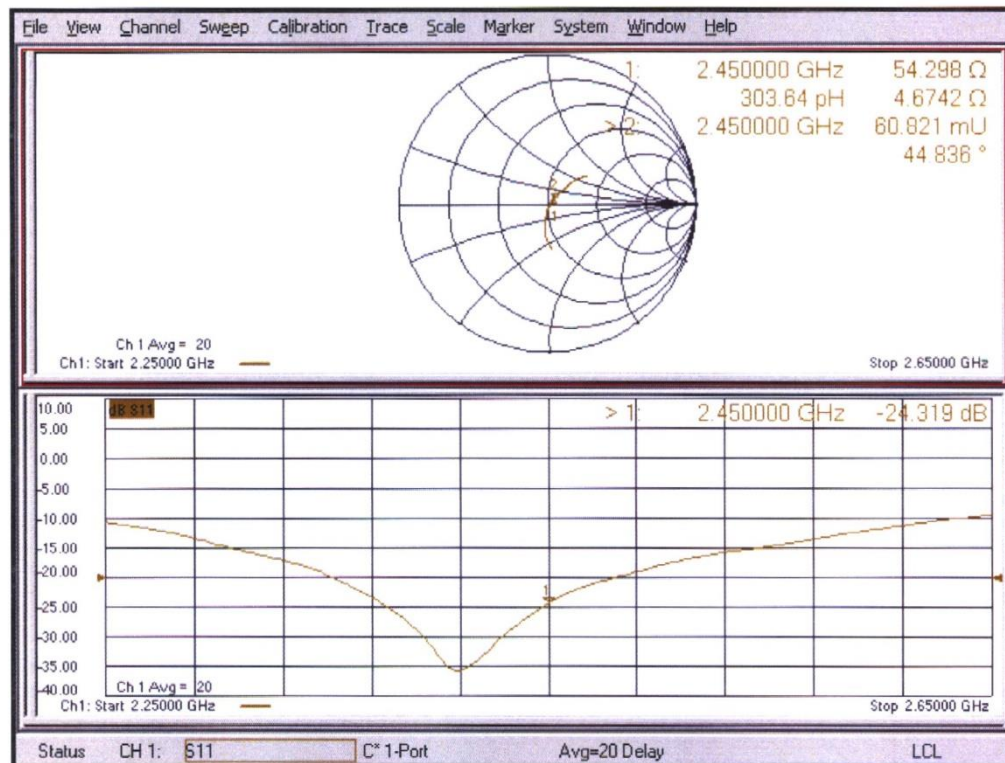

2600 MHz Dipole Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **CTTL (Auden)**

Certificate No: **D2600V2-1012_Jul22**

CALIBRATION CERTIFICATE

Object **D2600V2 - SN:1012**

Calibration procedure(s) **QA CAL-05.v11
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**


Calibration date: **July 20, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: BH9394 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310982 / 06327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX3DV4	SN: 7349	31-Dec-21 (No. EX3-7349_Dec21)	Dec-22
DAE4	SN: 601	02-May-22 (No. DAE4-601_May22)	May-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-22

	Name	Function	Signature
Calibrated by:	Aldonia Georgiadou	Laboratory Technician	
Approved by:	Sven Kühn	Technical Manager	

Issued: July 22, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.3 $\pm$ 6 %	2.01 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.2 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	46.7 Ω - 6.4 j Ω
Return Loss	- 22.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.151 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 20.07.2022

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1012

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 37.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.84, 7.84, 7.84) @ 2600 MHz; Calibrated: 31.12.2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.05.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 116.6 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.38 W/kg


Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 23.6 W/kg

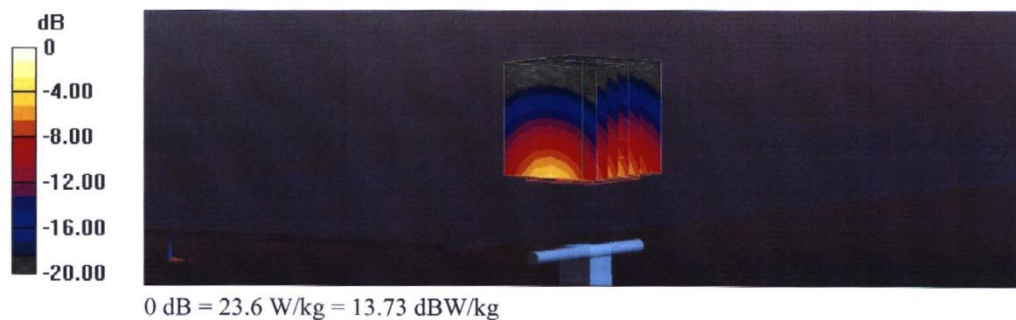

Impedance Measurement Plot for Head TSL

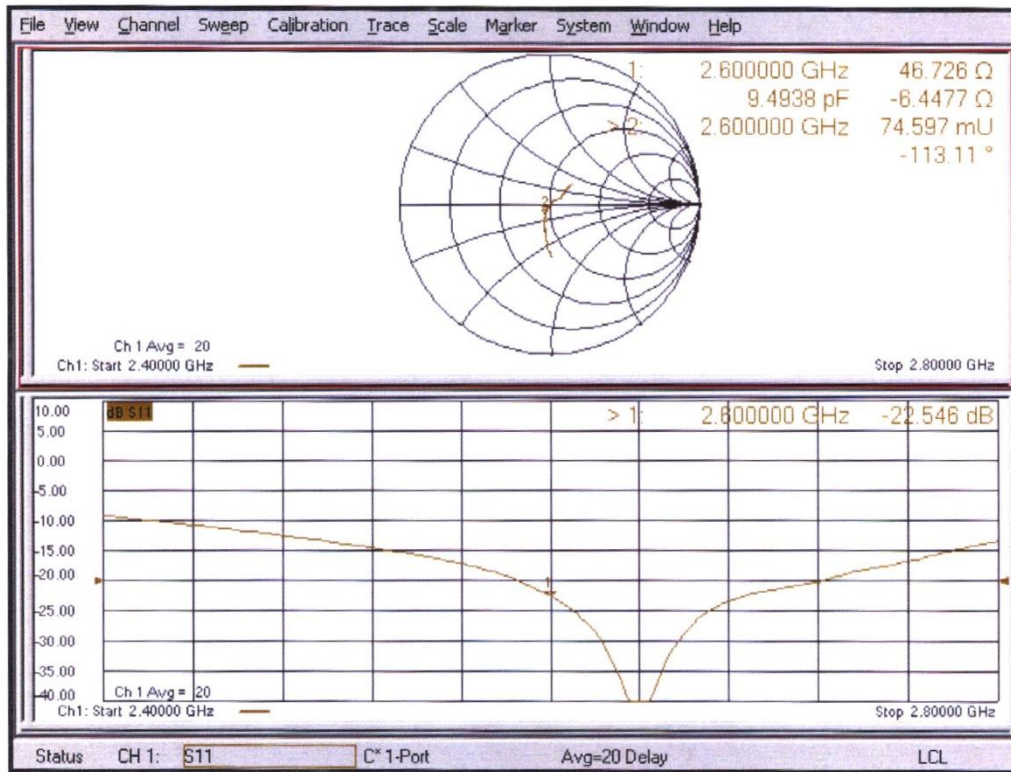

ANNEX I Spot check and newly add bands

I.1 Dielectric Performance and System Validation

Table I.1-1: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2022-12-29	835MHz	41.21	-0.70	0.891	-1.00
2022-12-26	1900MHz	40.11	0.27	1.413	0.93
2022-12-26	2600MHz	38.54	-1.20	1.974	0.71

Table I.1-2: System Validation of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value(W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2022-12-29	835MHz	6.34	9.73	6.20	9.48	-2.21%	-2.57%
2022-12-26	1900MHz	20.70	39.70	20.60	39.48	-0.48%	-0.55%
2022-12-26	2600MHz	25.2	55.8	25.8	57.5	2.22%	3.08%

I.2 Measurement result-Spot check

Band	Frequency		Test Position	DUT Type	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reporte d SAR(1g) (W/kg)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Power Drift (dB)
	Ch.	MHz									
WB5	4233	846.6	Right Cheek	T431U	21.54	22.5	0.578	0.72	0.364	0.45	-0.03
WB5	4233	846.6	Right Cheek	T431P	21.54	22.5	0.563	0.70	0.352	0.44	0.11
WB2	9262	1852.4	Rear 10mm	T431U	21.12	21.5	0.906	0.99	0.494	0.54	0.07
WB2	9262	1852.4	Rear 10mm	T431P	21.12	21.5	0.784	0.86	0.463	0.51	0.12

I.3 Reported SAR Comparison-Spot check

Table I.3: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Reported SAR 1g (W/Kg): original	Reported SAR 1g (W/Kg): spot check
Head	WCDMA850	0.95	0.72
Body	WCDMA1900	1.09	0.99

Note: All the spot check results are less than the original result. So it shares all the original results.

I.4 Conducted Output Power-Newly add bands

Band	Tune up (dBm)		
	Receiver on	Receiver off+Hotspot off	Receiver off+Hotspot on
LTE B5	23.5	24.5	24.5
LTE B41	24.5	22	21

LTE B5-Receiver on

LTE Band5					
BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	848.3 (20643)	22.39	22.58	21.48
		836.5 (20525)	22.3	22.5	21.49
		824.7 (20407)	22.32	22.51	21.54
	1RB-Middle (3)	848.3 (20643)	22.47	22.7	21.56
		836.5 (20525)	22.41	22.65	21.56
		824.7 (20407)	22.37	22.57	21.53
	1RB-Low (0)	848.3 (20643)	22.33	22.61	21.51
		836.5 (20525)	22.3	22.55	21.55
		824.7 (20407)	22.27	22.52	21.52
	3RB-High (3)	848.3 (20643)	22.4	22.34	21.49
		836.5 (20525)	22.38	22.33	21.48
		824.7 (20407)	22.36	22.32	21.42
	3RB-Middle (1)	848.3 (20643)	22.45	22.39	21.52
		836.5 (20525)	22.46	22.38	21.53
		824.7 (20407)	22.41	22.33	21.54
	3RB-Low (0)	848.3 (20643)	22.4	22.38	21.56
		836.5 (20525)	22.41	22.32	21.5
		824.7 (20407)	22.39	22.28	21.5
	6RB (0)	848.3 (20643)	22.46	21.49	20.43
		836.5 (20525)	22.42	21.53	20.4
		824.7 (20407)	22.39	21.5	20.33
3MHz	1RB-High (14)	847.5 (20635)	22.39	22.49	21.59
		836.5 (20525)	22.36	22.51	21.48
		825.5 (20415)	22.36	22.61	21.54
	1RB-Middle (7)	847.5 (20635)	22.54	22.77	21.69
		836.5 (20525)	22.51	22.68	21.68
		825.5 (20415)	22.53	22.61	21.72
	1RB-Low (0)	847.5 (20635)	22.44	22.59	21.51
		836.5 (20525)	22.39	22.61	21.51
		825.5 (20415)	22.36	22.58	21.52

	8RB-High (7)	847.5 (20635)	22.43	21.46	20.43
		836.5 (20525)	22.37	21.44	20.43
		825.5 (20415)	22.4	21.46	20.47
	8RB-Middle (4)	847.5 (20635)	22.47	21.52	20.52
		836.5 (20525)	22.43	21.49	20.48
		825.5 (20415)	22.44	21.51	20.47
	8RB-Low (0)	847.5 (20635)	22.44	21.48	20.48
		836.5 (20525)	22.4	21.45	20.42
		825.5 (20415)	22.36	21.43	20.45
	15RB (0)	847.5 (20635)	22.42	21.41	20.41
		836.5 (20525)	22.38	21.42	20.38
		825.5 (20415)	22.39	21.41	20.37
5MHz	1RB-High (24)	846.5 (20625)	22.77	22.53	21.43
		836.5 (20525)	22.24	22.42	21.36
		826.5 (20425)	22.27	22.52	21.44
	1RB-Middle (12)	846.5 (20625)	22.85	22.74	21.75
		836.5 (20525)	22.57	22.61	21.71
		826.5 (20425)	22.59	22.75	21.72
	1RB-Low (0)	846.5 (20625)	22.33	22.49	21.52
		836.5 (20525)	22.3	22.52	21.46
		826.5 (20425)	22.26	22.35	21.36
	12RB-High (13)	846.5 (20625)	22.43	21.41	20.42
		836.5 (20525)	22.37	21.36	20.38
		826.5 (20425)	22.4	21.37	20.4
	12RB-Middle (6)	846.5 (20625)	22.5	21.51	20.5
		836.5 (20525)	22.47	21.43	20.49
		826.5 (20425)	22.47	21.48	20.49
	12RB-Low (0)	846.5 (20625)	22.47	21.46	20.47
		836.5 (20525)	22.4	21.39	20.42
		826.5 (20425)	22.36	21.33	20.4
	25RB (0)	846.5 (20625)	22.46	21.46	20.45
		836.5 (20525)	22.41	21.41	20.4
		826.5 (20425)	22.42	21.43	20.4
10MHz	1RB-High (49)	844 (20600)	22.9	22.61	21.52
		836.5 (20525)	22.82	22.5	21.48
		829 (20450)	22.46	22.52	21.46
	1RB-Middle (24)	844 (20600)	23.04	22.69	21.69
		836.5 (20525)	23.02	22.71	21.65
		829 (20450)	22.61	22.65	21.6
	1RB-Low (0)	844 (20600)	22.84	22.64	21.51

		836.5 (20525)	22.87	22.56	21.51
		829 (20450)	22.37	22.51	21.49
		844 (20600)	22.98	21.49	20.48
	25RB-High (25)	836.5 (20525)	22.94	21.41	20.44
		829 (20450)	22.48	21.48	20.47
		844 (20600)	23.01	21.51	20.51
	25RB-Middle (12)	836.5 (20525)	22.99	21.49	20.51
		829 (20450)	22.49	21.45	20.45
		844 (20600)	23.06	21.54	20.57
	25RB-Low (0)	836.5 (20525)	22.85	21.42	20.45
		829 (20450)	22.46	21.5	20.43
		844 (20600)	23.04	21.52	20.52
	50RB (0)	836.5 (20525)	22.84	21.44	20.5
		829 (20450)	22.44	21.45	20.45
		844 (20600)	23.04	21.52	20.52

LTE B5-Receiver off (Hotspot on/off)

LTE Band5					
BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	848.3 (20643)	23.41	22.57	21.5
		836.5 (20525)	23.36	22.52	21.49
		824.7 (20407)	23.35	22.53	21.47
	1RB-Middle (3)	848.3 (20643)	23.46	22.72	21.63
		836.5 (20525)	23.44	22.68	21.59
		824.7 (20407)	23.42	22.63	21.57
	1RB-Low (0)	848.3 (20643)	23.36	22.64	21.5
		836.5 (20525)	23.35	22.61	21.53
		824.7 (20407)	23.32	22.46	21.47
	3RB-High (3)	848.3 (20643)	23.44	22.36	21.54
		836.5 (20525)	23.4	22.34	21.55
		824.7 (20407)	23.44	22.26	21.47
	3RB-Middle (1)	848.3 (20643)	23.49	22.46	21.62
		836.5 (20525)	23.49	22.43	21.56
		824.7 (20407)	23.48	22.37	21.56
	3RB-Low (0)	848.3 (20643)	23.45	22.34	21.52
		836.5 (20525)	23.44	22.34	21.57
		824.7 (20407)	23.43	22.33	21.5
	6RB (0)	848.3 (20643)	22.47	21.55	20.44
		836.5 (20525)	22.47	21.54	20.43
		824.7 (20407)	22.45	21.52	20.41

3MHz	1RB-High (14)	847.5 (20635)	23.68	22.63	21.61
		836.5 (20525)	23.38	22.58	21.57
		825.5 (20415)	23.38	22.67	21.54
	1RB-Middle (7)	847.5 (20635)	23.53	22.86	21.71
		836.5 (20525)	23.54	22.81	21.73
		825.5 (20415)	23.54	22.75	21.72
	1RB-Low (0)	847.5 (20635)	23.44	22.65	21.62
		836.5 (20525)	23.4	22.56	21.58
		825.5 (20415)	23.38	22.65	21.54
	8RB-High (7)	847.5 (20635)	22.44	21.52	20.51
		836.5 (20525)	22.41	21.46	20.49
		825.5 (20415)	22.44	21.5	20.47
	8RB-Middle (4)	847.5 (20635)	22.51	21.57	20.54
		836.5 (20525)	22.49	21.54	20.53
		825.5 (20415)	22.47	21.53	20.5
	8RB-Low (0)	847.5 (20635)	22.48	21.52	20.53
		836.5 (20525)	22.46	21.53	20.49
		825.5 (20415)	22.42	21.51	20.48
	15RB (0)	847.5 (20635)	22.46	21.49	20.45
		836.5 (20525)	22.44	21.45	20.44
		825.5 (20415)	22.42	21.45	20.43
5MHz	1RB-High (24)	846.5 (20625)	23.81	22.46	21.51
		836.5 (20525)	23.27	22.44	21.46
		826.5 (20425)	23.31	22.5	21.43
	1RB-Middle (12)	846.5 (20625)	23.56	22.86	21.81
		836.5 (20525)	23.51	22.77	21.67
		826.5 (20425)	23.54	22.83	21.74
	1RB-Low (0)	846.5 (20625)	23.34	22.61	21.52
		836.5 (20525)	23.31	22.47	21.48
		826.5 (20425)	23.26	22.52	21.44
	12RB-High (13)	846.5 (20625)	22.44	21.42	20.45
		836.5 (20525)	22.41	21.36	20.42
		826.5 (20425)	22.42	21.4	20.46
	12RB-Middle (6)	846.5 (20625)	22.53	21.54	20.52
		836.5 (20525)	22.49	21.48	20.49
		826.5 (20425)	22.49	21.49	20.5
	12RB-Low (0)	846.5 (20625)	22.54	21.48	20.5
		836.5 (20525)	22.43	21.45	20.44
		826.5 (20425)	22.4	21.42	20.42
	25RB (0)	846.5 (20625)	22.46	21.48	20.47

		836.5 (20525)	22.42	21.46	20.44
		826.5 (20425)	22.44	21.46	20.45
10MHz	1RB-High (49)	844 (20600)	23.91	22.6	21.59
		836.5 (20525)	23.86	22.51	21.47
		829 (20450)	23.41	22.54	21.54
	1RB-Middle (24)	844 (20600)	24.03	22.69	21.71
		836.5 (20525)	23.68	22.81	21.61
		829 (20450)	23.51	22.72	21.78
	1RB-Low (0)	844 (20600)	23.89	22.68	21.57
		836.5 (20525)	23.59	22.69	21.51
		829 (20450)	23.37	22.56	21.57
	25RB-High (25)	844 (20600)	23.02	21.52	20.51
		836.5 (20525)	22.55	21.45	20.46
		829 (20450)	22.51	21.51	20.52
	25RB-Middle (12)	844 (20600)	23.04	21.53	20.53
		836.5 (20525)	22.72	21.51	20.61
		829 (20450)	22.47	21.5	20.49
	25RB-Low (0)	844 (20600)	23.1	21.57	20.56
		836.5 (20525)	22.63	21.46	20.5
		829 (20450)	22.47	21.5	20.49
	50RB (0)	844 (20600)	23.07	21.53	20.56
		836.5 (20525)	22.68	21.48	20.59
		829 (20450)	22.47	21.49	20.5

LTE B41-Receiver on

LTE B41					
BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
5MHz	1RB-High (24)	2687.5 (41565)	25.24	24.05	22.79
		2640.3(41093)	25.09	23.89	22.63
		2593 (40620)	25.13	24.04	22.74
		2545.8(40148)	24.84	23.82	22.53
		2498.5 (39675)	24.91	23.93	22.61
	1RB-Middle (12)	2687.5 (41565)	25.35	24.17	22.88
		2640.3(41093)	25.20	23.98	22.75
		2593 (40620)	25.21	24.12	22.84
		2545.8(40148)	24.91	23.95	22.65
		2498.5 (39675)	25.01	24.01	22.73
	1RB-Low (0)	2687.5 (41565)	25.25	24.10	22.80
		2640.3(41093)	25.12	23.92	22.70

		2593 (40620)	25.12	24.08	22.77
		2545.8(40148)	24.78	23.82	22.52
		2498.5 (39675)	24.94	23.97	22.61
		2687.5 (41565)	24.31	23.23	22.31
		2640.3(41093)	24.15	23.06	22.15
	12RB-High (13)	2593 (40620)	24.33	23.14	22.21
		2545.8(40148)	23.99	22.84	21.94
		2498.5 (39675)	24.07	22.99	22.02
		2687.5 (41565)	24.39	23.30	22.38
		2640.3(41093)	24.25	23.13	22.17
	12RB-Middle (6)	2593 (40620)	24.34	23.21	22.24
		2545.8(40148)	24.04	22.93	21.94
		2498.5 (39675)	24.14	23.01	22.06
		2687.5 (41565)	24.38	23.26	22.35
		2640.3(41093)	24.21	23.11	22.17
	12RB-Low (0)	2593 (40620)	24.28	23.14	22.19
		2545.8(40148)	23.98	22.90	21.95
		2498.5 (39675)	24.07	22.97	22.01
		2687.5 (41565)	24.23	23.18	22.28
		2640.3(41093)	24.06	23.05	22.09
	25RB (0)	2593 (40620)	24.13	23.15	22.17
		2545.8(40148)	23.92	22.88	21.92
		2498.5 (39675)	23.97	22.99	22.04
		2685 (41540)	25.29	24.12	22.92
		2639(41080)	25.14	23.94	22.71
10MHz	1RB-High (49)	2593 (40620)	25.18	24.11	22.81
		2547(40160)	24.88	23.88	22.58
		2501 (39700)	24.97	23.99	22.62
		2685 (41540)	25.37	24.26	22.99
		2639(41080)	25.24	24.09	22.85
	1RB-Middle (24)	2593 (40620)	25.32	24.23	22.95
		2547(40160)	25.03	24.01	22.70
		2501 (39700)	25.10	24.07	22.76
		2685 (41540)	25.28	24.14	22.86
		2639(41080)	25.22	24.04	22.77
	1RB-Low (0)	2593 (40620)	25.22	24.17	22.86
		2547(40160)	24.90	23.96	22.61
		2501 (39700)	25.00	24.00	22.68
		2685 (41540)	24.26	23.19	22.28
		2639(41080)	24.09	23.01	22.12

		2593 (40620)	24.14	23.12	22.22
		2547(40160)	23.96	22.95	21.99
		2501 (39700)	23.99	23.01	22.07
	25RB-Middle (12)	2685 (41540)	24.28	23.25	22.34
		2639(41080)	24.15	23.11	22.16
		2593 (40620)	24.17	23.19	22.21
		2547(40160)	23.92	22.96	22.00
		2501 (39700)	23.93	23.03	22.06
	25RB-Low (0)	2685 (41540)	24.33	23.28	22.36
		2639(41080)	24.21	23.12	22.22
		2593 (40620)	24.21	23.23	22.27
		2547(40160)	24.02	22.95	22.01
		2501 (39700)	24.02	23.01	22.05
	50RB (0)	2685 (41540)	24.23	23.21	22.24
		2639(41080)	24.17	23.04	22.00
		2593 (40620)	24.07	23.16	22.13
		2547(40160)	23.87	22.94	21.90
		2501 (39700)	23.96	22.99	21.96
15MHz	1RB-High (74)	2682.5 (41515)	25.05	23.96	22.70
		2637.8(41068)	24.92	23.80	22.56
		2593 (40620)	24.98	23.99	22.68
		2548.3(40173)	24.76	23.79	22.49
		2503.5 (39725)	24.82	23.85	22.52
	1RB-Middle (37)	2682.5 (41515)	25.13	24.08	22.82
		2637.8(41068)	25.11	23.94	22.70
		2593 (40620)	25.12	24.08	22.84
		2548.3(40173)	24.90	23.92	22.60
		2503.5 (39725)	24.94	23.95	22.66
	1RB-Low (0)	2682.5 (41515)	25.03	24.00	22.74
		2637.8(41068)	25.04	23.95	22.72
		2593 (40620)	25.02	24.01	22.77
		2548.3(40173)	24.71	23.81	22.49
		2503.5 (39725)	24.84	23.85	22.52
	36RB-High (38)	2682.5 (41515)	24.28	23.18	22.24
		2637.8(41068)	24.14	23.03	22.03
		2593 (40620)	24.20	23.16	22.18
		2548.3(40173)	23.93	22.92	21.94
		2503.5 (39725)	24.03	22.97	21.99
	36RB-Middle (19)	2682.5 (41515)	24.32	23.23	22.22
		2637.8(41068)	24.19	23.11	22.15

		2593 (40620)	24.23	23.18	22.19
		2548.3(40173)	23.93	22.94	21.94
		2503.5 (39725)	24.04	22.98	21.98
		2682.5 (41515)	24.30	23.21	22.22
		2637.8(41068)	24.24	23.14	22.20
	36RB-Low (0)	2593 (40620)	24.22	23.17	22.20
		2548.3(40173)	23.94	22.91	21.92
		2503.5 (39725)	24.01	22.96	22.00
		2682.5 (41515)	24.20	23.09	22.15
		2637.8(41068)	24.11	23.00	22.07
	75RB (0)	2593 (40620)	24.11	23.11	22.10
		2548.3(40173)	23.82	22.88	21.90
		2503.5 (39725)	23.93	22.91	21.98
		2680 (41490)	24.86	23.83	22.51
		2636.5(41055)	24.71	23.68	22.35
20MHz	1RB-High (99)	2593 (40620)	24.78	23.83	22.52
		2549.5(40185)	24.56	23.58	22.26
		2506 (39750)	24.57	23.64	22.33
		2680 (41490)	25.22	24.12	22.92
		2636.5(41055)	25.10	24.02	22.76
	1RB-Middle (50)	2593 (40620)	25.20	24.20	22.93
		2549.5(40185)	24.92	23.97	22.63
		2506 (39750)	24.95	24.04	22.64
		2680 (41490)	24.87	23.85	22.53
		2636.5(41055)	24.88	23.82	22.53
	1RB-Low (0)	2593 (40620)	24.93	23.96	22.59
		2549.5(40185)	24.57	23.59	22.28
		2506 (39750)	24.66	23.69	22.38
		2680 (41490)	23.92	23.05	22.11
		2636.5(41055)	23.81	22.82	21.86
	50RB-High (50)	2593 (40620)	23.93	23.07	22.06
		2549.5(40185)	23.79	22.92	21.89
		2506 (39750)	23.80	22.89	21.88
		2680 (41490)	24.05	23.08	22.12
		2636.5(41055)	23.99	23.02	22.03
	50RB-Middle (25)	2593 (40620)	23.99	23.10	22.05
		2549.5(40185)	23.79	22.93	21.89
		2506 (39750)	23.82	22.92	21.89
		2680 (41490)	23.94	23.11	22.14
		2636.5(41055)	24.03	23.04	22.04

		2593 (40620)	24.04	23.11	22.10
		2549.5(40185)	23.74	22.87	21.85
		2506 (39750)	23.80	22.88	21.87
	100RB (0)	2680 (41490)	24.16	23.22	22.23
		2636.5(41055)	24.09	23.06	22.02
		2593 (40620)	24.12	23.18	22.16
		2549.5(40185)	23.86	22.91	21.90
		2506 (39750)	23.86	22.99	21.91

LTE B41-Receiver off (Hotspot off)

LTE B41					
BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
5MHz	1RB-High (24)	2687.5 (41565)	20.81	20.97	20.61
		2640.3(41093)	20.60	20.74	20.47
		2593 (40620)	20.81	20.78	20.49
		2545.8(40148)	20.38	20.60	20.26
		2498.5 (39675)	20.46	20.83	20.37
	1RB-Middle (12)	2687.5 (41565)	21.15	21.17	20.83
		2640.3(41093)	21.20	21.19	20.89
		2593 (40620)	21.25	21.16	20.83
		2545.8(40148)	20.79	21.01	20.55
		2498.5 (39675)	21.11	21.24	20.58
	1RB-Low (0)	2687.5 (41565)	20.77	20.86	20.60
		2640.3(41093)	20.82	20.98	20.55
		2593 (40620)	20.72	20.86	20.62
		2545.8(40148)	20.57	20.61	20.18
		2498.5 (39675)	20.55	20.82	20.35
	12RB-High (13)	2687.5 (41565)	20.94	20.96	20.96
		2640.3(41093)	20.91	21.00	20.97
		2593 (40620)	20.96	21.13	20.96
		2545.8(40148)	20.69	20.85	20.92
		2498.5 (39675)	20.90	20.78	20.81
	12RB-Middle (6)	2687.5 (41565)	20.98	21.16	21.08
		2640.3(41093)	20.89	20.90	20.92
		2593 (40620)	21.01	21.20	21.00
		2545.8(40148)	20.85	20.80	20.68
		2498.5 (39675)	20.95	20.77	20.85
	12RB-Low (0)	2687.5 (41565)	21.12	21.05	21.04
		2640.3(41093)	21.23	21.01	21.06

10MHz	25RB (0)	2593 (40620)	20.95	21.08	21.06
		2545.8(40148)	20.84	20.92	20.68
		2498.5 (39675)	20.86	20.87	20.82
		2687.5 (41565)	21.14	21.27	21.13
		2640.3(41093)	21.22	20.98	20.91
		2593 (40620)	21.07	21.26	21.22
	1RB-High (49)	2545.8(40148)	20.78	21.05	20.96
		2498.5 (39675)	20.98	20.80	20.88
		2685 (41540)	20.76	21.04	20.47
		2639(41080)	20.54	20.92	20.31
		2593 (40620)	20.71	20.87	20.43
		2547(40160)	20.51	20.72	20.24
	1RB-Middle (24)	2501 (39700)	20.54	20.55	20.41
		2685 (41540)	21.30	21.22	20.86
		2639(41080)	21.01	21.02	20.66
		2593 (40620)	21.03	21.23	20.90
		2547(40160)	20.95	21.12	20.71
	1RB-Low (0)	2501 (39700)	20.85	21.17	20.69
		2685 (41540)	20.95	21.06	20.48
		2639(41080)	20.85	21.02	20.63
		2593 (40620)	20.88	21.01	20.63
		2547(40160)	20.44	20.58	20.20
	25RB-High (25)	2501 (39700)	20.56	20.64	20.45
		2685 (41540)	20.95	20.97	21.05
		2639(41080)	20.93	20.95	20.80
		2593 (40620)	20.86	21.05	20.95
		2547(40160)	20.66	20.85	20.90
	25RB-Middle (12)	2501 (39700)	20.89	20.95	20.86
		2685 (41540)	20.98	21.14	21.18
		2639(41080)	21.13	21.10	21.01
		2593 (40620)	20.97	21.06	21.07
		2547(40160)	20.73	20.91	20.93
	25RB-Low (0)	2501 (39700)	20.86	20.92	20.78
		2685 (41540)	21.14	21.02	21.04
		2639(41080)	21.06	21.05	20.98
		2593 (40620)	21.11	20.99	21.08
		2547(40160)	20.82	20.85	20.87
	50RB (0)	2501 (39700)	20.84	20.65	20.92
		2685 (41540)	21.06	21.29	21.14
	50RB (0)	2639(41080)	21.11	21.18	21.01

		2593 (40620)	21.08	21.10	21.25
		2547(40160)	20.85	21.05	20.92
		2501 (39700)	21.04	21.03	20.98
15MHz	1RB-High (74)	2682.5 (41515)	20.70	20.99	20.48
		2637.8(41068)	20.76	20.84	20.34
		2593 (40620)	20.81	20.90	20.56
		2548.3(40173)	20.43	20.74	20.20
		2503.5 (39725)	20.54	20.70	20.35
	1RB-Middle (37)	2682.5 (41515)	21.16	21.21	20.91
		2637.8(41068)	21.21	21.15	20.63
		2593 (40620)	21.20	21.32	20.96
		2548.3(40173)	20.93	20.93	20.60
		2503.5 (39725)	20.98	21.02	20.77
	1RB-Low (0)	2682.5 (41515)	20.79	20.89	20.66
		2637.8(41068)	20.81	21.01	20.53
		2593 (40620)	20.75	21.05	20.51
		2548.3(40173)	20.47	20.63	20.14
		2503.5 (39725)	20.74	20.78	20.41
	36RB-High (38)	2682.5 (41515)	20.95	21.11	20.98
		2637.8(41068)	21.00	20.80	20.88
		2593 (40620)	21.00	21.09	20.96
		2548.3(40173)	20.85	20.77	20.93
		2503.5 (39725)	20.81	20.91	20.86
	36RB-Middle (19)	2682.5 (41515)	21.22	21.02	21.20
		2637.8(41068)	20.87	21.06	20.94
		2593 (40620)	21.16	21.11	21.08
		2548.3(40173)	20.89	20.75	20.88
		2503.5 (39725)	20.83	20.86	20.97
	36RB-Low (0)	2682.5 (41515)	20.95	21.19	21.09
		2637.8(41068)	21.09	20.97	21.21
		2593 (40620)	20.99	21.00	21.18
		2548.3(40173)	20.74	20.70	20.86
		2503.5 (39725)	20.80	20.89	20.72
	75RB (0)	2682.5 (41515)	21.22	21.13	21.26
		2637.8(41068)	21.20	21.04	21.07
		2593 (40620)	21.01	21.25	20.99
		2548.3(40173)	20.98	20.93	20.78
		2503.5 (39725)	21.05	21.06	21.03
20MHz	1RB-High (99)	2680 (41490)	20.90	21.03	20.63
		2636.5(41055)	20.74	20.87	20.47

		2593 (40620)	20.85	20.94	20.52
		2549.5(40185)	20.51	20.72	20.28
		2506 (39750)	20.66	20.75	20.34
	1RB-Middle (50)	2680 (41490)	21.23	21.36	20.95
		2636.5(41055)	21.20	21.22	20.81
		2593 (40620)	21.22	21.32	20.92
		2549.5(40185)	20.95	21.09	20.68
		2506 (39750)	21.04	21.17	20.71
	1RB-Low (0)	2680 (41490)	20.94	21.04	20.64
		2636.5(41055)	20.97	21.02	20.63
		2593 (40620)	20.91	20.99	20.60
		2549.5(40185)	20.59	20.72	20.32
		2506 (39750)	20.71	20.81	20.39
	50RB-High (50)	2680 (41490)	21.10	21.14	21.09
		2636.5(41055)	20.92	20.99	20.97
		2593 (40620)	21.06	21.11	21.10
		2549.5(40185)	20.82	20.88	20.87
		2506 (39750)	20.90	20.94	20.92
	50RB-Middle (25)	2680 (41490)	21.16	21.20	21.21
		2636.5(41055)	21.06	21.08	21.06
		2593 (40620)	21.09	21.12	21.11
		2549.5(40185)	20.82	20.87	20.85
		2506 (39750)	20.91	20.93	20.91
	50RB-Low (0)	2680 (41490)	21.13	21.15	21.17
		2636.5(41055)	21.15	21.17	21.16
		2593 (40620)	21.08	21.13	21.11
		2549.5(40185)	20.82	20.85	20.83
		2506 (39750)	20.81	20.84	20.86
	100RB (0)	2680 (41490)	21.23	21.25	21.21
		2636.5(41055)	21.14	21.12	21.11
		2593 (40620)	21.18	21.18	21.18
		2549.5(40185)	20.92	20.97	20.96
		2506 (39750)	20.99	20.99	20.96

LTE B41-Receiver off (Hotspot on)

LTE B41					
BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
5MHz	1RB-High (24)	2687.5 (41565)	20.08	19.91	19.59
		2640.3(41093)	19.65	19.84	19.37

		2593 (40620)	19.72	19.76	19.41
		2545.8(40148)	19.51	19.75	19.25
		2498.5 (39675)	19.58	19.86	19.47
	1RB-Middle (12)	2687.5 (41565)	20.30	20.28	19.90
		2640.3(41093)	20.06	20.27	19.82
		2593 (40620)	20.28	20.13	19.89
		2545.8(40148)	20.01	19.88	19.59
		2498.5 (39675)	20.15	20.21	19.57
	1RB-Low (0)	2687.5 (41565)	20.04	20.07	19.53
		2640.3(41093)	19.91	19.99	19.53
		2593 (40620)	19.84	20.02	19.60
		2545.8(40148)	19.65	19.58	19.17
		2498.5 (39675)	19.80	19.68	19.29
	12RB-High (13)	2687.5 (41565)	20.26	20.00	20.21
		2640.3(41093)	19.94	20.06	19.89
		2593 (40620)	20.17	20.18	20.11
		2545.8(40148)	19.81	19.84	19.90
		2498.5 (39675)	19.80	19.88	19.98
	12RB-Middle (6)	2687.5 (41565)	20.31	20.26	20.28
		2640.3(41093)	20.11	20.08	20.14
		2593 (40620)	20.19	20.10	20.17
		2545.8(40148)	19.93	19.74	19.79
		2498.5 (39675)	19.82	19.95	19.98
	12RB-Low (0)	2687.5 (41565)	20.20	20.17	20.26
		2640.3(41093)	20.20	20.25	20.18
		2593 (40620)	20.20	20.12	20.18
		2545.8(40148)	19.69	19.72	19.91
		2498.5 (39675)	19.73	19.75	19.75
	25RB (0)	2687.5 (41565)	20.15	20.36	20.29
		2640.3(41093)	20.14	20.09	20.26
		2593 (40620)	20.05	20.29	20.22
		2545.8(40148)	19.83	19.99	19.96
		2498.5 (39675)	20.06	19.90	20.04
10MHz	1RB-High (49)	2685 (41540)	19.80	20.09	19.74
		2639(41080)	19.69	19.95	19.52
		2593 (40620)	19.77	19.89	19.63
		2547(40160)	19.53	19.65	19.31
		2501 (39700)	19.69	19.82	19.25
	1RB-Middle (24)	2685 (41540)	20.13	20.43	20.06
		2639(41080)	20.08	20.37	19.99

		2593 (40620)	20.22	20.18	19.97
		2547(40160)	20.03	19.90	19.54
		2501 (39700)	19.98	20.03	19.70
	1RB-Low (0)	2685 (41540)	19.82	20.08	19.50
		2639(41080)	19.84	20.10	19.53
		2593 (40620)	19.86	19.86	19.62
		2547(40160)	19.61	19.77	19.33
		2501 (39700)	19.60	19.71	19.24
	25RB-High (25)	2685 (41540)	20.02	20.16	20.27
		2639(41080)	19.88	19.92	20.04
		2593 (40620)	20.03	20.06	20.20
		2547(40160)	19.82	19.79	19.91
		2501 (39700)	19.85	19.89	19.77
	25RB-Middle (12)	2685 (41540)	20.06	20.23	20.29
		2639(41080)	20.02	20.12	19.95
		2593 (40620)	20.03	20.05	20.08
		2547(40160)	19.74	19.74	19.73
		2501 (39700)	19.90	19.92	19.95
	25RB-Low (0)	2685 (41540)	20.18	20.11	20.06
		2639(41080)	20.18	20.19	20.11
		2593 (40620)	19.95	19.96	20.09
		2547(40160)	19.85	19.80	19.79
		2501 (39700)	19.74	19.76	19.90
	50RB (0)	2685 (41540)	20.36	20.24	20.34
		2639(41080)	20.10	20.21	20.01
		2593 (40620)	20.19	20.11	20.24
		2547(40160)	20.06	19.88	20.03
		2501 (39700)	19.97	20.00	20.08
15MHz	1RB-High (74)	2682.5 (41515)	19.80	20.11	19.55
		2637.8(41068)	19.70	19.95	19.30
		2593 (40620)	19.91	19.87	19.45
		2548.3(40173)	19.47	19.56	19.21
		2503.5 (39725)	19.73	19.59	19.32
	1RB-Middle (37)	2682.5 (41515)	20.19	20.48	19.88
		2637.8(41068)	20.17	20.36	19.80
		2593 (40620)	20.21	20.23	19.71
		2548.3(40173)	19.82	20.08	19.69
		2503.5 (39725)	20.03	20.05	19.68
	1RB-Low (0)	2682.5 (41515)	19.96	20.09	19.64
		2637.8(41068)	20.10	19.94	19.68

			2593 (40620)	19.91	20.10	19.70
			2548.3(40173)	19.70	19.72	19.25
			2503.5 (39725)	19.57	19.73	19.41
		36RB-High (38)	2682.5 (41515)	20.27	20.05	20.26
			2637.8(41068)	20.00	19.98	19.90
			2593 (40620)	20.06	20.00	19.92
			2548.3(40173)	19.75	19.89	19.82
			2503.5 (39725)	19.79	19.82	19.75
		36RB-Middle (19)	2682.5 (41515)	20.14	20.19	20.21
			2637.8(41068)	19.93	20.11	20.10
			2593 (40620)	20.16	20.06	20.00
			2548.3(40173)	19.83	19.76	19.91
			2503.5 (39725)	19.74	19.84	19.86
		36RB-Low (0)	2682.5 (41515)	20.12	20.32	20.15
			2637.8(41068)	20.13	20.05	20.12
			2593 (40620)	20.16	20.23	19.94
			2548.3(40173)	19.93	19.88	19.82
			2503.5 (39725)	19.93	19.89	19.68
		75RB (0)	2682.5 (41515)	20.37	20.24	20.34
			2637.8(41068)	20.07	20.04	20.22
			2593 (40620)	20.07	20.11	20.08
			2548.3(40173)	19.87	19.98	20.04
			2503.5 (39725)	20.05	20.10	20.04
20MHz	1RB-High (99)		2680 (41490)	20.00	20.09	19.66
			2636.5(41055)	19.85	19.92	19.47
			2593 (40620)	19.90	19.92	19.55
			2549.5(40185)	19.63	19.72	19.25
			2506 (39750)	19.72	19.79	19.39
		1RB-Middle (50)	2680 (41490)	20.29	20.44	20.00
			2636.5(41055)	20.22	20.34	19.97
			2593 (40620)	20.25	20.31	19.90
			2549.5(40185)	20.01	20.06	19.67
			2506 (39750)	20.14	20.19	19.72
	1RB-Low (0)		2680 (41490)	20.02	20.09	19.68
			2636.5(41055)	20.02	20.10	19.67
			2593 (40620)	19.97	20.03	19.64
			2549.5(40185)	19.68	19.78	19.33
			2506 (39750)	19.75	19.83	19.43
	50RB-High (50)		2680 (41490)	20.20	20.20	20.22
			2636.5(41055)	20.03	20.03	20.01

		2593 (40620)	20.12	20.14	20.12
		2549.5(40185)	19.91	19.91	19.90
		2506 (39750)	19.96	19.95	19.93
	50RB-Middle (25)	2680 (41490)	20.23	20.28	20.23
		2636.5(41055)	20.11	20.13	20.12
		2593 (40620)	20.15	20.16	20.14
		2549.5(40185)	19.88	19.89	19.88
		2506 (39750)	19.94	19.94	19.93
	50RB-Low (0)	2680 (41490)	20.22	20.25	20.23
		2636.5(41055)	20.22	20.18	20.17
		2593 (40620)	20.15	20.15	20.14
		2549.5(40185)	19.87	19.84	19.83
		2506 (39750)	19.89	19.89	19.87
	100RB (0)	2680 (41490)	20.31	20.31	20.28
		2636.5(41055)	20.20	20.16	20.21
		2593 (40620)	20.24	20.26	20.23
		2549.5(40185)	19.98	19.99	19.98
		2506 (39750)	20.02	20.04	20.00

I.5 SAR results - Newly add bands

Table I.5-1: SAR Values (LTE Band5- Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Power Drift (dB)
Ch.	MHz											
20600	844	1RB_Mid	Left	Cheek	/	24.03	24.5	0.62	0.69	0.411	0.46	0.13
20600	844	1RB_Mid	Left	Tilt	/	24.03	24.5	0.553	0.62	0.337	0.38	0.09
20600	844	1RB_Mid	Right	Cheek	1	24.03	24.5	0.659	0.73	0.433	0.48	-0.01
20600	844	1RB_Mid	Right	Tilt	/	24.03	24.5	0.561	0.63	0.334	0.37	-0.04
20600	844	25RB-Low	Left	Cheek	/	23.1	23.5	0.596	0.65	0.395	0.43	-0.09
20600	844	25RB-Low	Left	Tilt	/	23.1	23.5	0.536	0.59	0.327	0.36	-0.07
20600	844	25RB-Low	Right	Cheek	/	23.1	23.5	0.63	0.69	0.415	0.46	0.15
20600	844	25RB-Low	Right	Tilt	/	23.1	23.5	0.535	0.59	0.318	0.35	0.05

Note1: The LTE mode is QPSK_10MHz.

Table I.5-2: SAR Values (LTE Band5 – Body)

Ambient Temperature: 22.9 °C					Liquid Temperature: 22.5°C					
Frequency		Mode/Position	Figure No.	Conduct ed Power (dBm)	Max. tune- up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Power Drift (dB)
Ch.	MHz									
20600	844	1RB-Mid Front	/	23.04	23.5	0.307	0.34	0.189	0.21	-0.13
20600	844	1RB-Mid Rear	2	23.04	23.5	0.506	0.56	0.299	0.33	-0.09
20600	844	1RB-Mid Left	/	23.04	23.5	0.16	0.18	0.111	0.12	-0.03
20600	844	1RB-Mid Right	/	23.04	23.5	<0.01	<0.01	<0.01	<0.01	/
20600	844	1RB-Mid Top	/	23.04	23.5	0.395	0.44	0.229	0.25	0.04
20600	844	25RB-Low Front	/	23.06	23.5	0.23	0.25	0.141	0.16	0.18
20600	844	25RB-Low Rear	/	23.06	23.5	0.35	0.39	0.208	0.23	-0.14
20600	844	25RB-Low Left	/	23.06	23.5	0.152	0.17	0.105	0.12	-0.02
20600	844	25RB-Low Right		23.06	23.5	<0.01	<0.01	<0.01	<0.01	/
20600	844	25RB-Low Top	/	23.06	23.5	0.262	0.29	0.149	0.16	0.15

Note1: The distance between the EUT and the phantom bottom is 10mm

Note2: The LTE mode is QPSK_10MHz.

Table I.5-3: SAR Values (LTE Band41- Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Power Drift (dB)
Ch.	MHz											
41490	2680	1RB_Mid	Left	Cheek	3	25.22	25.5	0.018	0.02	0.007	0.01	0.15
41490	2680	1RB_Mid	Left	Tilt	/	25.22	25.5	<0.01	<0.01	<0.01	<0.01	/
41490	2680	1RB_Mid	Right	Cheek	/	25.22	25.5	<0.01	<0.01	<0.01	<0.01	/
41490	2680	1RB_Mid	Right	Tilt	/	25.22	25.5	<0.01	<0.01	<0.01	<0.01	/
41490	2680	50RB-Mid	Left	Cheek	/	24.05	24.5	<0.01	<0.01	<0.01	<0.01	/
41490	2680	50RB-Mid	Left	Tilt	/	24.05	24.5	<0.01	<0.01	<0.01	<0.01	/
41490	2680	50RB-Mid	Right	Cheek	/	24.05	24.5	<0.01	<0.01	<0.01	<0.01	/
41490	2680	50RB-Mid	Right	Tilt	/	24.05	24.5	<0.01	<0.01	<0.01	<0.01	/

Note1: The LTE mode is QPSK_20MHz.

Table I.5-4: SAR Values (LTE Band41– Body worn)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C						
Frequency		Mode/Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Power Drift (dB)
Ch.	MHz									
41490	2680	1RB-Mid Front	/	21.23	22	0.079	0.09	0.039	0.05	-0.06
41490	2680	1RB-Mid Rear	4	21.23	22	0.166	0.20	0.077	0.09	-0.12
41490	2680	50RB-Mid Front	/	21.16	22	0.077	0.09	0.038	0.05	0.03
41490	2680	50RB-Mid Rear	/	21.16	22	0.141	0.17	0.061	0.07	0.07

Note1: The distance between the EUT and the phantom bottom is 15mm

Note2: The LTE mode is QPSK_20MHz.

Table I.5-5: SAR Values (LTE Band41 – Hotspot)

Frequency		Ambient Temperature: 22.9 °C		Liquid Temperature: 22.5°C						
Ch.	MHz	Mode/Position	Figure No.	Conduct ed Power (dBm)	Max. tune- up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Power Drift (dB)
41490	2680	1RB-Low Front	/	20.29	21	0.128	0.15	0.064	0.08	/
41490	2680	1RB-Low Rear	/	20.29	21	0.283	0.33	0.121	0.14	0.12
41490	2680	1RB-Low Left	/	20.29	21	<0.01	<0.01	<0.01	<0.01	/
41490	2680	1RB-Low Right	/	20.29	21	<0.01	<0.01	<0.01	<0.01	/
41490	2680	1RB-Low Bottom	5	20.29	21	0.453	0.53	0.197	0.23	-0.19
41490	2680	50RB-Mid Front	/	20.23	21	0.112	0.13	0.053	0.06	0.10
41490	2680	50RB-Mid Rear	/	20.23	21	0.252	0.30	0.107	0.13	-0.06
41490	2680	50RB-Mid Left	/	20.23	21	<0.01	<0.01	<0.01	<0.01	/
41490	2680	50RB-Mid Right	/	20.23	21	<0.01	<0.01	<0.01	<0.01	/
41490	2680	50RB-Mid Bottom	/	20.23	21	0.448	0.53	0.174	0.21	0.04

Note1: The distance between the EUT and the phantom bottom is 10mm

Note2: The LTE mode is QPSK_20MHz.

I.6 Graph Results

WCDMA850 Head

Date: 12/29/2022

Electronics: DAE4 Sn1331

Medium: H700-6000

Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 41.218$; $\rho = 1000$ kg/m³


Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: WCDMA850(B5) 846.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(10.3, 10.3, 10.3)

Area Scan (81x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (6x7x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 24.59 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.38 W/kg
SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.364 W/kg
Maximum value of SAR (measured) = 1.01 W/kg

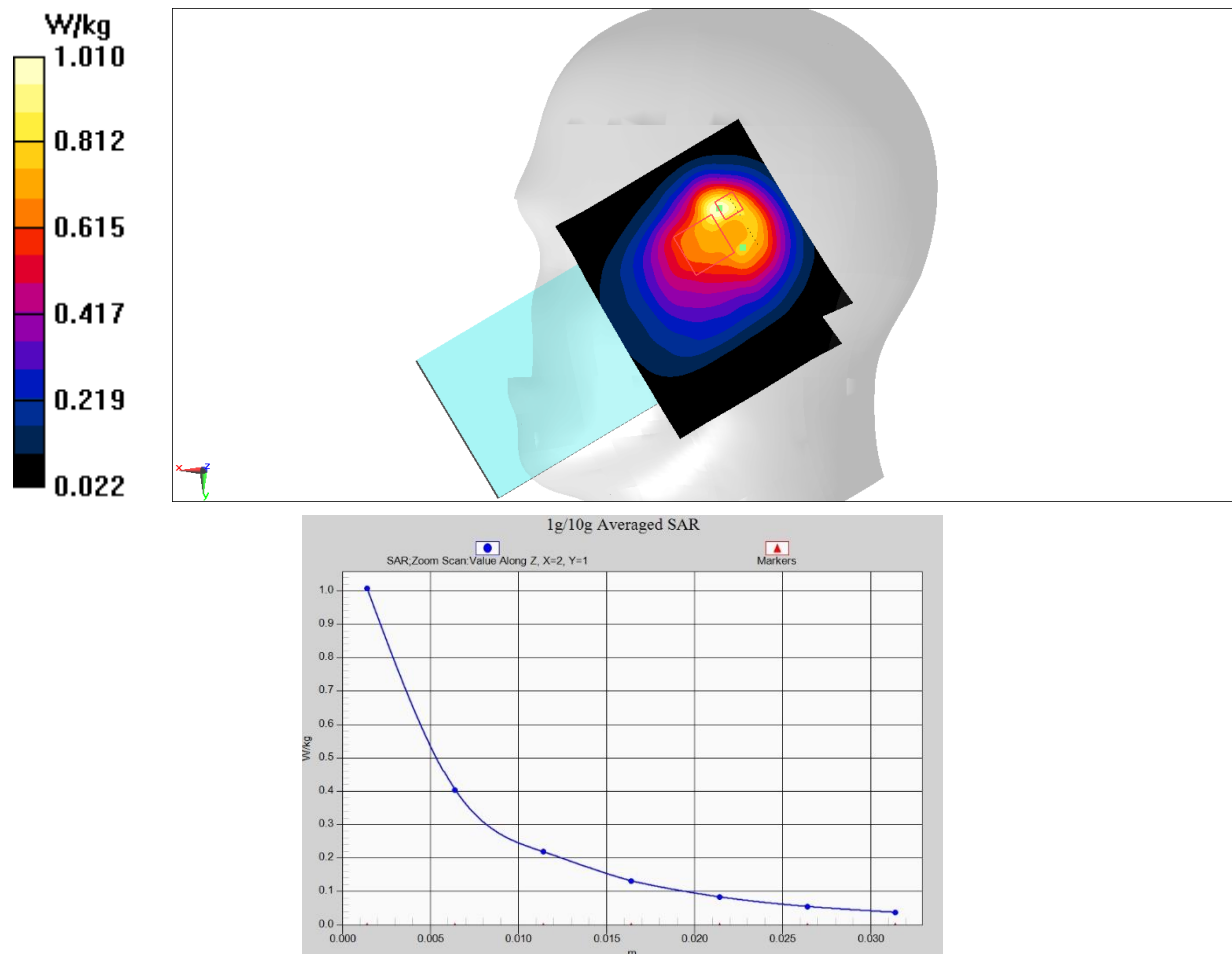

WCDMA1900 Body

Date: 12/26/2022

Electronics: DAE4 Sn1331

Medium: H700-6000

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 40.199$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: WCDMA1900(B2) 1852.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.8, 7.8, 7.8)

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.41 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.790 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.494 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

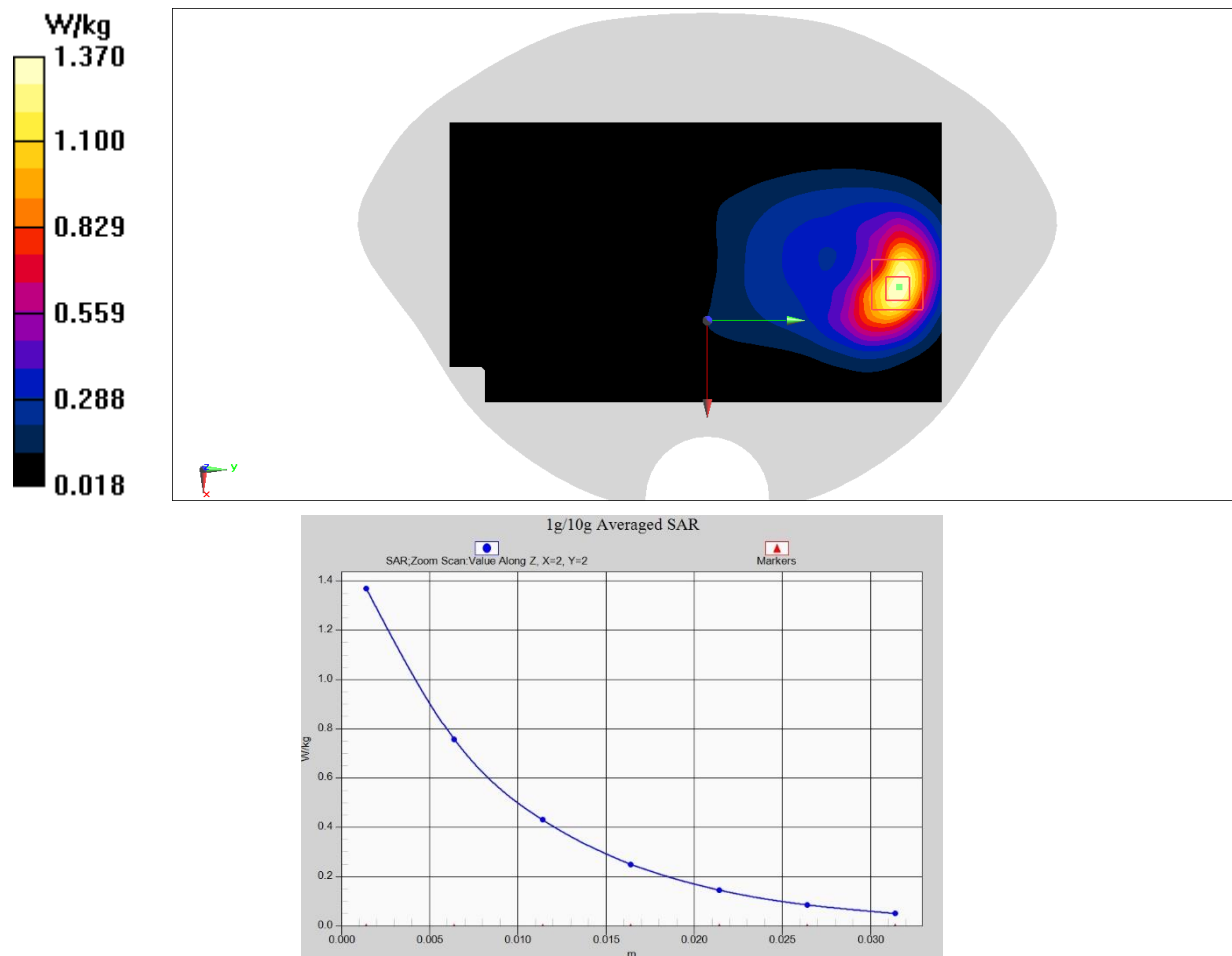

LTE Band5 Head

Date: 12/29/2022

Electronics: DAE4 Sn1331

Medium: H700-6000

Medium parameters used: $f = 844$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.22$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: LTE Band5 844 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(10.3, 10.3, 10.3)

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.15 W/kg



Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.25 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.433 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

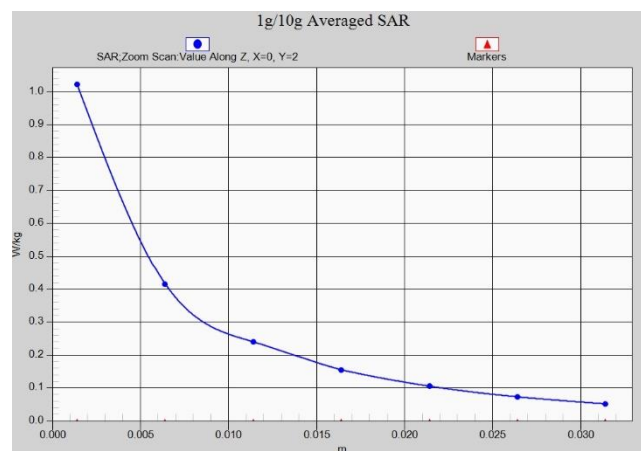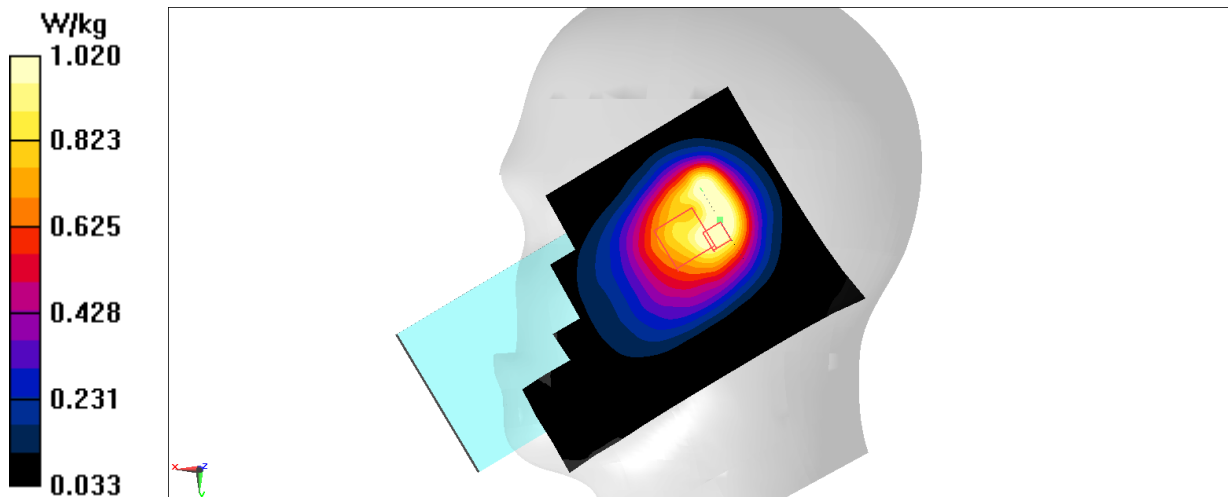

LTE Band5 Body

Date: 12/29/2022

Electronics: DAE4 Sn1331

Medium: H700-6000

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 41.22$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: LTE Band5 844 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(10.3, 10.3, 10.3)

Area Scan (81x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.717 W/kg




Zoom Scan (6x8x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.56 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.918 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 0.758 W/kg

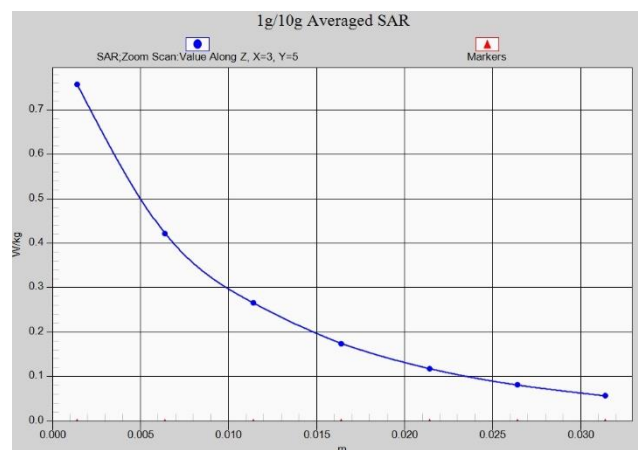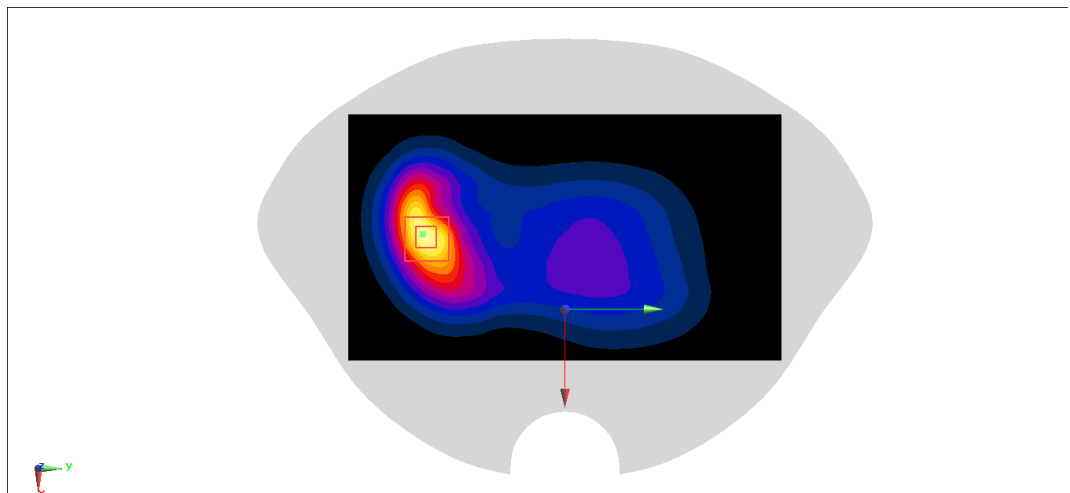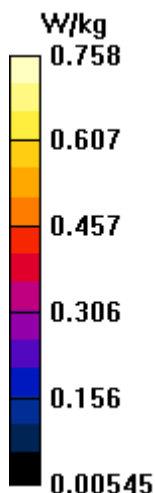

LTE B41 Head

Date: 12/26/2022

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.046$ S/m; $\epsilon_r = 38.486$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: LTE Band41 2680 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0467 W/kg



Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.12 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.0068 W/kg

Maximum value of SAR (measured) = 0.0321 W/kg

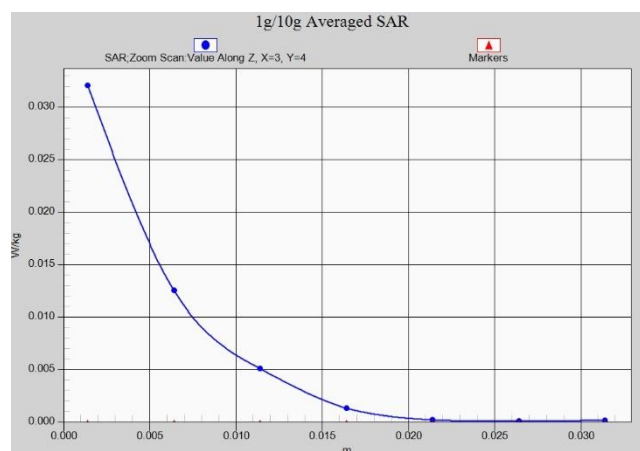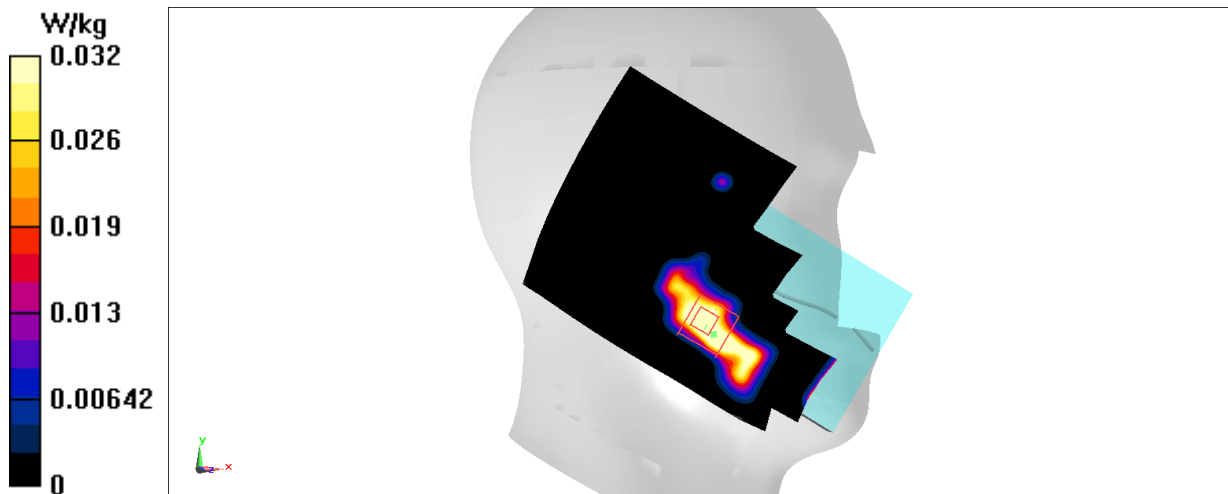

LTE B41 Body worn

Date: 12/26/2022

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.046$ S/m; $\epsilon_r = 38.486$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: LTE Band41 2680 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.290 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.15 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.275 W/kg

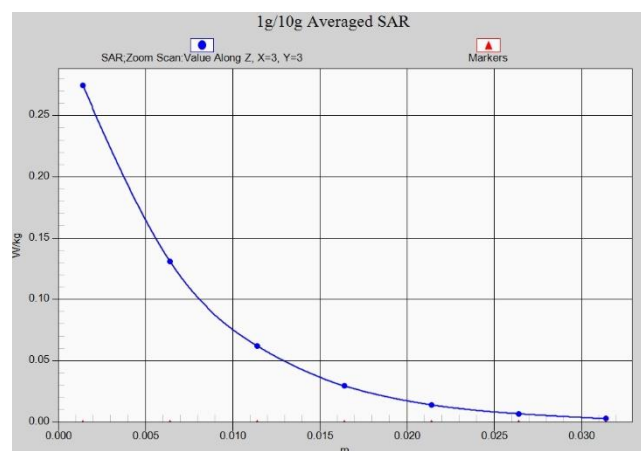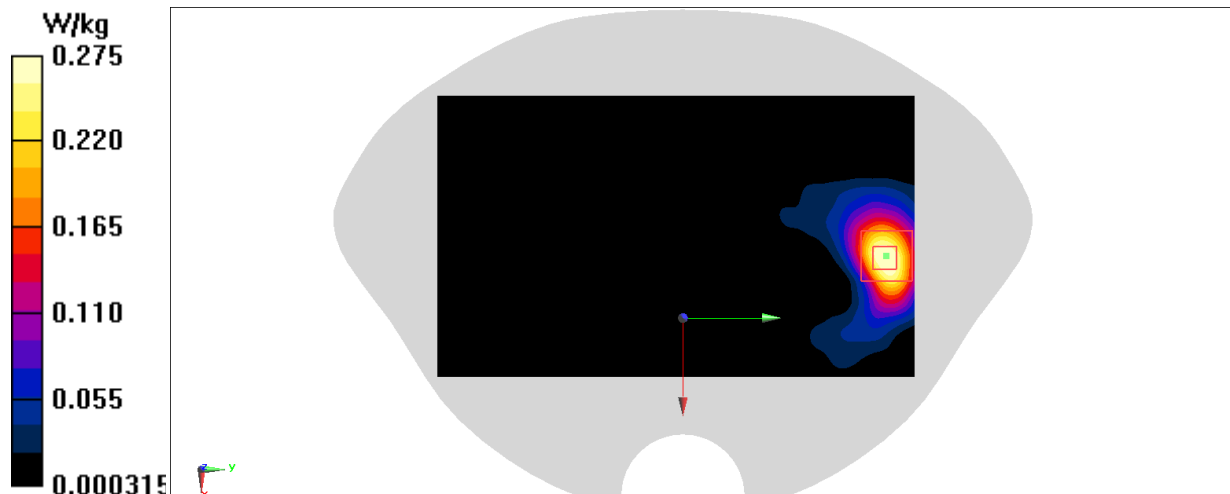

LTE B41 Hotspot

Date: 12/26/2022

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.046$ S/m; $\epsilon_r = 38.486$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: LTE Band41 2680 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (61x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.785 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.76 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.789 W/kg

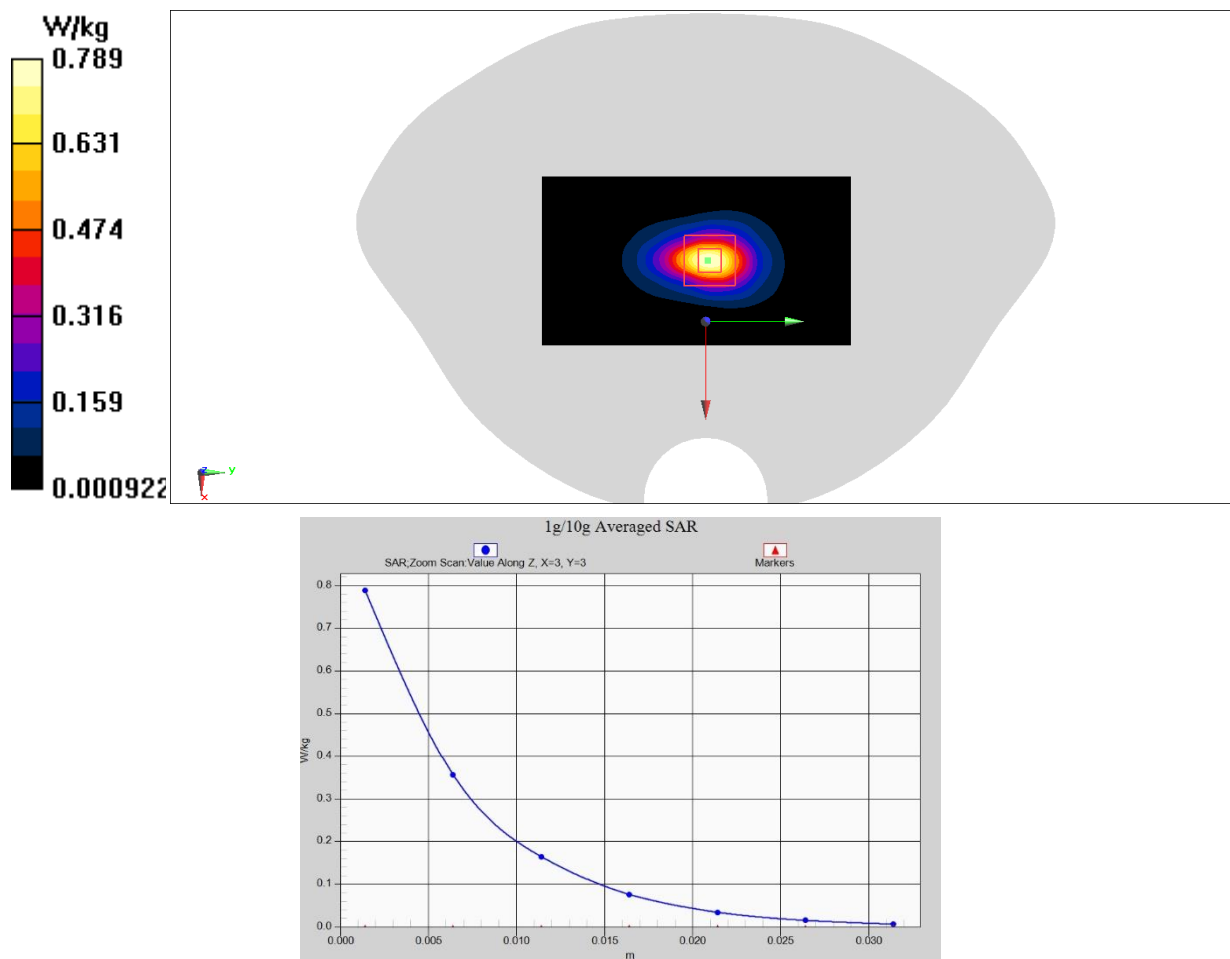

I.7 System Validation Results

835 MHz

Date: 12/29/2022

Electronics: DAE4 Sn1331

Medium: H700-6000

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.891 \text{ S/m}$; $\epsilon_r = 41.21$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(10.3, 10.3, 10.3)

Area Scan (51x141x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 58.15 V/m ; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 2.34 W/kg ; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (interpolated) = 3.11 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.15 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 2.37 W/kg ; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 3.08 W/kg

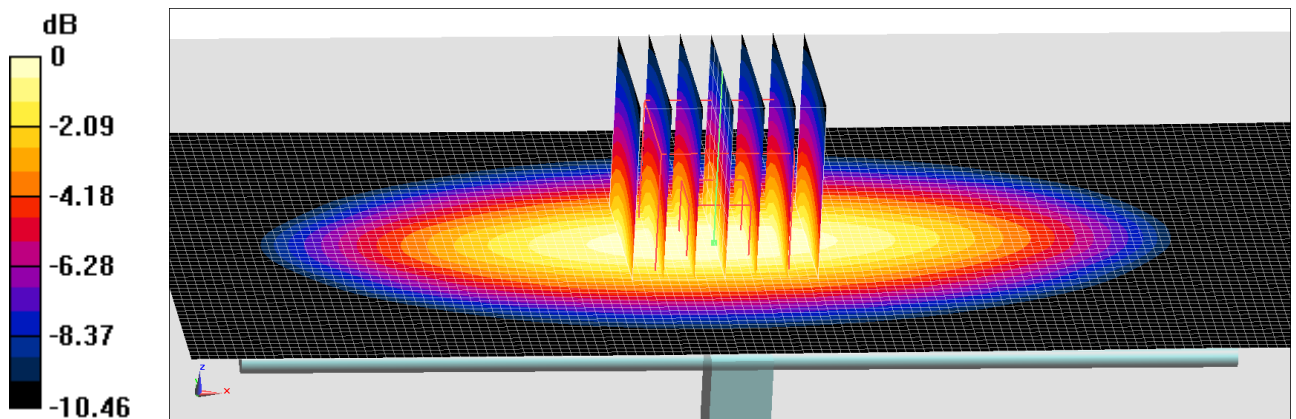

0 dB = 3.08 W/kg = 4.89 dBW/kg

1900MHz

Date: 12/26/2022

Electronics: DAE4 Sn1331

Medium: H700-6000

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 40.11$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.8, 7.8, 7.8)

Area Scan (51x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Reference Value = 100.9 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 9.84 W/kg; SAR(10 g) = 5.1 W/kg

Maximum value of SAR (interpolated) = 15.8 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 100.9 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 19.0 W/kg

SAR(1 g) = 9.87 W/kg; SAR(10 g) = 5.15 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

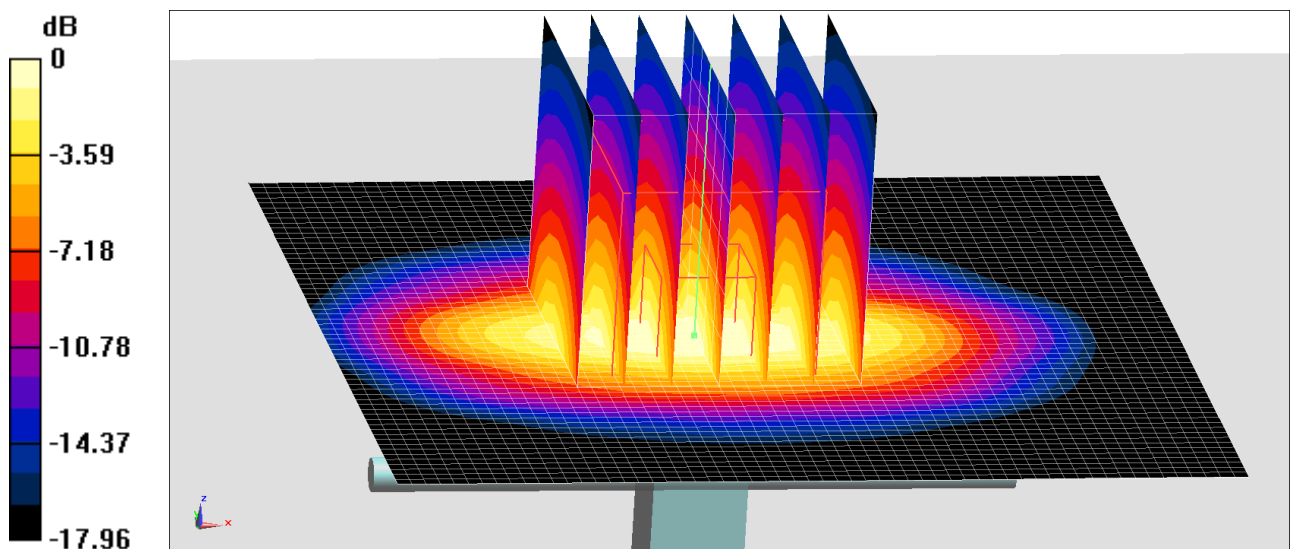

$$0 \text{ dB} = 15.7 \text{ W/kg} = 11.96 \text{ dBW/kg}$$

2600MHz

Date: 12/26/2022

Electronics: DAE4 Sn1331

Medium: H700-6000

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 38.54$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 2600 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.12, 7.12, 7.12)

Area Scan (61x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Reference Value = 105.1 V/m; Power Drift = 0.01 dB

Fast SAR: SAR(1 g) = 14.44 W/kg; SAR(10 g) = 6.48 W/kg

Maximum value of SAR (interpolated) = 24.9 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 105.1 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 14.38 W/kg; SAR(10 g) = 6.44 W/kg

Maximum value of SAR (measured) = 24.8 W/kg

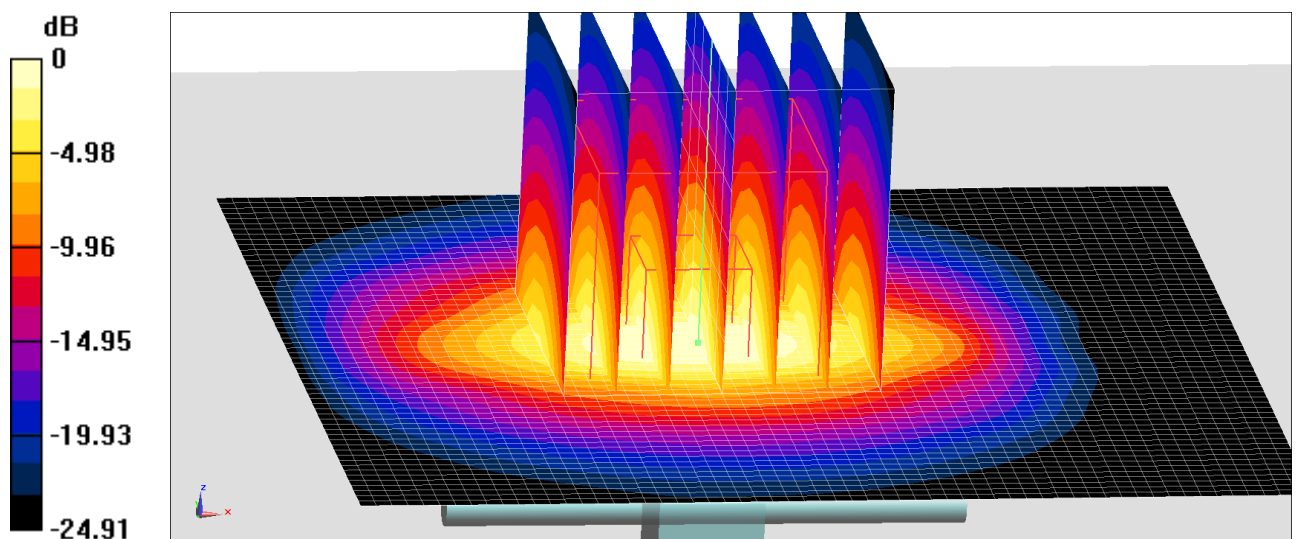

0 dB = 24.8 W/kg = 13.94 dBW/kg

I.8 System Validation

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

Table I.8-1: System Validation for 7548

Probe SN.	Liquid name	Validation date	Frequency point	Status (OK or Not)
7548	Head 750MHz	August.2,2022	750 MHz	OK
7548	Head 900MHz	August.2,2022	900 MHz	OK
7548	Head 1450MHz	August.2,2022	1450 MHz	OK
7548	Head 1750MHz	August.2,2022	1750 MHz	OK
7548	Head 1900MHz	August.2,2022	1900 MHz	OK
7548	Head 2000MHz	August.3,2022	2000 MHz	OK
7548	Head 2300MHz	August.3,2022	2300 MHz	OK
7548	Head 2450MHz	August.3,2022	2450 MHz	OK
7548	Head 2600MHz	August.3,2022	2600 MHz	OK
7548	Head 3300MHz	August.3,2022	3300 MHz	OK
7548	Head 3500MHz	August.3,2022	3500 MHz	OK
7548	Head 3700MHz	August.3,2022	3700 MHz	OK
7548	Head 5250MHz	August.4,2022	5250 MHz	OK
7548	Head 5600MHz	August.4,2022	5600 MHz	OK
7548	Head 5750MHz	August.4,2022	5750 MHz	OK



No.I22Z62473-SEM01

I.9 Probe Calibration Certificate**Probe 7548 Calibration Certificate**

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn



中国认可
 国际互认
 校准
 CALIBRATION
 CNAS L0570



Client

CTTLCertificate No: **Z22-60260****CALIBRATION CERTIFICATE**Object **EX3DV4 - SN : 7548**

Calibration Procedure(s) **FF-Z11-004-02**
Calibration Procedures for Dosimetric E-field Probes

Calibration date: **August 01, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	14-Jun-22(CTTL, No.J22X04181)	Jun-23
Power sensor NRP-Z91	101547	14-Jun-22(CTTL, No.J22X04181)	Jun-23
Power sensor NRP-Z91	101548	14-Jun-22(CTTL, No.J22X04181)	Jun-23
Reference 10dBAttenuator	18N50W-10dB	20-Jan-21(CTTL, No.J21X00486)	Jan-23
Reference 20dBAttenuator	18N50W-20dB	20-Jan-21(CTTL, No.J21X00485)	Jan-23
Reference Probe EX3DV4	SN 3846	20-May-22(SPEAG, No.EX3-3846_May22)	May-23
DAE4	SN 771	20-Jan-22(SPEAG, No.DAE4-771_Jan22)	Jan-23
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	14-Jun-22(CTTL, No.J22X04182)	Jun-23
Network Analyzer E5071C	MY46110673	14-Jan-22(CTTL, No.J22X00406)	Jan-23

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: August 08, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60260

Page 1 of 9



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\theta=0$ ($f \leq 900\text{MHz}$ in TEM-cell; $f > 1800\text{MHz}$: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}:** A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800\text{MHz}$) and inside waveguide using analytical field distributions based on power measurements for $f > 800\text{MHz}$. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from $\pm 50\text{MHz}$ to $\pm 100\text{MHz}$.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7548

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc ($k=2$)
Norm($\mu\text{V}/(\text{V/m})^2$) ^A	0.62	0.70	0.63	$\pm 10.0\%$
DCP(mV) ^B	101.7	102.0	102.0	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\cdot\mu\text{V}$	C	D dB	VR mV	Unc ^E ($k=2$)
0	CW	X	0.0	0.0	1.0	0.00	193.2	$\pm 2.2\%$
		Y	0.0	0.0	1.0		208.5	
		Z	0.0	0.0	1.0		192.2	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 4).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7548

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	10.30	10.30	10.30	0.16	1.29	± 12.1%
900	41.5	0.97	9.81	9.81	9.81	0.16	1.32	± 12.1%
1450	40.5	1.20	8.56	8.56	8.56	0.20	0.91	± 12.1%
1750	40.1	1.37	8.13	8.13	8.13	0.22	1.00	± 12.1%
1900	40.0	1.40	7.80	7.80	7.80	0.25	1.00	± 12.1%
2100	39.8	1.49	7.95	7.95	7.95	0.19	1.24	± 12.1%
2300	39.5	1.67	7.61	7.61	7.61	0.46	0.72	± 12.1%
2450	39.2	1.80	7.32	7.32	7.32	0.50	0.72	± 12.1%
2600	39.0	1.96	7.12	7.12	7.12	0.56	0.68	± 12.1%
3300	38.2	2.71	6.75	6.75	6.75	0.40	0.90	± 13.3%
3500	37.9	2.91	6.61	6.61	6.61	0.38	1.02	± 13.3%
3700	37.7	3.12	6.41	6.41	6.41	0.35	1.07	± 13.3%
3900	37.5	3.32	6.30	6.30	6.30	0.30	1.50	± 13.3%
4100	37.2	3.53	6.22	6.22	6.22	0.30	1.38	± 13.3%
4200	37.1	3.63	6.10	6.10	6.10	0.35	1.35	± 13.3%
4400	36.9	3.84	6.00	6.00	6.00	0.35	1.35	± 13.3%
4600	36.7	4.04	5.92	5.92	5.92	0.40	1.30	± 13.3%
4800	36.4	4.25	5.88	5.88	5.88	0.40	1.38	± 13.3%
4950	36.3	4.40	5.68	5.68	5.68	0.40	1.40	± 13.3%
5250	35.9	4.71	4.98	4.98	4.98	0.45	1.35	± 13.3%
5600	35.5	5.07	4.57	4.57	4.57	0.45	1.40	± 13.3%
5750	35.4	5.22	4.64	4.64	4.64	0.40	1.60	± 13.3%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Certificate No:Z22-60260

Page 4 of 9



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

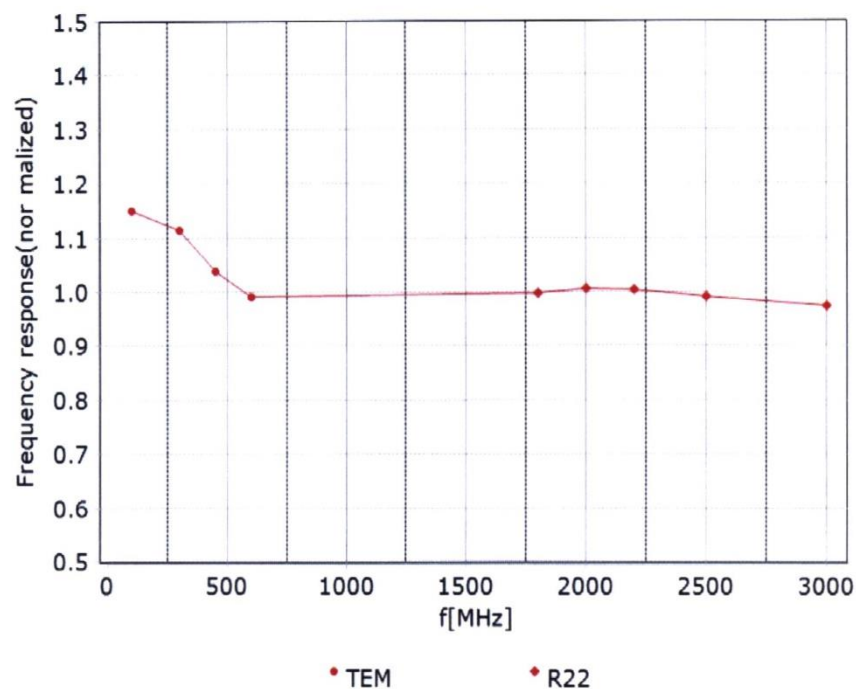


Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)





Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Receiving Pattern (Φ), $\theta=0^\circ$


f=600 MHz, TEM

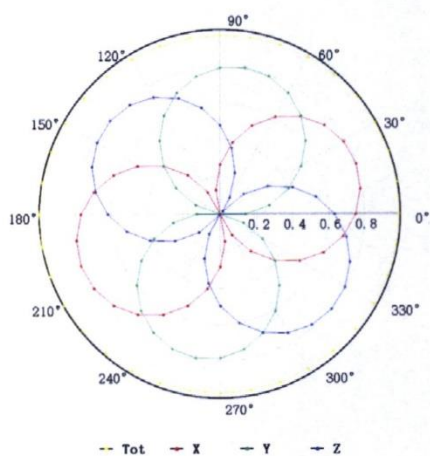

f=1800 MHz, R22

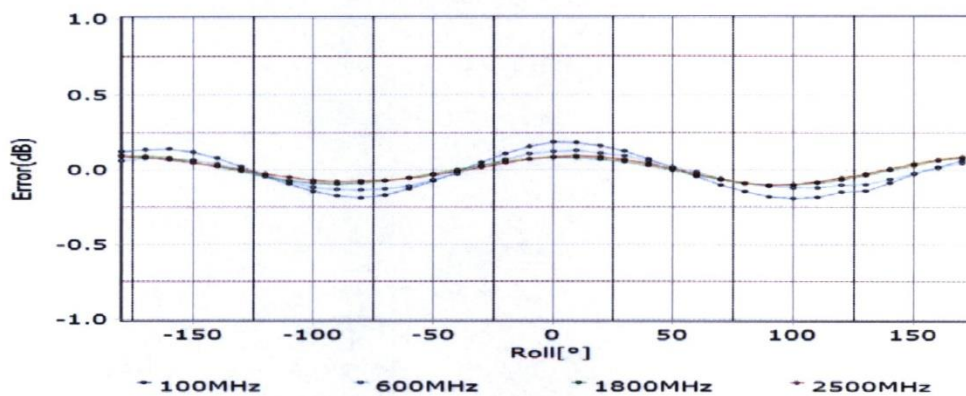
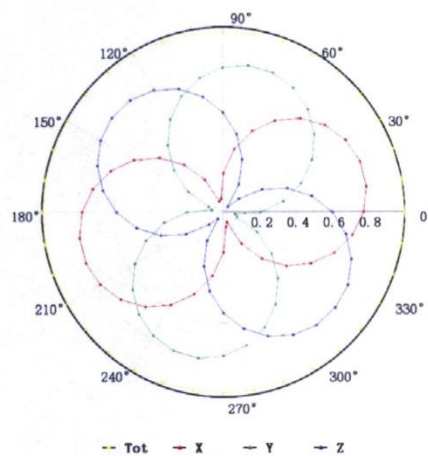


Uncertainty of Axial Isotropy Assessment: $\pm 1.2\%$ ($k=2$)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>


Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$)

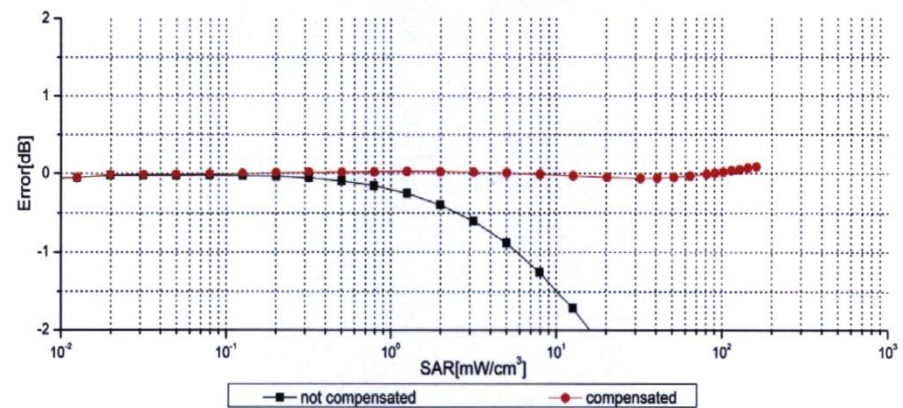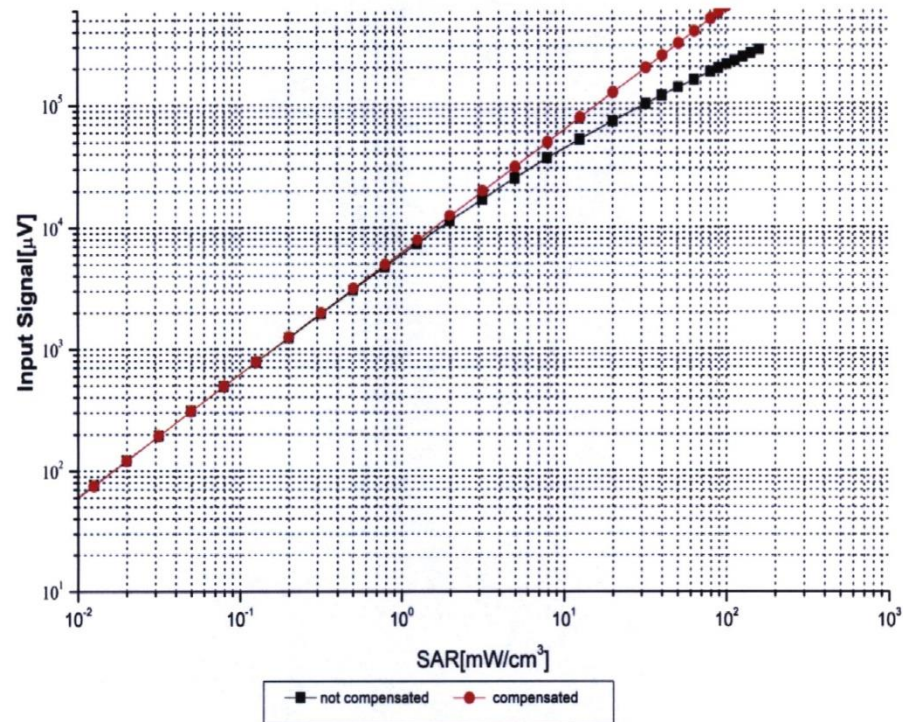

Uncertainty of Linearity Assessment: $\pm 0.9\%$ ($k=2$)

Certificate No:Z22-60260

Page 7 of 9





Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn


Conversion Factor Assessment

$f=750$ MHz,WGLS R9(H_convF)


$f=1750$ MHz,WGLS R22(H_convF)

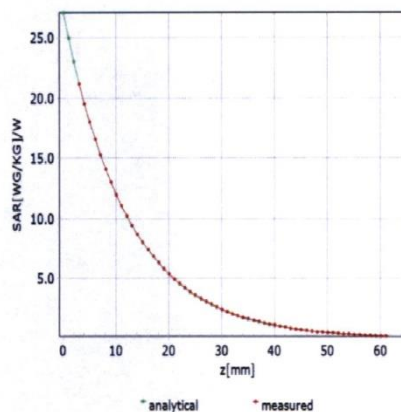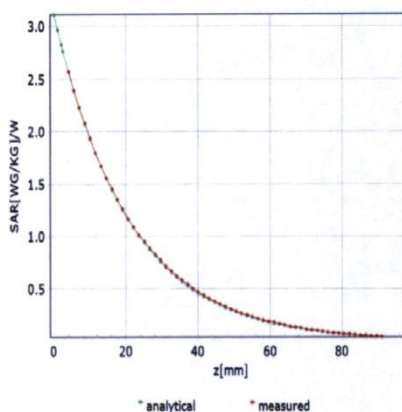

Deviation from Isotropy in Liquid

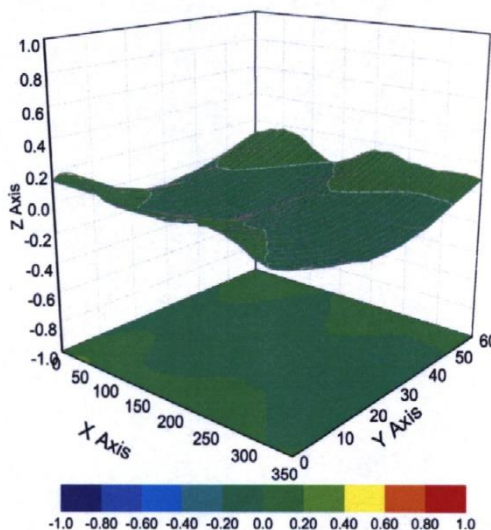

Uncertainty of Spherical Isotropy Assessment: $\pm 3.2\%$ ($k=2$)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7548


Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	146.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm

I.10 Main Test Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	January 4, 2022	One year
02	Power sensor	NRP110T	101139	January 13, 2022	One year
03	Power sensor	NRP110T	101159		
04	Signal Generator	E4438C	MY49071430	January 13, 2022	One Year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
06	BTS	CMW500	159890	January 24, 2022	One year
07	BTS	CMW500	129942	February 14 2022	One year
08	E-field Probe	SPEAG EX3DV4	7548	August 1, 2022	One year
09	DAE	SPEAG DAE4	1331	September 15, 2022	One year
10	Dipole Validation Kit	SPEAG D835V2	4d069	July 20,,2022	One year
11	Dipole Validation Kit	SPEAG D1900V2	5d101	July 26,2022	One year
12	Dipole Validation Kit	SPEAG D2600V2	1012	July 20,2022	One year

ANNEX J Accreditation Certificate

United States Department of Commerce National Institute of Standards and Technology  	
Certificate of Accreditation to ISO/IEC 17025:2017	
NVLAP LAB CODE: 600118-0	
Telecommunication Technology Labs, CAICT Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
2022-10-01 through 2023-09-30 <i>Effective Dates</i>	 <i>For the National Voluntary Laboratory Accreditation Program</i>