


## FCC PART 15.247 TEST REPORT

For

**Shenzhen Baida Moxing Co.,Ltd.**

2007 Building 11, Tianan Yungu Phase II, Bantian Street, Longgang District, Shenzhen, China

**FCC ID: 2AT6XLITERADIO2**

<b>Report Type:</b> Original Report	<b>Product Type:</b> RC Radio Transmitters
<b>Report Number:</b> RSZ200413817-00	
<b>Report Date:</b> 2021-04-20	
Jimmy Xiao 	
<b>Reviewed By:</b> RF Engineer	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 5F(B-West) ,6F,7F,the 3rd Phase of Wan Li Industrial Building D,Shihua Rd, FuTian Free Trade Zone, Shenzhen, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “\*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>9</b>
<b>FCC§15.247 (i), §1.1307 (b) (1) &amp;§2.1093 – RF EXPOSURE .....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
<b>FCC §15.203 – ANTENNA REQUIREMENT.....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
ANTENNA CONNECTOR CONSTRUCTION .....	11
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE .....	12
CORRECTED FACTOR & MARGIN CALCULATION .....	13
TEST DATA .....	13
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
EUT SETUP .....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	17
TEST PROCEDURE .....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	17
TEST DATA .....	17
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>24</b>
APPLICABLE STANDARD .....	24
TEST PROCEDURE .....	24
TEST DATA .....	24
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>	<b>26</b>
APPLICABLE STANDARD .....	26
TEST PROCEDURE .....	26
TEST DATA .....	26

<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST DATA .....	29
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>31</b>
APPLICABLE STANDARD .....	31
TEST PROCEDURE .....	31
TEST DATA .....	31
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>33</b>
APPLICABLE STANDARD .....	33
TEST PROCEDURE .....	33
TEST DATA .....	33
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>34</b>
APPLICABLE STANDARD .....	34
TEST PROCEDURE .....	34
TEST DATA .....	34

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	RC Radio Transmitters
Tested Model	Literadio 2
Multiple Model	Literadio 2 SE
Model Differences	Refer to the DoS letter
Frequency Range	2403.7-2473.9MHz
Maximum Conducted Peak Output Power	7.89dBm
Modulation Technique	GFSK
Antenna Specification*	2.0dBi (It is provided by the applicant)
Voltage Range	DC 3.75V from battery or DC 5V from USB port
Date of Test	2021-03-06 to 2021-04-17
Sample serial number	RSZ200413817-RF-S1 (Assigned by BACL, Shenzhen)
Received date	2020-04-13
Sample/EUT Status	Good condition

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) ,6F,7F,the 3rd Phase of Wan Li Industrial Building D,Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

#### Channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2403.7	59	2421.4	118	2439.1	177	2456.8
1	2404	60	2421.7	119	2439.4	178	2457.1
...	...	...	...	...	...	...	...
57	2420.8	116	2438.5	175	2456.2	234	2473.9
58	2421.1	117	2438.8	176	2456.5	/	/

The channel 0, 117 and 234 were chosen for test.

The frequency range of the system is operating from 2403.7MHz to 2473.9MHz. There are totally 235 non-overlapping channel, and 47 active channels out of the 235 channels at same time. The 47 active channels are selected in pseudo random manner by default. The remaining 188 channels are spare channels which will be exchanged with active channels one at a time when any one of the active channels jamming with noise. Once an active channel has noise jamming during frequency hopping, it will be marked as dirty channel and exchanged with a spare channel after a dwell time. The spare channel is selected randomly so that at any time the active channels are always equally used in a pseudo random manner. The dirty channel become part of spare channels and can be used in active channels again after all the other spare channels have been used.

### EUT Exercise Software

No exercise software. Switch the channels by pressing the buttons.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Dongguan Aohai Power Technology Co.,Ltd.	Adapter	A8-501000	A1906034835
Unknown	Earphone	Unknown	Unknown

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter
Un-shielding Detachable Audio Cable	1.0	EUT	Earphone

Block Diagram of Test Setup

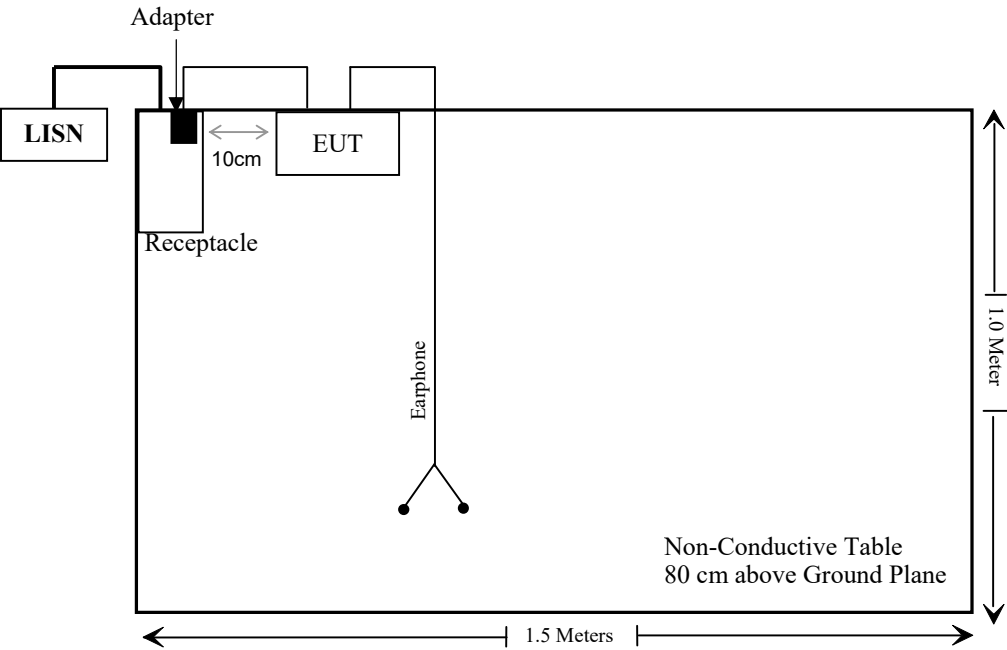

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance



**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emissions Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2020/11/29	2021/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2020/11/29	2021/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
<b>Radiated Emission Test</b>					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2020/12/22	2023/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2020/11/29	2021/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2020/11/29	2021/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2020/11/29	2021/11/28
Sunol Sciences	Horn Antenna	3115	9107-3694	2021/01/15	2024/01/14
Insulated Wire Inc.	RF Cable	SPS-2503-3150	02222010	2020/11/29	2021/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2020/11/29	2021/11/28
SNSD	Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2020/04/20	2021/04/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-021304	2020/12/06	2023/12/05
<b>RF Conducted Test</b>					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200982	2020/08/04	2021/08/03
WEINSCHL	10dB Attenuator	5324	AU3842	2020/11/29	2021/11/28
Agilent	USB Wideband Power Sensor	U2021XA	MY54250003	2020/08/04	2021/08/03
Unknown	RF Cable	Unknown	2301 276	2020/11/29	2021/11/28

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE**

### **Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.

**For worst case:**

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	10-g extremity SAR Limit	SAR Test Exclusion
	(dBm)	(mW)				
2403.7- 2473.9	8.0	6.31	5	2.0	7.5	Yes

**Result: No Standalone SAR test is required**

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Connector Construction**

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result: Pass**

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup

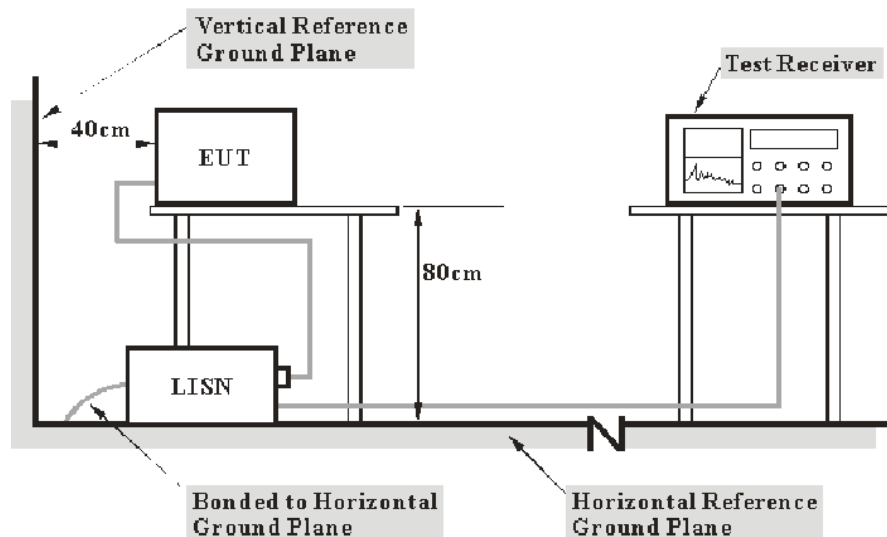

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


## Test Data

### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

*The testing was performed by Haiguo Li on 2021-03-13.*


*EUT operation mode: Transmitting & charging*

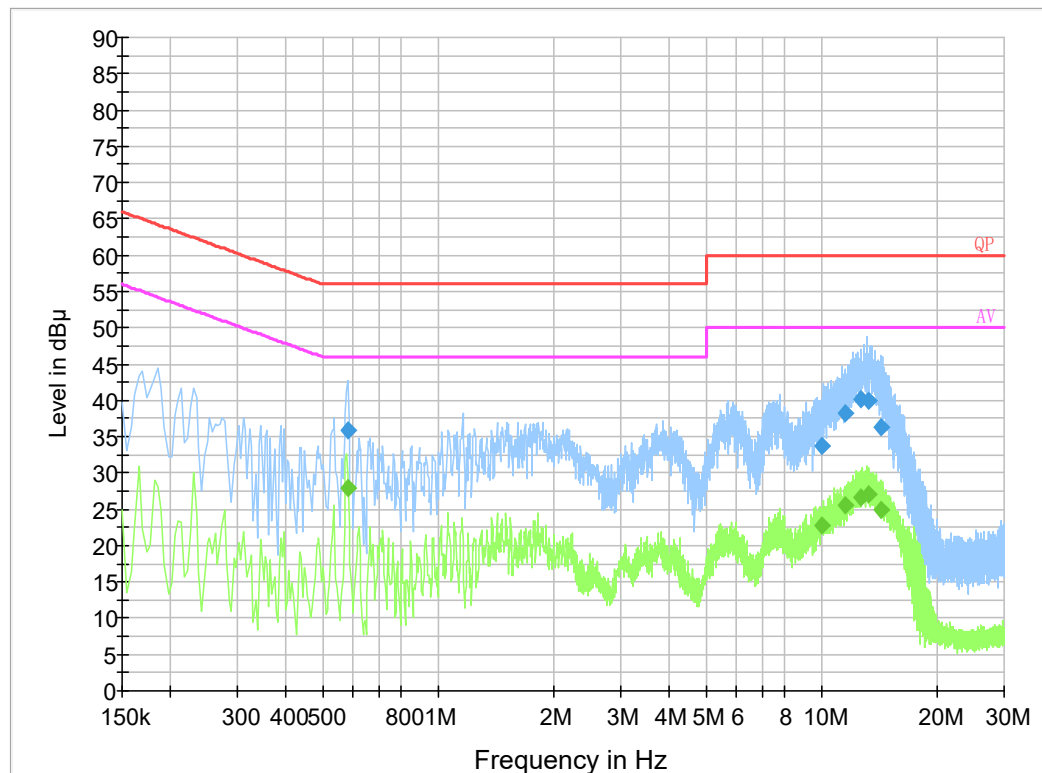**AC 120V/60 Hz, Line****Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.581270	35.9	9.000	L1	19.8	20.1	56.0
10.022410	33.8	9.000	L1	20.0	26.2	60.0
11.507870	38.2	9.000	L1	20.0	21.8	60.0
12.735710	40.1	9.000	L1	20.0	19.9	60.0
13.233410	39.9	9.000	L1	20.0	20.1	60.0
14.366690	36.3	9.000	L1	20.0	23.7	60.0

**Final Result 2**

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.581270	28.0	9.000	L1	19.8	18.0	46.0
10.022410	22.8	9.000	L1	20.0	27.2	50.0
11.507870	25.6	9.000	L1	20.0	24.4	50.0
12.735710	26.7	9.000	L1	20.0	23.3	50.0
13.233410	27.0	9.000	L1	20.0	23.0	50.0
14.366690	25.0	9.000	L1	20.0	25.0	50.0

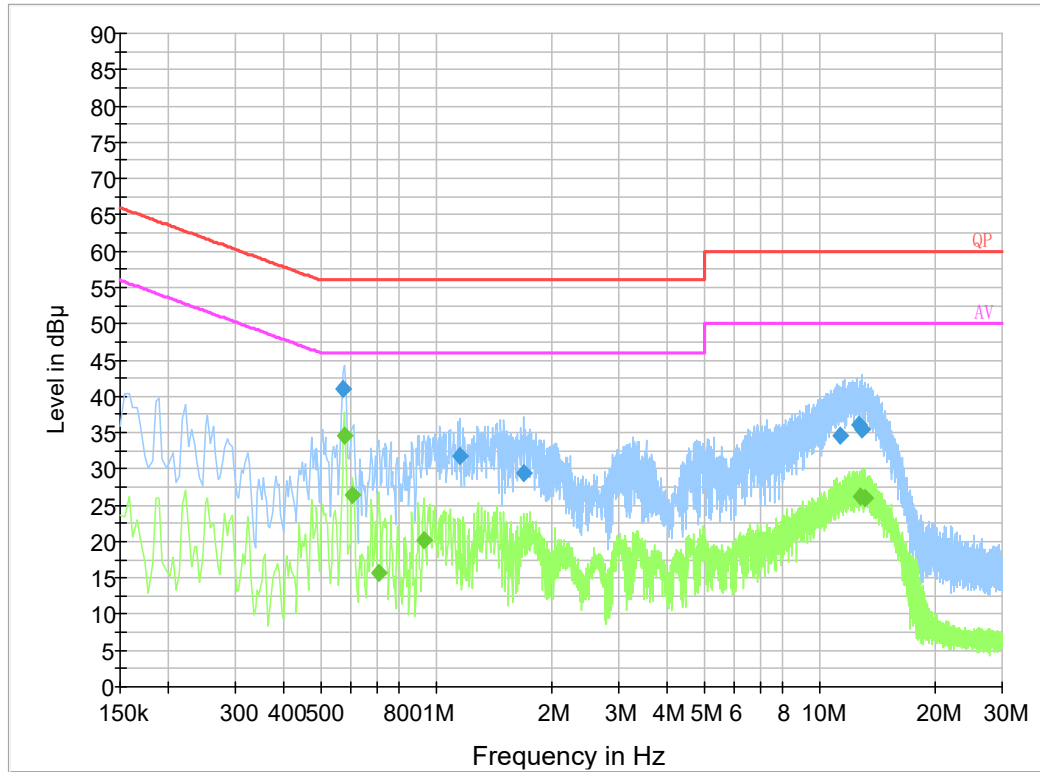**AC 120V/60 Hz, Neutral****Final Result 1**


Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.573330	41.0	9.000	N	19.8	15.0	56.0
1.152690	31.9	9.000	N	19.8	24.1	56.0
1.700530	29.3	9.000	N	19.8	26.7	56.0
11.326510	34.5	9.000	N	20.0	25.5	60.0
12.637750	36.1	9.000	N	20.0	23.9	60.0
12.868890	35.4	9.000	N	19.9	24.6	60.0

**Final Result 2**

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.578000	34.5	9.000	N	19.8	11.5	46.0
0.606000	26.3	9.000	N	19.8	19.7	46.0
0.710000	15.6	9.000	N	19.8	30.4	46.0
0.934000	20.1	9.000	N	19.8	25.9	46.0
12.850000	26.2	9.000	N	19.9	23.8	50.0
13.126000	26.0	9.000	N	19.9	24.0	50.0

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

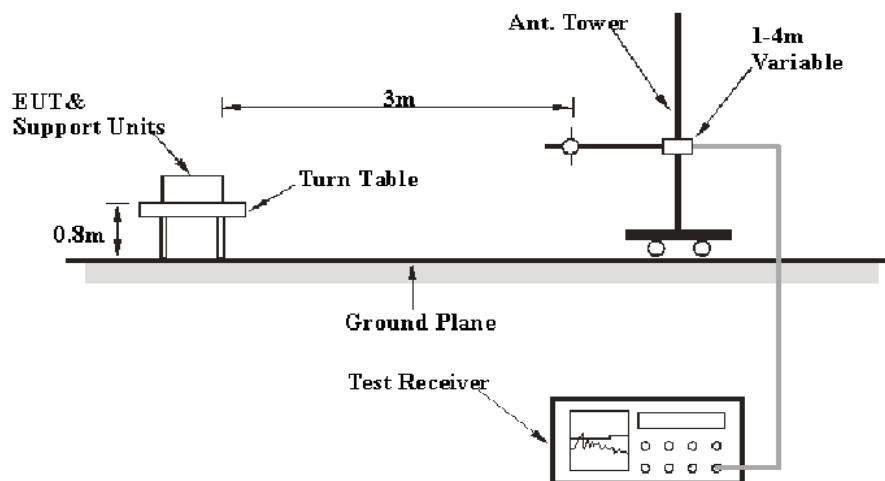**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.



## EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


## Test Data

### Environmental Conditions

<b>Temperature:</b>	25.7~26 °C
<b>Relative Humidity:</b>	54~56 %
<b>ATM Pressure:</b>	100.9~101.0 kPa

*The testing was performed by Andy Yu on 2021-03-18 for below 1GHz and Alan He on 2021-03-06 for above 1GHz.*

*EUT Operation Mode: Transmitting*

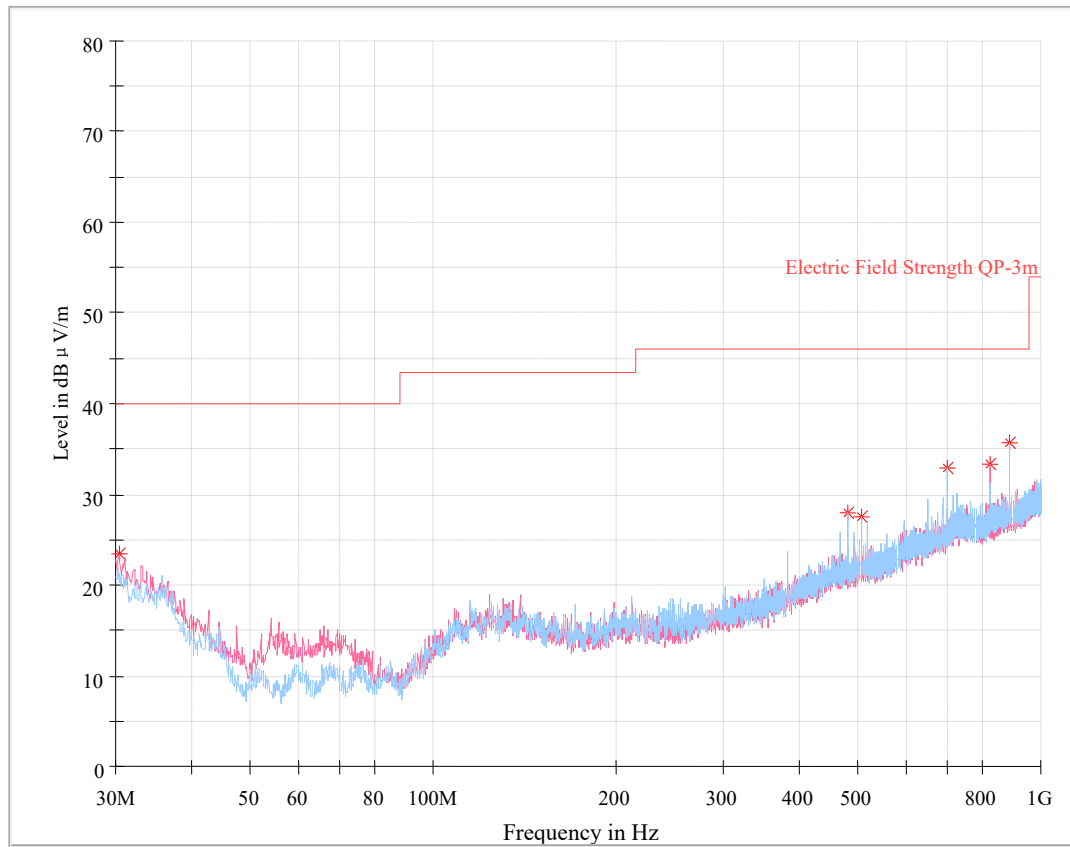**30 MHz~1 GHz: (Low channel was worst case)****Critical\_Freqs**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
889.662500	35.62	46.00	10.38	105.0	H	78.0	0.8
479.958750	28.02	46.00	17.98	105.0	H	310.0	-5.3
506.876250	27.48	46.00	18.52	205.0	H	282.0	-5.0
701.967500	32.82	46.00	13.18	300.0	H	0.0	-1.5
30.363750	23.55	40.00	16.45	205.0	V	5.0	-3.8
826.491250	33.34	46.00	12.66	205.0	V	227.0	-0.2

**1 GHz - 25 GHz:**

Frequency (MHz)	Receiver		Turn- Table  Angle Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.247	
	Reading (dBμV)	Detector (PK/QP/ Ave.)		Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
Low Channel(2403.7MHz)									
2311.22	28.31	PK	193	1.6	V	31.64	59.95	74	14.05
2311.22	13.50	Ave.	193	1.6	V	31.64	45.14	54	8.86
2486.24	28.28	PK	22	1.5	V	32.13	60.41	74	13.59
2486.24	13.48	Ave.	22	1.5	V	32.13	45.61	54	8.39
4807.40	49.74	PK	242	2.0	V	6.28	56.02	74	17.98
4807.40	34.58	Ave.	242	2.0	V	6.28	40.86	54	13.14
Middle Channel(2438.8MHz)									
4877.60	48.96	PK	35	2.2	V	6.76	55.72	74	18.28
4877.60	34.46	Ave.	35	2.2	V	6.76	41.22	54	12.78
High Channel(2473.9MHz)									
2365.58	28.17	PK	140	2.2	V	31.87	60.04	74	13.96
2365.58	13.51	Ave.	140	2.2	V	31.87	45.38	54	8.62
2483.54	30.51	PK	22	2.0	V	32.13	62.64	74	11.36
2483.54	13.68	Ave.	22	2.0	V	32.13	45.81	54	8.19
4947.80	47.79	PK	142	1.0	V	6.76	54.55	74	19.45
4947.80	34.19	Ave.	142	1.0	V	6.76	40.95	54	13.05

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.

### Pre-scan with Middle channel Peak Horizontal

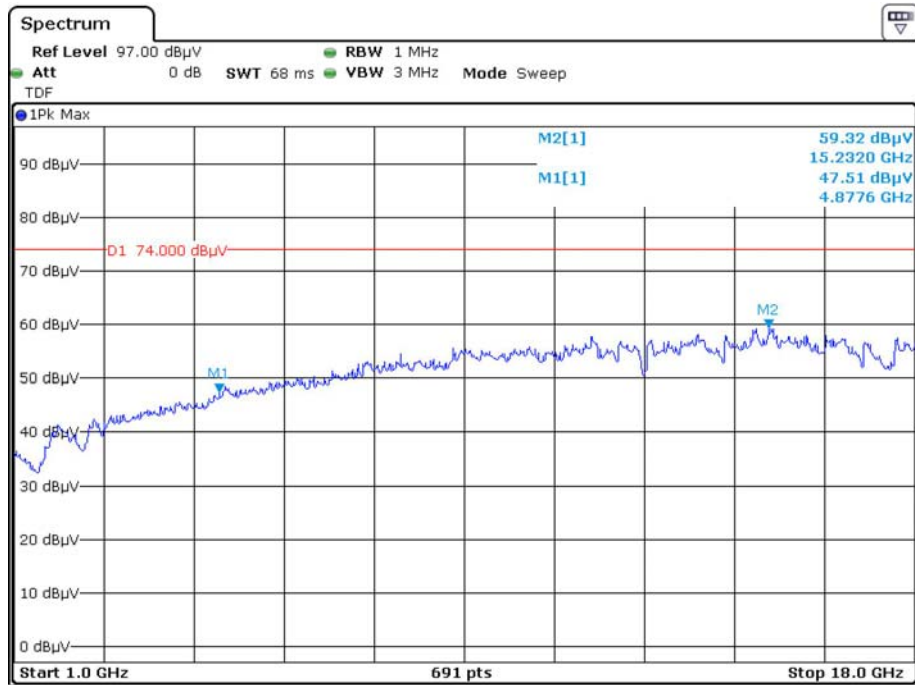


Date: 6.MAR.2021 15:44:35

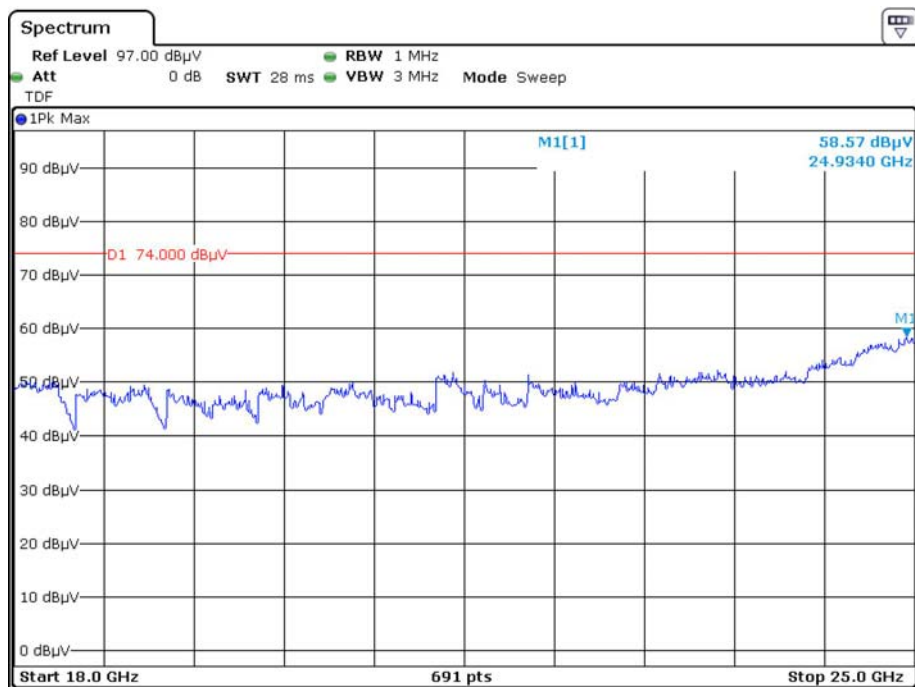


Date: 6.MAR.2021 16:30:50

## Vertical

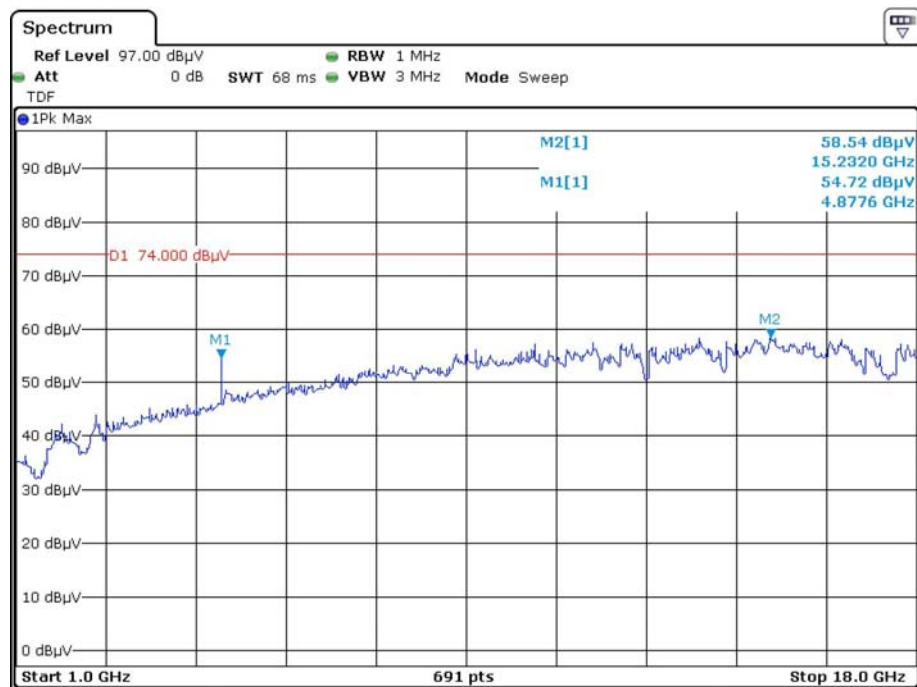


Date: 6.MAR.2021 15:34:24

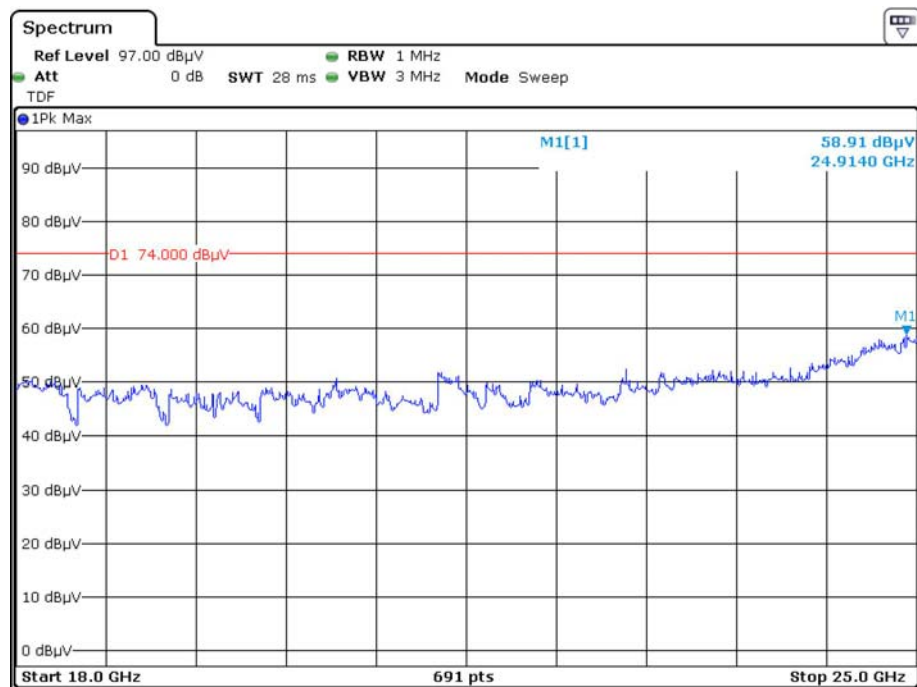


Date: 6.MAR.2021 16:21:49

### Average Horizontal

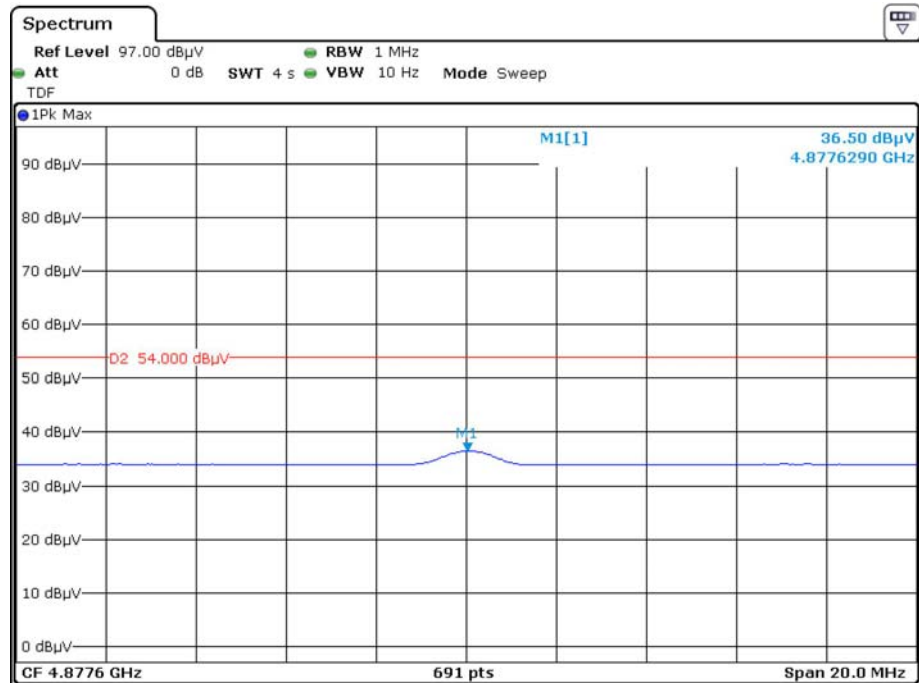


Date: 6.MAR.2021 15:50:05

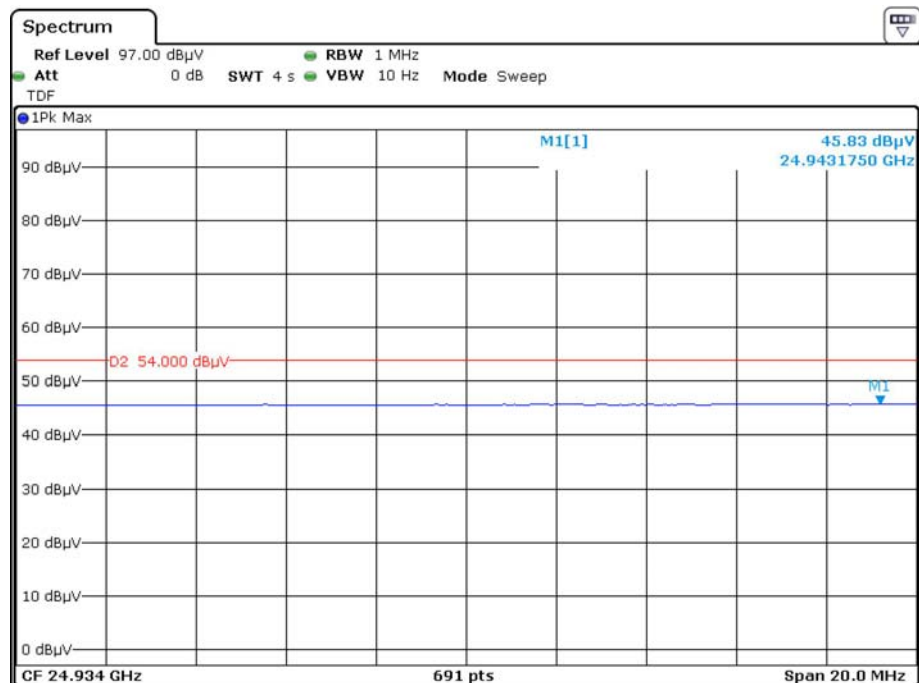


Date: 6.MAR.2021 16:35:26

## Vertical

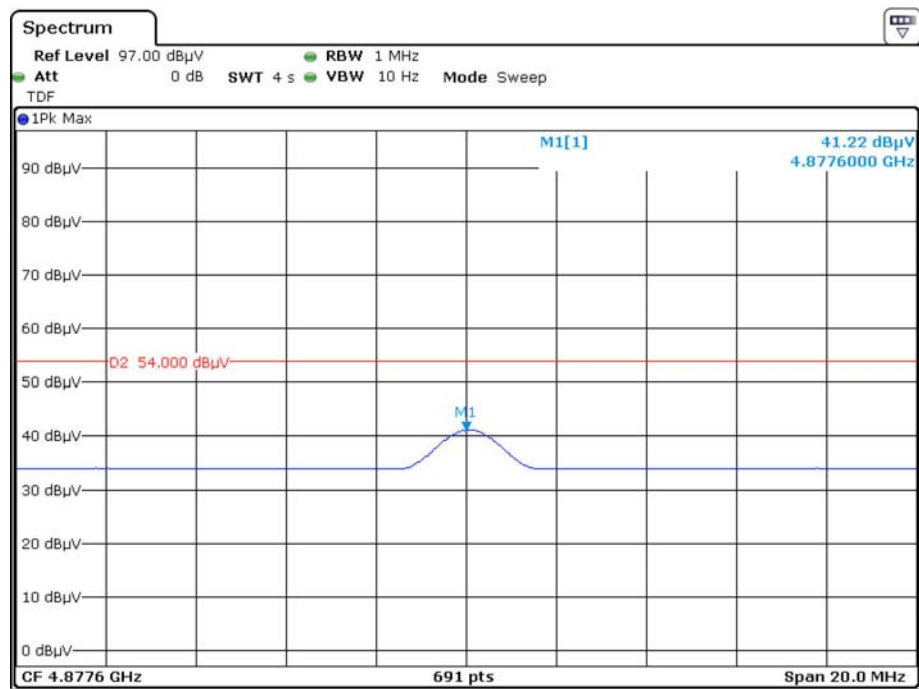

Date: 6.MAR.2021 15:39:20

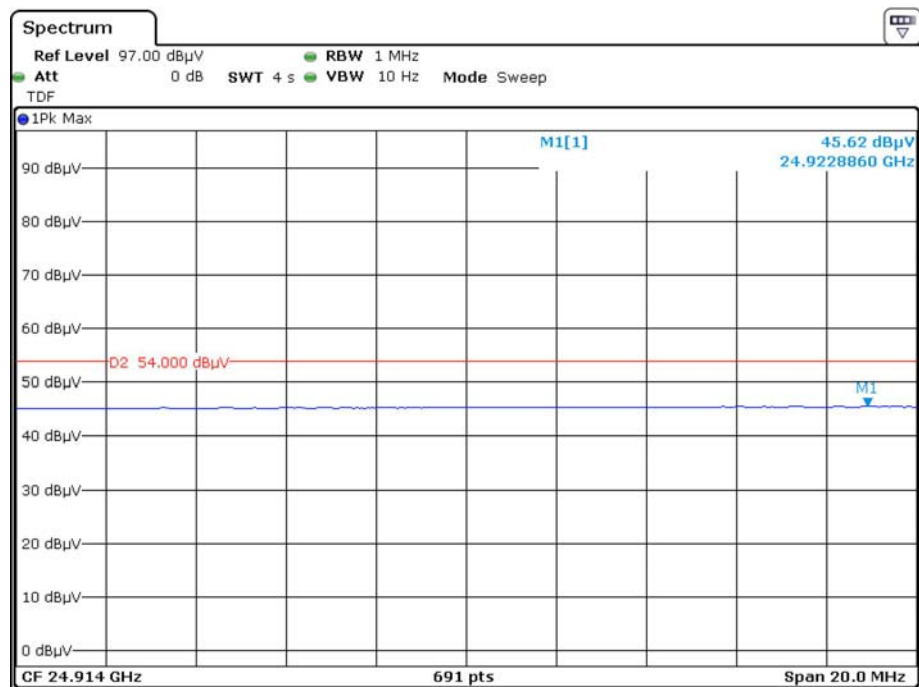

Date: 6.MAR.2021 16:26:12

## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25.6 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Blaker Zhang on 2021-04-15.*

*EUT operation mode: Transmitting (Worst case)*


#### Test Result: Pass

*Please refer to following table and plots.*

Test Mode	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
Hopping	0.300	0.238	0.159	> two-thirds of the 20 dB bandwidth	Pass



Please refer to the following plots.

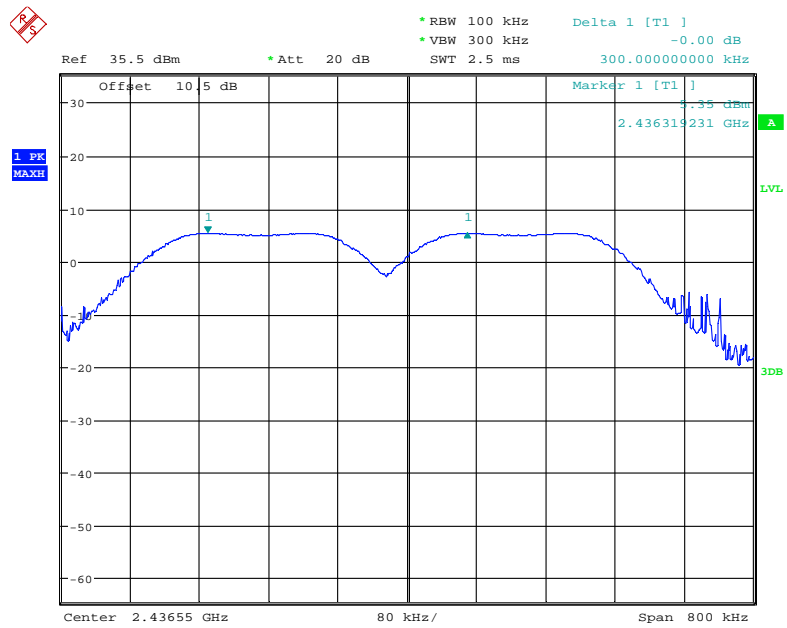

Date: 15.APR.2021 11:36:03

**FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH****Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25.6 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Blaker Zhang on 2021-03-07.*


*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following table and plots.*


<b>Channel</b>	<b>Frequency (MHz)</b>	<b>20 dB Emission Bandwidth (MHz)</b>
Low	2403.7	0.237
Middle	2438.8	0.238
High	2473.9	0.243

### Low Channel

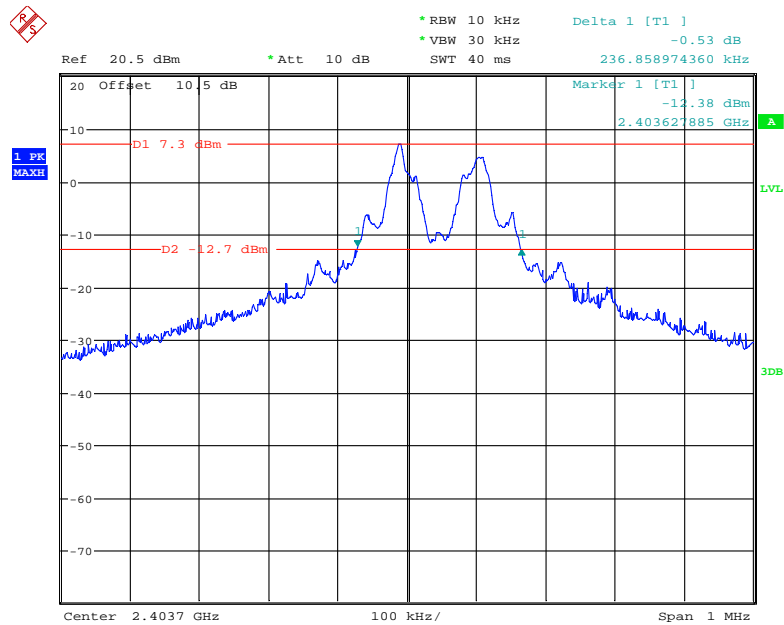


Date: 7.MAR.2021 10:34:42

### Middle Channel

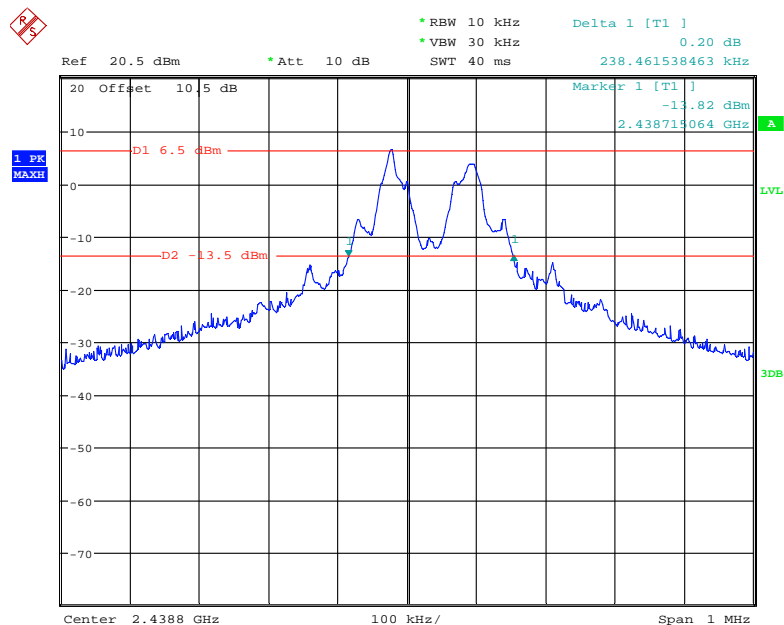

Date: 7.MAR.2021 10:38:33

# High Channel

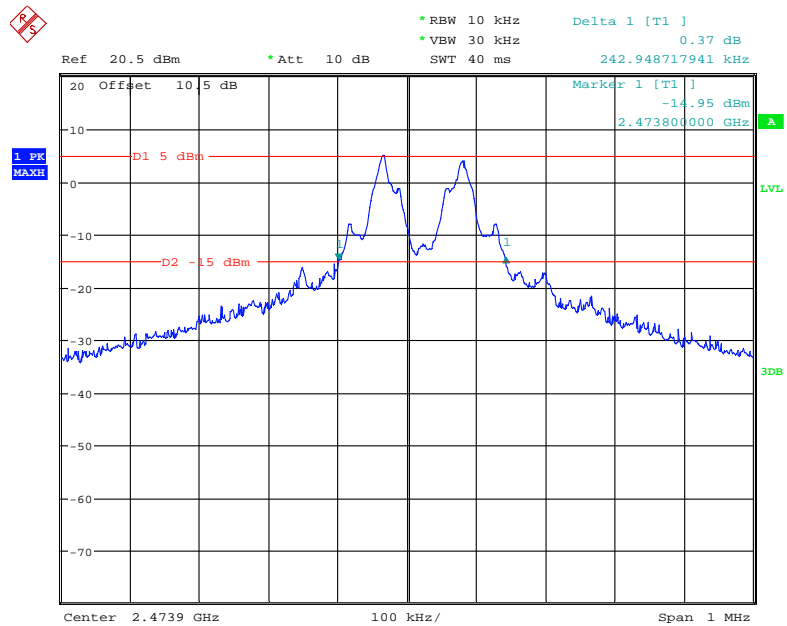

Date: 7.MAR.2021 10:30:24

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25.6 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Blaker Zhang on 2021-04-17.*


*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following table and plots.*

<b>Frequency Range (MHz)</b>	<b>Number of Hopping Channel (CH)</b>	<b>Limit (CH)</b>
2400-2483.5	47	≥15

Number of Hopping Channels

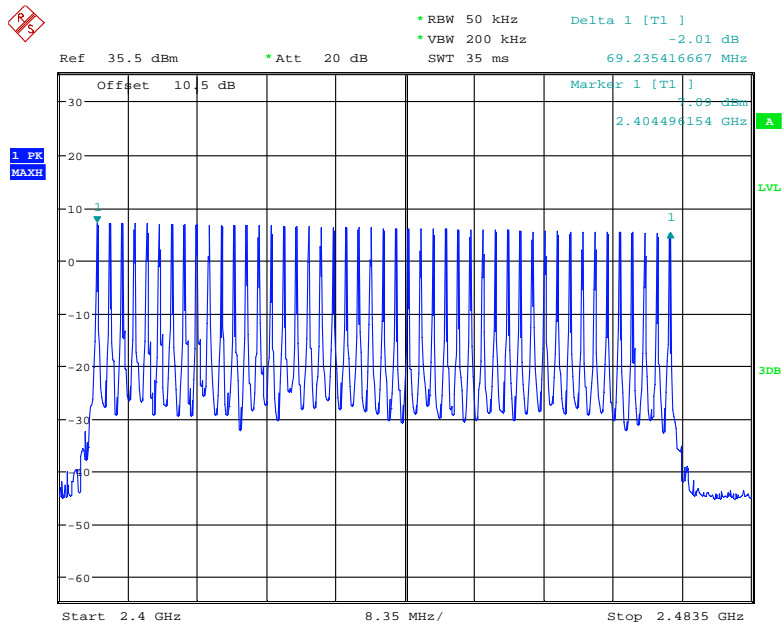

Date: 17.APR.2021 15:18:23

## FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

### Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

### Test Data

#### Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Blaker Zhang from 2021-04-15 to 2021-04-17.

EUT operation mode: Transmitting


#### Test Result: Pass

Please refer to following table and plots

Channel	Pulse Time (ms)	Total Hops	Period Time (s)	Dwell Time (ms)	Limit (ms)	Result
Hop	4.439	44	18.8	195.32	400	Pass


Note: A period time =  $0.4 \times 47 = 18.8$  (s),  
Dwell Time = Pulse Time \* Total Hops

### Pulse time

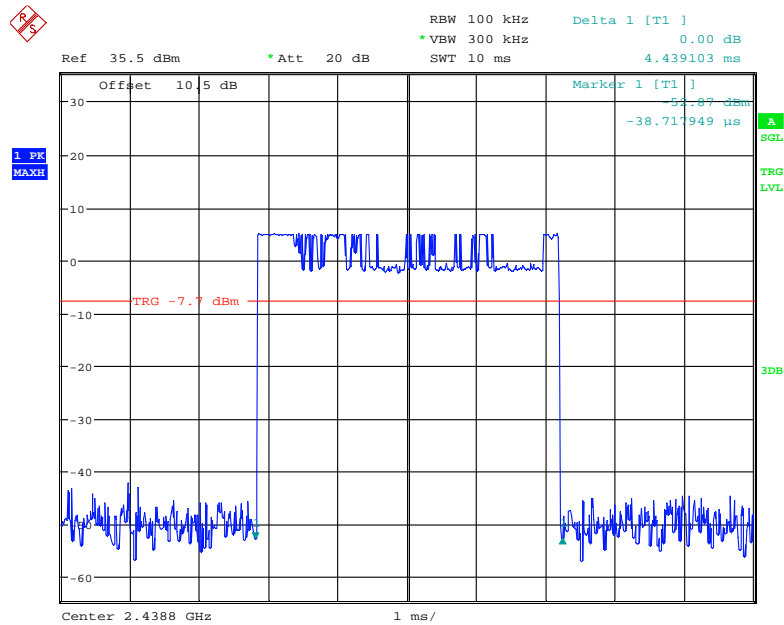

Date: 15.APR.2021 11:49:08

### Dwell Time

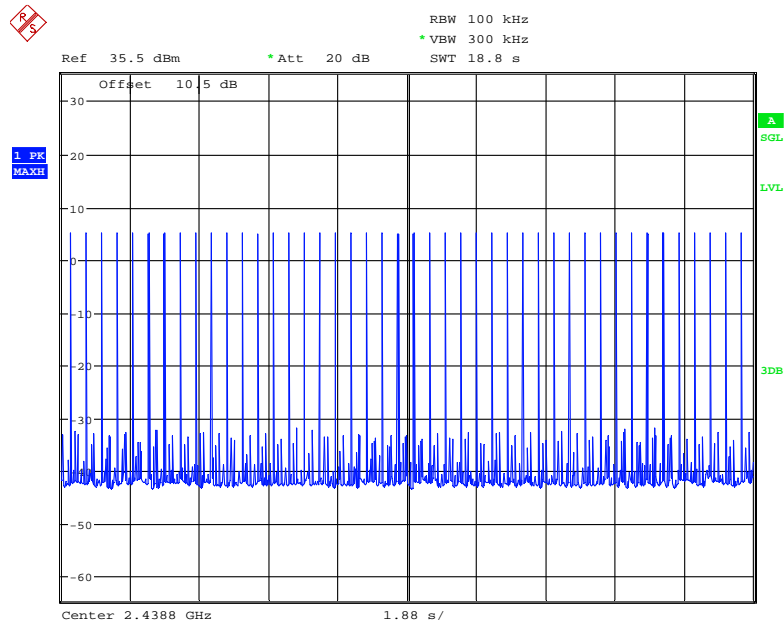

Date: 15.APR.2021 11:51:37



**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT****Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

**Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25.6 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Blaker Zhang on 2021-03-07.*

*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following table*

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Conducted Peak Output Power (dBm)</b>	<b>Limit (dBm)</b>
Low	2403.7	7.89	21
Middle	2438.8	6.80	21
High	2473.9	5.42	21

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Data

#### Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Blaker Zhang from 2021-03-07 to 2021-04-17.*


*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following plots*


## Band Edge-Left Side

### Single

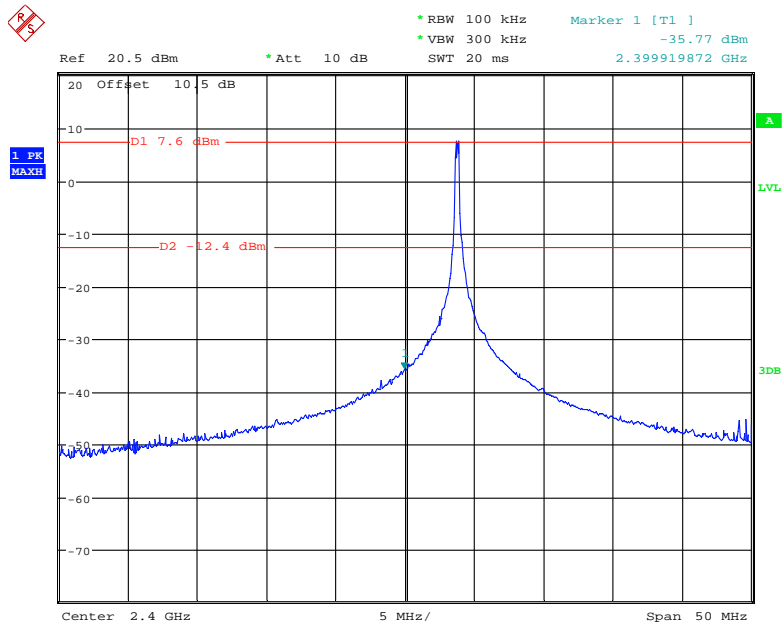

Date: 7.MAR.2021 11:28:33


### Hopping

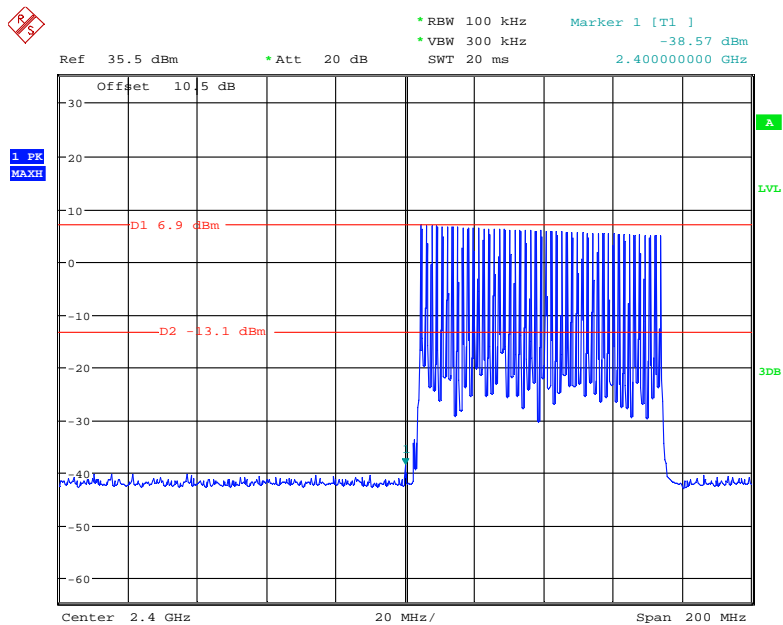

Date: 17.APR.2021 15:24:19


# Band Edge-Right Side

## Single

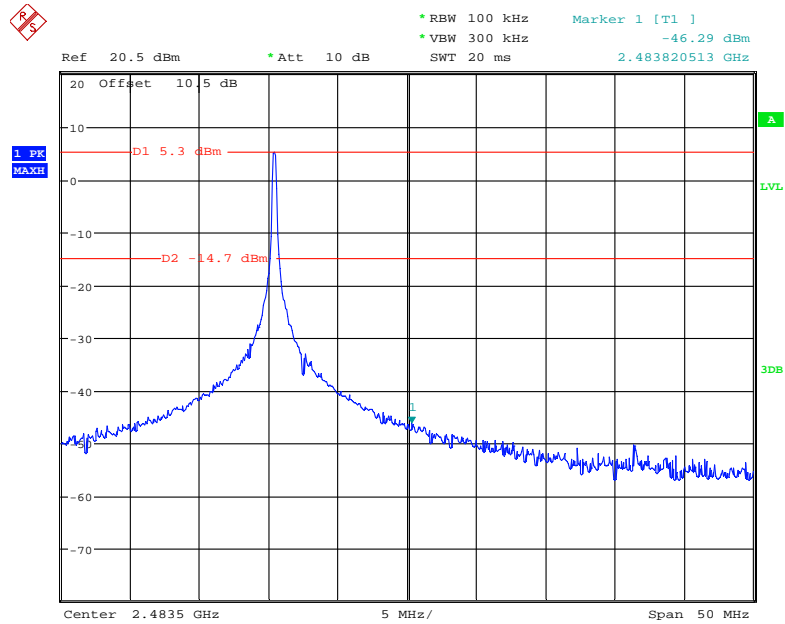

Date: 7.MAR.2021 10:46:12

## Hopping

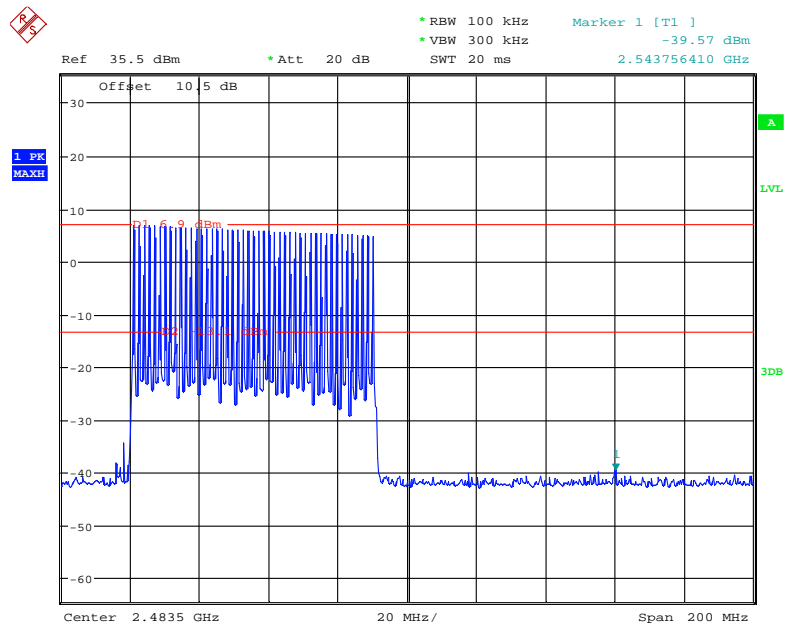

Date: 17.APR.2021 15:26:09

\*\*\*\*\* END OF REPORT \*\*\*\*\*