



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Xiamen Milesight IoT Co., Ltd.

Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China

FCC ID: 2AYHY-AM300

Product Name: Indoor Ambience Monitoring Sensor

Model Number: AM319-915M, AM319-9M, AM319-915M[AS923],
AM307-915M, AM307-9M, AM307-915M[AS923]

Standard(s): 47 CFR Part 15, Subpart C(15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR21120010-00A

Date Of Issue: 2022-08-01

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	9
1.3 MEASUREMENT UNCERTAINTY	12
2. SUMMARY OF TEST RESULTS	13
3. REQUIREMENTS AND TEST PROCEDURES	14
3.1 AC LINE CONDUCTED EMISSIONS.....	14
3.1.1 Applicable Standard.....	14
3.1.2 EUT Setup.....	15
3.1.3 EMI Test Receiver Setup	15
3.1.4 Test Procedure	16
3.1.5 Corrected Amplitude & Margin Calculation.....	16
3.2 RADIATION SPURIOUS EMISSIONS.....	17
3.2.1 Applicable Standard.....	17
3.2.2 EUT Setup.....	17
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
3.2.4 Test Procedure	18
3.2.5 Corrected Amplitude & Margin Calculation.....	18
3.3 20 DB BANDWIDTH.....	19
3.3.1 Applicable Standard.....	19
3.3.2 EUT Setup.....	19
3.3.3 Test Procedure	19
3.4 CHANNEL SEPARATION	20
3.4.1 Applicable Standard.....	20
3.4.2 EUT Setup.....	20
3.4.3 Test Procedure	20
3.5 NUMBER OF HOPPING FREQUENCY	21
3.5.1 Applicable Standard.....	21
3.5.2 EUT Setup.....	21
3.5.3 Test Procedure	21
3.6 TIME OF OCCUPANCY(DWELL TIME).....	22
3.6.1 Applicable Standard.....	22
3.6.2 EUT Setup.....	22
3.6.3 Test Procedure	22
3.7 PEAK OUTPUT POWER.....	23
3.7.1 Applicable Standard.....	23

3.7.2 EUT Setup.....	23
3.7.3 Test Procedure	23
3.8 100 KHz BANDWIDTH OF FREQUENCY BAND EDGE.....	24
3.8.1 Applicable Standard.....	24
3.8.2 EUT Setup.....	24
3.8.3 Test Procedure	24
3.9 ANTENNA REQUIREMENT.....	25
3.9.1 Applicable Standard.....	25
3.9.2 Judgment.....	25
4. TEST DATA AND RESULTS	26
4.1 AC LINE CONDUCTED EMISSIONS.....	26
4.2 RADIATION SPURIOUS EMISSIONS.....	33
4.3 20 dB EMISSION BANDWIDTH:	46
4.4 CHANNEL SEPARATION:	48
4.5 NUMBER OF HOPPING FREQUENCY:.....	50
4.6 TIME OF OCCUPANCY (DWELL TIME):.....	52
4.7 PEAK CONDUCTED OUTPUT POWER:	54
4.8 100 KHz BANDWIDTH OF FREQUENCY BAND EDGE:	55
5. RF EXPOSURE EVALUATION	58
5.1 APPLICABLE STANDARD.....	58
5.2 PROCEDURE.....	58
5.3 MEASUREMENT RESULT	58

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

Product Name:	Indoor Ambience Monitoring Sensor
Test Model:	AM319-915M
Multiple Models:	AM319-9M, AM319-915M[AS923], AM307-915M,AM307-9M, AM307-915M[AS923]
Operation Frequency:	902.3-926MHz(Lora-FHSS, 125kHz mode)
Maximum Peak Output Power (Conducted):	13.66dBm
Modulation Type:	Lora-FHSS
Rated Input Voltage:	DC 3.6V from battery or DC 5V from adapter
Serial Number:	CR21120010-RF-S1 (AM319-915M PN: O3), CR21120010-RF-S2 (AM319-915M PN: HCHO) CR21120010-RF-S2 (AM307-915M)
EUT Received Date:	2021.12.13
EUT Received Status:	Good
Note: The Multiple models are identical with Test model, please refer to the declaration letter for more detail, which was provided by manufacturer.	

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	Unknown	MF-05001000SM1	Input: 100-240V-50/60Hz 0.4A Output: DC 5V 1.0A
USB Cable	Unknown	Unknown	Un-shield, 1.2 m

Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	902.3	64	915.2
1	902.5	65	915.4
2	902.7	66	915.6
3	902.9	67	915.8
4	903.1	68	916.0
5	903.3	69	916.2
6	903.5	70	916.4
7	903.7	71	916.6
8	903.9	72	916.8
9	904.1	73	917.0
10	904.3	74	917.2
11	904.5	75	917.4
12	904.7	76	917.6
13	904.9	77	917.8
14	905.1	78	918.0
15	905.3	79	918.2
16	905.5	80	918.4
17	905.7	81	918.6
18	905.9	82	918.8

19	906.1	83	919.0
20	906.3	84	919.2
21	906.5	85	919.4
22	906.7	86	919.6
23	906.9	87	919.8
24	907.1	88	920.0
25	907.3	89	920.2
26	907.5	90	920.4
27	907.7	91	920.6
28	907.9	92	920.8
29	908.1	93	921.0
30	908.3	94	921.2
31	908.5	95	921.4
32	908.7	96	921.6
33	908.9	97	921.8
34	909.1	98	922.0
35	909.3	99	922.2
36	909.5	100	922.4
37	909.7	101	922.6
38	909.9	102	922.8
39	910.1	103	923.0
40	910.3	104	923.2
41	910.5	105	923.4
42	910.7	106	923.6
43	910.9	107	923.8
44	911.1	108	924.0
45	911.3	109	924.2
46	911.5	110	924.4
47	911.7	111	924.6
48	911.9	112	924.8
49	912.1	113	925.0
50	912.3	114	925.2
51	912.5	115	925.4
52	912.7	116	925.6
53	912.9	117	925.8
54	913.1	118	926.0
55	913.3	/	/
56	913.5	/	/
57	913.7	/	/
58	913.9	/	/
59	914.1	/	/
60	914.3	/	/
61	914.5	/	/
62	914.7	/	/
63	914.9	/	/

Per section 15.31(m), the lowest frequency, middle frequency, and highest frequency were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	902.3
Middle	914.9
Highest	926.0

Antenna Information Detail ▲:

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range	§15.203 Requirement
Xiamen Milesight IoT Co., Ltd.	PCB	50	1.0 dBi/902-928MHz	Compliance

The Method of §15.203 Compliance:

- ☒ Antenna must be permanently attached to the unit.
- ☐ Antenna must use a unique type of connector to attach to the EUT.
- ☐ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
Equipment Modifications:	No		
EUT Exercise Software:	UartAssist V5.0.2		
The software “UartAssist V5.0.2” was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲：			
Test Modes	Power Level Setting		
	Lowest	Middle	Highest
Lora-FHSS	0	0	0

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	Yes	No	1.2	Adapter	EUT

.2.4 Block Diagram of Test Setup


AC line conducted emissions:

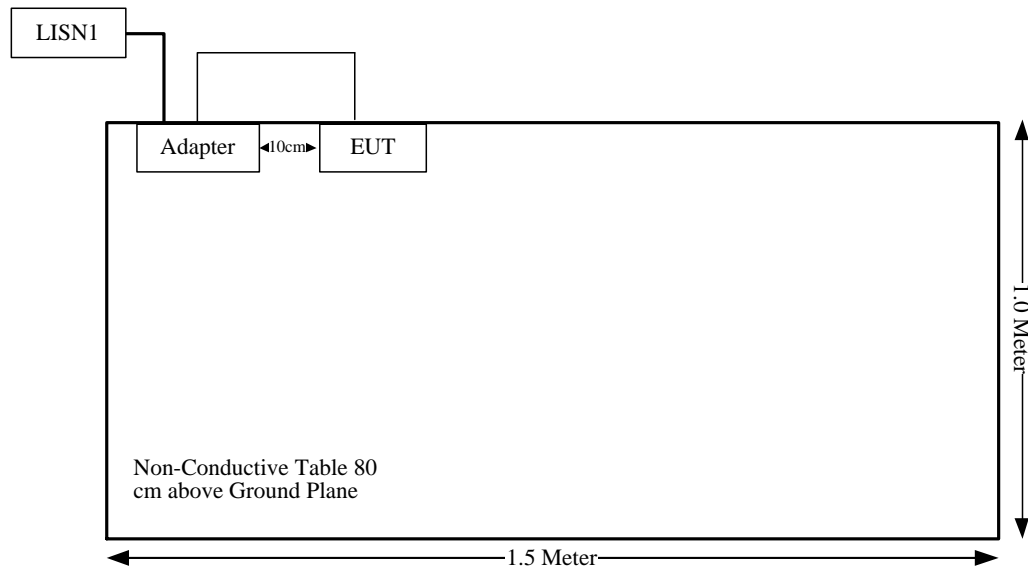


Spurious Emissions:

Below 1GHz:

Adapter power mode:

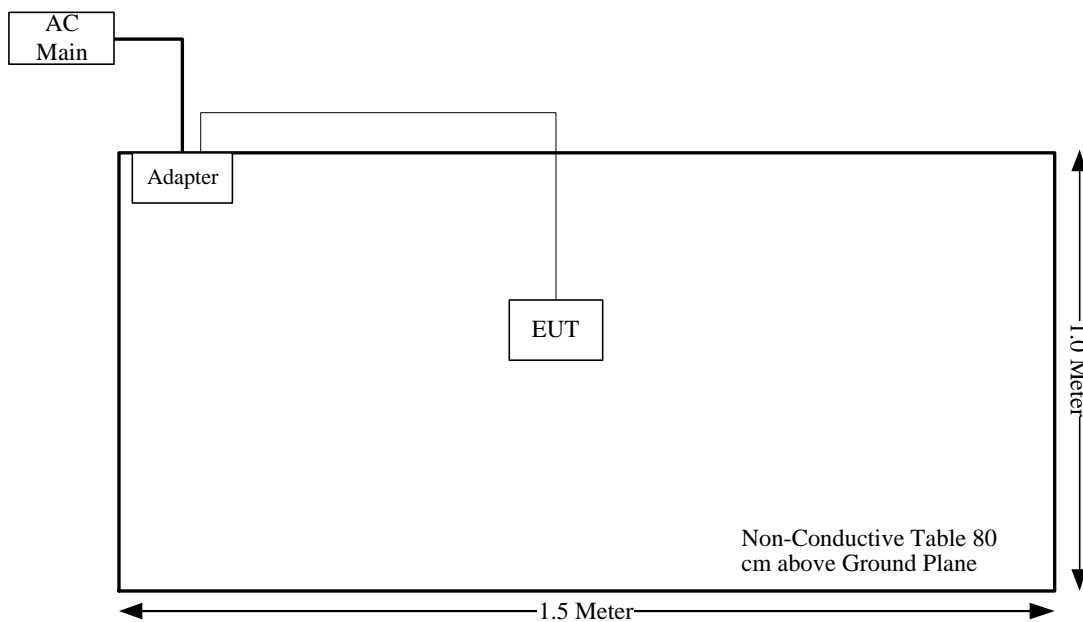


Batter power mode:

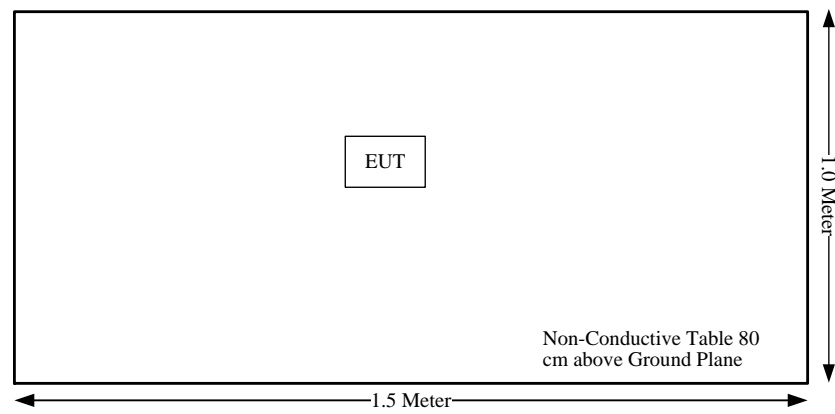


Above 1GHz:

Adapter power mode:

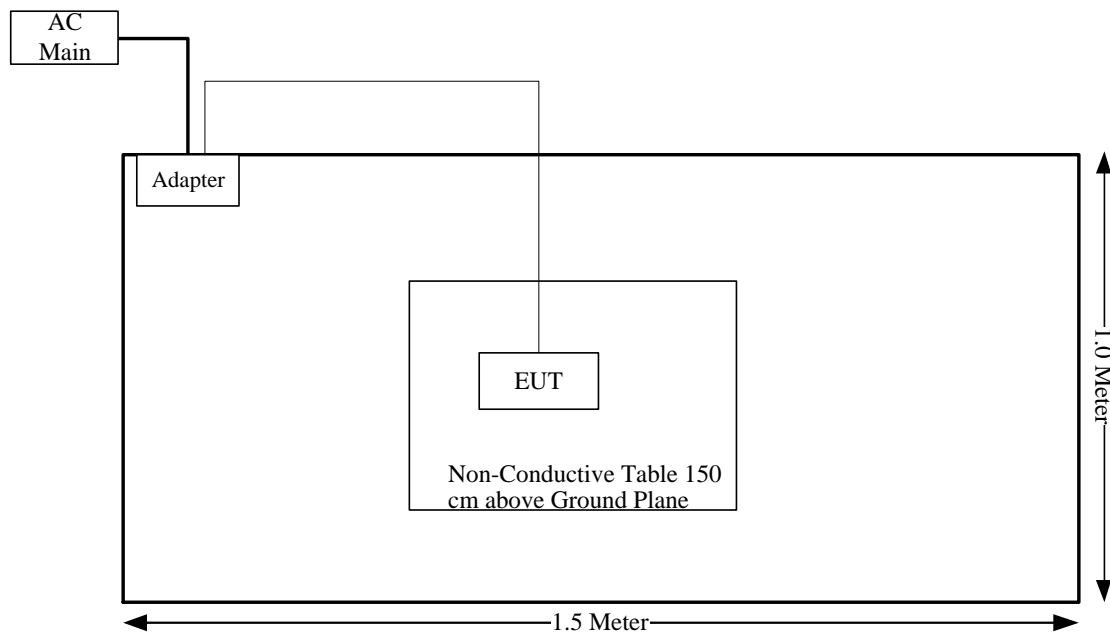

Batter power mode:

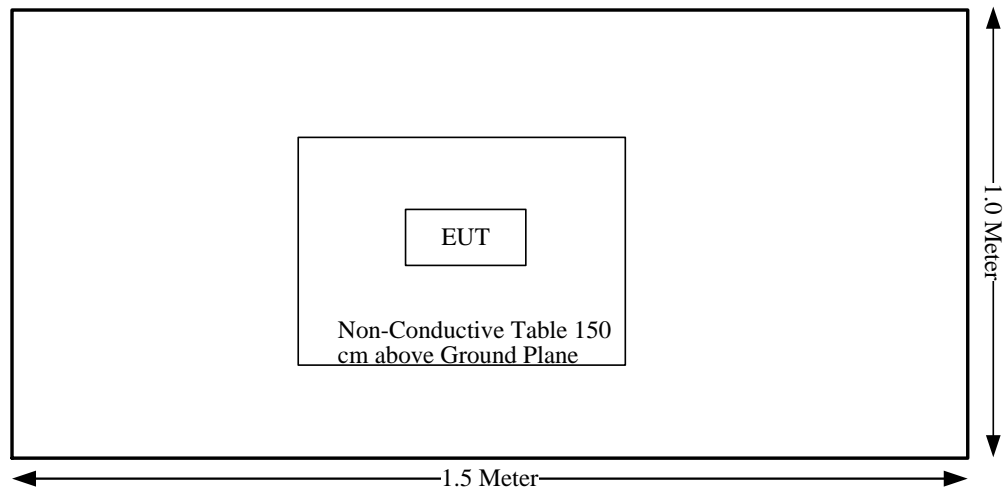

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Power Spectral Density, conducted	$\pm 0.61\text{ dB}$
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	$\pm 1.26\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s)/Rule(s)	Description of Test	Result
FCC §15.207(a)	AC line conducted emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Spurious emissions	Compliant
FCC §15.247(a)(1)(i)	20 dB bandwidth	Compliant
FCC §15.247(a)(1)	Channel separation	Compliant
FCC §15.247(a)(1)(i)	Number of hopping Frequency	Compliant
FCC §15.247(a)(1)(i)	Time of occupancy (dwell time)	Compliant
FCC §15.247(b)(2)	Peak output power measurement	Compliant
FCC §15.247(d)	Band edges	Compliant
FCC §15.203	Antenna requirement	Compliant
§15.247 (i) & §1.1307(b)	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC §15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

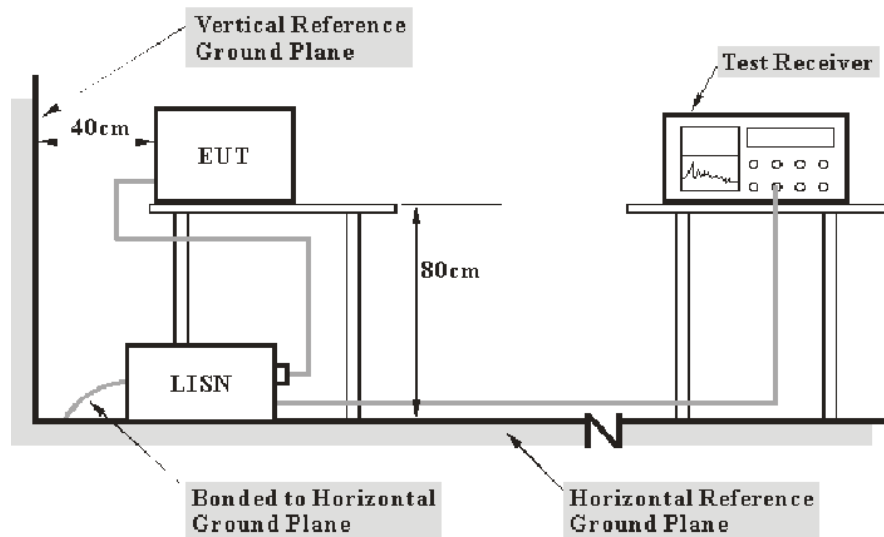

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.2.2 EUT Setup

Below 1GHz:

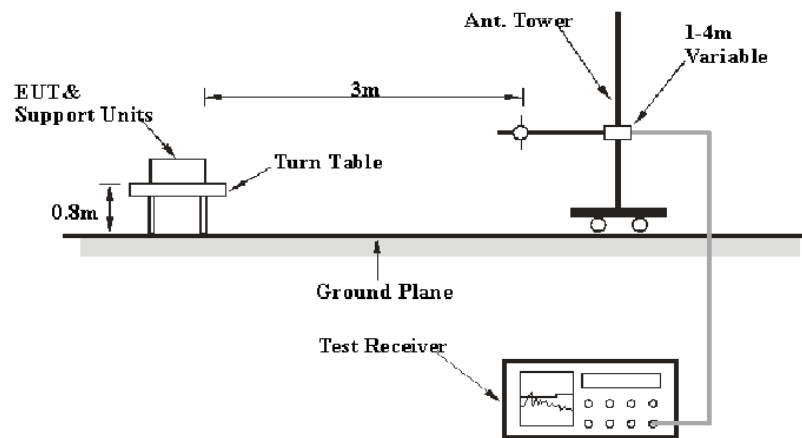

Above 1GHz:

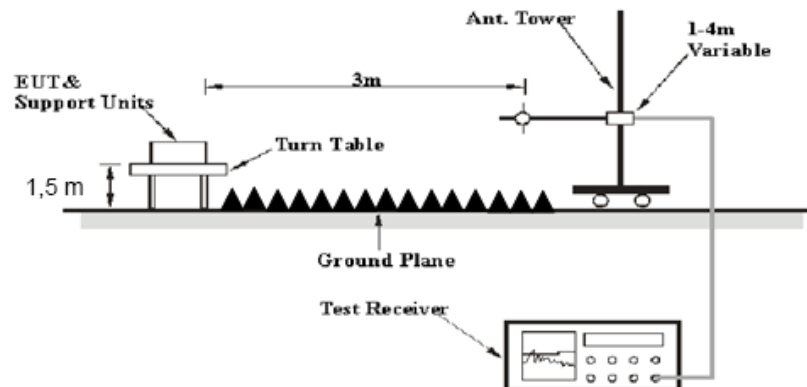

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 20 dB Bandwidth

3.3.1 Applicable Standard

FCC §15.247 (a)(1)(i)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.3.2 EUT Setup

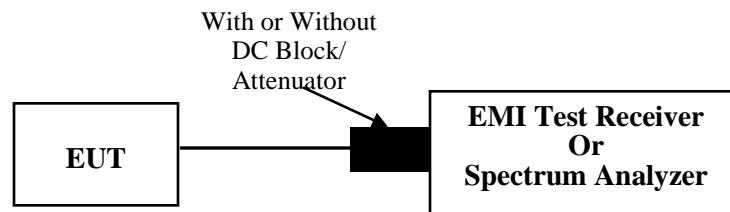

3.3.3 Test Procedure

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.

Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level.

Record the frequency difference as the emission bandwidth.

Repeat above procedures until all frequencies measured were complete.


3.4 Channel Separation

3.4.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.4.2 EUT Setup

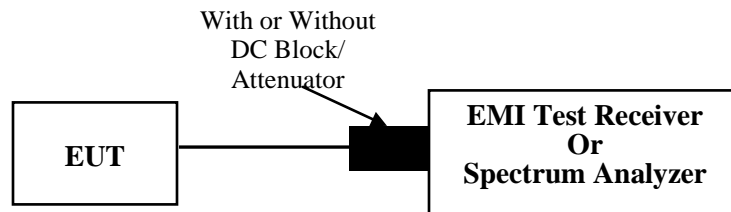

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.


3.5 Number Of Hopping Frequency

3.5.1 Applicable Standard

FCC §15.247 (a)(1)(i)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.5.2 EUT Setup

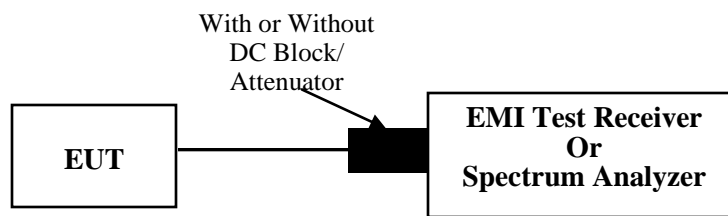

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.3

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.


3.6 Time Of Occupancy(Dwell Time)

3.6.1 Applicable Standard

FCC §15.247 (a)(1)(i)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.6.2 EUT Setup

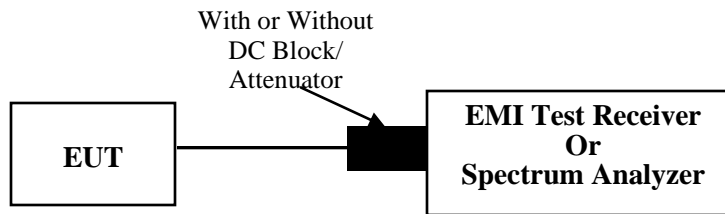

3.6.3 Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.


3.7 Peak Output Power

3.7.1 Applicable Standard

FCC §15.247 (b)(2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

3.7.2 EUT Setup

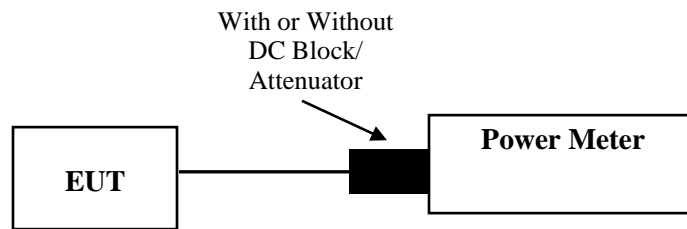

3.7.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
2. Add a correction factor to the display.


3.8 100 kHz Bandwidth of Frequency Band Edge

3.8.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.8.2 EUT Setup

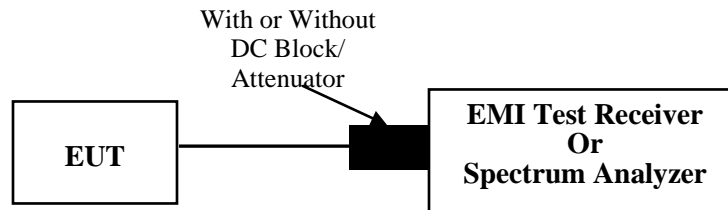

3.8.3 Test Procedure

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

3.9 Antenna Requirement

3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Judgment

Please refer to the Antenna Information detail in Section 1.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR21120010-RF-S1 (AM319-915M PN: O3), CR21120010-RF-S2 (AM319-915M PN: HCHO) CR21120010-RF-S2 (AM307-915M)	Test Date:	2021-12-27~2022-03-18
Test Site:	CE	Test Mode:	Transmitting
Tester:	Nick Tang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	15.3~24.6	Relative Humidity: (%)	57~66	ATM Pressure: (kPa)	100.4~102.3
----------------------	-----------	------------------------------	-------	------------------------	-------------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101132	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


AM319-915M PN: O3

Line:

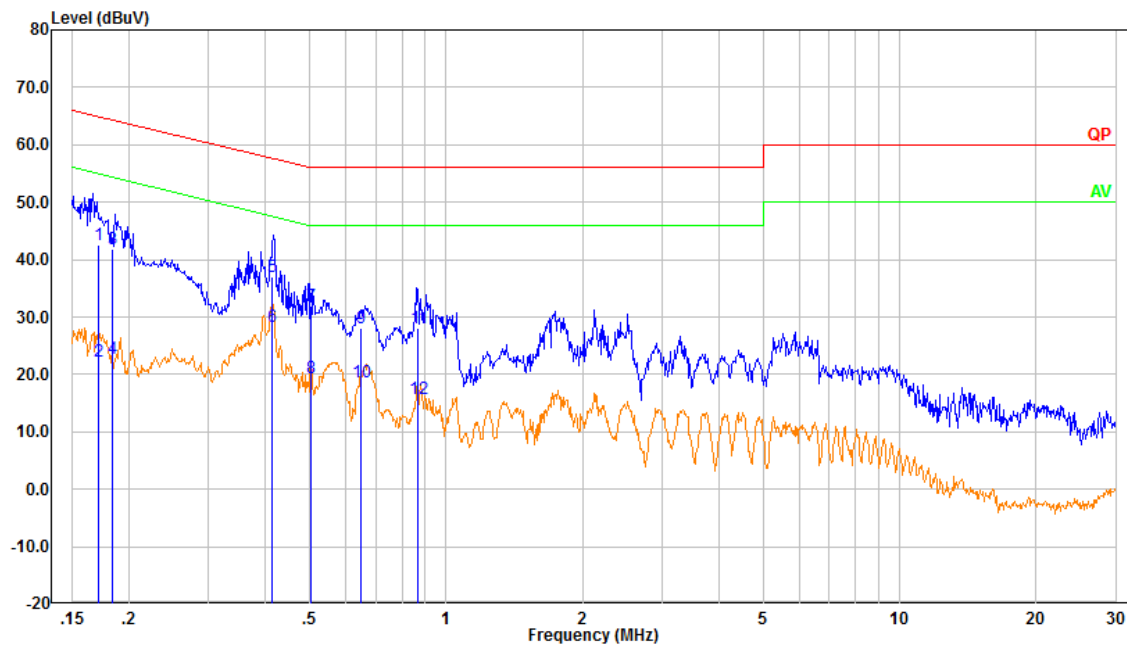

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.171	33.05	9.61	42.66	64.91	22.25	QP
2	0.171	12.59	9.61	22.20	54.91	32.71	Average
3	0.184	32.26	9.61	41.87	64.28	22.41	QP
4	0.184	13.04	9.61	22.65	54.28	31.63	Average
5	0.413	27.33	9.61	36.94	57.58	20.64	QP
6	0.413	18.72	9.61	28.33	47.58	19.25	Average
7	0.503	22.23	9.61	31.84	56.00	24.16	QP
8	0.503	9.71	9.61	19.32	46.00	26.68	Average
9	0.649	18.37	9.62	27.99	56.00	28.01	QP
10	0.649	9.02	9.62	18.64	46.00	27.36	Average
11	0.869	18.51	9.62	28.13	56.00	27.87	QP
12	0.869	6.15	9.62	15.77	46.00	30.23	Average


Neutral:

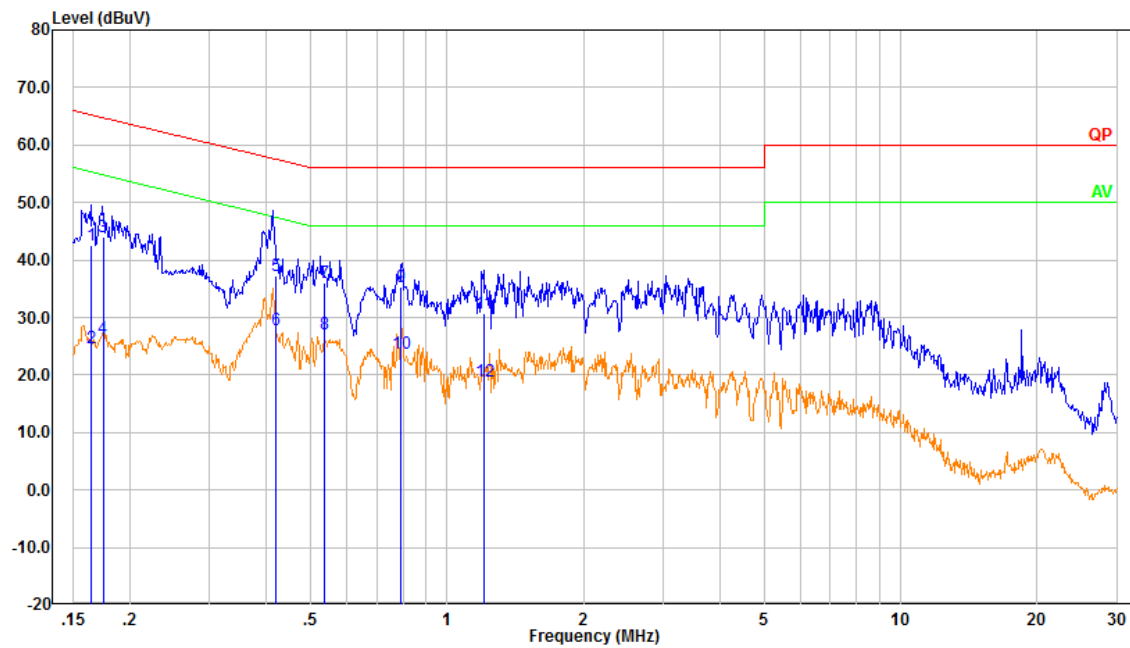

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.164	32.84	9.61	42.45	65.26	22.81	QP
2	0.164	15.04	9.61	24.65	55.26	30.61	Average
3	0.175	34.30	9.61	43.91	64.74	20.83	QP
4	0.175	16.69	9.61	26.30	54.74	28.44	Average
5	0.420	27.70	9.61	37.31	57.45	20.14	QP
6	0.420	18.15	9.61	27.76	47.45	19.69	Average
7	0.536	26.51	9.61	36.12	56.00	19.88	QP
8	0.536	17.50	9.61	27.11	46.00	18.89	Average
9	0.792	25.59	9.62	35.21	56.00	20.79	QP
10	0.792	14.19	9.62	23.81	46.00	22.19	Average
11	1.206	21.00	9.62	30.62	56.00	25.38	QP
12	1.206	9.30	9.62	18.93	46.00	27.07	Average


AM319-915M PN: HCHO

Line:

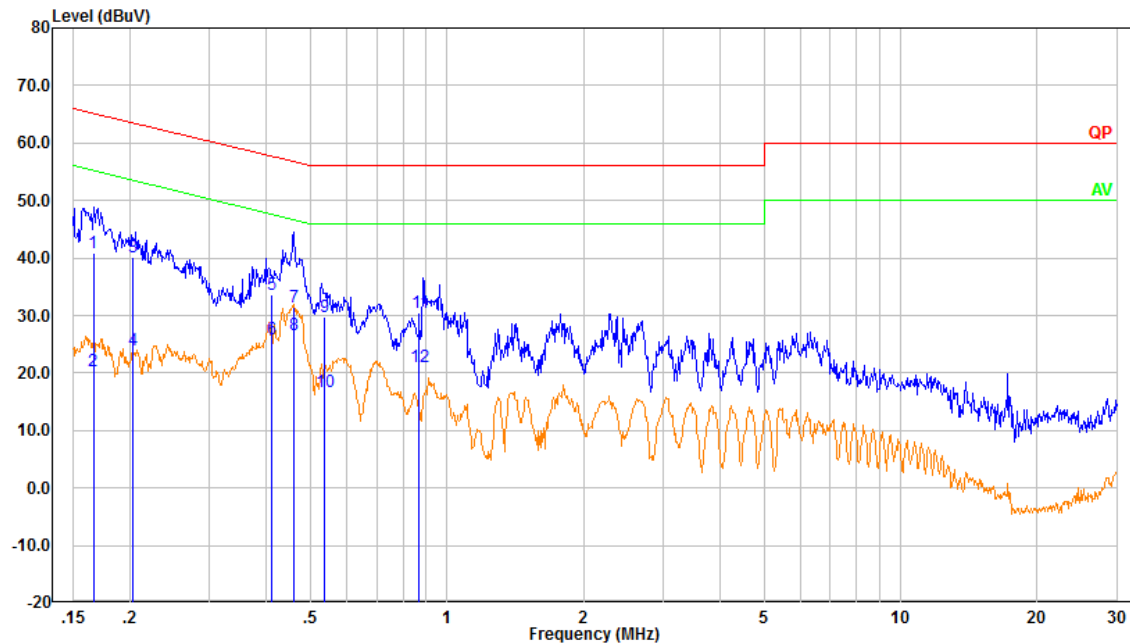

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.166	31.30	9.61	40.91	65.15	24.24	QP
2	0.166	10.78	9.61	20.39	55.15	34.76	Average
3	0.203	30.63	9.61	40.24	63.48	23.24	QP
4	0.203	14.39	9.61	24.00	53.48	29.48	Average
5	0.410	24.00	9.61	33.61	57.65	24.04	QP
6	0.410	16.22	9.61	25.83	47.65	21.82	Average
7	0.461	21.80	9.61	31.41	56.68	25.27	QP
8	0.461	16.96	9.61	26.57	46.68	20.11	Average
9	0.536	20.23	9.61	29.84	56.00	26.16	QP
10	0.536	7.20	9.61	16.81	46.00	29.19	Average
11	0.869	20.80	9.62	30.42	56.00	25.58	QP
12	0.869	11.42	9.62	21.04	46.00	24.96	Average


Neutral:

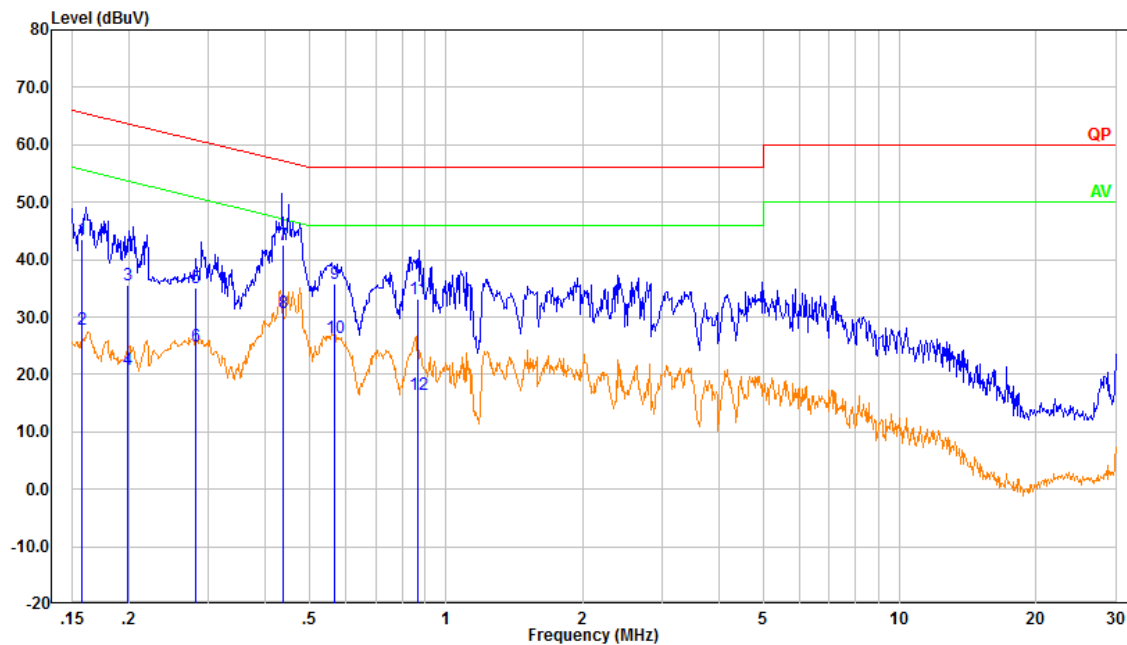

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.158	33.96	9.61	43.57	65.57	22.00	QP
2	0.158	18.11	9.61	27.72	55.57	27.85	Average
3	0.199	25.94	9.61	35.55	63.63	28.08	QP
4	0.199	11.20	9.61	20.81	53.63	32.82	Average
5	0.282	25.39	9.61	35.00	60.77	25.77	QP
6	0.282	15.36	9.61	24.97	50.77	25.80	Average
7	0.439	32.96	9.61	42.57	57.09	14.52	QP
8	0.439	21.05	9.61	30.66	47.09	16.43	Average
9	0.570	26.27	9.62	35.88	56.00	20.12	QP
10	0.570	16.66	9.62	26.28	46.00	19.72	Average
11	0.867	23.62	9.62	33.24	56.00	22.76	QP
12	0.867	6.79	9.62	16.41	46.00	29.59	Average


AM307-915M

Line:

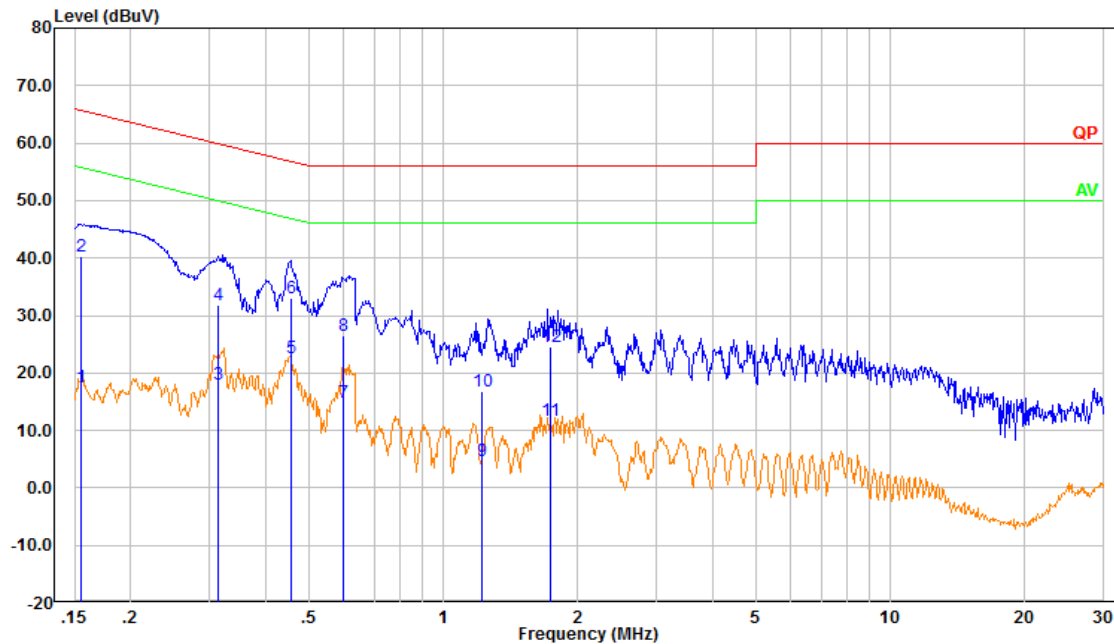

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.154	7.99	9.61	17.60	55.76	38.16	Average
2	0.154	30.64	9.61	40.25	65.76	25.51	QP
3	0.314	8.38	9.61	17.99	49.86	31.87	Average
4	0.314	22.14	9.61	31.75	59.86	28.11	QP
5	0.456	12.98	9.61	22.59	46.77	24.18	Average
6	0.456	23.30	9.61	32.91	56.77	23.86	QP
7	0.600	5.28	9.62	14.90	46.00	31.10	Average
8	0.600	16.91	9.62	26.53	56.00	29.47	QP
9	1.222	-5.00	9.62	4.62	46.00	41.38	Average
10	1.222	7.14	9.62	16.77	56.00	39.23	QP
11	1.733	2.15	9.63	11.77	46.00	34.23	Average
12	1.733	14.87	9.63	24.50	56.00	31.50	QP

Neutral:

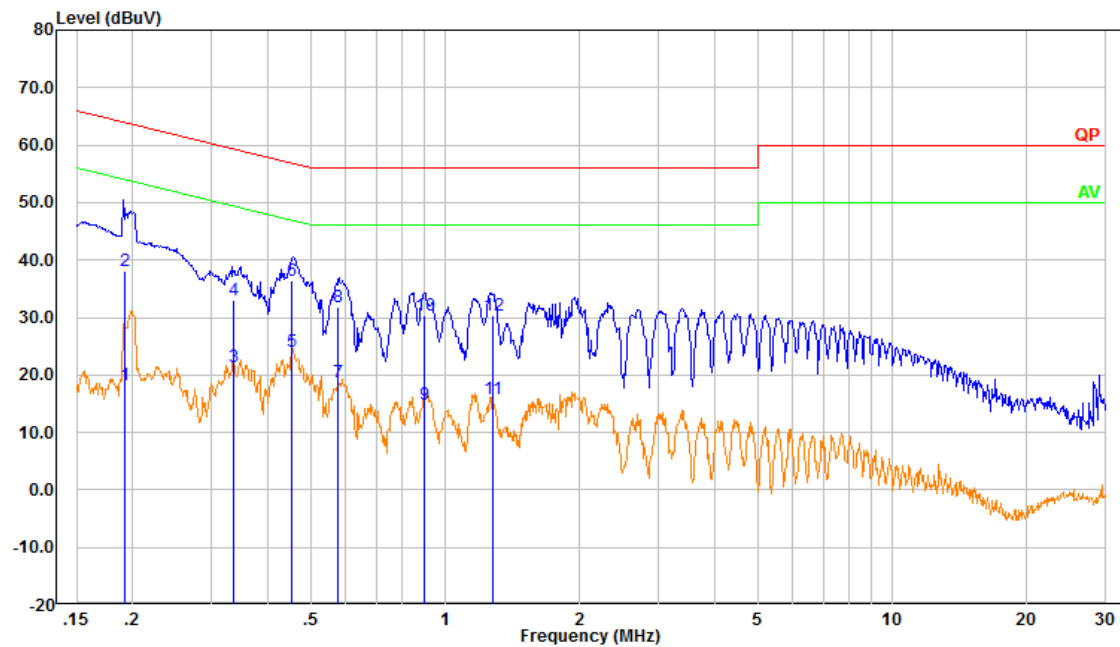

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.192	8.59	9.61	18.20	53.94	35.74	Average
2	0.192	28.48	9.61	38.09	63.94	25.85	QP
3	0.338	11.79	9.61	21.40	49.26	27.86	Average
4	0.338	23.38	9.61	32.99	59.26	26.27	QP
5	0.455	14.42	9.61	24.03	46.78	22.75	Average
6	0.455	26.87	9.61	36.48	56.78	20.30	QP
7	0.576	9.02	9.62	18.64	46.00	27.36	Average
8	0.576	22.29	9.62	31.91	56.00	24.09	QP
9	0.897	5.34	9.62	14.96	46.00	31.04	Average
10	0.897	20.65	9.62	30.27	56.00	25.73	QP
11	1.275	6.12	9.62	15.75	46.00	30.25	Average
12	1.275	20.79	9.62	30.41	56.00	25.59	QP

4.2 Radiation Spurious Emissions

Serial Number:	CR21120010-RF-S1 (AM319-915M PN: O3), CR21120010-RF-S2 (AM319-915M PN: HCHO) CR21120010-RF-S2 (AM307-915M)	Test Date:	2022-07-27~2022-07-28
Test Site:	966-1, 966-2	Test Mode:	Transmitting
Tester:	Carl Liang, Gary Ling, Nick Tang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.7~25	Relative Humidity: (%)	45~66	ATM Pressure: (kPa)	100.1~101.3
----------------------	---------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2022-07-15	2023-07-14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022-07-17	2023-07-16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022-07-17	2023-07-16
Sonoma	Amplifier	310N	186165	2022-07-17	2023-07-16
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2022-07-15	2023-07-14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below table and plots.


Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis, the worst orientation was photographed and it's data was recorded.

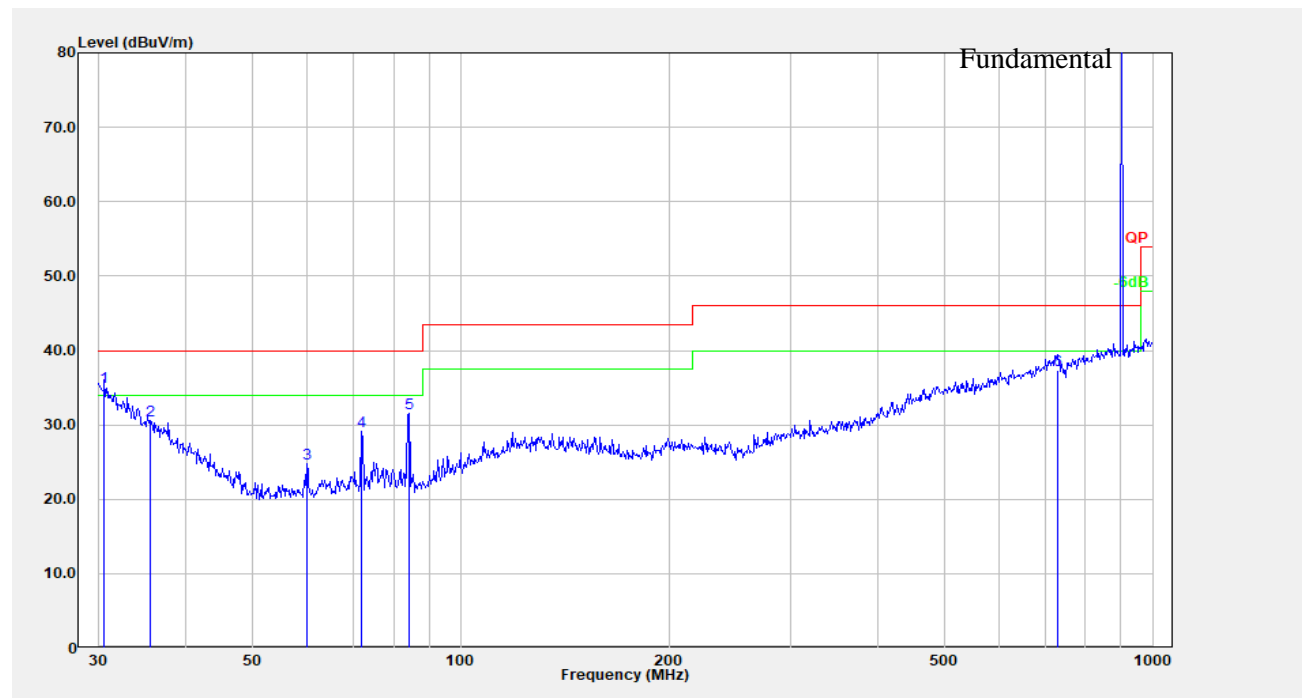1) 30MHz-1GHz(Low channel was the worst)**AM319-915M PN: O3****Horizontal:**


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	7.76	27.28	35.04	40.00	4.96	QP
2	35.499	7.11	23.44	30.55	40.00	9.45	Peak
3	59.859	10.92	13.84	24.76	40.00	15.24	Peak
4	71.832	14.56	14.56	29.11	40.00	10.89	Peak
5	84.110	17.62	14.00	31.62	40.00	8.38	Peak
6	729.358	9.48	27.91	37.38	46.00	8.62	QP

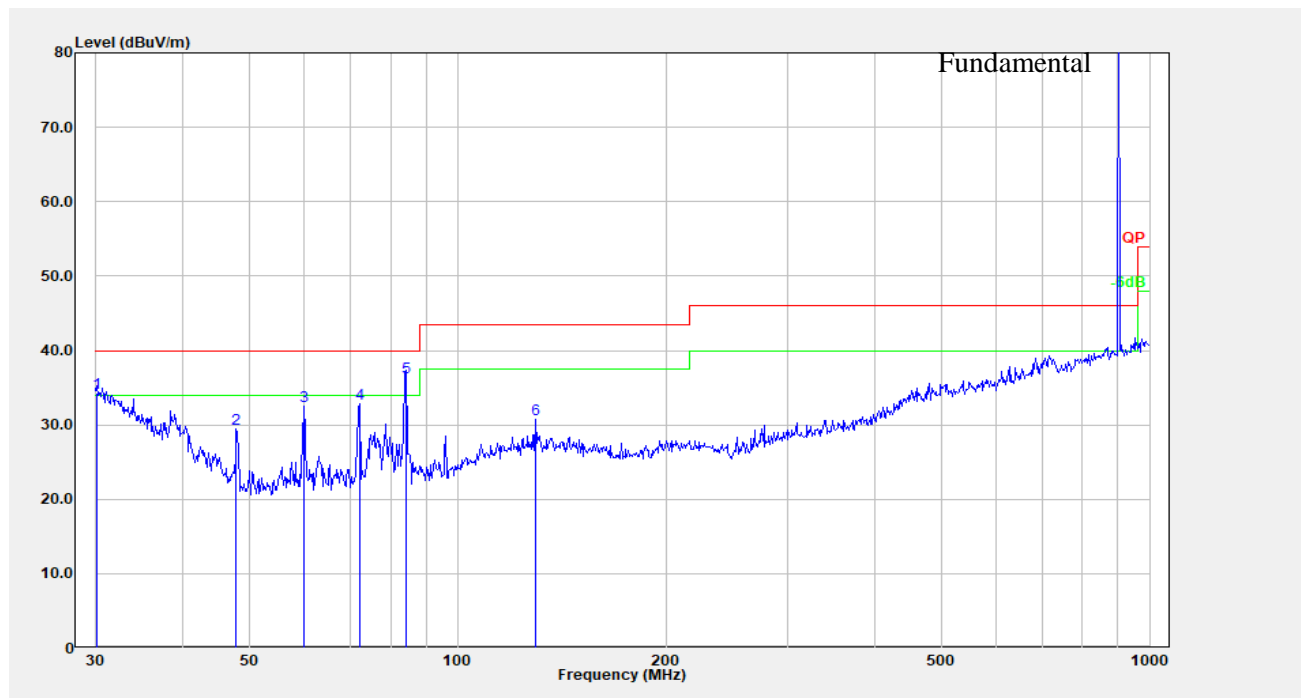Vertical:


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	30.105	6.60	27.61	34.21	40.00	5.79	QP
2	47.826	14.16	15.36	29.53	40.00	10.47	Peak
3	59.859	18.75	13.84	32.59	40.00	7.41	Peak
4	72.084	18.38	14.54	32.92	40.00	7.08	Peak
5	84.110	22.37	14.00	36.37	40.00	3.63	QP
6	129.468	10.86	19.93	30.79	43.50	12.71	Peak

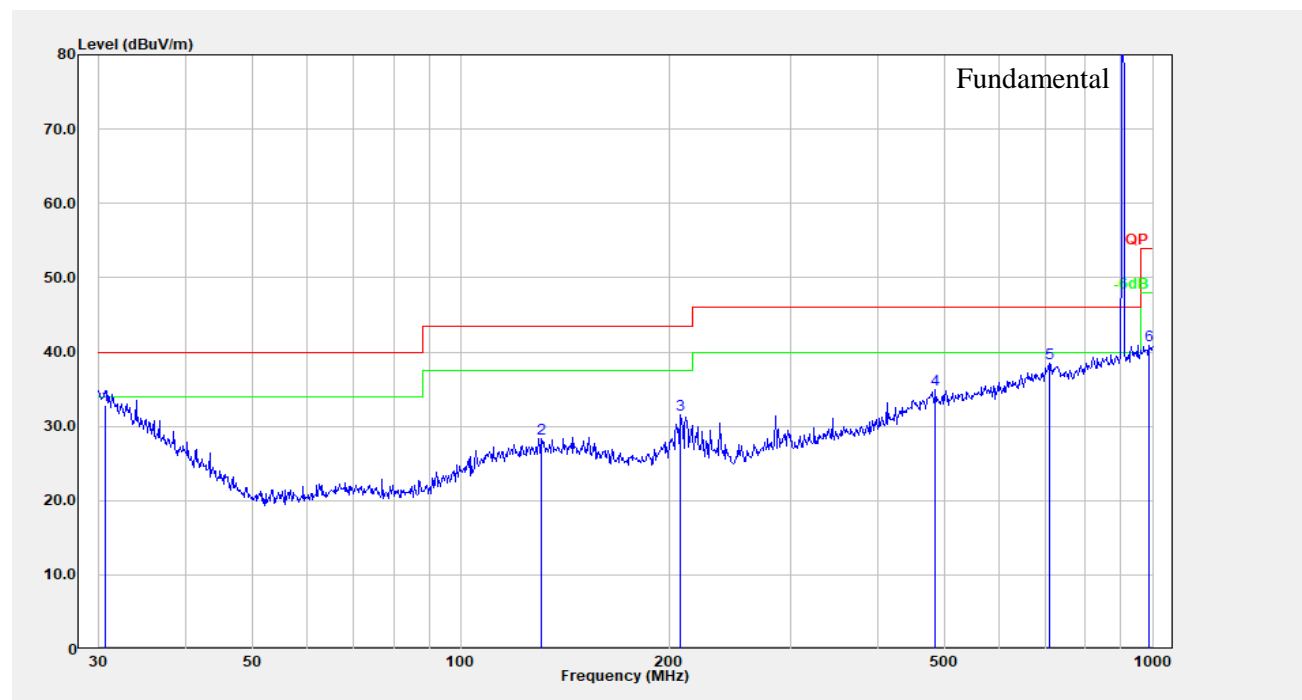AM319-915M PN: HCHO**Horizontal:**


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	5.61	27.19	32.81	40.00	7.19	QP
2	130.837	8.44	19.89	28.33	43.50	15.17	Peak
3	207.850	12.83	18.79	31.61	43.50	11.89	Peak
4	485.609	10.11	24.75	34.87	46.00	11.13	Peak
5	709.182	10.80	27.67	38.46	46.00	7.54	Peak
6	989.536	10.50	30.45	40.95	54.00	13.05	Peak

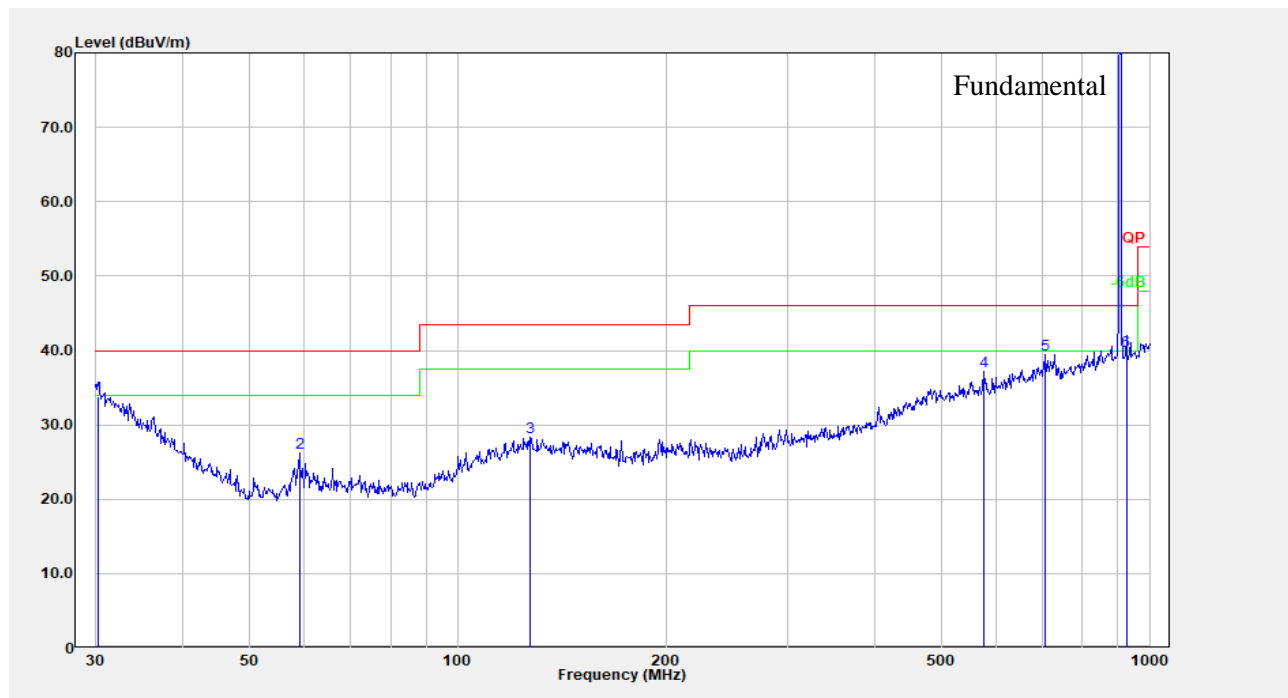Vertical:

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	30.211	6.24	27.53	33.77	40.00	6.23	QP
2	59.025	12.43	13.86	26.29	40.00	13.71	Peak
3	127.218	8.40	19.86	28.26	43.50	15.24	Peak
4	576.644	11.61	25.61	37.21	46.00	8.79	Peak
5	706.700	11.80	27.63	39.43	46.00	6.57	Peak
6	925.756	10.26	29.67	39.93	46.00	6.07	QP

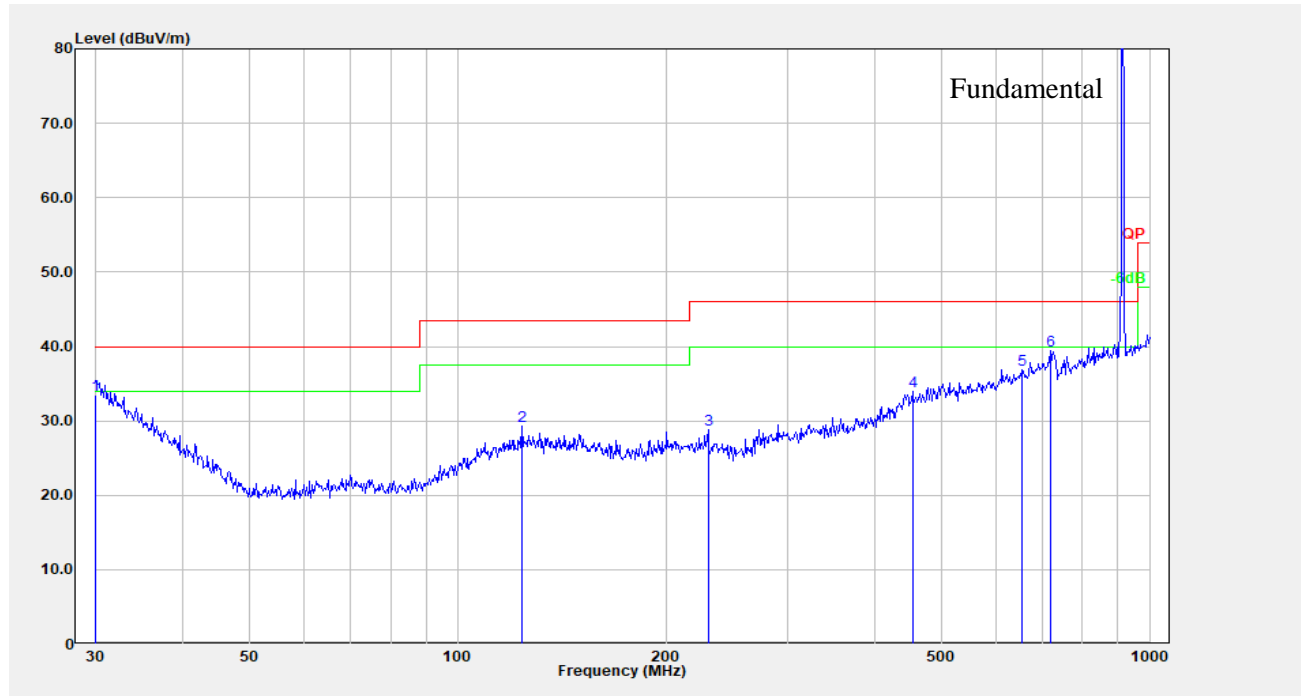AM307-915M:**Battery mode:****Horizontal:**


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	30.000	5.80	27.69	33.49	40.00	6.51	QP
2	123.699	9.47	19.81	29.27	43.50	14.23	Peak
3	230.099	10.47	18.33	28.80	46.00	17.20	Peak
4	454.310	9.61	24.30	33.91	46.00	12.09	Peak
5	654.232	9.97	26.87	36.85	46.00	9.15	Peak
6	719.200	11.63	27.73	39.36	46.00	6.64	Peak

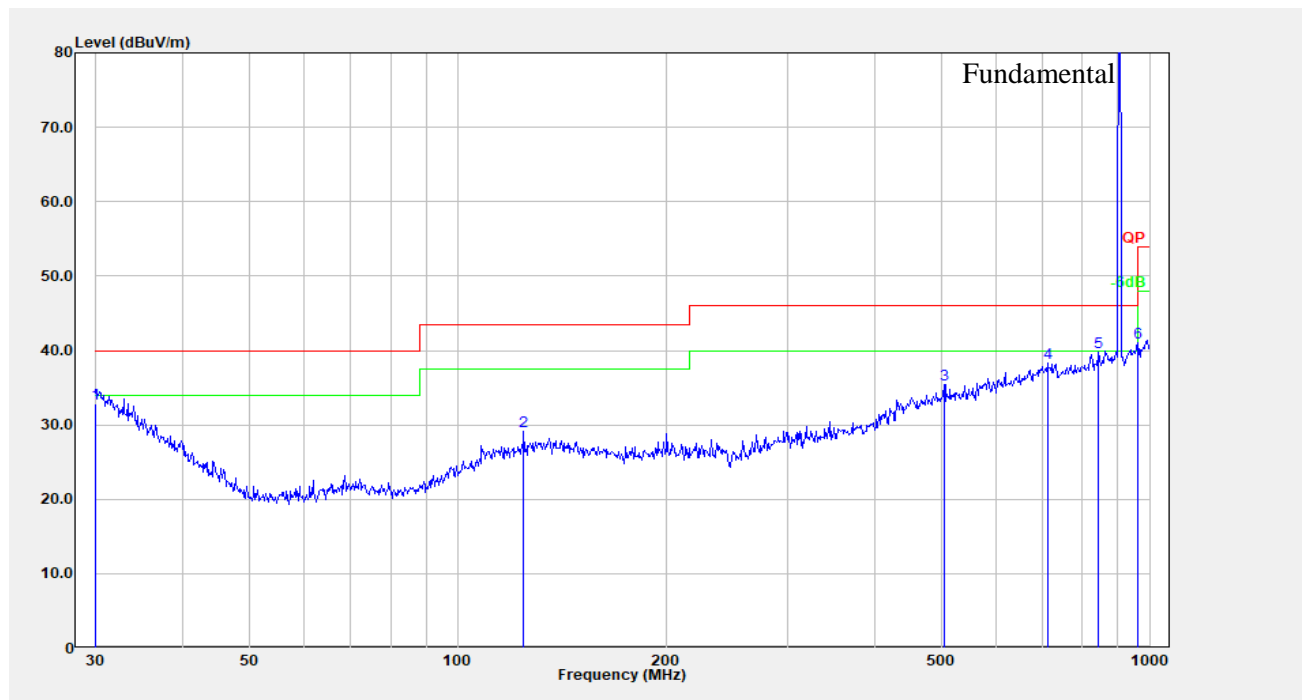Vertical:


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	5.09	27.69	32.78	40.00	7.22	QP
2	124.569	9.23	19.86	29.10	43.50	14.40	Peak
3	504.706	10.40	25.08	35.48	46.00	10.52	Peak
4	711.674	10.65	27.68	38.33	46.00	7.67	Peak
5	845.088	10.48	29.20	39.68	46.00	6.32	Peak
6	962.162	10.95	30.09	41.04	54.00	12.96	Peak

Adapter mode:

Horizontal:

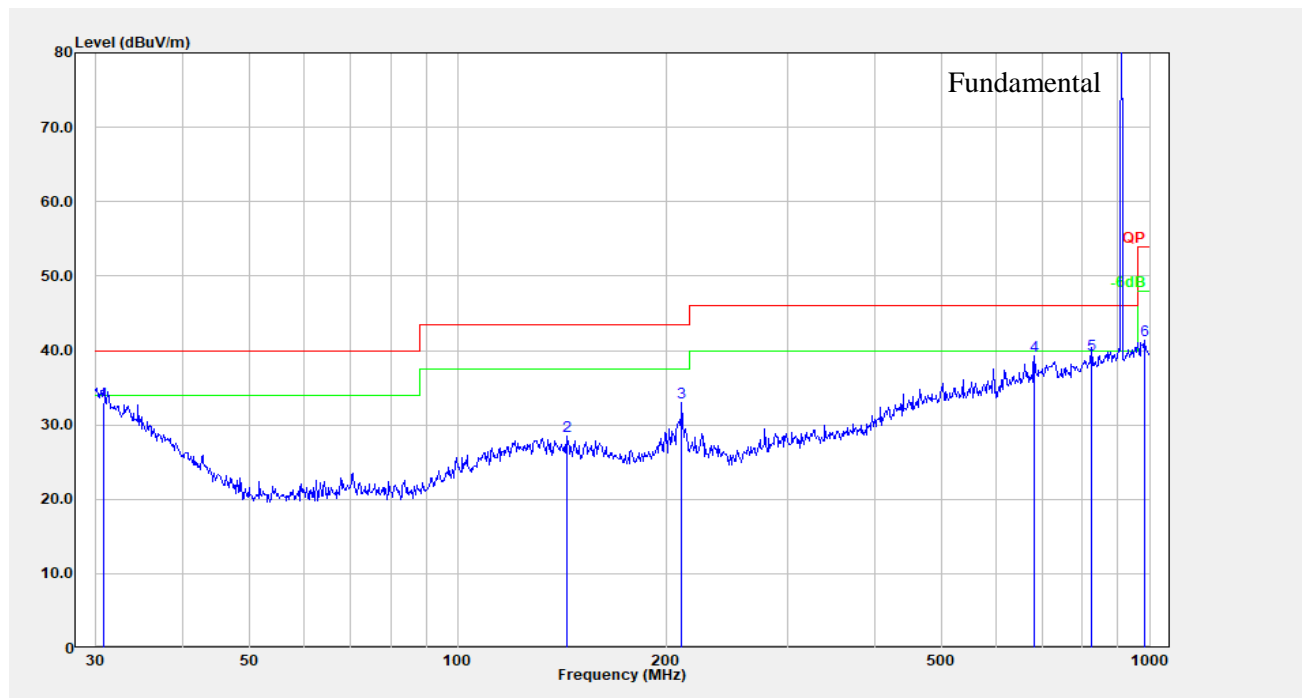

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.745	5.84	27.11	32.94	40.00	7.06	QP
2	143.830	9.19	19.29	28.48	43.50	15.02	Peak
3	210.786	14.27	18.73	33.00	43.50	10.50	Peak
4	682.348	11.98	27.30	39.27	46.00	6.73	Peak
5	824.597	10.41	29.05	39.46	46.00	6.54	QP
6	986.072	10.97	30.40	41.37	54.00	12.63	Peak

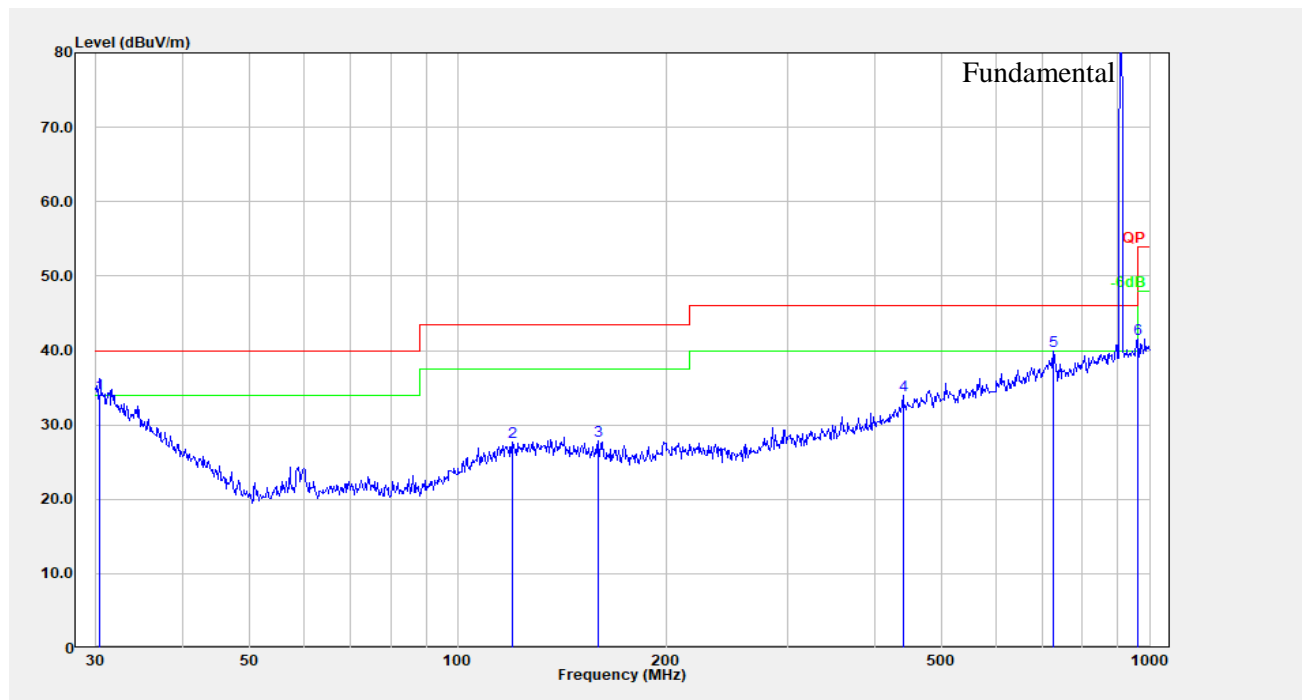Vertical:



No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	30.317	6.72	27.44	34.16	40.00	5.84	QP
2	119.856	8.06	19.68	27.73	43.50	15.77	Peak
3	159.784	8.77	19.09	27.86	43.50	15.64	Peak
4	440.196	10.21	23.82	34.03	46.00	11.97	Peak
5	726.805	12.13	27.86	39.98	46.00	6.02	Peak
6	962.162	11.45	30.09	41.53	54.00	12.47	Peak



2) Fundamental, bandedge and 1-10GHz(AM319-915M PN: O3 was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 902.3 MHz							
902.30	82.53	QP	H	29.46	111.99	N/A	N/A
902.30	74.52	QP	V	29.46	103.98	N/A	N/A
902.00	23.07	QP	H	29.46	52.53	91.99	39.46
1804.60	50.01	PK	H	1.31	51.32	91.99	40.67
1804.60	48.04	PK	V	1.31	49.35	83.98	34.63
2706.90	43.87	PK	H	4.75	48.62	74.00	25.38
2706.90	38.50	AV	H	4.75	43.25	54.00	10.75
2706.90	45.62	PK	V	4.75	50.37	74.00	23.63
2706.90	41.22	AV	V	4.75	45.97	54.00	8.03
3609.20	45.17	PK	H	7.99	53.16	74.00	20.84
3609.20	39.34	AV	H	7.99	47.33	54.00	6.67
3609.20	44.18	PK	V	7.99	52.17	74.00	21.83
3609.20	39.02	AV	V	7.99	47.01	54.00	6.99
4511.50	39.17	PK	H	10.04	49.21	74.00	24.79
4511.50	30.78	AV	H	10.04	40.82	54.00	13.18
4511.50	40.07	PK	V	10.04	50.11	74.00	23.89
4511.50	32.15	AV	V	10.04	42.19	54.00	11.81
5413.80	38.76	PK	H	12.34	51.10	74.00	22.90
5413.80	29.97	AV	H	12.34	42.31	54.00	11.69
5413.80	39.04	PK	V	12.34	51.38	74.00	22.62
5413.80	30.95	AV	V	12.34	43.29	54.00	10.71
6316.10	38.95	PK	H	13.37	52.32	91.99	39.67
6316.10	38.69	PK	V	13.37	52.06	83.98	31.92
7218.40	41.10	PK	H	14.31	55.41	91.99	36.58
7218.40	41.96	PK	V	14.31	56.27	83.98	27.71
9023.00	38.01	PK	H	17.67	55.68	74.00	18.32
9023.00	27.01	AV	H	17.67	44.68	54.00	9.32
9023.00	40.97	PK	V	17.67	58.64	74.00	15.36
9023.00	31.90	AV	V	17.67	49.57	54.00	4.43
Middle Channel: 914.9 MHz							
914.90	84.01	QP	H	29.62	113.63	N/A	N/A
914.90	76.32	QP	V	29.62	105.94	N/A	N/A
1829.80	55.63	PK	H	1.43	57.06	93.63	36.57
1829.80	49.84	PK	V	1.43	51.27	85.94	34.67
2744.70	44.51	PK	H	4.91	49.42	74.00	24.58
2744.70	39.16	AV	H	4.91	44.07	54.00	9.93
2744.70	45.00	PK	V	4.91	49.91	74.00	24.09
2744.70	40.63	AV	V	4.91	45.54	54.00	8.46
3659.60	44.38	PK	H	8.12	52.50	74.00	21.50
3659.60	38.86	AV	H	8.12	46.98	54.00	7.02
3659.60	43.21	PK	V	8.12	51.33	74.00	22.67
3659.60	38.76	AV	V	8.12	46.88	54.00	7.12
4574.50	39.02	PK	H	10.26	49.28	74.00	24.72
4574.50	30.96	AV	H	10.26	41.22	54.00	12.78
4574.50	38.69	PK	V	10.26	48.95	74.00	25.05
4574.50	31.06	AV	V	10.26	41.32	54.00	12.68
5489.40	39.71	PK	H	12.48	52.19	93.63	41.44
5489.40	38.62	PK	V	12.48	51.10	85.94	34.84
6404.30	38.12	PK	H	13.54	51.66	93.63	41.97

6404.30	38.06	PK	V	13.54	51.60	85.94	34.34
7319.20	41.43	PK	H	14.80	56.23	74.00	17.77
7319.20	33.05	AV	H	14.80	47.85	54.00	6.15
7319.20	40.86	PK	V	14.80	55.66	74.00	18.34
7319.20	32.05	AV	V	14.80	46.85	54.00	7.15
8234.10	37.59	PK	H	16.28	53.87	74.00	20.13
8234.10	26.13	AV	H	16.28	42.41	54.00	11.59
8234.10	36.65	PK	V	16.28	52.93	74.00	21.07
8234.10	25.84	AV	V	16.28	42.12	54.00	11.88
9149.00	38.27	PK	H	18.05	56.32	74.00	17.68
9149.00	27.63	AV	H	18.05	45.68	54.00	8.32
9149.00	39.03	PK	V	18.05	57.08	74.00	16.92
9149.00	30.47	AV	V	18.05	48.52	54.00	5.48
High Channel: 926 MHz							
926.00	84.02	QP	H	29.67	113.69	N/A	N/A
926.00	76.71	QP	V	29.67	106.38	N/A	N/A
928.00	24.42	QP	H	29.70	54.12	93.69	39.57
1852.00	58.43	PK	H	1.54	59.97	93.69	33.72
1852.00	52.79	PK	V	1.54	54.33	86.38	32.05
2778.00	44.34	PK	H	5.03	49.37	74.00	24.63
2778.00	38.99	AV	H	5.03	44.02	54.00	9.98
2778.00	44.87	PK	V	5.03	49.90	74.00	24.10
2778.00	40.51	AV	V	5.03	45.54	54.00	8.46
3704.00	43.03	PK	H	8.37	51.40	74.00	22.60
3704.00	38.45	AV	H	8.37	46.82	54.00	7.18
3704.00	41.79	PK	V	8.37	50.16	74.00	23.84
3704.00	37.27	AV	V	8.37	45.64	54.00	8.36
4630.00	39.26	PK	H	10.44	49.70	74.00	24.30
4630.00	30.64	AV	H	10.44	41.08	54.00	12.92
4630.00	36.28	PK	V	10.44	46.72	74.00	27.28
4630.00	28.40	AV	V	10.44	38.84	54.00	15.16
5556.00	38.48	PK	H	12.65	51.13	93.69	42.56
5556.00	38.44	PK	V	12.65	51.09	86.38	35.29
6482.00	39.67	PK	H	13.46	53.13	93.69	40.56
6482.00	39.16	PK	V	13.46	52.62	86.38	33.76
7408.00	39.42	PK	H	15.00	54.42	74.00	19.58
7408.00	31.45	AV	H	15.00	46.45	54.00	7.55
7408.00	40.08	PK	V	15.00	55.08	74.00	18.92
7408.00	31.74	AV	V	15.00	46.74	54.00	7.26
8334.00	35.76	PK	H	16.48	52.24	74.00	21.76
8334.00	25.04	AV	H	16.48	41.52	54.00	12.48
8334.00	36.39	PK	V	16.48	52.87	74.00	21.13
8334.00	25.17	AV	V	16.48	41.65	54.00	12.35
9260.00	37.49	PK	H	18.26	55.75	93.69	37.94
9260.00	38.85	PK	V	18.26	57.11	86.38	29.27

Worst Test plots(Low channel was the worst)
Horizontal:

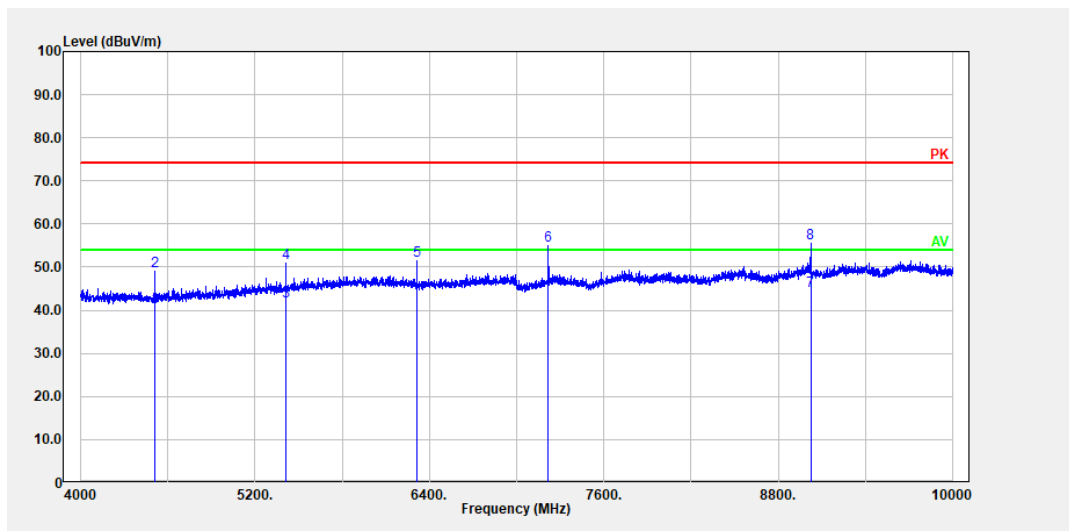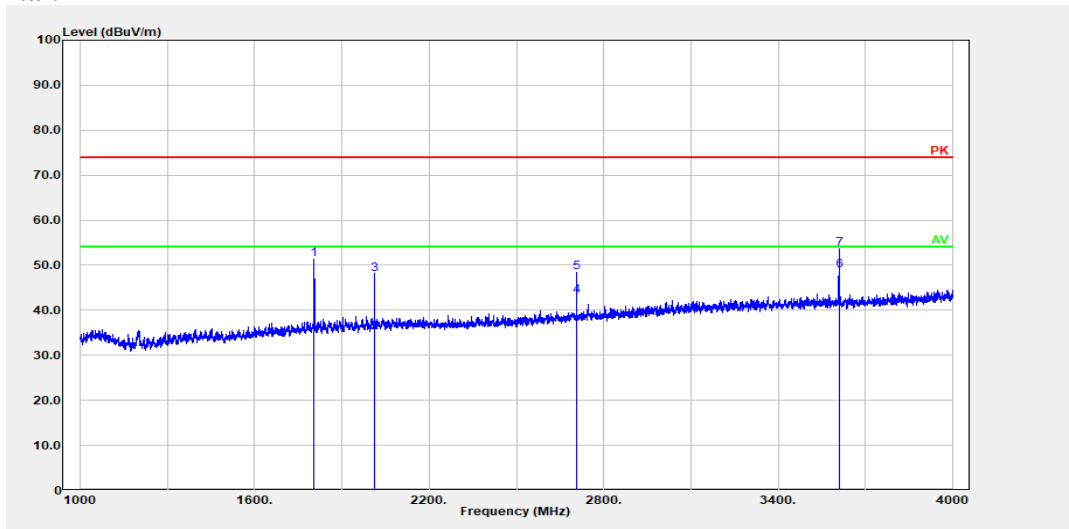

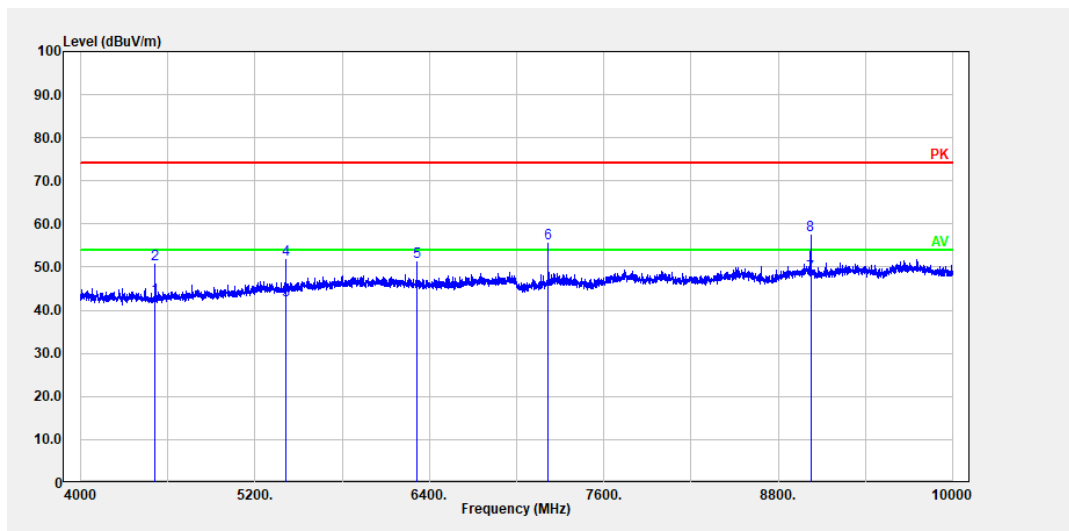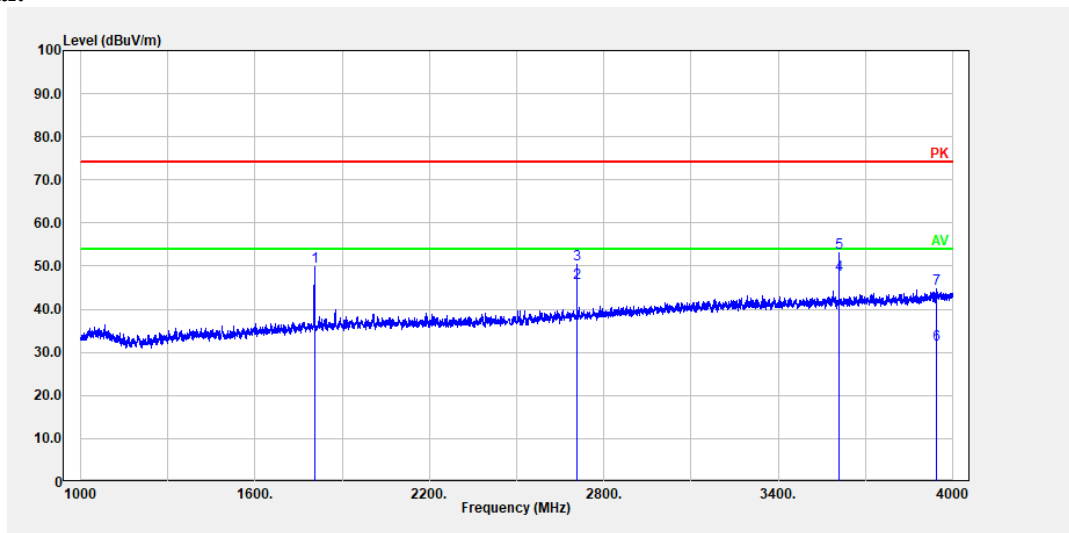Vertical:

4.3 20 dB Emission Bandwidth:

Serial Number:	CR21120010-RF-S1	Test Date:	2022-07-29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.4	Relative Humidity: (%)	42	ATM Pressure: (kPa)	100.6
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Channel	Test Frequency (MHz)	20 dB Bandwidth (MHz)	Limit (MHz)
Lowest	902.3	0.141	0.25
Middle	914.9	0.145	0.25
Highest	926.0	0.144	0.25

Lowest Channel

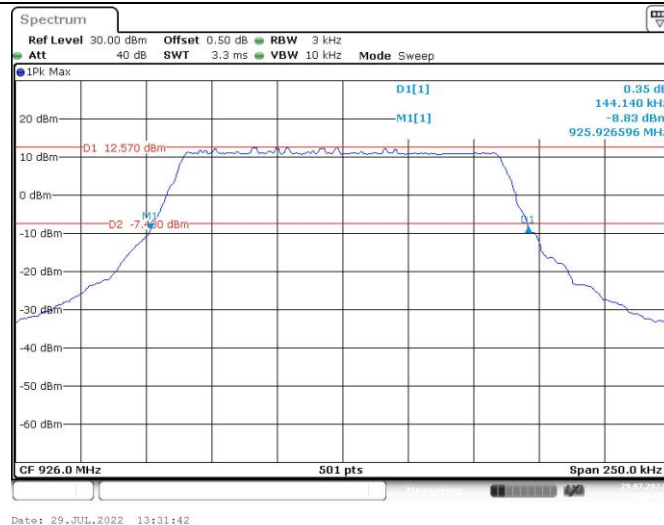

4.4 Channel Separation:

Serial Number:	CR21120010-RF-S1	Test Date:	2022-07-29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.4	Relative Humidity: (%)	42	ATM Pressure: (kPa)	100.6
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Channel	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
Lowest	902.3	0.200	0.141
Middle	914.9	0.200	0.145
Highest	926.0	0.201	0.144


Channel Separation

Lowest Channel

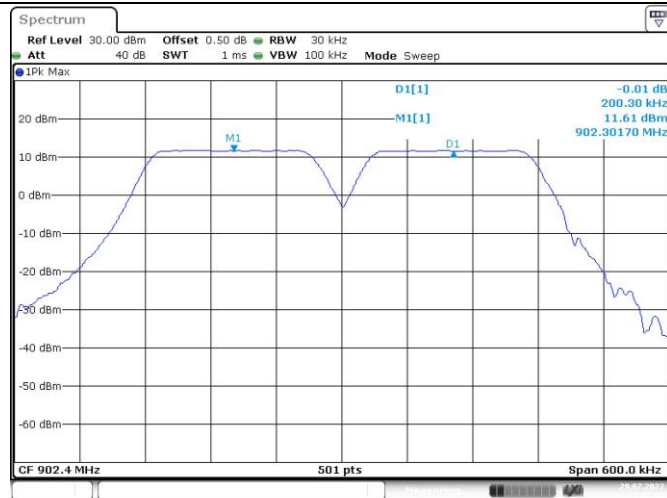


Date: 29.JUL.2022 14:05:38

Middle Channel

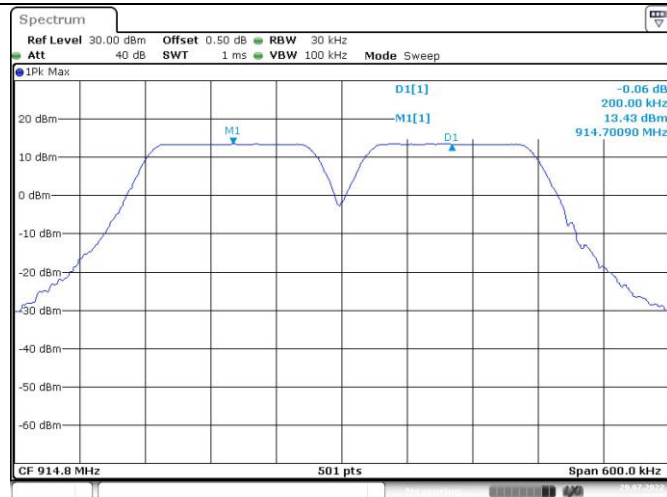

Date: 29.JUL.2022 15:01:20

Highest Channel

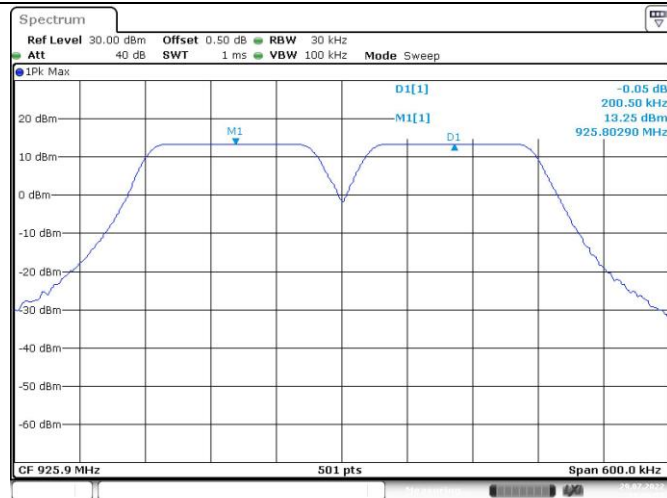

Date: 29.JUL.2022 15:06:22

4.5 Number Of Hopping Frequency:

Serial Number:	CR21120010-RF-S1	Test Date:	2022-07-29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.4	Relative Humidity: (%)	42	ATM Pressure: (kPa)	100.6
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Frequency Range (MHz)	Number of Hopping Channel	Limits
902-928	119	≥ 50

Number of
Hopping Channel

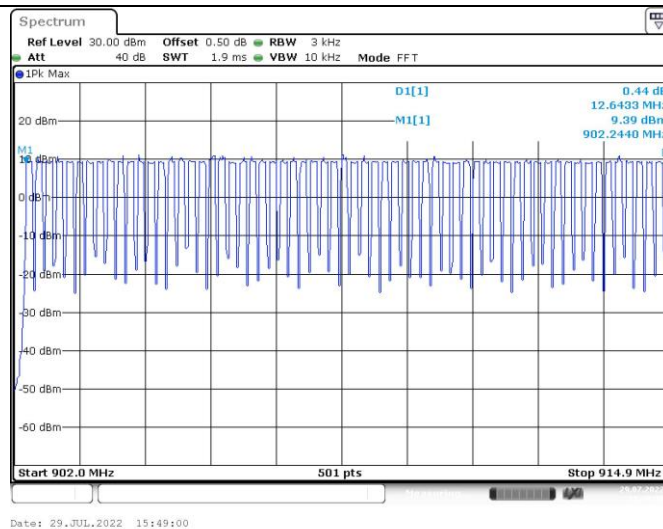

Number of
Hopping Channel

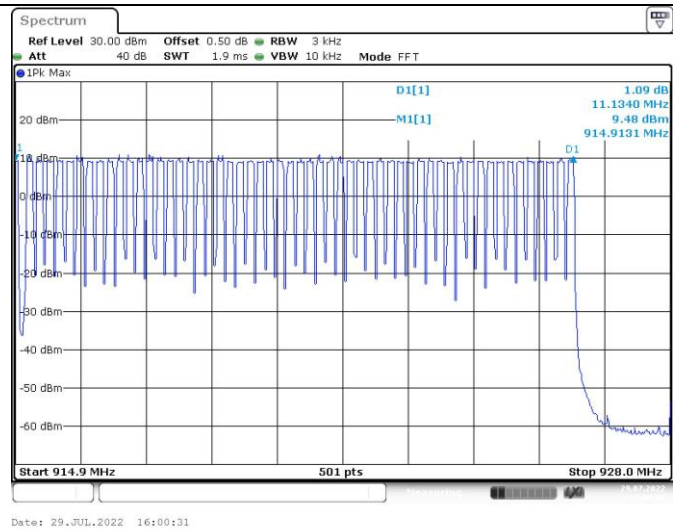

4.6 Time Of Occupancy (Dwell Time):

Serial Number:	CR21120010-RF-S1	Test Date:	2022-07-30
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9	Relative Humidity: (%)	44	ATM Pressure: (kPa)	100.3
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Frequency (MHz)	Pulse width (ms)	Observation time (s)	Hopping Numbers in Observation time (ms)	Dwell Time (s)	Limit (s)
914.9	289.553	20	1	0.290	0.400
Note: Observation time= 20s					

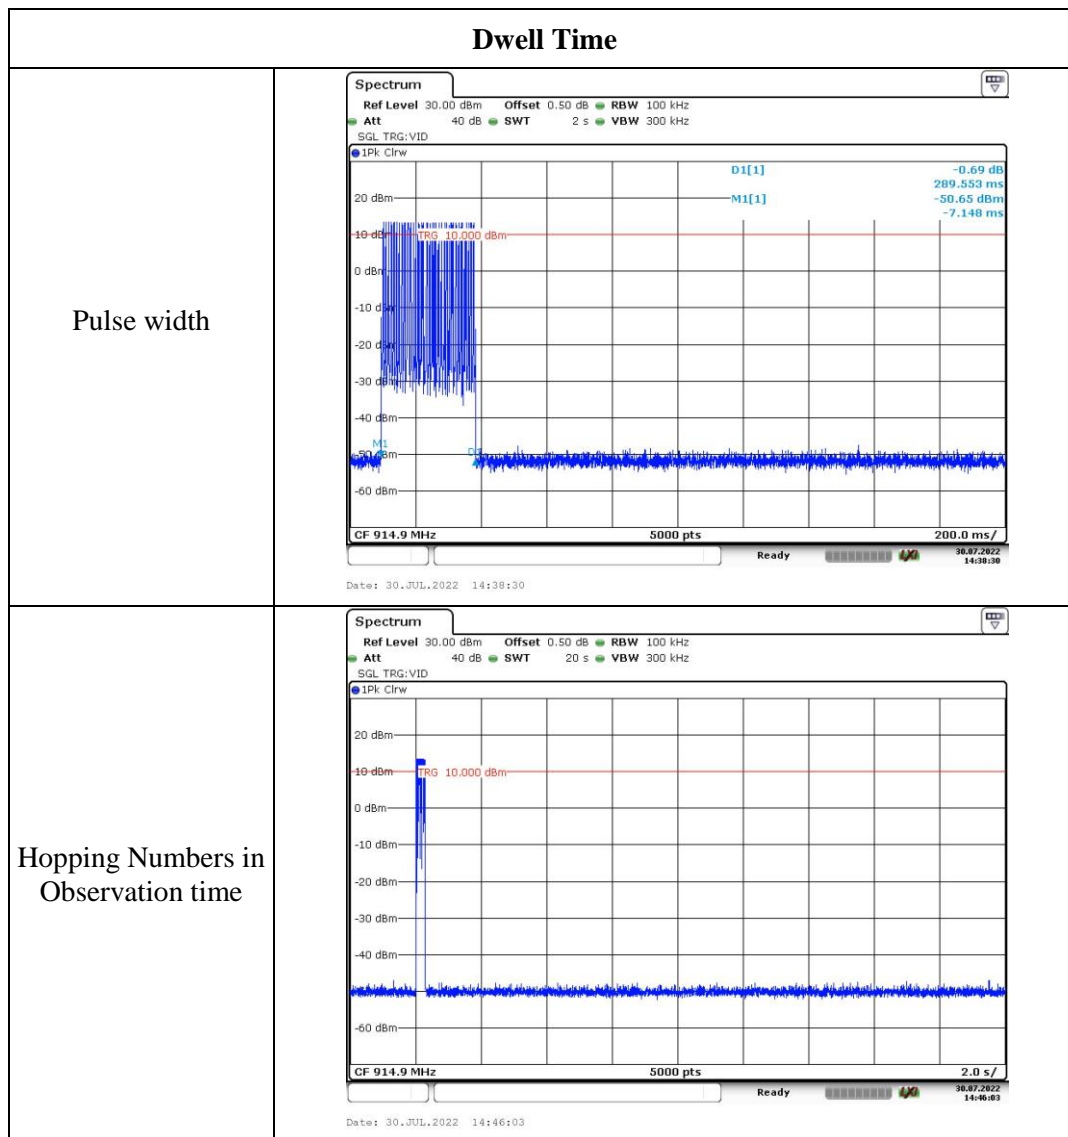

4.7 Peak Conducted Output Power:

Serial Number:	CR21120010-RF-S1	Test Date:	2022-07-29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.4	Relative Humidity: (%)	42	ATM Pressure: (kPa)	100.6
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Channel	Test Frequency (MHz)	Peak Conducted Output Power (dBm)	Limits (dBm)
Lowest	902.3	11.90	30
Middle	914.9	13.66	30
Highest	926.0	13.51	30

4.8 100 kHz Bandwidth of Frequency Band Edge:

Serial Number:	CR21120010-RF-S1	Test Date:	2022-07-29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	26.4	Relative Humidity: (%)	42	ATM Pressure: (kPa)	100.6
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	2021-08-08	2022-08-07

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Hopping mode


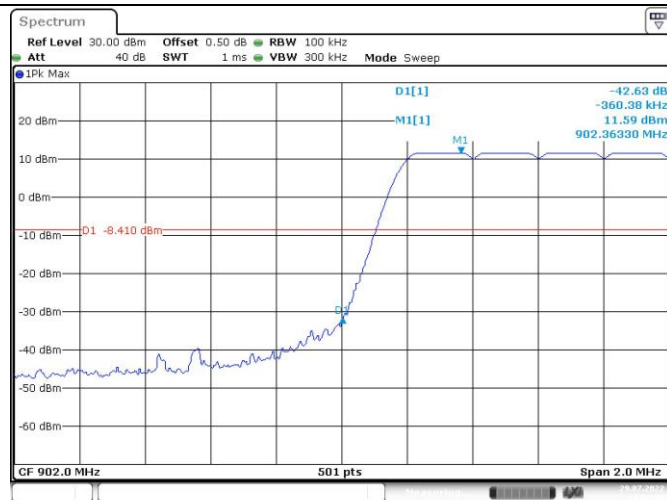
Band Edge,
Left Side

Date: 29, JUL, 2022 14:02:04

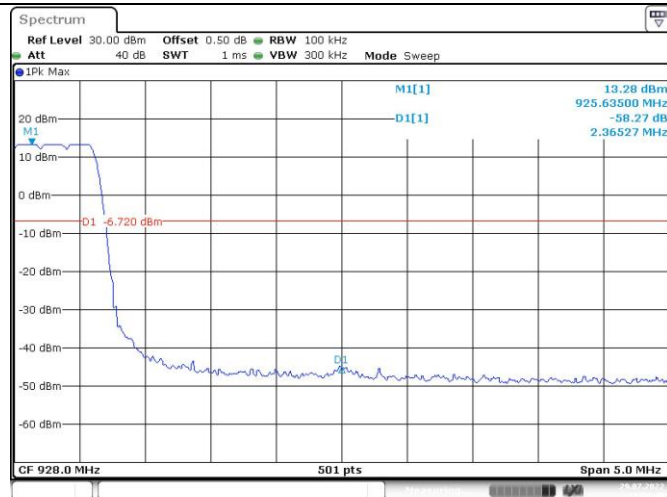Band Edge,
Right Side

Date: 29, JUL, 2022 13:59:46

Singer mode

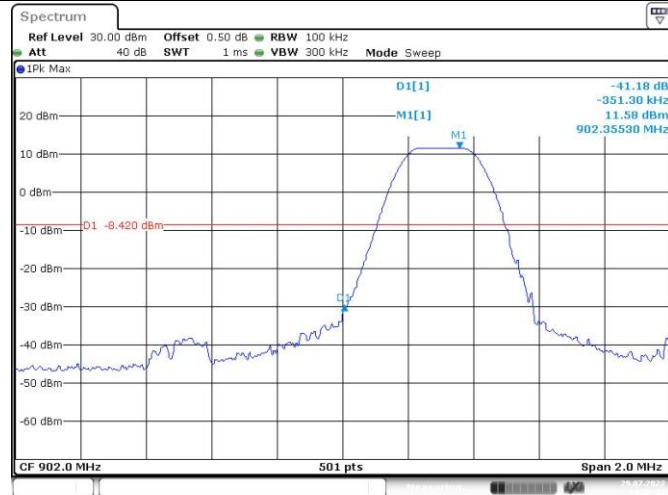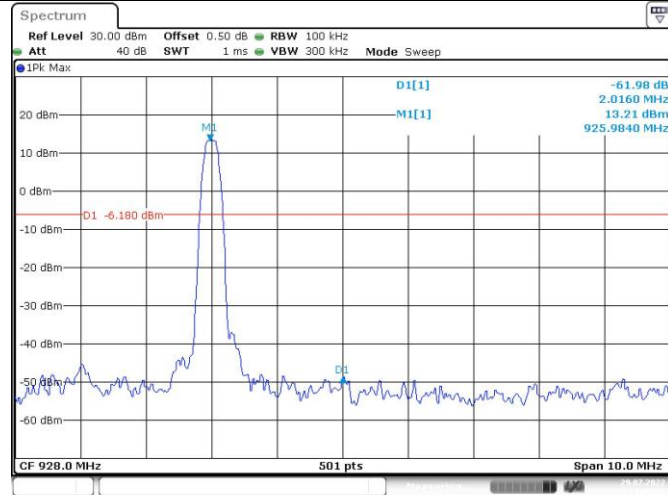Band Edge,
Left SideBand Edge,
Right Side

5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

FCC §15.247 (i)

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

5.2 Procedure

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

5.3 Measurement Result

Radio	Frequency (MHz)	$\lambda/2\pi$ (mm)	Distance (mm)	Exemption ERP (mW)	Maximum ERP including Tune-up Tolerance		MPE-Based Exemption
					(dBm)	(mW)	
Lora- FHSS	902.3-926	52.92	200	462	14	25.12	Compliant
Lora- DTS	903-926.3	52.88	200	462	17	50.12	Compliant

Result: The device compliant the MPE-Based Exemption at 20cm distances.

******* END OF REPORT *******