


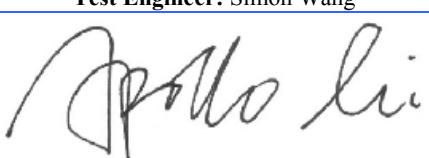
FCC TEST REPORT

Under :
FCC Part 15, Class B

Prepared For :
**YEALINK (XIAMEN) NETWORK TECHNOLOGY
CO., LTD.**

4th-5th Floor, South Building, No.63 Wanghai Road, 2nd Software Park XiaMen, 361008 China

FCC ID: T2C-T19PE2
EUT: IP Phone
Model: T19P E2

June 5, 2015 Issue Date:
Original Report Report Type:
 Test Engineer: Simon Wang
 Review By: Apollo Liu / Manager

The test report consists 26 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Ke Mei Ou Laboratory Corporation. The test result in the report only applied to the tested sample.

TABLE OF CONTENTS

1. General Information	3
1. 1 Notes	3
1. 2 Testing Laboratory	3
1. 3 Details of Applicant	3
1. 4 Application Details	3
1. 5 Test Item	3
1. 6 Test Standards	3
2. Technical Test	4
2. 1 Summary of Test Results	4
3. EUT Modifications	4
4. Conducted Power Line Test.....	5
4. 1 Test Equipment	5
4. 2 Test Procedure	5
4. 3 Test Setup	5
4. 4 Configuration of The EUT.....	6
4. 5 EUT Operating Condition.....	6
4. 6 Conducted Power Line Emission Limits	6
4. 7 Conducted Power Line Test Result.....	7
5. Radiated Emission Test.....	10
5. 1 Test Equipment	10
5. 2 Test Procedure	10
5. 3 Radiated Test Setup	10
5. 4 Configuration of The EUT.....	11
5. 5 EUT Operating Condition.....	11
5. 6 Radiated Emission Limit	11
5. 7 Radiated Emission Test Result.....	12
6. Photo of Testing.....	16
6.1 Emission test view.....	16
6.2 Photograph - EUT.....	18
7. FCC ID Label.....	25
8. Test Equipment.....	26

2. Technical Test

2.1 Summary of Test Results

The EUT has been tested according to the following specifications:

FCC 15 Subpart B: 2007, Class B

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107	Conducted Test	PASS	Complies
FCC Part 15, Paragraph 15.109	Radiated Test	PASS	Complies

3. EUT Modifications

No modification by test lab.

4. Conducted Power Line Test


4.1 Test Equipment

Please refer to Section 8 this report.

4.2 Test Procedure

The EUT was tested according to ANSI C63.4 - 2003. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm / 50 u-Henry as specified by section 5.1 OF ANSI C63.4 - 2003. cables and peripherals were moved to find the maximum emission levels for each frequency.

4.3 Test Setup

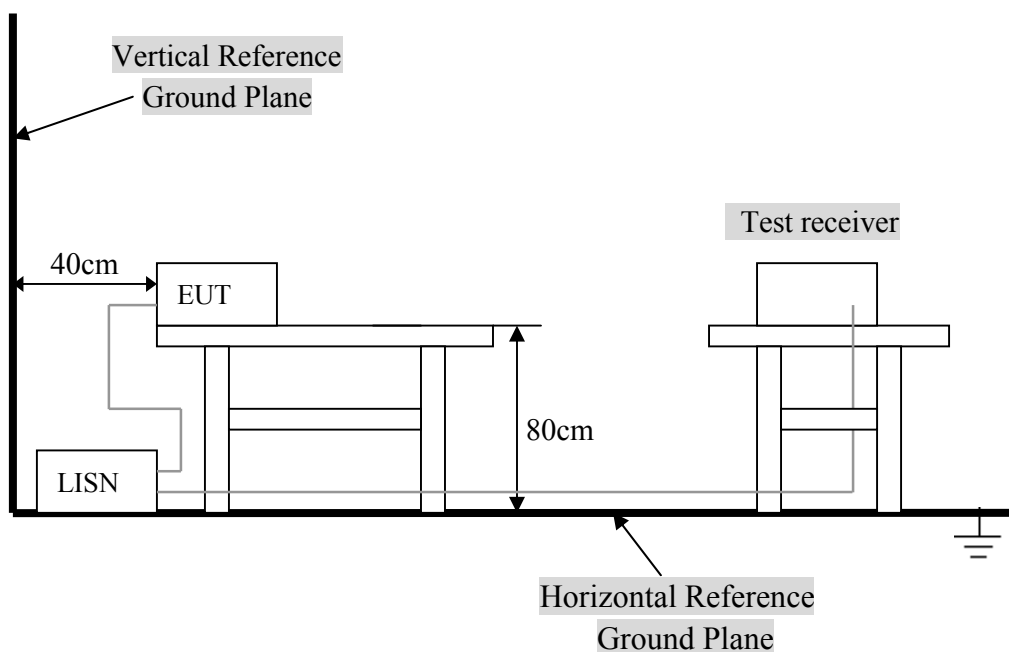

For the actual test configuration, Please refer to the related items – Photos of Testing.

4.4 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model #	FCC ID
IP Phone	Same as applicant	SIP-T19P E2	T2C-T19PE2

B. Internal Devices


Device	Manufacturer	Model #	FCCID / DoC
N/A			

C. Peripherals

Device	Manufacturer	Model # Serial #	FCC ID/ DoC	Cable
Printer	HP	HP930C	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Modem	GVC	N/A	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Notebook	DELL	PP10L	DoC	1.5m unshielded power cord
PC	Dell	2400n	DoC	1.5m unshielded power cord

4.5 EUT Operating Condition

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

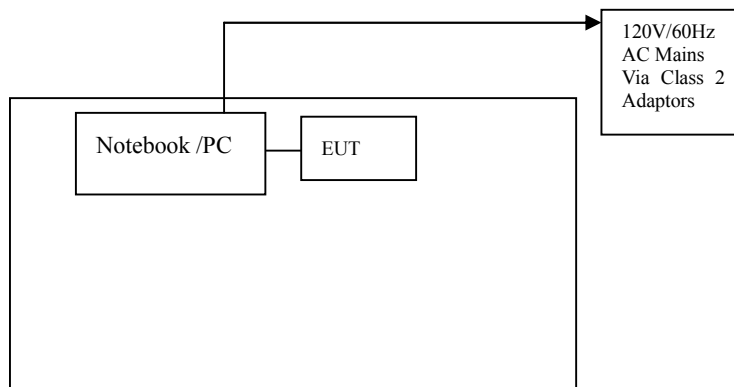

4.6 Conducted Power Line Emission Limits

Frequency Range (MHz)	Class A QP/AV (dBuV)	Class B QP/AV (dBuV)
0.15 – 0.5	79/66	66 –56/56 –46
0.5 – 5.0	73/60	56/46
5.0 – 30	73/60	60/50

Note: In the above table, the tighter limit applies at the band edges.

4. 7 Conducted Power Line Test Result

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 KHz.

- Temperature : 26 °C
- Humidity : 53 % RH
- Result : **PASSED**

Power Adapter Model: OH-1006B0500600U-UL

EN55022 Class B							
Frequency (MHz)	Emission (dBuV)		LINE/NEUTRAL	Limit (dBuV)		Margin (dB)	
	QP	AV		QP	AV	QP	AV
0.346	45.16	36.34	Line	59.06	49.06	-13.90	-12.72
0.346	44.38	39.07	Neutral	59.06	49.06	-14.68	-9.99
11.258	44.48	30.86	Line	60.00	50.00	-15.52	-19.14
11.246	39.87	34.34	Neutral	60.00	50.00	-20.13	-15.66
12.678	43.26	38.47	Line	60.00	50.00	-16.74	-11.53
12.658	40.72	34.65	Neutral	60.00	50.00	-19.28	-15.35

Note: NF = No Significant Peak was Found.

Power Adapter Model: YLPS050600A-US

FCC 15.107 Class B							
Frequency (MHz)	Emission (dBuV)		LINE/NEUTRAL	Limit (dBuV)		Margin (dB)	
	QP	AV		QP	AV	QP	AV
0.162	41.46	30.64	Line	65.36	55.36	-23.90	-24.72
0.162	40.36	30.27	Neutral	65.36	55.36	-25.00	-25.09
1.070	42.54	29.48	Line	56.00	46.00	-13.46	-16.52
0.178	36.68	28.67	Neutral	64.58	54.58	-27.90	-25.91
1.146	35.76	26.58	Line	56.00	46.00	-20.24	-19.42
1.094	38.19	27.52	Neutral	56.00	46.00	-17.81	-18.48

Note: NF = No Significant Peak was Found.

POE

EN55022 Class B							
Frequency (MHz)	Emission (dBuV)		LINE/NEUTRAL	Limit (dBuV)		Margin (dB)	
	QP	AV		QP	AV	QP	AV
0.174	44.72	34.95	Line	64.77	54.77	-20.05	-19.82
0.158	44.67	34.14	Neutral	65.57	55.57	-20.90	-21.43
0.606	44.69	43.10	Line	56.00	46.00	-11.31	-2.90
12.674	45.24	40.65	Neutral	60.00	50.00	-14.76	-9.35
16.230	45.14	39.84	Line	60.00	50.00	-14.86	-10.16
16.902	42.83	37.65	Neutral	60.00	50.00	-17.17	-12.35

Note: NF = No Significant Peak was Found

Remarks :

- 1.Uncertainty in conducted emission measured is <+/-2dB.
- 2.QP and AV are abbreviations of quasi-peak and average individually.
- 3.The emission levels of other frequencies were very low against the limit.
- 4.The Quasi-peak emission level also meets average limit and measurement with the average detector is unnecessary.
- 5.Margin Value= Emission Level – Limit Value

Conducted Emission**FCC15B**

EUT: IP Phone

M/N: T19P E2

Manufacturer: Same as applicant


Operating Condition: Normal

Test Site: Normal


Operator:

Test Specification: LINE&NEUTRAL

Comment:

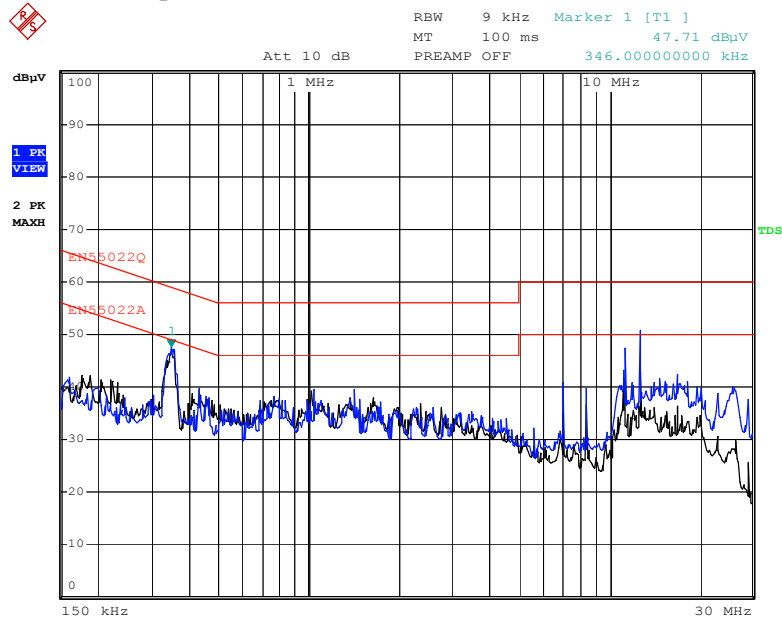
Power Adapter Model: OH-1006B0500600U-UL

Date: 19.MAY.2015 11:05:34

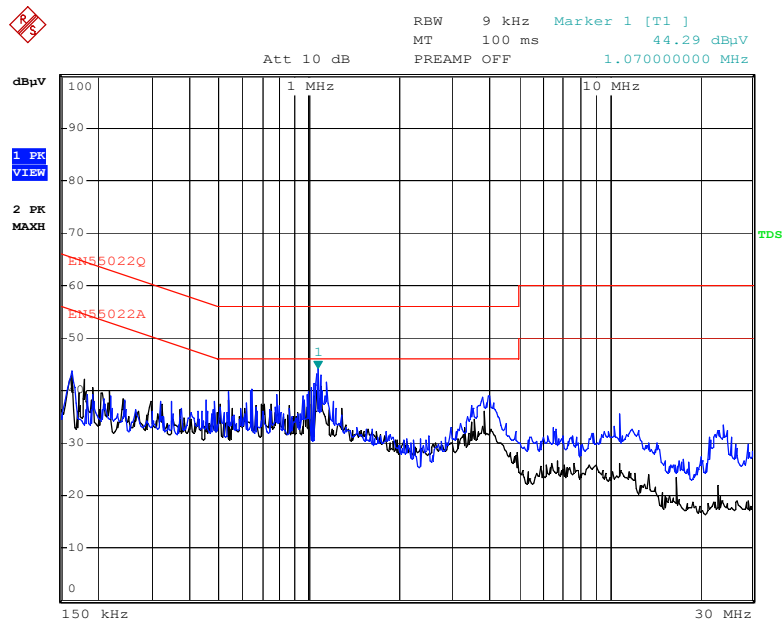Power Adapter Model: YLPS050600A-US

Date: 3.JUN.2015 14:42:04

POE

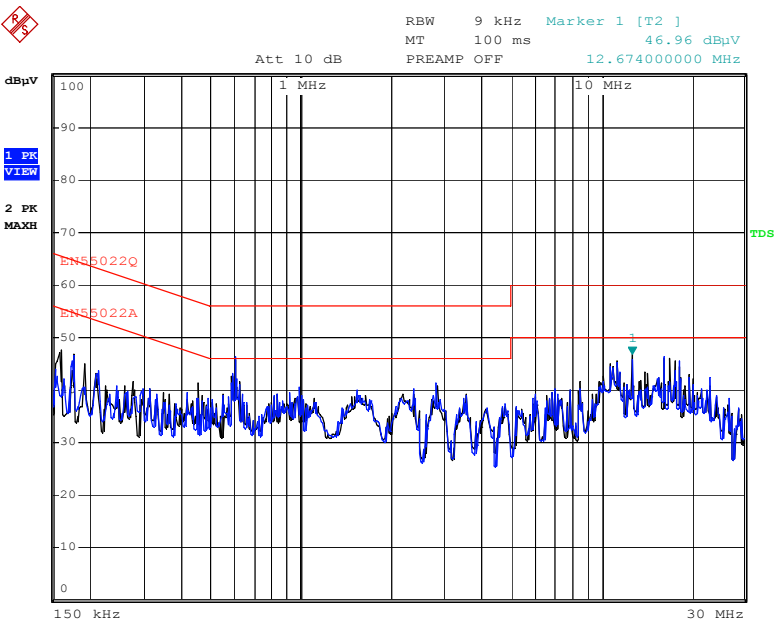

Date: 22.MAY.2015 10:05:22

5. Radiated Emission Test

5.1 Test Equipment


Please refer to Section 8 this report.

5.2 Test Procedure


1. The EUT was tested according to ANSI C63.4 - 2003.
2. The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
3. The frequency spectrum from 9 kHz to 25 GHz was investigated. All readings from 9 kHz to 150 kHz are quasi-peak values with a resolution bandwidth of 200 Hz. All readings from 150 kHz to 30 MHz are quasi-peak values with a resolution bandwidth of 9 KHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz , peak values with a resolution bandwidth of 1 MHz . Measurements were made at 3 meters.
4. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. The Receiving antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency. Emissions below 30MHz were measured with a loop antenna while emission above 30MHz were measured using a broadband E-field antenna.
5. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4 - 2003.

5.3 Radiated Test Setup

For Frequencies below 30 MHz

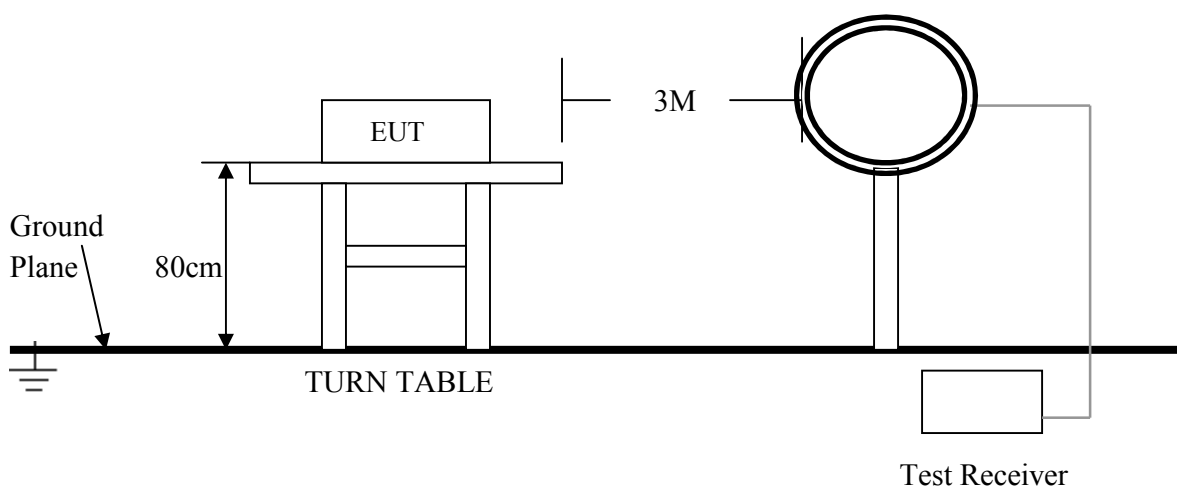

For the actual test configuration , please refer to the related items – Photos of Testing

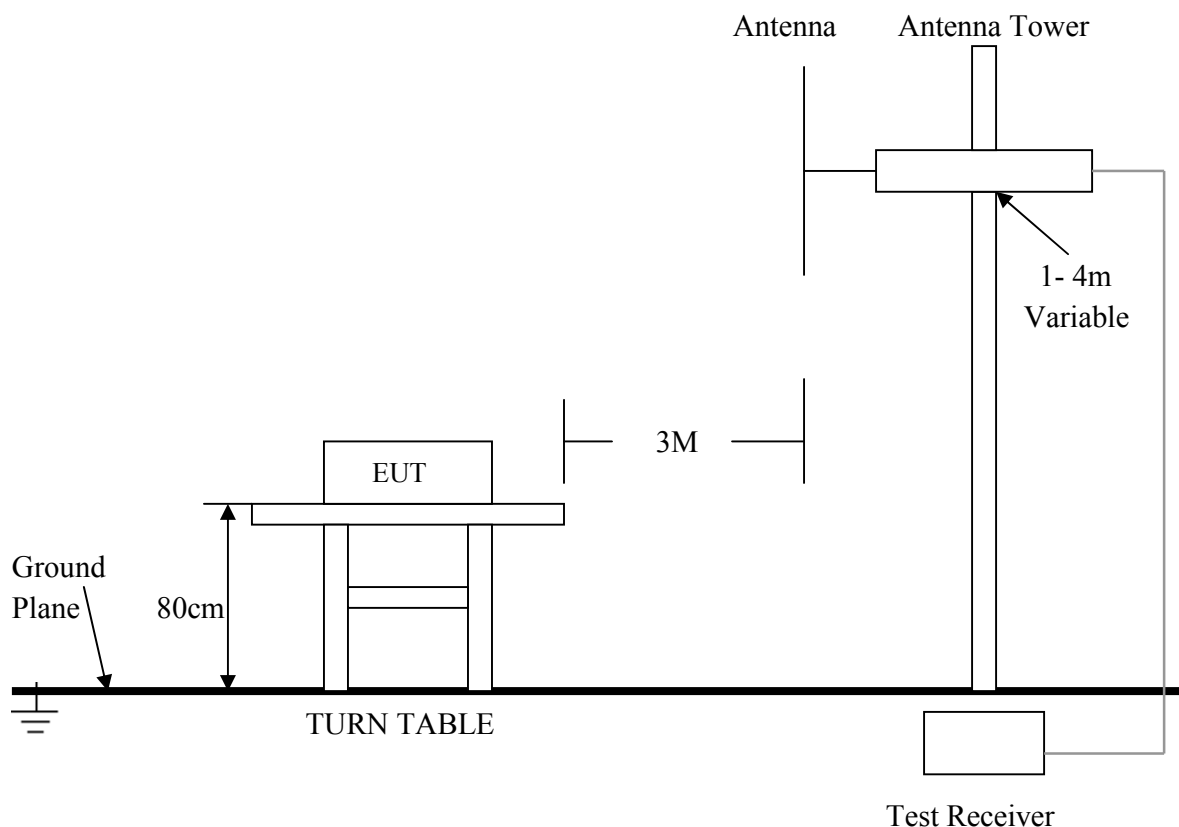For Frequencies above 30 MHz

For the actual test configuration , please refer to the related items – Photos of Testing

5. 4 Configuration of The EUT

Same as section 4.4 of this report

5. 5 EUT Operating Condition

Same as section 4.5 of this report

5. 6 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.109.

Frequency (MHz)	Distance (m)	Field Strength (dBuV/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
Above 960	3	54.0

Note:

1. In the emission tables above, the tighter limit applies at the band edges.
2. Distance refers to the distance between measuring instrument, antenna, and the closest point of any part of the device or system.
3. The lower limit shall apply at the transition frequencies.

5.7 Radiated Emission Test Result

The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.

- Temperature : 25 °C
- Humidity : 46 %RH
- Result : **PASSED**

For Frequency Below 30MHz

Power Adapter Model:

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
N/A	N/A			

- Note:**
- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
 - (2) "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
 - (3) Emission Level = Reading Level + Probe Factor + Cable Loss.

For Frequency Above 30MHz

Power Adapter Model: OH-1006B0500600U-UL

FCC15 Class B				
Freq. (MHz)	Emission (dBuV/m)	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
250.000	44.82	Horiz./	46.0	-1.18
250.000	36.36	Vert.	46.0	-9.64
266.720	43.25	Horiz./	46.0	-2.75
400.000	38.82	Vert.	46.0	-7.18
350.000	41.16	Horiz./	46.0	-4.84
450.000	36.74	Vert.	46.0	-9.26

Note: NF = No Significant Peak was Found.

Power Adapter Model: YLPS050600A-US

FCC 15.109 Class B				
Freq. (MHz)	Emission (dBuV/m)	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
200.000	36.69	Horiz./	43.5	-6.81
200.000	36.59	Vert.	43.5	-6.91
250.000	43.57	Horiz./	46.0	-2.43
250.000	44.20	Vert.	46.0	-1.80
300.000	40.19	Horiz./	46.0	-5.81
266.000	43.95	Vert.	46.0	-2.05

Note: NF = No Significant Peak was Found.

POE

FCC15 Class B				
Freq. (MHz)	Emission (dBuV/m)	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
250.000	43.96	Horiz./	46.0	-2.04
250.000	33.87	Vert.	46.0	-12.13
266.680	45.03	Horiz./	46.0	-0.97
266.680	39.58	Vert.	46.0	-6.42
350.000	39.08	Horiz./	46.0	-6.92
450.000	35.28	Vert.	46.0	-10.72

Note: NF = No Significant Peak was Found.

For Frequency Above 1GHz**Power Adapter Model: MODEL:OH-1006B0500600U-UL**

FCC15 Class B							
Frequency (GHz)	Emission (dBuV)		Telecom Ports	Limit (dBuV)		Margin (dB)	
	PK	AV		PK	AV	PK	AV
1.3268	49.85	-	Horiz./	74	54	-24.15	-
1.5924	46.85	-	Vert.	74	54	-27.15	-
1.5952	52.30	-	Horiz./	74	54	-21.70	-
2.358	50.83	-	Vert.	74	54	-23.17	-
2.8136	49.54	-	Horiz./	74	54	-24.46	-
2.9268	49.26	-	Vert.	74	54	-24.74	-

Note: NF = No Significant Peak was Found.

- Note:**
- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
 - (2) "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
 - (3) Emission Level = Reading Level + Probe Factor + Cable Loss.

Radiated Emission**FCC15B**

EUT: IP Phone

M/N: T19P E2

Manufacturer: Same as applicant


Operating Condition: Normal

Test Site: Normal


Operator:

Test Specification:

Comment: Above 30MHz

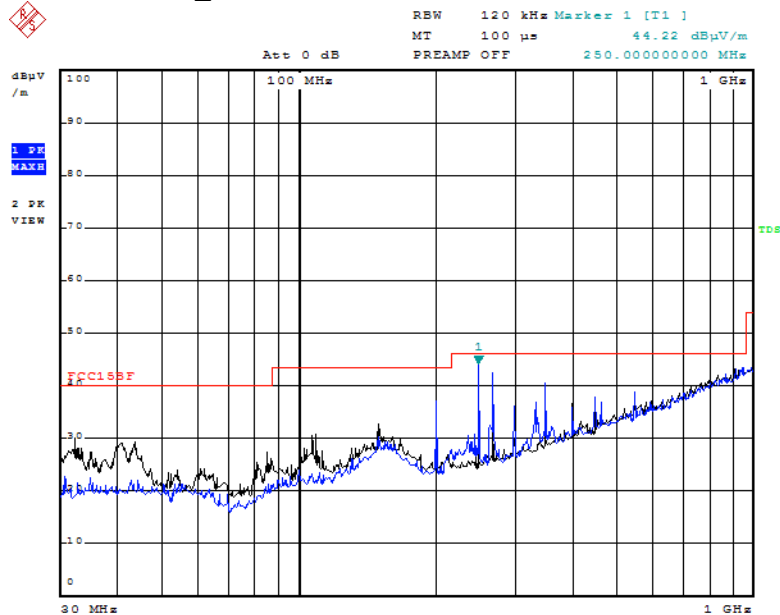Power Adapter_Model: OH-1006B0500600U-UL

Date: 27.MAY.2015 17:56:12

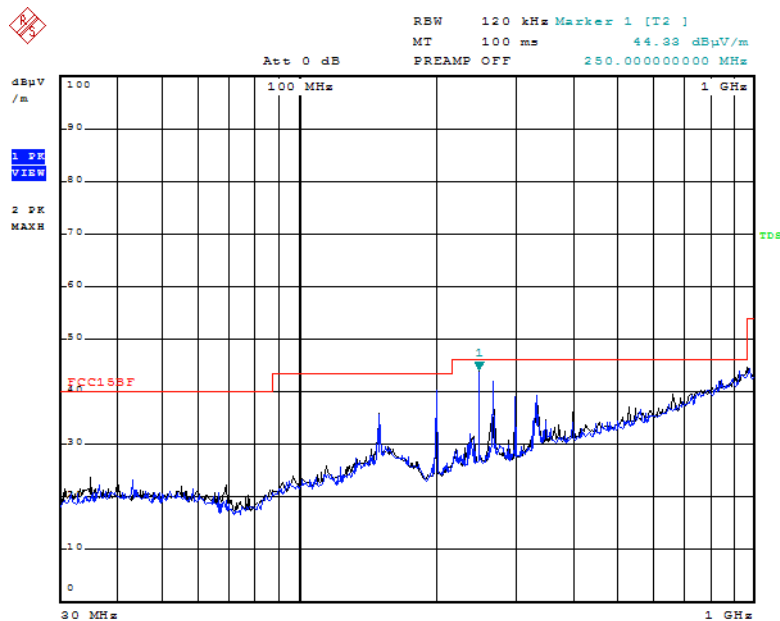Power Adapter Model: YLPS050600A-US

Date: 3.JUN.2015 15:18:39


POE



Date: 28.MAY.2015 11:05:42

Comment: Above 1GHz

Power Adapter Model: OH-1006B0500600U-UL

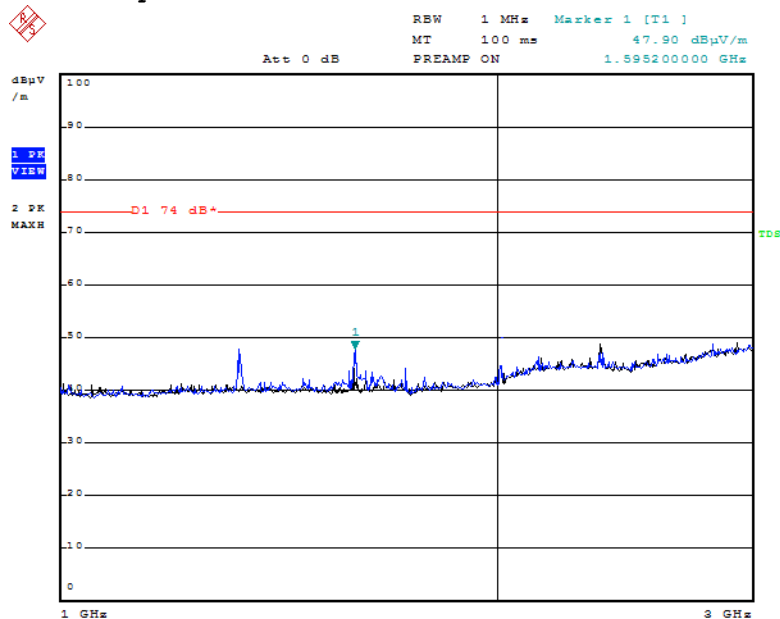

Date: 22.MAY.2015 11:18:06

6. Photo of Testing

6.1 Emission test view

Conducted emission test view –Power Port



Radiated emission test view (30MHz~1GHz)



Radiated emission test view (1GHz Above)



6.2 Photograph - EUT

EUT top view






EUT bottom view







EUT inside whole view

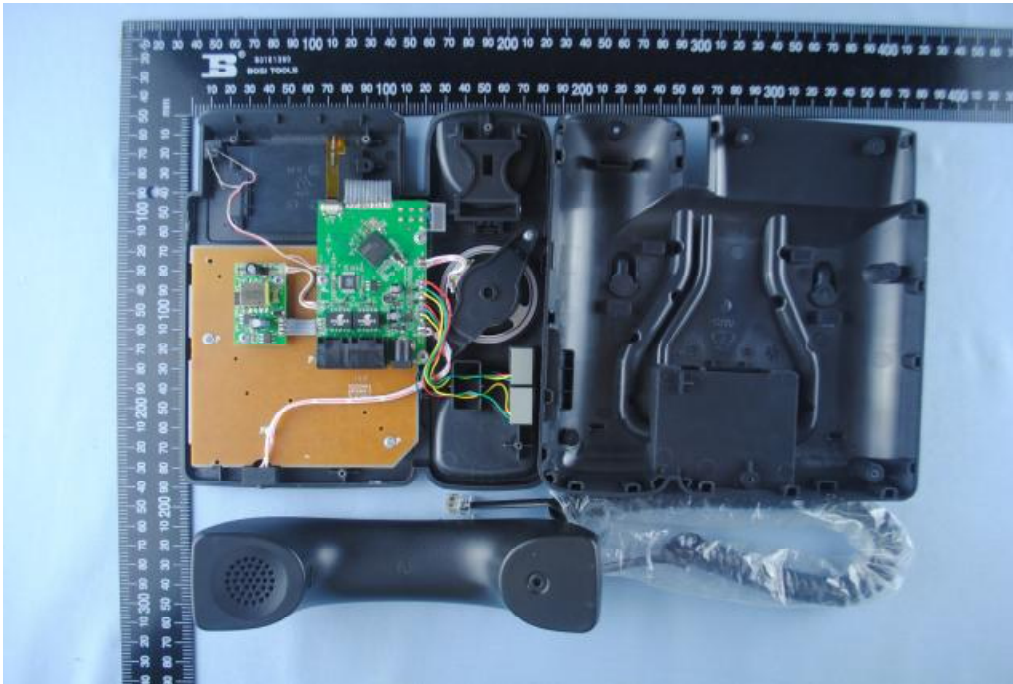

Main board component side

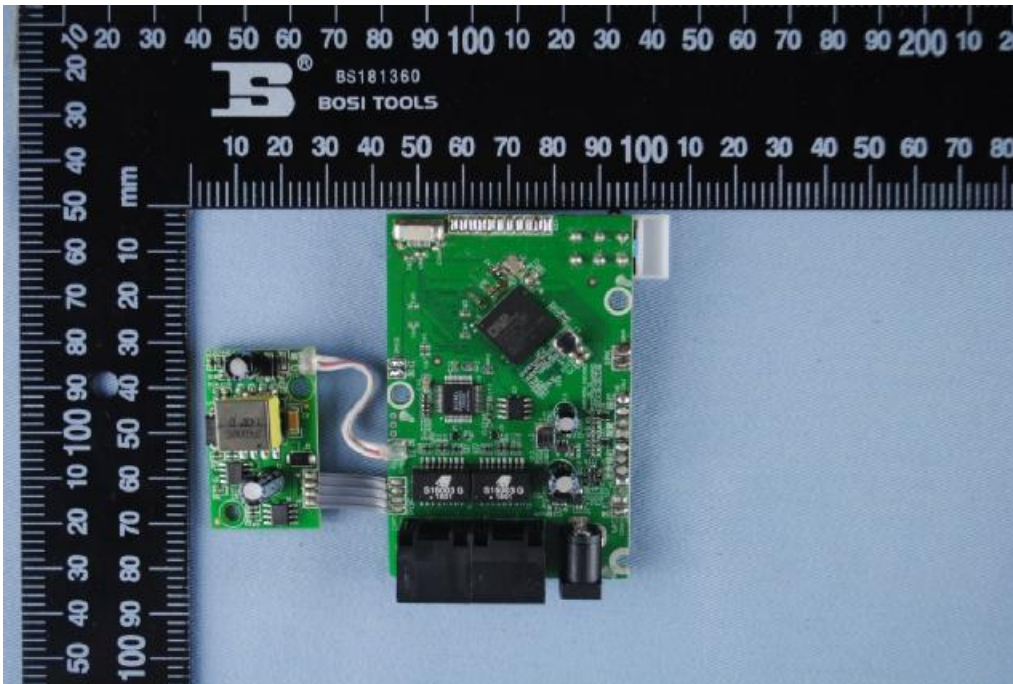

Main board solder side

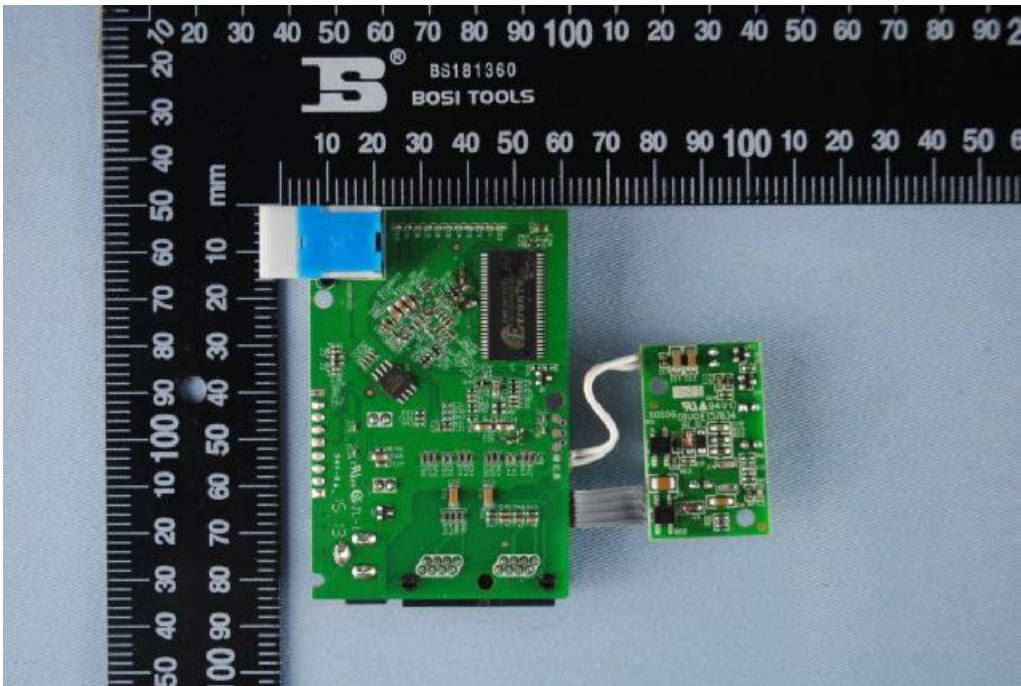

Adapter top view (Model: OH-1006B0500600U-UL)



Adapter side view (Model: OH-1006B0500600U-UL)




Adapter top view (Model: YLPS050600A-US)



Adapter side view (Model: YLPS050600A-US)



7. FCC ID Label

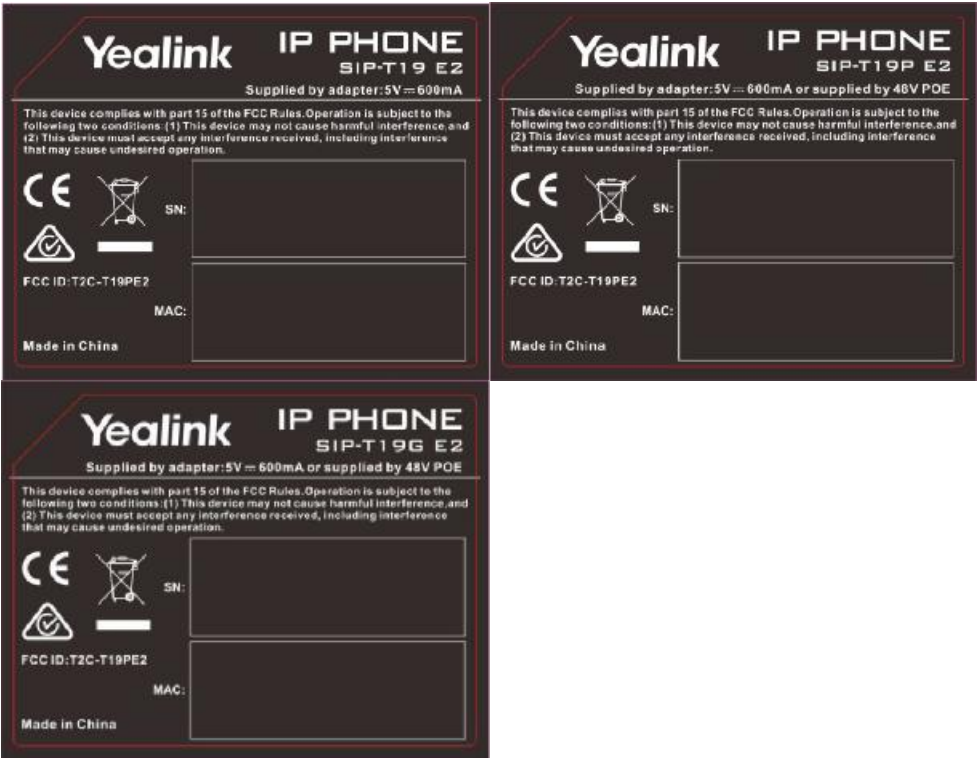

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper label. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT



8. Test Equipment

The following test equipments were used during the radiated & conducted emission test:

Equipment/ Facilities	Manufacturer	Model #	Serial No.	Due Date
Turntable	Innco systems GmbH	CT-0801	KMO-SZ114	NCR
Antenna Tower	Innco systems GmbH	MM4000-PP	KMO-SZ115	NCR
Controller	Innco systems GmbH	CO2000	KMO-SZ116	NCR
Pre-Amplifier	Agilent	87405C	KMO-SZ155	Dec.6, 2015
Pre-Amplifier	Com-Power	PAM-840	KMO-SZ156	Dec.6, 2015
Horn Antenna	Com-Power	AH-840	KMO-SZ157	Dec.6, 2015
EMI Test Receiver	Rohde & Schwarz	ESPI7	KMO-SZ002	June 27, 2015
Spectrum Analyzer	Rohde & Schwarz	FSP40	KMO-SZ003	June 27, 2015
Signal Generator	FLUKE	PM5418+Y/C	KMO-SZ020	May 27, 2016
Loop Antenna	Rohde & Schwarz	HFH2-Z2	KMO-SZ004	Jan. 30, 2016
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	KMO-SZ005	Sep.18, 2015
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	KMO-SZ006	Sep.18, 2015
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	KMO-SZ007	Sep.18, 2015
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	KMO-SZ008	Sep.18, 2015
AMN	Rohde & Schwarz	ESH3-Z5	KMO-SZ009	June 27, 2015
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	KMO-SZ077	Nov.29, 2015
ISN	SCHWARZBECK	NTFM 8158 CAT3	KMO-SZ070	Nov.19, 2015
ISN	SCHWARZBECK	NTFM 8158 CAT5	KMO-SZ071	Nov.19, 2015
ISN	SCHWARZBECK	NTFM 8158 CAT6	KMO-SZ072	Nov.19, 2015
KMO Shielded Room	KMO	KMO-001	KMO-SZ036	NCR
Coaxial Cable with N-Connectors	SCHWARZBECK	AK9515H	KMO-SZ037	Sep.18, 2015
AC Power Source / Analyzer	Agilent	6813B	KMO-SZ166	July 22, 2015
Digital Radio Communication Tester	Rohde & Schwarz	CMD60	KMO-SZ169	April 10, 2016
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	KMO-SZ170	April 10, 2016
Program Control Telephone Exchanger	Excelltel	CDX8000-M	KMO-SZ221	NCR
3m Anechoic Chamber	KMO	KMO-3AC	KMO-3AC-1	Nov.12, 2016
Temperature Chamber	TABAI	PSL-4GTW	N/A	Feb.10, 2016