

承 认 书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTO 优仕威科技有限公司Shenzhen USV Technology Co., Ltd

客户料号 (CUSTOMER P/N) :

品名 (DESCRIPTION): P12手机线圈P12 Phone co DATE:2024/6/11

规格 (SPECIFICATION): G42.5开槽/0.65厚+0.08*72股/背胶 45长· REV.NO.:A0

鸿日昇威科技承认签核、盖章

部门	确认/日期	审核/日期	批准/日期	(盖公司公章)
品质	董晚红	吕惠	韦函满	
工程	何伟华	韦立红	韦立红	

备注:

优 仕 威 科 技 承 认 签 核、盖章

部门	确认/日期	审核/日期	批准/日期	(盖公司公章)
开发工程				
采购				
品质				

备注:

深圳市鸿日昇威科技有限公司

HRSW ELECTRONICS CO.,LTD


ADD: 深圳市龙华新区观澜环观中路48号1栋2楼

TEL: 15112254520 FAX: +86-0755-28015170


page: 1/2

SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

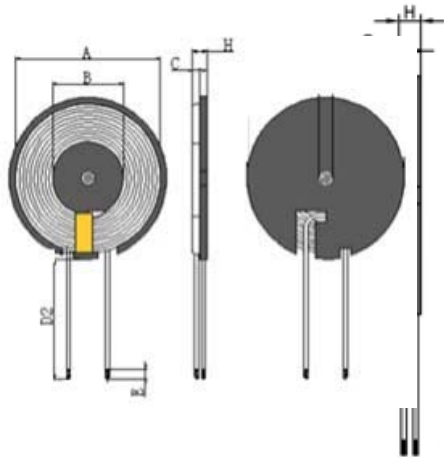

2. SCHEMATICS:



A	B	C	D2	E	H				I
42.5±0.6	20.5±0.5	0.65±0.05	45±3	4±2	1.85MAX	备注： 1两线入同一个槽。2. 加套管			

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	∅0.08*72 units	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR		TEMP	HI-POT
TEST	Coil and disk	S-F		25℃	
CON	100KHz, 0.25V	AT 25℃			
SPEC	6.5uH±10%	66mΩ Max		0-80℃	

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	0.08*72	0.08*72 units	NANJINGJINNINGCO,LTD	
2	Lead-free tin strip	Lead-free tin strip	QIAODO	
3	Diaphragm	∅42.5*0.65 mm-zn hard disk with L slot	TAIYI CO.,LTD	
4	Glue	Yellow GUM 9999	LIANCHENG CO.,LTD	
5	High temperature adhesive paper	8mm high temperature adhesive paper	CUDAK CO.,LTD	
6	Back Glue	∅41.8*0.1	CUDAK CO.,LTD	
7				

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G42.5开槽/0.65厚+0.08*72股/45长+套管
DRAWN BY		CHECKED BY	APPROVED BY
何伟华		韦立红	韦立红