



FCC RF Test Report

APPLICANT : TP-Link Technologies Co., Ltd.
EQUIPMENT : AC1750 Wireless Dual Band Gigabit Router
BRAND NAME : TP-Link
MODEL NAME : Archer C8
FCC ID : TE7C8V4
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Feb. 18, 2017 and testing was completed on May 16, 2017. We, Sporton International (ShenZhen) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) INC., the test report shall not be reproduced except in full.

Prepared by: Eric Shih / Manager

Approved by: Jones Tsai / Manager



SPORTON International (ShenZhen) INC.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan District, Shenzhen City,
Guangdong Province, China



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test.....	5
1.4	Product Specification of Equipment Under Test.....	6
1.5	Modification of EUT	6
1.6	Testing Location	7
1.7	Applicable Standards.....	7
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1	Carrier Frequency Channel	8
2.2	Test Mode	9
2.3	Connection Diagram of Test System.....	11
2.4	Support Unit used in test configuration and system	12
2.5	EUT Operation Test Setup	12
2.6	Measurement Results Explanation Example.....	13
3	TEST RESULT	14
3.1	26dB & 99% Occupied Bandwidth Measurement	14
3.2	Maximum Conducted Output Power Measurement	17
3.3	Power Spectral Density Measurement	19
3.4	Unwanted Radiated Emission Measurement	24
3.5	AC Conducted Emission Measurement.....	30
3.6	Frequency Stability Measurement	34
3.7	Automatically Discontinue Transmission	35
3.8	Antenna Requirements	36
4	LIST OF MEASURING EQUIPMENTS.....	38
5	UNCERTAINTY OF EVALUATION	39
APPENDIX A. CONDUCTED TEST RESULTS		
APPENDIX B. RADIATED SPURIOUS EMISSION		
APPENDIX C. DUTY CYCLE PLOTS		
APPENDIX D. SETUP PHOTOGRAPHS		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR721809B	Rev. 01	Initial issue of report	Jun. 12, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	FCC ≤ 24 dBm (depend on band)	Pass	-
3.3	15.407(a)	Power Spectral Density	FCC ≤ 11 dBm (depend on band)	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) 15.209(a)	Pass	Under limit 0.06 dB at 5149.500 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.36 dB at 0.150 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

TP-Link Technologies Co., Ltd.

Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd.,
Nanshan, Shenzhen, China

1.2 Manufacturer

TP-Link Technologies Co., Ltd.

Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd.,
Nanshan, Shenzhen, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	AC1750 Wireless Dual Band Gigabit Router
Brand Name	TP-Link
Model Name	Archer C8
FCC ID	TE7C8V4
EUT supports Radios application	WLAN2.4GHz 802.11b/g/n HT20/HT40 WLAN5GHz 802.11a/n HT20/HT40 WLAN5GHz 802.11ac VHT20/VHT40/VHT80
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification												
Tx/Rx Frequency Range		5180 MHz ~ 5240 MHz										
Maximum Output Power to Antenna <CDD Modes>		MIMO <Ant. 1+2+3> 802.11a : 24.08 dBm / 0.2559 W 802.11n HT20 : 24.09 dBm / 0.2564 W 802.11n HT40 : 25.06 dBm / 0.3206 W 802.11ac VHT20 : 24.03 dBm / 0.2529 W 802.11ac VHT40 : 24.99 dBm / 0.3155 W 802.11ac VHT80 : 17.85 dBm / 0.0610 W										
Maximum Output Power to Antenna <Beamforming Modes>		MIMO <Ant. 1+2+3> 802.11ac VHT20 : 23.88 dBm / 0.2443 W 802.11ac VHT40 : 24.85 dBm / 0.3055 W 802.11ac VHT80 : 16.53 dBm / 0.0450 W										
99% Occupied Bandwidth <CDD Modes>		<MIMO Ant. 1+2+3> 802.11a : 18.48 MHz 802.11n HT20 : 19.58 MHz 802.11n HT40 : 37.36 MHz 802.11ac VHT80 : 75.76 MHz										
99% Occupied Bandwidth <Beamforming Modes>		<MIMO Ant. 1+2+3> 802.11ac VHT20 : 19.78 MHz 802.11ac VHT40 : 38.06 MHz 802.11ac VHT80 : 75.52 MHz										
Antenna Type / Gain		Ant. 1 : Omni Antenna with gain 5.19 dBi Ant. 2 : Omni Antenna with gain 5.19 dBi Ant. 2 : Omni Antenna with gain 5.19 dBi Beamforming Gain: 9.96 dBi										
Type of Modulation		802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)										
Antenna Function Description		<table><tr><td></td><td>Ant. 1</td><td>Ant. 2</td><td>Ant. 3</td></tr><tr><td>802.11 a/n/ac MIMO</td><td>V</td><td>V</td><td>V</td></tr></table>				Ant. 1	Ant. 2	Ant. 3	802.11 a/n/ac MIMO	V	V	V
	Ant. 1	Ant. 2	Ant. 3									
802.11 a/n/ac MIMO	V	V	V									

Note:

1. MIMO Ant. 1+2+3 is a calculated result from sum of the power MIMO Ant. 1, MIMO Ant. 2 and MIMO Ant. 3.
2. Only 11ac support TX beamforming.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON International (ShenZhen) INC.	
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan District, Shenzhen City, Guangdong Province, China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	CO01-SZ

Test Site	SPORTON International (ShenZhen) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH03-SZ	565805

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC KDB 644545 D03 Guidance for IEEE 802.11ac New Rules v01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#" were 802.11ac VHT80.

2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

MIMO Antenna 1+2+3 for CDD

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

MIMO Antenna 1+2+3 for Beamforming

Modulation	Data Rate
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Remark: According to the power and RSE verified data, MIMO Antenna 1+2+3 is the worst case of Radiated spurious emission.

AC Conducted Emission	Mode 1 : LAN Link + WAN Link + WLAN Link (5G) + USB Link
--------------------------	--



Ch. #		Band I : 5180-5240 MHz
		802.11a
L	Low	36
M	Middle	44
H	High	48

Ch. #		Band I : 5180-5240 MHz
		802.11n HT20
L	Low	36
M	Middle	44
H	High	48

Ch. #		Band I : 5180-5240 MHz
		802.11n HT40
L	Low	38
M	Middle	-
H	High	46


Ch. #		Band I : 5180-5240 MHz
		802.11ac VHT20
L	Low	36
M	Middle	44
H	High	48

Ch. #		Band I : 5180-5240 MHz
		802.11ac VHT40
L	Low	38
M	Middle	-
H	High	46


Ch. #		Band I : 5180-5240 MHz
		802.11ac VHT80
L	Low	-
M	Middle	42
H	High	-

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

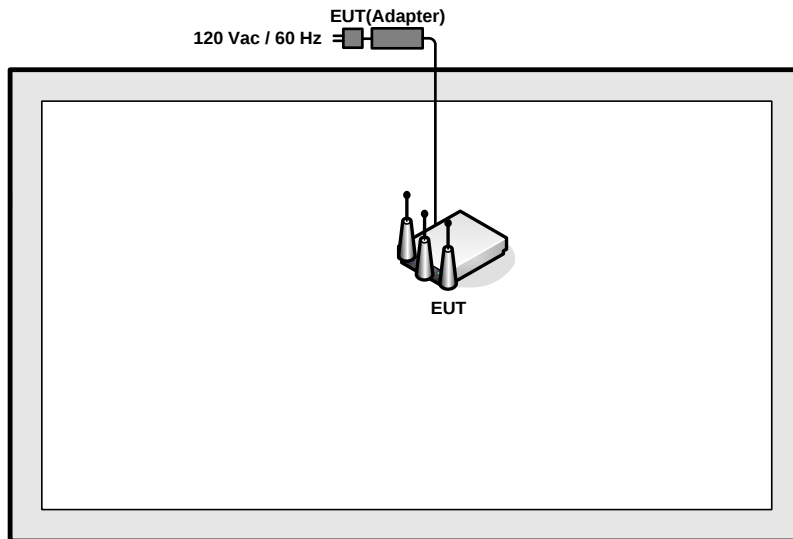

<AC Conducted Emission Mode>

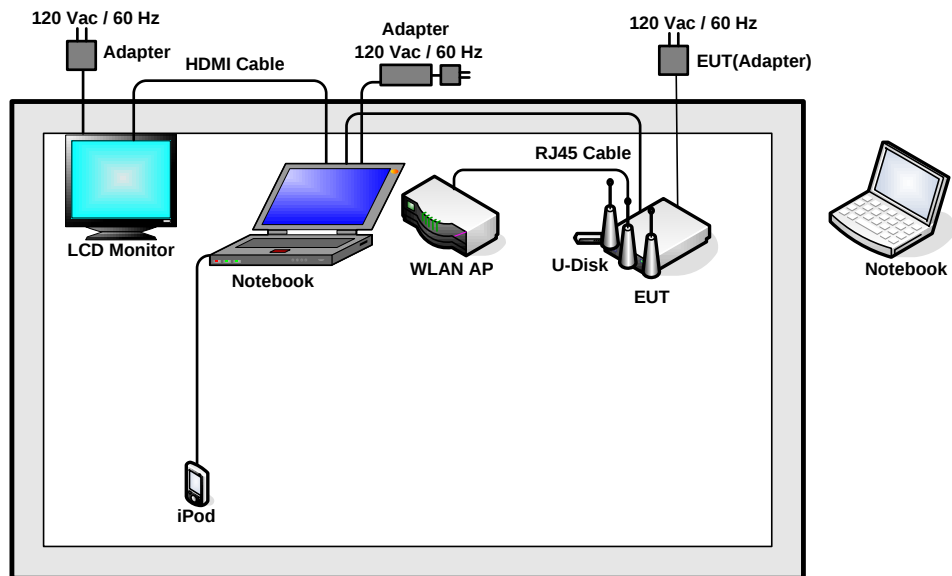



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	E450	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Monitor	Dell	P2715Qt	FCC DoC	N/A	Unshielded,1.8m
5.	U-Disk	Kingston	DT101 G2	FCC DoC	N/A	N/A
6.	iPod nano 8GB	Apple	MC690ZP/A	FCC DoC	Shielded, 1.2m	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.30 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 6.30 + 10 = 16.30 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement
as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set
1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.

3.1.4 Test Setup


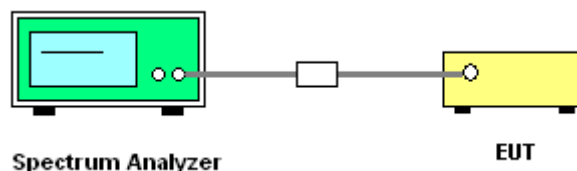




3.1.5 Test Result of 26dB & 99% Occupied Bandwidth Plots

Please refer to Appendix A.



<CDD Mode>

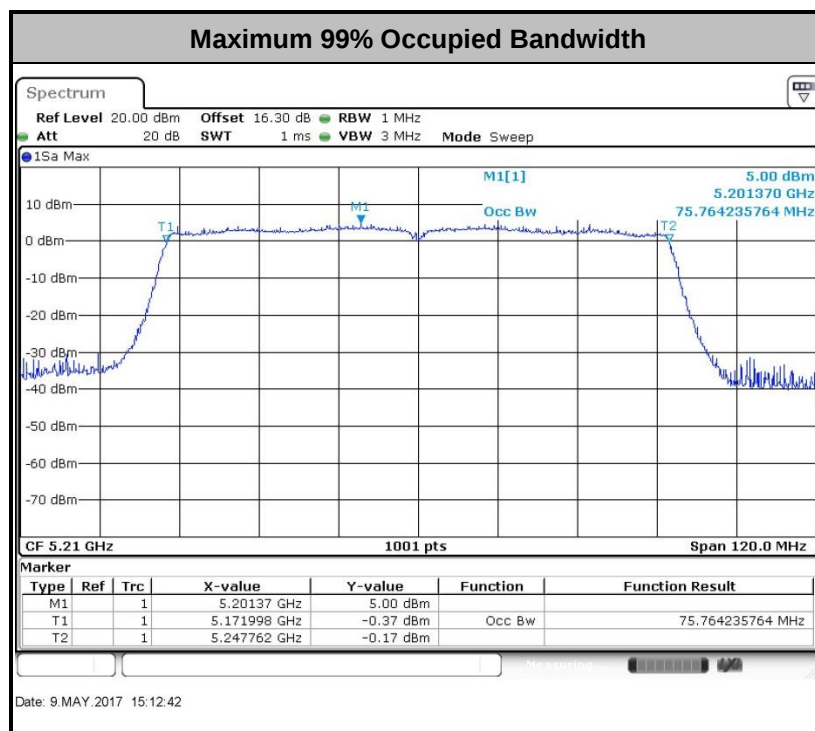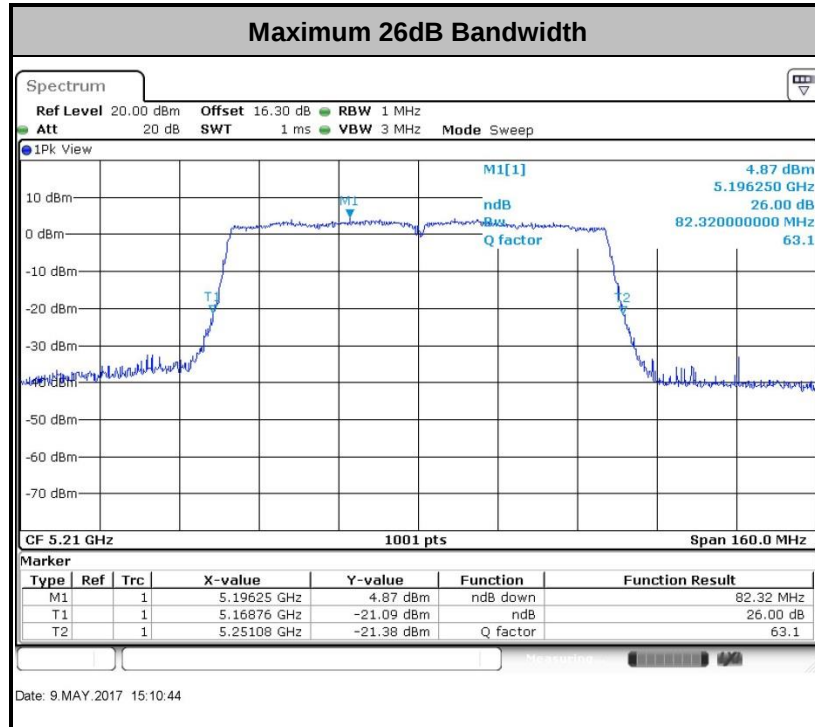

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<TXBF Mode>

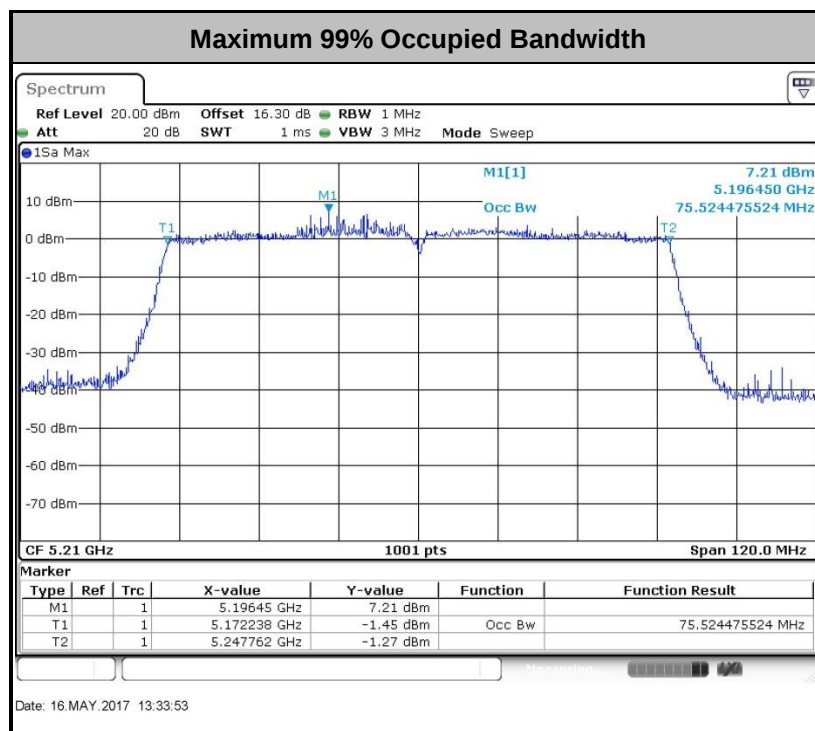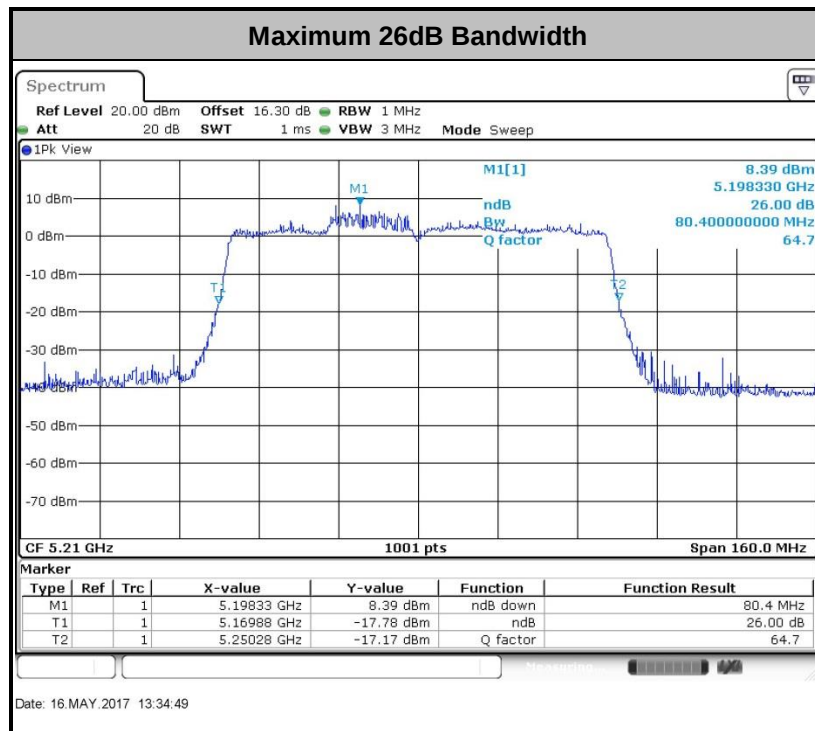

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

CDD modes

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04 for CDD modes.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

TXBF modes


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04 for TXBF modes.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

For normal channel:

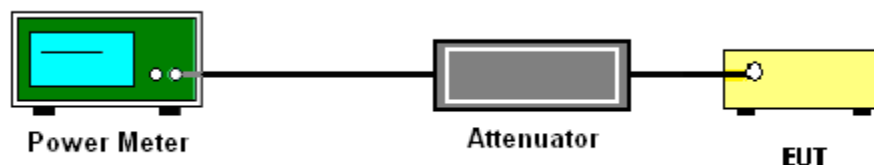

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15–5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Section F) Maximum power spectral density.

CDD modes

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

TXBF modes

Method SA-3

(power averaging (rms) detection with max hold):


- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time $\leq$ (number of points in sweep) $\times$ T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
- Detector = power averaging (rms).
- Trace mode = max hold.
- Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

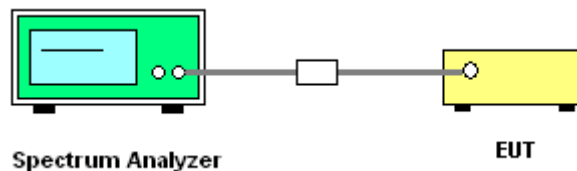




3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.


<CDD Mode>

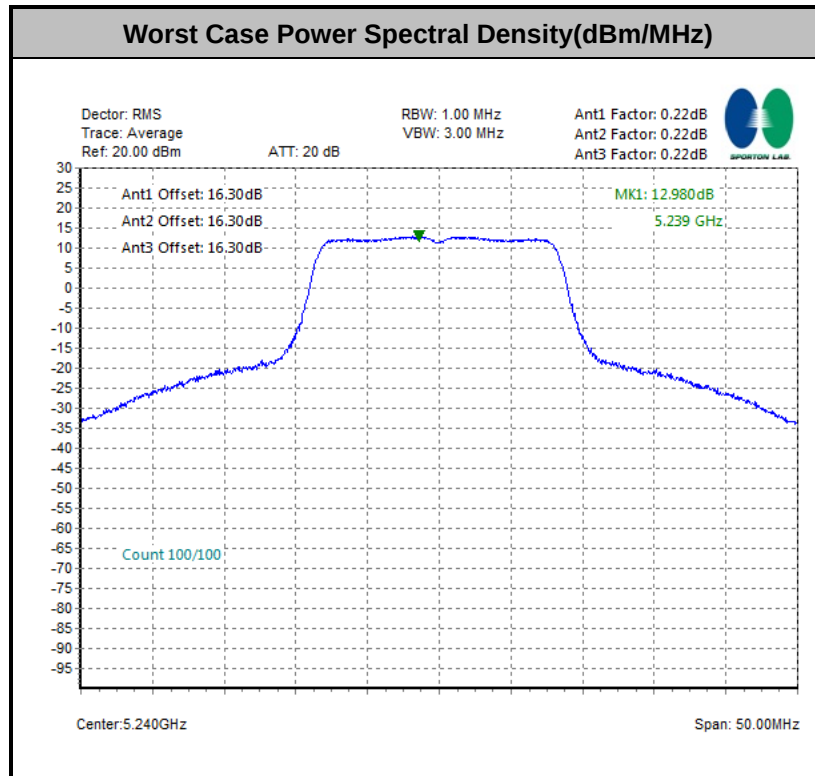

Note: Average Power Density (dB) = Measured value+ Duty Factor



<TXBF Mode>

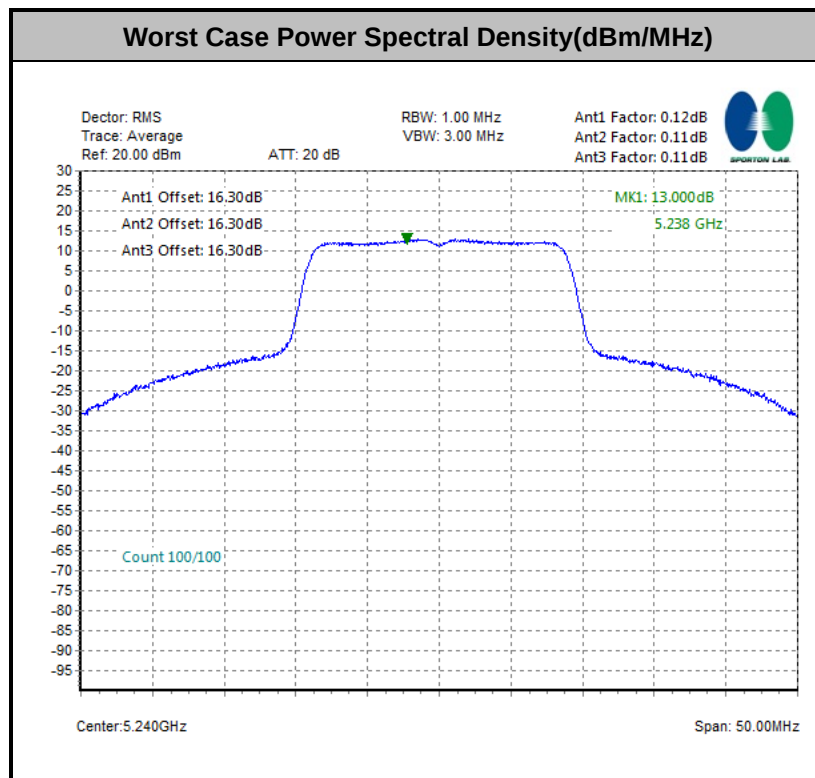

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Radiated Emission Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

(2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dB μ V/m)
- 27	68.3

(3) KDB789033 D01 v01r04 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

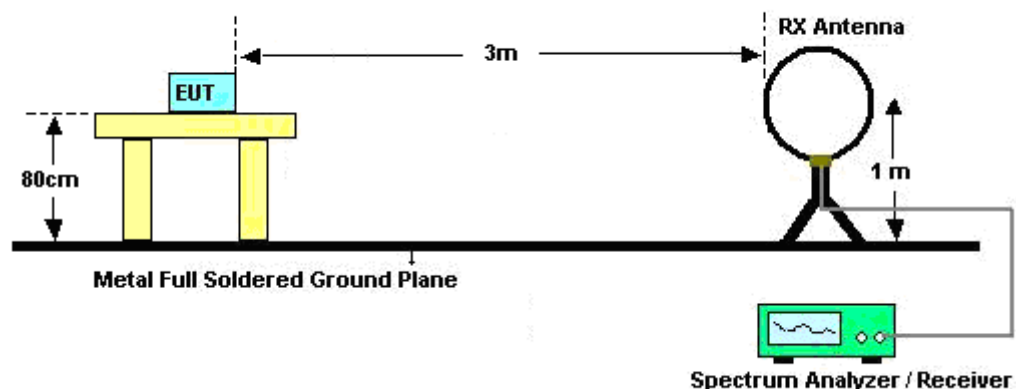

For radiated emissions from 30MHz to 1GHz

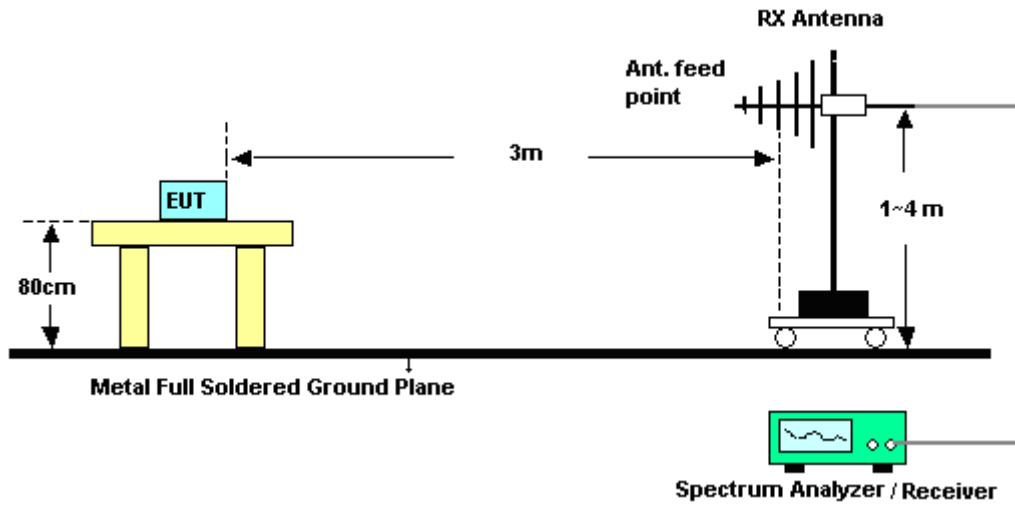

For radiated emissions above 1GHz

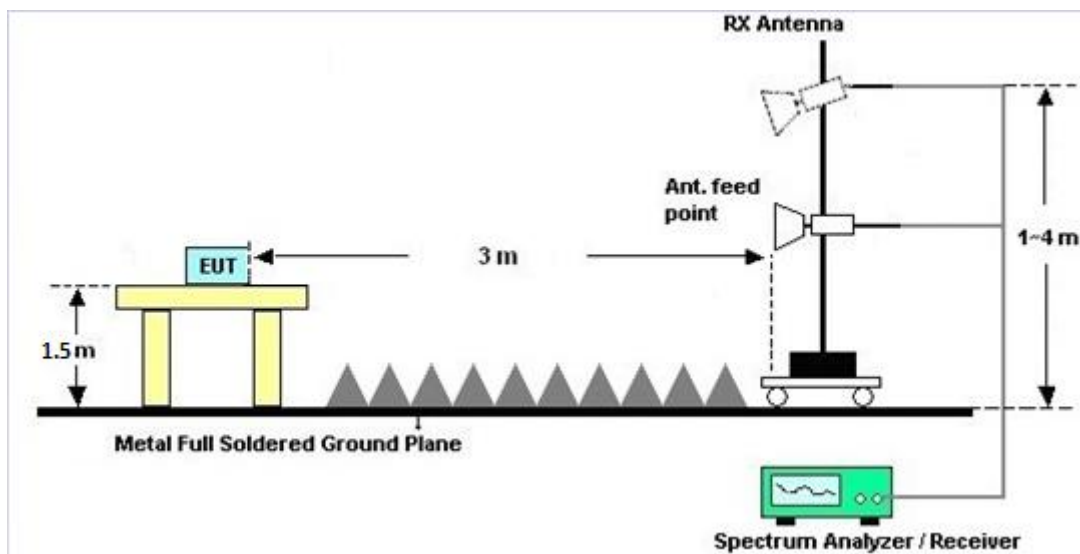



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.4.7 Duty Cycle

Please refer to Appendix C.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

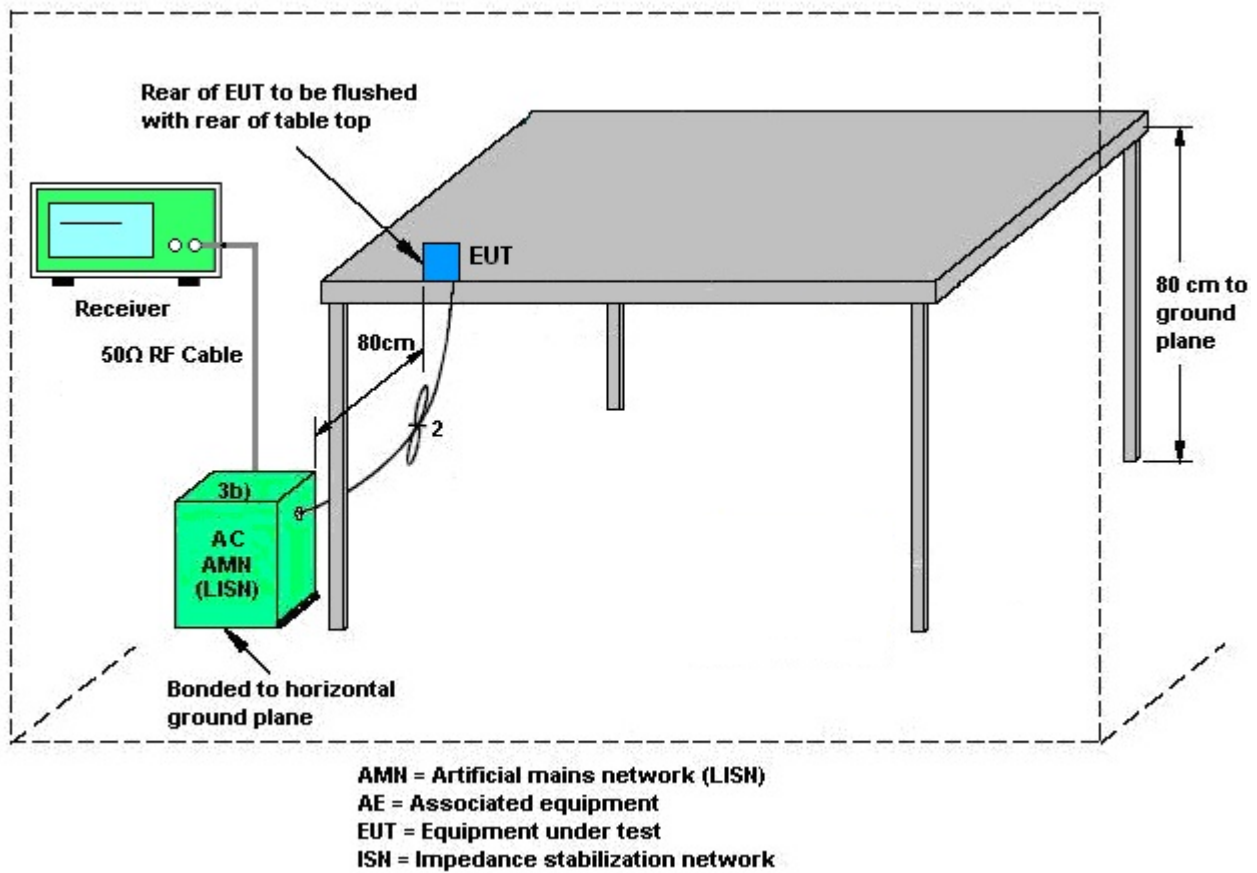


3.5.5 Test Result of AC Conducted Emission

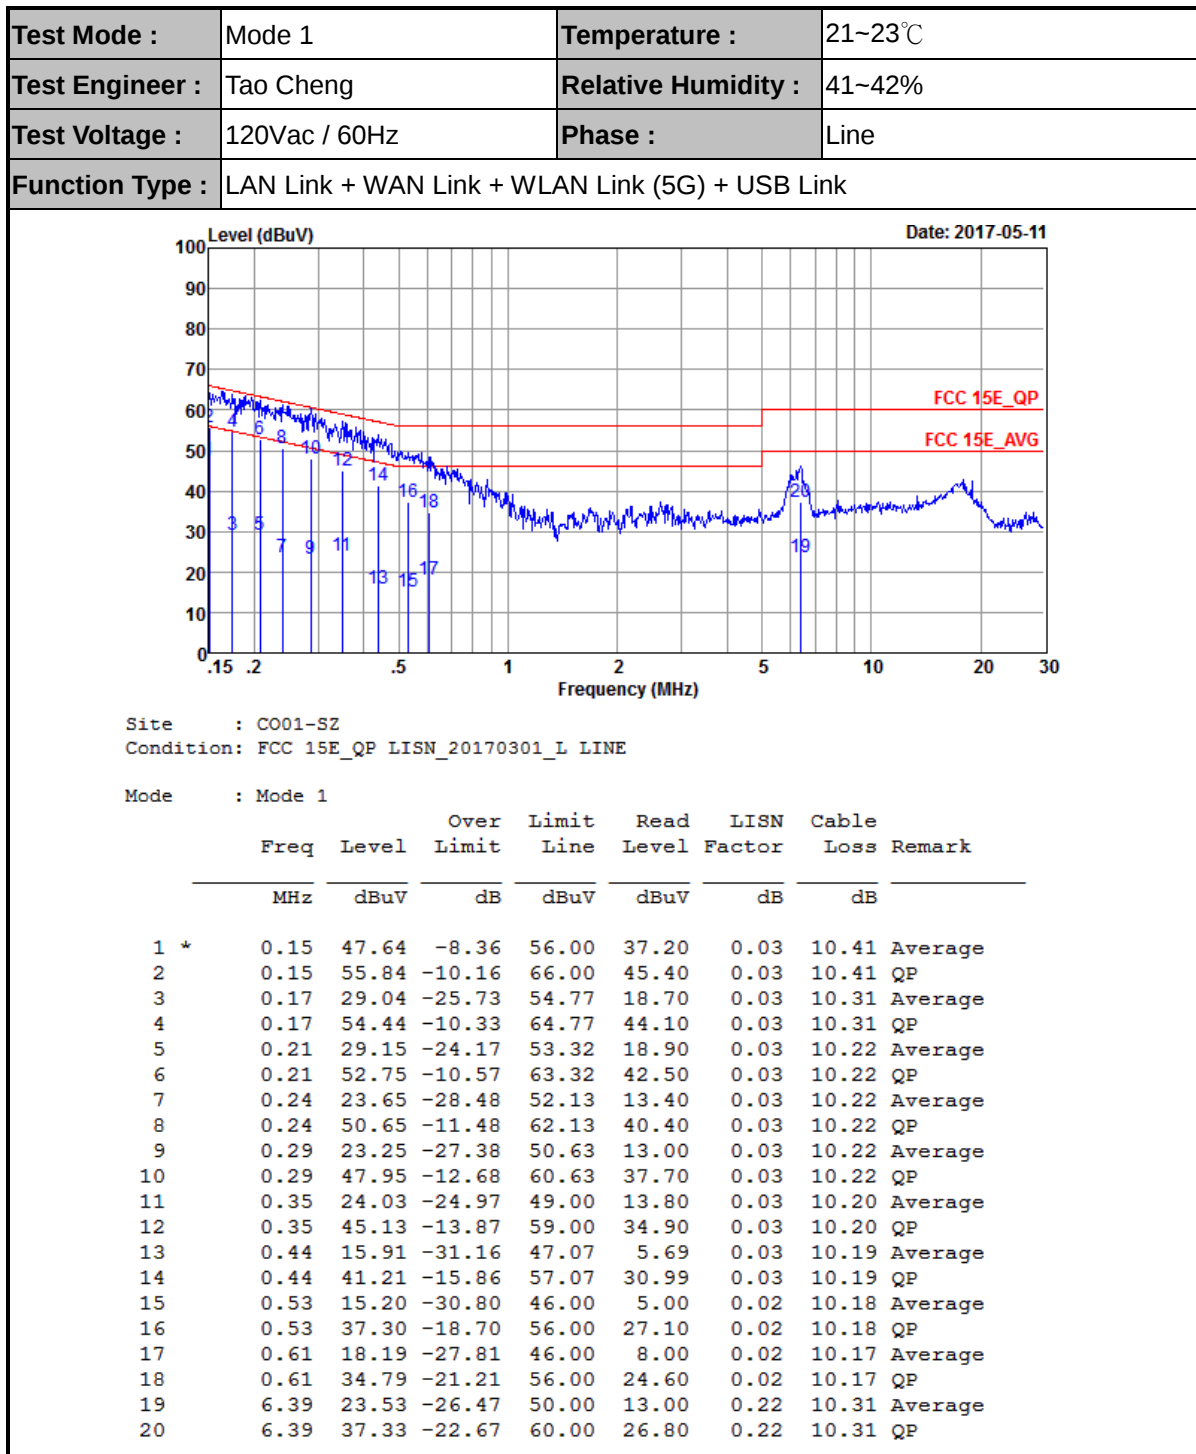



Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Tao Cheng	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	LAN Link + WAN Link + WLAN Link (5G) + USB Link		

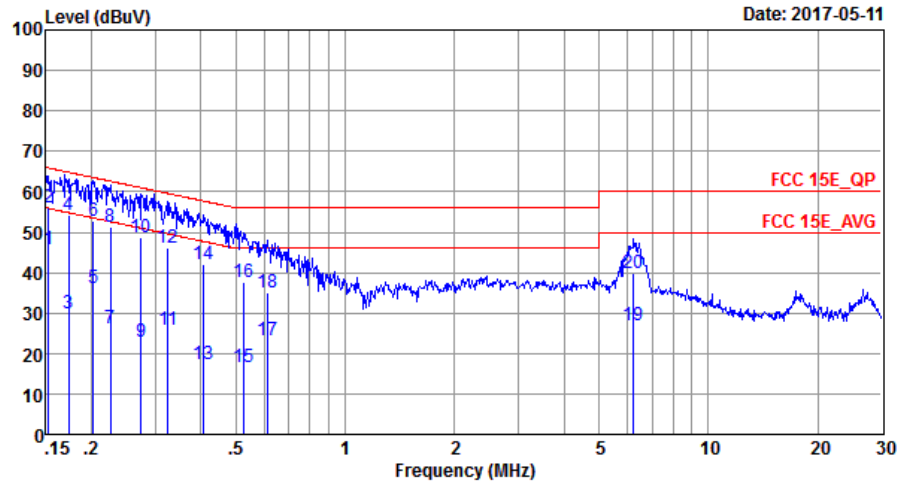

Site : C001-SZ
Condition: FCC 15E_QP LISN_20170301_N NEUTRAL

Mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	45.83	-10.04	55.87	35.40	0.03	10.40	Average
2 *	0.15	55.93	-9.94	65.87	45.50	0.03	10.40	QP
3	0.17	29.75	-25.06	54.81	19.40	0.03	10.32	Average
4	0.17	54.24	-10.57	64.81	43.89	0.03	10.32	QP
5	0.20	36.15	-17.34	53.49	25.90	0.03	10.22	Average
6	0.20	52.95	-10.54	63.49	42.70	0.03	10.22	QP
7	0.23	26.05	-26.56	52.61	15.80	0.03	10.22	Average
8	0.23	51.35	-11.26	62.61	41.10	0.03	10.22	QP
9	0.27	23.05	-27.93	50.98	12.80	0.03	10.22	Average
10	0.27	48.75	-12.23	60.98	38.50	0.03	10.22	QP
11	0.33	25.94	-23.63	49.57	15.70	0.03	10.21	Average
12	0.33	46.04	-13.53	59.57	35.80	0.03	10.21	QP
13	0.41	17.31	-30.37	47.68	7.10	0.02	10.19	Average
14	0.41	42.21	-15.47	57.68	32.00	0.02	10.19	QP
15	0.53	16.50	-29.50	46.00	6.30	0.02	10.18	Average
16	0.53	37.70	-18.30	56.00	27.50	0.02	10.18	QP
17	0.61	23.39	-22.61	46.00	13.20	0.02	10.17	Average
18	0.61	34.89	-21.11	56.00	24.70	0.02	10.17	QP
19	6.22	26.88	-23.12	50.00	16.50	0.07	10.31	Average
20	6.22	39.98	-20.02	60.00	29.60	0.07	10.31	QP

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

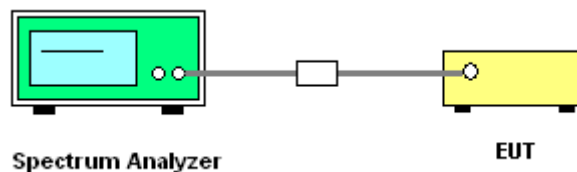

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.8 Antenna Requirements

3.8.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

CDD modes

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

5.2G Band Antenna	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
1+2+3	5.19	9.96	0.00	3.96

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)

TXBF modes

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The EUT supports beamforming for 802.11ac modes.

The directional gain calculation is following F2)e)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

5.2G Band Antenna	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
1+2+3	9.96	9.96	3.96	3.96

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	Apr. 20, 2017	May 09, 2017~ May 16, 2017	Apr. 19, 2018	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Jan. 06, 2017	May 09, 2017~ May 16, 2017	Jan. 05, 2018	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Jan. 06, 2017	May 09, 2017~ May 16, 2017	Jan. 05, 2018	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 16, 2016	May 09, 2017~ May 16, 2017	Jul. 15, 2017	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 20, 2017	Apr. 26, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 20, 2017	Apr. 26, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 07, 2016	Apr. 26, 2017	May 06, 2017	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	May 21, 2016	Apr. 26, 2017	May 20, 2017	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	May 07, 2016	Apr. 26, 2017	May 06, 2017	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul.16, 2016	Apr. 26, 2017	Jul.15, 2017	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Aug.10, 2016	Apr. 26, 2017	Aug. 09, 2017	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz~3000MHz	Oct. 11, 2016	Apr. 26, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 11, 2016	Apr. 26, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 06, 2017	Apr. 26, 2017	Jan. 05, 2018	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Apr. 26, 2017	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 26, 2017	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 26, 2017	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jan. 06, 2017	May 11, 2017	Jan. 05, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103892	9kHz~30MHz	Jan. 05, 2017	May 11, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103912	9kHz~30MHz	Jan. 05, 2017	May 11, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 16, 2016	May 11, 2017	Jul. 15, 2017	Conduction (CO01-SZ)
Pulse Limiter	COM-POWER	LIT-153 Transient Limiter	53139	150kHz~30MHz	Oct. 11, 2016	May 11, 2017	Oct. 10, 2017	Conduction (CO01-SZ)
RF Cable	Woken	B0720#0001	CO01SZ0007	150kHz~30MHz	Oct. 08, 2016	May 11, 2017	Oct. 07, 2017	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Sam Zheng	Temperature:	24~26	°C
Test Date:	2017/5/09~2017/5/16	Relative Humidity:	50~53	%

TEST RESULTS DATA
26dB and 99%
OBW CDD Modes

Band I																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	26 dB Bandwidth (MHz)				99% Bandwidth (MHz)				IC 99% Bandwidth EIRP Limit (dBm)			
					Ant 1	Ant 2	Ant 3	Ant 4	Ant 1	Ant 2	Ant 3	Ant 4	Ant 1	Ant 2	Ant 3	Ant 4
11a	6Mbps	3	36	5180	21.58	21.23	21.33		18.13	17.93	17.93		22.58	22.54	22.54	
11a	6Mbps	3	44	5220	22.88	22.33	22.83		18.48	18.28	18.38		22.67	22.62	22.64	
11a	6Mbps	3	48	5240	25.03	22.73	22.18		18.43	18.23	18.23		22.66	22.61	22.61	
HT20	MCS0	3	36	5180	21.93	21.63	21.38		18.88	18.63	18.78		22.76	22.70	22.74	
HT20	MCS0	3	44	5220	24.98	25.48	26.07		19.58	18.93	19.23		22.92	22.77	22.84	
HT20	MCS0	3	48	5240	24.98	26.07	24.08		19.53	19.28	19.13		22.91	22.85	22.82	
HT40	MCS0	3	38	5190	40.64	40.64	40.46		36.76	36.66	36.66		23.01	23.01	23.01	
HT40	MCS0	3	46	5230	41.36	44.06	43.07		37.36	37.26	37.16		23.01	23.01	23.01	
VHT80	MCS0	3	42	5210	82.32	82.16	81.20		75.76	75.52	75.76		23.01	23.01	23.01	

TEST RESULTS DATA
Average Power Table
CDD Modes

FCC Band I															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Ant	Average Conducted Power with duty factor (dBm)					FCC Power Limit (dBm)	DG (dBi)	FCC EIRP Power (dBm)	FCC EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	Ant 3	Ant 4	SUM					
11a	6Mbps	3	36	5180	1+2+3	18.54	18.72	18.57		23.38	30.00	5.19	28.57	-	Pass
11a	6Mbps	3	44	5220	1+2+3	19.17	19.66	19.07		24.08	30.00	5.19	29.27	-	Pass
11a	6Mbps	3	48	5240	1+2+3	19.13	19.44	19.00		23.97	30.00	5.19	29.16	-	Pass
HT20	MCS0	3	36	5180	1+2+3	18.18	18.14	18.01		22.88	30.00	5.19	28.07	-	Pass
HT20	MCS0	3	44	5220	1+2+3	19.09	19.72	19.12		24.09	30.00	5.19	29.28	-	Pass
HT20	MCS0	3	48	5240	1+2+3	19.22	19.53	19.06		24.05	30.00	5.19	29.24	-	Pass
HT40	MCS0	3	38	5190	1+2+3	14.27	14.22	14.06		18.96	30.00	5.19	24.15	-	Pass
HT40	MCS0	3	46	5230	1+2+3	20.24	20.54	20.06		25.06	30.00	5.19	30.25	-	Pass
VHT20	MCS0	3	36	5180	1+2+3	17.38	17.73	17.47		22.30	30.00	5.19	27.49	-	Pass
VHT20	MCS0	3	44	5220	1+2+3	19.01	19.63	19.09		24.03	30.00	5.19	29.22	-	Pass
VHT20	MCS0	3	48	5240	1+2+3	19.16	19.47	19.03		24.00	30.00	5.19	29.19	-	Pass
VHT40	MCS0	3	38	5190	1+2+3	14.24	14.21	14.03		18.93	30.00	5.19	24.12	-	Pass
VHT40	MCS0	3	46	5230	1+2+3	20.13	20.48	20.04		24.99	30.00	5.19	30.18	-	Pass
VHT80	MCS0	3	42	5210	1+2+3	13.13	13.19	12.91		17.85	30.00	5.19	23.04	-	Pass

TEST RESULTS DATA
Power Spectral Density
CDD Modes

FCC Band I													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Ant	Duty Factor (dB)				Average PSD with Duty Factor (dBm/MHz)	PSD Limit (dBm/MHz)	DG (dBi)	Pass /Fail
						Ant 1	Ant 2	Ant 3	Ant 4				
11a	6Mbps	3	36	5180	1+2+3	0.22	0.22	0.22		12.11	13.04	9.96	Pass
11a	6Mbps	3	44	5220	1+2+3	0.22	0.22	0.22		12.90	13.04	9.96	Pass
11a	6Mbps	3	48	5240	1+2+3	0.22	0.22	0.22		12.98	13.04	9.96	Pass
HT20	MCS0	3	36	5180	1+2+3	0.22	0.22	0.23		11.04	13.04	9.96	Pass
HT20	MCS0	3	44	5220	1+2+3	0.22	0.22	0.23		12.95	13.04	9.96	Pass
HT20	MCS0	3	48	5240	1+2+3	0.22	0.22	0.23		12.87	13.04	9.96	Pass
HT40	MCS0	3	38	5190	1+2+3	0.42	0.42	0.42		4.65	13.04	9.96	Pass
HT40	MCS0	3	46	5230	1+2+3	0.42	0.42	0.42		10.44	13.04	9.96	Pass
VHT80	MCS0	3	42	5210	1+2+3	0.26	0.26	0.26		-0.01	13.04	9.96	Pass

TEST RESULTS DATA
Frequency Stability
CDD Modes

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	3	36	5180	5179.950	-0.050	-9.65	25	100	
11a	6Mbps	3	36	5180	5179.925	-0.075	-14.48	25	240	
11a	6Mbps	3	36	5180	5179.900	-0.100	-19.31	25	120	
11a	6Mbps	3	36	5180	5179.950	-0.050	-9.65	-30	120	
11a	6Mbps	3	36	5180	5179.950	-0.050	-9.65	50	120	

TEST RESULTS DATA
26dB and 99% OBW
Beamforming Modes

Band I																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	26 dB Bandwidth (MHz)				99% Bandwidth (MHz)				IC 99% Bandwidth EIRP Limit (dBm)			
					Ant 1	Ant 2	Ant 3	Ant 4	Ant 1	Ant 2	Ant 3	Ant 4	Ant 1	Ant 2	Ant 3	Ant 4
VHT20	MCS0	3	36	5180	21.73	21.53	21.88		18.63	18.68	18.83		22.70	22.71	22.75	
VHT20	MCS0	3	44	5220	26.42	23.03	26.92		18.93	18.88	19.78		22.77	22.76	22.96	
VHT20	MCS0	3	48	5240	26.27	23.78	30.22		19.03	18.98	19.88		22.79	22.78	22.98	
VHT40	MCS0	3	38	5190	40.55	40.19	40.28		36.66	36.86	36.66		23.01	23.01	23.01	
VHT40	MCS0	3	46	5230	46.66	41.63	49.81		37.26	37.06	38.06		23.01	23.01	23.01	
VHT80	MCS0	3	42	5210	80.08	80.40	80.40		75.52	75.52	75.52		23.01	23.01	23.01	

TEST RESULTS DATA
Average Power Table
Beamforming Modes

FCC Band I															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Ant	Average Conducted Power with duty factor (dBm)					FCC Power Limit (dBm)	DG (dBi)	FCC EIRP Power (dBm)	FCC EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	Ant 3	Ant 4	SUM					
VHT20	MCS0	3	36	5180	1+2+3	17.66	17.83	17.96		22.59	26.04	9.96	32.55	-	Pass
VHT20	MCS0	3	44	5220	1+2+3	18.76	18.96	19.20		23.75	26.04	9.96	33.71	-	Pass
VHT20	MCS0	3	48	5240	1+2+3	19.24	18.93	19.14		23.88	26.04	9.96	33.84	-	Pass
VHT40	MCS0	3	38	5190	1+2+3	12.87	13.10	13.39		17.90	26.04	9.96	27.86	-	Pass
VHT40	MCS0	3	46	5230	1+2+3	20.11	19.90	20.21		24.85	26.04	9.96	34.81	-	Pass
VHT80	MCS0	3	42	5210	1+2+3	11.53	11.68	12.05		16.53	26.04	9.96	26.49	-	Pass

TEST RESULTS DATA
Power Spectral Density
Beamforming Modes

FCC Band I													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Ant	Duty Factor (dB)				Average PSD with Duty Factor (dBm/MHz)	PSD Limit (dBm/MHz)	DG (dBi)	Pass /Fail
						Ant 1	Ant 2	Ant 3	Ant 4				
VHT20	MCS0	3	36	5180	1+2+3	0.12	0.11	0.11		11.29	13.04	9.96	Pass
VHT20	MCS0	3	44	5220	1+2+3	0.12	0.11	0.11		12.72	13.04	9.96	Pass
VHT20	MCS0	3	48	5240	1+2+3	0.12	0.11	0.11		13.00	13.04	9.96	Pass
VHT40	MCS0	3	38	5190	1+2+3	0.09	0.10	0.09		3.45	13.04	9.96	Pass
VHT40	MCS0	3	46	5230	1+2+3	0.09	0.10	0.09		11.01	13.04	9.96	Pass
VHT80	MCS0	3	42	5210	1+2+3	0.10	0.11	0.10		-0.10	13.04	9.96	Pass

TEST RESULTS DATA
Frequency Stability
Beamforming Modes

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
VHT20	MCS0	3	36	5180	5179.950	-0.050	-9.65	25	100	
VHT20	MCS0	3	36	5180	5179.950	-0.050	-9.65	25	240	
VHT20	MCS0	3	36	5180	5179.975	-0.025	-4.83	25	120	
VHT20	MCS0	3	36	5180	5179.950	-0.050	-9.65	-30	120	
VHT20	MCS0	3	36	5180	5179.975	-0.025	-4.83	50	120	



Appendix B. Radiated Spurious Emission

MIMO Antenna 1+2+3 for CDD

15E Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.24	51.55	-22.45	74	39.55	33.7	11.37	33.07	150	122	P	H
		5150	42	-12	54	30	33.7	11.37	33.07	150	122	A	H
	*	5180	105.66	-	-	93.59	33.77	11.47	33.17	150	122	P	H
	*	5180	98.94	-	-	86.87	33.77	11.47	33.17	150	122	A	H
		5147.68	68.98	-5.02	74	56.98	33.7	11.37	33.07	250	0	P	V
		5149.5	53.68	-0.32	54	41.68	33.7	11.37	33.07	250	0	A	V
	*	5180	117.57	-	-	105.5	33.77	11.47	33.17	250	0	P	V
	*	5180	111.28	-	-	99.21	33.77	11.47	33.17	250	0	A	V
802.11a CH 44 5220MHz		5133.9	51.11	-22.89	74	39.08	33.67	11.37	33.01	150	123	P	H
		5140.92	43.5	-10.5	54	31.5	33.7	11.37	33.07	150	123	A	H
	*	5220	108.98	-	-	96.85	33.83	11.58	33.28	150	123	P	H
	*	5220	102.44	-	-	90.31	33.83	11.58	33.28	150	123	A	H
		5382.48	51.65	-22.35	74	39.55	34.17	11.74	33.81	150	123	P	H
		5382.48	42.86	-11.14	54	30.76	34.17	11.74	33.81	150	123	A	H
		5140.14	61.4	-12.6	74	49.4	33.7	11.37	33.07	250	0	P	V
		5138.32	51.75	-2.25	54	39.72	33.67	11.37	33.01	250	0	A	V
	*	5220	119.53	-	-	107.4	33.83	11.58	33.28	250	0	P	V
	*	5220	113.23	-	-	101.1	33.83	11.58	33.28	250	0	A	V
		5378.4	59.37	-14.63	74	47.27	34.17	11.74	33.81	250	0	P	V
		5378.88	51.81	-2.19	54	39.71	34.17	11.74	33.81	250	0	A	V



802.11a CH 48 5240MHz		5079.82	50.97	-23.03	74	38.99	33.57	11.26	32.85	150	123	P	H
		5081.64	42.05	-11.95	54	30.07	33.57	11.26	32.85	150	123	A	H
	*	5240	108.56	-	-	96.4	33.87	11.62	33.33	150	123	P	H
	*	5240	102.4	-	-	90.24	33.87	11.62	33.33	150	123	A	H
		5401.44	50.98	-23.02	74	38.86	34.2	11.78	33.86	150	123	P	H
		5401.92	42.36	-11.64	54	30.24	34.2	11.78	33.86	150	123	A	H
		5077.74	58.88	-15.12	74	46.9	33.57	11.26	32.85	250	0	P	V
		5087.62	49.83	-4.17	54	37.85	33.57	11.26	32.85	250	0	A	V
	*	5240	119.44	-	-	107.28	33.87	11.62	33.33	250	0	P	V
	*	5240	113.45	-	-	101.29	33.87	11.62	33.33	250	0	A	V
		5398.56	59.83	-14.17	74	47.71	34.2	11.78	33.86	250	0	P	V
		5398.8	52.63	-1.37	54	40.51	34.2	11.78	33.86	250	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		10360	50.4	-23.6	74	54.45	37.79	14.61	56.45	152	260	P	H
		15540	50.18	-23.82	74	50.48	39.1	16.34	55.74	189	238	P	H
		10360	50.58	-23.42	74	54.63	37.79	14.61	56.45	250	0	P	V
		15540	50.66	-23.34	74	50.96	39.1	16.34	55.74	150	0	P	V
802.11a CH 44 5220MHz		10440	50.28	-23.72	74	54.3	37.85	14.63	56.5	250	0	P	H
		15660	50.43	-23.57	74	50.33	39.1	16.43	55.43	149	0	P	H
		10440	50.41	-23.59	74	54.43	37.85	14.63	56.5	250	0	P	V
		15660	50.26	-23.74	74	50.16	39.1	16.43	55.43	150	0	P	V
802.11a CH 48 5240MHz		10480	50.21	-23.79	74	54.23	37.89	14.64	56.55	250	0	P	H
		15720	50.79	-23.21	74	50.49	39.1	16.45	55.25	150	0	P	H
		10480	50.89	-23.11	74	54.91	37.89	14.64	56.55	250	0	P	V
		15720	50.15	-23.85	74	49.85	39.1	16.45	55.25	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz

WIFI 802.11n HT20(Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 36 5180MHz		5148.2	56.92	-17.08	74	44.92	33.7	11.37	33.07	150	122	P	H
		5150	43.3	-10.7	54	31.3	33.7	11.37	33.07	150	122	A	H
	*	5180	103.89	-	-	91.82	33.77	11.47	33.17	150	122	P	H
	*	5180	97.76	-	-	85.69	33.77	11.47	33.17	150	122	A	H
		5149.5	67.26	-6.74	74	55.26	33.7	11.37	33.07	250	0	P	V
		5148.72	53.19	-0.81	54	41.19	33.7	11.37	33.07	250	0	A	V
	*	5180	115.72	-	-	103.65	33.77	11.47	33.17	250	0	P	V
	*	5180	109.57	-	-	97.5	33.77	11.47	33.17	250	0	A	V
802.11n HT20 CH 44 5220MHz		5143.26	51.11	-22.89	74	39.11	33.7	11.37	33.07	150	122	P	H
		5147.94	41.73	-12.27	54	29.73	33.7	11.37	33.07	150	122	A	H
	*	5220	107	-	-	94.87	33.83	11.58	33.28	150	122	P	H
	*	5220	100.8	-	-	88.67	33.83	11.58	33.28	150	122	A	H
		5382	52.18	-21.82	74	40.08	34.17	11.74	33.81	150	122	P	H
		5382.48	43.03	-10.97	54	30.93	34.17	11.74	33.81	150	122	A	H
		5139.36	59.61	-14.39	74	47.58	33.67	11.37	33.01	250	0	P	V
		5138.84	51.76	-2.24	54	39.73	33.67	11.37	33.01	250	0	A	V
	*	5220	118	-	-	105.87	33.83	11.58	33.28	250	0	P	V
	*	5220	112.03	-	-	99.9	33.83	11.58	33.28	250	0	A	V
		5379.36	60.44	-13.56	74	48.34	34.17	11.74	33.81	250	0	P	V
		5379.36	51.93	-2.07	54	39.83	34.17	11.74	33.81	250	0	A	V



802.11n HT20 CH 48 5240MHz		5087.88	49.71	-24.29	74	37.73	33.57	11.26	32.85	150	123	P	H
		5077.74	41.08	-12.92	54	29.1	33.57	11.26	32.85	150	123	A	H
	*	5240	107.59	-	-	95.43	33.87	11.62	33.33	150	123	P	H
	*	5240	102.01	-	-	89.85	33.87	11.62	33.33	150	123	A	H
		5407.2	50.13	-23.87	74	38.01	34.2	11.78	33.86	150	123	P	H
		5397.6	41.87	-12.13	54	29.75	34.2	11.78	33.86	150	123	A	H
		5079.04	56.35	-17.65	74	44.37	33.57	11.26	32.85	250	0	P	V
		5079.04	47.52	-6.48	54	35.54	33.57	11.26	32.85	250	0	A	V
	*	5240	118.77	-	-	106.61	33.87	11.62	33.33	250	0	P	V
	*	5240	112.2	-	-	100.04	33.87	11.62	33.33	250	0	A	V
		5399.28	58.36	-15.64	74	46.24	34.2	11.78	33.86	250	0	P	V
		5399.28	51.8	-2.2	54	39.68	34.2	11.78	33.86	250	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n		10360	50.94	-23.06	74	54.99	37.79	14.61	56.45	152	260	P	H
HT20		15540	50.89	-23.11	74	51.19	39.1	16.34	55.74	189	238	P	H
CH 36		10360	50.38	-23.62	74	54.43	37.79	14.61	56.45	152	260	P	V
5180MHz		15540	50.32	-23.68	74	50.62	39.1	16.34	55.74	189	238	P	V
802.11n		10440	50.11	-23.89	74	54.13	37.85	14.63	56.5	150	230	P	H
HT20		15660	50.54	-23.46	74	50.44	39.1	16.43	55.43	160	225	P	H
CH 44		10440	50.5	-23.5	74	54.52	37.85	14.63	56.5	250	0	P	V
5220MHz		15660	50.14	-23.86	74	50.04	39.1	16.43	55.43	160	225	P	V
802.11n		10480	50.99	-23.01	74	55.01	37.89	14.64	56.55	150	289	P	H
HT20		15720	50.43	-23.57	74	50.13	39.1	16.45	55.25	150	291	P	H
CH 48		10480	50.92	-23.08	74	54.94	37.89	14.64	56.55	150	289	P	V
5240MHz		15720	50.69	-23.31	74	50.39	39.1	16.45	55.25	150	291	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 38 5190MHz		5147.94	51.91	-22.09	74	39.91	33.7	11.37	33.07	150	122	P	H
		5147.94	42.59	-11.41	54	30.59	33.7	11.37	33.07	150	122	A	H
	*	5190	97.62	-	-	85.55	33.77	11.47	33.17	150	122	P	H
	*	5190	91.95	-	-	79.88	33.77	11.47	33.17	150	122	A	H
		5352	49.29	-24.71	74	37.15	34.1	11.74	33.7	150	122	P	H
		5388.24	39.89	-14.11	54	27.75	34.17	11.78	33.81	150	122	A	H
		5144.56	66.16	-7.84	74	54.16	33.7	11.37	33.07	250	0	P	V
		5149.24	53.39	-0.61	54	41.39	33.7	11.37	33.07	250	0	A	V
	*	5190	109.39	-	-	97.32	33.77	11.47	33.17	250	0	P	V
	*	5190	103.17	-	-	91.1	33.77	11.47	33.17	250	0	A	V
		5359.2	54.45	-19.55	74	42.31	34.1	11.74	33.7	250	0	P	V
		5354.4	46.39	-7.61	54	34.25	34.1	11.74	33.7	250	0	A	V
802.11n HT40 CH 46 5230MHz		5142.22	52.56	-21.44	74	40.56	33.7	11.37	33.07	150	122	P	H
		5149.76	42.72	-11.28	54	30.72	33.7	11.37	33.07	150	122	A	H
	*	5230	103.67	-	-	91.55	33.87	11.58	33.33	150	122	P	H
	*	5230	97.5	-	-	85.38	33.87	11.58	33.33	150	122	A	H
		5412.48	49.68	-24.32	74	37.59	34.23	11.78	33.92	150	122	P	H
		5387.52	41.27	-12.73	54	29.13	34.17	11.78	33.81	150	122	A	H
		5149.24	63.18	-10.82	74	51.18	33.7	11.37	33.07	250	0	P	V
		5148.46	53.15	-0.85	54	41.15	33.7	11.37	33.07	250	0	A	V
	*	5230	116.25	-	-	104.13	33.87	11.58	33.33	250	0	P	V
	*	5230	109.96	-	-	97.84	33.87	11.58	33.33	250	0	A	V
		5403.84	58.01	-15.99	74	45.89	34.2	11.78	33.86	250	0	P	V
		5383.92	49.74	-4.26	54	37.64	34.17	11.74	33.81	250	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n		10380	50.69	-23.31	74	54.72	37.81	14.62	56.46	150	360	P	H
HT40		15570	50.76	-23.24	74	50.94	39.1	16.37	55.65	155	360	P	H
CH 38		10380	50.45	-23.55	74	54.48	37.81	14.62	56.46	150	360	P	V
5190MHz		15570	50.16	-23.84	74	50.34	39.1	16.37	55.65	155	360	P	V
802.11n		10460	50.19	-23.81	74	54.21	37.86	14.64	56.52	150	360	P	H
HT40		15690	50.78	-23.22	74	50.57	39.1	16.45	55.34	150	225	P	H
CH 46		10460	50.76	-23.24	74	54.78	37.86	14.64	56.52	150	360	P	V
5230MHz		15690	50.43	-23.57	74	50.22	39.1	16.45	55.34	150	225	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 42 5210MHz		5142.74	52.46	-21.54	74	40.46	33.7	11.37	33.07	150	122	P	H
		5147.68	43.52	-10.48	54	31.52	33.7	11.37	33.07	150	122	A	H
	*	5210	94.6	-	-	82.47	33.83	11.58	33.28	150	122	P	H
	*	5210	88.66	-	-	76.53	33.83	11.58	33.28	150	122	A	H
		5387.76	49.65	-24.35	74	37.51	34.17	11.78	33.81	150	122	P	H
		5358	39.87	-14.13	54	27.73	34.1	11.74	33.7	150	122	A	H
		5149.24	63.15	-10.85	74	51.15	33.7	11.37	33.07	250	0	P	V
		5149.5	53.94	-0.06	54	41.94	33.7	11.37	33.07	250	0	A	V
	*	5210	105.13	-	-	93	33.83	11.58	33.28	250	0	P	V
	*	5210	98.97	-	-	86.84	33.83	11.58	33.28	250	0	A	V
		5374.32	51.7	-22.3	74	39.59	34.13	11.74	33.76	250	0	P	V
		5359.2	43.63	-10.37	54	31.49	34.1	11.74	33.7	250	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac		10420	50.58	-23.42	74	54.61	37.83	14.63	56.49	150	230	P	H
VHT80		15630	50.74	-23.26	74	50.71	39.1	16.4	55.47	160	225	P	H
CH 42		10420	50.43	-23.57	74	54.46	37.83	14.63	56.49	150	230	P	V
5210MHz		15630	50.53	-23.47	74	50.5	39.1	16.4	55.47	160	225	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E Emission below 1GHz

WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 LF		30	27.64	-12.36	40	32.41	26.7	0.23	31.7	-	-	P	H
		170.65	31.71	-11.79	43.5	44.71	16.89	1.43	31.32	100	0	P	H
		266.68	29.91	-16.09	46	40.79	18.37	1.92	31.17	-	-	P	H
		334.58	29.88	-16.12	46	39.02	20	2.16	31.3	-	-	P	H
		697.36	31.25	-14.75	46	31.93	27.56	3.26	31.5	-	-	P	H
		963.14	34.53	-19.47	54	32.35	29.67	4.01	31.5	-	-	P	H
		34.85	35.95	-4.05	40	42.63	24.6	0.32	31.6	100	105	P	V
		40.67	31.57	-8.43	40	40.69	21.94	0.39	31.45	-	-	P	V
		172.59	28.1	-15.4	43.5	41.16	16.81	1.44	31.31	-	-	P	V
		421.88	29.16	-16.84	46	32.48	25.51	2.47	31.3	-	-	P	V
		638.19	32.59	-13.41	46	35.72	25.25	3.12	31.5	-	-	P	V
		845.77	32.52	-13.48	46	32.29	28.05	3.68	31.5	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



MIMO Antenna 1+2+3 for Beamforming

15E band 1 5150~5250MHz

WIFI 802.11ac HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac HT20 CH 36 5180MHz		5147.42	52.39	-21.61	74	40.39	33.7	11.37	33.07	194	94	P	H
		5150	43.7	-10.3	54	31.7	33.7	11.37	33.07	194	94	A	H
	*	5180	104.61	-	-	92.54	33.77	11.47	33.17	194	94	P	H
	*	5180	94.67	-	-	82.6	33.77	11.47	33.17	194	94	A	H
		5149.5	66.98	-7.02	74	54.98	33.7	11.37	33.07	150	137	P	V
		5150	52.8	-1.2	54	40.8	33.7	11.37	33.07	150	137	A	V
	*	5180	114.22	-	-	102.15	33.77	11.47	33.17	150	137	P	V
	*	5180	104.32	-	-	92.25	33.77	11.47	33.17	150	137	A	V
802.11ac HT20 CH 44 5220MHz		5055.9	50.11	-23.89	74	38.22	33.53	11.16	32.8	150	0	P	H
		5137.28	39.52	-14.48	54	27.49	33.67	11.37	33.01	150	0	A	H
	*	5220	96.2	-	-	84.07	33.83	11.58	33.28	150	0	P	H
	*	5220	88.09	-	-	75.96	33.83	11.58	33.28	150	0	A	H
		5404.32	50.45	-23.55	74	38.33	34.2	11.78	33.86	150	0	P	H
		5378.64	39.09	-14.91	54	26.99	34.17	11.74	33.81	150	0	A	H
		5138.84	58.52	-15.48	74	46.49	33.67	11.37	33.01	150	137	P	V
		5141.96	49.48	-4.52	54	37.48	33.7	11.37	33.07	150	137	A	V
	*	5220	117.95	-	-	105.82	33.83	11.58	33.28	150	137	P	V
	*	5220	107.93	-	-	95.8	33.83	11.58	33.28	150	137	A	V
		5382.72	58.36	-15.64	74	46.26	34.17	11.74	33.81	150	137	P	V
		5379.12	50.14	-3.86	54	38.04	34.17	11.74	33.81	150	137	A	V



802.11ac HT20 CH 48 5240MHz		5019.5	50.51	-23.49	74	38.67	33.43	11.05	32.64	165	111	P	H
		5087.62	41.13	-12.87	54	29.15	33.57	11.26	32.85	165	111	A	H
	*	5240	107.97	-	-	95.81	33.87	11.62	33.33	165	111	P	H
	*	5240	102.19	-	-	90.03	33.87	11.62	33.33	165	111	A	H
		5364.24	50.54	-23.46	74	38.43	34.13	11.74	33.76	165	111	P	H
		5407.2	41.37	-12.63	54	29.25	34.2	11.78	33.86	165	111	A	H
		5084.76	55.66	-18.34	74	43.68	33.57	11.26	32.85	150	138	P	V
		5082.42	47.88	-6.12	54	35.9	33.57	11.26	32.85	150	138	A	V
	*	5240	118.3	-	-	106.14	33.87	11.62	33.33	150	138	P	V
	*	5240	110.09	-	-	97.93	33.87	11.62	33.33	150	138	A	V
		5402.4	60.03	-13.97	74	47.91	34.2	11.78	33.86	150	138	P	V
		5397.84	51.44	-2.56	54	39.32	34.2	11.78	33.86	150	138	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz

WIFI 802.11ac HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac		10360	50.61	-23.39	74	54.66	37.79	14.61	56.45	152	260	P	H
HT20		15540	50.44	-23.56	74	50.74	39.1	16.34	55.74	189	238	P	H
CH 36		10360	50.09	-23.91	74	54.14	37.79	14.61	56.45	152	260	P	V
5180MHz		15540	50.6	-23.4	74	50.9	39.1	16.34	55.74	189	238	P	V
802.11ac		10440	50.16	-23.84	74	54.18	37.85	14.63	56.5	150	230	P	H
HT20		15660	50.28	-23.72	74	50.18	39.1	16.43	55.43	160	225	P	H
CH 44		10440	50.73	-23.27	74	54.75	37.85	14.63	56.5	150	230	P	V
5220MHz		15660	50.68	-23.32	74	50.58	39.1	16.43	55.43	160	225	P	V
802.11ac		10480	50.88	-23.12	74	54.9	37.89	14.64	56.55	150	289	P	H
HT20		15720	50.73	-23.27	74	50.43	39.1	16.45	55.25	150	291	P	H
CH 48		10480	50.41	-23.59	74	54.43	37.89	14.64	56.55	150	289	P	V
5240MHz		15720	50.56	-23.44	74	50.26	39.1	16.45	55.25	150	291	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz
WIFI 802.11ac HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac HT40 CH 38 5190MHz		5150	53.72	-20.28	74	41.72	33.7	11.37	33.07	165	98	P	H
		5146.12	43.84	-10.16	54	31.84	33.7	11.37	33.07	165	98	A	H
	*	5190	96.91	-	-	84.84	33.77	11.47	33.17	165	98	P	H
	*	5190	87.87	-	-	75.8	33.77	11.47	33.17	165	98	A	H
		5352	49.29	-24.71	74	37.15	34.1	11.74	33.7	165	98	P	H
		5388.24	39.89	-14.11	54	27.75	34.17	11.78	33.81	165	98	A	H
		5147.94	67.53	-6.47	74	55.53	33.7	11.37	33.07	150	137	P	V
		5150	53.49	-0.51	54	41.49	33.7	11.37	33.07	150	137	A	V
	*	5190	111.38	-	-	99.31	33.77	11.47	33.17	150	137	P	V
	*	5190	107.75	-	-	95.68	33.77	11.47	33.17	150	137	A	V
		5359.2	60.45	-13.55	74	48.31	34.1	11.74	33.7	250	0	P	V
		5354.4	50.39	-3.61	54	38.25	34.1	11.74	33.7	250	0	A	V
802.11ac HT40 CH 46 5230MHz		5145.86	53.08	-20.92	74	41.08	33.7	11.37	33.07	165	98	P	H
		5146.9	42.4	-11.6	54	30.4	33.7	11.37	33.07	165	98	A	H
	*	5230	102.92	-	-	90.8	33.87	11.58	33.33	165	98	P	H
	*	5230	93.77	-	-	81.65	33.87	11.58	33.33	165	98	A	H
		5404.08	49.88	-24.12	74	37.76	34.2	11.78	33.86	165	98	P	H
		5396.16	40.56	-13.44	54	28.44	34.2	11.78	33.86	165	98	A	H
		5149.76	62.88	-11.12	74	50.88	33.7	11.37	33.07	150	137	P	V
		5149.5	53.06	-0.94	54	41.06	33.7	11.37	33.07	150	137	A	V
	*	5230	116.99	-	-	104.87	33.87	11.58	33.33	150	137	P	V
	*	5230	107.33	-	-	95.21	33.87	11.58	33.33	150	137	A	V
		5383.44	58.88	-15.12	74	46.78	34.17	11.74	33.81	150	137	P	V
		5399.28	50.48	-3.52	54	38.36	34.2	11.78	33.86	150	137	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz

WIFI 802.11ac HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac		10380	50.03	-23.97	74	54.06	37.81	14.62	56.46	150	360	P	H
HT40		15570	50.32	-23.68	74	50.5	39.1	16.37	55.65	155	360	P	H
CH 38		10380	50.15	-23.85	74	54.18	37.81	14.62	56.46	150	360	P	V
5190MHz		15570	50.76	-23.24	74	50.94	39.1	16.37	55.65	155	360	P	V
802.11ac		10460	50.65	-23.35	74	54.67	37.86	14.64	56.52	150	360	P	H
HT40		15690	50.49	-23.51	74	50.28	39.1	16.45	55.34	150	225	P	H
CH 46		10460	50.07	-23.93	74	54.09	37.86	14.64	56.52	150	360	P	V
5230MHz		15690	50.47	-23.53	74	50.26	39.1	16.45	55.34	150	225	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 42 5210MHz		5149.5	53.62	-20.38	74	41.62	33.7	11.37	33.07	165	98	P	H
		5149.24	42.32	-11.68	54	30.32	33.7	11.37	33.07	165	98	A	H
	*	5210	95.15	-	-	83.02	33.83	11.58	33.28	165	98	P	H
	*	5210	86.35	-	-	74.22	33.83	11.58	33.28	165	98	A	H
		5392.08	49.05	-24.95	74	36.91	34.17	11.78	33.81	165	98	P	H
		5402.16	39.51	-14.49	54	27.39	34.2	11.78	33.86	165	98	A	H
		5138.32	63.88	-10.12	74	51.85	33.67	11.37	33.01	150	137	P	V
		5148.72	53.33	-0.67	54	41.33	33.7	11.37	33.07	150	137	A	V
	*	5210	105.7	-	-	93.57	33.83	11.58	33.28	150	137	P	V
	*	5210	96.9	-	-	84.77	33.83	11.58	33.28	150	137	A	V
		5352.72	52.58	-21.42	74	40.44	34.1	11.74	33.7	150	137	P	V
		5357.52	43.69	-10.31	54	31.55	34.1	11.74	33.7	150	137	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac		10420	50.14	-23.86	74	54.17	37.83	14.63	56.49	150	230	P	H
VHT80		15630	50.93	-23.07	74	50.9	39.1	16.4	55.47	160	225	P	H
CH 42		10420	50.05	-23.95	74	54.08	37.83	14.63	56.49	150	230	P	V
5210MHz		15630	50.7	-23.3	74	50.67	39.1	16.4	55.47	160	225	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.


Appendix C. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2+3	802.11a	94.90	2.064	0.484	1kHz
1+2+3	802.11n HT20	95.18	1.917	0.521	1kHz
1+2+3	802.11n HT40	90.46	0.948	1.055	3kHz
1+2+3	802.11ac VHT80	94.08	0.461	2.170	3kHz


802.11a Antenna 1+2+3

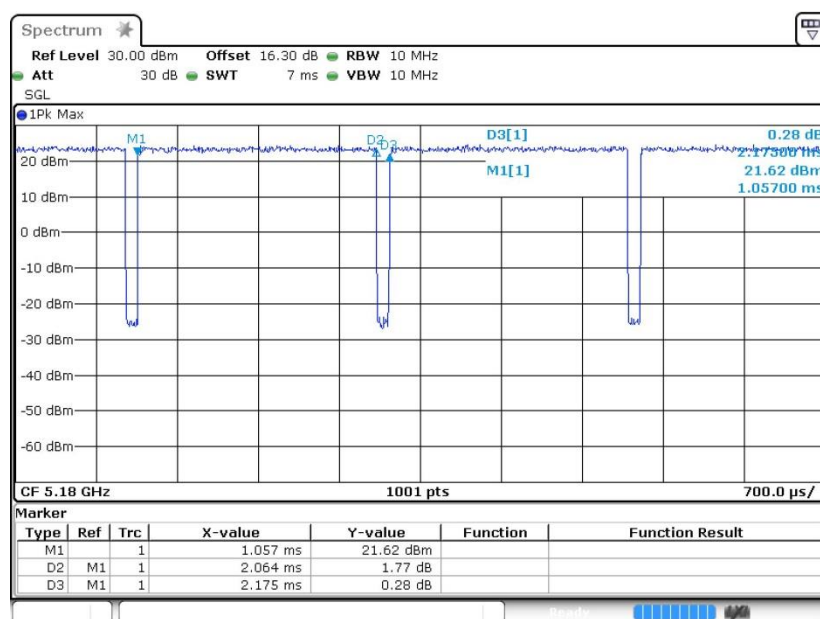

802.11n HT20 Antenna 1+2+3

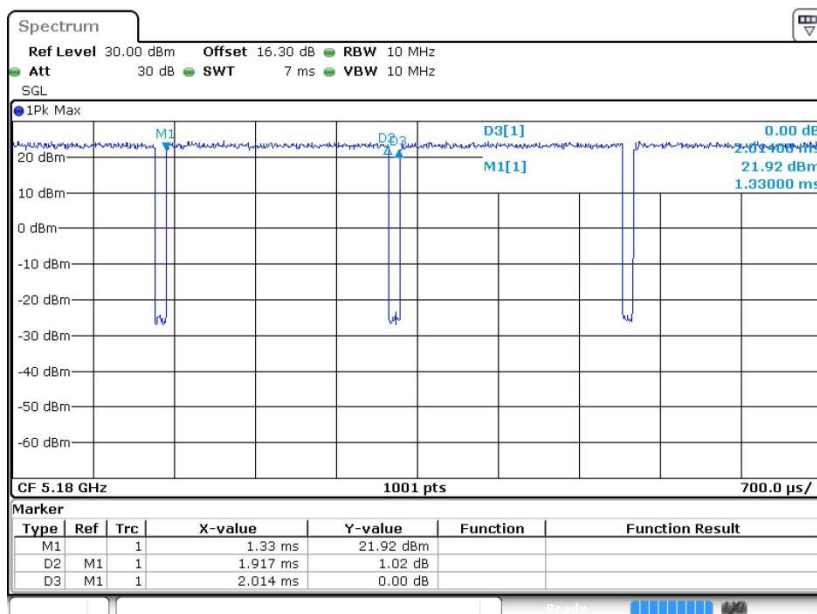

802.11n HT40 Antenna 1+2+3

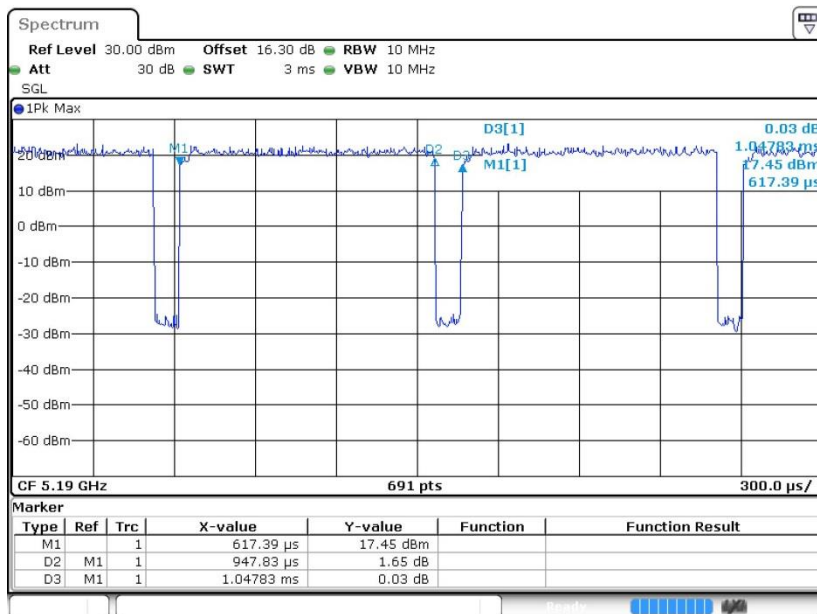



802.11ac VHT80 Antenna 1+2+3

