

# FCC TEST REPORT

**Report No.:** BUMK-ESH-P20111018B-2

**FCC ID:** 2AWXZTY-R8824

**Product:** Smart Camera

**Test Model:** SC103-WO2

**Received:** Nov.13, 2020

**ISSUED:** Dec.16, 2020

**Applicant:** Zhejiang Tuya Smart Electronics Co., Ltd

**Address:** Room 901, Building 1, Huace Center, Xihu District, Hangzhou,  
Zhejiang Province, China

**Issued By:** BUREAU VERITAS ADT (Shanghai) Corporation

**Lab Location:** No. 829, Xinzhuan Road, Shanghai, P.R.China (201612)

This test report consists of 25 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA, CNAS, or any government agency. The test results in the report only apply to the tested item. The test results in this report are traceable to the national or international standards.


# Contents

<b>1. TEST PROGRAM.....</b>	<b>3</b>
<b>2. Summary of Test Procedure and Test Results .....</b>	<b>4</b>
<b>3. Test Configuration of Equipment under Test .....</b>	<b>5</b>
3.1 Manufacturer information.....	5
3.2 Feature of Equipment under Test.....	5
3.3 Description of support units .....	5
3.4 Measurement Uncertainty .....	6
<b>4 Test of Conducted Emission .....</b>	<b>7</b>
4.1 Test Limit .....	7
4.2 Test Procedures .....	8
4.3 Typical Test Setup .....	8
4.4 Measurement Equipment .....	9
4.5 Test Result and Data .....	10
4.6 Test Photographs .....	14
<b>5 Test of Radiated Emission .....</b>	<b>15</b>
5.1 Test Limit .....	15
5.2 Test Procedures .....	16
5.3 Typical Test Setup .....	16
5.4 Measurement Equipment .....	17
5.5 Test Result and Data (30MHz ~ 1GHz) .....	18
5.6 Test Result and Data (1GHz ~ 18GHz) .....	20
5.7 Test Photographs (30MHz ~ 1000MHz) .....	22
5.8 Test Photographs (1000MHz ~ 18000MHz) .....	23
<b>6 Photographs of EUT .....</b>	<b>24</b>

## 1. TEST PROGRAM

**PRODUCT:** Smart Camera  
**TEST MODEL:** SC103-WO2  
**APPLICANT:** Zhejiang Tuya Smart Electronics Co., Ltd  
**TESTED:** Nov.02 to Nov.18, 2020  
**STANDARDS:** 47 CFR FCC Part15, Subpart B, Class B  
ANSI C63.4:2014

We, BUREAU VERITAS ADT (Shanghai) Corporation, declare that the equipment above has been tested and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

**PREPARED BY :**  , **DATE:** Dec.16, 2020  
Scott XU  
Project Engineer

**APPROVED BY :**  , **DATE:** Dec.16, 2020  
Daniel SUN  
EMC Lab Manager



## 2. Summary of Test Procedure and Test Results

EMISSION (47 CFR FCC Part15, Subpart B)		
Test Item	Normative References	Test Result
Conducted Emission	47 CFR FCC Part15, Subpart B 15.107	Meets the Class B requirements
Radiated Emission	47 CFR FCC Part15, Subpart B 15.109	Meets the Class B requirements

### 3. Test Configuration of Equipment under Test

#### 3.1 Manufacturer information

Manufacturer : Zhejiang Tuya Smart Electronics Co., Ltd

Address : Room 901, Building 1, Huace Center, Xihu District, Hangzhou, Zhejiang  
Province, China

#### 3.2 Feature of Equipment under Test

<b>Product Name:</b>	Smart Camera
<b>Test Model:</b>	SC103-WO2
<b>Model Discrepancy:</b>	--
<b>EUT Power Rating:</b>	5VDC/1A with adaptor 100-240Vac~, 50/60Hz

Note:

1. Please refer to user manual.

#### 3.3 Description of support units

NO.	PRODUCT	BRAND	MODEL NO.
1	Adaptor	Shenzhen Keyu Power Supply Technology Co., Ltd	KA06E-0501000US

### 3.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement		Value
Conducted emissions		2.55 dB
Radiated emissions	30 MHz ~ 1GHz	3.22 dB
	Above 1GHz	2.89 dB

## 4 Test of Conducted Emission

### 4.1 Test Limit

**TEST STANDARD:**

**CFR 47 FCC Part 15, Subpart B (Section: 15.107)**


FREQUENCY (MHz)	Class A (dB $\mu$ V)		Class B (dB $\mu$ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

## 4.2 Test Procedures

1. The EUT was placed on a desk 0.8 meter height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
2. Connect EUT to the power mains through a Artificial Mains Network (AMN).
3. All the support units are connecting to the other AMN.
4. The AMN provides 50 ohm coupling impedance for the measuring instrument.
5. The CISPR states that a 50 ohm, 50 micro-Henry AMN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched
8. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

## 4.3 Typical Test Setup

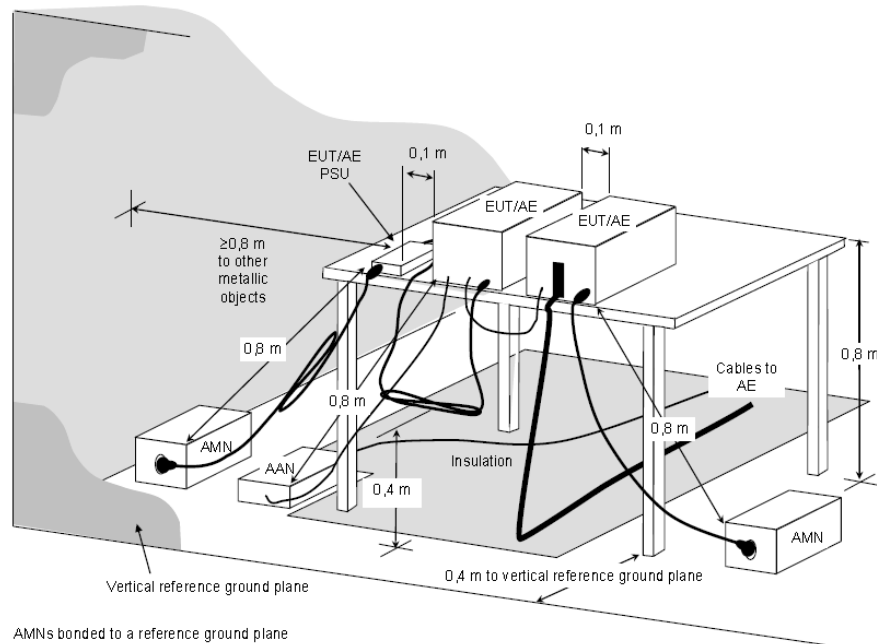

NOTE The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be  $\geq 0.8$  m.

**Figure D.2 – Example measurement arrangement for table-top EUT  
(Conducted emission measurement – alternative 1)**



#### 4.4 Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	E1R1001	Mar.11, 2021
LISN ROHDE & SCHWARZ	ENV216	E1L1011	Mar.11, 2021
Software ADT	ADT_Cond_V7.3.0	N/A	N/A


## 4.5 Test Result and Data

### Conducted Emission Test Data

For Adaptor: KA06E-0501000US

120Vac/60Hz

Phase : LINE

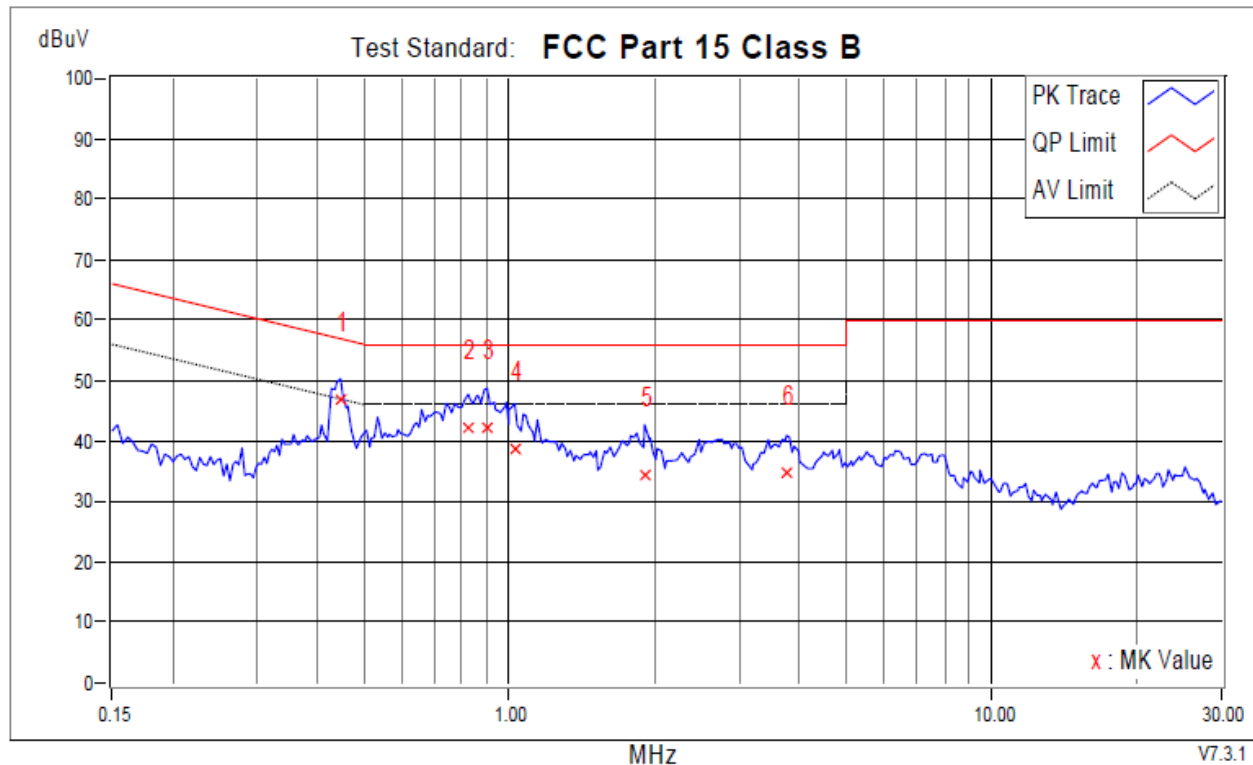


	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
No.	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
+1	0.44716	9.73	37.29	20.83	47.02	30.56	56.93	46.93	-9.90	-16.36	
2	0.82252	9.60	32.52	18.09	42.12	27.69	56.00	46.00	-13.88	-18.31	
3	0.90072	9.61	32.44	14.79	42.05	24.40	56.00	46.00	-13.95	-21.60	
4	1.02737	9.61	28.90	14.09	38.51	23.70	56.00	46.00	-17.49	-22.30	
5	1.91103	9.76	24.68	11.41	34.44	21.17	56.00	46.00	-21.56	-24.83	
6	3.76437	9.82	25.00	12.40	34.82	22.22	56.00	46.00	-21.18	-23.78	

### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase : NEUTRAL

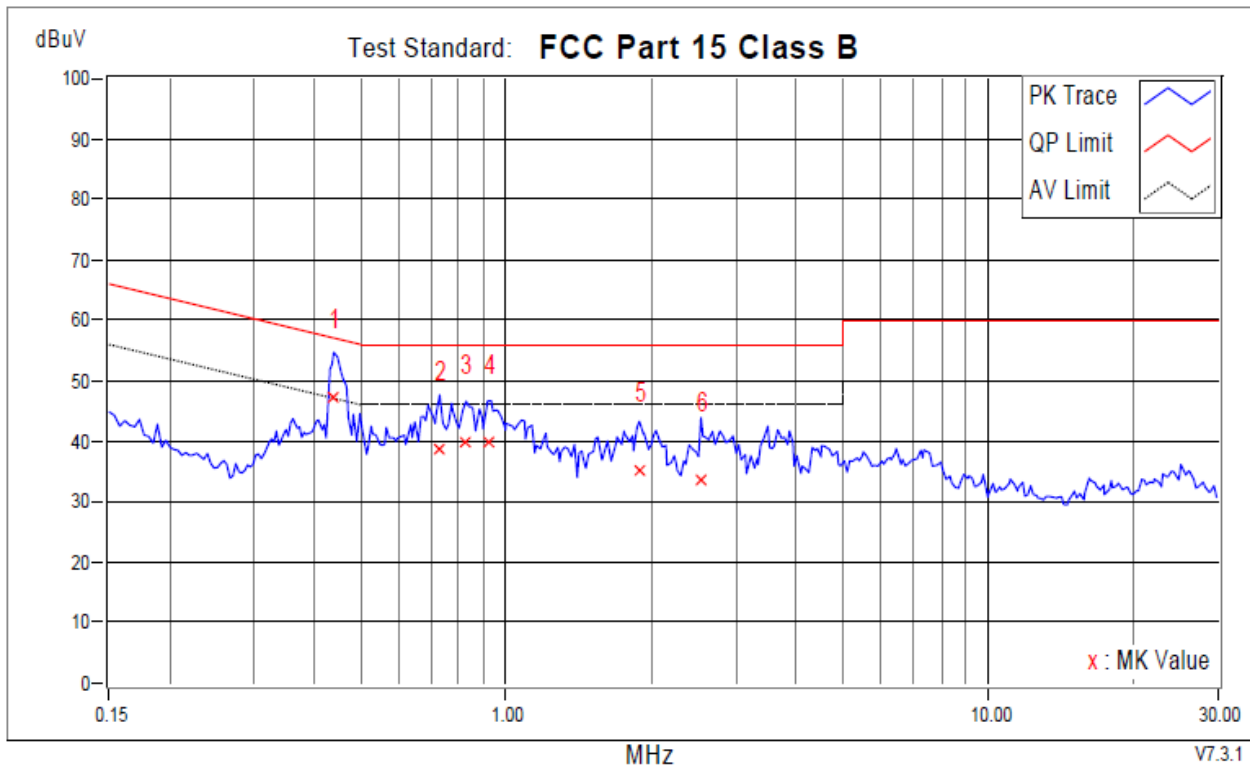


No.	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
+1	0.43934	9.87	37.55	28.42	47.42	38.29	57.07	47.07	-9.66	-8.79	
2	0.72868	9.84	28.86	20.56	38.70	30.40	56.00	46.00	-17.30	-15.60	
3	0.82643	9.90	29.88	20.14	39.78	30.04	56.00	46.00	-16.22	-15.96	
4	0.91636	9.91	29.84	20.90	39.75	30.81	56.00	46.00	-16.25	-15.19	
5	1.89148	9.93	25.34	15.55	35.27	25.48	56.00	46.00	-20.73	-20.52	
6	2.54054	9.95	23.63	13.52	33.58	23.47	56.00	46.00	-22.42	-22.53	

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

240Vac/50Hz

Phase: LINE

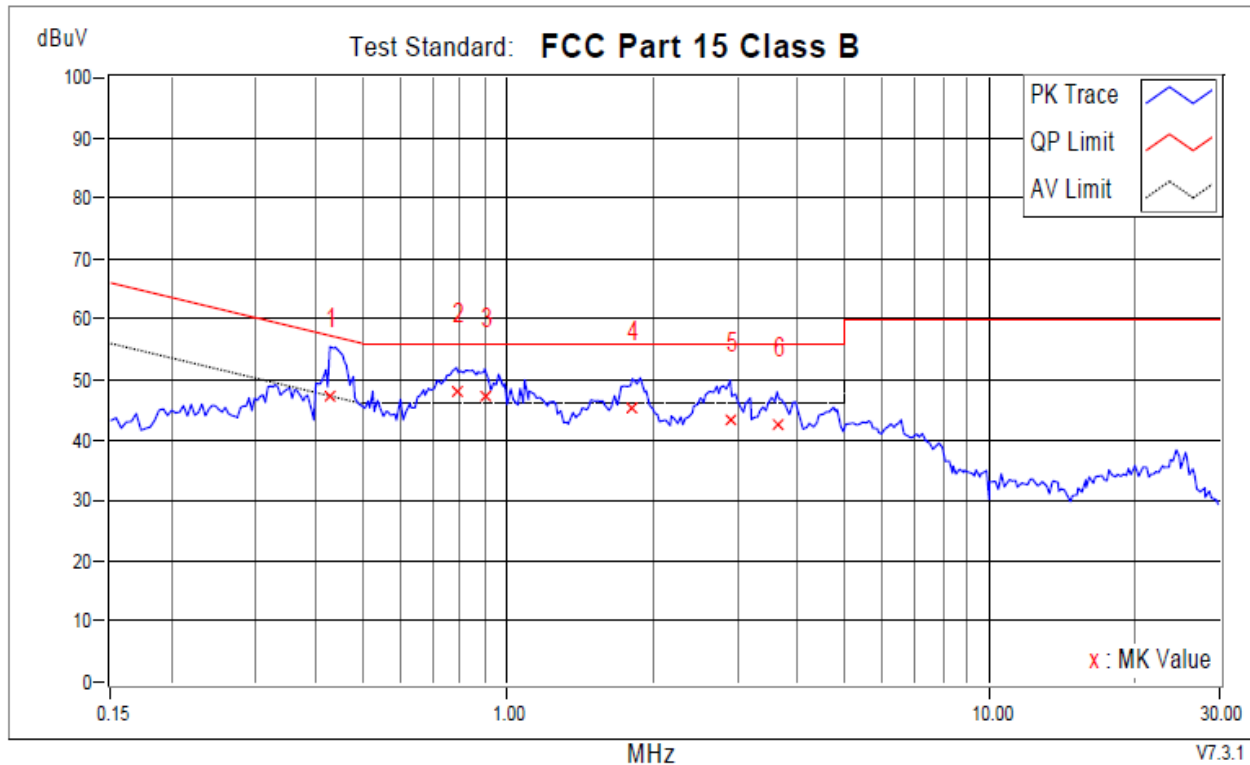


		Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
No.	MHz	dB		QP	AV	QP	AV	QP	AV	QP	AV	
1	0.42761	9.73		37.41	25.69	47.14	35.42	57.30	47.30	-10.16	-11.88	
+2	0.78342	9.60		38.64	28.57	48.24	38.17	56.00	46.00	-7.76	-7.83	
3	0.89681	9.60		37.61	24.45	47.21	34.05	56.00	46.00	-8.79	-11.95	
4	1.81719	9.74		35.45	24.01	45.19	33.75	56.00	46.00	-10.81	-12.25	
5	2.90026	9.80		33.39	22.46	43.19	32.26	56.00	46.00	-12.81	-13.74	
6	3.62752	9.82		32.73	21.64	42.55	31.46	56.00	46.00	-13.45	-14.54	

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase: NEUTRAL

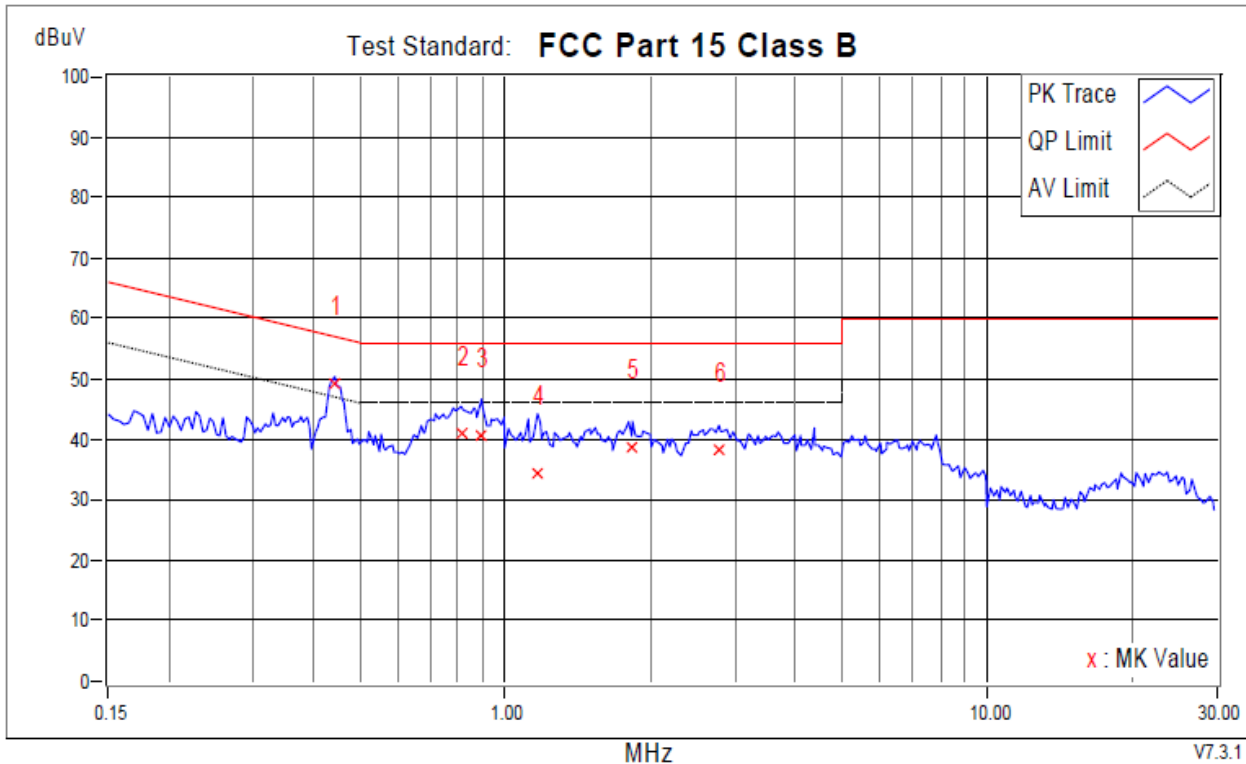

Frequency		Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
No.	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
+1	0.44325	9.87	39.29	26.44	49.16	36.31	57.00	47.00	-7.84	-10.69	
2	0.81079	9.90	31.28	19.74	41.18	29.64	56.00	46.00	-14.82	-16.36	
3	0.89290	9.90	30.82	17.00	40.72	26.90	56.00	46.00	-15.28	-19.10	
4	1.16813	9.91	24.28	12.32	34.19	22.23	56.00	46.00	-21.81	-23.77	
5	1.83674	9.93	28.67	16.08	38.60	26.01	56.00	46.00	-17.40	-19.99	
6	2.77905	9.96	28.29	15.57	38.25	25.53	56.00	46.00	-17.75	-20.47	

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

## 4.6 Test Photographs

Adaptor: KA06E-0501000US



## 5 Test of Radiated Emission

### 5.1 Test Limit

**TEST STANDARD:**

**CFR 47 FCC Part 15, Subpart B (Section: 15.109)**

### FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 – 88	90	39.1	100	40.0
88 – 216	150	43.5	150	43.5
216 – 960	210	46.4	200	46.0
960 – 1000	300	49.5	500	54.0

### LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz


FREQUENCY (MHz)	Class A ( $\text{dB}\mu\text{V/m}$ ) (at 3m)		Class B ( $\text{dB}\mu\text{V/m}$ ) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

- Note:**
1. The lower limit shall apply at the transition frequencies.
  2. Emission level ( $\text{dB}\mu\text{V/m}$ ) =  $20 \log$  Emission level ( $\mu\text{V/m}$ ).
  3. All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

## 5.2 Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

## 5.3 Typical Test Setup

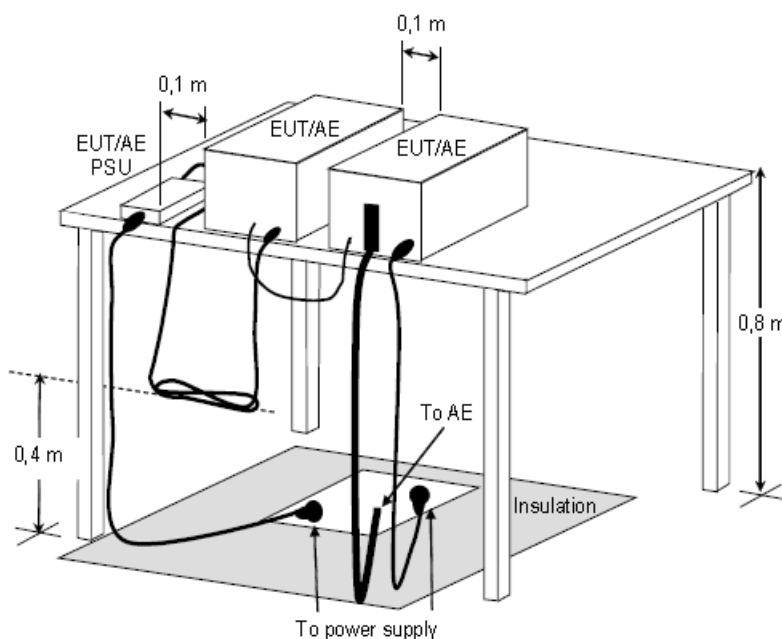

**Figure D.8 – Example measurement arrangement for table-top EUT  
(Radiated emission measurement)**




#### 5.4 Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
EMI Test Spectrum ROHDE & SCHWARZ	ESR7	E1R1005	May.11, 2021
Spectrum Analyzer Keysight	N9030B	E1S1003	Aug.03, 2021
Broad-Band Antenna Schwarzbeck	VULB9168	E1A1012	Jul.27, 2021
Double Riaged Vroadband Horn Antenna Schwarzbeck	BBHA9120D	E1A1017	Jan.25, 2021
Preamplifier Agilent	8447D	E1A2001	Apr.19, 2021
Preamplifier Agilent	EMC051845SE	E1A2009	Jul.05, 2021

## 5.5 Test Result and Data (30MHz ~ 1GHz)

For adaptor: KA06E-0501000US

Position: Horizontal

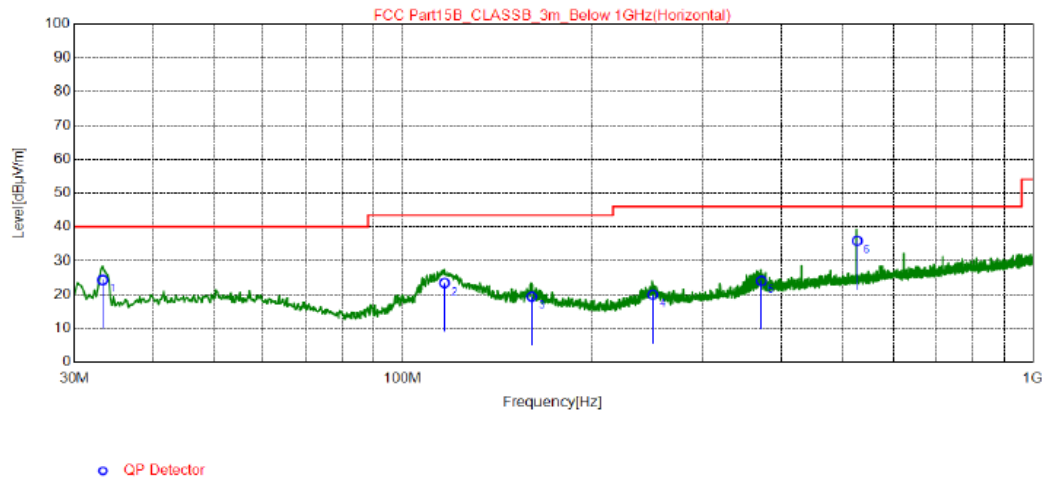


NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.29	35.58	-11.26	24.32	40.00	15.68	200	321	Horizontal
2	116.5	36.35	-12.93	23.42	43.50	20.08	200	61	Horizontal
3	160.3	29.16	-9.78	19.38	43.50	24.12	200	263	Horizontal
4	249.8	30.54	-10.58	19.96	46.00	26.04	200	303	Horizontal
5	371.8	30.9	-6.85	24.05	46.00	21.95	200	194	Horizontal
6	527.9	39.96	-4.06	35.90	46.00	10.10	200	146	Horizontal

### REMARKS:

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value.
4. Factor = Antenna Factor + Amplifier Factor + Cable loss.
5. QP value = Factor + Reading Value.

Position: Vertical

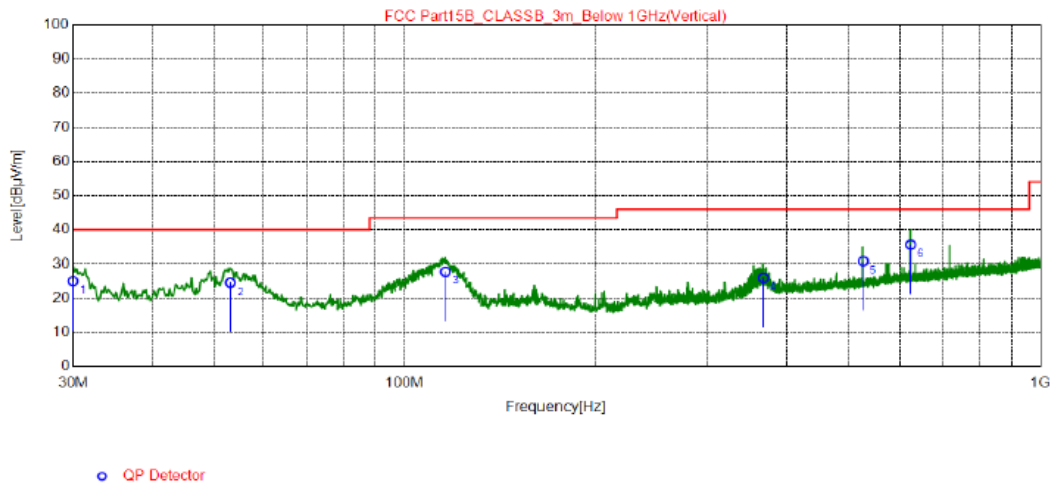

NO.	Freq. [MHz]	QP Reading [dBµV/m]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.00	36.64	-11.67	24.97	40.00	15.03	100	153	Vertical
2	53.08	34.42	-9.88	24.54	40.00	15.46	100	42	Vertical
3	115.9	40.71	-13.00	27.71	43.50	15.79	100	0	Vertical
4	367.7	32.9	-6.98	25.92	46.00	20.08	100	171	Vertical
5	527.9	34.89	-4.06	30.83	46.00	15.17	100	160	Vertical
6	624.0	37.93	-2.26	35.67	46.00	10.33	100	57	Vertical


#### REMARKS:

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value
4. Factor = Antenna Factor + Amplifier Factor + Cable loss
5. QP value = Factor + Reading Value.

## 5.6 Test Result and Data (1GHz ~ 18GHz)

For adaptor: KA06E-0501000US

Position: Horizontal

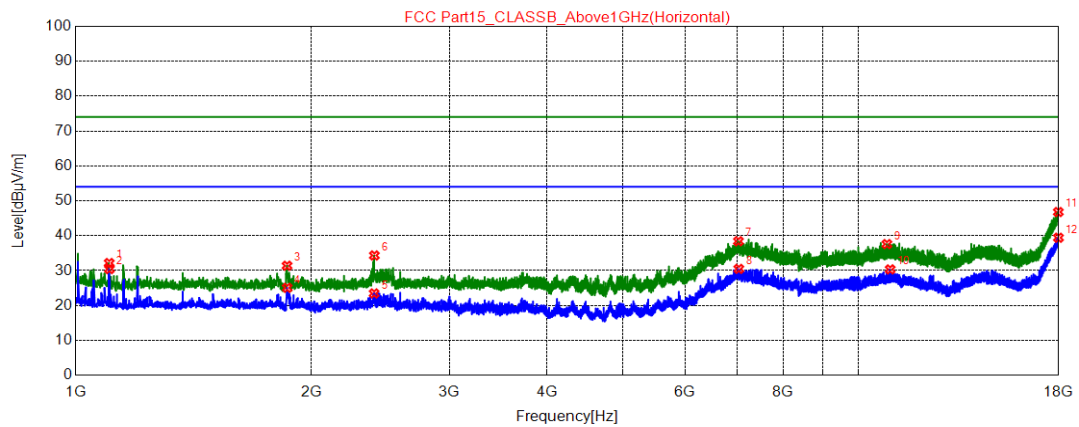


★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	1103.7000	52.33	32.16	74.00	41.84	100	186	Horizontal	PK
2	1104.5500	50.60	30.43	54.00	23.57	100	148	Horizontal	AV
3	1861.9000	49.06	31.38	74.00	42.62	100	109	Horizontal	PK
4	1862.7500	42.72	25.05	54.00	28.95	100	148	Horizontal	AV
5	2405.0500	39.21	23.45	54.00	30.55	100	224	Horizontal	AV
6	2406.7500	50.08	34.33	74.00	39.67	100	186	Horizontal	PK
7	7018.8500	38.51	38.40	74.00	35.60	100	186	Horizontal	PK
8	7027.3500	30.61	30.48	54.00	23.52	100	32	Horizontal	AV
9	10862.550	37.42	37.59	74.00	36.41	100	224	Horizontal	PK
10	10966.250	29.98	30.34	54.00	23.66	100	301	Horizontal	AV
11	17977.900	32.20	46.78	74.00	27.22	100	148	Horizontal	PK
12	17984.700	24.76	39.41	54.00	14.59	100	70	Horizontal	AV

### REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit – Level

Position: Vertical

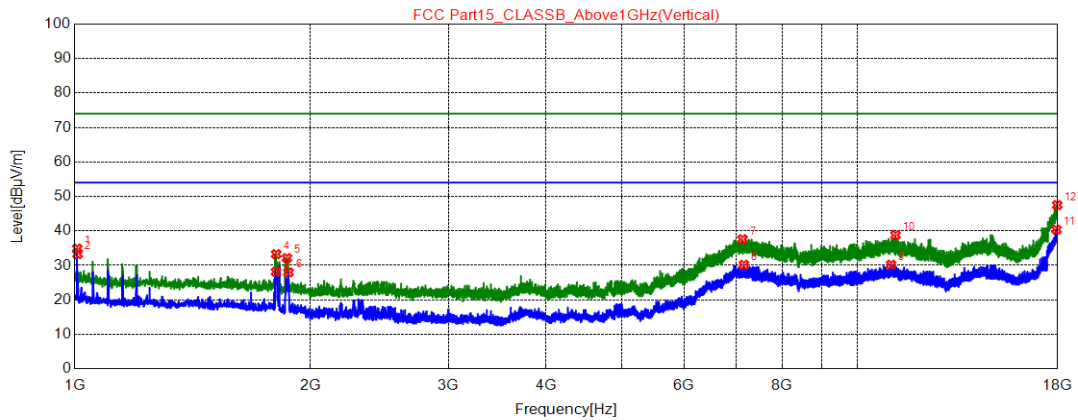

★ AV Detector

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle[°]	Polarity	Detector
1	1007.6500	55.41	34.91	74.00	39.09	100	59	Vertical	PK
2	1008.5000	53.76	33.26	54.00	20.74	100	20	Vertical	AV
3	1807.5000	45.99	28.15	54.00	25.85	100	327	Vertical	AV
4	1808.3500	51.10	33.26	74.00	40.74	100	212	Vertical	PK
5	1867.0000	49.79	32.13	74.00	41.87	100	327	Vertical	PK
6	1875.5000	45.60	27.97	54.00	26.03	100	289	Vertical	AV
7	7124.2500	37.97	37.60	74.00	36.40	100	136	Vertical	PK
8	7154.0000	30.64	30.19	54.00	23.81	100	97	Vertical	AV
9	11030.000	29.78	30.21	54.00	23.79	100	327	Vertical	AV
10	11171.950	38.29	38.79	74.00	35.21	100	289	Vertical	PK
11	17935.400	26.23	40.36	54.00	13.64	100	174	Vertical	AV
12	17972.800	32.96	47.49	74.00	26.51	100	136	Vertical	PK

#### REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit –Level


## 5.7 Test Photographs (30MHz ~ 1000MHz)

Adaptor: KA06E-0501000US




## 5.8 Test Photographs (1000MHz ~ 18000MHz)

Adaptor: KA06E-0501000US

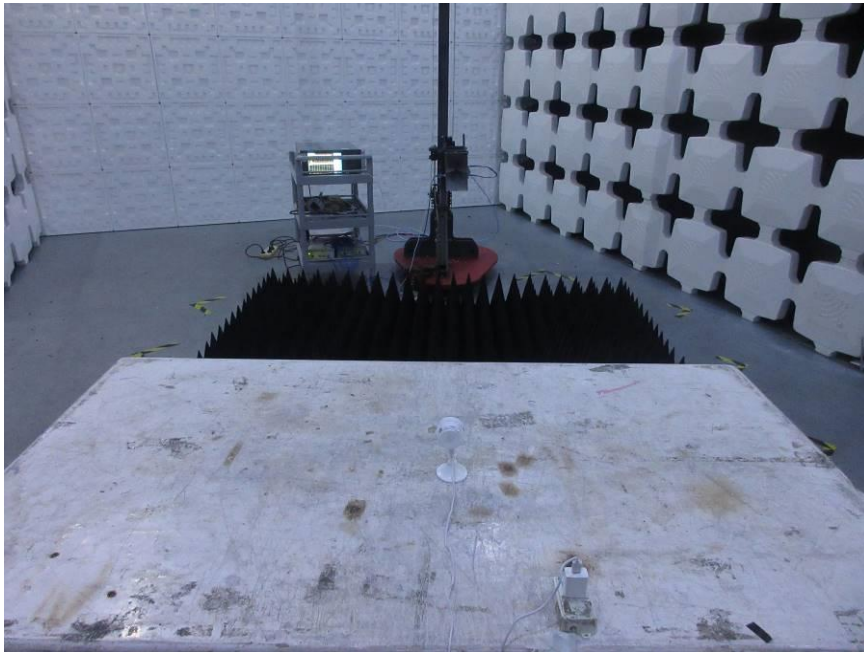




## 6 Photographs of EUT

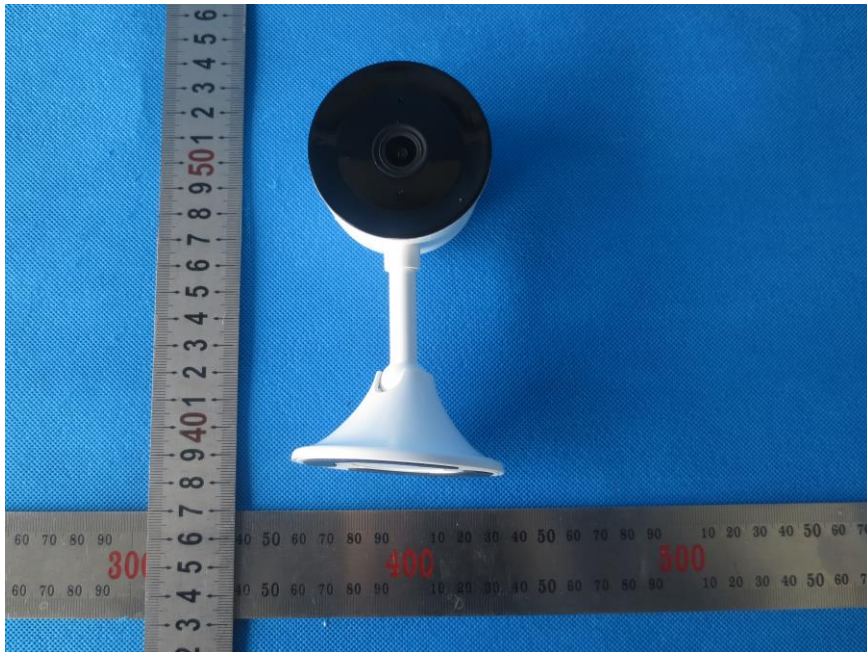

Adaptor: KA06E-0501000US

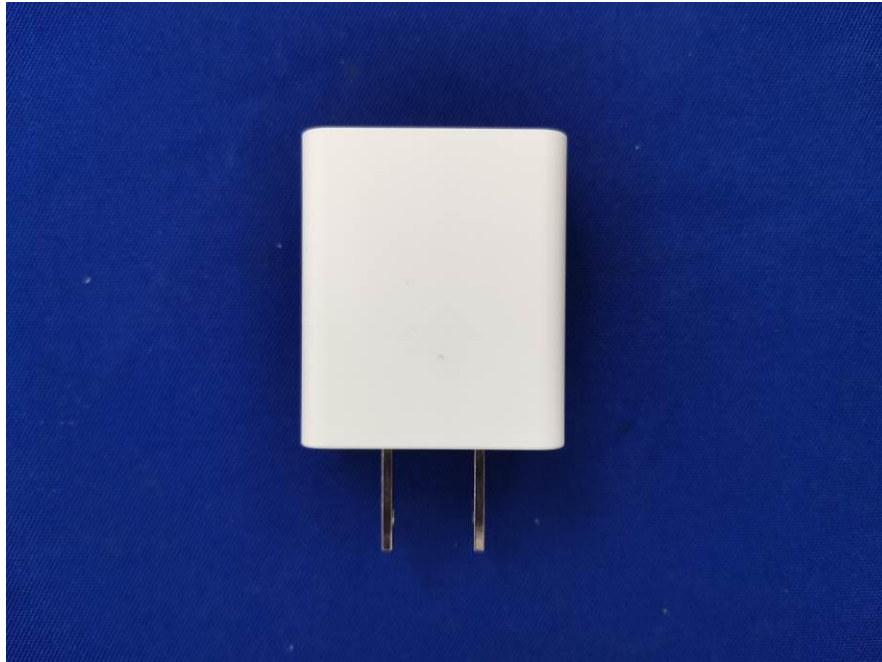





BUREAU  
VERITAS



--- END ---