

# FCC Test Report

**Applicant** : GDU-Tech Co., Ltd.

**Address** : Building 2, No.5, Huanglongshan South Road,  
Donghu New Technology Development Zone,  
Wuhan 430074, China

**Product Name** : Quadcopter UAV

**Report Date** : Nov. 08, 2023

**Shenzhen Anbotek Compliance Laboratory Limited**



**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline  
400-003-0500  
www.anbotek.com.cn



# Contents

|                                                    |    |
|----------------------------------------------------|----|
| 1. General Information .....                       | 6  |
| 1.1. Client Information .....                      | 6  |
| 1.2. Description of Device (EUT) .....             | 6  |
| 1.3. Auxiliary Equipment Used During Test .....    | 7  |
| 1.4. Operation channel list .....                  | 8  |
| 1.5. Description of Test Modes .....               | 8  |
| 1.6. Measurement Uncertainty .....                 | 8  |
| 1.7. Test Summary .....                            | 9  |
| 1.8. Description of Test Facility .....            | 10 |
| 1.9. Disclaimer .....                              | 10 |
| 1.10. Test Equipment List .....                    | 11 |
| 2. Conducted Emission at AC power line .....       | 13 |
| 2.1. EUT Operation .....                           | 13 |
| 2.2. Test Setup .....                              | 13 |
| 2.3. Test Data .....                               | 13 |
| 3. Duty Cycle .....                                | 14 |
| 3.1. EUT Operation .....                           | 14 |
| 3.2. Test Setup .....                              | 14 |
| 3.3. Test Data .....                               | 14 |
| 4. Maximum conducted output power .....            | 15 |
| 4.1. EUT Operation .....                           | 15 |
| 4.2. Test Setup .....                              | 16 |
| 4.3. Test Data .....                               | 16 |
| 5. Power spectral density .....                    | 17 |
| 5.1. EUT Operation .....                           | 18 |
| 5.2. Test Setup .....                              | 18 |
| 5.3. Test Data .....                               | 18 |
| 6. Emission bandwidth and occupied bandwidth ..... | 19 |
| 6.1. EUT Operation .....                           | 20 |
| 6.2. Test Setup .....                              | 20 |
| 6.3. Test Data .....                               | 20 |
| 7. Band edge emissions (Radiated) .....            | 21 |
| 7.1. EUT Operation .....                           | 23 |
| 7.2. Test Setup .....                              | 23 |
| 7.3. Test Data .....                               | 24 |
| 8. Undesirable emission limits (below 1GHz) .....  | 25 |
| 8.1. EUT Operation .....                           | 27 |
| 8.2. Test Setup .....                              | 27 |
| 8.3. Test Data .....                               | 28 |
| 9. Undesirable emission limits (above 1GHz) .....  | 30 |
| 9.1. EUT Operation .....                           | 32 |



|                                           |    |
|-------------------------------------------|----|
| 9.2. Test Setup .....                     | 32 |
| 9.3. Test Data .....                      | 33 |
| APPENDIX I -- TEST SETUP PHOTOGRAPH ..... | 34 |
| APPENDIX II -- EXTERNAL PHOTOGRAPH .....  | 34 |
| APPENDIX III -- INTERNAL PHOTOGRAPH ..... | 34 |



Report No.: 18220WC30201904

FCC ID: 2A8WC-S400E

Page 4 of 34

## TEST REPORT

Applicant : GDU-Tech Co., Ltd.

Manufacturer : GDU-Tech Co., Ltd.

Product Name : Quadcopter UAV

Test Model No. : S400E

Reference Model No. : N/A

Trade Mark :



Rating(s) : Input: DC 23.1V, 14000mAh battery inside

**Test Standard(s) : 47 CFR Part 15E**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with above listed standard(s) requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt:

Sept. 14, 2023

Date of Test:

Sept. 14, 2023 to Nov. 01, 2023

Prepared By:

(TuTu Hong)

Approved &amp; Authorized Signer:

(Edward Pan)

**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com.cn



## Revision History

| Report Version | Description     | Issued Date   |
|----------------|-----------------|---------------|
| R00            | Original Issue. | Nov. 08, 2023 |
|                |                 |               |
|                |                 |               |

## Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline  
400-003-0500  
www.anbotek.com.cn



## 1. General Information

### 1.1. Client Information

|              |   |                                                                                                         |
|--------------|---|---------------------------------------------------------------------------------------------------------|
| Applicant    | : | GDU-Tech Co., Ltd.                                                                                      |
| Address      | : | Building 2, No.5, Huanglongshan South Road, Donghu New Technology Development Zone, Wuhan 430074, China |
| Manufacturer | : | GDU-Tech Co., Ltd.                                                                                      |
| Address      | : | Building 2, No.5, Huanglongshan South Road, Donghu New Technology Development Zone, Wuhan 430074, China |
| Factory      | : | GDU-Tech Co., Ltd.                                                                                      |
| Address      | : | Building 2, No.5, Huanglongshan South Road, Donghu New Technology Development Zone, Wuhan 430074, China |

### 1.2. Description of Device (EUT)

|                     |   |                                                                                           |
|---------------------|---|-------------------------------------------------------------------------------------------|
| Product Name        | : | Quadcopter UAV                                                                            |
| Test Model No.      | : | S400E                                                                                     |
| Reference Model No. | : | N/A                                                                                       |
| Trade Mark          | : |        |
| Test Power Supply   | : | DC 23.1V battery inside                                                                   |
| Test Sample No.     | : | 1-2-1(Normal Sample), 1-2-2(Engineering Sample)                                           |
| Adapter             | : | Model: CPD-BC12<br>Input: AC100-240V 5A(max) 50/60Hz<br>Output: 26.4V= 14A;12V= 3A;5V= 3A |

#### RF Specification

|                          |   |                                                        |
|--------------------------|---|--------------------------------------------------------|
| Operation Frequency      | : | 5.8G(10M/20M): 5740-5820MHz<br>5.8G(40M): 5760-5820MHz |
| Number of Channel        | : | 5.8G(10M/20M): 5740-5820MHz<br>5.8G(40M): 5760-5820MHz |
| Modulation Type          | : | 5.8G:BPSK/QPSK/16QAM/64QAM                             |
| Antenna Type             | : | PCB Antenna                                            |
| Antenna Gain(Peak)       | : | ANT1: 2.75dBi<br>ANT2: 2.75dBi                         |
| Directional antenna gain | : | 5.76dBi                                                |

#### Remark:

- (1) All of the RF specification are provided by customer.
- (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



**1.3. Auxiliary Equipment Used During Test**

| Title | Manufacturer | Model No. | Serial No. |
|-------|--------------|-----------|------------|
| /     | /            | /         | /          |

**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline  
400-003-0500  
www.anbotek.com.cn



#### 1.4. Operation channel list

|         | Channel | Frequency (MHz) |
|---------|---------|-----------------|
| 10M/20M | 01      | 5740            |
|         | 02      | 5760            |
|         | 03      | 5780            |
|         | 04      | 5800            |
|         | 05      | 5820            |
| 40M     | 02      | 5760            |
|         | 03      | 5780            |
|         | 04      | 5800            |
|         | 05      | 5820            |

#### 1.5. Description of Test Modes

| Pretest Modes | Descriptions                                   |
|---------------|------------------------------------------------|
| TM1           | Keep the EUT in continuously transmitting mode |

#### 1.6. Measurement Uncertainty

| Parameter                                                                                                                                                                                                                    | Uncertainty                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| Conducted emissions (AMN 150kHz~30MHz)                                                                                                                                                                                       | 3.4dB                                                     |
| Conducted Output Power                                                                                                                                                                                                       | 0.76dB                                                    |
| Occupied Bandwidth                                                                                                                                                                                                           | 925Hz                                                     |
| Radiated spurious emissions (above 1GHz)                                                                                                                                                                                     | 1G-6GHz: 4.78dB;<br>6G-18GHz: 4.88dB<br>18G-40GHz: 5.68dB |
| Radiated emissions (Below 30MHz)                                                                                                                                                                                             | 3.53dB                                                    |
| Radiated spurious emissions (30MHz~1GHz)                                                                                                                                                                                     | Horizontal: 3.92dB; Vertical: 4.52dB                      |
| The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |                                                           |



**1.7. Test Summary**

| Test Items                                 | Test Modes | Status |
|--------------------------------------------|------------|--------|
| Conducted Emission at AC power line        | /          | N      |
| Duty Cycle                                 | Mode1      | P      |
| Maximum conducted output power             | Mode1      | P      |
| Power spectral density                     | Mode1      | P      |
| Emission bandwidth and occupied bandwidth  | Mode1      | P      |
| Band edge emissions (Radiated)             | Mode1      | P      |
| Undesirable emission limits (below 1GHz)   | Mode1      | P      |
| Undesirable emission limits (above 1GHz)   | Mode1      | P      |
| Note:<br>P: Pass<br>N: N/A, not applicable |            |        |



## 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC-Registration No.:184111**

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

### **ISED-Registration No.: 8058A**

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

### **Test Location**

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

## 1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotech and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



**1.10. Test Equipment List****Conducted Emission at AC power line**

| Item | Equipment                                   | Manufacturer     | Model No. | Serial No.    | Last Cal.  | Cal.Due Date |
|------|---------------------------------------------|------------------|-----------|---------------|------------|--------------|
| 1    | L.I.S.N. Artificial Mains Network           | Rohde & Schwarz  | ENV216    | 100055        | 2023-10-12 | 2024-10-11   |
| 2    | Three Phase V-type Artificial Power Network | CYBERTEK         | EM5040DT  | E215040D T001 | 2023-07-05 | 2024-07-04   |
| 3    | EMI Test Receiver                           | Rohde & Schwarz  | ESCI      | 100627        | 2023-10-12 | 2024-10-11   |
| 4    | Software Name EZ-EMC                        | Farad Technology | ANB-03A   | N/A           | /          | /            |

**Duty Cycle**

Maximum conducted output power

Power spectral density

Emission bandwidth and occupied bandwidth

| Item | Equipment                      | Manufacturer    | Model No. | Serial No.   | Last Cal.  | Cal.Due Date |
|------|--------------------------------|-----------------|-----------|--------------|------------|--------------|
| 1    | DC Power Supply                | IVYTECH         | IV3605    | 1804D360 510 | 2023-10-20 | 2024-10-19   |
| 2    | Spectrum Analyzer              | Rohde & Schwarz | FSV40-N   | 101792       | 2023-05-26 | 2024-05-25   |
| 3    | MXA Spectrum Analysis          | KEYSIGHT        | N9020A    | MY505318 23  | 2023-02-23 | 2024-02-22   |
| 4    | Oscilloscope                   | Tektronix       | MDO3012   | C020298      | 2023-10-12 | 2024-10-11   |
| 5    | MXG RF Vector Signal Generator | Agilent         | N5182A    | MY474206 47  | 2023-02-23 | 2024-10-22   |
| 6    | Power Meter                    | Agilent         | N1914A    | MY500011 02  | 2023-10-20 | 2024-10-19   |

**Band edge emissions (Radiated)**

Undesirable emission limits (above 1GHz)

| Item | Equipment                  | Manufacturer     | Model No.         | Serial No.  | Last Cal.  | Cal.Due Date |
|------|----------------------------|------------------|-------------------|-------------|------------|--------------|
| 1    | EMI Test Receiver          | Rohde & Schwarz  | ESR26             | 101481      | 2023-10-12 | 2024-10-11   |
| 2    | EMI Preamplifier           | SKET Electronic  | LNPA-0118G-45     | SKET-PA-002 | 2023-10-12 | 2024-10-11   |
| 3    | Double Ridged Horn Antenna | SCHWARZBECK      | BBHA 9120D        | 02555       | 2022-10-16 | 2025-10-15   |
| 4    | EMI Test Software EZ-EMC   | SHURPLE          | N/A               | N/A         | /          | /            |
| 5    | Horn Antenna               | A-INFO           | LB-180400-KF      | J21106062 8 | 2023-10-12 | 2024-10-11   |
| 6    | Spectrum Analyzer          | Rohde & Schwarz  | FSV40-N           | 101792      | 2023-05-26 | 2024-05-25   |
| 7    | Amplifier                  | Talent Microwave | TLLA18G40 G-50-30 | 23022802    | 2023-05-25 | 2024-05-24   |

**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com.cn



## Undesirable emission limits (below 1GHz)

| Item | Equipment                | Manufacturer    | Model No. | Serial No. | Last Cal.  | Cal.Due Date |
|------|--------------------------|-----------------|-----------|------------|------------|--------------|
| 1    | EMI Test Receiver        | Rohde & Schwarz | ESR26     | 101481     | 2023-10-12 | 2024-10-11   |
| 2    | Pre-amplifier            | SONOMA          | 310N      | 186860     | 2023-10-12 | 2024-10-11   |
| 3    | Bilog Broadband Antenna  | Schwarzbeck     | VULB9163  | 345        | 2022-10-23 | 2025-10-22   |
| 4    | EMI Test Software EZ-EMC | SHURPLE         | N/A       | N/A        | /          | /            |

## Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline  
400-003-0500  
www.anbotek.com.cn




## 2. Conducted Emission at AC power line

|                                                 |                                                                                                                                    |                              |           |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------|
| Test Requirement:                               | 47 CFR Part 15.207(a)                                                                                                              |                              |           |
| Test Limit:                                     | Frequency of emission (MHz)                                                                                                        | Conducted limit (dB $\mu$ V) |           |
|                                                 |                                                                                                                                    | Quasi-peak                   | Average   |
|                                                 | 0.15-0.5                                                                                                                           | 66 to 56*                    | 56 to 46* |
|                                                 | 0.5-5                                                                                                                              | 56                           | 46        |
|                                                 | 5-30                                                                                                                               | 60                           | 50        |
| *Decreases with the logarithm of the frequency. |                                                                                                                                    |                              |           |
| Test Method:                                    | Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices |                              |           |

### 2.1. EUT Operation

|                        |   |
|------------------------|---|
| Operating Environment: |   |
| Test mode:             | / |

### 2.2. Test Setup

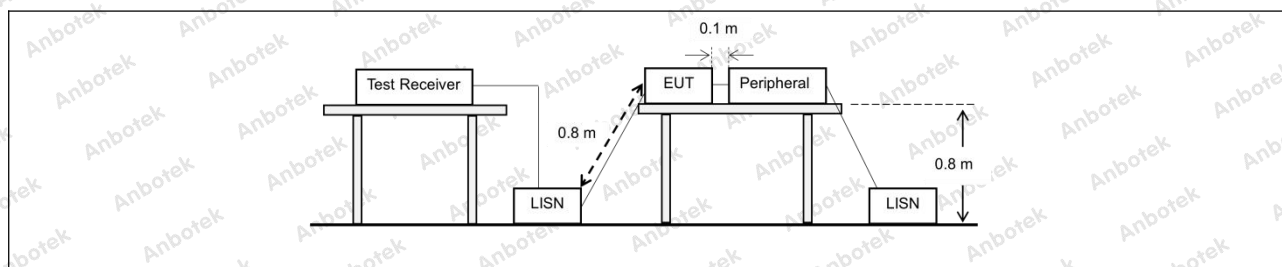

### 2.3. Test Data

|              |   |           |   |                       |   |
|--------------|---|-----------|---|-----------------------|---|
| Temperature: | / | Humidity: | / | Atmospheric Pressure: | / |
|--------------|---|-----------|---|-----------------------|---|

Not applicable for equipment operated with DC power supply.




### 3. Duty Cycle

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.                                                                                                                                                   |
| Test Limit:       | No limits, only for report use.                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Test Method:      | ANSI C63.10-2013 section 12.2 (b)                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Procedure:        | i) Set the center frequency of the instrument to the center frequency of the transmission.<br>ii) Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value.<br>iii) Set VBW $\geq$ RBW.<br>iv) Set detector = peak.<br>v) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ , where T is defined in item a1) of 12.2, and the number of sweep points across duration T exceeds 100. |

#### 3.1. EUT Operation

|                        |                                                        |
|------------------------|--------------------------------------------------------|
| Operating Environment: |                                                        |
| Test mode:             | 1: TM1: Keep the EUT in continuously transmitting mode |

#### 3.2. Test Setup

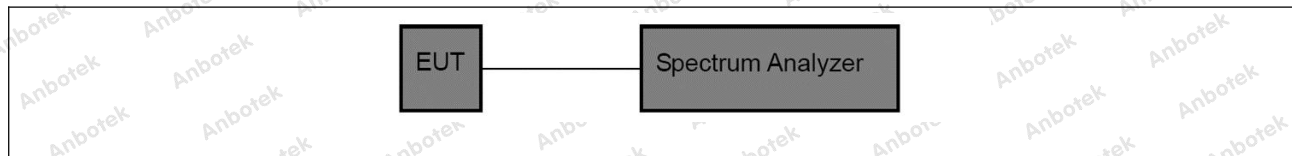

#### 3.3. Test Data

|              |         |           |        |                       |         |
|--------------|---------|-----------|--------|-----------------------|---------|
| Temperature: | 25.6 °C | Humidity: | 49.2 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|--------|-----------------------|---------|

Please Refer to Appendix for Details.



#### 4. Maximum conducted output power


|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15.407(a)(3)(i)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test Limit:       | <p>For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test Method:      | ANSI C63.10-2013, section 12.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Procedure:        | <p>Method SA-2</p> <p>a) Measure the duty cycle D of the transmitter output signal.</p> <p>b) Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.</p> <p>c) Set RBW = 1 MHz.</p> <p>d) Set VBW <math>\geq</math> 3 MHz.</p> <p>e) Number of points in sweep <math>\geq</math> <math>[2 \times \text{span} / \text{RBW}]</math>. (This gives bin-to-bin spacing <math>\leq</math> RBW / 2, so that narrowband signals are not lost between frequency bins.)</p> <p>f) Sweep time = auto.</p> <p>g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.</p> <p>h) Do not use sweep triggering. Allow the sweep to "free run."</p> <p>i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.</p> <p>j) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum</p> <p>k) Add <math>[10 \log (1 / D)]</math>, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.</p> |

##### 4.1. EUT Operation

|                        |                                                        |
|------------------------|--------------------------------------------------------|
| Operating Environment: |                                                        |
| Test mode:             | 1: TM1: Keep the EUT in continuously transmitting mode |



## 4.2. Test Setup

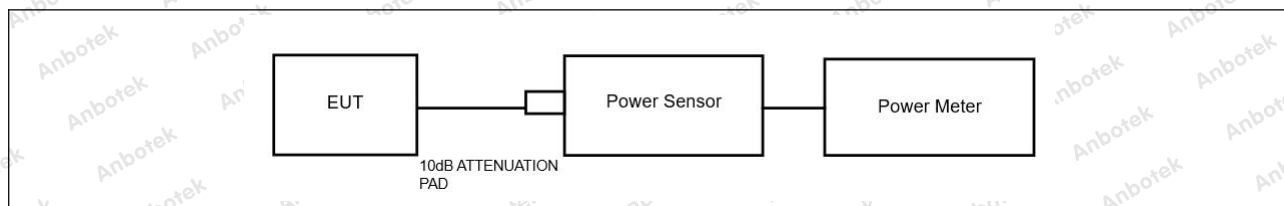

## 4.3. Test Data

|              |         |           |        |                       |         |
|--------------|---------|-----------|--------|-----------------------|---------|
| Temperature: | 25.6 °C | Humidity: | 49.2 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|--------|-----------------------|---------|

Please Refer to Appendix for Details.



## 5. Power spectral density

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15.407(a)(3)(i)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Test Limit:       | <p>For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.</p> <p>Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Test Method:      | ANSI C63.10-2013, section 12.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Procedure:        | <p>a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, "Compute power...." (This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.)</p> <p>b) Use the peak search function on the instrument to find the peak of the spectrum.</p> <p>c) Make the following adjustments to the peak value of the spectrum, if applicable:</p> <ol style="list-style-type: none"> <li>1) If method SA-2 or SA-2A was used, then add <math>[10 \log (1 / D)]</math>, where D is the duty cycle, to the peak of the spectrum.</li> <li>2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.</li> </ol> <p>d) The result is the PPSD.</p> <p>e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities. This requirement also permits use of resolution bandwidths less than 1 MHz "provided that the</p> |




|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply:<br>1) Set RBW $\geq 1 / T$ , where T is defined in 12.2 a).<br>2) Set VBW $\geq [3 \times \text{RBW}]$ .<br>3) Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle. |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 5.1. EUT Operation

Operating Environment:

|            |                                                        |
|------------|--------------------------------------------------------|
| Test mode: | 1: TM1: Keep the EUT in continuously transmitting mode |
|------------|--------------------------------------------------------|

### 5.2. Test Setup

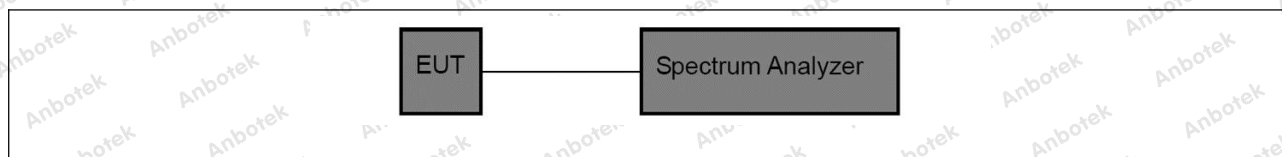

### 5.3. Test Data

|              |         |           |        |                       |         |
|--------------|---------|-----------|--------|-----------------------|---------|
| Temperature: | 25.6 °C | Humidity: | 49.2 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|--------|-----------------------|---------|

Please Refer to Appendix for Details.



## 6. Emission bandwidth and occupied bandwidth

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | U-NII 3, U-NII 4: 47 CFR Part 15.407(e)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test Limit:       | U-NII 3, U-NII 4: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Test Method:      | ANSI C63.10-2013, section 6.9.3 & 12.4<br>KDB 789033 D02, Clause C.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Procedure:        | <p>Occupied bandwidth:</p> <p>a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.</p> <p>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.</p> <p>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than <math>[10 \log (OBW/RBW)]</math> below the reference level. Specific guidance is given in 4.1.5.2.</p> <p>d) Step a) through step c) might require iteration to adjust within the specified range.</p> <p>e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.</p> <p>f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.</p> <p>g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.</p> <p>h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument</p> |



display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6 dB emission bandwidth:


- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.1. EUT Operation

Operating Environment:

Test mode: 1: TM1: Keep the EUT in continuously transmitting mode

### 6.2. Test Setup

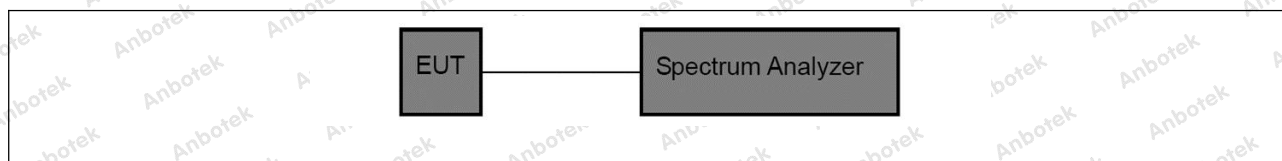

### 6.3. Test Data

|              |         |           |        |                       |         |
|--------------|---------|-----------|--------|-----------------------|---------|
| Temperature: | 25.6 °C | Humidity: | 49.2 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|--------|-----------------------|---------|

Please Refer to Appendix for Details.



## 7. Band edge emissions (Radiated)

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |               |                  |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------|------------------|
| Test Requirement: | 47 CFR Part 15.407(b)(4)<br>47 CFR Part 15.407(b)(10)                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |               |                  |
| Test Limit:       | For transmitters operating solely in the 5.725-5.850 GHz band:<br>All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.             |                     |               |                  |
|                   | MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | MHz                 | MHz           | GHz              |
|                   | 0.090-0.110                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
|                   | <sup>1</sup> 0.495-0.505                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
|                   | 2.1735-2.1905                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
|                   | 4.125-4.128                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
|                   | 4.17725-4.17775                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
|                   | 4.20725-4.20775                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
|                   | 6.215-6.218                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
|                   | 6.26775-6.26825                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
|                   | 6.31175-6.31225                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 123-138             | 2200-2300     | 14.47-14.5       |
|                   | 8.291-8.294                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
|                   | 8.362-8.366                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
|                   | 8.37625-8.38675                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
|                   | 8.41425-8.41475                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
|                   | 12.29-12.293                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
|                   | 12.51975-12.52025                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 240-285             | 3345.8-3358   | 36.43-36.5       |
|                   | 12.57675-12.57725                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
|                   | 13.36-13.41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |               |                  |
|                   | <sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |               |                  |
|                   | <sup>2</sup> Above 38.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                     |               |                  |
|                   | The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements. |                     |               |                  |
|                   | Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the                                                                                                                                                                                                                                                                                                                                                          |                     |               |                  |



|                 | following table:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                               |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------------|-------------------------------|-------------|-------------|-----|-------------|--------------|----|------------|----|----|-------|--------|---|--------|--------|---|---------|--------|---|-----------|-----|---|
|                 | <table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Frequency (MHz)               | Field strength (microvolts/meter) | Measurement distance (meters) | 0.009-0.490 | 2400/F(kHz) | 300 | 0.490-1.705 | 24000/F(kHz) | 30 | 1.705-30.0 | 30 | 30 | 30-88 | 100 ** | 3 | 88-216 | 150 ** | 3 | 216-960 | 200 ** | 3 | Above 960 | 500 | 3 |
| Frequency (MHz) | Field strength (microvolts/meter)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Measurement distance (meters) |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
| 0.009-0.490     | 2400/F(kHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 300                           |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
| 0.490-1.705     | 24000/F(kHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 30                            |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
| 1.705-30.0      | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 30                            |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
| 30-88           | 100 **                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 3                             |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
| 88-216          | 150 **                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 3                             |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
| 216-960         | 200 **                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 3                             |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
| Above 960       | 500                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3                             |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
| Test Method:    | ANSI C63.10-2013, section 12.7.4, 12.7.5, 12.7.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                               |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
| Procedure:      | <p>Above 1GHz:</p> <p>a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor</p> <p>2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.</p> <p>3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified</p> |                               |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                               |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                               |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                               |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |
|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                               |                                   |                               |             |             |     |             |              |    |            |    |    |       |        |   |        |        |   |         |        |   |           |     |   |



above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

## 7.1. EUT Operation

Operating Environment:

Test mode: 1: TM1: Keep the EUT in continuously transmitting mode

## 7.2. Test Setup

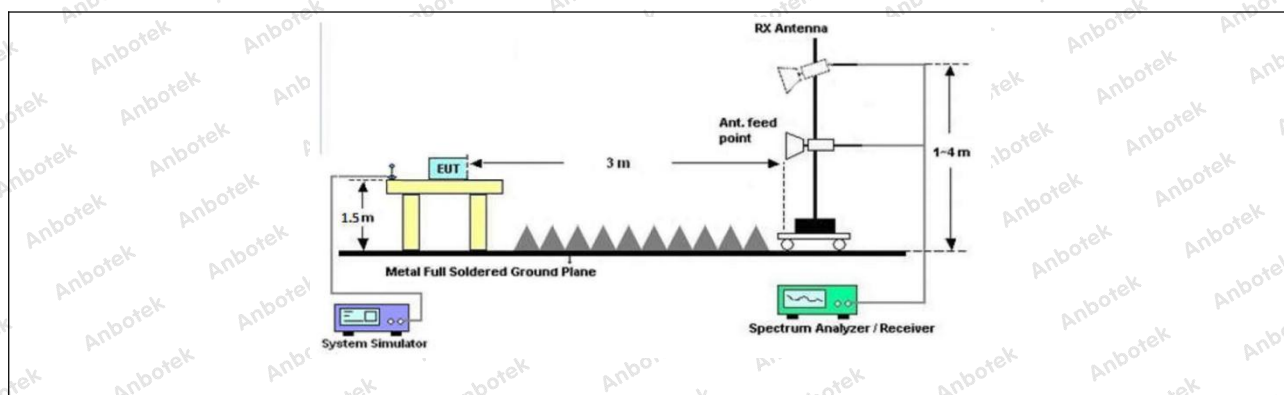

**7.3. Test Data**

|              |         |           |        |                       |         |
|--------------|---------|-----------|--------|-----------------------|---------|
| Temperature: | 25.6 °C | Humidity: | 49.2 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|--------|-----------------------|---------|

| TM1 / CH: L     |                |               |                 |                |                 |              |          |
|-----------------|----------------|---------------|-----------------|----------------|-----------------|--------------|----------|
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Antenna Pol. | Detector |
| 5725.00         | 38.29          | 16.37         | 54.66           | 74.00          | -19.34          | H            | Peak     |
| 5725.00         | 39.72          | 16.37         | 56.09           | 74.00          | -17.91          | V            | Peak     |
| 5725.00         | 29.12          | 16.70         | 45.82           | 54.00          | -8.18           | H            | AVG      |
| 5725.00         | 30.24          | 16.70         | 46.94           | 54.00          | -7.06           | V            | AVG      |

| TM1 / CH: H     |                |               |                 |                |                 |              |          |
|-----------------|----------------|---------------|-----------------|----------------|-----------------|--------------|----------|
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Antenna Pol. | Detector |
| 5850.00         | 39.26          | 17.21         | 56.47           | 68.20          | -11.73          | H            | Peak     |
| 5850.00         | 39.65          | 17.21         | 56.86           | 68.20          | -11.34          | V            | Peak     |
| 5850.00         | 29.22          | 17.21         | 46.43           | 54.00          | -7.57           | H            | AVG      |
| 5850.00         | 29.21          | 17.21         | 46.42           | 54.00          | -7.58           | V            | AVG      |

Remark: 1. Result=Reading + Factor



## 8. Undesirable emission limits (below 1GHz)

|                   |                                                                                                                                                                                                                                                                                                                                       |                                   |                               |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------------------------|
| Test Requirement: | 47 CFR Part 15.407(b)(9)                                                                                                                                                                                                                                                                                                              |                                   |                               |
| Test Limit:       | Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.                                                                                                                                                                                                                              |                                   |                               |
|                   | Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:                                                                                                                                                                 |                                   |                               |
|                   | Frequency (MHz)                                                                                                                                                                                                                                                                                                                       | Field strength (microvolts/meter) | Measurement distance (meters) |
|                   | 0.009-0.490                                                                                                                                                                                                                                                                                                                           | 2400/F(kHz)                       | 300                           |
|                   | 0.490-1.705                                                                                                                                                                                                                                                                                                                           | 24000/F(kHz)                      | 30                            |
|                   | 1.705-30.0                                                                                                                                                                                                                                                                                                                            | 30                                | 30                            |
|                   | 30-88                                                                                                                                                                                                                                                                                                                                 | 100 **                            | 3                             |
|                   | 88-216                                                                                                                                                                                                                                                                                                                                | 150 **                            | 3                             |
|                   | 216-960                                                                                                                                                                                                                                                                                                                               | 200 **                            | 3                             |
|                   | Above 960                                                                                                                                                                                                                                                                                                                             | 500                               | 3                             |
| Test Method:      | ANSI C63.10-2013, section 12.7.4, 12.7.5, 12.7.6                                                                                                                                                                                                                                                                                      |                                   |                               |
| Procedure:        | Below 1GHz:                                                                                                                                                                                                                                                                                                                           |                                   |                               |
|                   | a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.                                                                                                            |                                   |                               |
|                   | b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.                                                                                                                                                                                      |                                   |                               |
|                   | c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.                                                                                                       |                                   |                               |
|                   | d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.             |                                   |                               |
|                   | e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.                                                                                                                                                                                                                           |                                   |                               |
|                   | f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet. |                                   |                               |
|                   | g. Test the EUT in the lowest channel, the middle channel, the Highest channel.                                                                                                                                                                                                                                                       |                                   |                               |
|                   | h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.                                                                                                                                                                           |                                   |                               |
|                   | i. Repeat above procedures until all frequencies measured was complete.                                                                                                                                                                                                                                                               |                                   |                               |
|                   | Remark:                                                                                                                                                                                                                                                                                                                               |                                   |                               |



1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

**Above 1GHz:**

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

**Remark:**

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak



measurement is shown in the report.


4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

## 8.1. EUT Operation

Operating Environment:

Test mode: 1: TM1: Keep the EUT in continuously transmitting mode


## 8.2. Test Setup

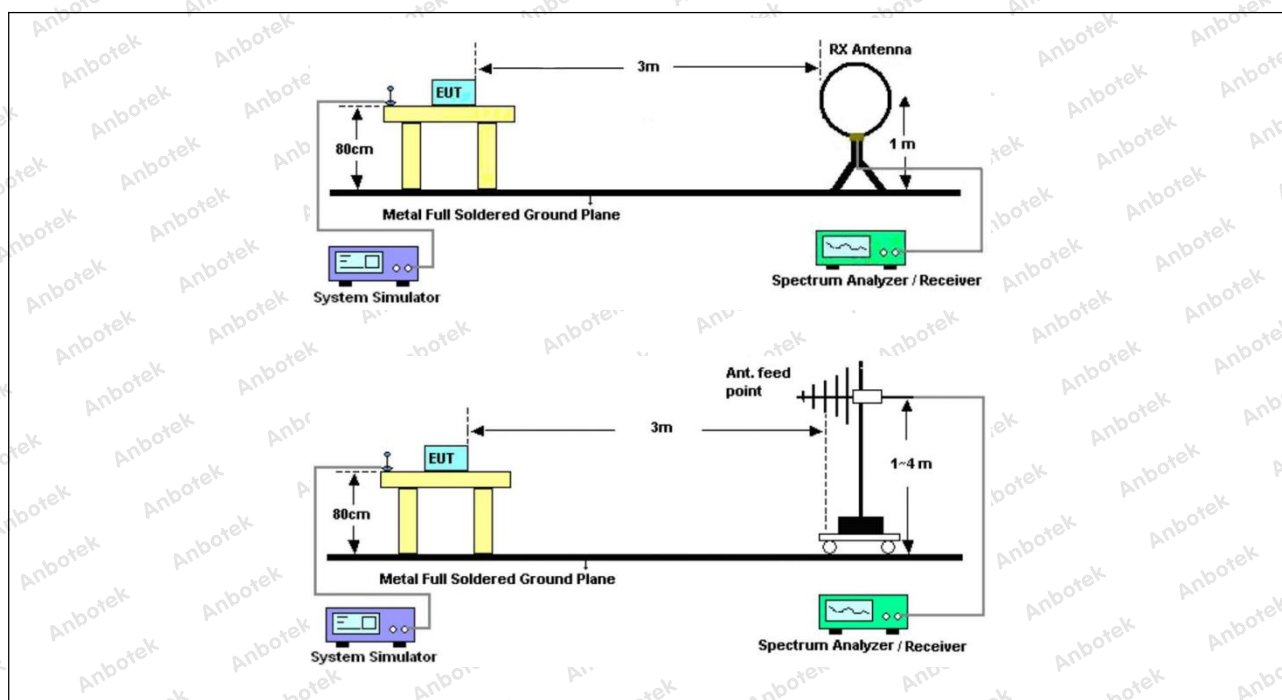

## 8.3. Test Data

|              |         |           |        |                       |         |
|--------------|---------|-----------|--------|-----------------------|---------|
| Temperature: | 25.6 °C | Humidity: | 49.2 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|--------|-----------------------|---------|

TM1 / Polarization: Horizontal / Band: 5725-5850 MHz / BW: 10 / CH: L

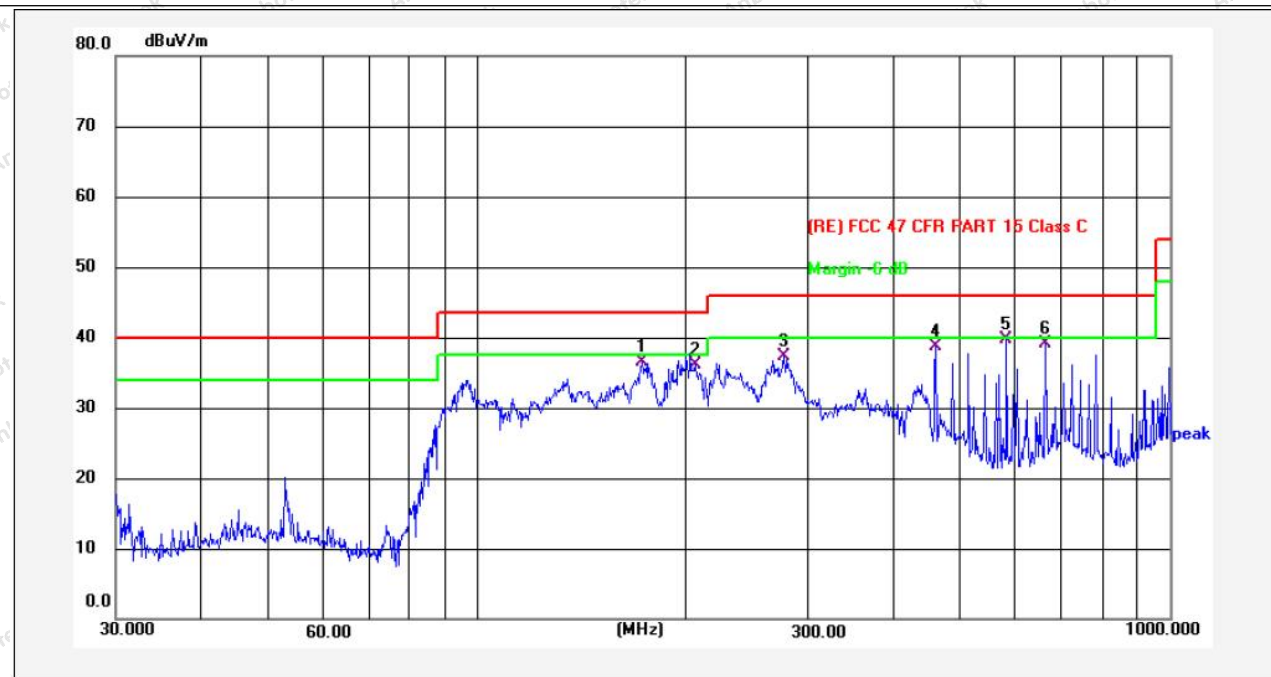

| No. | Freq. (MHz) | Reading (dBUV) | Factor (dB/m) | Result (dBUV/m) | Limit (dBUV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1   | 173.1290    | 60.42          | -23.97        | 36.45           | 43.50          | -7.05           | QP       |             |              |        |
| 2   | 206.3975    | 57.91          | -21.90        | 36.01           | 43.50          | -7.49           | QP       |             |              |        |
| 3   | 277.9450    | 58.00          | -20.68        | 37.32           | 46.00          | -8.68           | QP       |             |              |        |
| 4   | 459.1143    | 54.78          | -16.14        | 38.64           | 46.00          | -7.36           | QP       |             |              |        |
| 5   | 582.4871    | 53.74          | -13.95        | 39.79           | 46.00          | -6.21           | QP       |             |              |        |
| 6   | 662.8913    | 51.86          | -12.67        | 39.19           | 46.00          | -6.81           | QP       |             |              |        |



Report No.: 18220WC30201904

FCC ID: 2A8WC-S400E


Page 29 of 34

Temperature: 25.6 °C

Humidity: 49.2 %

Atmospheric Pressure: 101 kPa

TM1 / Polarization: Vertical / Band: 5725-5850 MHz / BW: 10 / CH: L

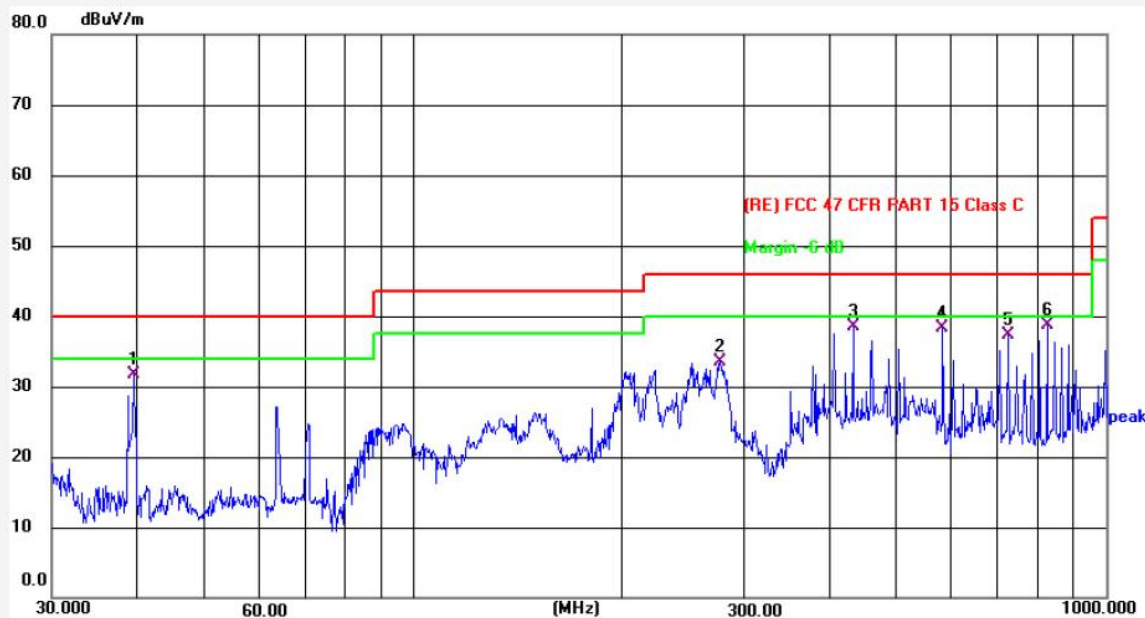

| No. | Freq. (MHz) | Reading (dBUV) | Factor (dB/m) | Result (dBUV/m) | Limit (dBUV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1   | 39.4543     | 54.33          | -22.70        | 31.63           | 40.00          | -8.37           | QP       |             |              |        |
| 2   | 278.0668    | 54.13          | -20.68        | 33.45           | 46.00          | -12.55          | QP       |             |              |        |
| 3   | 431.9771    | 55.23          | -16.74        | 38.49           | 46.00          | -7.51           | QP       |             |              |        |
| 4   | 582.4871    | 52.25          | -13.95        | 38.30           | 46.00          | -7.70           | QP       |             |              |        |
| 5   | 723.3093    | 48.97          | -11.69        | 37.28           | 46.00          | -8.72           | QP       |             |              |        |
| 6   | 823.5131    | 48.53          | -9.86         | 38.67           | 46.00          | -7.33           | QP       |             |              |        |

Note: Only record the worst data in the report.



**9. Undesirable emission limits (above 1GHz)**

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |               |                  |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------|------------------|
| Test Requirement: | 47 CFR Part 15.407(b)(4)<br>47 CFR Part 15.407(b)(10)                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     |               |                  |
| Test Limit:       | For transmitters operating solely in the 5.725-5.850 GHz band:<br>All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.             |                     |               |                  |
|                   | MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | MHz                 | MHz           | GHz              |
|                   | 0.090-0.110                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
|                   | <sup>1</sup> 0.495-0.505                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
|                   | 2.1735-2.1905                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
|                   | 4.125-4.128                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
|                   | 4.17725-4.17775                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
|                   | 4.20725-4.20775                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
|                   | 6.215-6.218                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
|                   | 6.26775-6.26825                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
|                   | 6.31175-6.31225                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 123-138             | 2200-2300     | 14.47-14.5       |
|                   | 8.291-8.294                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
|                   | 8.362-8.366                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
|                   | 8.37625-8.38675                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
|                   | 8.41425-8.41475                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
|                   | 12.29-12.293                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
|                   | 12.51975-12.52025                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 240-285             | 3345.8-3358   | 36.43-36.5       |
|                   | 12.57675-12.57725                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
|                   | 13.36-13.41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |               |                  |
|                   | <sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |               |                  |
|                   | <sup>2</sup> Above 38.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                     |               |                  |
|                   | The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements. |                     |               |                  |
|                   | Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the                                                                                                                                                                                                                                                                                                                                                          |                     |               |                  |



|              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                   |                               |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------------------------|
|              | following table:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                   |                               |
|              | Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Field strength (microvolts/meter) | Measurement distance (meters) |
|              | 0.009-0.490                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 2400/F(kHz)                       | 300                           |
|              | 0.490-1.705                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 24000/F(kHz)                      | 30                            |
|              | 1.705-30.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 30                                | 30                            |
|              | 30-88                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 100 **                            | 3                             |
|              | 88-216                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 150 **                            | 3                             |
|              | 216-960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 200 **                            | 3                             |
|              | Above 960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 500                               | 3                             |
| Test Method: | ANSI C63.10-2013, section 12.7.4, 12.7.5, 12.7.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                   |                               |
| Procedure:   | <p>Above 1GHz:</p> <p>a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor</p> <p>2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.</p> <p>3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified</p> |                                   |                               |



above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

## 9.1. EUT Operation

Operating Environment:

Test mode: 1: TM1: Keep the EUT in continuously transmitting mode

## 9.2. Test Setup

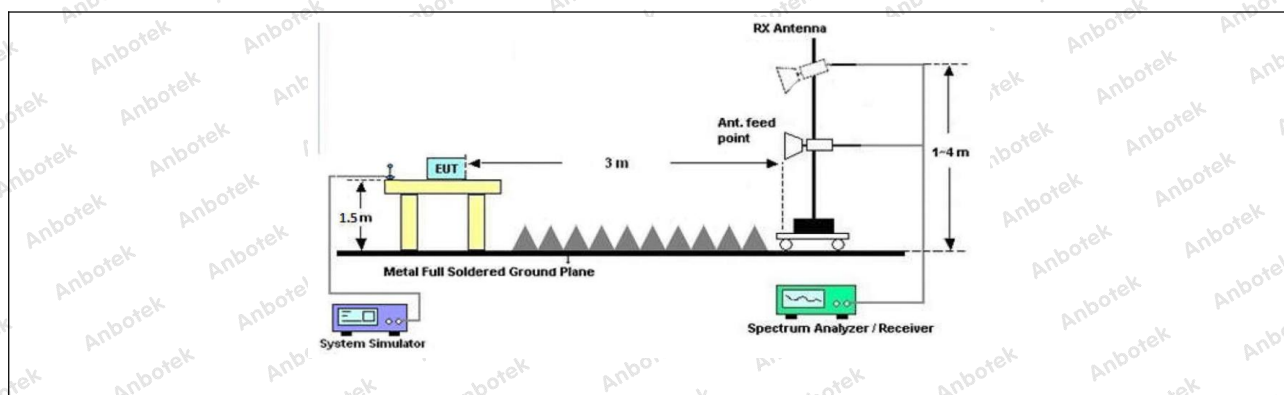

## 9.3. Test Data

|              |         |           |        |                       |         |
|--------------|---------|-----------|--------|-----------------------|---------|
| Temperature: | 25.6 °C | Humidity: | 49.2 % | Atmospheric Pressure: | 101 kPa |
|--------------|---------|-----------|--------|-----------------------|---------|

| TM1 / CH: L     |                |               |                 |                |                 |              |          |
|-----------------|----------------|---------------|-----------------|----------------|-----------------|--------------|----------|
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over limit (dB) | Antenna Pol. | Detector |
| 11520.000       | 28.51          | 23.36         | 51.87           | 68.20          | -16.33          | V            | Peak     |
| 17280.000       | 29.85          | 31.97         | 61.82           | 68.20          | -6.38           | V            | Peak     |
| 11520.000       | 28.96          | 23.36         | 52.32           | 68.20          | -15.88          | H            | Peak     |
| 17280.000       | 30.08          | 31.97         | 62.05           | 68.20          | -6.15           | H            | Peak     |
| 11520.000       | 17.80          | 23.36         | 41.16           | 54.00          | -12.84          | V            | AVG      |
| 17280.000       | 18.56          | 31.97         | 50.53           | 54.00          | -3.47           | V            | AVG      |
| 11520.000       | 17.99          | 23.36         | 41.35           | 54.00          | -12.65          | H            | AVG      |
| 17280.000       | 18.04          | 31.97         | 50.01           | 54.00          | -3.99           | H            | AVG      |

| TM1 / CH: M     |                |               |                 |                |                 |              |          |
|-----------------|----------------|---------------|-----------------|----------------|-----------------|--------------|----------|
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over limit (dB) | Antenna Pol. | Detector |
| 11560.000       | 29.09          | 23.42         | 52.51           | 68.20          | -15.69          | V            | Peak     |
| 17340.000       | 29.73          | 32.18         | 61.91           | 68.20          | -6.29           | V            | Peak     |
| 11560.000       | 29.16          | 23.42         | 52.58           | 68.20          | -15.62          | H            | Peak     |
| 17340.000       | 30.17          | 32.18         | 62.35           | 68.20          | -5.85           | H            | Peak     |
| 11560.000       | 19.072         | 23.42         | 42.49           | 54.00          | -11.51          | V            | AVG      |
| 17340.000       | 18.880         | 32.18         | 51.06           | 54.00          | -2.94           | V            | AVG      |
| 11560.000       | 18.976         | 23.42         | 42.40           | 54.00          | -11.60          | H            | AVG      |
| 17340.000       | 18.425         | 32.18         | 50.60           | 54.00          | -3.40           | H            | AVG      |

| TM1 / CH: H     |                |               |                 |                |                 |              |          |
|-----------------|----------------|---------------|-----------------|----------------|-----------------|--------------|----------|
| Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over limit (dB) | Antenna Pol. | Detector |
| 11640.000       | 28.60          | 23.49         | 52.09           | 68.20          | -16.11          | V            | Peak     |
| 17460.000       | 29.97          | 32.39         | 62.36           | 68.20          | -5.84           | V            | Peak     |
| 11640.000       | 28.90          | 23.49         | 52.39           | 68.20          | -15.81          | H            | Peak     |
| 17460.000       | 29.78          | 32.39         | 62.17           | 68.20          | -6.03           | H            | Peak     |
| 11640.000       | 18.14          | 23.49         | 41.63           | 54.00          | -12.37          | V            | AVG      |
| 17460.000       | 18.68          | 32.39         | 51.07           | 54.00          | -2.93           | V            | AVG      |
| 11640.000       | 18.16          | 23.49         | 41.65           | 54.00          | -12.35          | H            | AVG      |
| 17460.000       | 18.39          | 32.39         | 50.78           | 54.00          | -3.22           | H            | AVG      |

## Remark:

1. Result = Reading + Factor
2. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.
3. Only record the worst data (BW: 10MHz) in the report.

## Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
 Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com.cn



**APPENDIX I -- TEST SETUP PHOTOGRAPH**

Please refer to separated files Appendix I -- Test Setup Photograph\_RF

**APPENDIX II -- EXTERNAL PHOTOGRAPH**

Please refer to separated files Appendix II -- External Photograph

**APPENDIX III -- INTERNAL PHOTOGRAPH**

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

