



TEST REPORT

Applicant: Shenzhen Guan Ersheng Electronics Co., LTD.
Address of Applicant: Building 301, No. 355 Zhangge Road, Zhangge Community, Fucheng Street, Longhua New District, Shenzhen
Manufacturer/Factory: Shenzhen Guan Ersheng Electronics Co., LTD.
Address of Manufacturer/Factory: Building 301, No. 355 Zhangge Road, Zhangge Community, Fucheng Street, Longhua New District, Shenzhen
Product Name: Bluetooth Headset
Model No.: YX48
Trade Mark: N/A
FCC ID: 2BF2R-YX48
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of Test: Jan.13, 2025-Jan.16, 2025
Date of report issued: Jan.17, 2025

Remark:

The results shown in this test report refer only to the sample(s) tested , this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:

Reviewed by:

Approved by:

Project Engineer

Project Manager

Authorized Signature



Report Revision History

Report No.	Description	Issue Date
ET-25010045E	Original	Jan.17, 2025

Contents

Page

1	TEST SUMMARY	4
2	GENERAL INFORMATION	5
2.1	GENERAL DESCRIPTION OF EUT	5
2.2	TEST MODE	7
2.3	DESCRIPTION OF SUPPORT UNITS	7
2.4	DEVIATION FROM STANDARDS	7
2.5	ABNORMALITIES FROM STANDARD CONDITIONS	7
2.6	TEST FACILITY	7
2.7	TEST LOCATION	7
2.8	ADDITIONAL INSTRUCTIONS	7
3	TEST INSTRUMENTS LIST	8
4	TEST RESULTS AND MEASUREMENT DATA	9
4.1	ANTENNA REQUIREMENT	9
4.2	CONDUCTED EMISSIONS	10
4.3	CONDUCTED PEAK OUTPUT POWER	13
4.4	20dB EMISSION BANDWIDTH	14
4.5	CARRIER FREQUENCIES SEPARATION	17
4.6	HOPPING CHANNEL NUMBER	20
4.7	DWELL TIME	22
4.8	BAND EDGE	26
4.8.1	Conducted Emission Method	26
4.8.2	Radiated Emission Method	31
4.9	SPURIOUS EMISSION	33
4.9.1	Conducted Emission Method	33
4.9.2	Radiated Emission Method	36
5	TEST SETUP PHOTO	44
6	EUT CONSTRUCTIONAL DETAILS	44

1 Test Summary

Test Item	Section in CFR 47	Result	Test by
Antenna Requirement	15.203/15.247 (c)	Pass	/
AC Power Line Conducted Emission	15.207	Pass	Carr Kang
Conducted Peak Output Power	15.247 (b)(1)	Pass	Yvan Fan
20dB Occupied Bandwidth	15.247 (a)(1)	Pass	Yvan Fan
Carrier Frequencies Separation	15.247 (a)(1)	Pass	Yvan Fan
Hopping Channel Number	15.247 (a)(1)(iii)	Pass	Yvan Fan
Dwell Time	15.247 (a)(1)(iii)	Pass	Yvan Fan
Radiated Emission	15.205/15.209	Pass	Carr Kang
Band Edge	15.247(d)	Pass	Yvan Fan

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013
3. EUT is a Bluetooth earphone that has undergone testing on both the left and right earphones. This report only records the worst data for the left ear

Measurement Uncertainty

Test Item	Uncertainty Criterion	Measurement Uncertainty	Notes
Occupied Channel Bandwidth	±5%	±0.55%	(1)
RF output power, conducted	±1.5dB	±0.99dB	(1)
Dwell Time	±5%	±0.05%	(1)
Power Spectral Density, conducted	±3dB	±0.61dB	(1)
Unwanted Emissions, conducted	±3dB	±0.64dB	(1)
AC Power Line Conducted Emission	±6dB	± 2.64 dB	(1)
Radiated emissions Below 1GHz	±6dB	±4.32 dB	(1)
Radiated emissions Above 1GHz	±6dB	±4.56dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

2 General Information

2.1 General Description of EUT

Product Name:	Bluetooth Headset
Model No.:	YX48
Test Model:	YX48
Difference of model(s)	N/A
Hardware Version:	XRX-GES-YX43-L-V1.0 (left ear) XRX-GES-YX43-R-V1.0 (Right ear) XRX-GES-YX-48-IP5513-Q-V1.0 (Charging compartment)
Software Version:	5.4
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK
Antenna Type:	Chip antenna
Antenna gain:	2.78dBi(Declare by applicant) Note: Antenna information is provided by applicant, Testing lab is not responsible for the accuracy of the information.
Battery	DC 3.7V 28mAh
Power supply:	DC 3.7V From Battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

2.2 Test mode

Charging mode	Headphones are charged through an adapter
Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: For battery operated equipment, the EUT was performed using a new DC 3.7V battery.</i>	

2.3 Description of Support Units

Equipment	Model	S/N	Manufacturer
Adapter	MDY-11-EM	/	Xiaomi
/	/	/	/

2.4 Deviation from Standards

None.

2.5 Abnormalities from Standard Conditions

None.

2.6 Test Facility

Test laboratory:	Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number:	L11864
A2LA Certificate Number:	6640.01
FCC Designation Number:	CN1326
FCC Test Firm Registration:	183064

2.7 Test Location

All tests were performed at:	
Laboratory location:	No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86 755 85259392
Fax:	+86 755 27219460

2.8 Additional Instructions

Test Software	FCC_assist_1.0.2.2
Power level setup	Default

3 Test Instruments list

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	100605	2024.3.12	2025.3.11
2	EMI Test Receiver	Rohde&schwarz	ESCI3	102696	2024.3.12	2025.3.11
3	Loop Antenna	schwarabeck	FMZB 1519 B	FMZB 1519 B	2024.3.19	2026.3.21
4	Broadband antenna	schwarabeck	VULB9168	1064	2024.3.19	2026.3.21
5	Horn antenna	schwarabeck	BBHA9120D	9120D-1145	2024.3.19	2026.3.21
6	amplifier	EMtrace	RP01A	50117	2024.3.12	2025.3.11
7	Artificial power network	schwarabeck	NSLK8127	8127483	2024.3.12	2025.3.11
8	Artificial power network	ETS	3186/2NM	1132	2024.3.12	2025.3.11
9	10dB attenuator	HUBER+SUHNER	10dB	/	2024.3.12	2025.3.11
10	amplifier	Space-Dtronics	EVLAN0118G-P40	19113001	2024.3.12	2025.3.11
11	Filter	Xingbo	XBLBQ-GTA19	210410-3-1	2024.3.12	2025.3.11
12	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2024.3.12	2025.3.11
13	Power detector box	MWRFTest	MW100-PSB	MW201020JYT	2024.3.12	2025.3.11
14	Power meter	Rohde&Schwarz	NRP-Z11	1138.3004.02-117725-vh	2024.3.12	2025.3.11
15	amplifier	SKET	LNPA_1840-50 (18-40GHz)	SK2019040302	2024.3.12	2025.3.11
16	Horn antenna	schwarabeck	BBHA 9170	946	2024.3.19	2026.3.18
17	Spectrum analyzer	Rohde&schwarz	FSU40	1166.1660K43	2024.3.12	2025.3.11

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFTest	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4 Test results and Measurement Data

4.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
<i>The antenna is Chip antenna, the best case gain of the antenna is 2.78 dBi, reference to the appendix II for details.</i>	

4.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane 40cm LISN AUX Equipment E.U.T Test table/Insulation plane 80cm LISN Filter AC power EMI Receiver Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test Instruments:	Refer to section 3.0 for details					
Test mode:	Refer to section 2.2 for details					
Test environment:	Temp.:	21.5°C	Humid.:	34%	Press.:	1017mbar
Test voltage:	DC 5V from adapter with AC 120V 60Hz					
Test results:	Pass					

Remark:

1. Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.
2. Bluetooth does not work in charging mode, test data is charging mode data.


Measurement data:

Line:

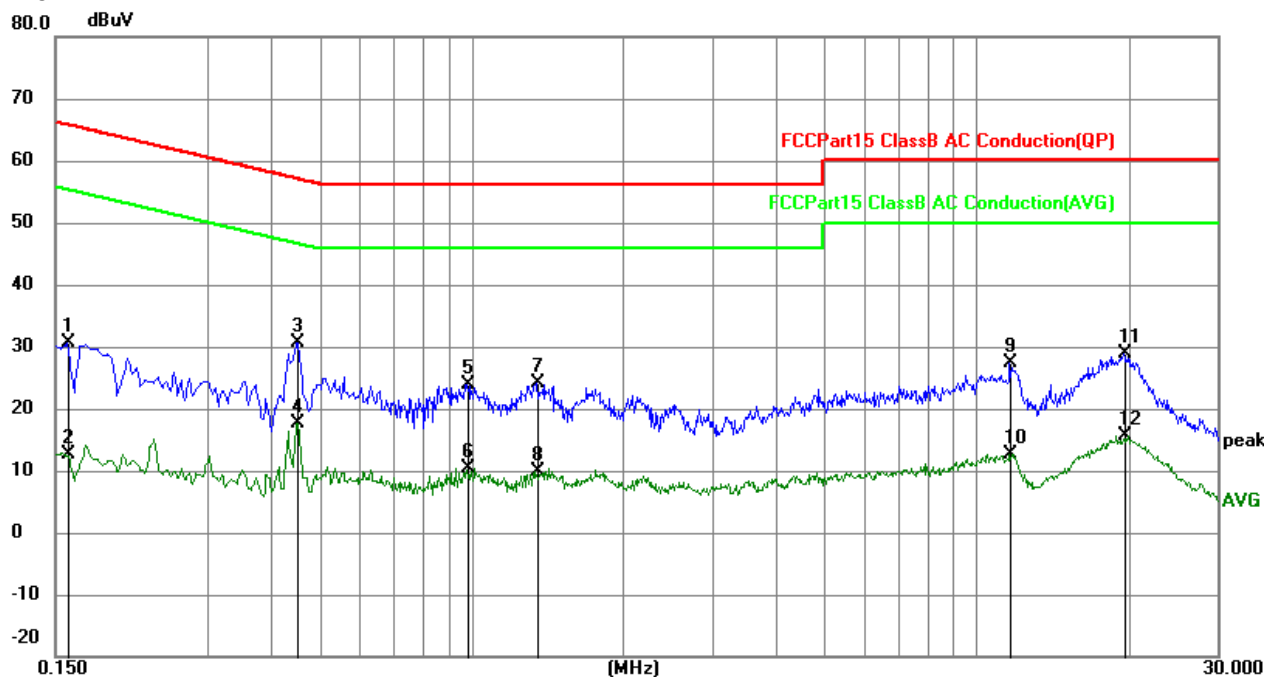

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1590	20.78	9.80	30.58	65.52	-34.94	QP
2	0.1590	2.89	9.80	12.69	55.52	-42.83	AVG
3	0.4515	20.69	9.92	30.61	56.85	-26.24	QP
4	0.4515	7.70	9.92	17.62	46.85	-29.23	AVG
5	0.9825	13.91	9.96	23.87	56.00	-32.13	QP
6	0.9825	0.33	9.96	10.29	46.00	-35.71	AVG
7	1.3470	14.14	9.92	24.06	56.00	-31.94	QP
8	1.3470	0.00	9.92	9.92	46.00	-36.08	AVG
9	11.6745	17.52	9.82	27.34	60.00	-32.66	QP
10	11.6745	2.79	9.82	12.61	50.00	-37.39	AVG
11	19.5450	19.12	9.68	28.80	60.00	-31.20	QP
12	19.5450	5.91	9.68	15.59	50.00	-34.41	AVG

Neutral:

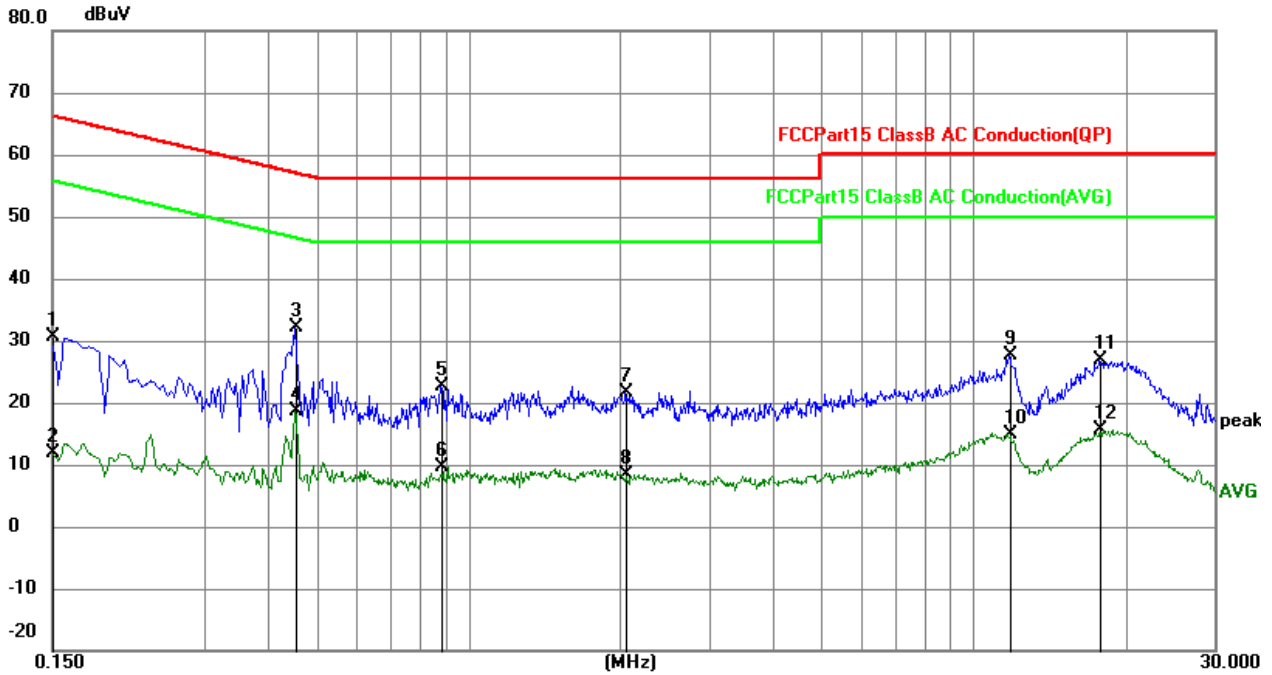


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	20.94	9.80	30.74	66.00	-35.26	QP
2	0.1500	2.17	9.80	11.97	56.00	-44.03	AVG
3	0.4560	22.30	9.93	32.23	56.77	-24.54	QP
4	0.4560	8.59	9.93	18.52	46.77	-28.25	AVG
5	0.8834	12.63	9.96	22.59	56.00	-33.41	QP
6	0.8834	-0.44	9.96	9.52	46.00	-36.48	AVG
7	2.0489	11.83	9.85	21.68	56.00	-34.32	QP
8	2.0489	-1.46	9.85	8.39	46.00	-37.61	AVG
9	11.7555	17.85	9.81	27.66	60.00	-32.34	QP
10	11.7555	4.97	9.81	14.78	50.00	-35.22	AVG
11	17.7630	17.06	9.70	26.76	60.00	-33.24	QP
12	17.7630	5.93	9.70	15.63	50.00	-34.37	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

4.3 Conducted Peak Output Power

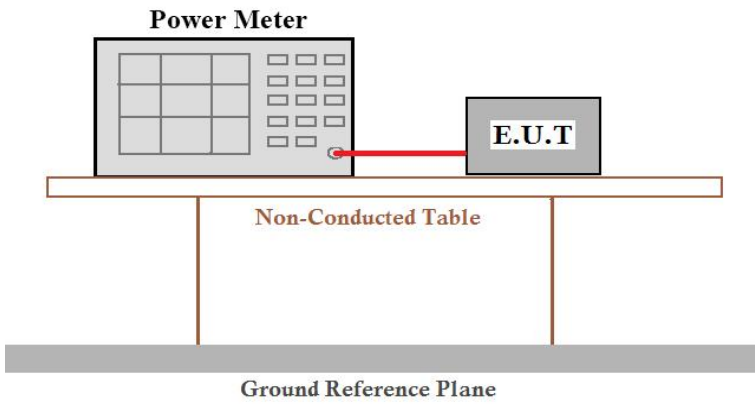Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	20.97dBm
Test setup:	
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test environment:	Temp.: 23.1°C Humid.:34%RH
Test voltage:	DC 3.7V
Test results:	Pass

Measurement Result

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	0.55	20.97	Pass
	Middle	0.58		
	Highest	0.37		
$\pi/4$ -DQPSK	Lowest	1.31	20.97	Pass
	Middle	1.34		
	Highest	1.16		

4.4 20dB Emission Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2013	
Limit:	N/A	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.1°C	Humid.:34%RH
Test voltage:	DC 3.7V	
Test results:	Pass	


Measurement Result

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	1.034	Pass
	Middle	1.038	
	Highest	1.057	
$\pi/4$ -DQPSK	Lowest	1.321	Pass
	Middle	1.332	
	Highest	1.317	


Test plot as follows:

Test mode:


GFSK mode

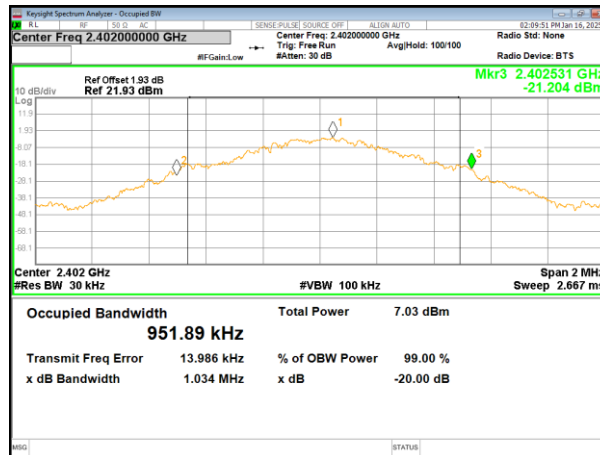

Lowest channel

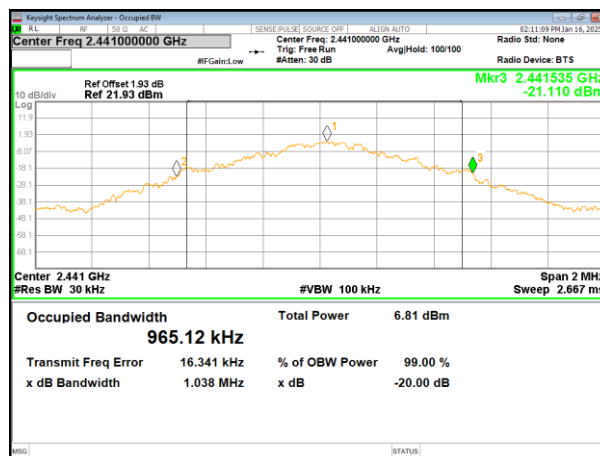


Middle channel

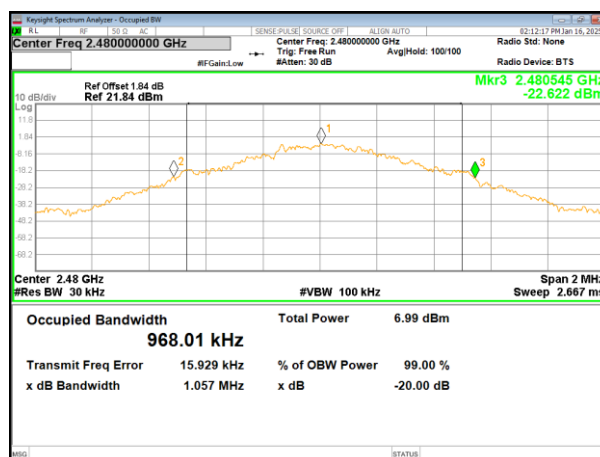


Highest channel

Test mode:


$\pi/4$ -DQPSK mode

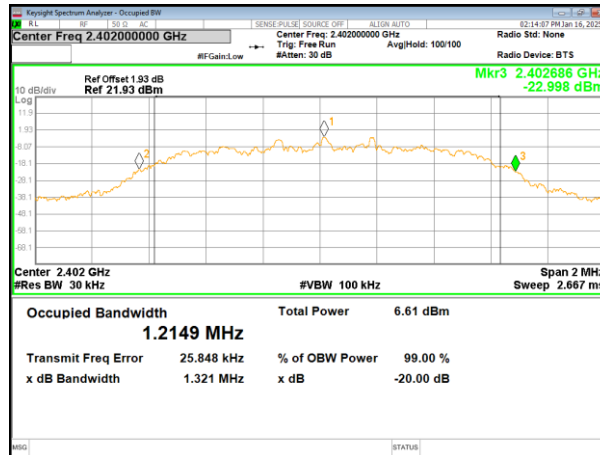

Lowest channel

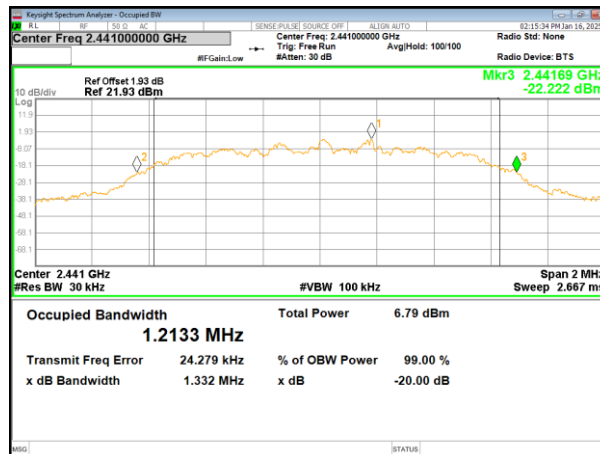


Middle channel

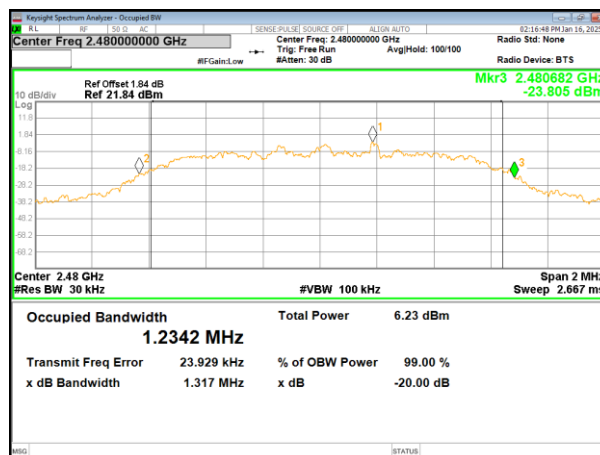

Highest channel

4.5 Carrier Frequencies Separation

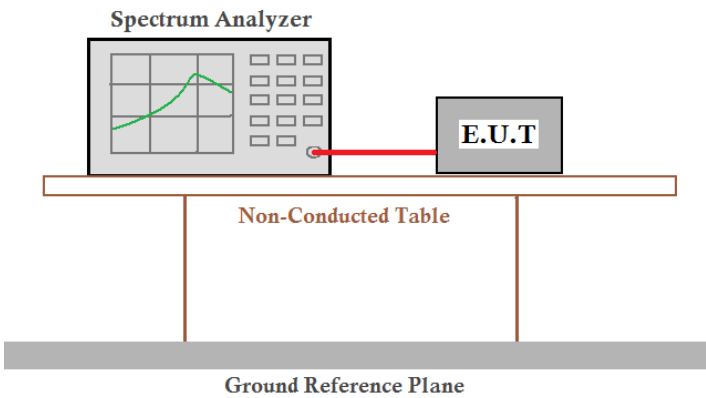Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2013	
Receiver setup:	RBW=300KHz, VBW=1000KHz, detector=Peak	
Limit:	>0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.1°C	Humid.:34%RH
Test voltage:	DC 3.7V	
Test results:	Pass	

Measurement Result


Mode	Test channel	Carrier Frequencies Separation (MHz)	Limit (MHz)	Result
GFSK	Lowest	1.026	0.689	Pass
	Middle	1.164	0.692	Pass
	Highest	1.047	0.705	Pass
$\pi/4$ -DQPSK	Lowest	1.173	0.881	Pass
	Middle	1.056	0.888	Pass
	Highest	1.446	0.878	Pass

Note: According to section 4.4


Test plot as follows:

Modulation mode:


GFSK

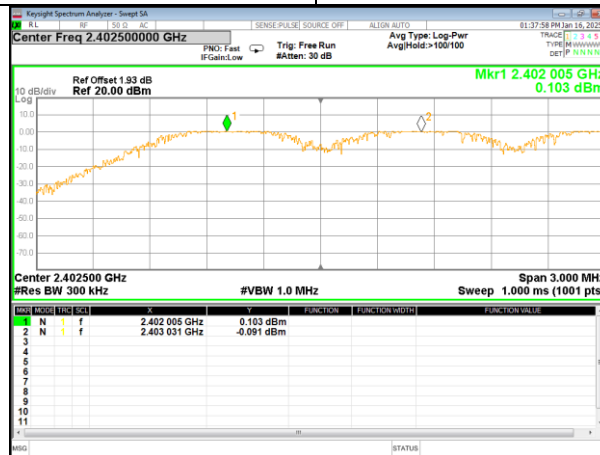

Lowest channel

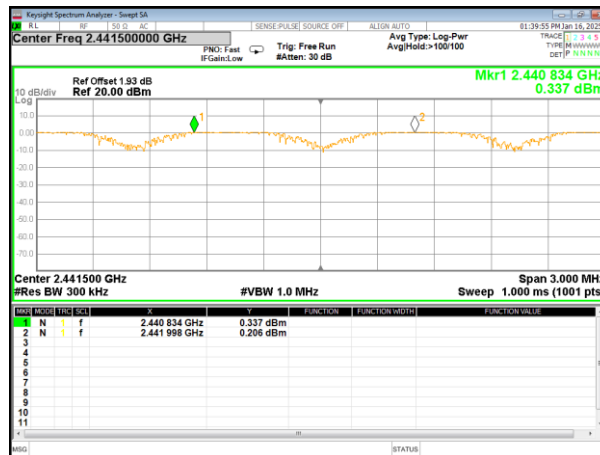


Middle channel

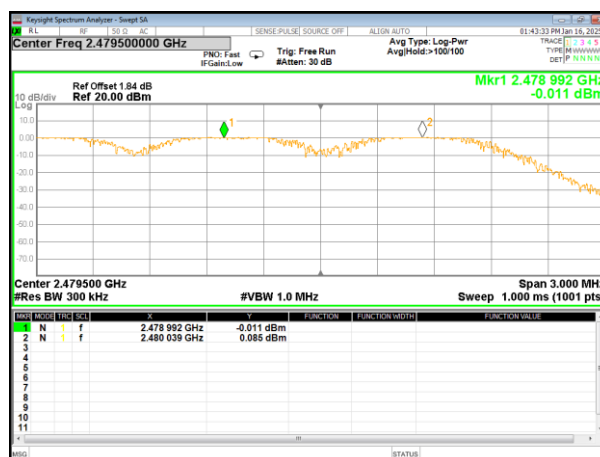


Highest channel

Test mode:


$\pi/4$ -DQPSK

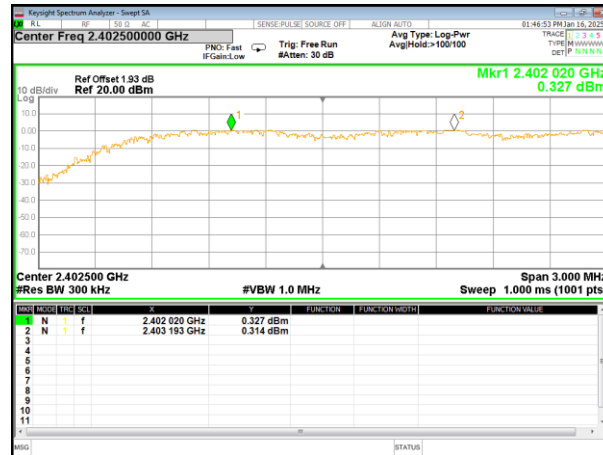

Lowest channel

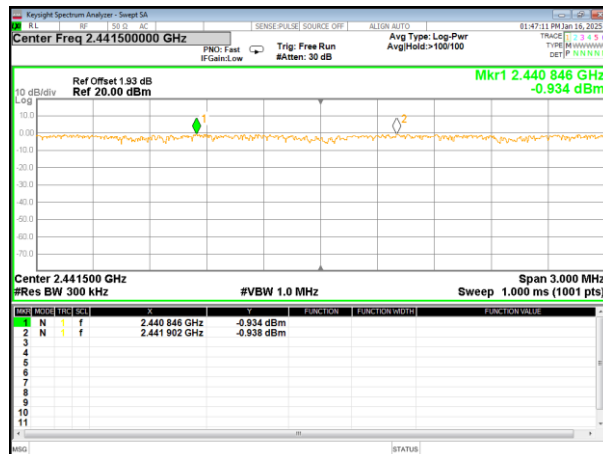


Middle channel

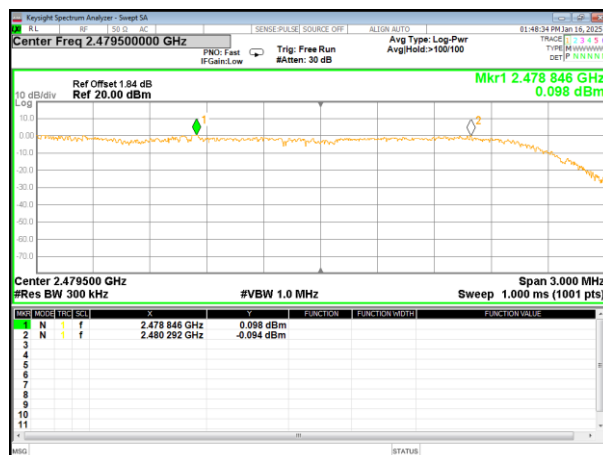

Highest channel

4.6 Hopping Channel Number

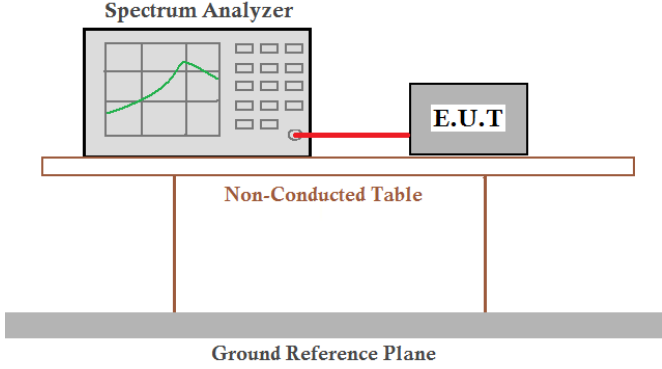
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test environment:	Temp.: 23.1°C Humid.:34%RH
Test voltage:	DC 3.7V
Test results:	Pass

Measurement Data:


Mode	Hopping channel numbers	Limit	Result
GFSK	79	15	Pass
$\pi/4$ -DQPSK	79	15	Pass

Test plot as follows:


Test mode:	GFSK
------------	------

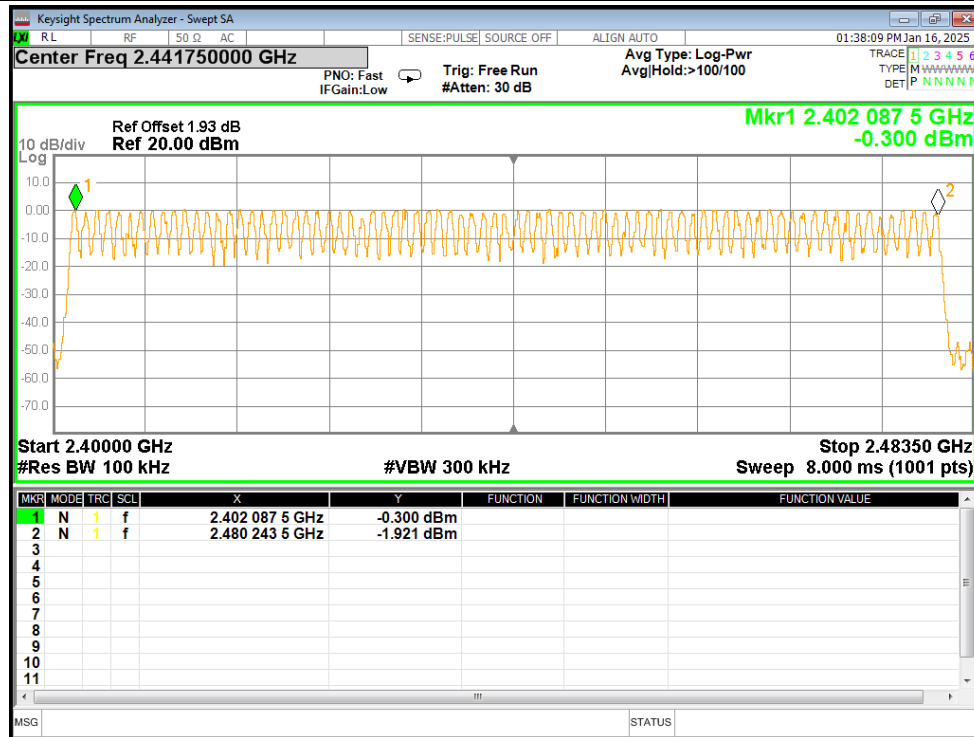

Test mode:	$\pi/4$ -DQPSK
------------	----------------

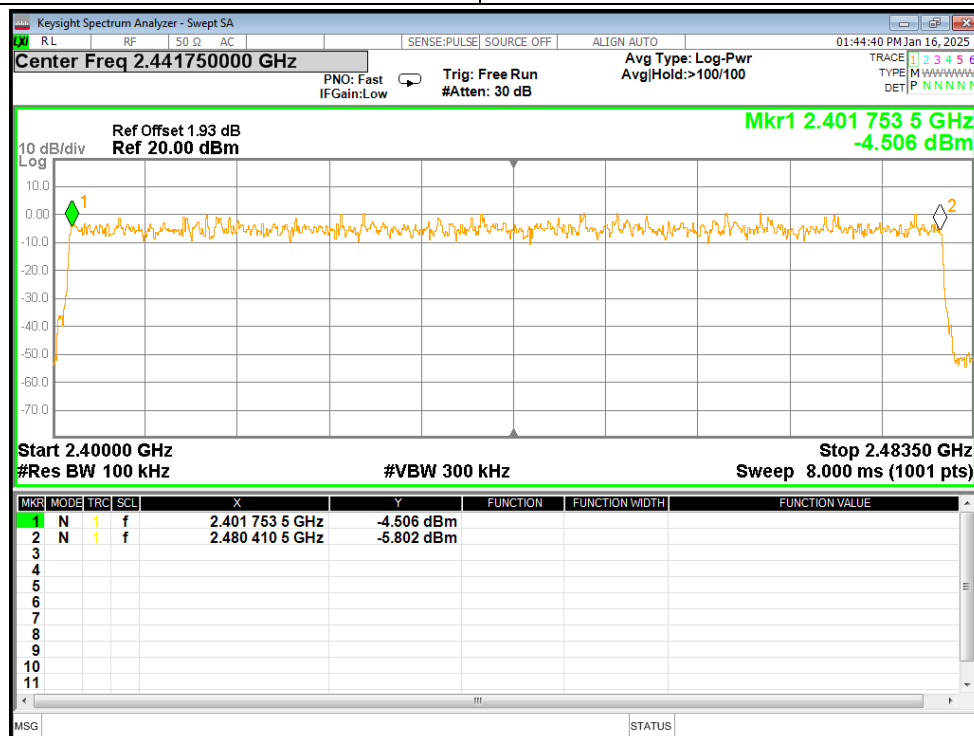

4.7 Dwell Time



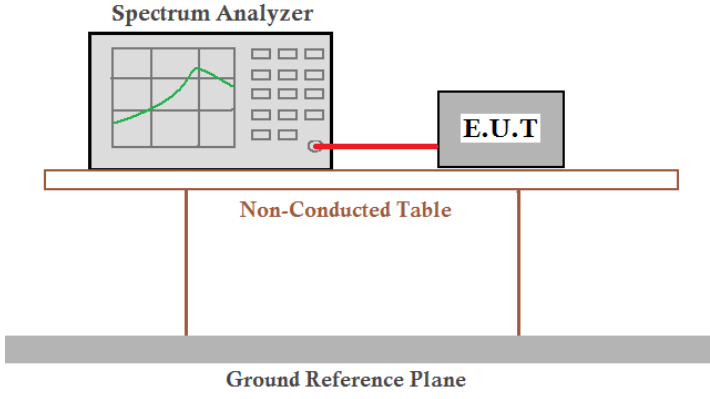
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)	
Test Method:	ANSI C63.10:2013	
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak	
Limit:	0.4 Second	
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.1°C	Humid.: 34%RH
Test voltage:	DC 3.7V	
Test results:	Pass	

Measurement Result

Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Result
1-DH1	2441	0.377	118.755	315	31600	400	Pass
1-DH3	2441	1.632	269.28	165	31600	400	Pass
1-DH5	2441	2.880	345.6	120	31600	400	Pass
2-DH1	2441	0.386	121.204	314	31600	400	Pass
2-DH3	2441	1.638	268.632	164	31600	400	Pass
2-DH5	2441	2.886	340.548	118	31600	400	Pass


Test plot as follows:



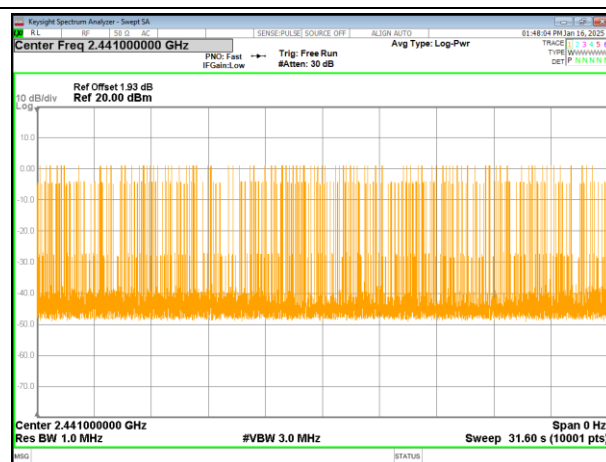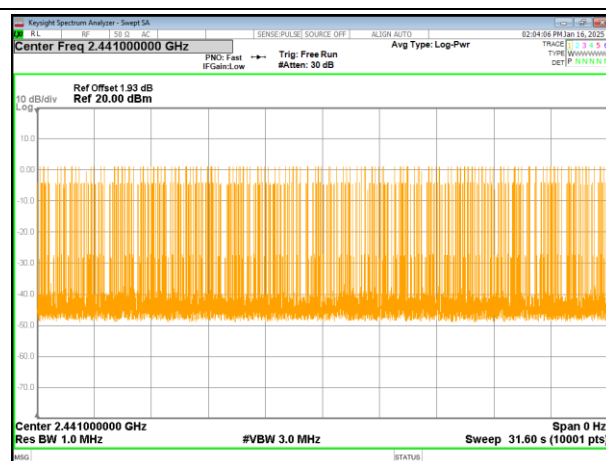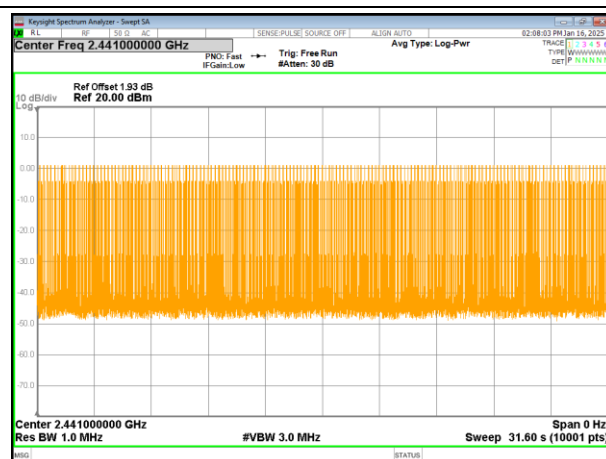

4.8 Band Edge

4.8.1 Conducted Emission Method

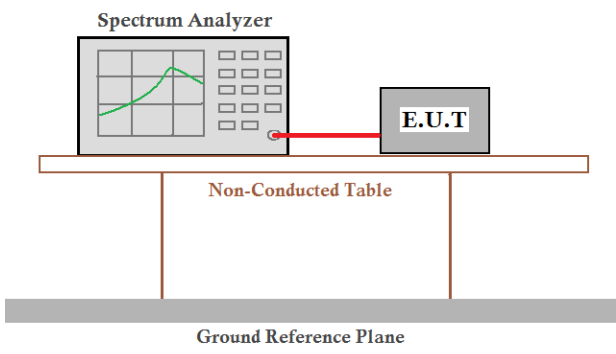Test Requirement:	FCC Part15 C Section 15.247 (d)	
Test Method:	ANSI C63.10:2013	
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.1°C	Humid.: 34%RH
Test voltage:	DC 3.7V	
Test results:	Pass	

Test plot as follows:


GFSK Mode:





No-hopping mode

Hopping mode


Test channel:

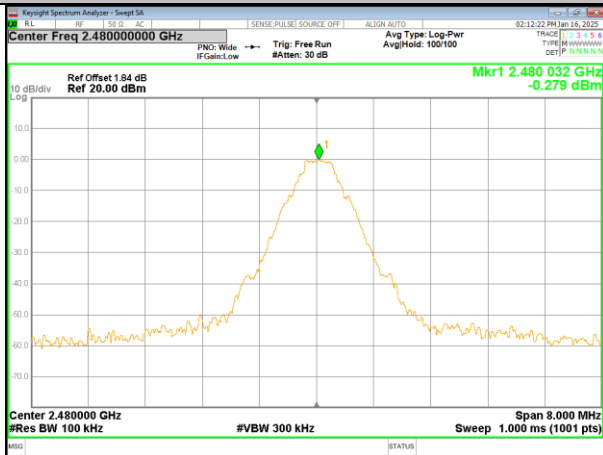

Highest channel

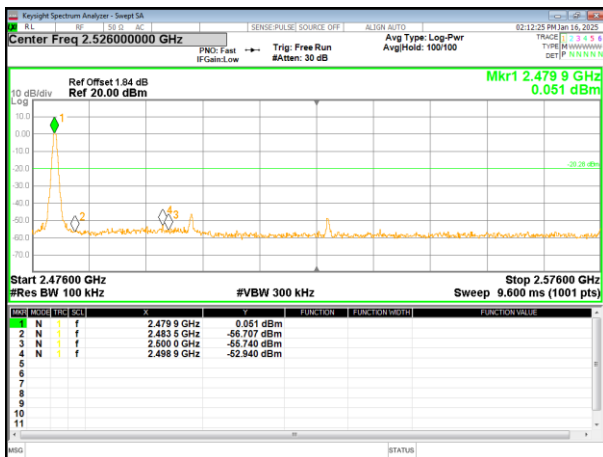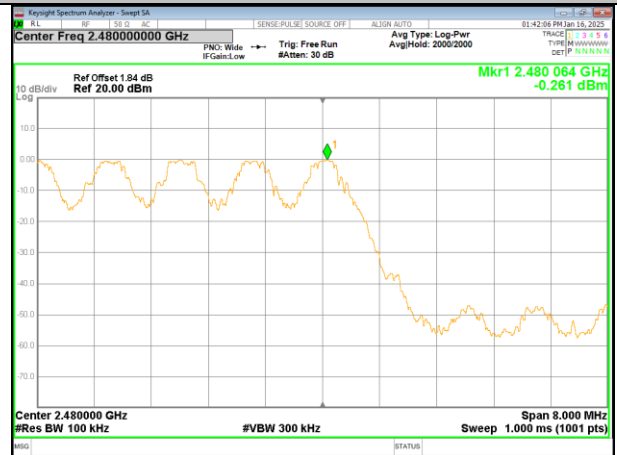


No-hopping mode

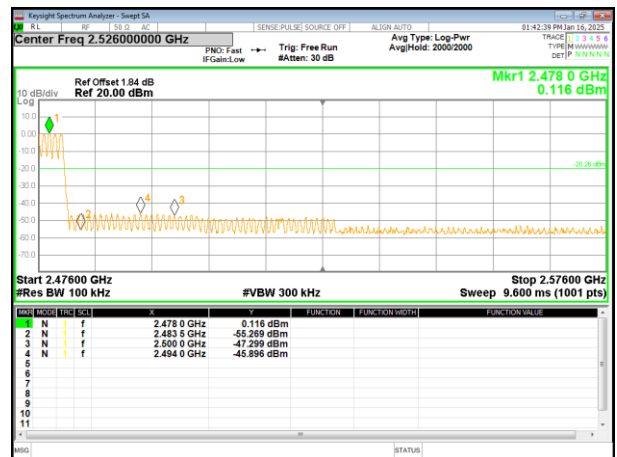

Hopping mode


$\pi/4$ -DQPSK Mode:

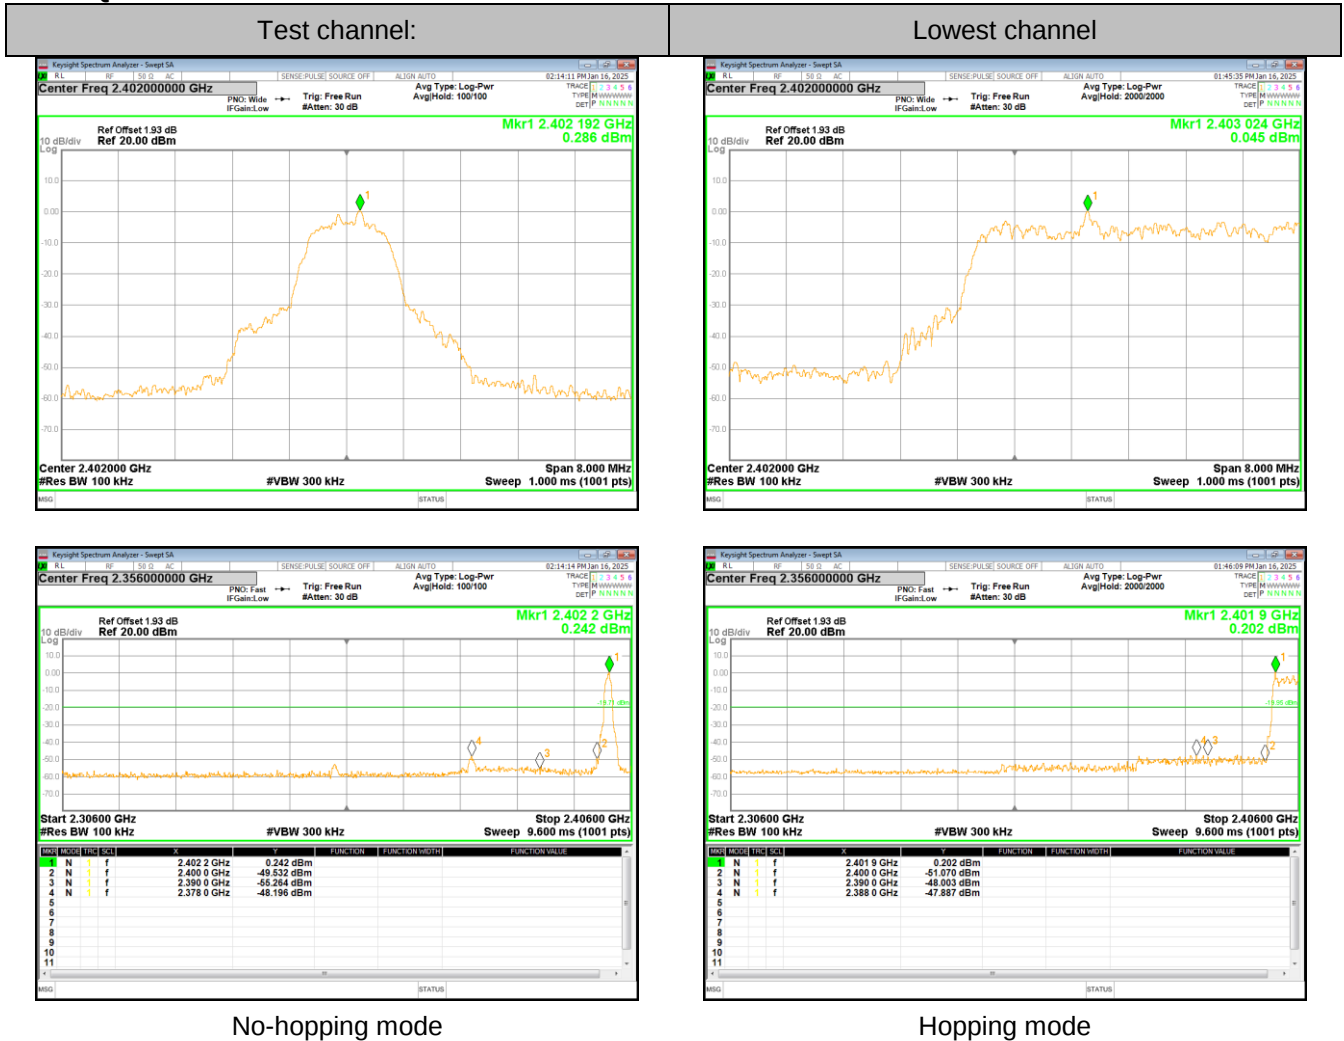


No-hopping mode

Hopping mode


Test channel:

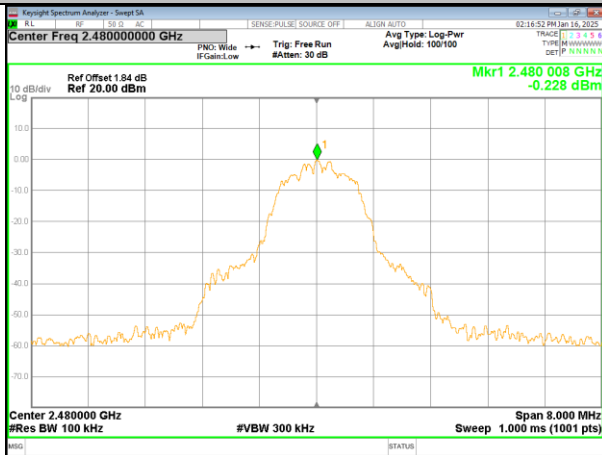

Highest channel

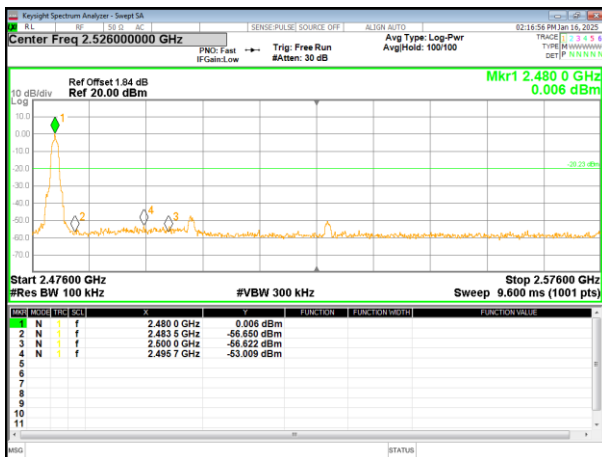


No-hopping mode

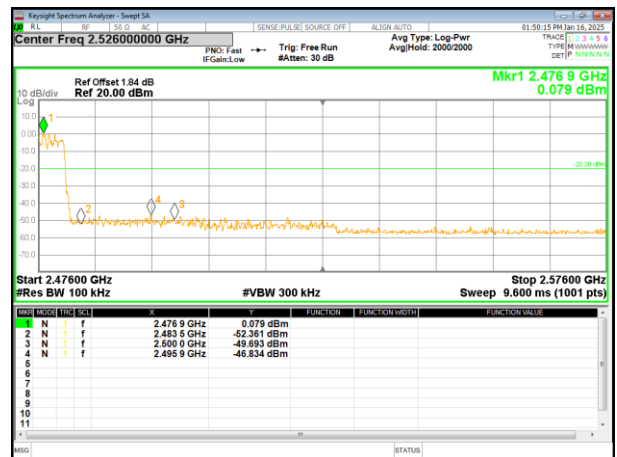

Hopping mode

4.8.2 Radiated Emission Method

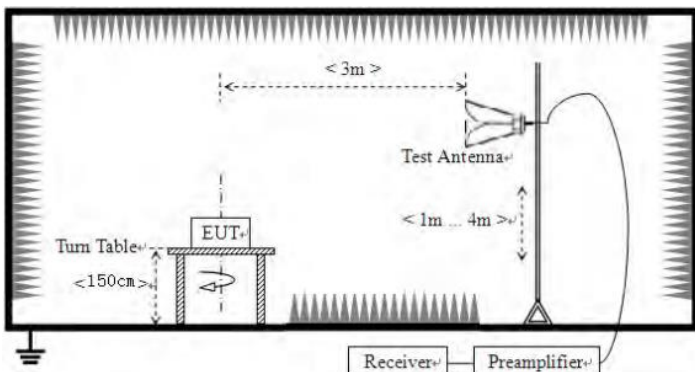Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test Instruments:	Refer to section 3.0 for details				
Test mode:	Refer to section 2.2 for details				
Test environment:	Temp.: 22.2°C			Humid.: 33%RH	
Test voltage:	DC 3.7V				
Test results:	Pass				

Remark: During the test, pre-scan the GFSK, $\pi/4$ -DQPSK modulation, and found the $\pi/4$ -DQPSK modulation which it is worse case.

Measurement Data

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	62.28	27.40	3.41	45.40	47.69	74.00	-26.31	Horizontal
2390.00	65.59	27.10	3.43	45.40	50.72	74.00	-23.28	Horizontal
2400.00	64.72	27.10	3.43	45.40	49.85	74.00	-24.15	Horizontal
2310.00	63.24	27.40	3.41	45.40	48.65	74.00	-25.35	Vertical
2390.00	64.29	27.10	3.43	45.40	49.42	74.00	-24.58	Vertical
2400.00	65.5	27.10	3.43	45.40	50.63	74.00	-23.37	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	52.34	27.40	3.41	45.40	37.75	54.00	-16.25	Horizontal
2390.00	53.43	27.10	3.43	45.40	38.56	54.00	-15.44	Horizontal
2400.00	55.70	27.10	3.43	45.40	40.83	54.00	-13.17	Horizontal
2310.00	51.90	27.40	3.41	45.40	37.31	54.00	-16.69	Vertical
2390.00	53.11	27.10	3.43	45.40	38.24	54.00	-15.76	Vertical
2400.00	54.76	27.10	3.43	45.40	39.89	54.00	-14.11	Vertical

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	66.95	27.80	3.56	45.40	52.91	74.00	-21.09	Horizontal
2500.00	63.89	27.80	3.56	45.40	49.85	74.00	-24.15	Horizontal
2483.50	67.42	27.80	3.56	45.40	53.38	74.00	-20.62	Vertical
2500.00	63.68	27.80	3.56	45.40	49.64	74.00	-24.36	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	55.98	27.80	3.56	45.40	41.94	54.00	-12.06	Horizontal
2500.00	53.23	27.80	3.56	45.40	39.19	54.00	-14.81	Horizontal
2483.50	56.60	27.80	3.56	45.40	42.56	54.00	-11.44	Vertical
2500.0	53.80	27.80	3.56	45.40	39.76	54.00	-14.24	Vertical

Remarks:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

4.9 Spurious Emission


4.9.1 Conducted Emission Method

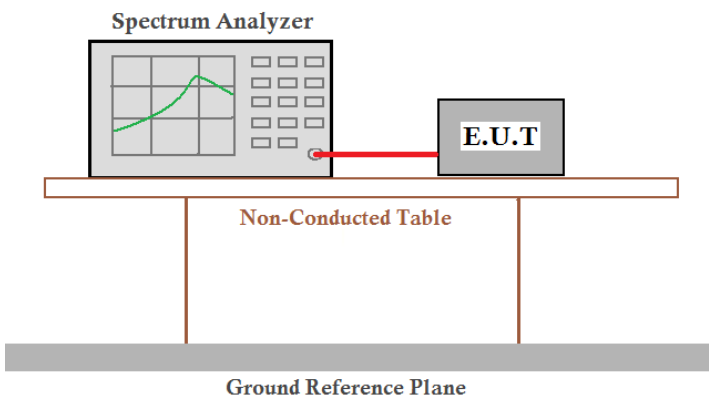Test Requirement:	FCC Part15 C Section 15.247 (d)	
Test Method:	ANSI C63.10:2013	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.1°C	Humid.: 34%RH
Test voltage:	DC 3.7V	
Test results:	Pass	


GFSK mode:


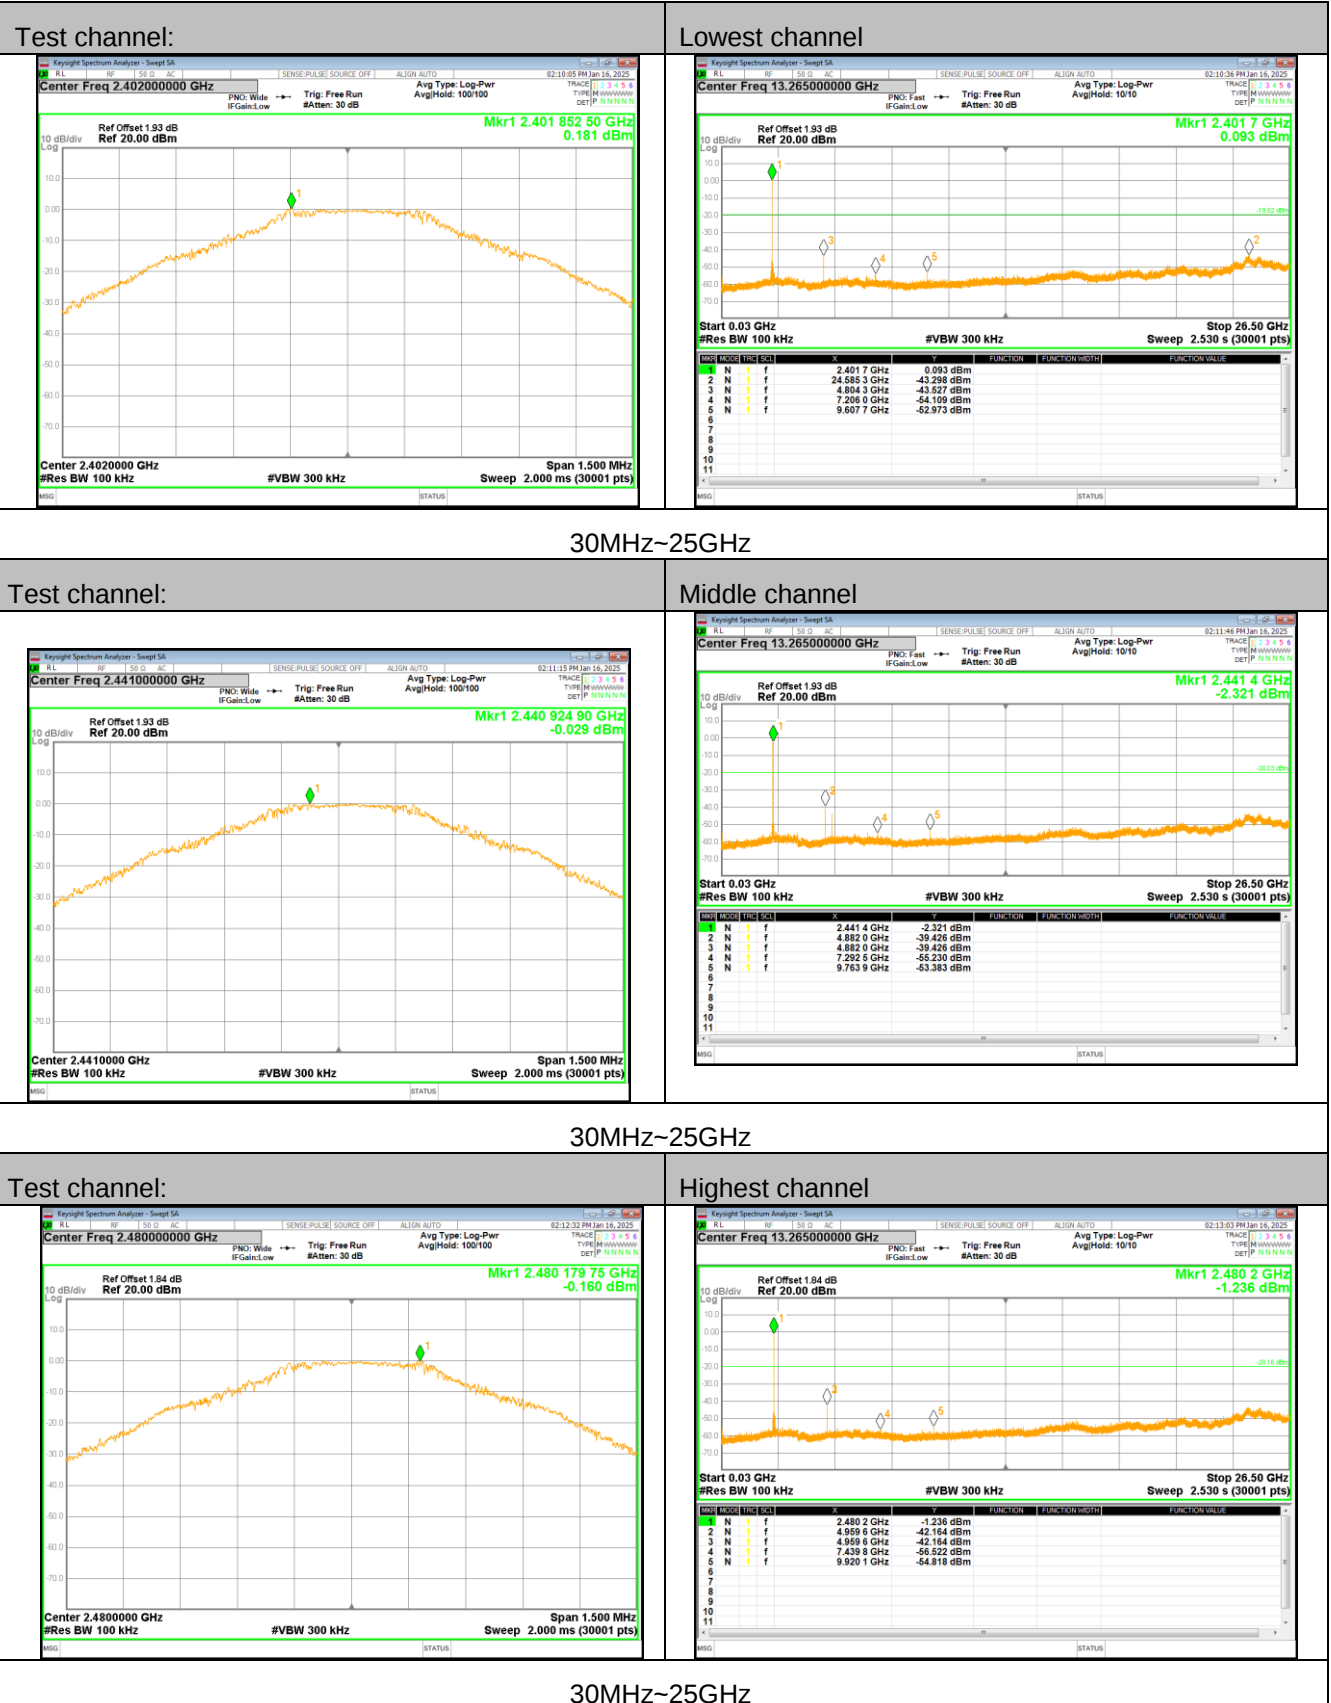


$\pi/4$ -DQPSK mode:

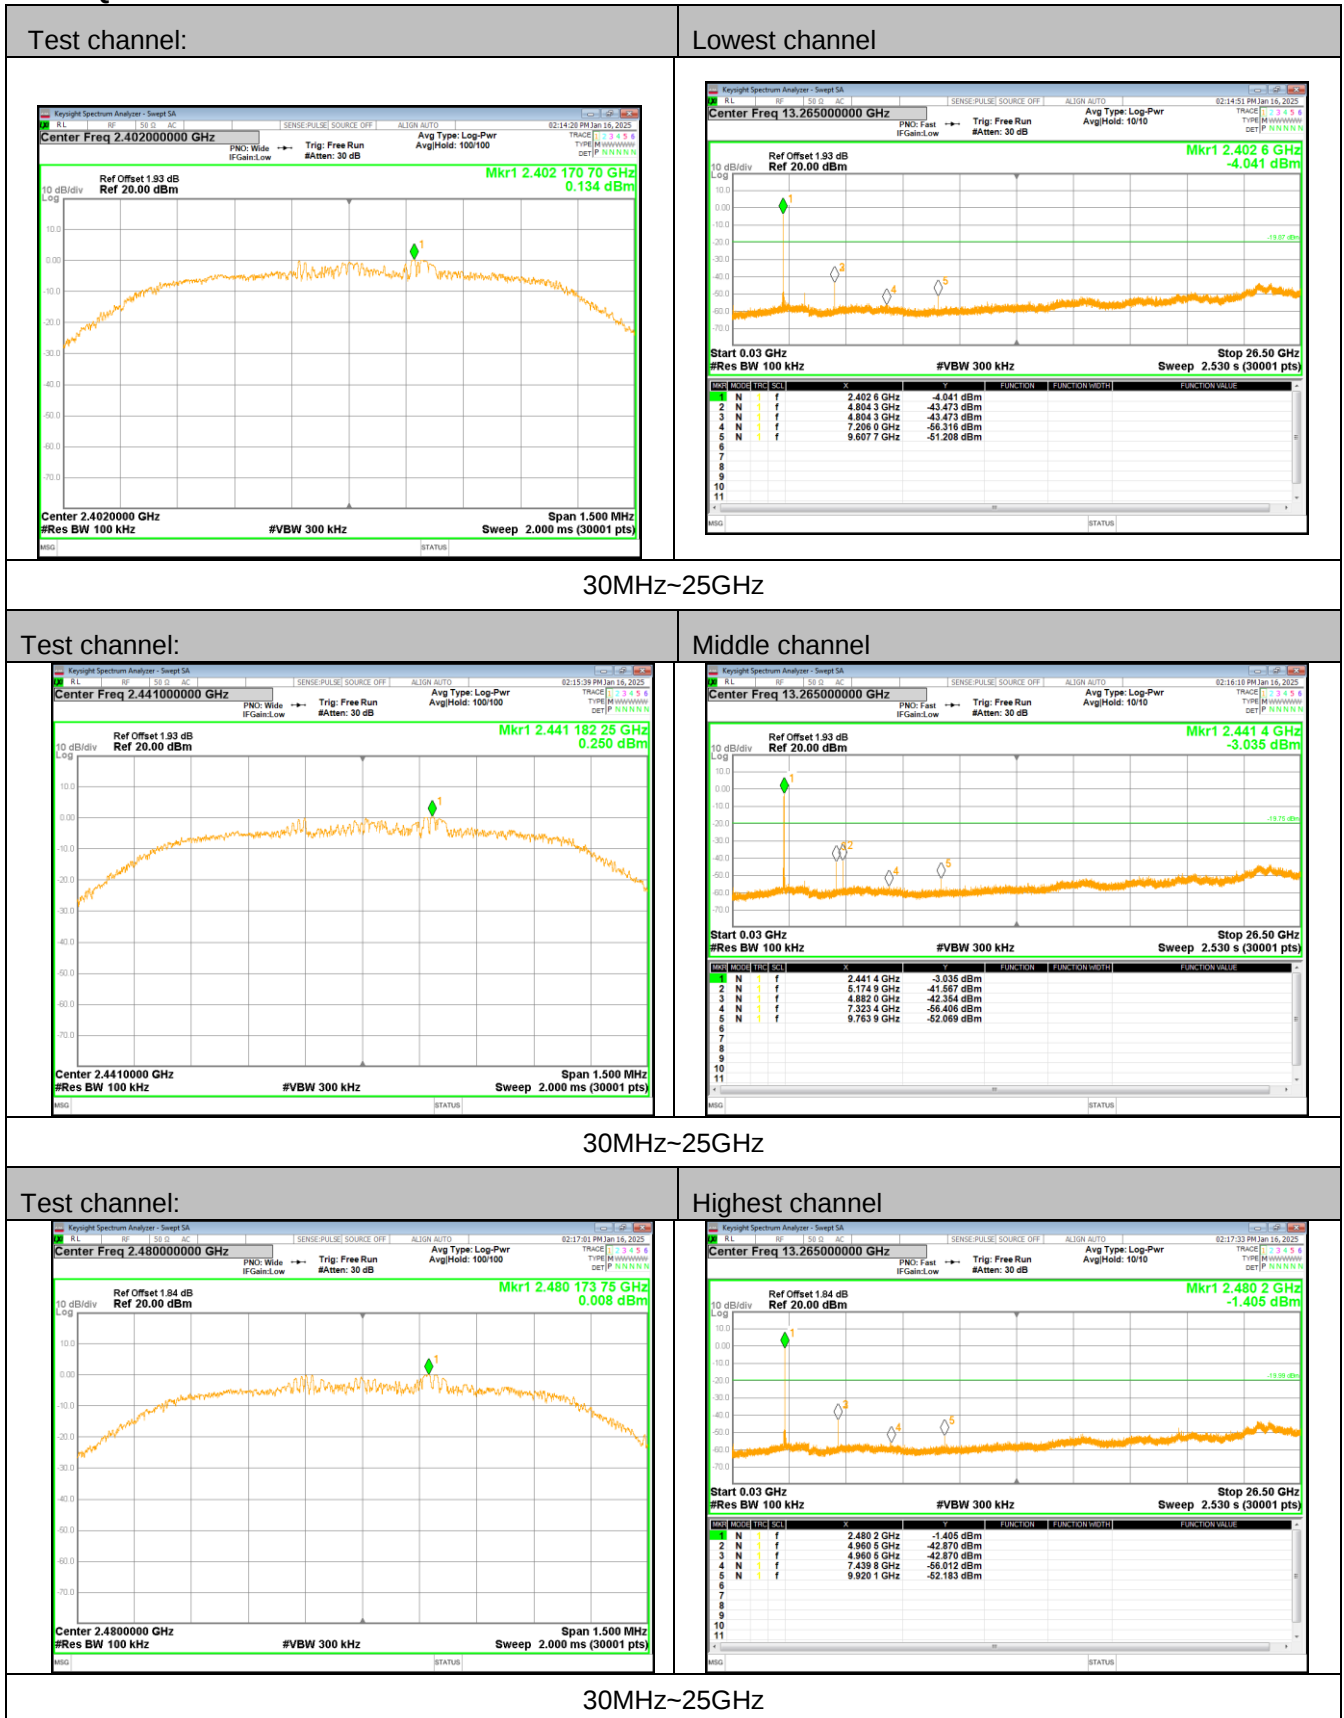

4.9.2 Radiated Emission Method

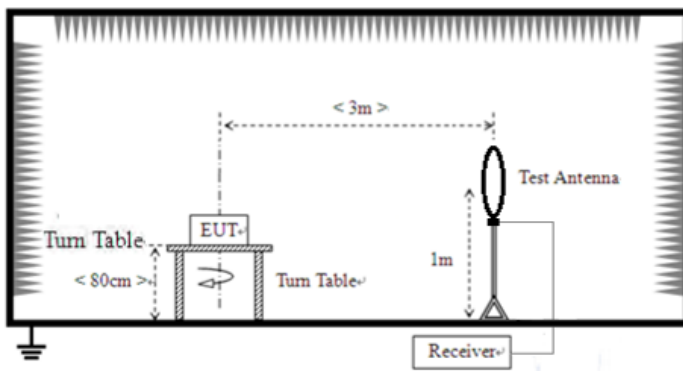Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					

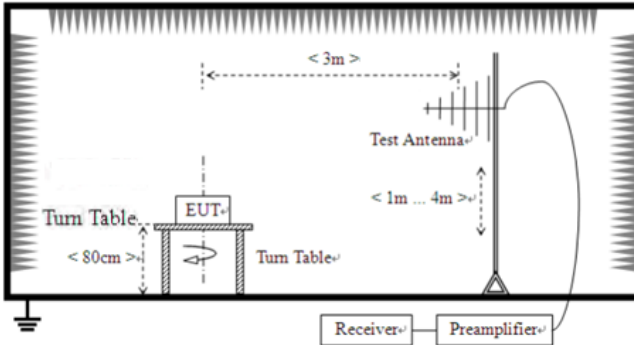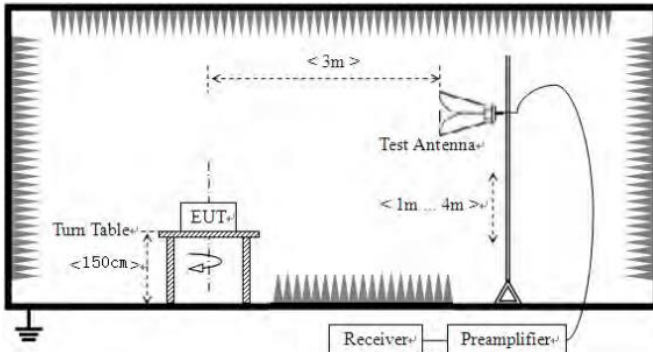	For radiated emissions from 30MHz to1GHz  For radiated emissions above 1GHz 					
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test Instruments:	Refer to section 3.0 for details					
Test mode:	Refer to section 2.2 for details					
Test environment:	Temp.:	22.2°C	Humid.:	33%	Press.:	1012mbar
Test results:	Pass					

Measurement data:

Remarks:


1. *During the test, pre-scan the GFSK, $\pi/4$ -DQPSK modulation, and found the $\pi/4$ -DQPSK modulation which it is worse case.*
2. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

■ **9kHz~30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

■ Below 1GHz

Pre-scan all test modes, found worst case at $\pi/4$ -DQPSK (2441MHz), and report only show the test result of $\pi/4$ -DQPSK (2441MHz).

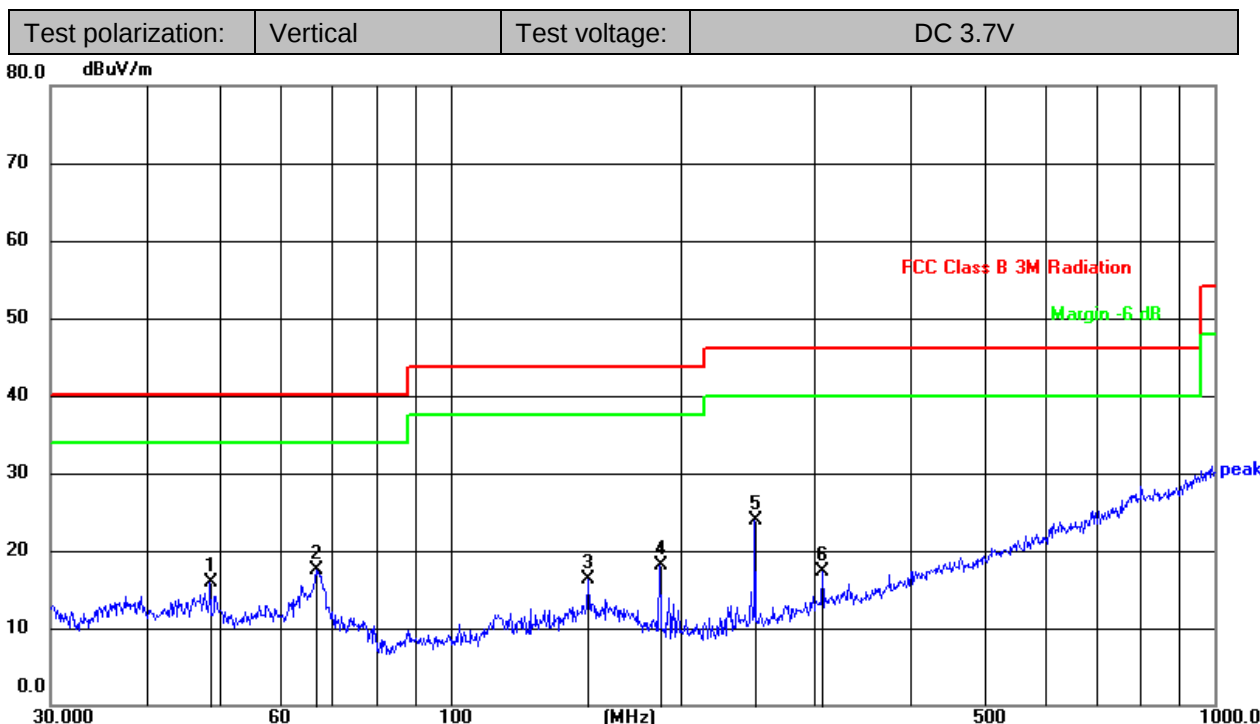


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	48.5016	37.63	-21.63	16.00	40.00	-24.00	QP
2	66.7325	41.12	-23.63	17.49	40.00	-22.51	QP
3	151.5972	36.90	-20.51	16.39	43.50	-27.11	QP
4	187.7530	40.99	-22.97	18.02	43.50	-25.48	QP
5	250.3012	46.09	-22.25	23.84	46.00	-22.16	QP
6	306.7537	37.20	-19.99	17.21	46.00	-28.79	QP

Level = Reading + Factor, Margin=level-Limit

Factor= Antenna Factor + Cable Loss – Preamplifier Factor

Test polarization:	Horizontal	Test voltage:	DC 3.7V
--------------------	------------	---------------	---------

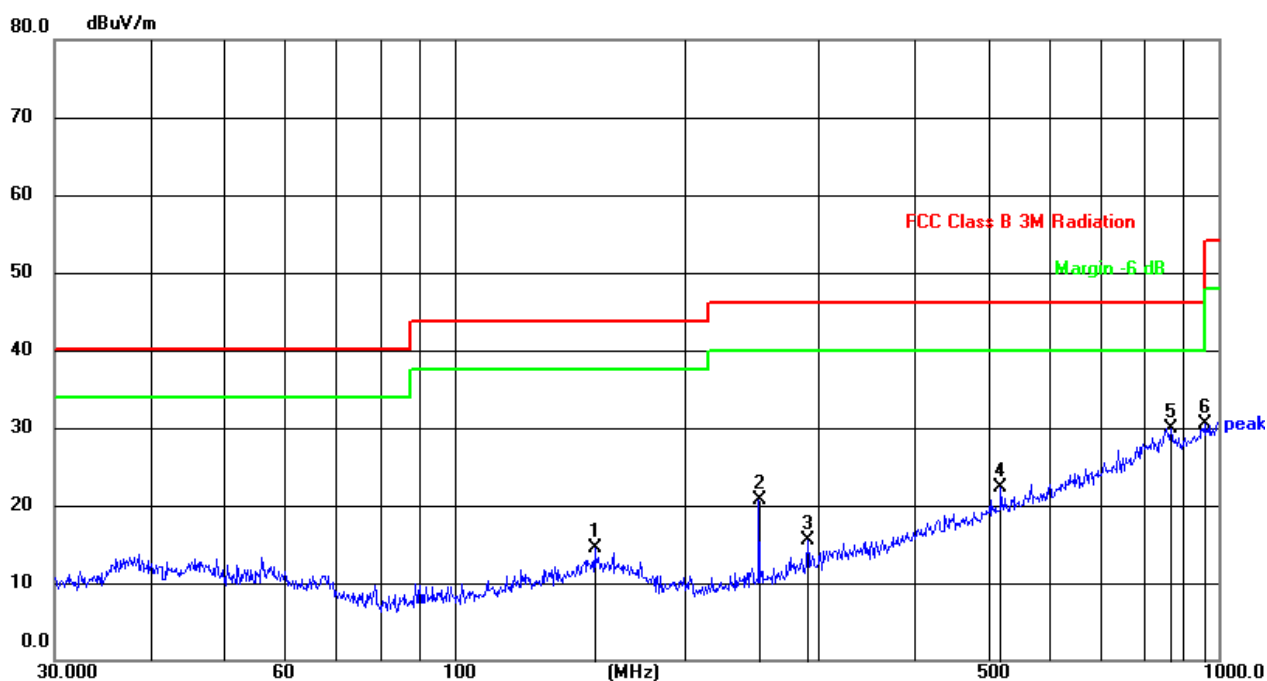

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	152.6641	35.06	-20.52	14.54	43.50	-28.96	QP
2	250.3012	42.89	-22.25	20.64	46.00	-25.36	QP
3	290.0172	36.39	-20.80	15.59	46.00	-30.41	QP
4	519.0649	35.89	-13.67	22.22	46.00	-23.78	QP
5	866.0879	35.89	-6.01	29.88	46.00	-16.12	QP
6	958.7943	34.28	-3.73	30.55	46.00	-15.45	QP

Level = Reading + Factor, Margin=level-Limit

Factor= Antenna Factor + Cable Loss – Preamplifier Factor

■ Above 1GHz

Pre-scan all test modes, found worst case at $\pi/4$ -DQPSK, and report only show the test result of $\pi/4$ -DQPSK.

Test channel:	Lowest	Test voltage:	DC 3.7V
---------------	--------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	55.49	32.10	5.96	45.70	47.85	74.00	-26.15	Vertical
7206.00	51.95	36.10	6.86	45.50	49.41	74.00	-24.59	Vertical
9608.00	49.37	38.30	8.25	46.20	49.72	74.00	-24.28	Vertical
12010.00	*	--	--	--	--	74.00	--	Vertical
14412.00	*	--	--	--	--	74.00	--	Vertical
4804.00	55.45	32.10	5.96	45.70	47.81	74.00	-26.19	Horizontal
7206.00	51.26	36.10	6.86	45.50	48.72	74.00	-25.28	Horizontal
9608.00	49.57	38.30	8.25	46.20	49.92	74.00	-24.08	Horizontal
12010.00	*	--	--	--	--	74.00	--	Horizontal
14412.00	*	--	--	--	--	74.00	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	45.51	32.10	5.96	45.70	37.87	54.00	-16.13	Vertical
7206.00	41.60	36.10	6.86	45.50	39.06	54.00	-14.94	Vertical
9608.00	38.50	38.30	8.25	46.20	38.85	54.00	-15.15	Vertical
12010.00	*	--	--	--	--	54.00	--	Vertical
14412.00	*	--	--	--	--	54.00	--	Vertical
4804.00	45.71	32.10	5.96	45.70	38.07	54.00	-15.93	Horizontal
7206.00	40.16	36.10	6.86	45.50	37.62	54.00	-16.38	Horizontal
9608.00	38.57	38.30	8.25	46.20	38.92	54.00	-15.08	Horizontal
12010.00	*	--	--	--	--	54.00	--	Horizontal
14412.00	*	--	--	--	--	54.00	--	Horizontal

Test channel:	Middle	Test voltage:	DC 3.7V
---------------	--------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	54.73	32.10	5.96	45.70	47.09	74.00	-26.91	Vertical
7323.00	50.69	36.80	6.86	45.50	48.85	74.00	-25.15	Vertical
9764.00	47.51	38.40	8.25	46.20	47.96	74.00	-26.04	Vertical
12205.00	*	--	--	--	--	74.00	--	Vertical
14646.00	*	--	--	--	--	74.00	--	Vertical
4882.00	55.07	32.10	5.96	45.70	47.43	74.00	-26.57	Horizontal
7323.00	52.68	36.80	6.86	45.50	50.84	74.00	-23.16	Horizontal
9764.00	49.72	38.40	8.25	46.20	50.17	74.00	-23.83	Horizontal
12205.00	*	--	--	--	--	74.00	--	Horizontal
14646.00	*	--	--	--	--	74.00	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	45.57	32.10	5.96	45.70	37.93	54.00	-16.07	Vertical
7323.00	41.23	36.80	6.86	45.50	39.39	54.00	-14.61	Vertical
9764.00	38.25	38.40	8.25	46.20	38.70	54.00	-15.30	Vertical
12205.00	*	--	--	--	--	54.00	--	Vertical
14646.00	*	--	--	--	--	54.00	--	Vertical
4882.00	45.60	32.10	5.96	45.70	37.96	54.00	-16.04	Horizontal
7323.00	41.62	36.80	6.86	45.50	39.78	54.00	-14.22	Horizontal
9764.00	38.94	38.40	8.25	46.20	39.39	54.00	-14.61	Horizontal
12205.00	*	--	--	--	--	54.00	--	Horizontal
14646.00	*	--	--	--	--	54.00	--	Horizontal

Test channel:	Highest	Test voltage:	DC 3.7V
---------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	54.45	32.70	5.96	45.70	47.41	74.00	-26.59	Vertical
7440.00	52.08	36.40	6.86	45.50	49.84	74.00	-24.16	Vertical
9920.00	49.44	38.00	8.25	46.20	49.49	74.00	-24.51	Vertical
12400.00	*	--	--	--	--	74.00	--	Vertical
14880.00	*	--	--	--	--	74.00	--	Vertical
4960.00	56.03	32.70	5.96	45.70	48.99	74.00	-25.01	Horizontal
7440.00	51.96	36.40	6.86	45.50	49.72	74.00	-24.28	Horizontal
9920.00	49.90	38.00	8.25	46.20	49.95	74.00	-24.05	Horizontal
12400.00	*	--	--	--	--	74.00	--	Horizontal
14880.00	*	--	--	--	--	74.00	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	44.87	32.70	5.96	45.70	37.83	54.00	-16.17	Vertical
7440.00	41.43	36.40	6.86	45.50	39.19	54.00	-14.81	Vertical
9920.00	39.77	38.00	8.25	46.20	39.82	54.00	-14.18	Vertical
12400.00	*	--	--	--	--	54.00	--	Vertical
14880.00	*	--	--	--	--	54.00	--	Vertical
4960.00	44.62	32.70	5.96	45.70	37.58	54.00	-16.42	Horizontal
7440.00	41.06	36.40	6.86	45.50	38.82	54.00	-15.18	Horizontal
9920.00	38.15	38.00	8.25	46.20	38.20	54.00	-15.80	Horizontal
12400.00	*	--	--	--	--	54.00		Horizontal
14880.00	*	--	--	--	--	54.00		Horizontal

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

5 Test Setup Photo

Reference to the **appendix I** for details.

6 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----